


Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

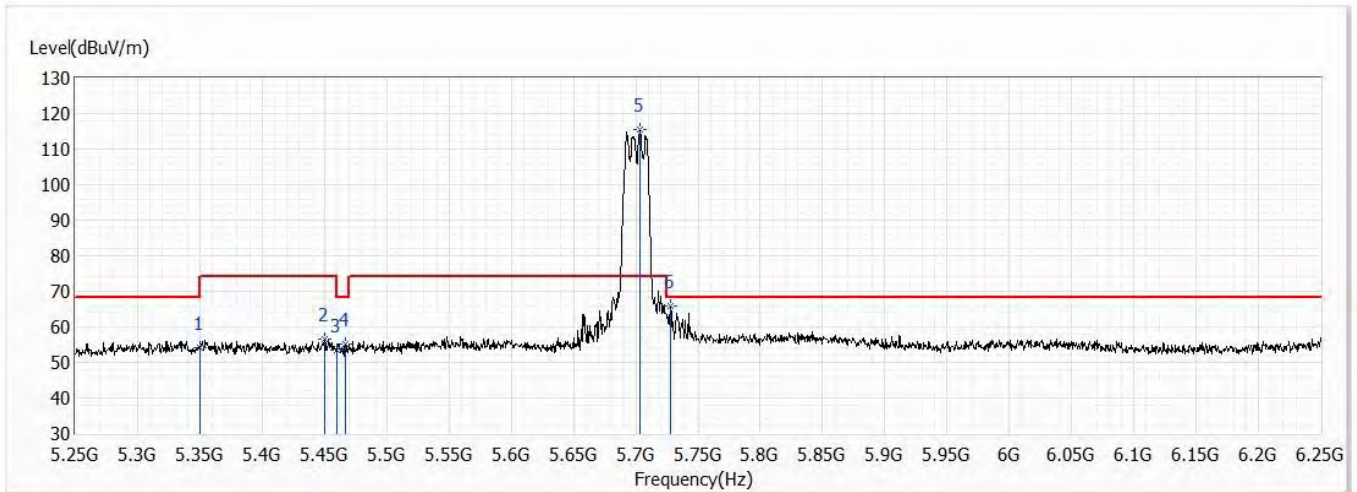


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.22	74.00	-19.78	32.91	21.31	PK
2	5450.000	56.49	74.00	-17.51	34.85	21.64	PK
3	5460.000	53.46	74.00	-20.54	31.80	21.66	PK
4	5467.000	55.14	68.20	-13.06	33.47	21.67	PK
! 5	5703.500	115.50	74.00	41.50	93.72	21.78	PK
6	5728.000	65.85	68.20	-2.35	43.81	22.04	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

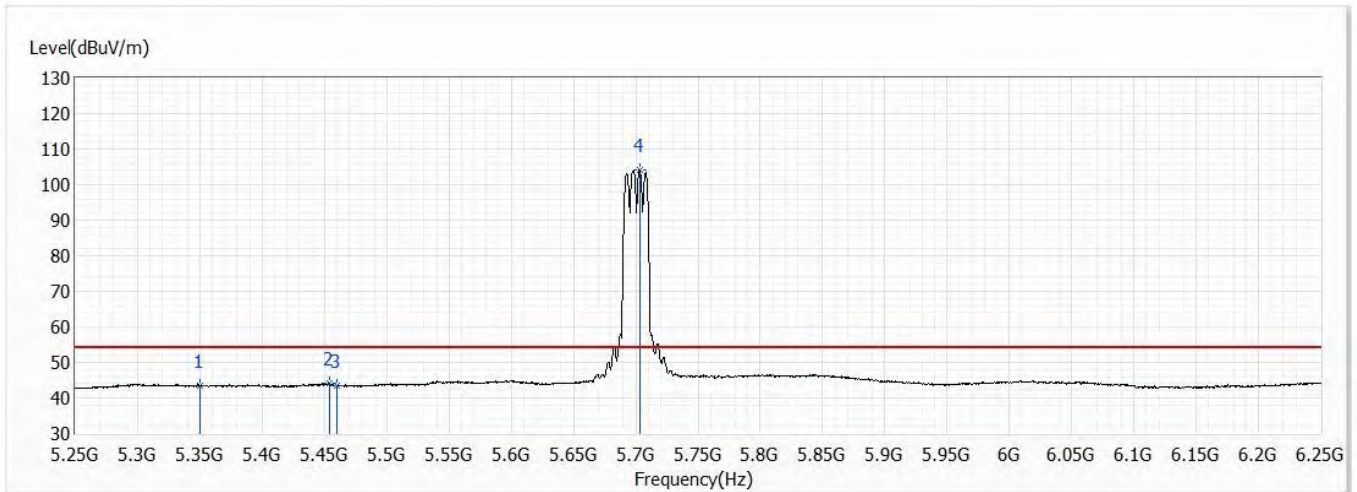


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.37	54.00	-10.63	22.06	21.31	AV
2	5454.000	44.01	54.00	-9.99	22.36	21.65	AV
3	5460.000	43.49	54.00	-10.51	21.83	21.66	AV
! 4	5703.000	104.18	54.00	50.18	82.40	21.78	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

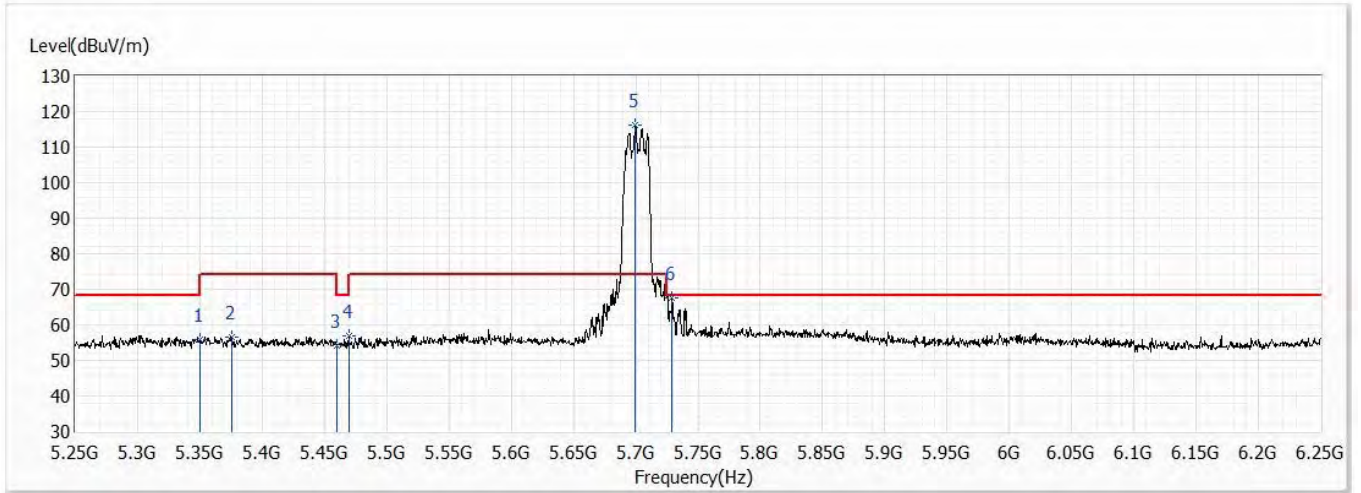


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.86	74.00	-18.14	34.55	21.31	PK
2	5376.000	56.71	74.00	-17.29	35.23	21.48	PK
3	5460.000	54.30	74.00	-19.70	32.64	21.66	PK
4	5469.500	56.88	68.20	-11.32	35.20	21.68	PK
! 5	5699.500	116.05	74.00	42.05	94.31	21.74	PK
6	5729.000	67.43	68.20	-0.77	45.37	22.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

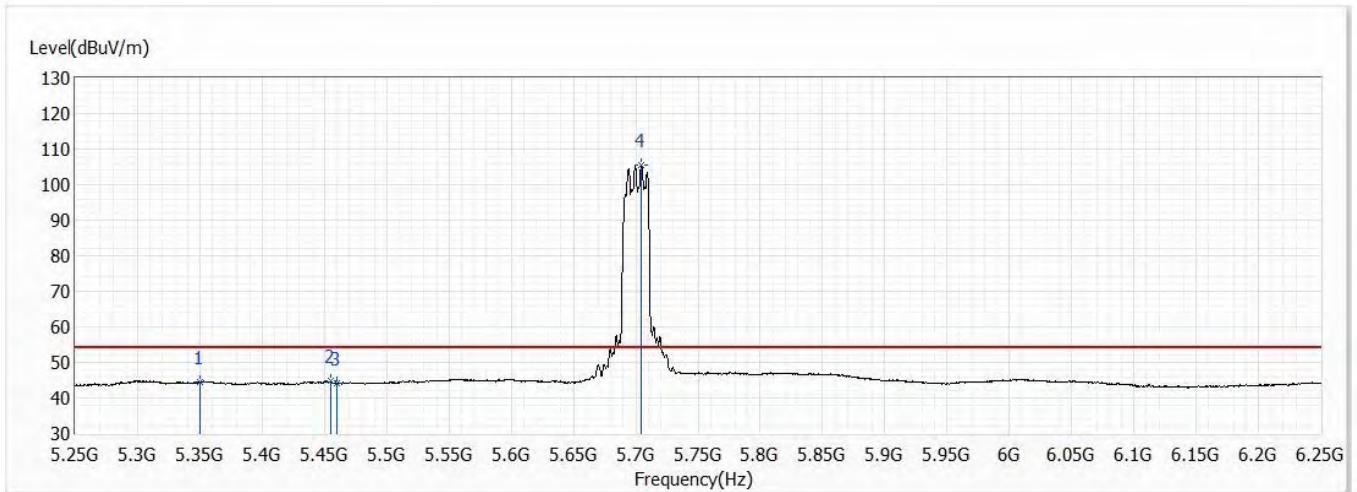


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.35	54.00	-9.65	23.04	21.31	AV
2	5455.000	44.73	54.00	-9.27	23.08	21.65	AV
3	5460.000	44.15	54.00	-9.85	22.49	21.66	AV
! 4	5704.500	105.39	54.00	51.39	83.59	21.80	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

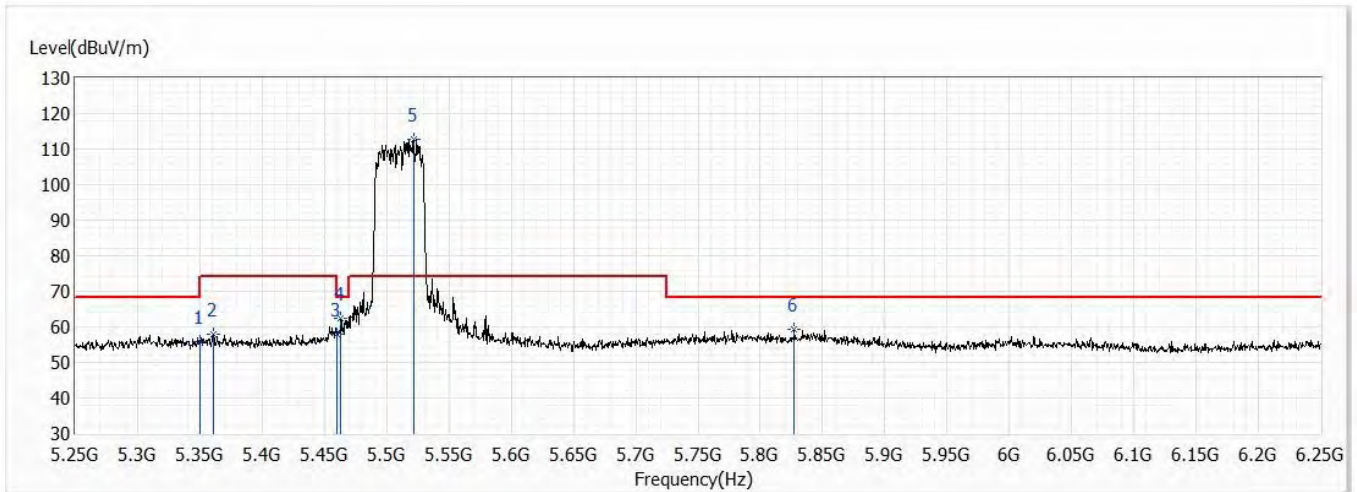


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.96	74.00	-18.04	34.65	21.31	PK
2	5360.500	57.94	74.00	-16.06	36.56	21.38	PK
3	5460.000	57.78	74.00	-16.22	36.12	21.66	PK
4	5463.000	62.47	68.20	-5.73	40.80	21.67	PK
! 5	5521.500	112.88	74.00	38.88	91.07	21.81	PK
6	5827.500	59.20	68.20	-9.00	36.87	22.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

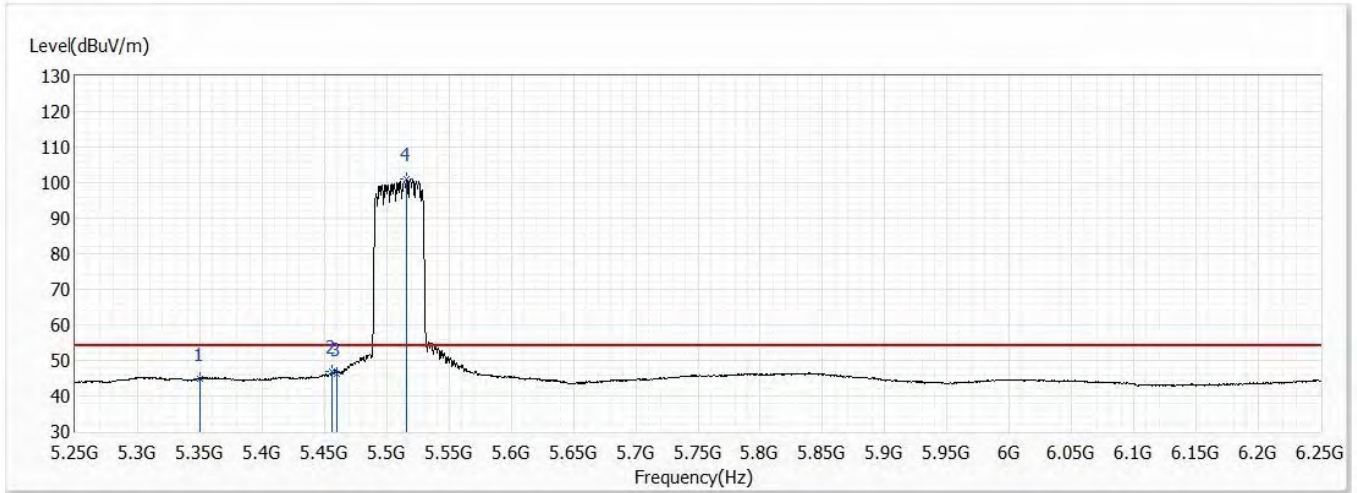


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.88	54.00	-9.12	23.57	21.31	AV
2	5456.000	46.80	54.00	-7.20	25.16	21.64	AV
3	5460.000	46.23	54.00	-7.77	24.57	21.66	AV
! 4	5516.000	101.13	54.00	47.13	79.33	21.80	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

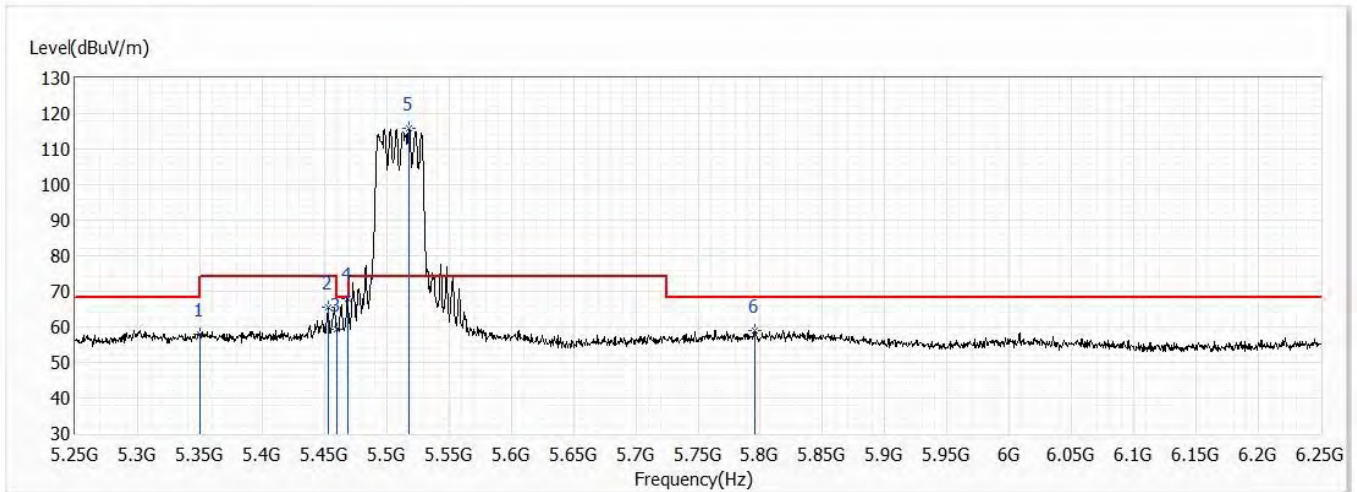


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.76	74.00	-16.24	36.45	21.31	PK
2	5453.000	65.51	74.00	-8.49	43.86	21.65	PK
3	5460.000	59.17	74.00	-14.83	37.51	21.66	PK
4	5468.500	68.08	68.20	-0.12	46.40	21.68	PK
! 5	5518.000	115.86	74.00	41.86	94.05	21.81	PK
6	5795.500	59.08	68.20	-9.12	36.70	22.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

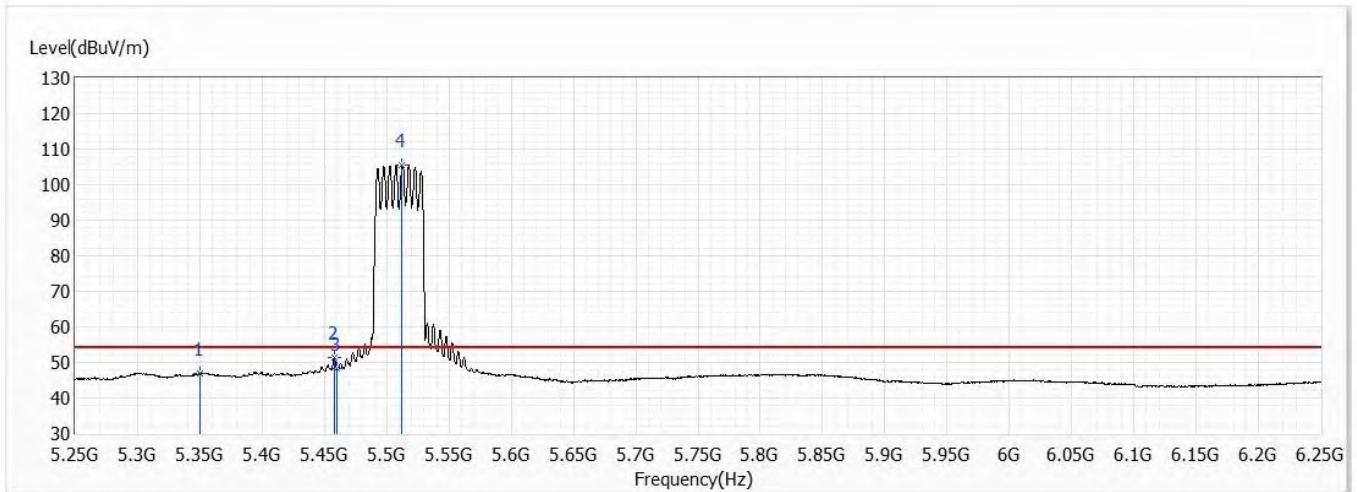


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.76	54.00	-7.24	25.45	21.31	AV
2	5458.000	51.22	54.00	-2.78	29.57	21.65	AV
3	5460.000	48.12	54.00	-5.88	26.46	21.66	AV
! 4	5512.500	105.50	54.00	51.50	83.72	21.78	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

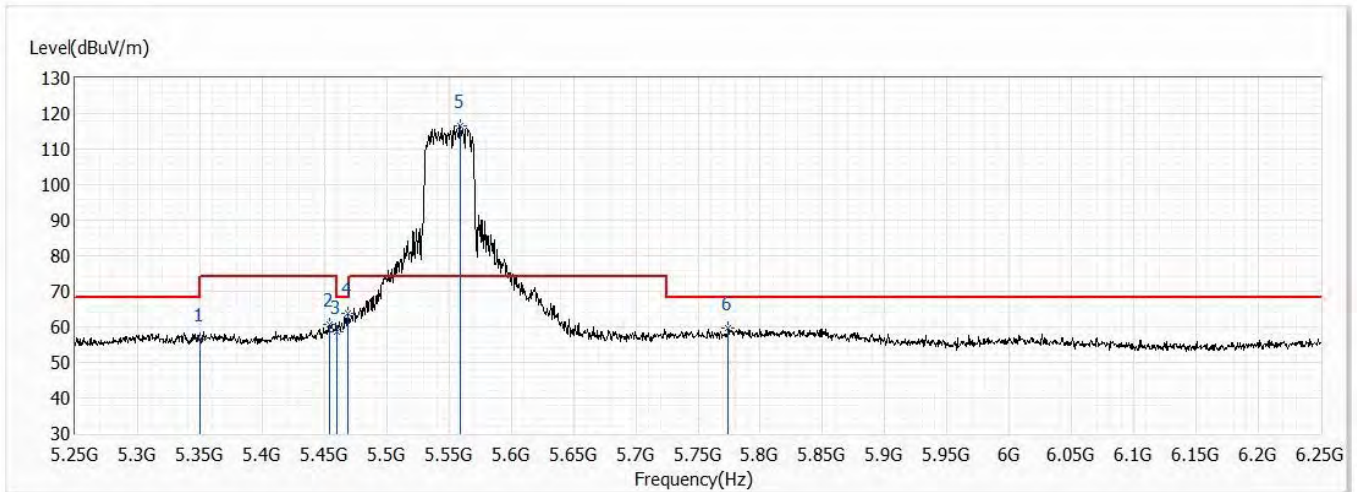


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.48	74.00	-17.52	35.17	21.31	PK
2	5454.500	60.62	74.00	-13.38	38.97	21.65	PK
3	5460.000	58.75	74.00	-15.25	37.09	21.66	PK
4	5468.500	63.65	68.20	-4.55	41.97	21.68	PK
! 5	5559.000	116.69	74.00	42.69	94.78	21.91	PK
6	5774.500	59.61	68.20	-8.59	37.26	22.35	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

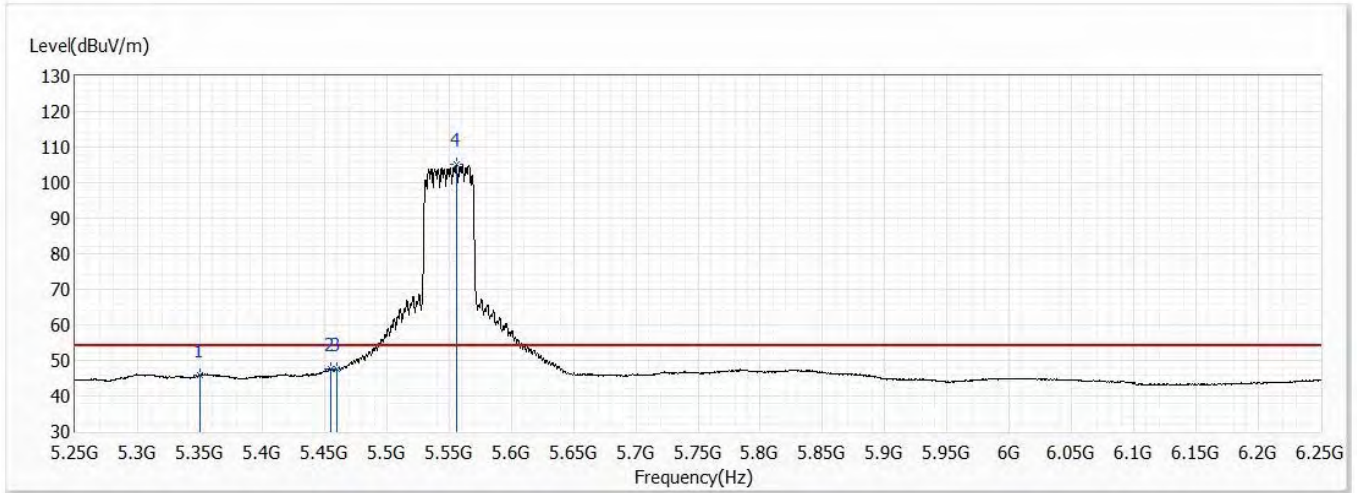


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.74	54.00	-8.26	24.43	21.31	AV
2	5455.500	47.68	54.00	-6.32	26.03	21.65	AV
3	5460.000	47.48	54.00	-6.52	25.82	21.66	AV
! 4	5556.000	105.03	54.00	51.03	83.13	21.90	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

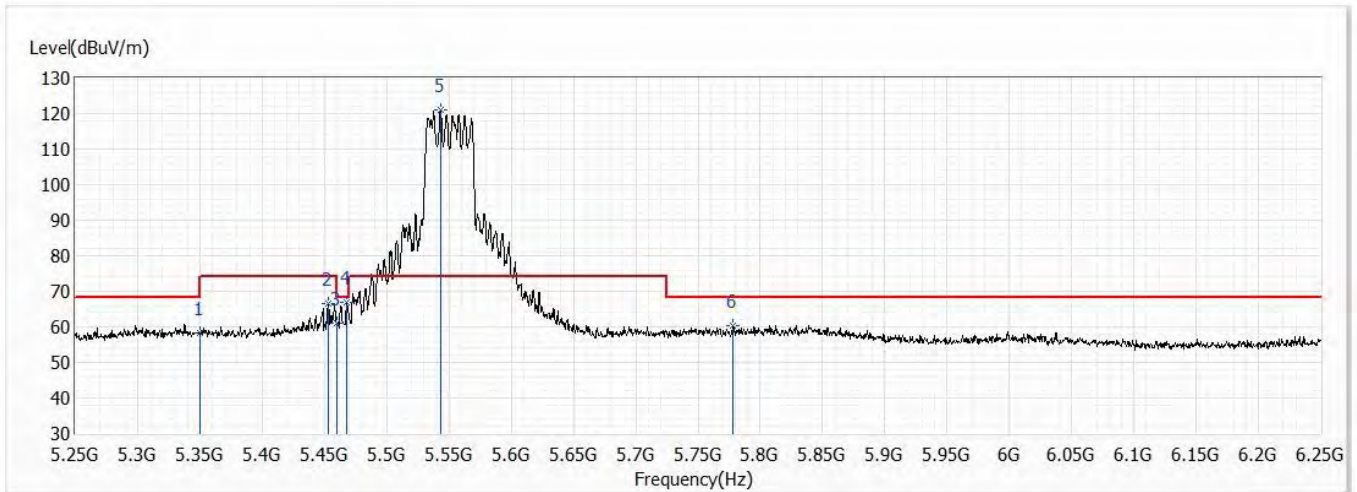


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.41	74.00	-15.59	37.10	21.31	PK
2	5453.500	66.67	74.00	-7.33	45.02	21.65	PK
3	5460.000	60.89	74.00	-13.11	39.23	21.66	PK
4	5468.000	67.00	68.20	-1.20	45.32	21.68	PK
! 5	5543.500	121.17	74.00	47.17	99.29	21.88	PK
6	5778.000	60.50	68.20	-7.70	38.15	22.35	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/6
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

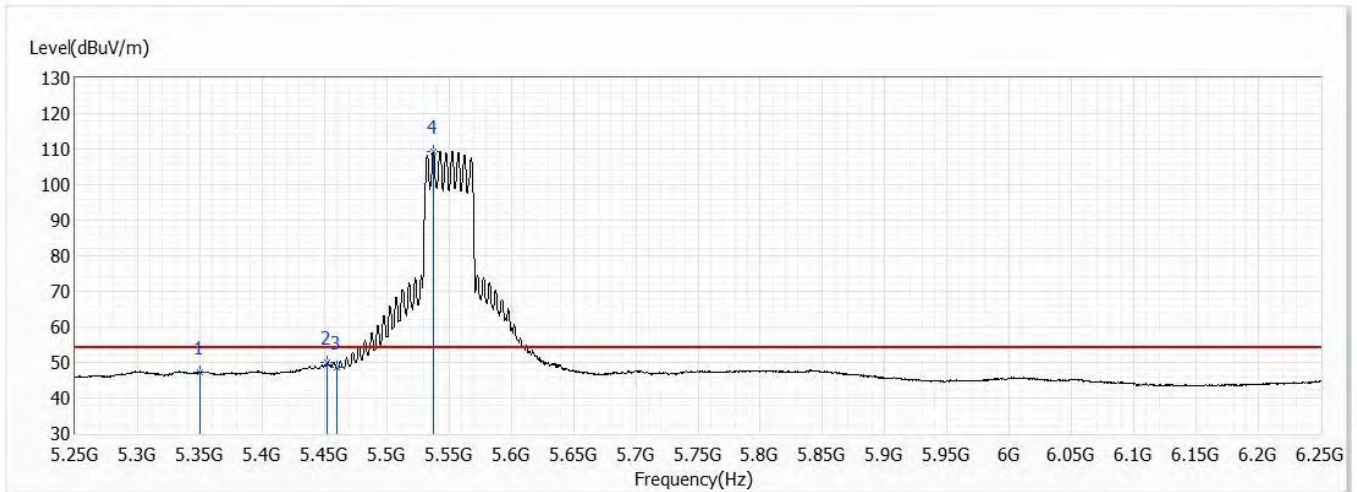


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	47.12	54.00	-6.88	25.81	21.31	AV
2	5452.500	49.88	54.00	-4.12	28.24	21.64	AV
3	5460.000	48.57	54.00	-5.43	26.91	21.66	AV
! 4	5537.500	109.37	54.00	55.37	87.51	21.86	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

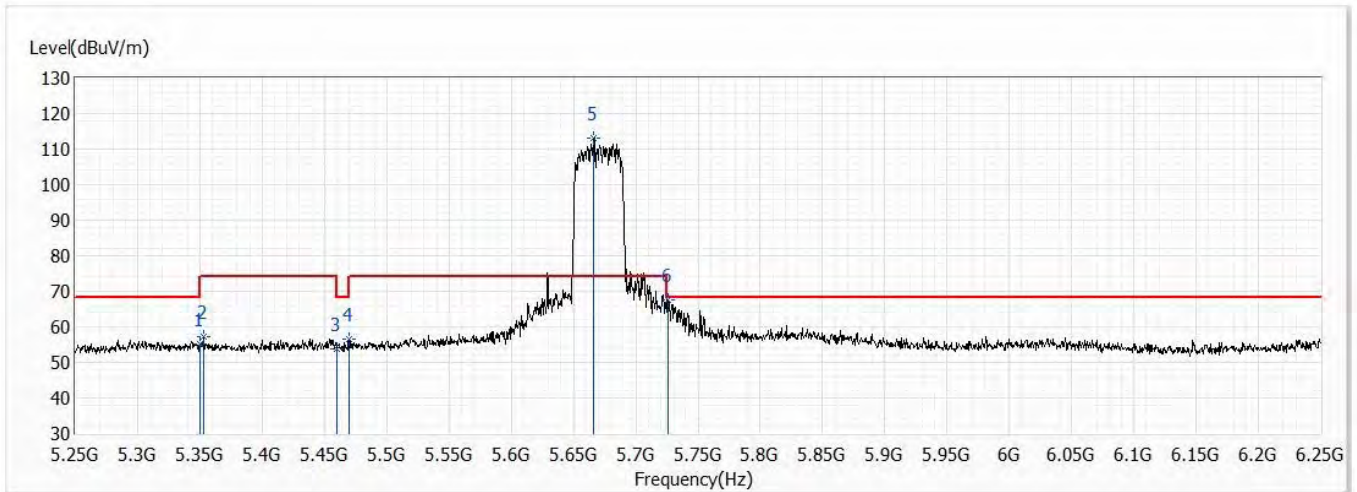


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.15	74.00	-18.85	33.84	21.31	PK
2	5353.000	57.13	74.00	-16.87	35.80	21.33	PK
3	5460.000	53.68	74.00	-20.32	32.02	21.66	PK
4	5469.500	56.45	68.20	-11.75	34.77	21.68	PK
! 5	5666.500	113.11	74.00	39.11	91.40	21.71	PK
6	5726.000	67.68	68.20	-0.52	45.66	22.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

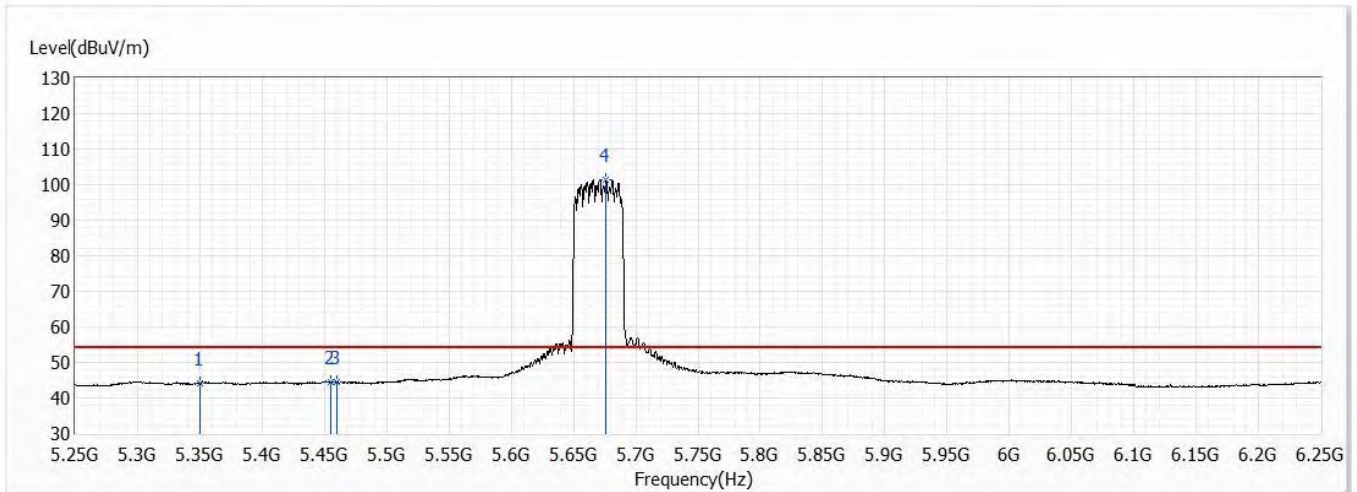


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.29	54.00	-9.71	22.98	21.31	AV
2	5455.500	44.52	54.00	-9.48	22.87	21.65	AV
3	5460.000	44.40	54.00	-9.60	22.74	21.66	AV
! 4	5676.000	101.48	54.00	47.48	79.77	21.71	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

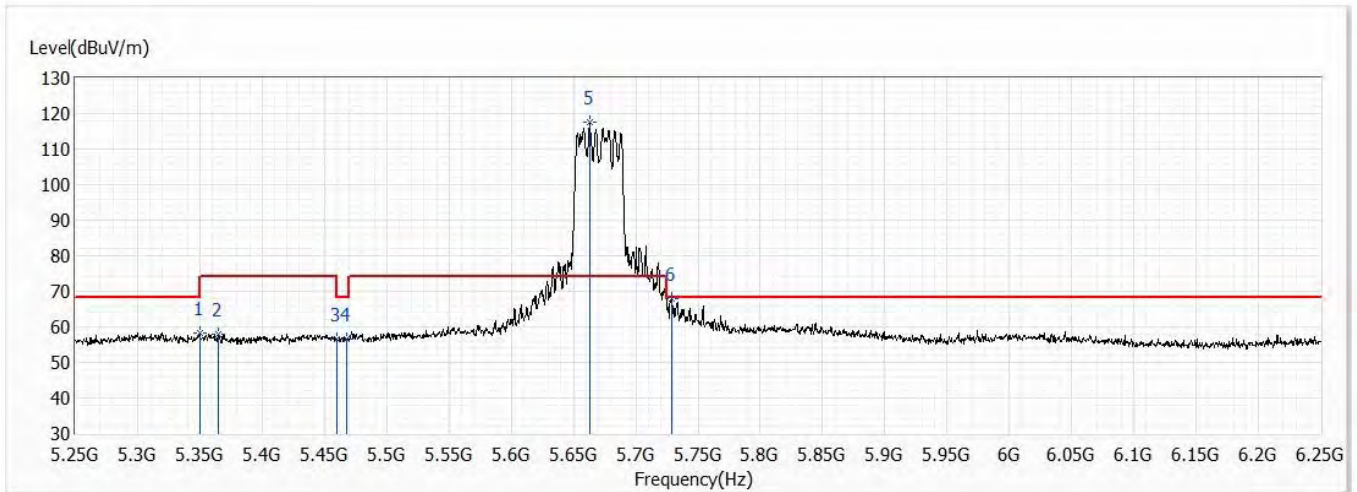


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.33	74.00	-15.67	37.02	21.31	PK
2	5364.500	57.93	74.00	-16.07	36.52	21.41	PK
3	5460.000	56.54	74.00	-17.46	34.88	21.66	PK
4	5468.000	56.55	68.20	-11.65	34.87	21.68	PK
! 5	5663.000	117.57	74.00	43.57	95.86	21.71	PK
6	5728.500	67.79	68.20	-0.41	45.74	22.05	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

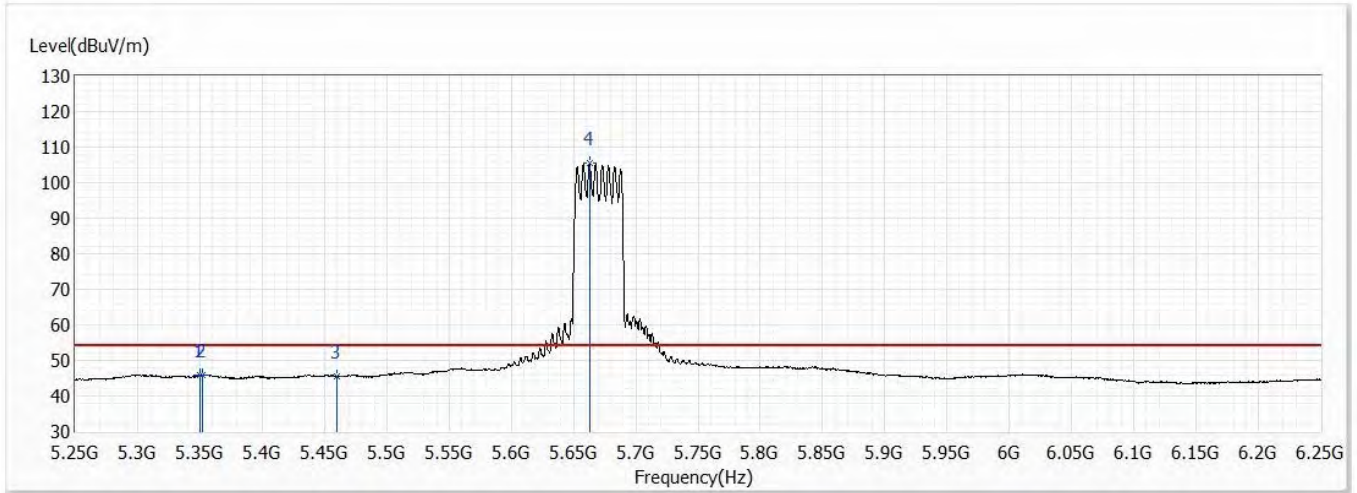


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.70	54.00	-8.30	24.39	21.31	AV
2	5352.000	46.00	54.00	-8.00	24.68	21.32	AV
3	5460.000	45.57	54.00	-8.43	23.91	21.66	AV
! 4	5663.000	105.48	54.00	51.48	83.77	21.71	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

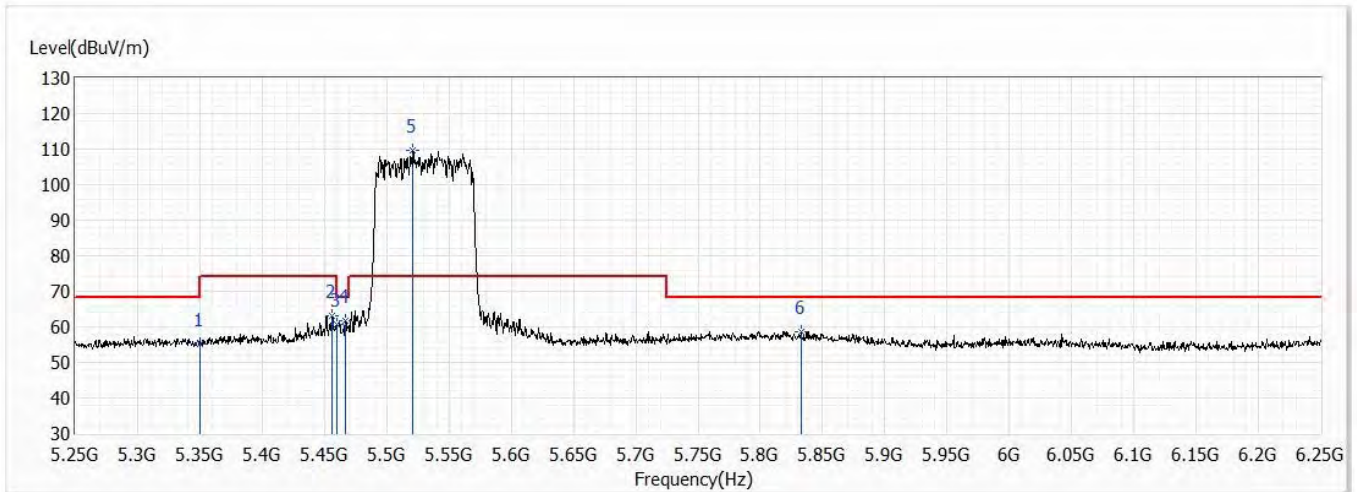


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.28	74.00	-18.72	33.97	21.31	PK
2	5456.000	62.96	74.00	-11.04	41.32	21.64	PK
3	5460.000	60.75	74.00	-13.25	39.09	21.66	PK
4	5467.000	61.63	68.20	-6.57	39.96	21.67	PK
! 5	5521.000	109.74	74.00	35.74	87.93	21.81	PK
6	5832.500	58.64	68.20	-9.56	36.32	22.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

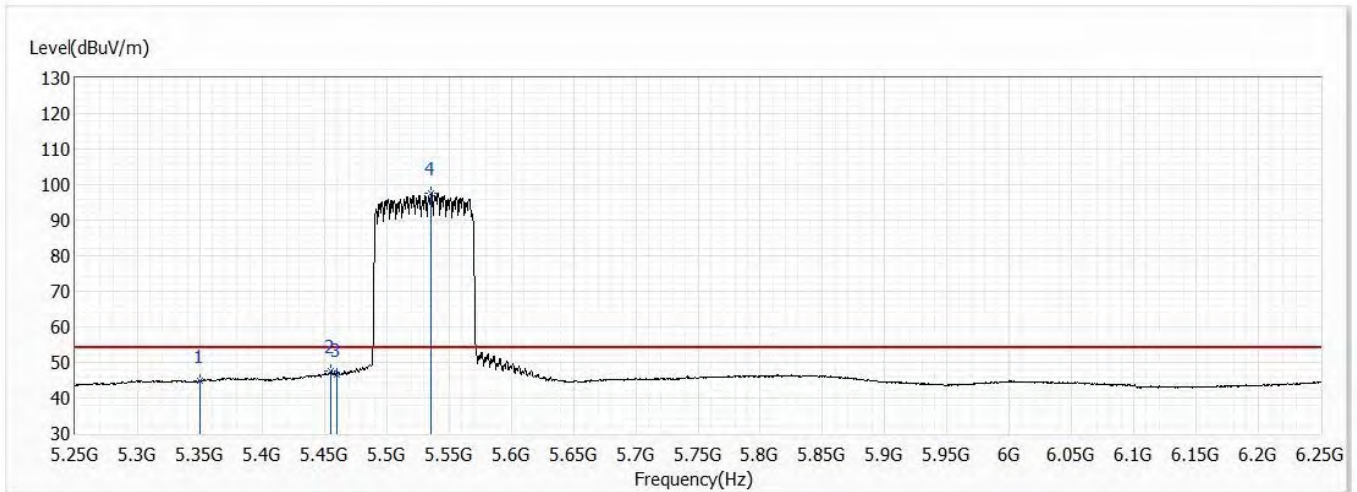


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.93	54.00	-9.07	23.62	21.31	AV
2	5455.500	47.47	54.00	-6.53	25.82	21.65	AV
3	5460.000	46.71	54.00	-7.29	25.05	21.66	AV
! 4	5536.000	97.61	54.00	43.61	75.76	21.85	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

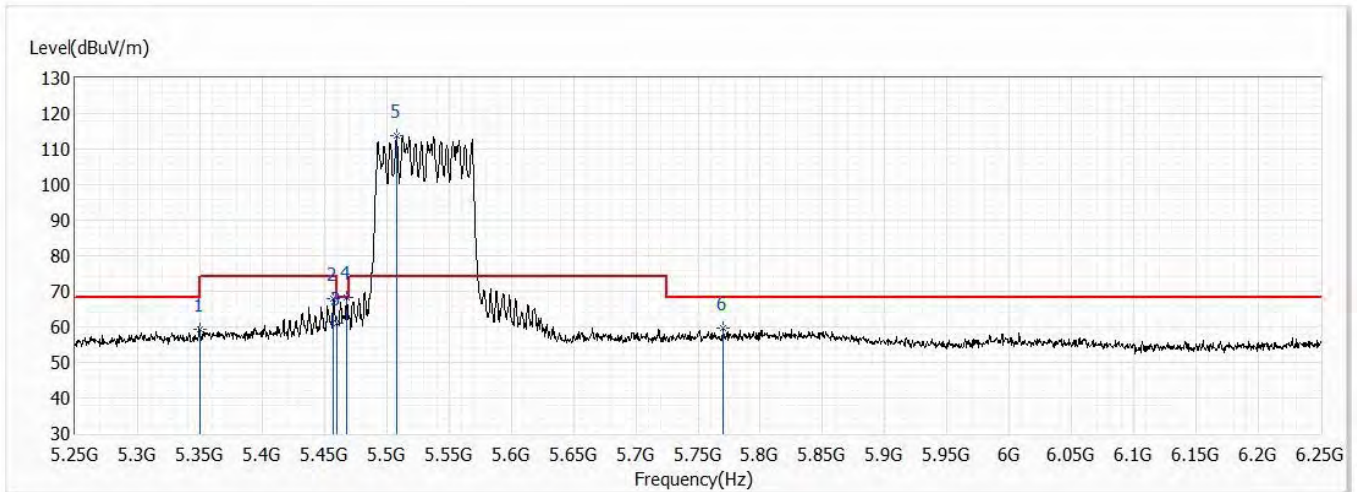


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.17	74.00	-14.83	37.86	21.31	PK
2	5457.500	67.94	74.00	-6.06	46.29	21.65	PK
3	5460.000	60.96	74.00	-13.04	39.30	21.66	PK
4	5468.000	68.14	68.20	-0.06	46.46	21.68	PK
! 5	5508.000	113.68	74.00	39.68	91.90	21.78	PK
6	5770.500	59.50	68.20	-8.70	37.17	22.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

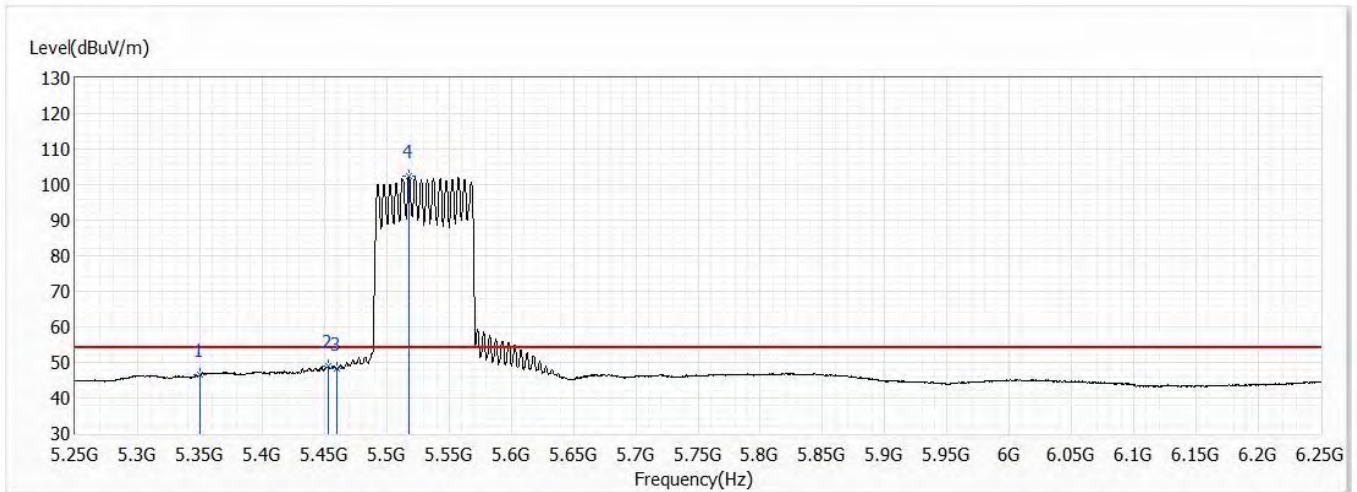


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.50	54.00	-7.50	25.19	21.31	AV
2	5453.000	48.81	54.00	-5.19	27.16	21.65	AV
3	5460.000	48.43	54.00	-5.57	26.77	21.66	AV
! 4	5518.000	102.28	54.00	48.28	80.47	21.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/22
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Clemens Fang
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 114,5.57G,BW160M	Humidity (%RH)	63.0

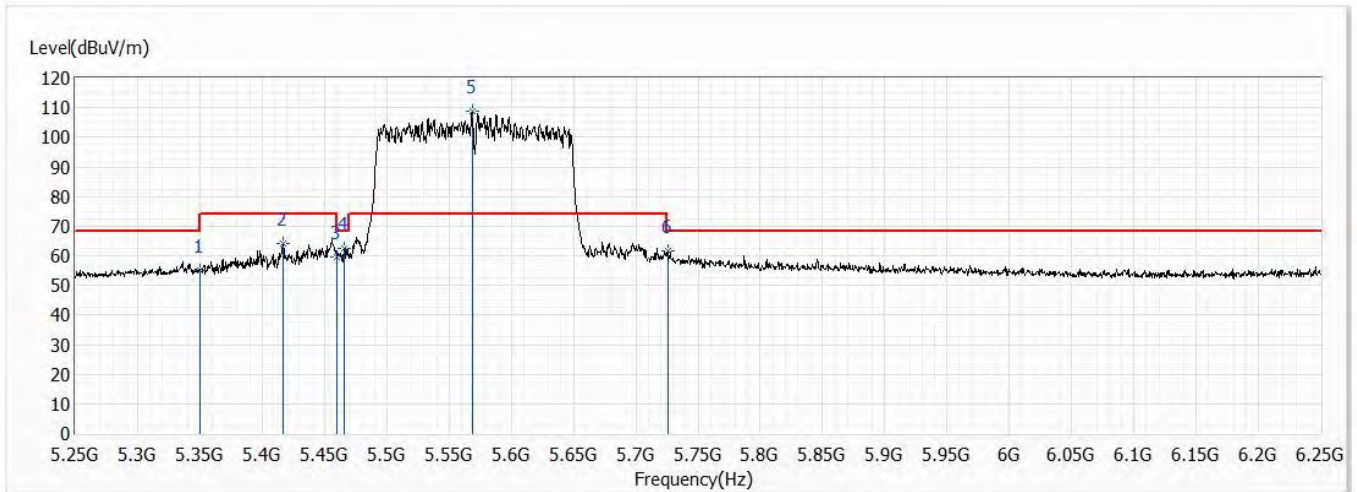


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.98	74.00	-19.02	33.67	21.31	PK
2	5417.000	64.25	74.00	-9.75	42.62	21.63	PK
3	5460.000	59.62	74.00	-14.38	37.96	21.66	PK
4	5465.500	62.47	68.20	-5.73	40.80	21.67	PK
! 5	5568.500	108.68	74.00	34.68	86.76	21.92	PK
6	5726.000	61.74	68.20	-6.46	39.72	22.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/22
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Clemens Fang
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 114,5.57G,BW160M	Humidity (%RH)	63.0

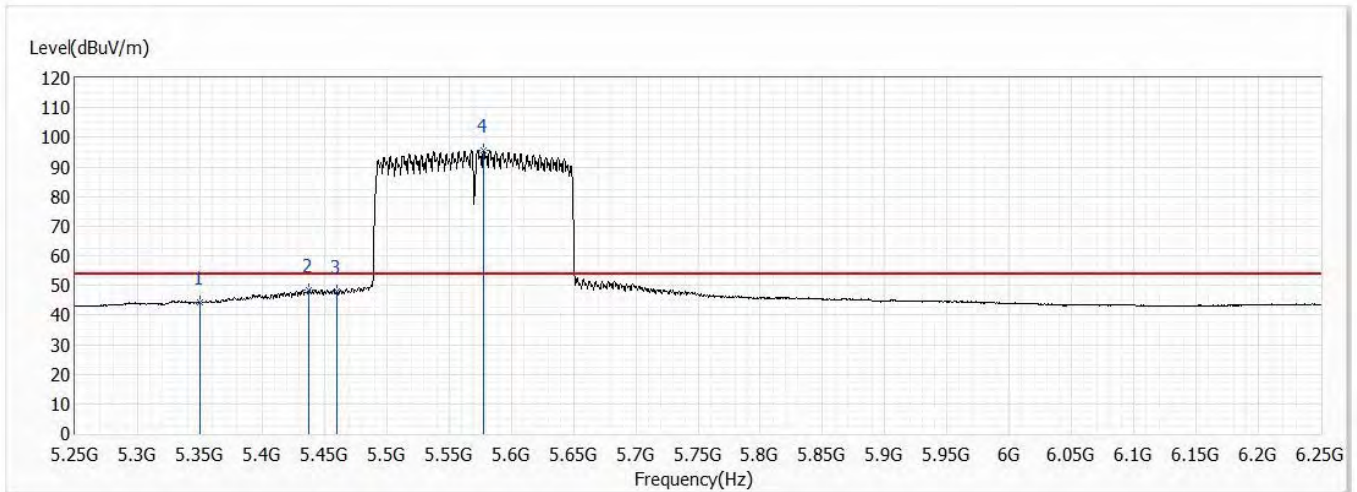


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.14	54.00	-9.86	22.83	21.31	AV
2	5437.500	48.51	54.00	-5.49	26.88	21.63	AV
3	5460.000	47.83	54.00	-6.17	26.17	21.66	AV
! 4	5578.000	95.70	54.00	41.70	73.78	21.92	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/22
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Clemens Fang
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 114,5.57G,BW160M	Humidity (%RH)	63.0

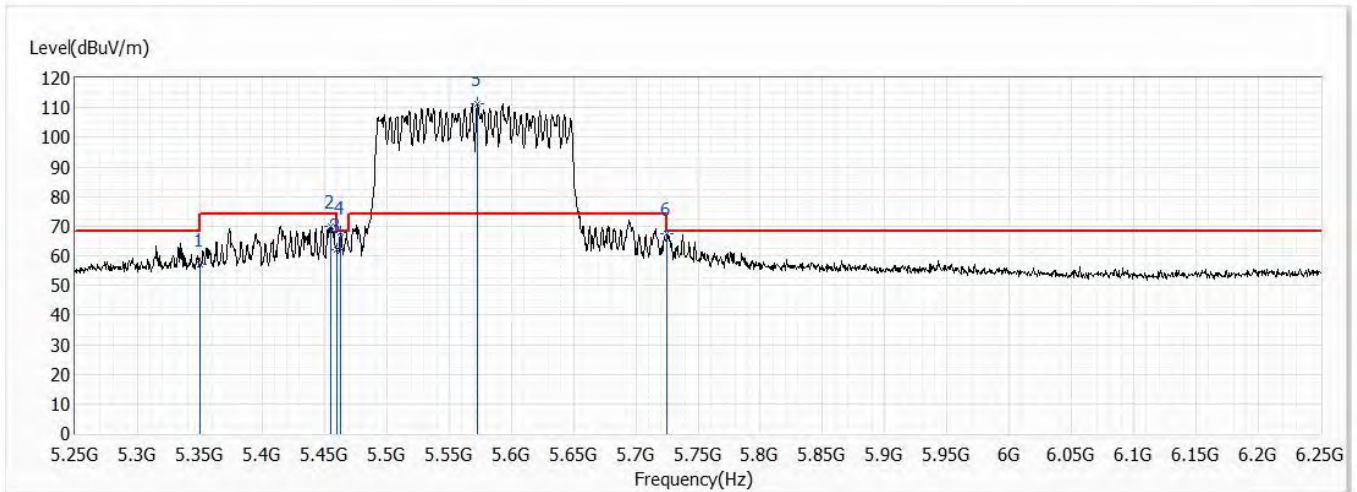


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.06	74.00	-16.94	35.75	21.31	PK
2	5455.500	70.12	74.00	-3.88	48.47	21.65	PK
3	5460.000	61.92	74.00	-12.08	40.26	21.66	PK
4	5462.500	68.02	68.20	-0.18	46.36	21.66	PK
! 5	5573.000	111.47	74.00	37.47	89.55	21.92	PK
6	5725.000	67.57	68.20	-0.63	45.56	22.01	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/22
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Clemens Fang
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	CDD,802.11ax,Ant0+1+2+3, Ch 114,5.57G,BW160M	Humidity (%RH)	63.0

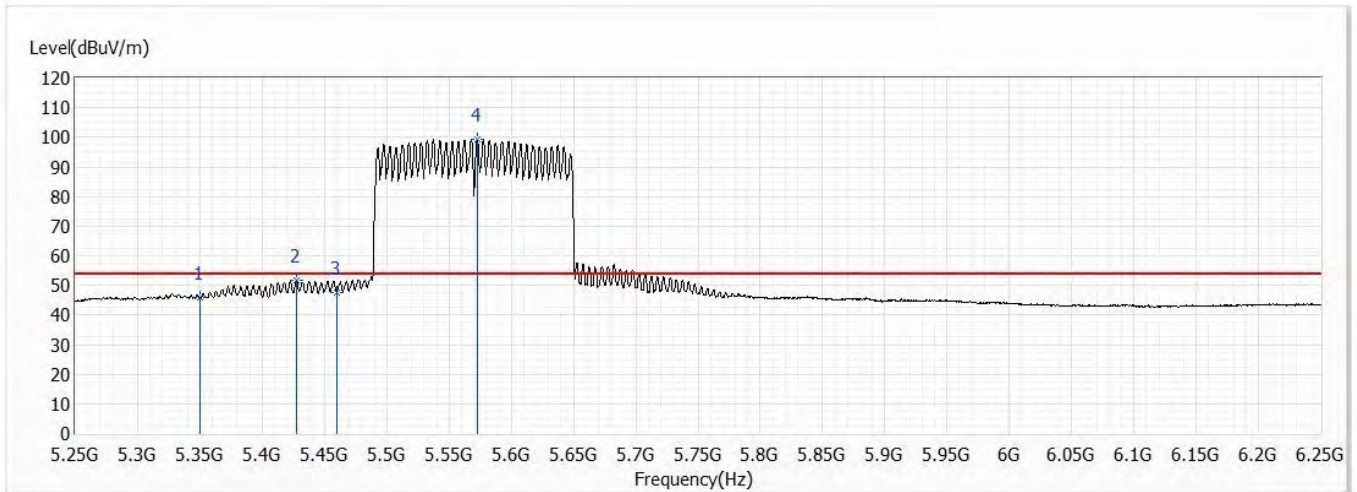


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.81	54.00	-8.19	24.50	21.31	AV
2	5427.500	51.65	54.00	-2.35	30.02	21.63	AV
3	5460.000	47.62	54.00	-6.38	25.96	21.66	AV
! 4	5572.500	99.31	54.00	45.31	77.39	21.92	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

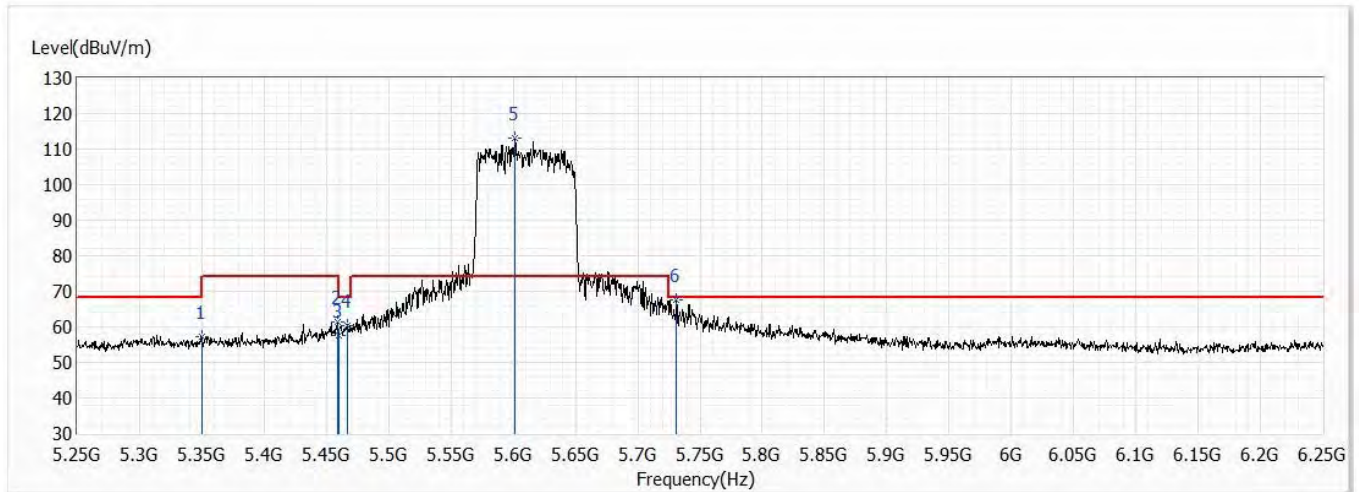


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.16	74.00	-16.84	35.85	21.31	PK
2	5459.000	61.30	74.00	-12.70	39.64	21.66	PK
3	5460.000	57.66	74.00	-16.34	36.00	21.66	PK
4	5467.000	60.49	68.20	-7.71	38.82	21.67	PK
! 5	5601.000	112.98	74.00	38.98	91.04	21.94	PK
6	5731.000	67.46	68.20	-0.74	45.38	22.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

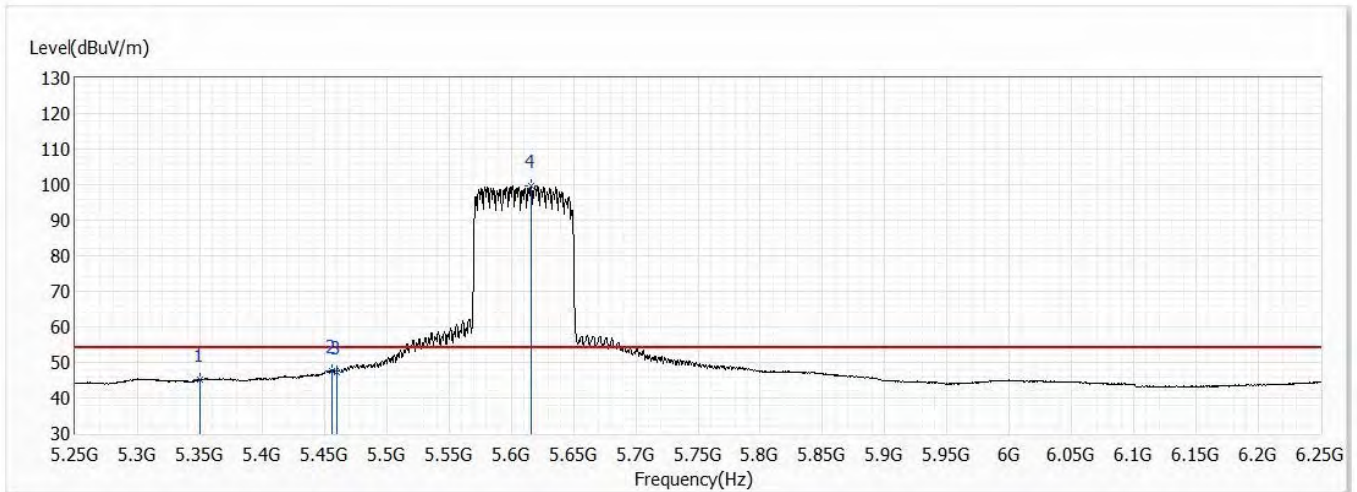


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.09	54.00	-8.91	23.78	21.31	AV
2	5456.500	47.72	54.00	-6.28	26.08	21.64	AV
3	5460.000	47.17	54.00	-6.83	25.51	21.66	AV
! 4	5616.000	99.75	54.00	45.75	77.89	21.86	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

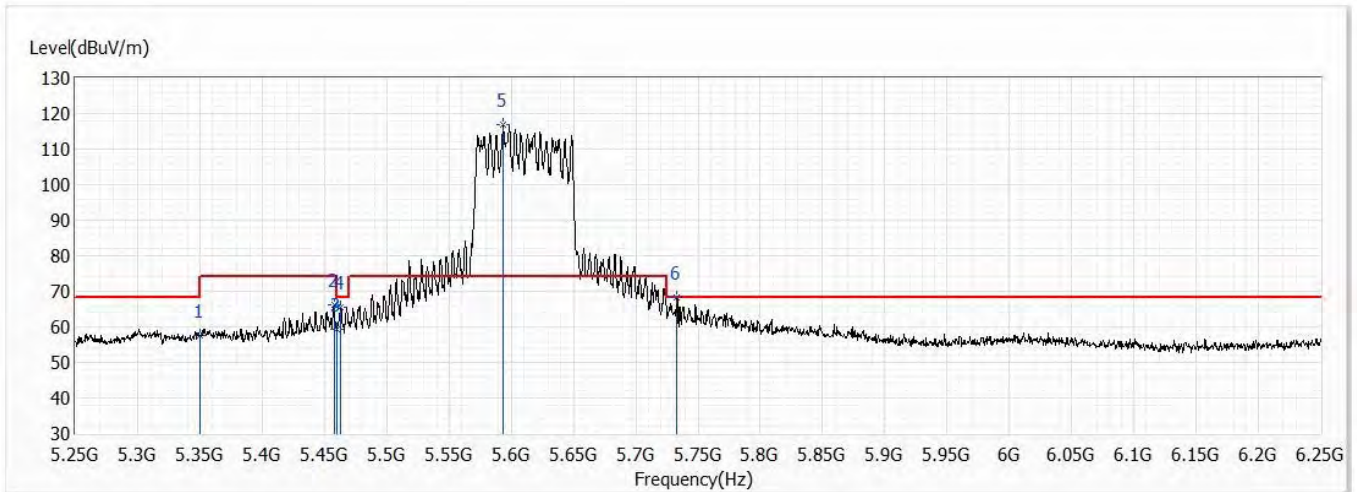


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.54	74.00	-16.46	36.23	21.31	PK
2	5458.000	66.24	74.00	-7.76	44.59	21.65	PK
3	5460.000	59.42	74.00	-14.58	37.76	21.66	PK
4	5463.000	65.63	68.20	-2.57	43.96	21.67	PK
! 5	5593.500	116.78	74.00	42.78	94.84	21.94	PK
6	5733.000	68.13	68.20	-0.07	46.03	22.10	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/7
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

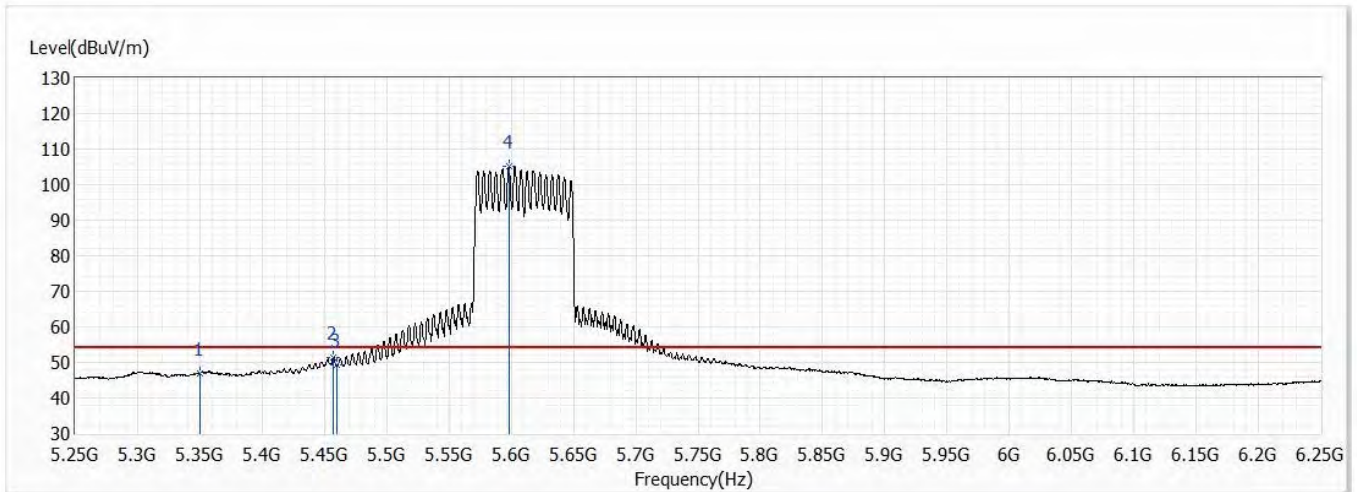


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.97	54.00	-7.03	25.66	21.31	AV
2	5457.500	51.35	54.00	-2.65	29.70	21.65	AV
3	5460.000	49.18	54.00	-4.82	27.52	21.66	AV
! 4	5598.000	105.06	54.00	51.06	83.12	21.94	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11a,Ant0+1+2+3,Ch 149,5.745G,BW20M	Humidity (%RH)	58.0

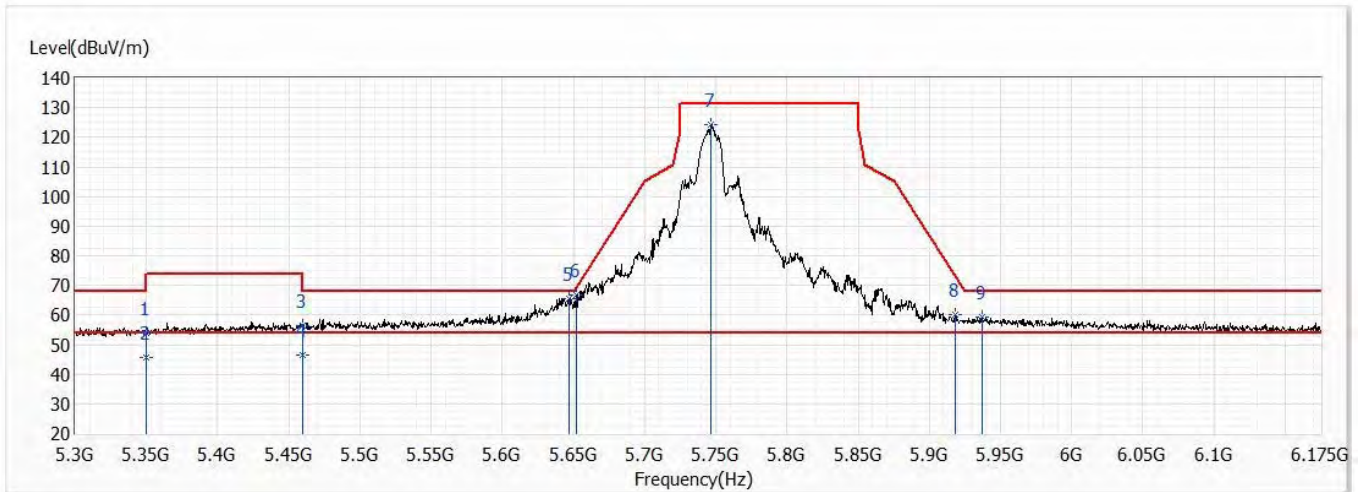


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.08	74.00	-19.92	32.77	21.31	PK
2	5350.000	45.51	54.00	-8.49	24.20	21.31	AV
3	5460.000	56.60	74.00	-17.40	34.94	21.66	PK
4	5460.000	46.34	54.00	-7.66	24.68	21.66	AV
5	5646.500	65.33	68.20	-2.87	43.62	21.71	PK
* 6	5651.750	66.86	69.50	-2.64	45.16	21.70	PK
7	5746.688	124.37	131.20	-6.83	102.11	22.26	PK
8	5918.188	59.97	73.22	-13.26	37.40	22.57	PK
9	5937.438	59.24	68.20	-8.96	36.60	22.64	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11a,Ant0+1+2+3,Ch 149,5.745G,BW20M	Humidity (%RH)	58.0

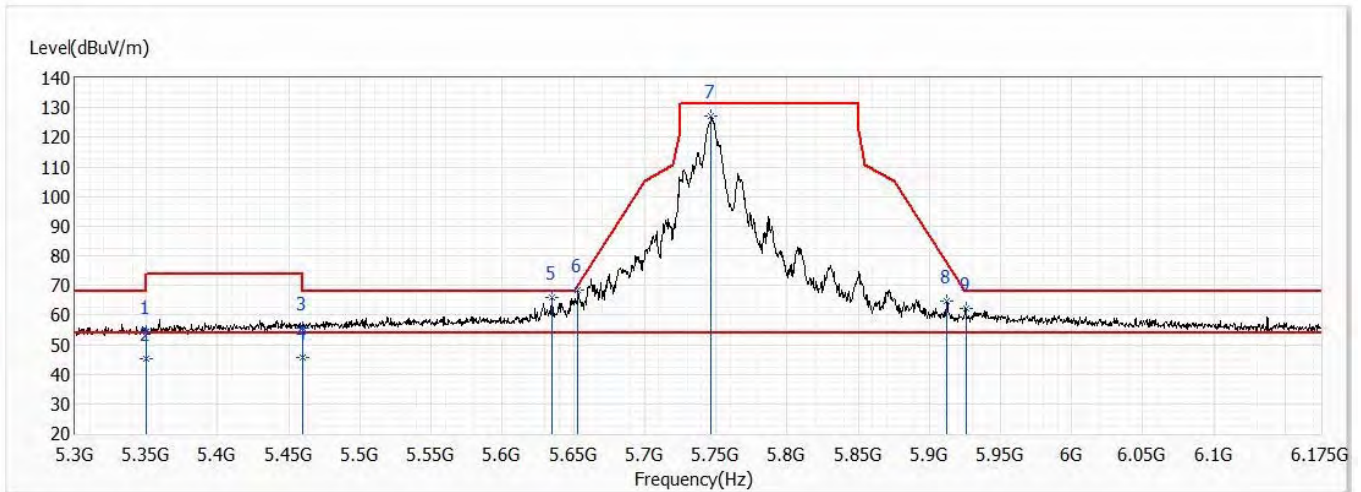


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.49	74.00	-19.51	33.18	21.31	PK
2	5350.000	45.23	54.00	-8.77	23.92	21.31	AV
3	5460.000	55.50	74.00	-18.50	33.84	21.66	PK
4	5460.000	45.56	54.00	-8.44	23.90	21.66	AV
* 5	5635.125	66.10	68.20	-2.10	44.33	21.77	PK
6	5653.063	68.27	70.48	-2.21	46.57	21.70	PK
7	5746.688	127.26	131.20	-3.94	105.00	22.26	PK
8	5912.500	64.58	77.42	-12.84	42.03	22.55	PK
9	5925.625	62.14	68.20	-6.06	39.55	22.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11a,Ant0+1+2+3,Ch 157,5.785G,BW20M	Humidity (%RH)	58.0

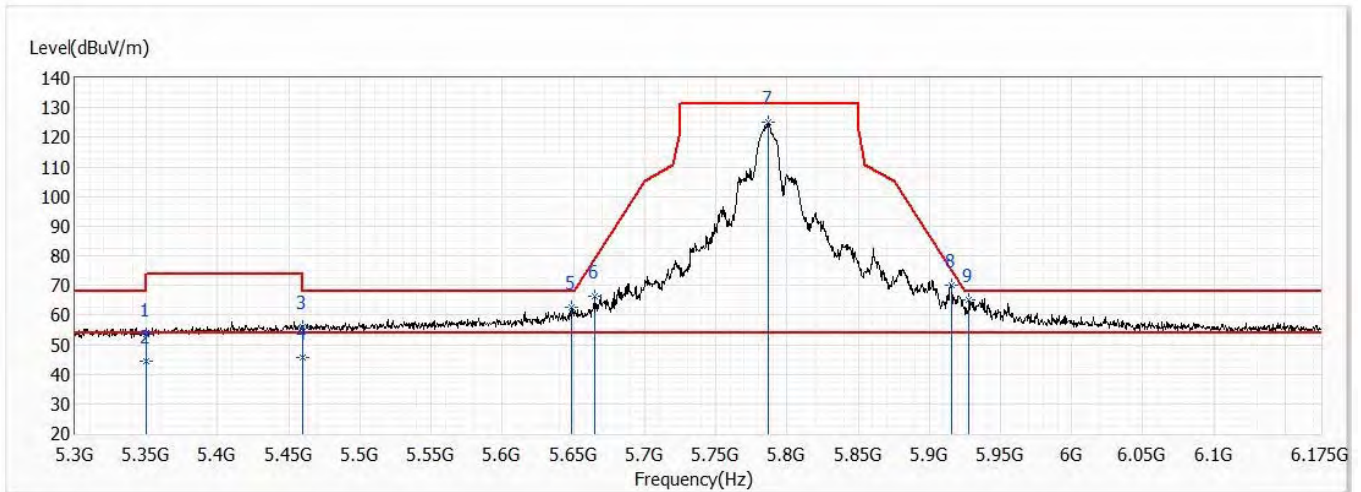


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.70	74.00	-20.30	32.39	21.31	PK
2	5350.000	44.52	54.00	-9.48	23.21	21.31	AV
3	5460.000	55.83	74.00	-18.17	34.17	21.66	PK
4	5460.000	45.54	54.00	-8.46	23.88	21.66	AV
5	5648.688	62.52	68.20	-5.68	40.82	21.70	PK
6	5665.313	66.40	79.57	-13.16	44.69	21.71	PK
7	5786.938	125.13	131.20	-6.07	102.77	22.36	PK
8	5916.000	70.27	74.84	-4.56	47.71	22.56	PK
* 9	5927.813	65.03	68.20	-3.17	42.43	22.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11a,Ant0+1+2+3,Ch 157,5.785G,BW20M	Humidity (%RH)	58.0

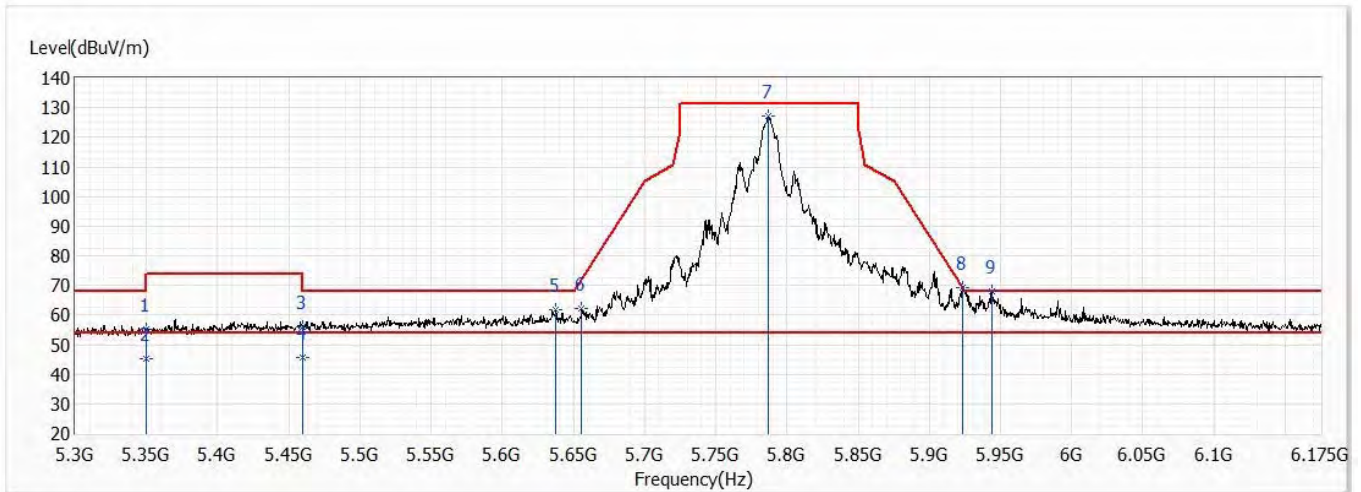


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.99	74.00	-19.01	33.68	21.31	PK
2	5350.000	45.35	54.00	-8.65	24.04	21.31	AV
3	5460.000	55.93	74.00	-18.07	34.27	21.66	PK
4	5460.000	45.85	54.00	-8.15	24.19	21.66	AV
5	5637.750	61.72	68.20	-6.48	39.97	21.75	PK
6	5655.688	62.02	72.43	-10.41	40.32	21.70	PK
7	5786.500	127.18	131.20	-4.02	104.82	22.36	PK
* 8	5923.438	69.34	69.35	-0.01	46.75	22.59	PK
9	5944.000	68.10	68.20	-0.10	45.42	22.68	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11a,Ant0+1+2+3,Ch 165,5.825G,BW20M	Humidity (%RH)	58.0

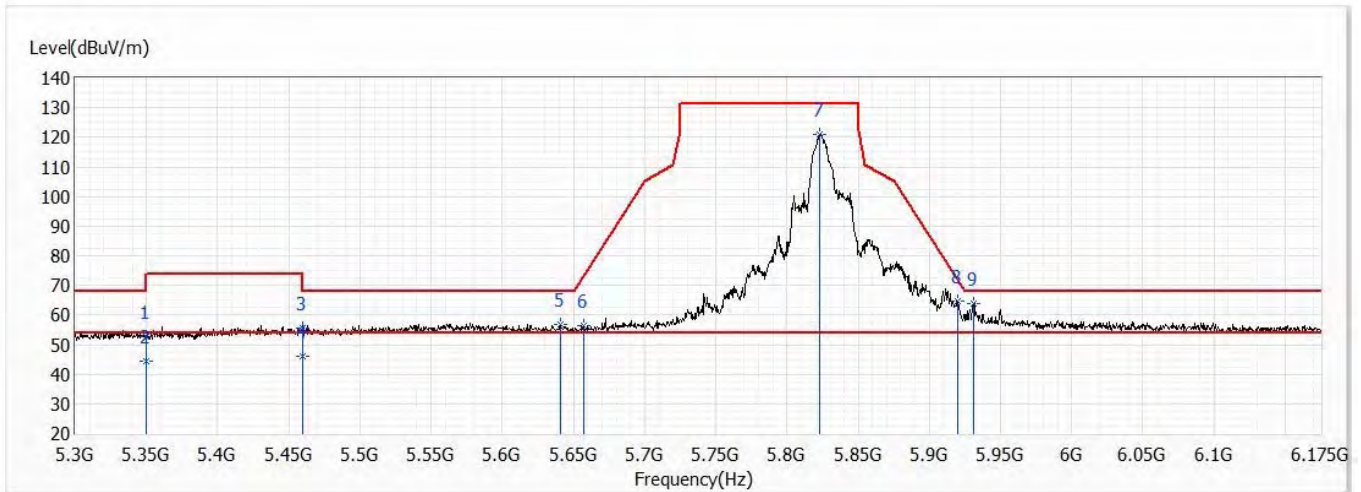


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	52.54	74.00	-21.46	31.23	21.31	PK
2	5350.000	44.52	54.00	-9.48	23.21	21.31	AV
3	5460.000	55.56	74.00	-18.44	33.90	21.66	PK
4	5460.000	46.10	54.00	-7.90	24.44	21.66	AV
5	5640.813	56.79	68.20	-11.41	35.05	21.74	PK
6	5657.000	56.44	73.40	-16.96	34.74	21.70	PK
7	5823.250	121.11	131.20	-10.09	98.76	22.35	PK
8	5920.375	64.59	71.61	-7.02	42.01	22.58	PK
* 9	5931.313	64.06	68.20	-4.14	41.44	22.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11a,Ant0+1+2+3,Ch 165,5.825G,BW20M	Humidity (%RH)	58.0

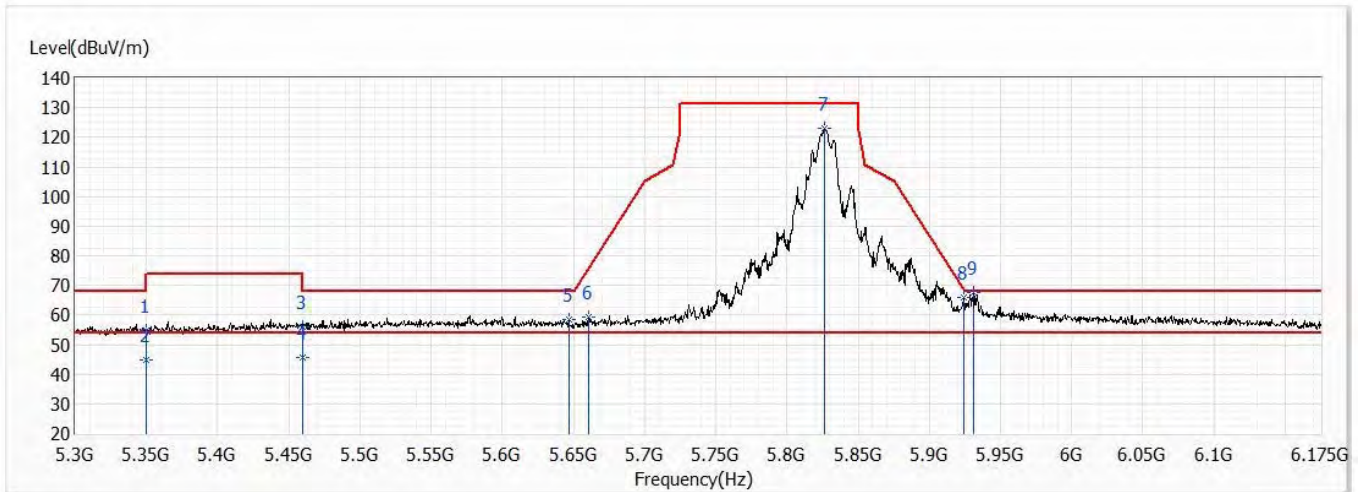


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.70	74.00	-19.30	33.39	21.31	PK
2	5350.000	44.87	54.00	-9.13	23.56	21.31	AV
3	5460.000	55.98	74.00	-18.02	34.32	21.66	PK
4	5460.000	45.56	54.00	-8.44	23.90	21.66	AV
5	5646.500	58.35	68.20	-9.85	36.64	21.71	PK
6	5660.938	59.48	76.32	-16.84	37.77	21.71	PK
7	5826.313	123.11	131.20	-8.09	100.77	22.34	PK
8	5923.875	65.98	69.03	-3.05	43.38	22.60	PK
* 9	5930.875	67.55	68.20	-0.65	44.94	22.61	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 149,5.745G,BW20M	Humidity (%RH)	58.0

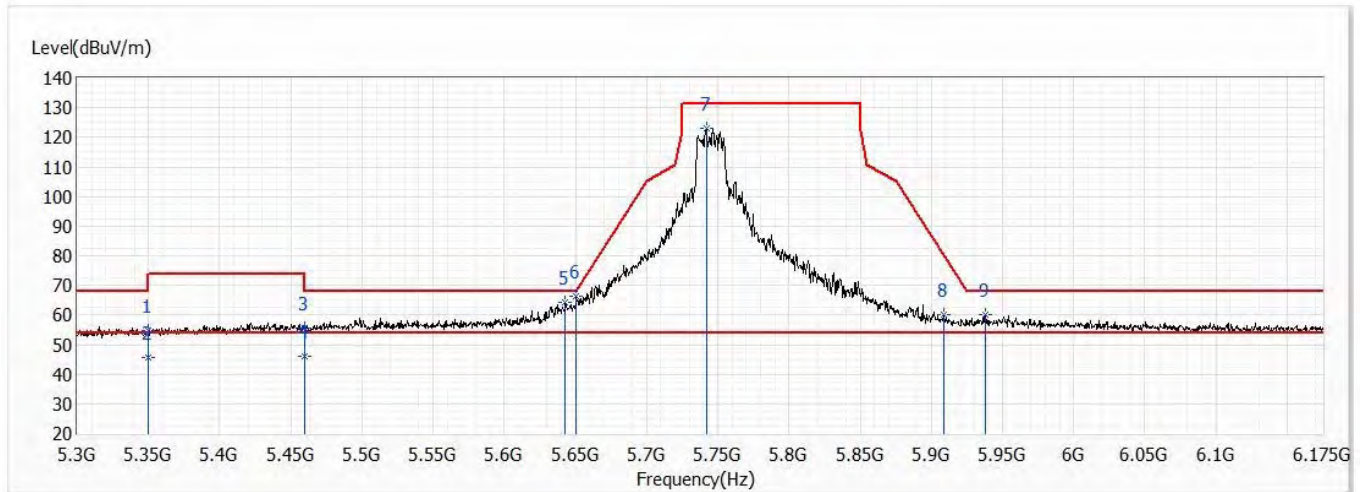


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.56	74.00	-19.44	33.25	21.31	PK
2	5350.000	45.67	54.00	-8.33	24.36	21.31	AV
3	5460.000	55.45	74.00	-18.55	33.79	21.66	PK
4	5460.000	45.89	54.00	-8.11	24.23	21.66	AV
5	5643.000	64.31	68.20	-3.89	42.58	21.73	PK
* 6	5650.438	66.33	68.53	-2.19	44.64	21.69	PK
7	5741.875	123.00	131.20	-8.20	100.80	22.20	PK
8	5908.563	60.00	80.33	-20.33	37.47	22.53	PK
9	5937.875	59.95	68.20	-8.25	37.30	22.65	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 149,5.745G,BW20M	Humidity (%RH)	58.0

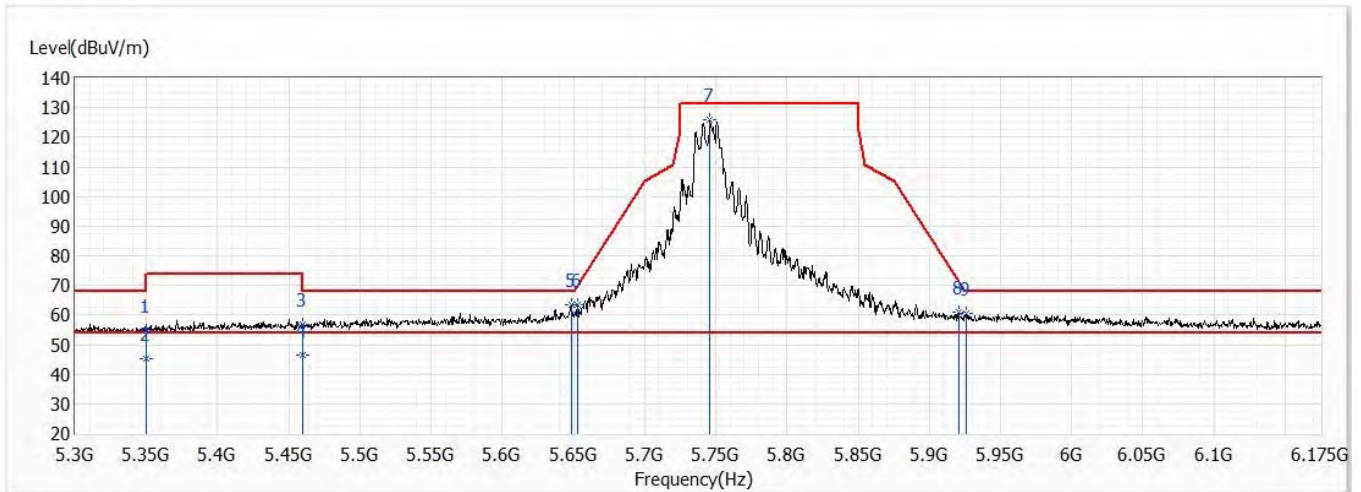


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.94	74.00	-19.06	33.63	21.31	PK
2	5350.000	45.06	54.00	-8.94	23.75	21.31	AV
3	5460.000	56.70	74.00	-17.30	35.04	21.66	PK
4	5460.000	46.32	54.00	-7.68	24.66	21.66	AV
* 5	5648.250	63.37	68.20	-4.83	41.67	21.70	PK
6	5653.063	63.59	70.48	-6.89	41.89	21.70	PK
7	5745.813	125.98	131.20	-5.22	103.73	22.25	PK
8	5920.813	61.15	71.29	-10.14	38.57	22.58	PK
9	5926.063	60.65	68.20	-7.55	38.06	22.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 157,5.785G,BW20M	Humidity (%RH)	58.0

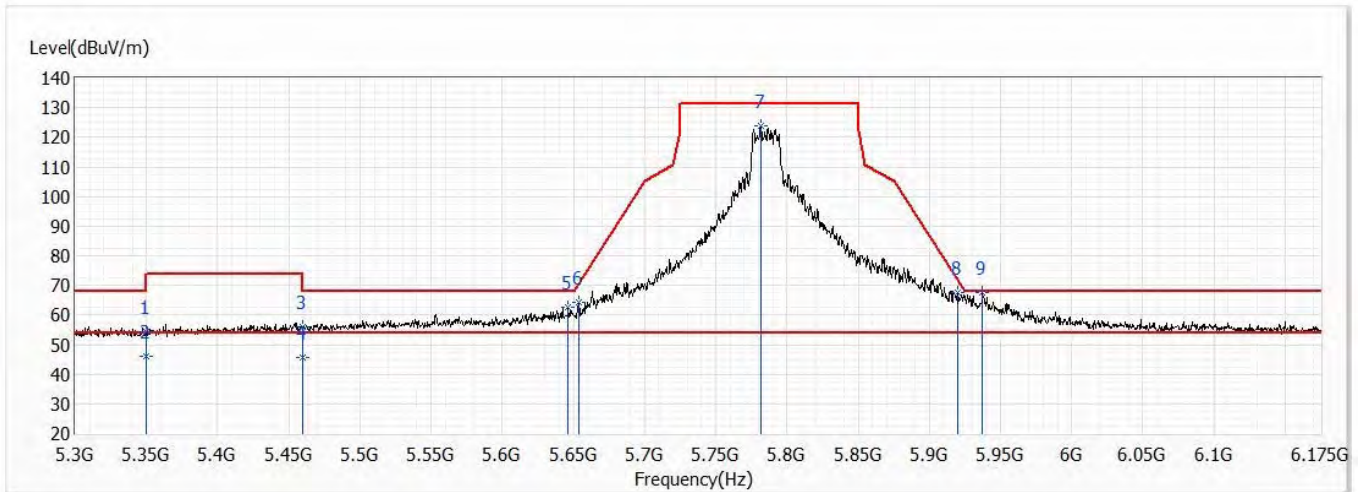


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.45	74.00	-19.55	33.14	21.31	PK
2	5350.000	46.12	54.00	-7.88	24.81	21.31	AV
3	5460.000	55.96	74.00	-18.04	34.30	21.66	PK
4	5460.000	45.75	54.00	-8.25	24.09	21.66	AV
5	5646.063	62.62	68.20	-5.58	40.91	21.71	PK
6	5653.500	64.07	70.80	-6.73	42.37	21.70	PK
7	5781.688	123.70	131.20	-7.50	101.35	22.35	PK
8	5919.938	67.76	71.93	-4.17	45.18	22.58	PK
* 9	5937.438	67.47	68.20	-0.73	44.83	22.64	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 157,5.785G,BW20M	Humidity (%RH)	58.0

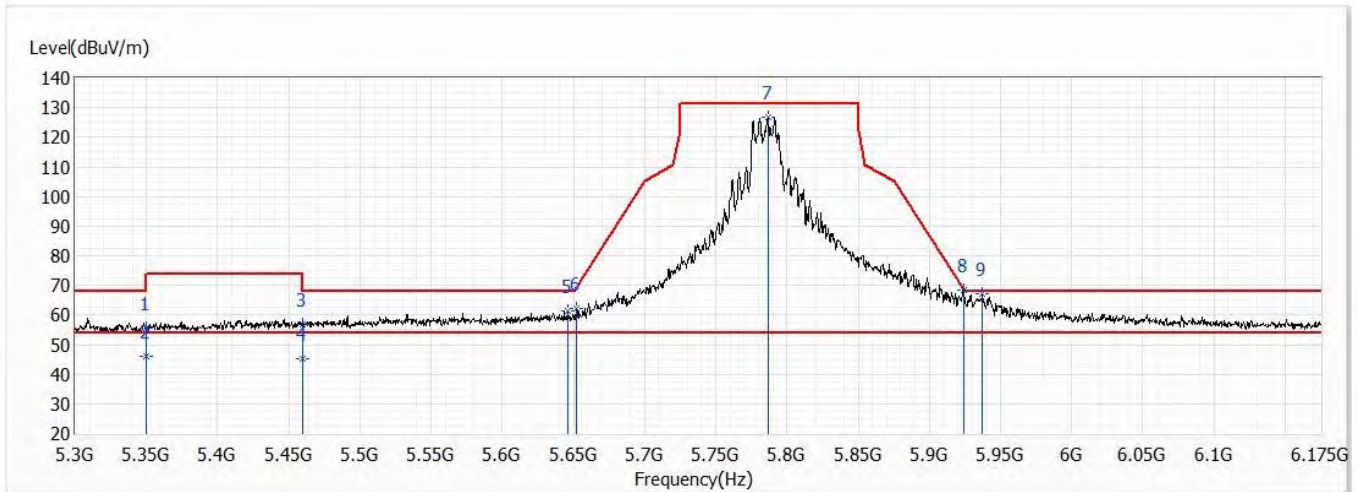


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.78	74.00	-18.22	34.47	21.31	PK
2	5350.000	45.98	54.00	-8.02	24.67	21.31	AV
3	5460.000	56.77	74.00	-17.23	35.11	21.66	PK
4	5460.000	45.25	54.00	-8.75	23.59	21.66	AV
5	5645.625	61.19	68.20	-7.01	39.47	21.72	PK
6	5651.750	62.40	69.50	-7.10	40.70	21.70	PK
7	5786.500	126.79	131.20	-4.41	104.43	22.36	PK
* 8	5924.313	68.52	68.71	-0.19	45.92	22.60	PK
9	5937.438	67.20	68.20	-1.00	44.56	22.64	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 165,5.825G,BW20M	Humidity (%RH)	58.0

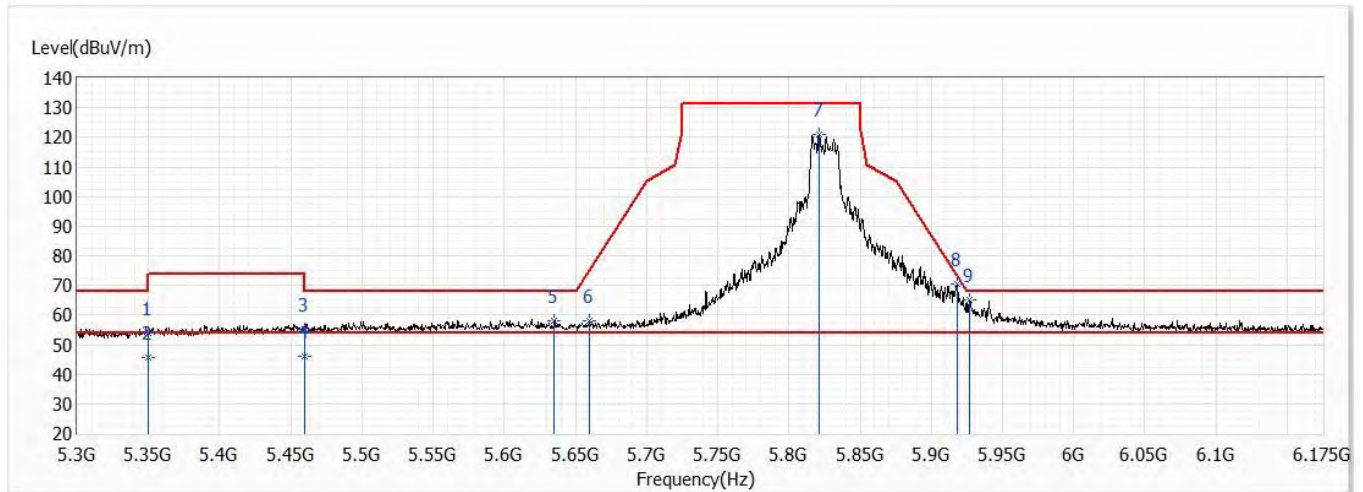


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.75	74.00	-20.25	32.44	21.31	PK
2	5350.000	45.52	54.00	-8.48	24.21	21.31	AV
3	5460.000	55.14	74.00	-18.86	33.48	21.66	PK
4	5460.000	46.10	54.00	-7.90	24.44	21.66	AV
5	5635.125	58.01	68.20	-10.19	36.24	21.77	PK
6	5660.063	57.94	75.67	-17.73	36.23	21.71	PK
7	5821.500	121.10	131.20	-10.10	98.74	22.36	PK
* 8	5918.188	70.29	73.22	-2.94	47.72	22.57	PK
9	5926.938	65.07	68.20	-3.13	42.47	22.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/4
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 165,5.825G,BW20M	Humidity (%RH)	58.0

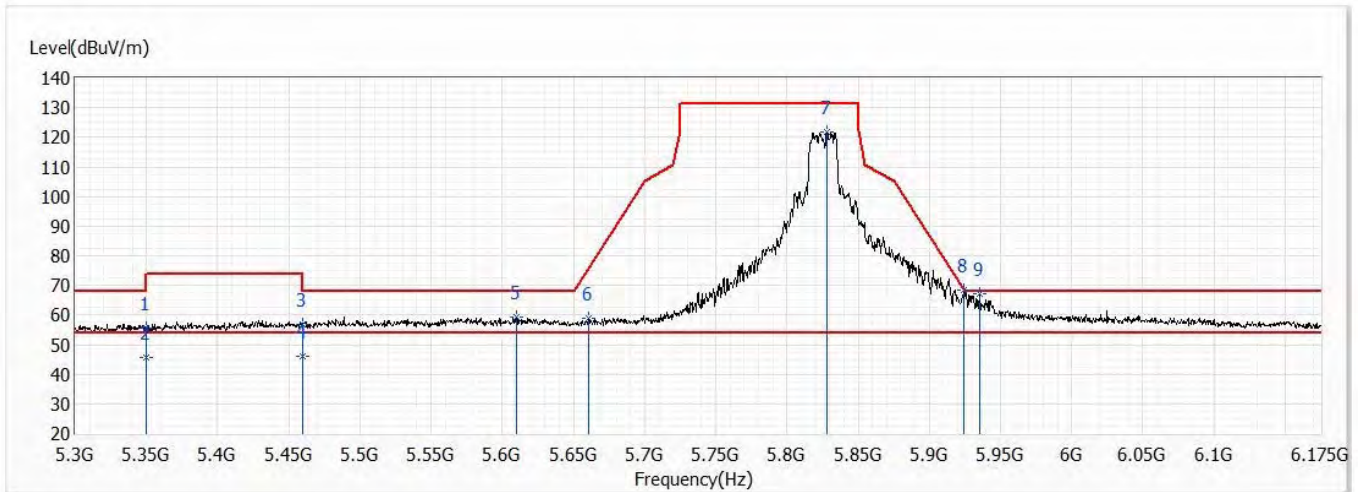


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.68	74.00	-18.32	34.37	21.31	PK
2	5350.000	45.64	54.00	-8.36	24.33	21.31	AV
3	5460.000	56.94	74.00	-17.06	35.28	21.66	PK
4	5460.000	45.88	54.00	-8.12	24.22	21.66	AV
5	5609.750	59.35	68.20	-8.85	37.45	21.90	PK
6	5660.500	58.72	76.00	-17.28	37.01	21.71	PK
7	5828.063	122.00	131.20	-9.20	99.67	22.33	PK
* 8	5924.313	68.42	68.71	-0.28	45.82	22.60	PK
9	5935.250	67.04	68.20	-1.16	44.41	22.63	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/5
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 151,5.755G,BW40M	Humidity (%RH)	58.0

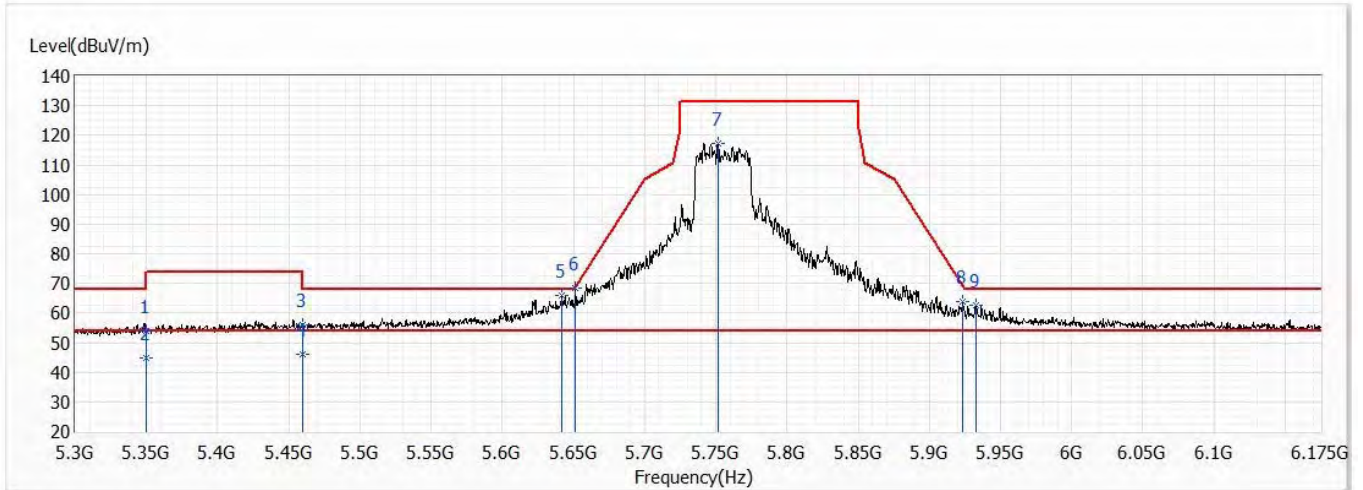


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.83	74.00	-20.17	32.52	21.31	PK
2	5350.000	44.84	54.00	-9.16	23.53	21.31	AV
3	5460.000	56.20	74.00	-17.80	34.54	21.66	PK
4	5460.000	46.12	54.00	-7.88	24.46	21.66	AV
5	5642.125	65.83	68.20	-2.37	44.10	21.73	PK
* 6	5651.313	68.53	69.18	-0.64	46.83	21.70	PK
7	5751.500	117.35	131.20	-13.85	95.06	22.29	PK
8	5923.438	64.06	69.35	-5.29	41.47	22.59	PK
9	5933.063	62.71	68.20	-5.49	40.09	22.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/5
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 151,5.755G,BW40M	Humidity (%RH)	58.0

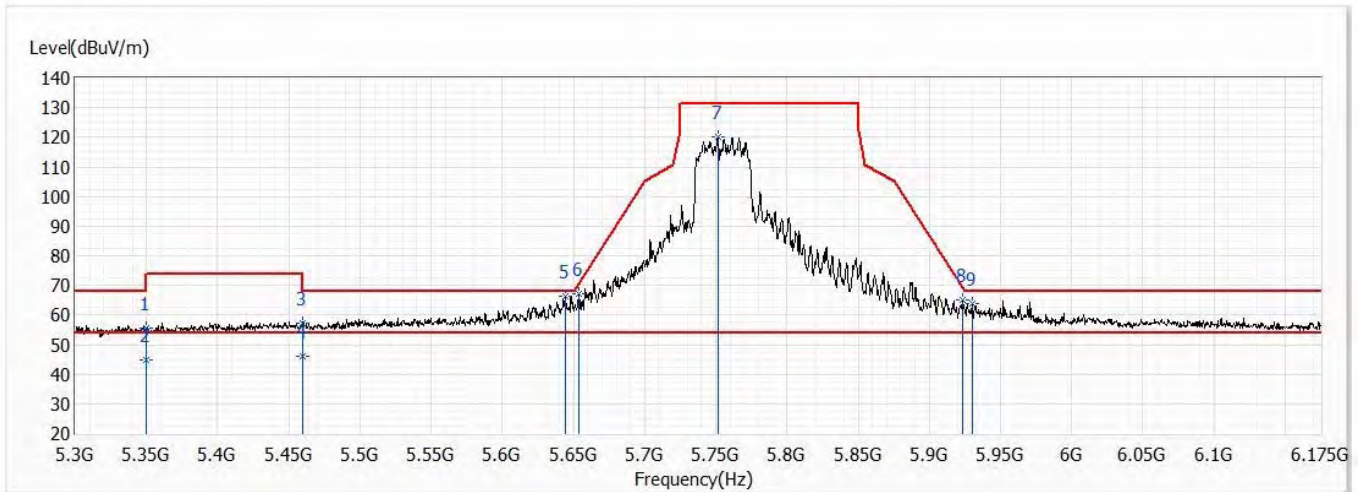


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.52	74.00	-18.48	34.21	21.31	PK
2	5350.000	44.89	54.00	-9.11	23.58	21.31	AV
3	5460.000	57.28	74.00	-16.72	35.62	21.66	PK
4	5460.000	46.24	54.00	-7.76	24.58	21.66	AV
* 5	5644.313	66.54	68.20	-1.66	44.82	21.72	PK
6	5653.500	67.13	70.80	-3.67	45.43	21.70	PK
7	5751.500	120.27	131.20	-10.93	97.98	22.29	PK
8	5923.000	65.27	69.67	-4.40	42.68	22.59	PK
9	5930.000	64.04	68.20	-4.16	41.43	22.61	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/5
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 159,5.795G,BW40M	Humidity (%RH)	58.0

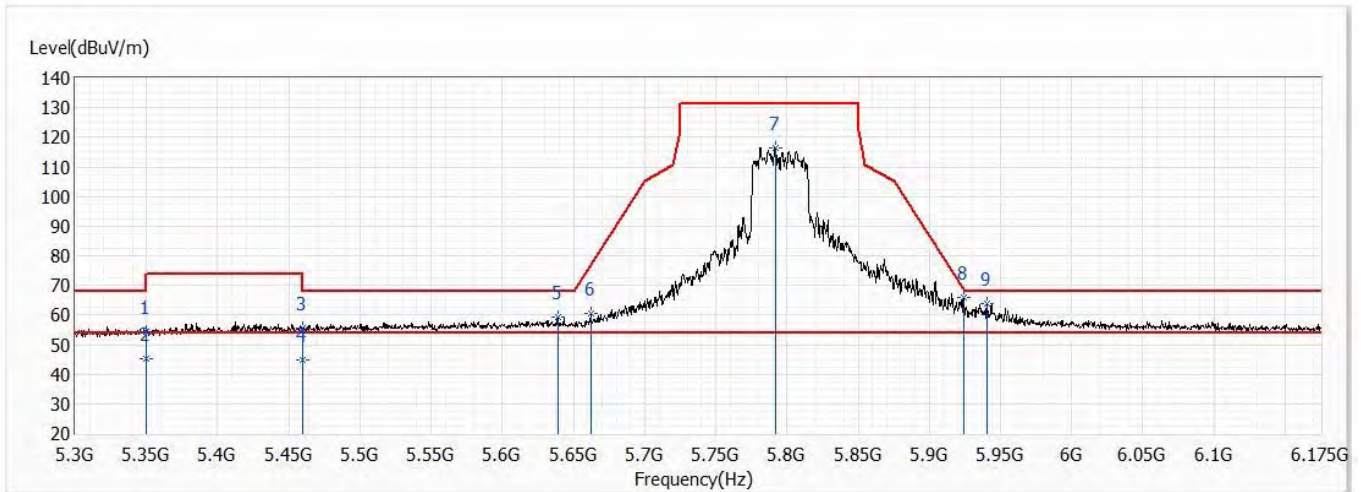


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.52	74.00	-19.48	33.21	21.31	PK
2	5350.000	45.36	54.00	-8.64	24.05	21.31	AV
3	5460.000	55.54	74.00	-18.46	33.88	21.66	PK
4	5460.000	44.70	54.00	-9.30	23.04	21.66	AV
5	5639.063	59.24	68.20	-8.96	37.49	21.75	PK
6	5662.250	60.36	77.30	-16.93	38.65	21.71	PK
7	5791.750	116.61	131.20	-14.59	94.24	22.37	PK
* 8	5923.875	65.75	69.03	-3.27	43.15	22.60	PK
9	5940.500	63.72	68.20	-4.48	41.06	22.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/5
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 159,5.795G,BW40M	Humidity (%RH)	58.0

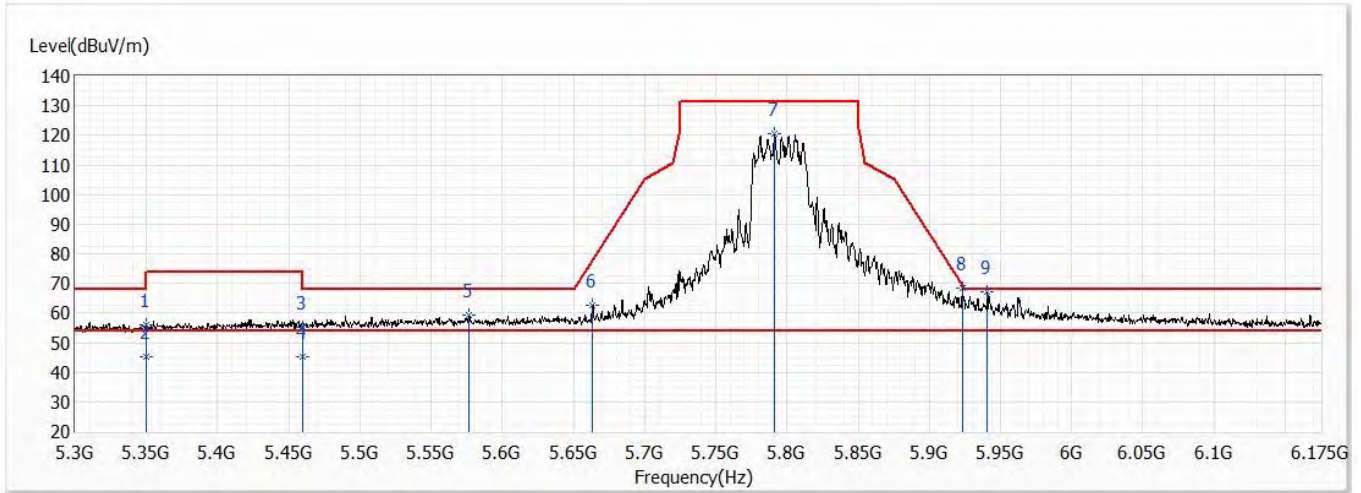


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.04	74.00	-17.96	34.73	21.31	PK
2	5350.000	45.23	54.00	-8.77	23.92	21.31	AV
3	5460.000	55.03	74.00	-18.97	33.37	21.66	PK
4	5460.000	45.12	54.00	-8.88	23.46	21.66	AV
5	5576.500	59.48	68.20	-8.72	37.56	21.92	PK
6	5663.563	62.77	78.27	-15.50	41.06	21.71	PK
7	5791.313	120.44	131.20	-10.76	98.07	22.37	PK
8	5923.000	68.31	69.67	-1.37	45.72	22.59	PK
* 9	5940.938	67.12	68.20	-1.08	44.46	22.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/5
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 155,5.775G,BW80M	Humidity (%RH)	58.0

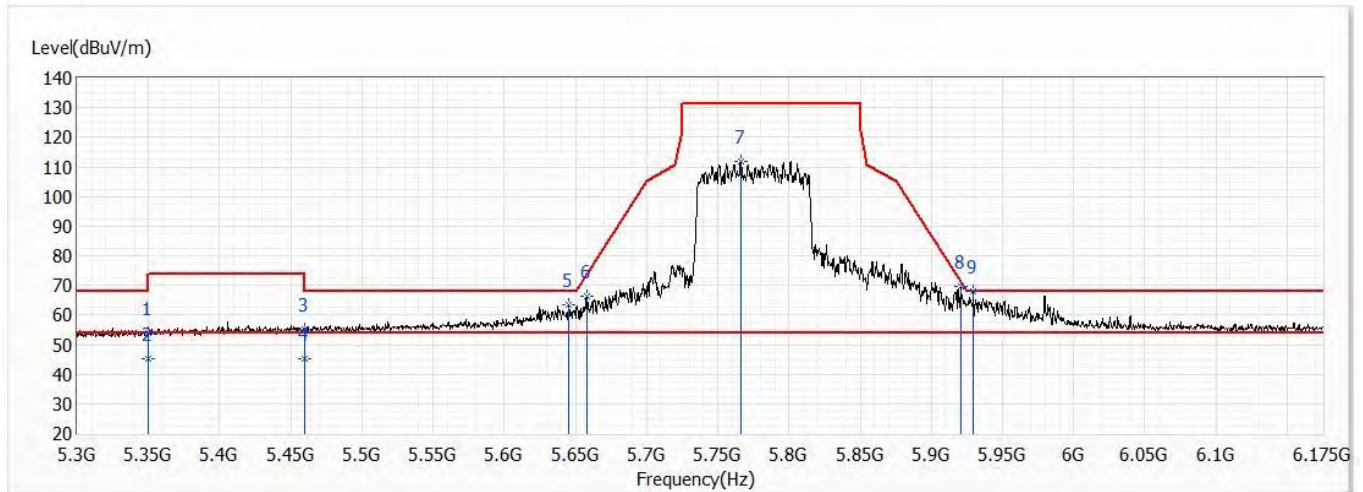


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.09	74.00	-19.91	32.78	21.31	PK
2	5350.000	45.24	54.00	-8.76	23.93	21.31	AV
3	5460.000	54.99	74.00	-19.01	33.33	21.66	PK
4	5460.000	45.15	54.00	-8.85	23.49	21.66	AV
5	5645.188	63.47	68.20	-4.73	41.75	21.72	PK
6	5657.875	66.37	74.05	-7.68	44.67	21.70	PK
7	5765.938	112.04	131.20	-19.16	89.72	22.32	PK
8	5920.813	69.80	71.29	-1.49	47.22	22.58	PK
* 9	5929.563	67.82	68.20	-0.38	45.21	22.61	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/5
Test Mode	Mode 1: Transmit_Non-BF_EBM522U	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	802.11ax,Ant0+1+2+3,Ch 155,5.775G,BW80M	Humidity (%RH)	58.0

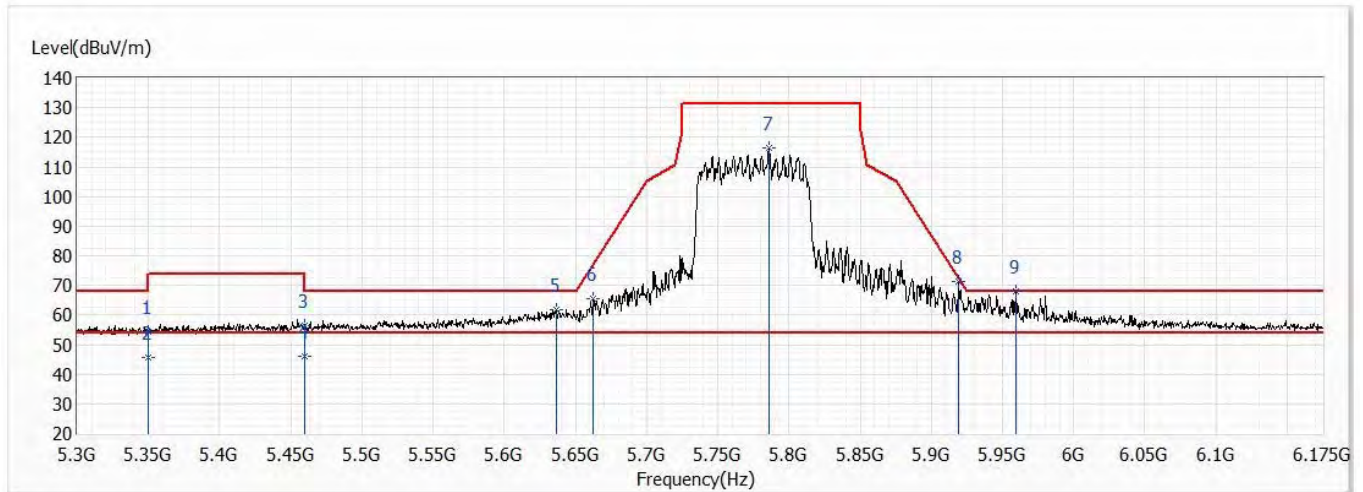


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.30	74.00	-19.70	32.99	21.31	PK
2	5350.000	45.63	54.00	-8.37	24.32	21.31	AV
3	5460.000	56.41	74.00	-17.59	34.75	21.66	PK
4	5460.000	46.23	54.00	-7.77	24.57	21.66	AV
5	5636.438	61.66	68.20	-6.54	39.90	21.76	PK
6	5662.688	65.52	77.62	-12.10	43.81	21.71	PK
7	5785.625	116.30	131.20	-14.90	93.94	22.36	PK
8	5919.500	71.37	72.25	-0.88	48.79	22.58	PK
* 9	5959.313	67.82	68.20	-0.38	45.16	22.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/12
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 36,5.18G,BW20M	Humidity (%RH)	58.0

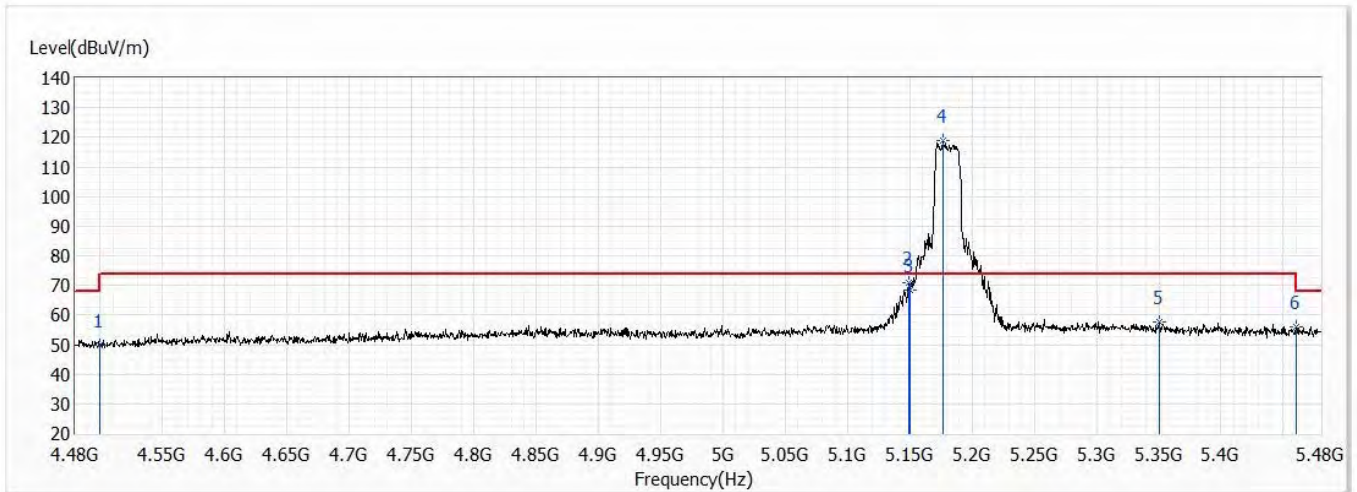


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.99	74.00	-24.01	30.19	19.80	PK
2	5149.000	71.07	74.00	-2.93	49.20	21.87	PK
3	5150.000	68.44	74.00	-5.56	46.57	21.87	PK
! 4	5176.500	118.69	74.00	44.69	96.82	21.87	PK
5	5350.000	57.56	74.00	-16.44	36.25	21.31	PK
6	5460.000	56.20	74.00	-17.80	34.54	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/12
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 36,5.18G,BW20M	Humidity (%RH)	58.0

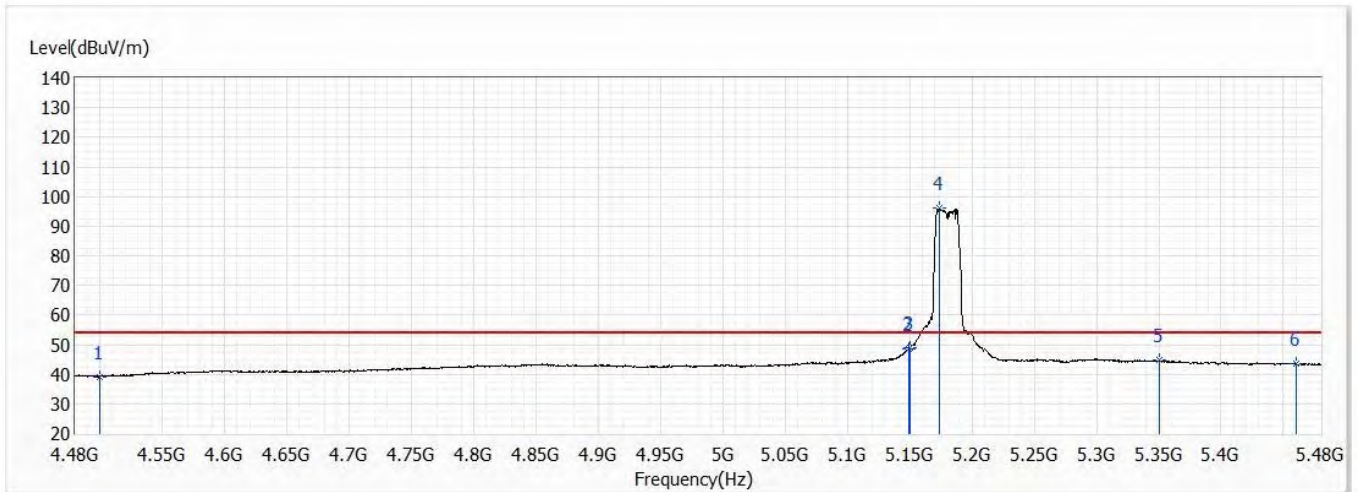


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.24	54.00	-14.76	19.44	19.80	AV
2	5149.000	48.65	54.00	-5.35	26.78	21.87	AV
3	5150.000	48.99	54.00	-5.01	27.12	21.87	AV
! 4	5173.500	96.24	54.00	42.24	74.37	21.87	AV
5	5350.000	44.64	54.00	-9.36	23.33	21.31	AV
6	5460.000	43.63	54.00	-10.37	21.97	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/12
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 36,5.18G,BW20M	Humidity (%RH)	58.0

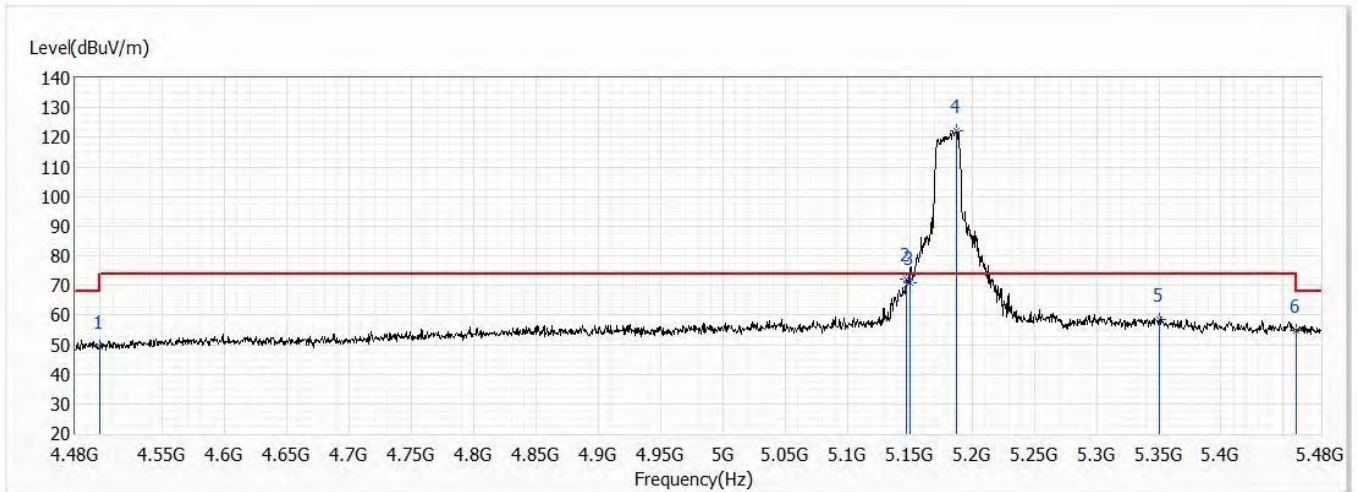


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.22	74.00	-24.78	29.42	19.80	PK
2	5147.000	72.01	74.00	-1.99	50.15	21.86	PK
3	5150.000	70.95	74.00	-3.05	49.08	21.87	PK
! 4	5188.000	122.01	74.00	48.01	100.13	21.88	PK
5	5350.000	58.32	74.00	-15.68	37.01	21.31	PK
6	5460.000	54.66	74.00	-19.34	33.00	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/12
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 36,5.18G,BW20M	Humidity (%RH)	58.0

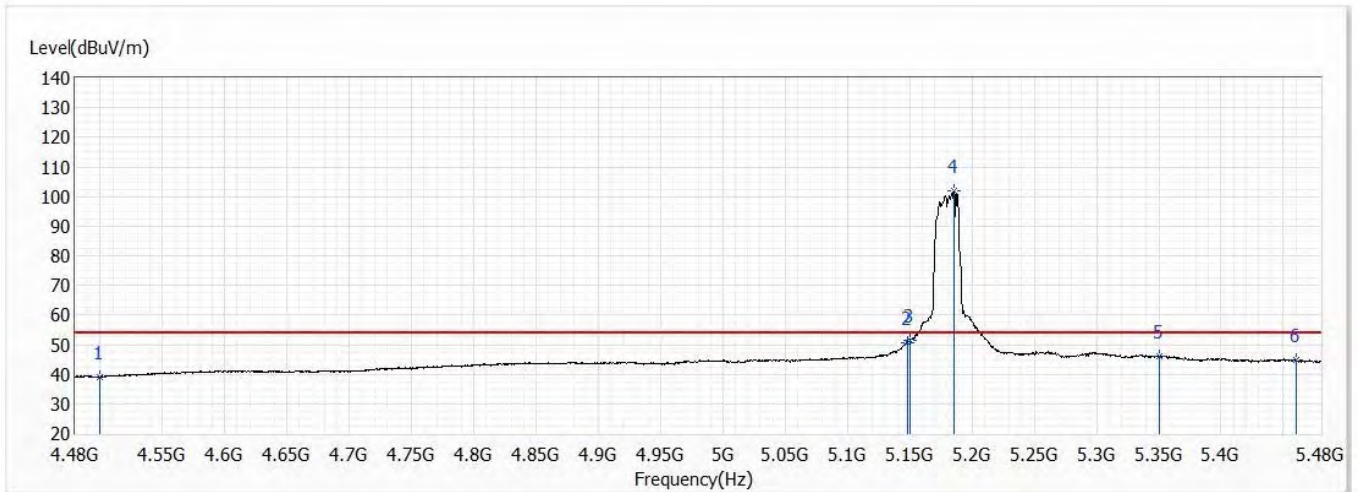


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.04	54.00	-14.96	19.24	19.80	AV
2	5148.000	50.58	54.00	-3.42	28.71	21.87	AV
3	5150.000	51.58	54.00	-2.42	29.71	21.87	AV
! 4	5186.000	101.76	54.00	47.76	79.88	21.88	AV
5	5350.000	46.08	54.00	-7.92	24.77	21.31	AV
6	5460.000	44.71	54.00	-9.29	23.05	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 44,5.22G,BW20M	Humidity (%RH)	58.0

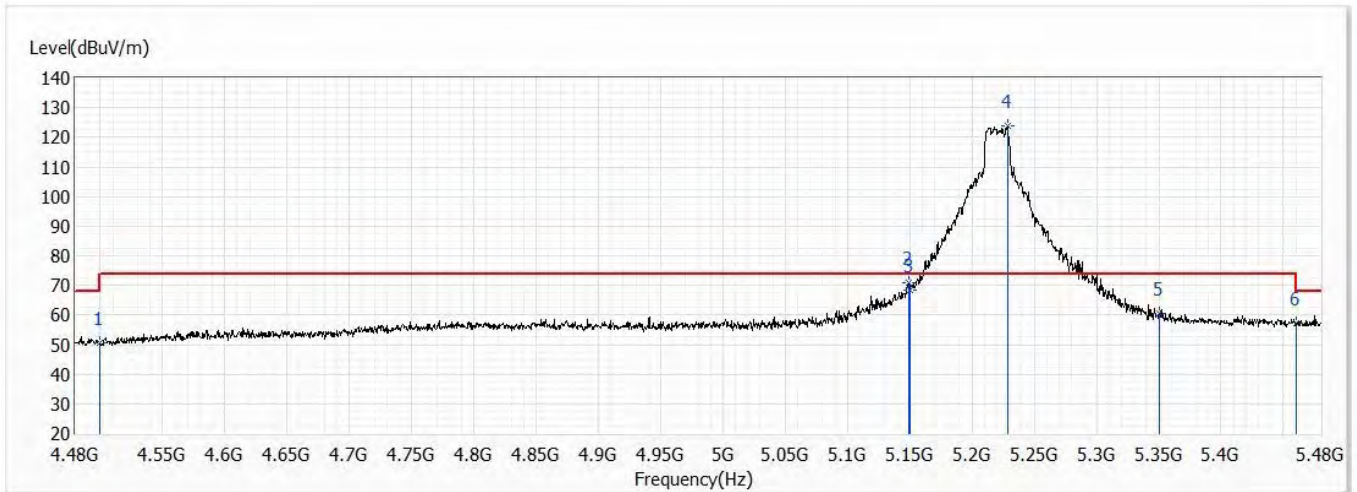


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.78	74.00	-23.22	30.98	19.80	PK
2	5149.500	71.04	74.00	-2.96	49.17	21.87	PK
3	5150.000	68.23	74.00	-5.77	46.36	21.87	PK
! 4	5228.500	123.83	74.00	49.83	102.23	21.60	PK
5	5350.000	60.52	74.00	-13.48	39.21	21.31	PK
6	5460.000	57.44	74.00	-16.56	35.78	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 44,5.22G,BW20M	Humidity (%RH)	58.0

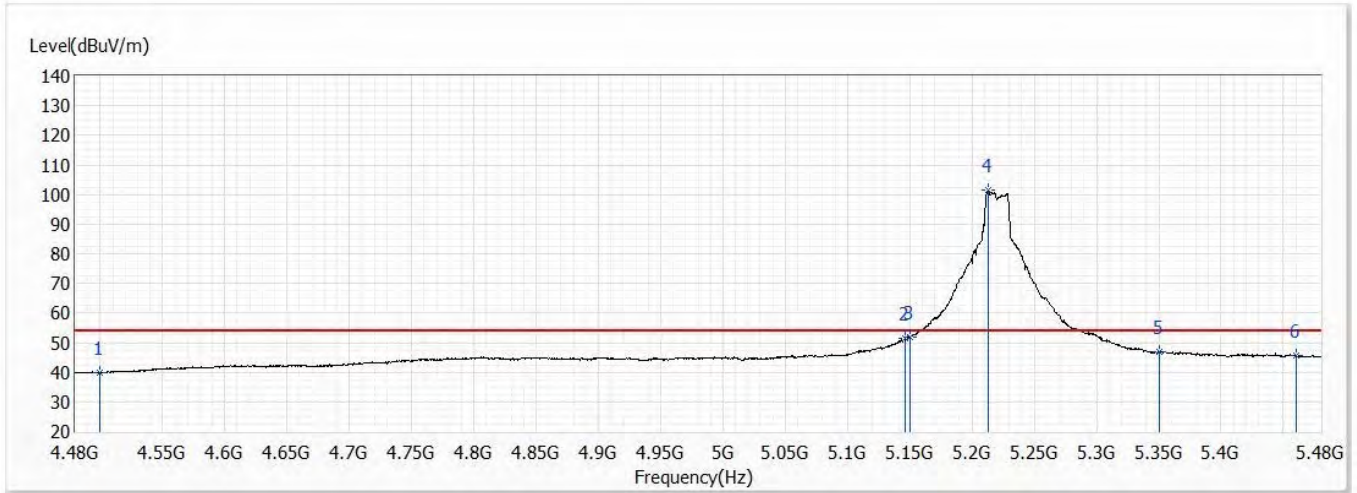


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.81	54.00	-14.19	20.01	19.80	AV
2	5146.500	51.62	54.00	-2.38	29.76	21.86	AV
3	5150.000	51.88	54.00	-2.12	30.01	21.87	AV
! 4	5213.000	101.39	54.00	47.39	79.64	21.75	AV
5	5350.000	46.85	54.00	-7.15	25.54	21.31	AV
6	5460.000	45.62	54.00	-8.38	23.96	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 44,5.22G,BW20M	Humidity (%RH)	58.0

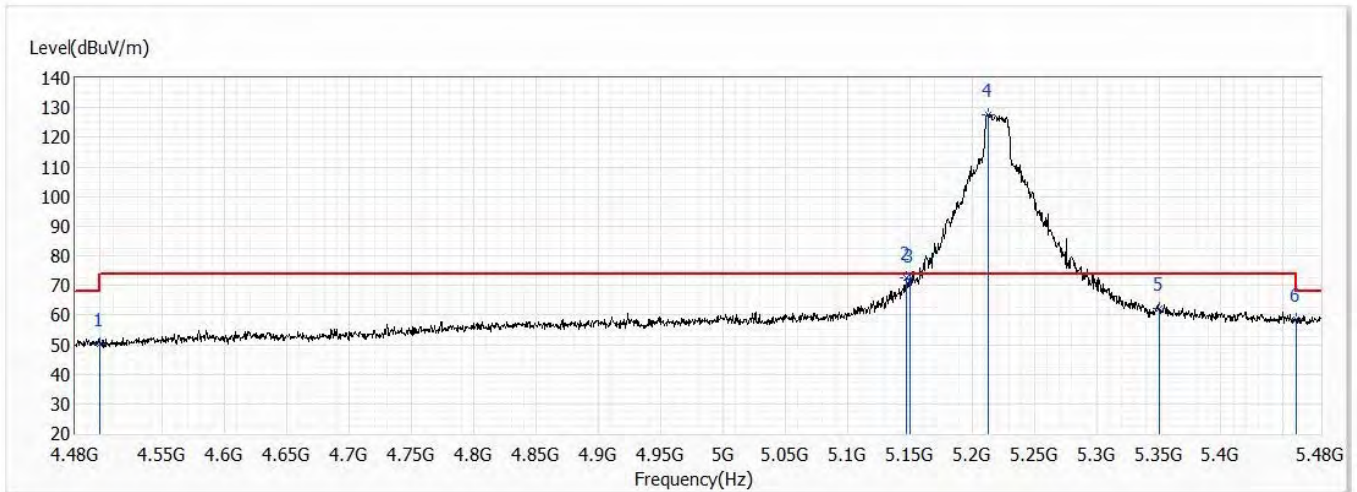


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.19	74.00	-23.81	30.39	19.80	PK
2	5147.000	72.57	74.00	-1.43	50.71	21.86	PK
3	5150.000	71.60	74.00	-2.40	49.73	21.87	PK
! 4	5213.500	127.72	74.00	53.72	105.97	21.75	PK
5	5350.000	62.19	74.00	-11.81	40.88	21.31	PK
6	5460.000	58.63	74.00	-15.37	36.97	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 44,5.22G,BW20M	Humidity (%RH)	58.0

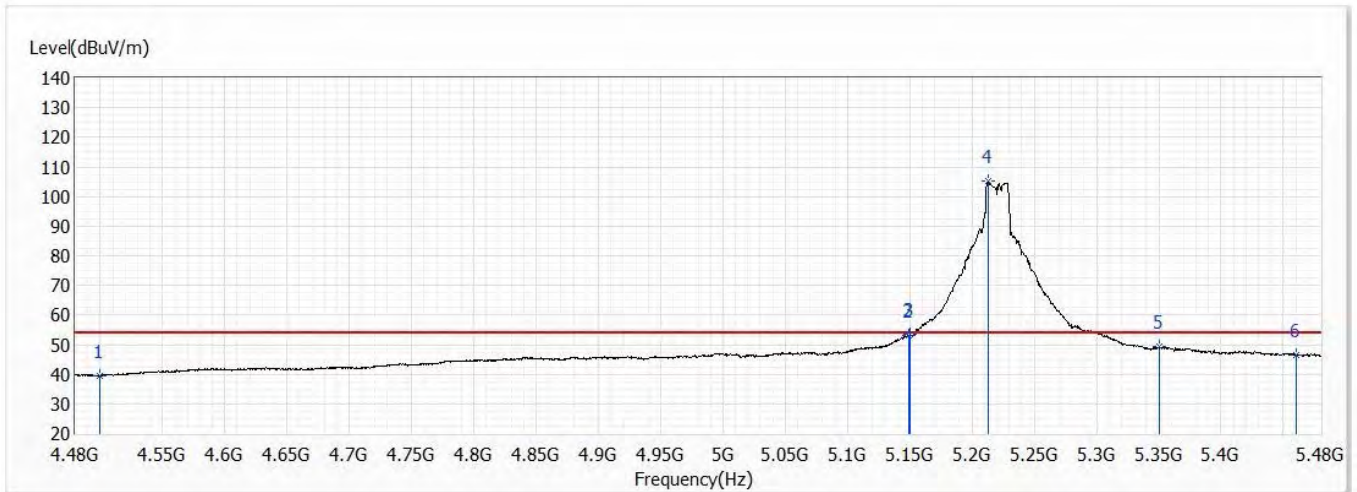


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.38	54.00	-14.62	19.58	19.80	AV
2	5149.000	53.27	54.00	-0.73	31.40	21.87	AV
3	5150.000	53.59	54.00	-0.41	31.72	21.87	AV
! 4	5213.500	105.09	54.00	51.09	83.34	21.75	AV
5	5350.000	49.18	54.00	-4.82	27.87	21.31	AV
6	5460.000	46.53	54.00	-7.47	24.87	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 48,5.24G,BW20M	Humidity (%RH)	58.0

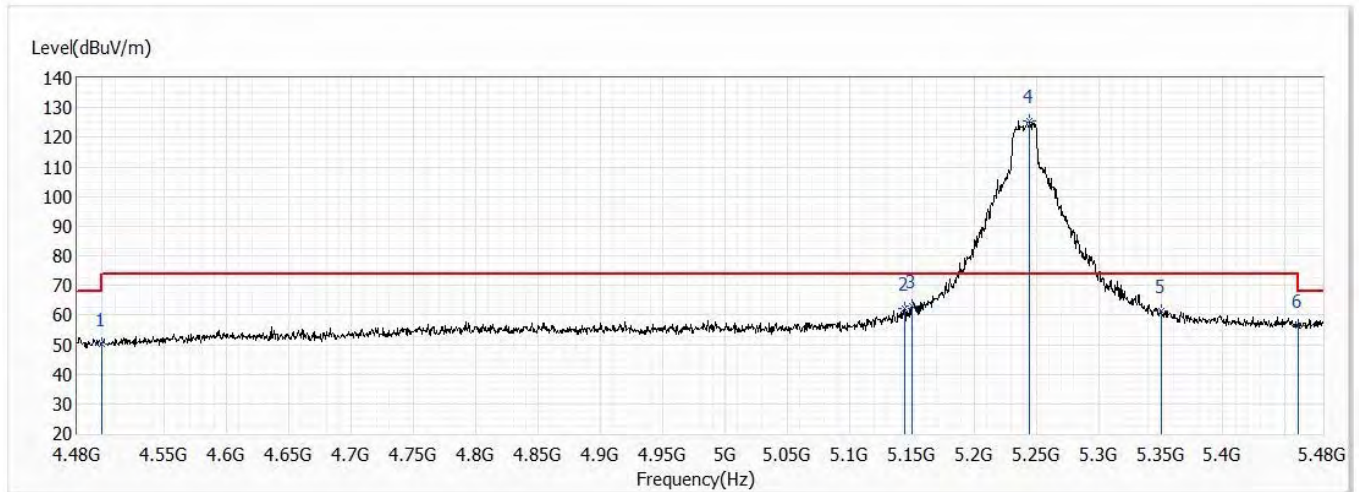


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.34	74.00	-23.66	30.54	19.80	PK
2	5144.500	62.23	74.00	-11.77	40.37	21.86	PK
3	5150.000	62.84	74.00	-11.16	40.97	21.87	PK
! 4	5244.500	125.72	74.00	51.72	104.27	21.45	PK
5	5350.000	61.39	74.00	-12.61	40.08	21.31	PK
6	5460.000	56.42	74.00	-17.58	34.76	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 48,5.24G,BW20M	Humidity (%RH)	58.0

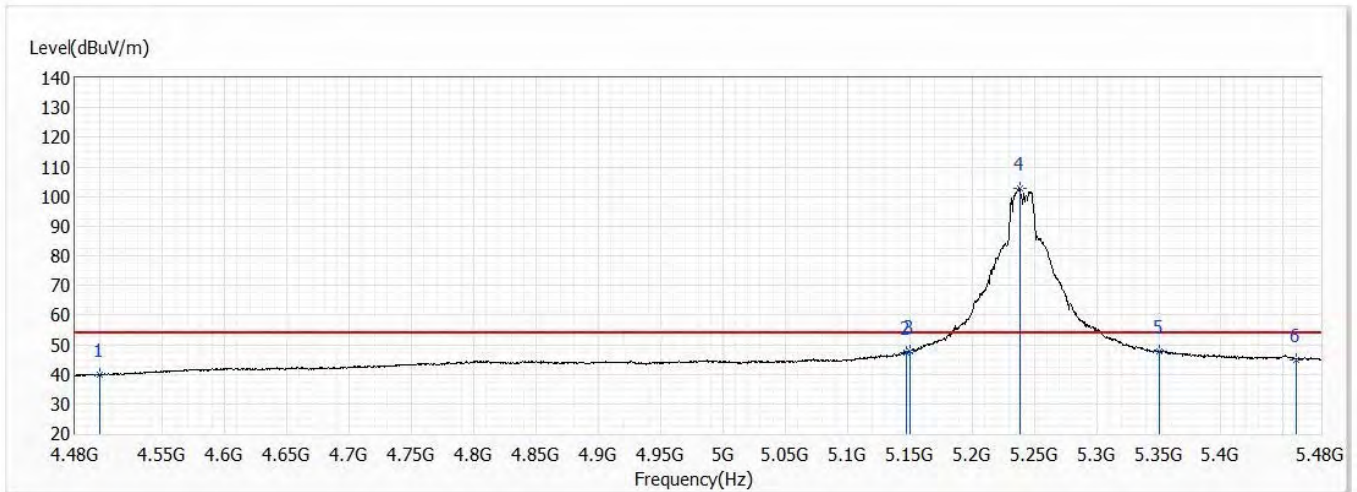


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.67	54.00	-14.33	19.87	19.80	AV
2	5147.500	47.36	54.00	-6.64	25.50	21.86	AV
3	5150.000	47.68	54.00	-6.32	25.81	21.87	AV
! 4	5238.500	102.71	54.00	48.71	81.21	21.50	AV
5	5350.000	47.81	54.00	-6.19	26.50	21.31	AV
6	5460.000	44.77	54.00	-9.23	23.11	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 48,5.24G,BW20M	Humidity (%RH)	58.0

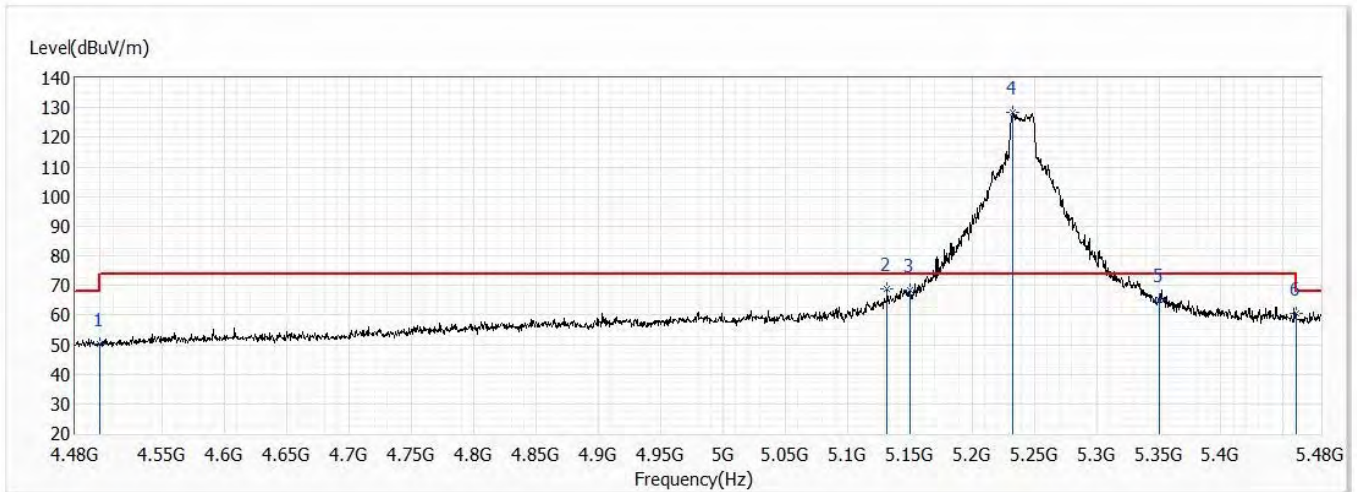


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.11	74.00	-23.89	30.31	19.80	PK
2	5132.000	68.99	74.00	-5.01	47.16	21.83	PK
3	5150.000	68.22	74.00	-5.78	46.35	21.87	PK
! 4	5233.000	128.49	74.00	54.49	106.94	21.55	PK
5	5350.000	64.98	74.00	-9.02	43.67	21.31	PK
6	5460.000	60.57	74.00	-13.43	38.91	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 48,5.24G,BW20M	Humidity (%RH)	58.0

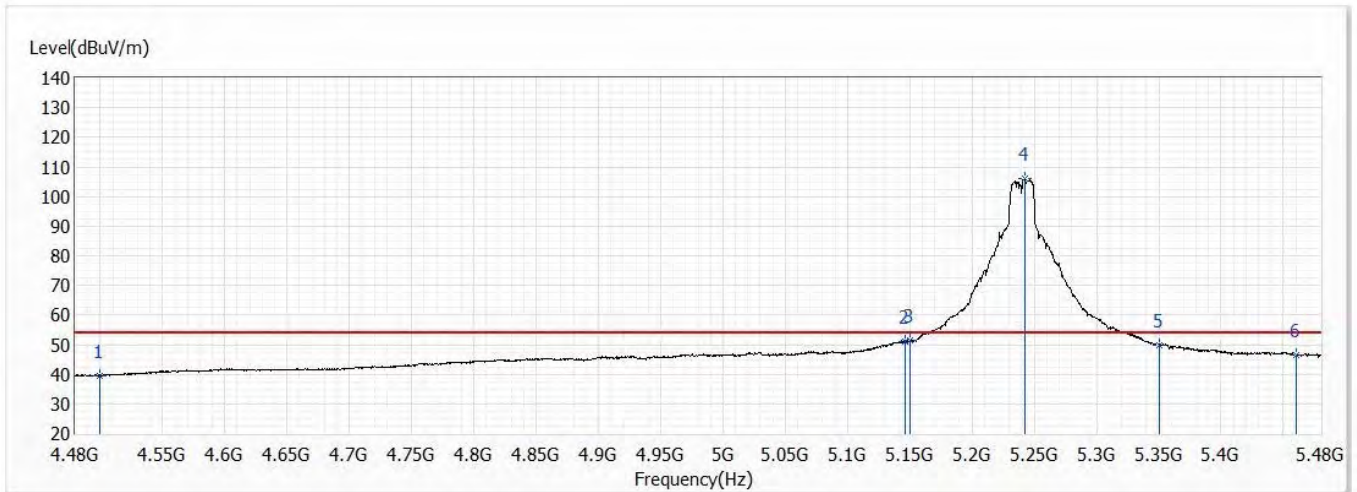


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.56	54.00	-14.44	19.76	19.80	AV
2	5146.000	50.99	54.00	-3.01	29.13	21.86	AV
3	5150.000	51.28	54.00	-2.72	29.41	21.87	AV
! 4	5242.500	105.97	54.00	51.97	84.50	21.47	AV
5	5350.000	49.99	54.00	-4.01	28.68	21.31	AV
6	5460.000	46.36	54.00	-7.64	24.70	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 38,5.19G,BW40M	Humidity (%RH)	58.0

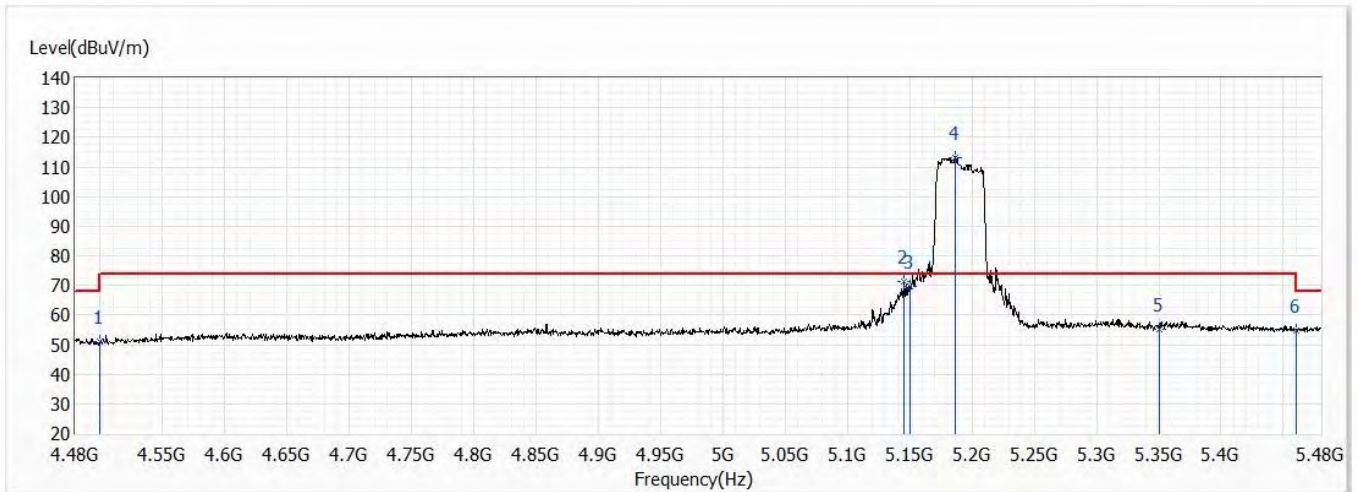


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.01	74.00	-22.99	31.21	19.80	PK
2	5145.500	71.43	74.00	-2.57	49.57	21.86	PK
3	5150.000	69.47	74.00	-4.53	47.60	21.87	PK
! 4	5187.000	113.31	74.00	39.31	91.43	21.88	PK
5	5350.000	55.37	74.00	-18.63	34.06	21.31	PK
6	5460.000	54.67	74.00	-19.33	33.01	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/13
Test Mode	Mode 3: Transmit_BF	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 38,5.19G,BW40M	Humidity (%RH)	58.0

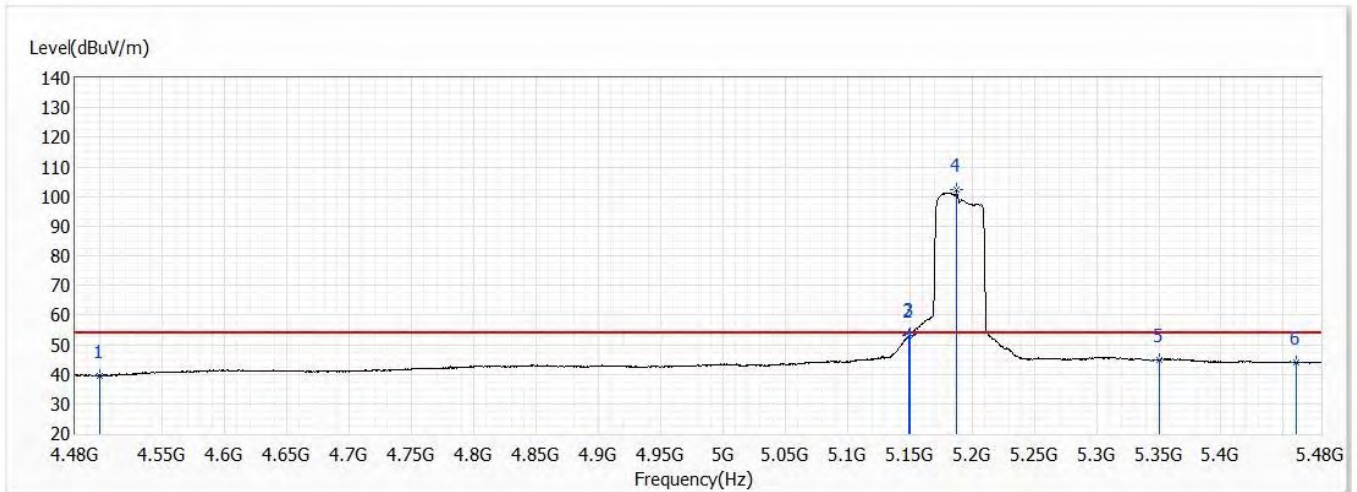


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.53	54.00	-14.47	19.73	19.80	AV
2	5149.500	53.25	54.00	-0.75	31.38	21.87	AV
3	5150.000	53.48	54.00	-0.52	31.61	21.87	AV
! 4	5188.000	102.30	54.00	48.30	80.42	21.88	AV
5	5350.000	44.97	54.00	-9.03	23.66	21.31	AV
6	5460.000	43.95	54.00	-10.05	22.29	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 38,5.19G,BW40M	Humidity (%RH)	58.0

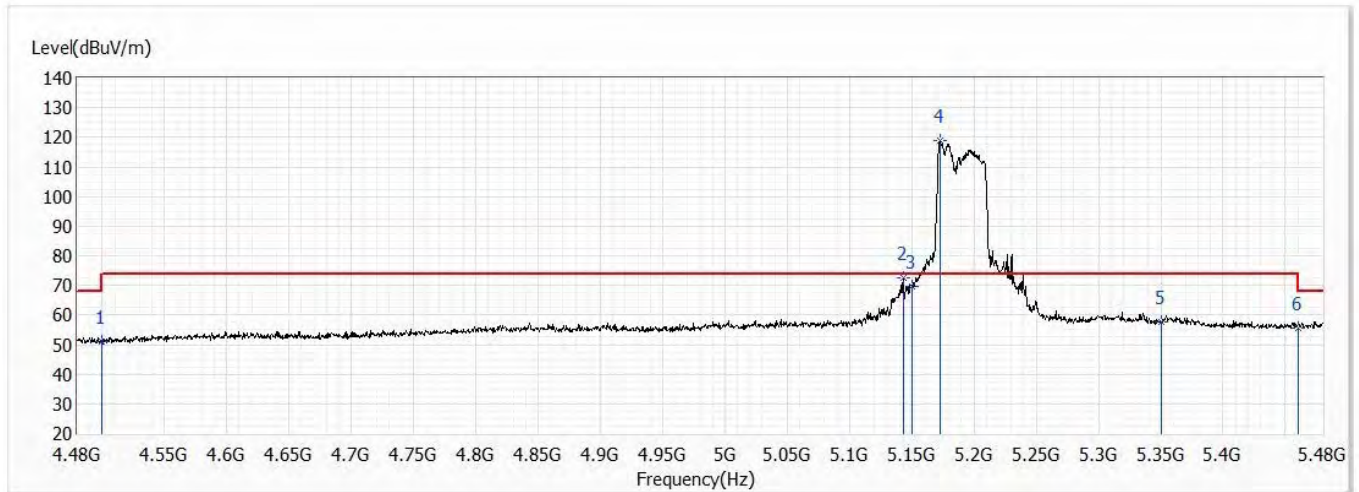


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.21	74.00	-22.79	31.41	19.80	PK
2	5143.000	72.65	74.00	-1.35	50.79	21.86	PK
3	5150.000	69.62	74.00	-4.38	47.75	21.87	PK
! 4	5172.500	118.83	74.00	44.83	96.96	21.87	PK
5	5350.000	57.47	74.00	-16.53	36.16	21.31	PK
6	5460.000	55.55	74.00	-18.45	33.89	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 38,5.19G,BW40M	Humidity (%RH)	58.0

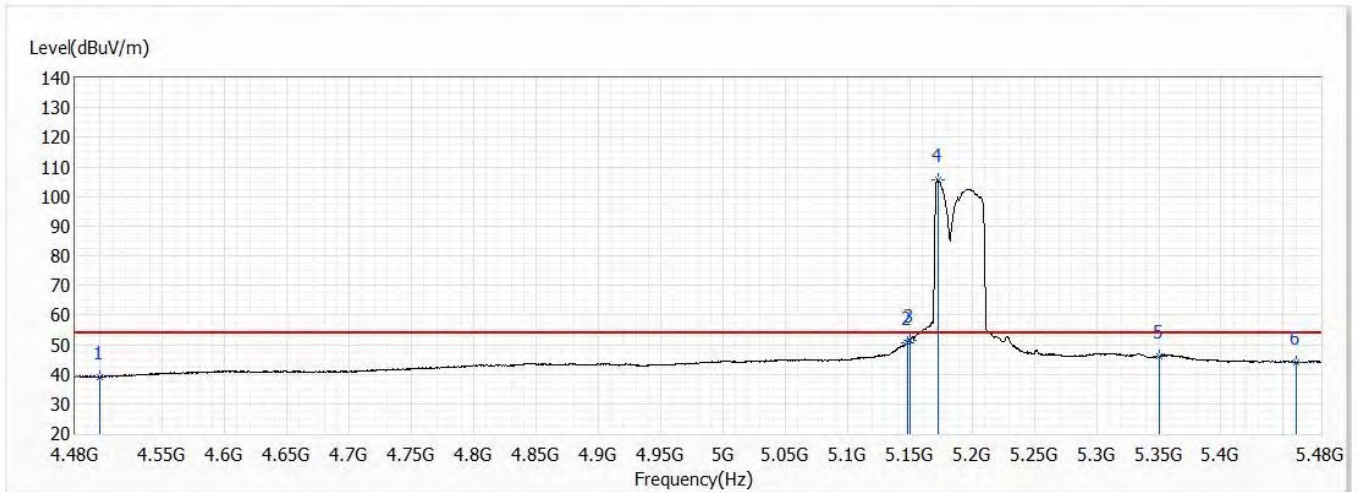


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.11	54.00	-14.89	19.31	19.80	AV
2	5148.000	50.51	54.00	-3.49	28.64	21.87	AV
3	5150.000	51.37	54.00	-2.63	29.50	21.87	AV
! 4	5172.500	105.72	54.00	51.72	83.85	21.87	AV
5	5350.000	45.99	54.00	-8.01	24.68	21.31	AV
6	5460.000	44.12	54.00	-9.88	22.46	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 46,5.23G,BW40M	Humidity (%RH)	58.0

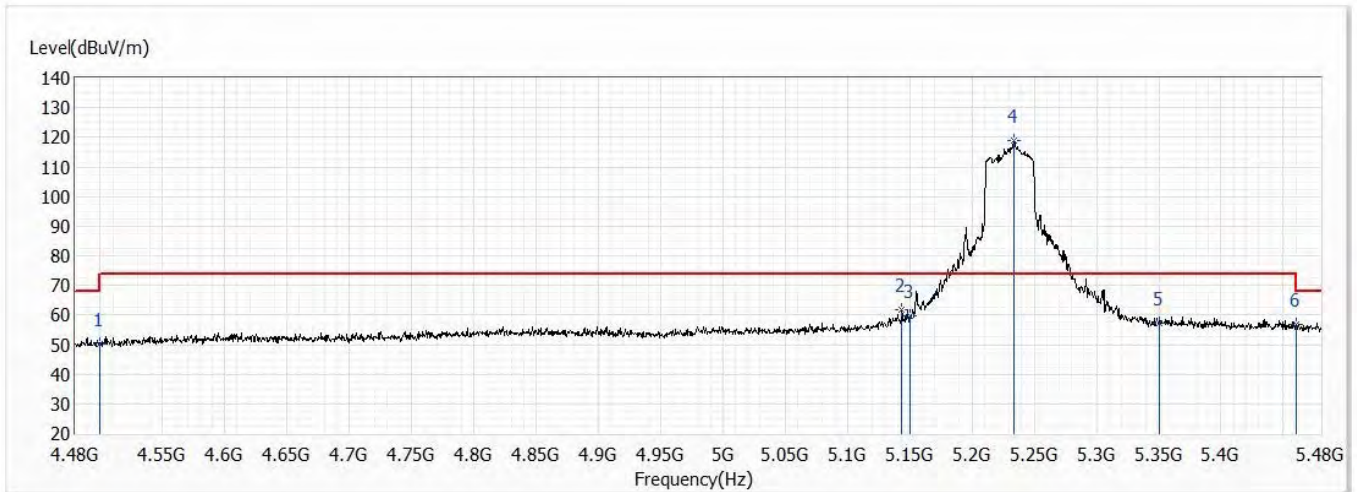


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.39	74.00	-23.61	30.59	19.80	PK
2	5143.500	61.93	74.00	-12.07	40.07	21.86	PK
3	5150.000	59.58	74.00	-14.42	37.71	21.87	PK
! 4	5234.000	119.00	74.00	45.00	97.46	21.54	PK
5	5350.000	57.31	74.00	-16.69	36.00	21.31	PK
6	5460.000	56.73	74.00	-17.27	35.07	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 46,5.23G,BW40M	Humidity (%RH)	58.0

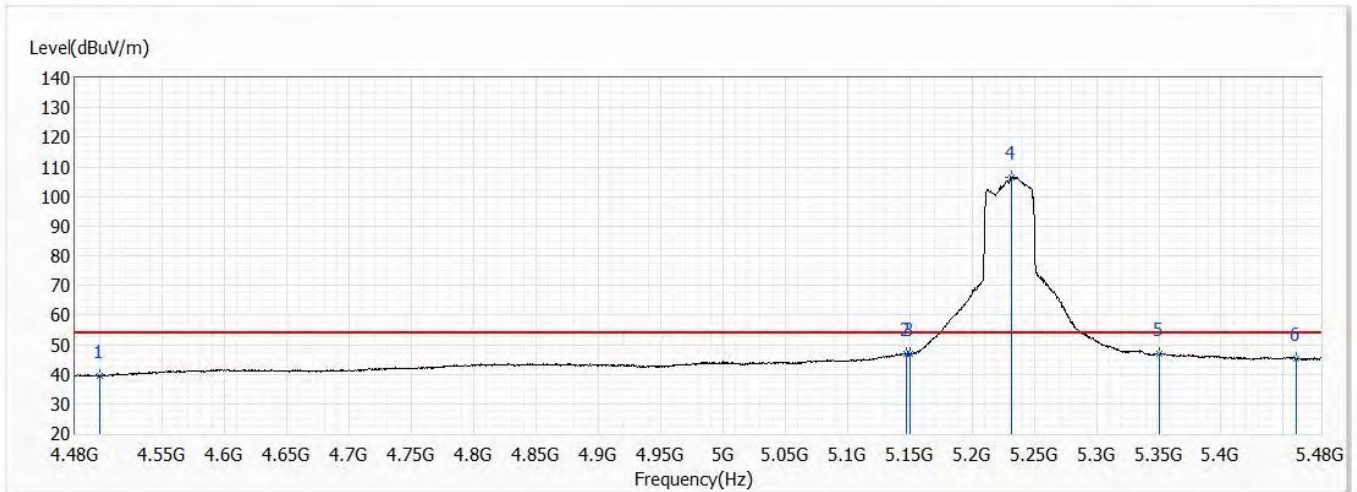


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.53	54.00	-14.47	19.73	19.80	AV
2	5147.000	46.87	54.00	-7.13	25.01	21.86	AV
3	5150.000	46.96	54.00	-7.04	25.09	21.87	AV
! 4	5231.500	106.59	54.00	52.59	85.02	21.57	AV
5	5350.000	46.84	54.00	-7.16	25.53	21.31	AV
6	5460.000	45.34	54.00	-8.66	23.68	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 46,5.23G,BW40M	Humidity (%RH)	58.0

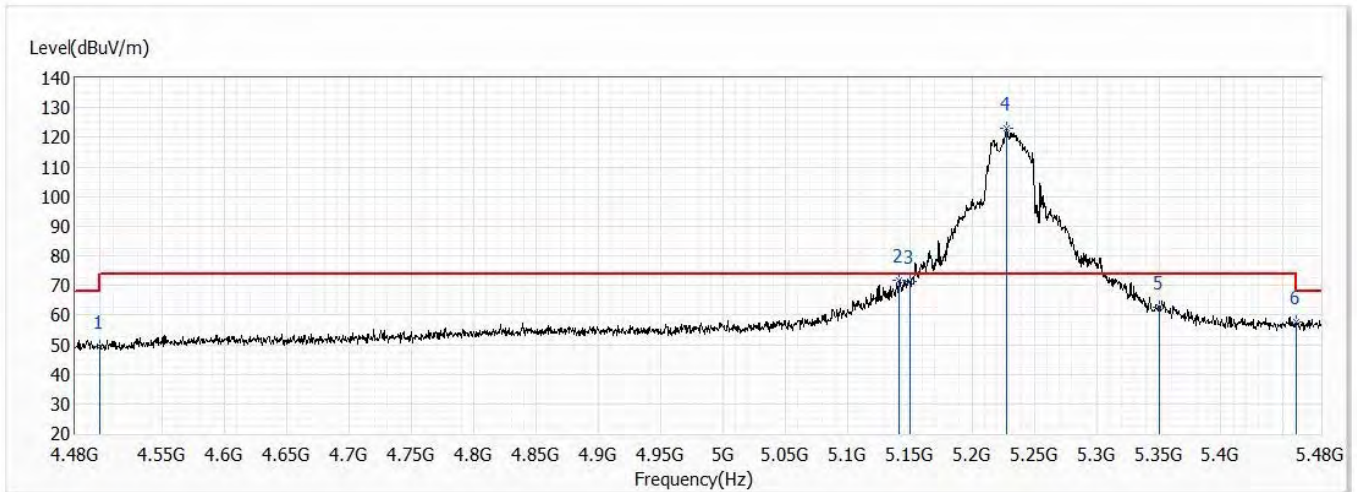


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.30	74.00	-24.70	29.50	19.80	PK
2	5141.500	71.89	74.00	-2.11	50.04	21.85	PK
3	5150.000	71.38	74.00	-2.62	49.51	21.87	PK
! 4	5228.000	123.10	74.00	49.10	101.50	21.60	PK
5	5350.000	62.80	74.00	-11.20	41.49	21.31	PK
6	5460.000	57.46	74.00	-16.54	35.80	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 46,5.23G,BW40M	Humidity (%RH)	58.0

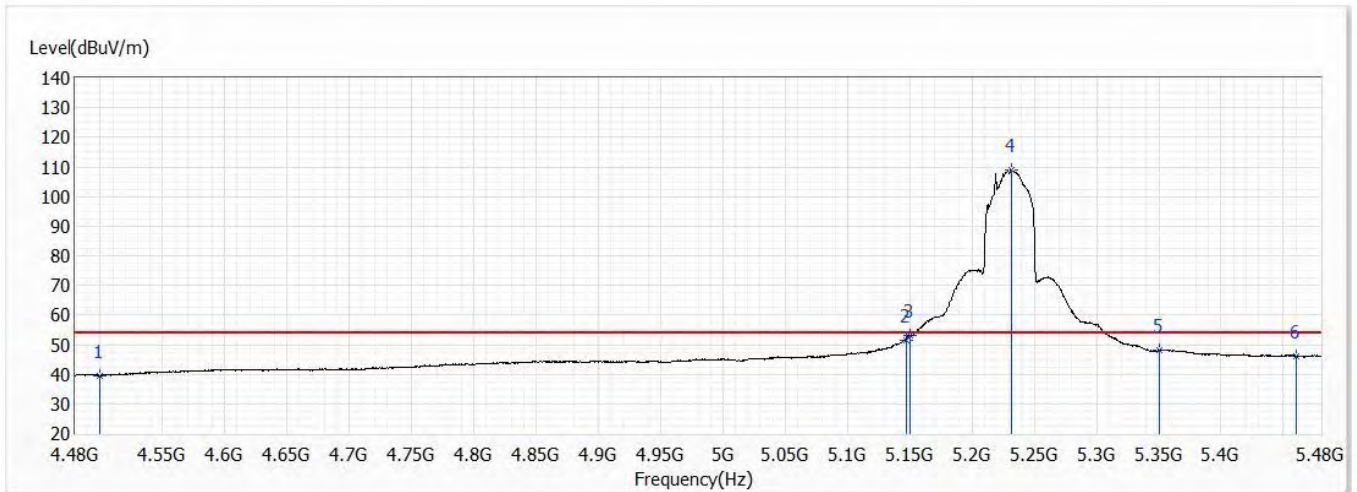


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.63	54.00	-14.37	19.83	19.80	AV
2	5147.000	51.34	54.00	-2.66	29.48	21.86	AV
3	5150.000	53.22	54.00	-0.78	31.35	21.87	AV
! 4	5231.500	109.14	54.00	55.14	87.57	21.57	AV
5	5350.000	48.01	54.00	-5.99	26.70	21.31	AV
6	5460.000	45.98	54.00	-8.02	24.32	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 42,5.21G,BW80M	Humidity (%RH)	58.0

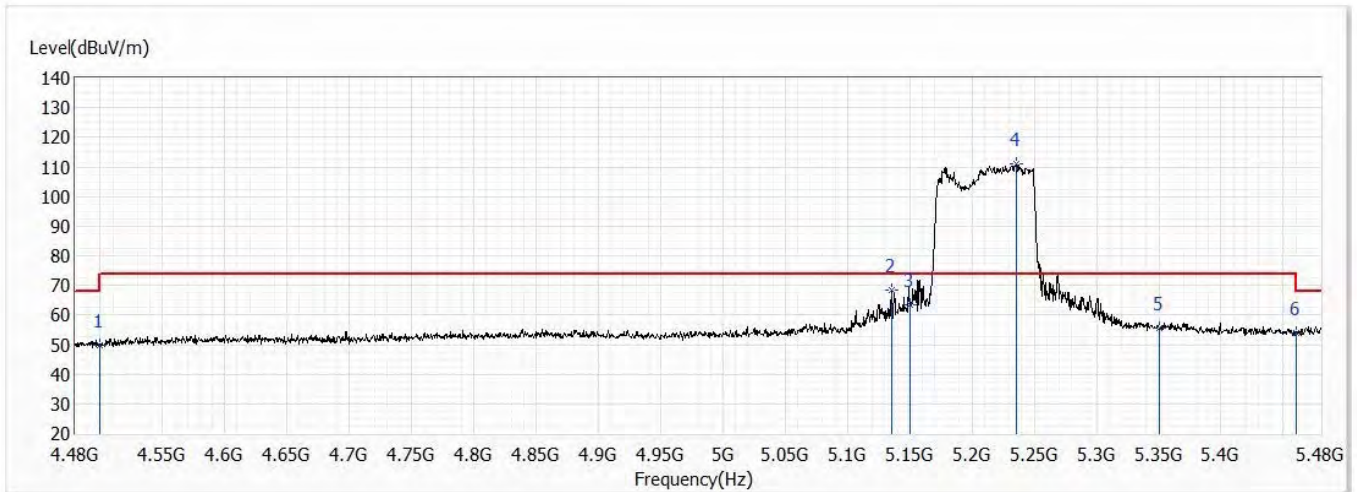


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.96	74.00	-24.04	30.16	19.80	PK
2	5135.500	68.26	74.00	-5.74	46.42	21.84	PK
3	5150.000	63.29	74.00	-10.71	41.42	21.87	PK
! 4	5235.500	110.98	74.00	36.98	89.45	21.53	PK
5	5350.000	55.63	74.00	-18.37	34.32	21.31	PK
6	5460.000	53.78	74.00	-20.22	32.12	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 42,5.21G,BW80M	Humidity (%RH)	58.0

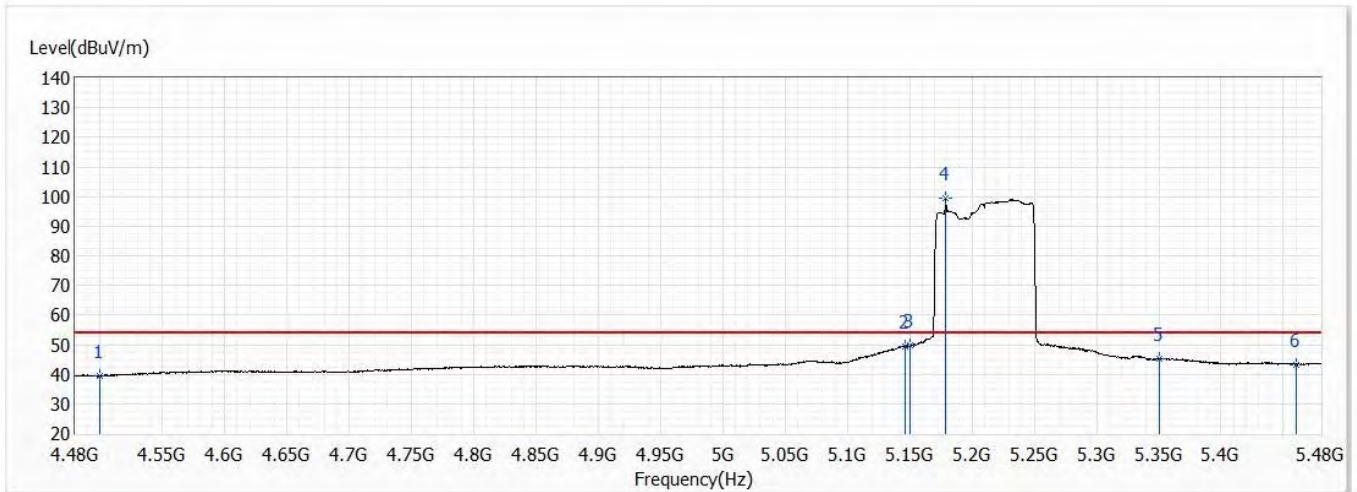


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.38	54.00	-14.62	19.58	19.80	AV
2	5146.500	49.35	54.00	-4.65	27.49	21.86	AV
3	5150.000	49.62	54.00	-4.38	27.75	21.87	AV
! 4	5179.000	99.42	54.00	45.42	77.54	21.88	AV
5	5350.000	45.18	54.00	-8.82	23.87	21.31	AV
6	5460.000	43.22	54.00	-10.78	21.56	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 42,5.21G,BW80M	Humidity (%RH)	58.0

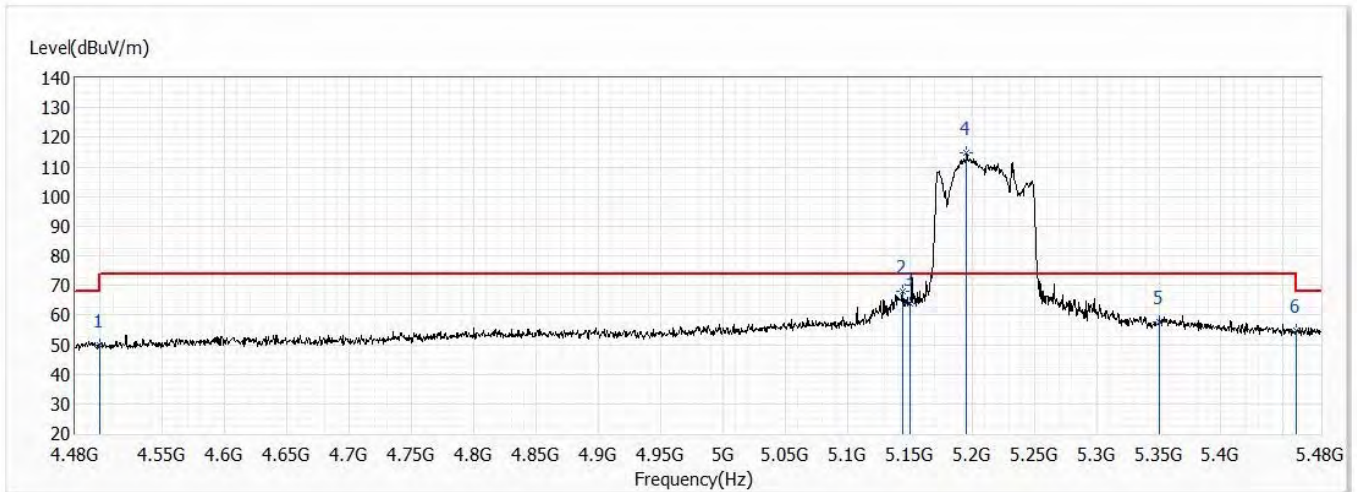


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.75	74.00	-24.25	29.95	19.80	PK
2	5144.000	67.97	74.00	-6.03	46.11	21.86	PK
3	5150.000	63.89	74.00	-10.11	42.02	21.87	PK
! 4	5195.500	114.61	74.00	40.61	92.74	21.87	PK
5	5350.000	57.74	74.00	-16.26	36.43	21.31	PK
6	5460.000	54.81	74.00	-19.19	33.15	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 42,5.21G,BW80M	Humidity (%RH)	58.0

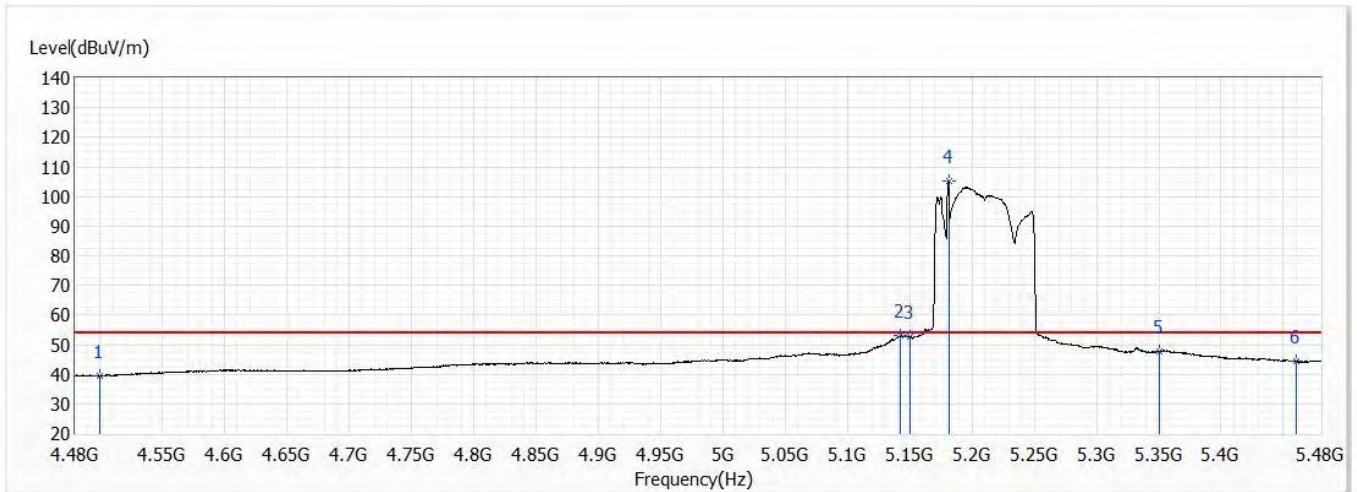


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.57	54.00	-14.43	19.77	19.80	AV
2	5142.500	53.17	54.00	-0.83	31.31	21.86	AV
3	5150.000	52.68	54.00	-1.32	30.81	21.87	AV
! 4	5181.500	105.43	54.00	51.43	83.55	21.88	AV
5	5350.000	47.63	54.00	-6.37	26.32	21.31	AV
6	5460.000	44.30	54.00	-9.70	22.64	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/29
Test Mode	Mode 3: Transmit_BF	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 50,5.25G,BW160M	Humidity (%RH)	63.0

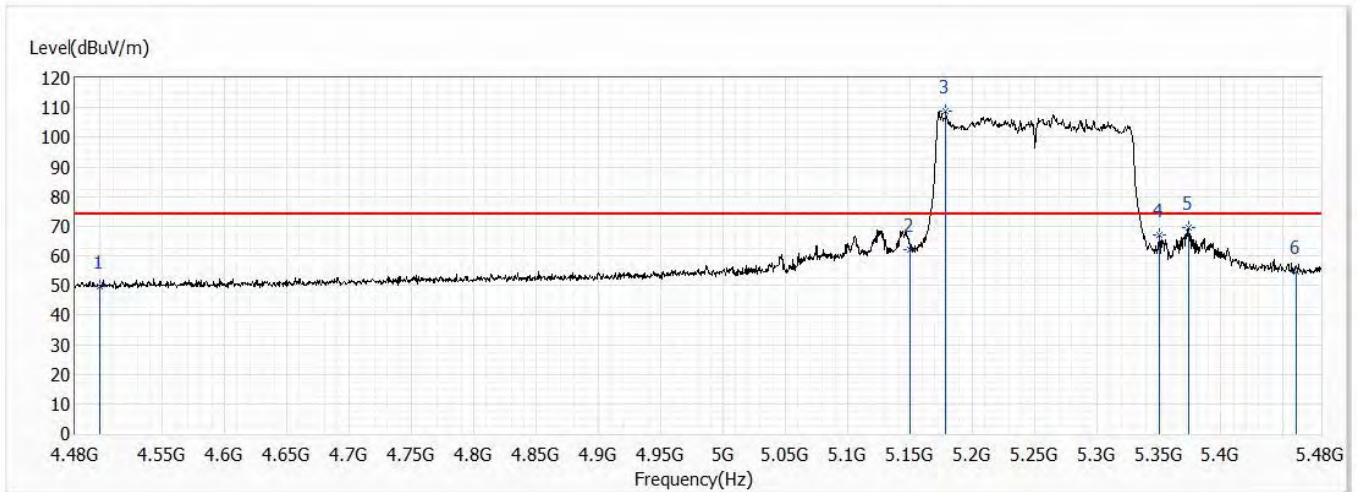


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.82	74.00	-24.18	30.02	19.80	PK
2	5150.000	61.95	74.00	-12.05	40.08	21.87	PK
! 3	5179.000	108.91	74.00	34.91	87.03	21.88	PK
4	5350.000	67.12	74.00	-6.88	45.81	21.31	PK
5	5374.000	69.58	74.00	-4.42	48.13	21.45	PK
6	5460.000	54.61	74.00	-19.39	32.95	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/29
Test Mode	Mode 3: Transmit_BF	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 50,5.25G,BW160M	Humidity (%RH)	63.0

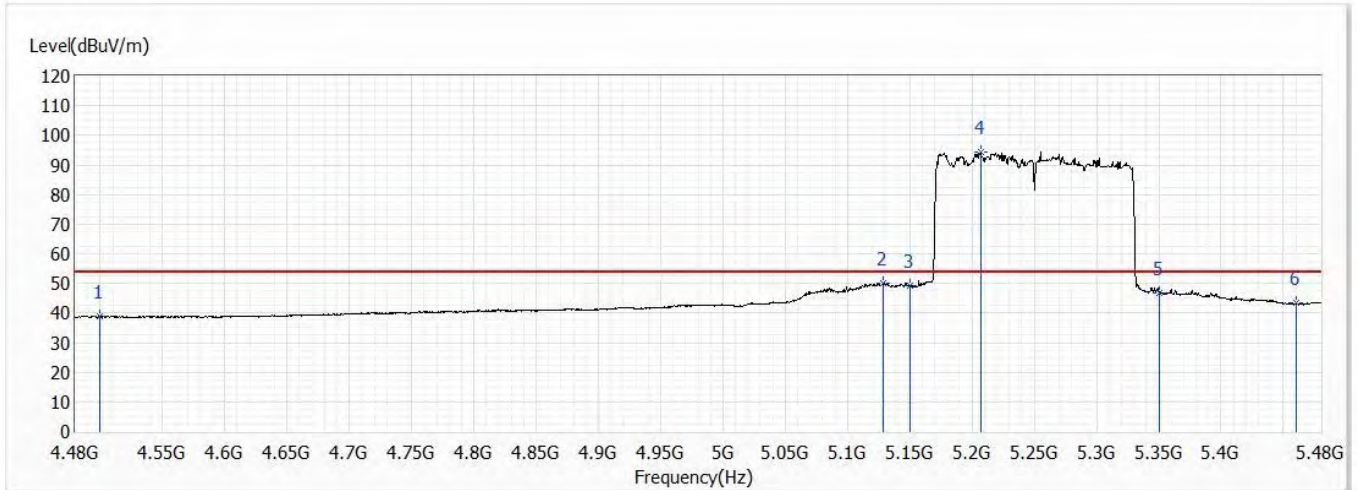


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	38.79	54.00	-15.21	18.99	19.80	AV
2	5129.000	50.06	54.00	-3.94	28.23	21.83	AV
3	5150.000	49.11	54.00	-4.89	27.24	21.87	AV
! 4	5207.000	94.20	54.00	40.20	72.39	21.81	AV
5	5350.000	46.83	54.00	-7.17	25.52	21.31	AV
6	5460.000	43.35	54.00	-10.65	21.69	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/29
Test Mode	Mode 3: Transmit_BF	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 50,5.25G,BW160M	Humidity (%RH)	63.0

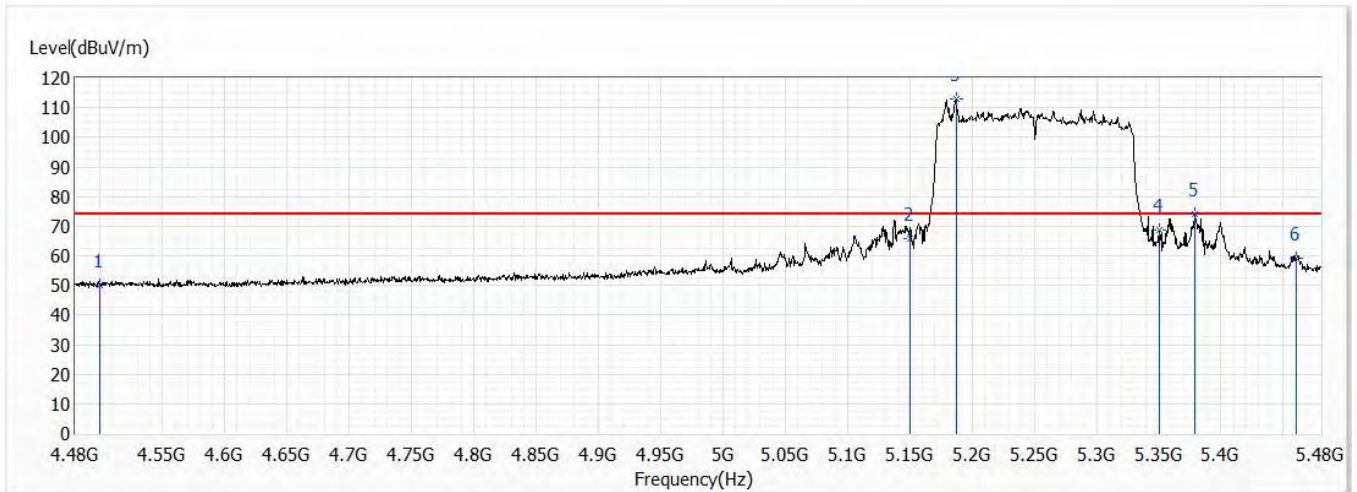


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.87	74.00	-24.13	30.07	19.80	PK
2	5150.000	65.99	74.00	-8.01	44.12	21.87	PK
! 3	5187.500	112.83	74.00	38.83	90.95	21.88	PK
4	5350.000	68.77	74.00	-5.23	47.46	21.31	PK
5	5379.000	73.94	74.00	-0.06	52.45	21.49	PK
6	5460.000	59.30	74.00	-14.70	37.64	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/29
Test Mode	Mode 3: Transmit_BF	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 50,5.25G,BW160M	Humidity (%RH)	63.0

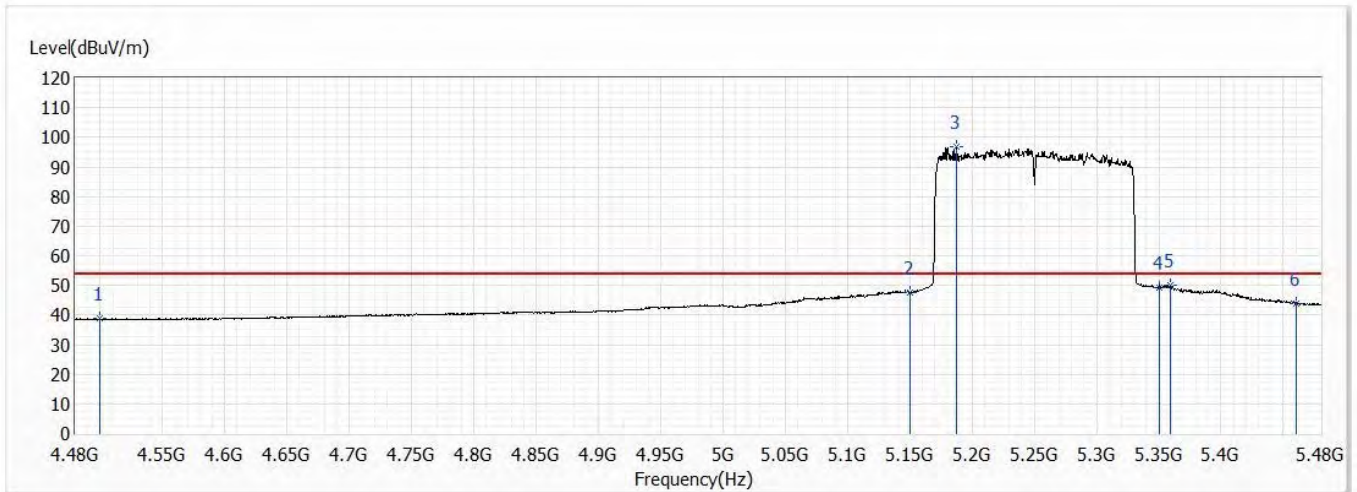


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	38.73	54.00	-15.27	18.93	19.80	AV
2	5150.000	47.77	54.00	-6.23	25.90	21.87	AV
! 3	5188.000	96.66	54.00	42.66	74.78	21.88	AV
4	5350.000	49.43	54.00	-4.57	28.12	21.31	AV
5	5359.500	50.14	54.00	-3.86	28.76	21.38	AV
6	5460.000	44.04	54.00	-9.96	22.38	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 52,5.26G,BW20M	Humidity (%RH)	58.0

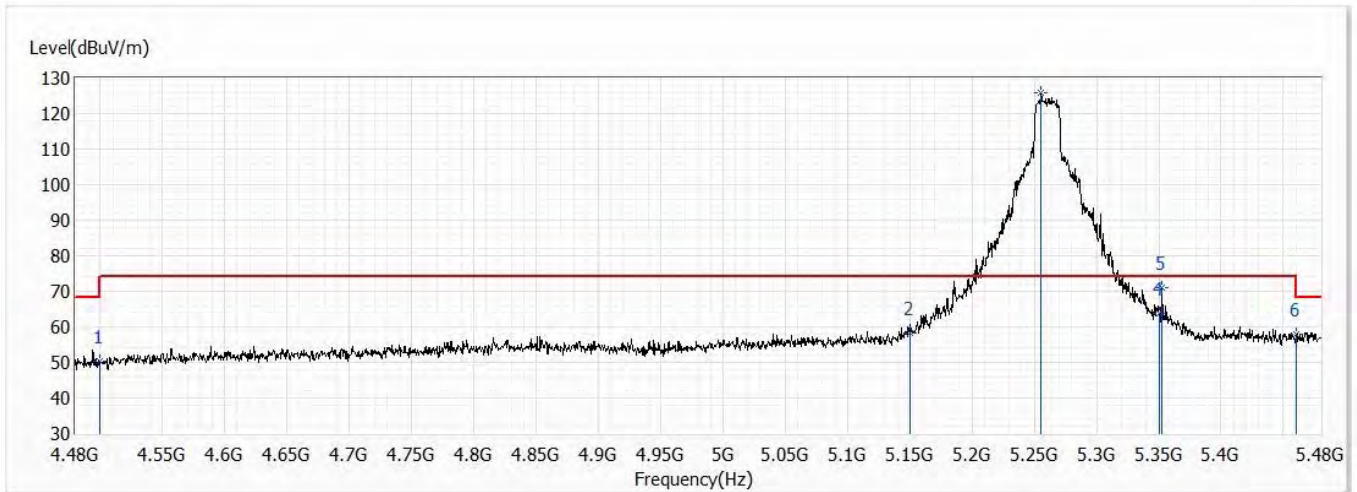


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.51	74.00	-23.49	30.71	19.80	PK
2	5150.000	58.32	74.00	-15.68	36.45	21.87	PK
! 3	5255.500	125.71	74.00	51.71	104.36	21.35	PK
4	5350.000	63.72	74.00	-10.28	42.41	21.31	PK
5	5352.500	70.98	74.00	-3.02	49.65	21.33	PK
6	5460.000	57.78	74.00	-16.22	36.12	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 52,5.26G,BW20M	Humidity (%RH)	58.0

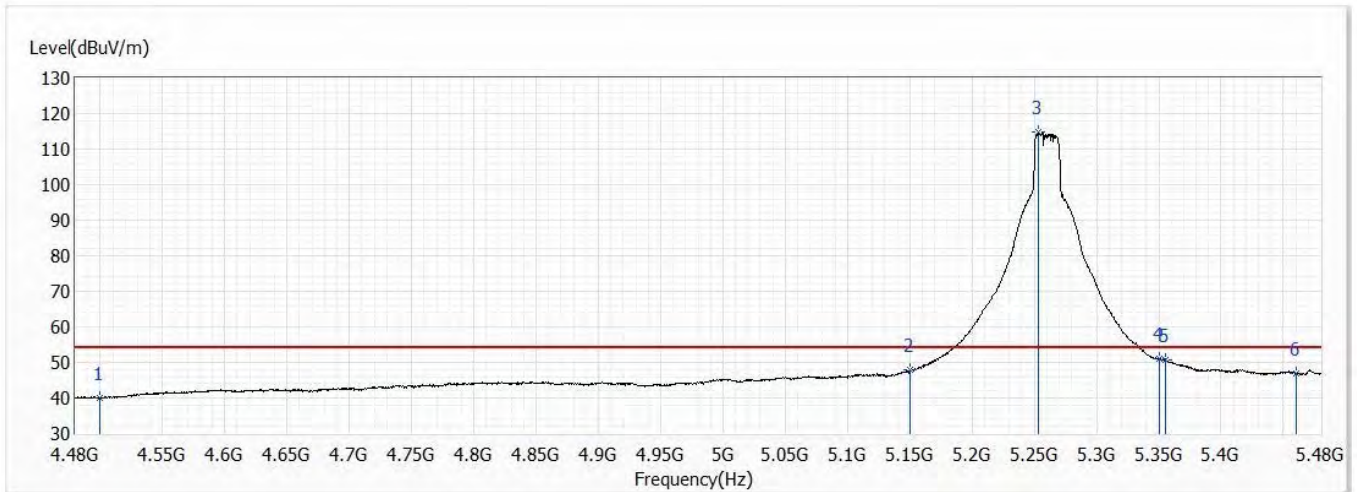


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.85	54.00	-14.15	20.05	19.80	AV
2	5150.000	47.80	54.00	-6.20	25.93	21.87	AV
! 3	5253.000	114.70	54.00	60.70	93.34	21.36	AV
4	5350.000	51.05	54.00	-2.95	29.74	21.31	AV
5	5355.500	50.68	54.00	-3.32	29.34	21.34	AV
6	5460.000	46.84	54.00	-7.16	25.18	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 52,5.26G,BW20M	Humidity (%RH)	58.0

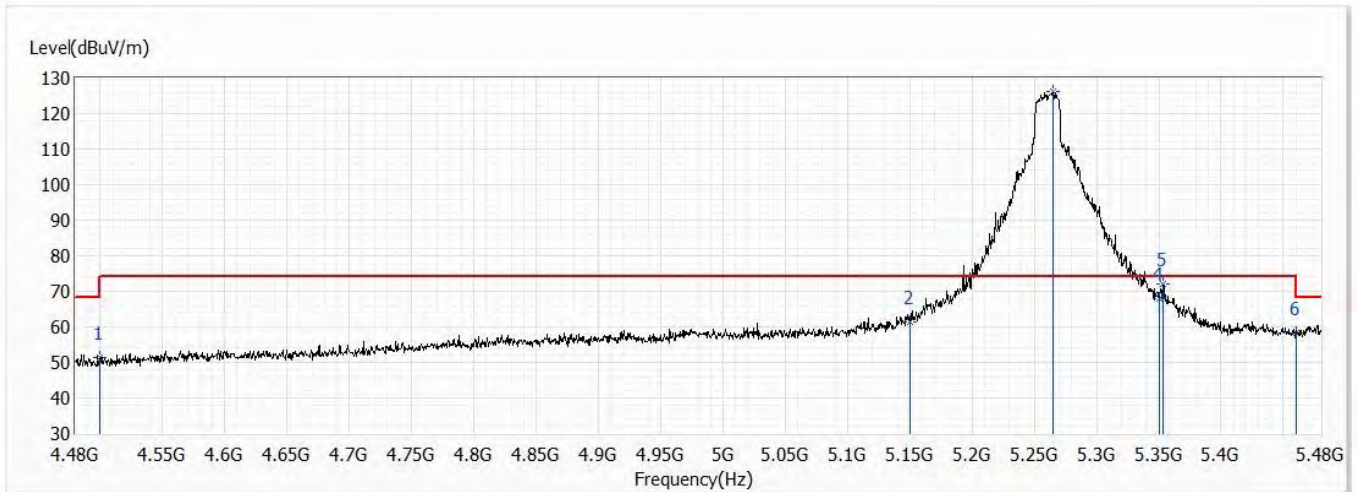


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.48	74.00	-22.52	31.68	19.80	PK
2	5150.000	61.39	74.00	-12.61	39.52	21.87	PK
! 3	5265.000	126.21	74.00	52.21	104.91	21.30	PK
4	5350.000	67.96	74.00	-6.04	46.65	21.31	PK
5	5353.000	71.94	74.00	-2.06	50.61	21.33	PK
6	5460.000	58.35	74.00	-15.65	36.69	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 52,5.26G,BW20M	Humidity (%RH)	58.0

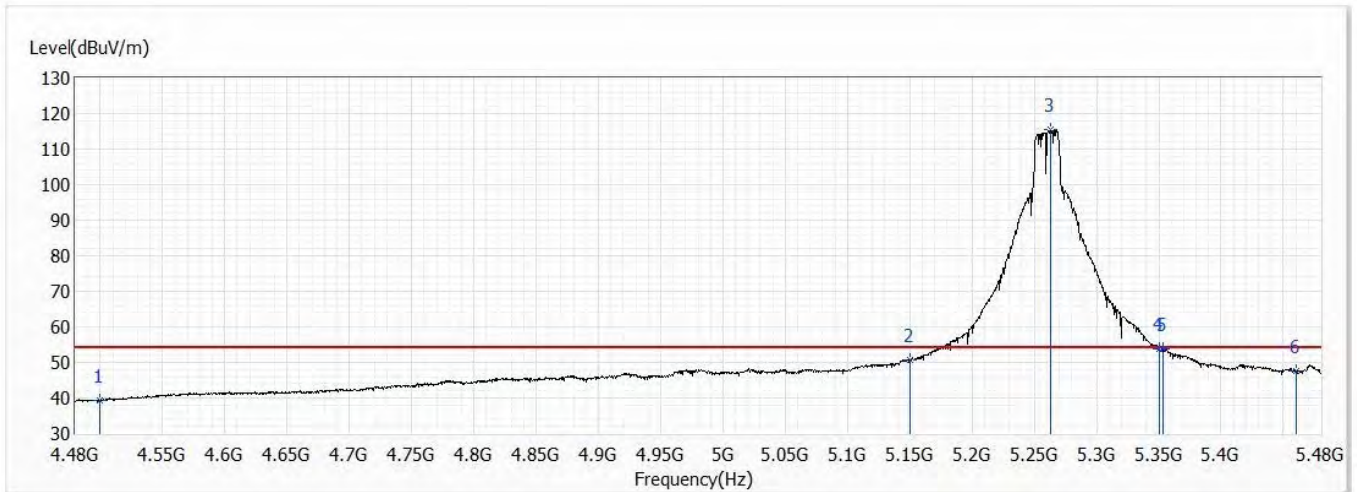


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.30	54.00	-14.70	19.50	19.80	AV
2	5150.000	50.68	54.00	-3.32	28.81	21.87	AV
! 3	5263.000	115.36	54.00	61.36	94.05	21.31	AV
4	5350.000	53.93	54.00	-0.07	32.62	21.31	AV
5	5353.000	53.89	54.00	-0.11	32.56	21.33	AV
6	5460.000	47.70	54.00	-6.30	26.04	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3, Ch 60,5.3G,BW20M	Humidity (%RH)	58.0

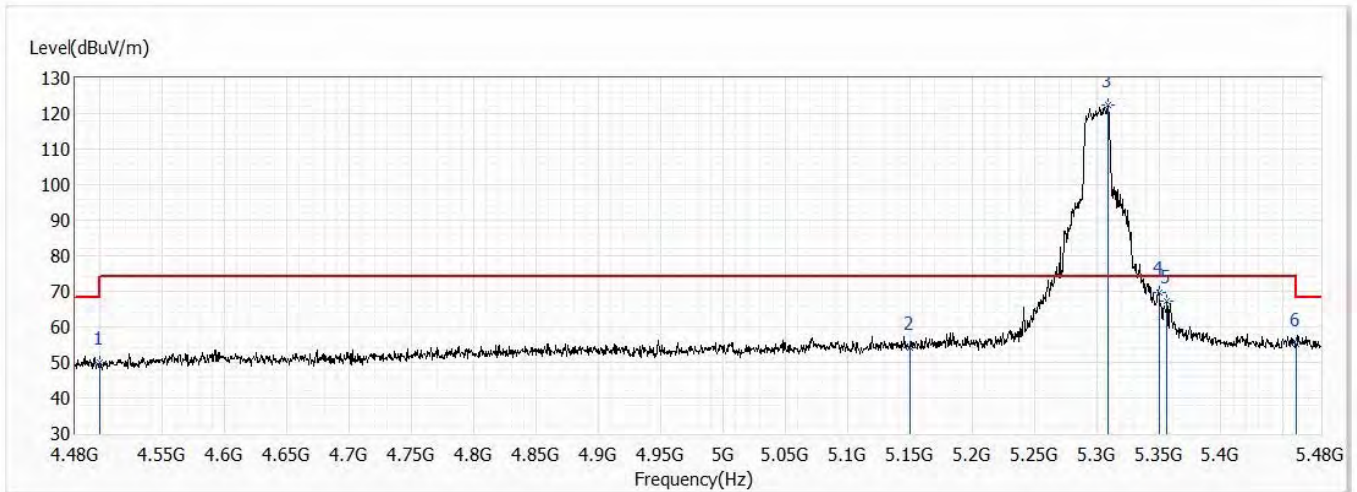


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.03	74.00	-23.97	30.23	19.80	PK
2	5150.000	54.24	74.00	-19.76	32.37	21.87	PK
! 3	5309.000	122.29	74.00	48.29	101.15	21.14	PK
4	5350.000	69.80	74.00	-4.20	48.49	21.31	PK
5	5356.500	67.18	74.00	-6.82	45.83	21.35	PK
6	5460.000	55.30	74.00	-18.70	33.64	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3, Ch 60,5.3G,BW20M	Humidity (%RH)	58.0

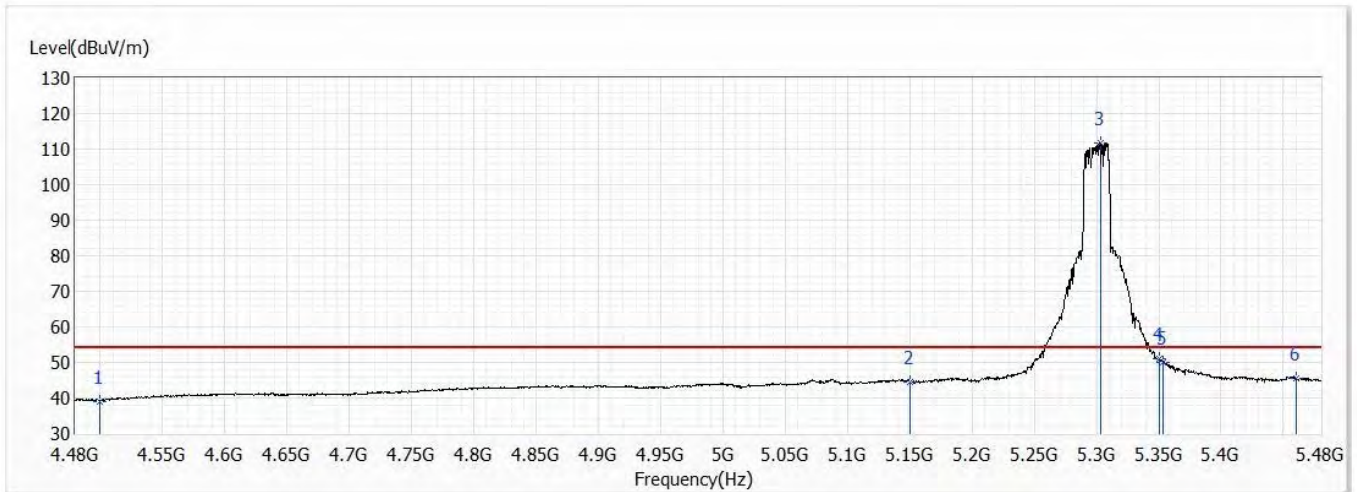


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.11	54.00	-14.89	19.31	19.80	AV
2	5150.000	44.52	54.00	-9.48	22.65	21.87	AV
! 3	5303.000	111.76	54.00	57.76	90.65	21.11	AV
4	5350.000	51.01	54.00	-2.99	29.70	21.31	AV
5	5353.000	49.98	54.00	-4.02	28.65	21.33	AV
6	5460.000	45.54	54.00	-8.46	23.88	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3, Ch 60,5.3G,BW20M	Humidity (%RH)	58.0

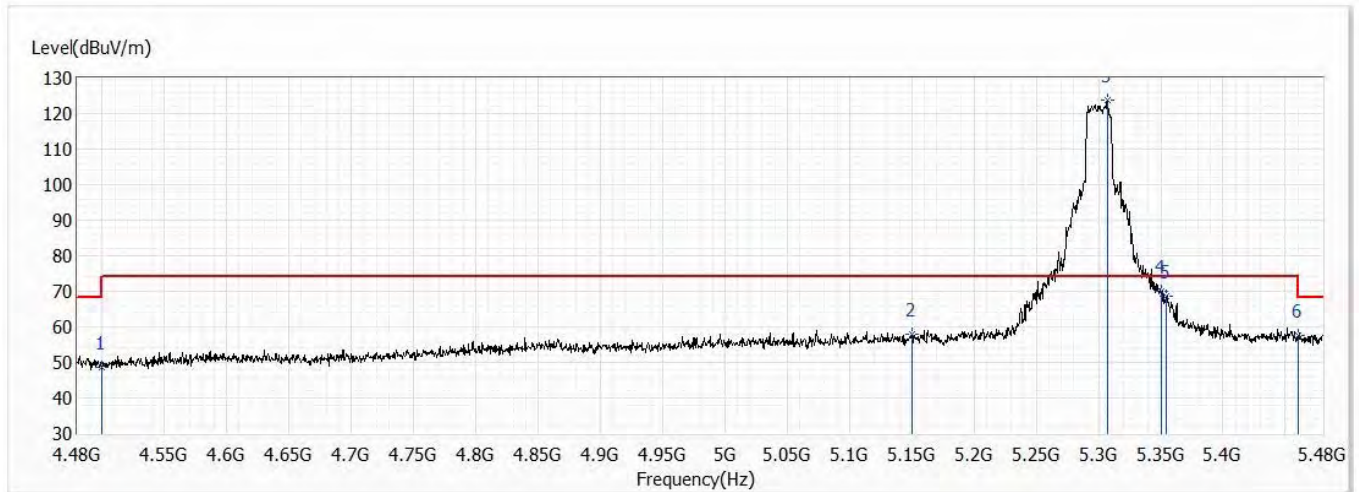


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	48.76	74.00	-25.24	28.96	19.80	PK
2	5150.000	58.02	74.00	-15.98	36.15	21.87	PK
! 3	5307.000	123.82	74.00	49.82	102.69	21.13	PK
4	5350.000	69.89	74.00	-4.11	48.58	21.31	PK
5	5354.500	68.72	74.00	-5.28	47.38	21.34	PK
6	5460.000	57.49	74.00	-16.51	35.83	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3, Ch 60,5.3G,BW20M	Humidity (%RH)	58.0

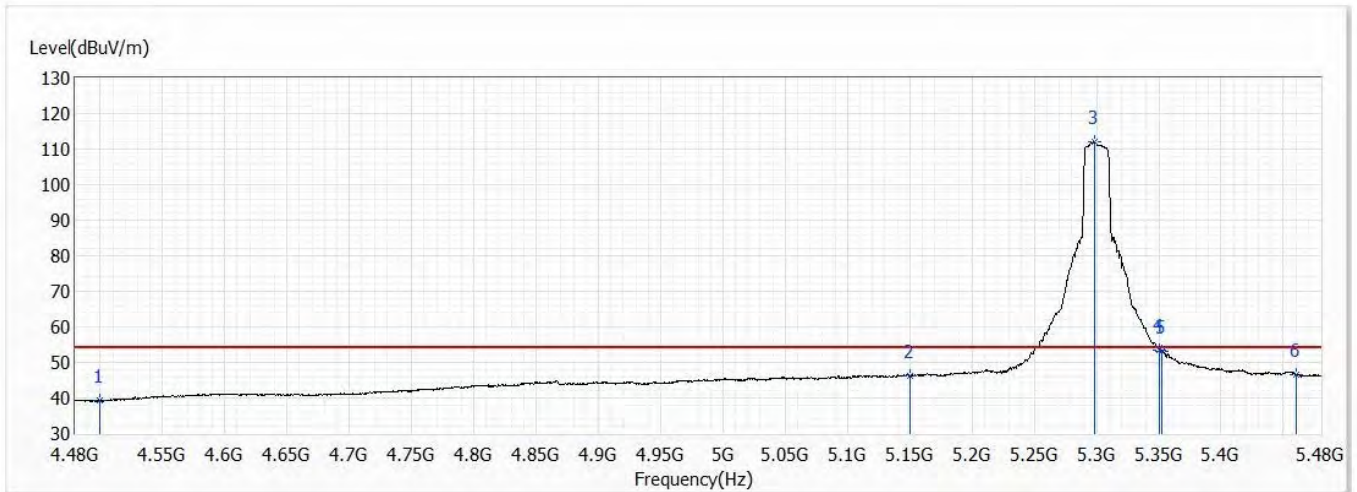


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.42	54.00	-14.58	19.62	19.80	AV
2	5150.000	46.34	54.00	-7.66	24.47	21.87	AV
! 3	5298.000	111.96	54.00	57.96	90.85	21.11	AV
4	5350.000	53.40	54.00	-0.60	32.09	21.31	AV
5	5352.500	53.07	54.00	-0.93	31.74	21.33	AV
6	5460.000	46.68	54.00	-7.32	25.02	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 64,5.32G,BW20M	Humidity (%RH)	58.0

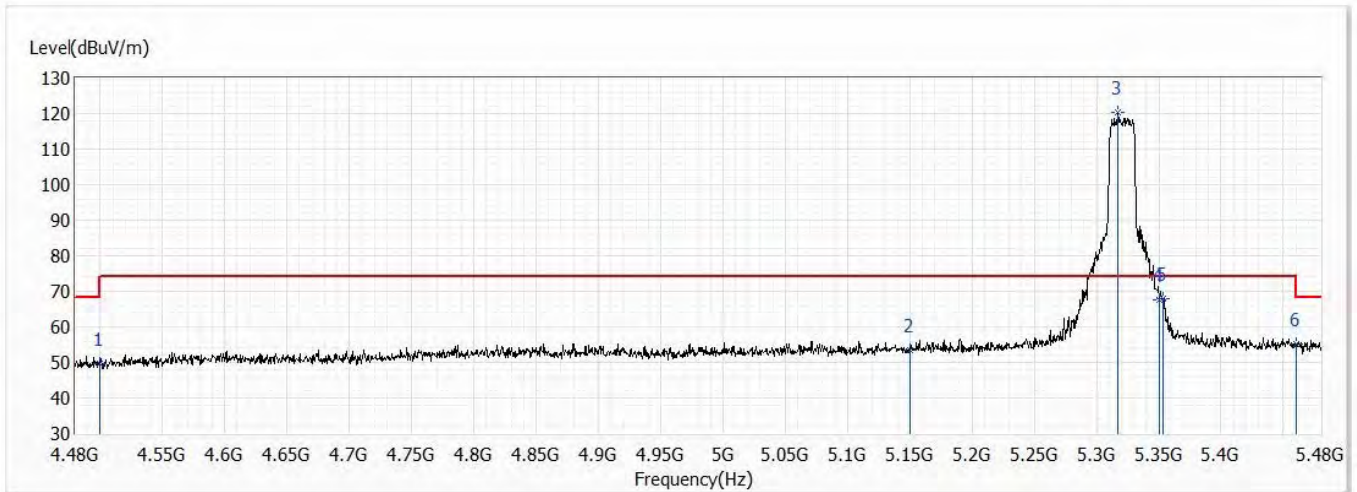


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.51	74.00	-24.49	29.71	19.80	PK
2	5150.000	53.42	74.00	-20.58	31.55	21.87	PK
! 3	5317.500	120.48	74.00	46.48	99.31	21.17	PK
4	5350.000	67.75	74.00	-6.25	46.44	21.31	PK
5	5353.500	67.84	74.00	-6.16	46.51	21.33	PK
6	5460.000	55.11	74.00	-18.89	33.45	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 64,5.32G,BW20M	Humidity (%RH)	58.0

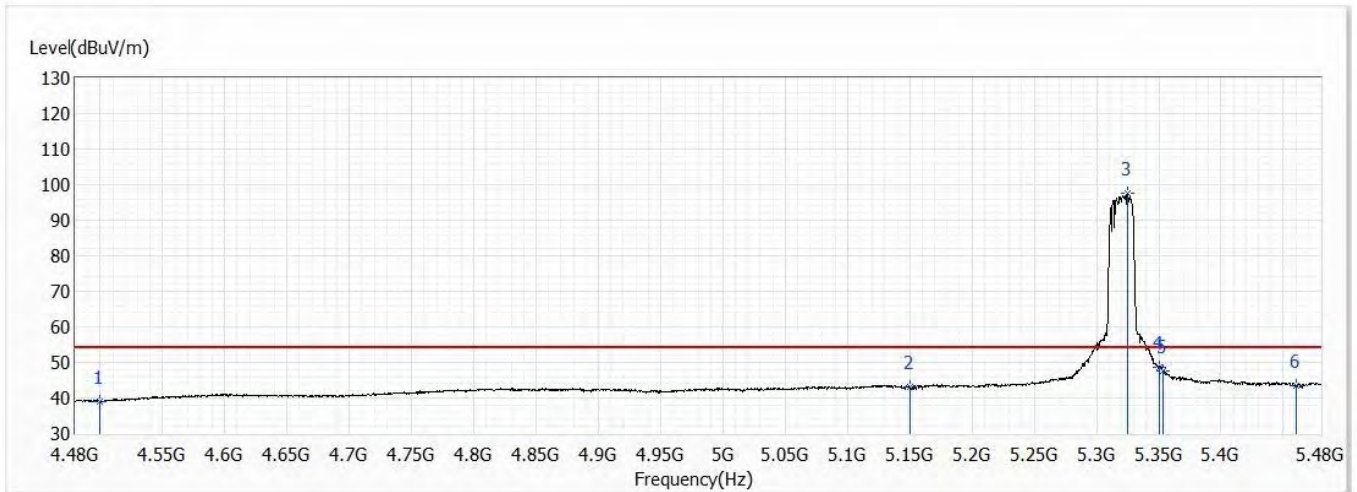


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.08	54.00	-14.92	19.28	19.80	AV
2	5150.000	43.03	54.00	-10.97	21.16	21.87	AV
! 3	5325.000	97.57	54.00	43.57	76.36	21.21	AV
4	5350.000	48.74	54.00	-5.26	27.43	21.31	AV
5	5353.000	47.67	54.00	-6.33	26.34	21.33	AV
6	5460.000	43.45	54.00	-10.55	21.79	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 64,5.32G,BW20M	Humidity (%RH)	58.0

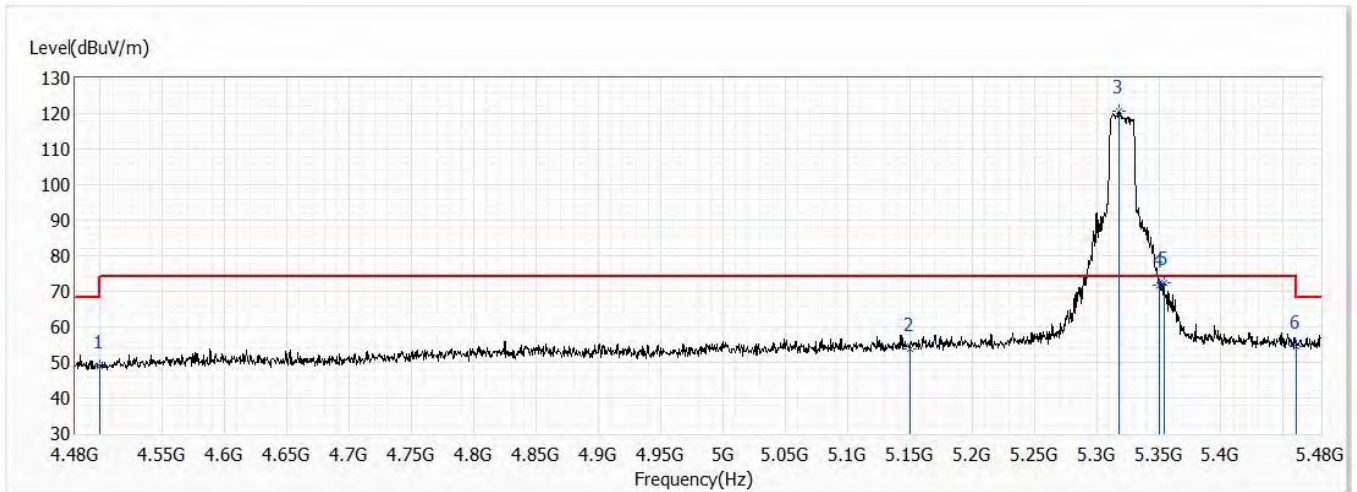


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.00	74.00	-25.00	29.20	19.80	PK
2	5150.000	53.93	74.00	-20.07	32.06	21.87	PK
! 3	5318.500	120.61	74.00	46.61	99.44	21.17	PK
4	5350.000	71.70	74.00	-2.30	50.39	21.31	PK
5	5354.000	72.50	74.00	-1.50	51.17	21.33	PK
6	5460.000	54.54	74.00	-19.46	32.88	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 64,5.32G,BW20M	Humidity (%RH)	58.0

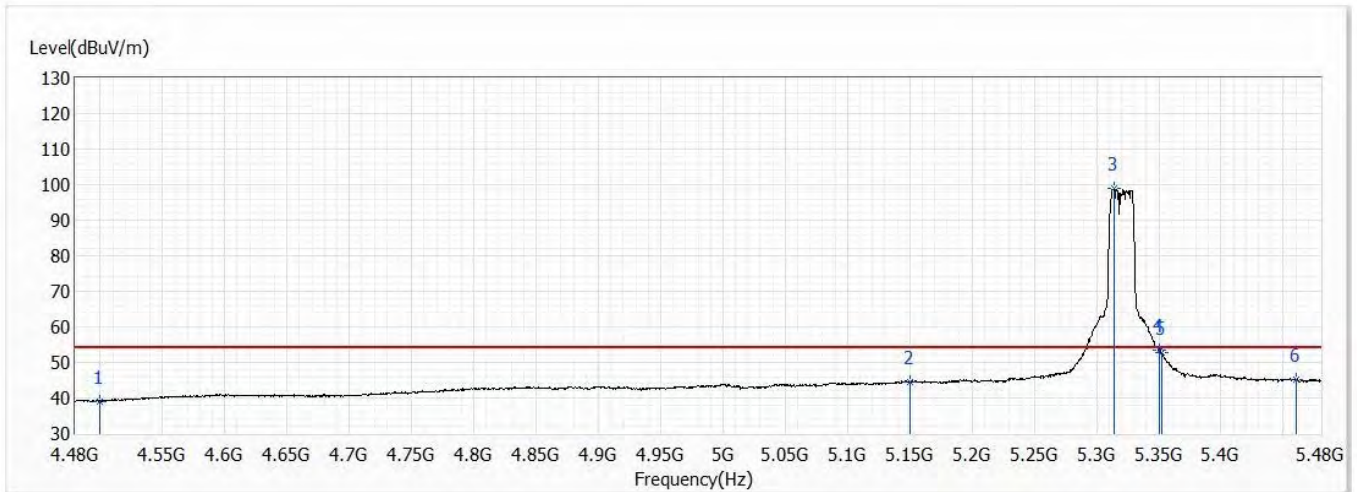


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.08	54.00	-14.92	19.28	19.80	AV
2	5150.000	44.40	54.00	-9.60	22.53	21.87	AV
! 3	5314.000	98.80	54.00	44.80	77.64	21.16	AV
4	5350.000	53.32	54.00	-0.68	32.01	21.31	AV
5	5352.000	52.63	54.00	-1.37	31.31	21.32	AV
6	5460.000	45.25	54.00	-8.75	23.59	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 54,5.27G,BW40M	Humidity (%RH)	58.0

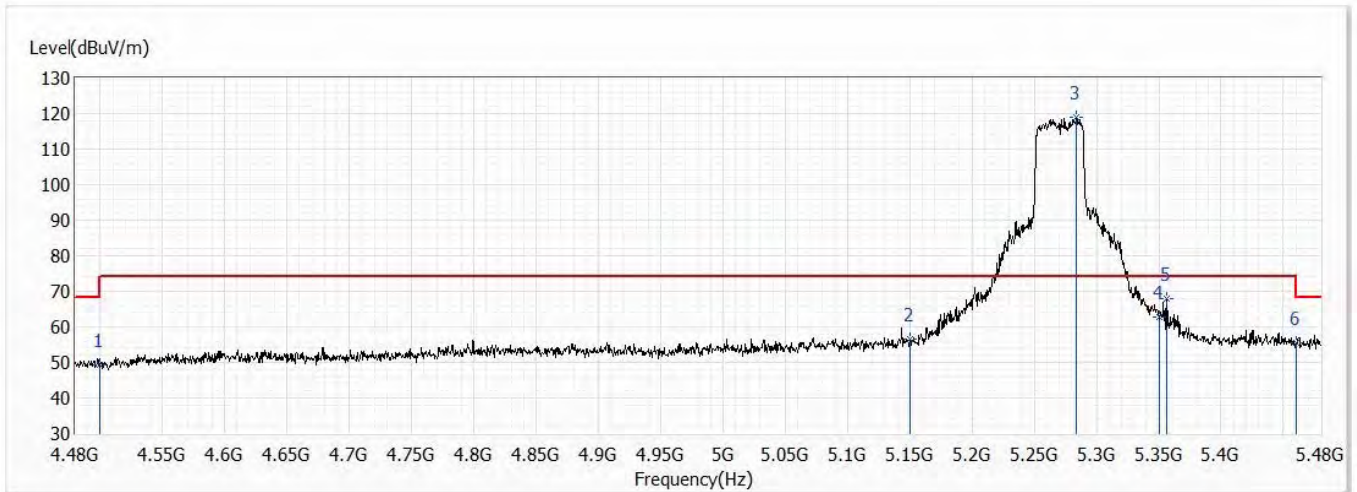


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.32	74.00	-24.68	29.52	19.80	PK
2	5150.000	56.49	74.00	-17.51	34.62	21.87	PK
! 3	5284.000	118.83	74.00	44.83	97.64	21.19	PK
4	5350.000	62.75	74.00	-11.25	41.44	21.31	PK
5	5356.000	67.81	74.00	-6.19	46.46	21.35	PK
6	5460.000	55.50	74.00	-18.50	33.84	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 54,5.27G,BW40M	Humidity (%RH)	58.0

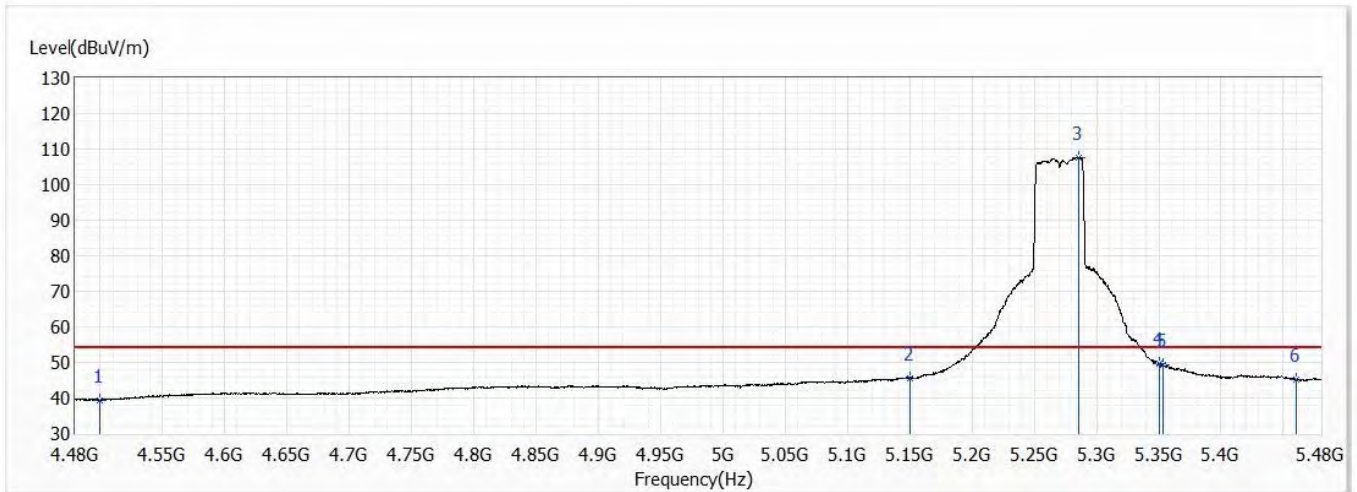


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.24	54.00	-14.76	19.44	19.80	AV
2	5150.000	45.57	54.00	-8.43	23.70	21.87	AV
! 3	5286.000	107.69	54.00	53.69	86.52	21.17	AV
4	5350.000	49.69	54.00	-4.31	28.38	21.31	AV
5	5353.000	49.33	54.00	-4.67	28.00	21.33	AV
6	5460.000	45.33	54.00	-8.67	23.67	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 54,5.27G,BW40M	Humidity (%RH)	58.0

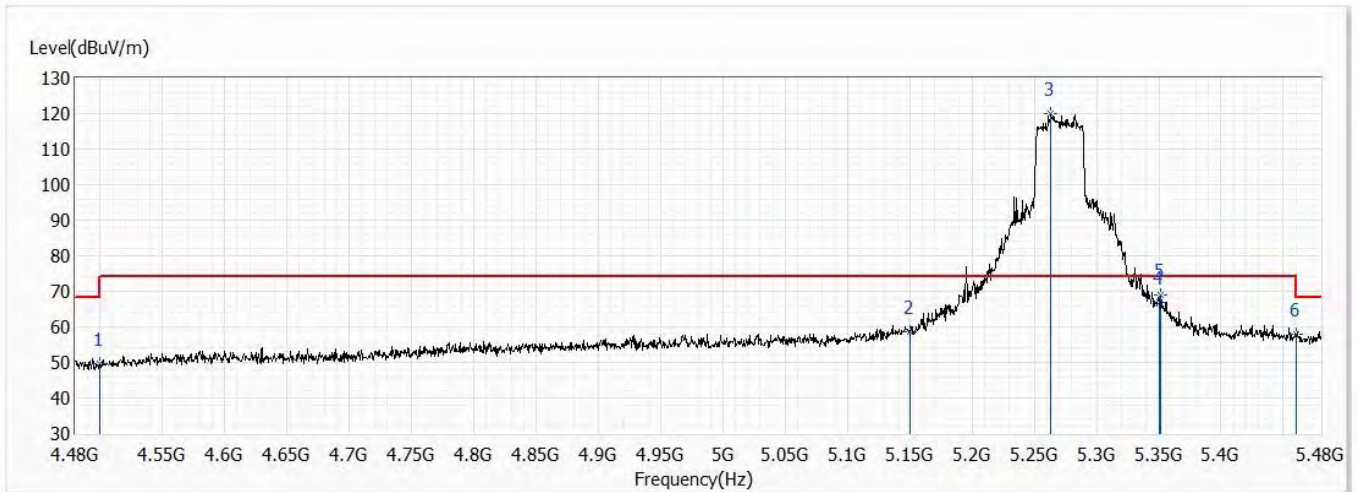


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.67	74.00	-24.33	29.87	19.80	PK
2	5150.000	58.59	74.00	-15.41	36.72	21.87	PK
! 3	5263.500	119.89	74.00	45.89	98.58	21.31	PK
4	5350.000	66.95	74.00	-7.05	45.64	21.31	PK
5	5351.000	69.02	74.00	-4.98	47.70	21.32	PK
6	5460.000	57.85	74.00	-16.15	36.19	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 54,5.27G,BW40M	Humidity (%RH)	58.0

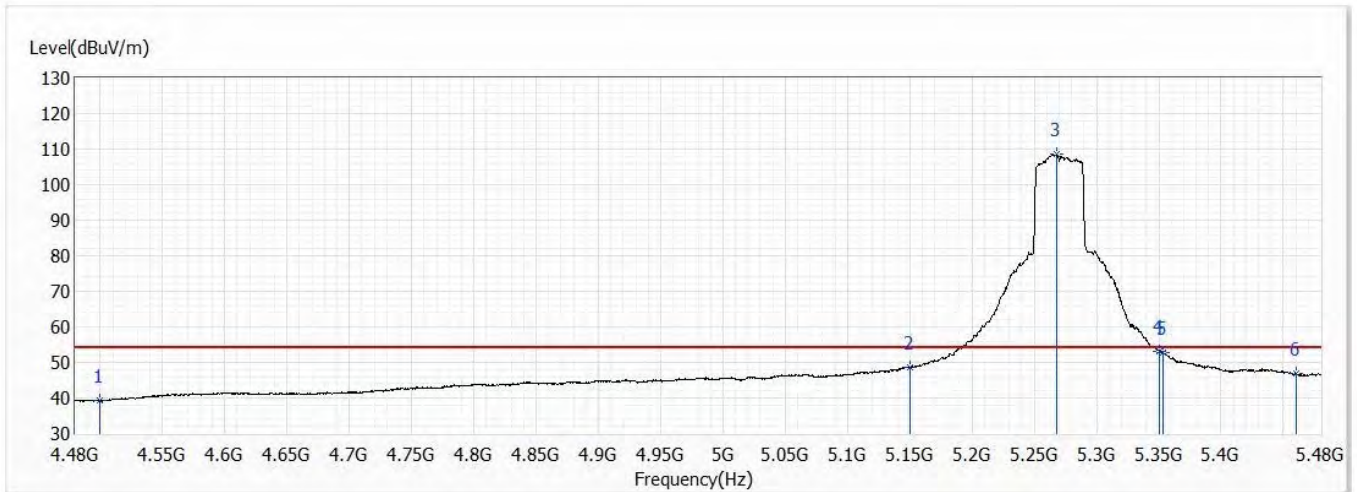


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.14	54.00	-14.86	19.34	19.80	AV
2	5150.000	48.54	54.00	-5.46	26.67	21.87	AV
! 3	5268.000	108.47	54.00	54.47	87.19	21.28	AV
4	5350.000	53.26	54.00	-0.74	31.95	21.31	AV
5	5353.500	52.89	54.00	-1.11	31.56	21.33	AV
6	5460.000	47.03	54.00	-6.97	25.37	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 62,5.31G,BW40M	Humidity (%RH)	58.0

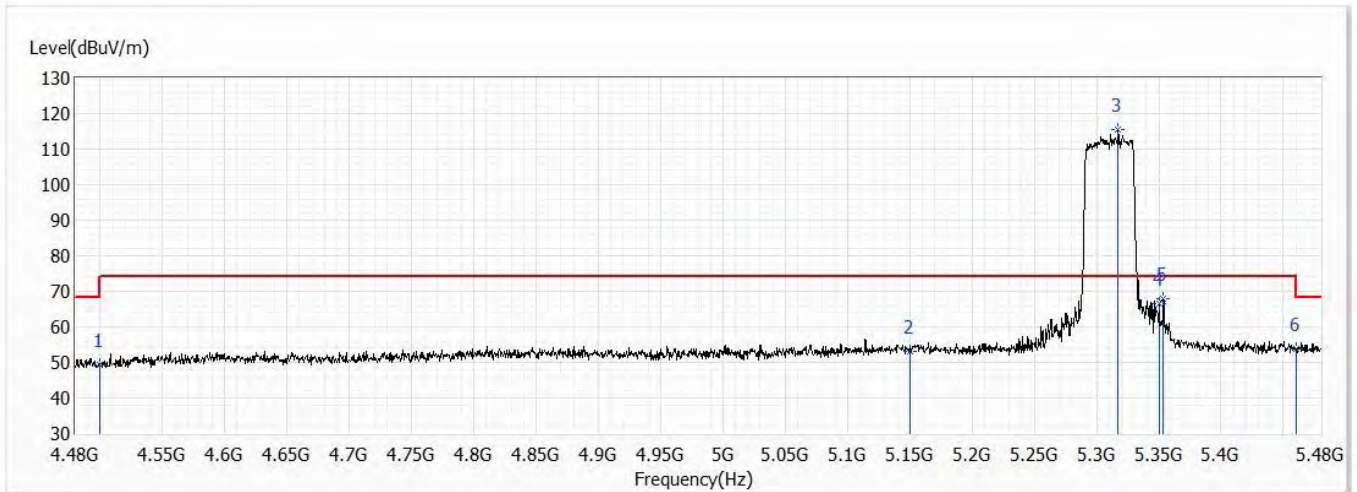


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.26	74.00	-24.74	29.46	19.80	PK
2	5150.000	53.17	74.00	-20.83	31.30	21.87	PK
! 3	5317.500	115.44	74.00	41.44	94.27	21.17	PK
4	5350.000	66.48	74.00	-7.52	45.17	21.31	PK
5	5353.500	67.84	74.00	-6.16	46.51	21.33	PK
6	5460.000	53.89	74.00	-20.11	32.23	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 62,5.31G,BW40M	Humidity (%RH)	58.0

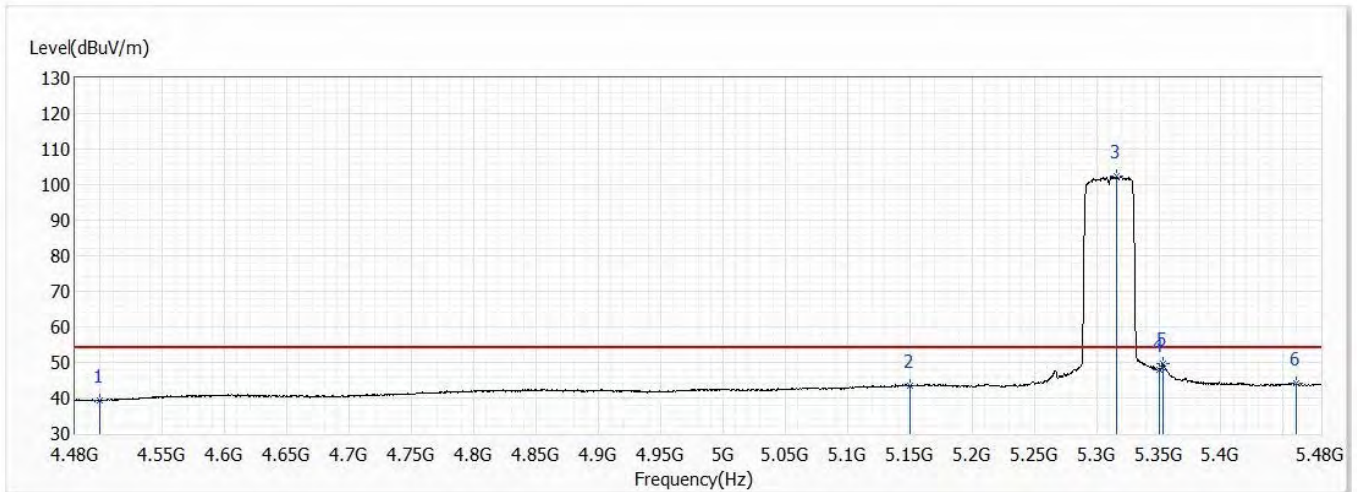


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.32	54.00	-14.68	19.52	19.80	AV
2	5150.000	43.55	54.00	-10.45	21.68	21.87	AV
! 3	5316.000	102.25	54.00	48.25	81.09	21.16	AV
4	5350.000	48.09	54.00	-5.91	26.78	21.31	AV
5	5353.500	49.67	54.00	-4.33	28.34	21.33	AV
6	5460.000	44.07	54.00	-9.93	22.41	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 62,5.31G,BW40M	Humidity (%RH)	58.0

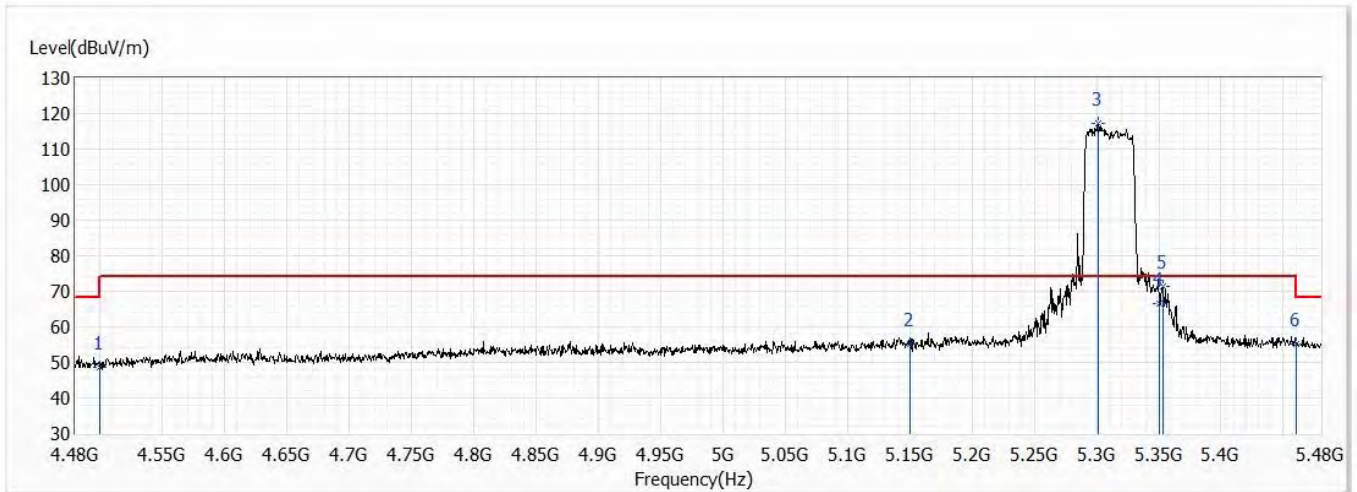


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	48.56	74.00	-25.44	28.76	19.80	PK
2	5150.000	55.19	74.00	-18.81	33.32	21.87	PK
! 3	5301.000	117.19	74.00	43.19	96.09	21.10	PK
4	5350.000	66.45	74.00	-7.55	45.14	21.31	PK
5	5353.500	71.41	74.00	-2.59	50.08	21.33	PK
6	5460.000	55.34	74.00	-18.66	33.68	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 62,5.31G,BW40M	Humidity (%RH)	58.0

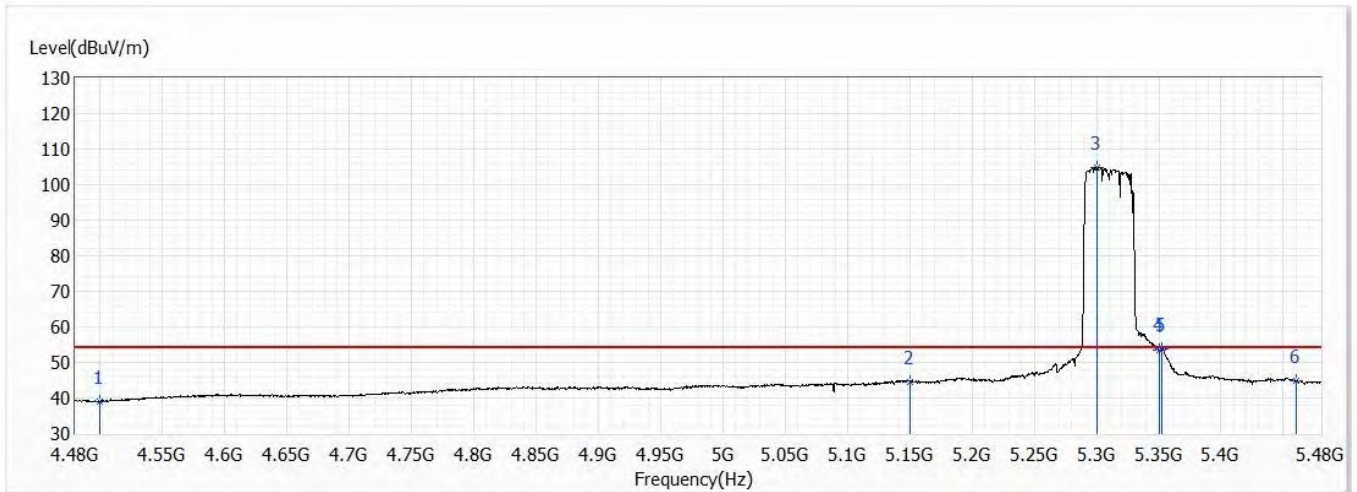


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.03	54.00	-14.97	19.23	19.80	AV
2	5150.000	44.62	54.00	-9.38	22.75	21.87	AV
! 3	5300.500	104.92	54.00	50.92	83.82	21.10	AV
4	5350.000	53.47	54.00	-0.53	32.16	21.31	AV
5	5352.500	53.82	54.00	-0.18	32.49	21.33	AV
6	5460.000	44.91	54.00	-9.09	23.25	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 58,5.29G,BW80M	Humidity (%RH)	58.0

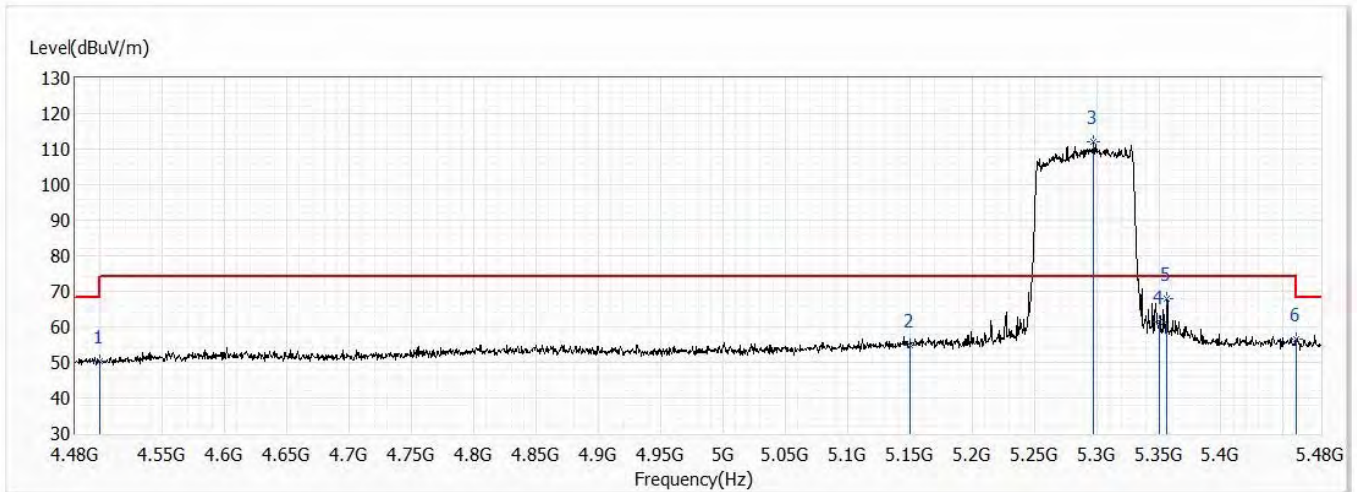


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.28	74.00	-23.72	30.48	19.80	PK
2	5150.000	54.88	74.00	-19.12	33.01	21.87	PK
! 3	5297.500	112.20	74.00	38.20	91.08	21.12	PK
4	5350.000	61.50	74.00	-12.50	40.19	21.31	PK
5	5356.500	67.88	74.00	-6.12	46.53	21.35	PK
6	5460.000	56.46	74.00	-17.54	34.80	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 58,5.29G,BW80M	Humidity (%RH)	58.0

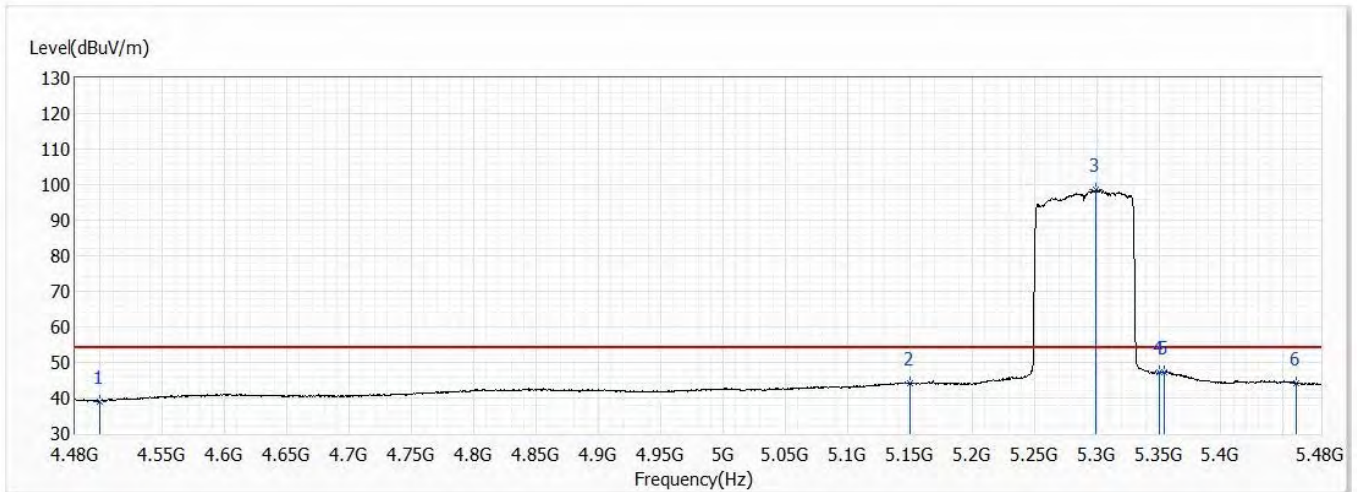


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.11	54.00	-14.89	19.31	19.80	AV
2	5150.000	44.00	54.00	-10.00	22.13	21.87	AV
! 3	5299.000	98.62	54.00	44.62	77.51	21.11	AV
4	5350.000	47.25	54.00	-6.75	25.94	21.31	AV
5	5354.500	47.40	54.00	-6.60	26.06	21.34	AV
6	5460.000	44.15	54.00	-9.85	22.49	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 58,5.29G,BW80M	Humidity (%RH)	58.0

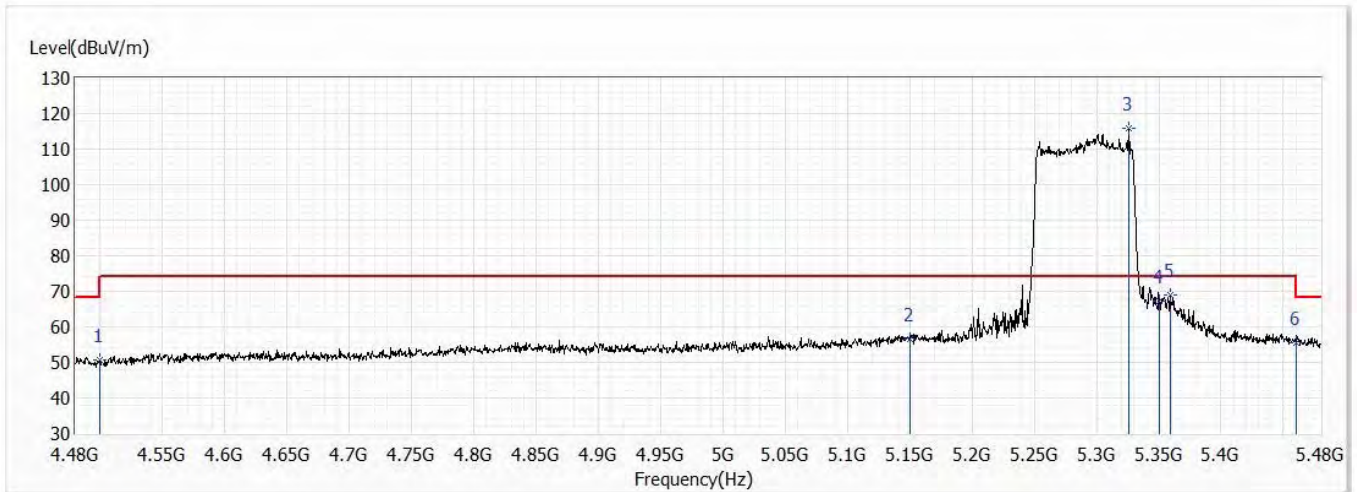


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.59	74.00	-23.41	30.79	19.80	PK
2	5150.000	56.62	74.00	-17.38	34.75	21.87	PK
! 3	5326.000	115.85	74.00	41.85	94.64	21.21	PK
4	5350.000	67.09	74.00	-6.91	45.78	21.31	PK
5	5359.000	69.03	74.00	-4.97	47.66	21.37	PK
6	5460.000	55.65	74.00	-18.35	33.99	21.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 58,5.29G,BW80M	Humidity (%RH)	58.0

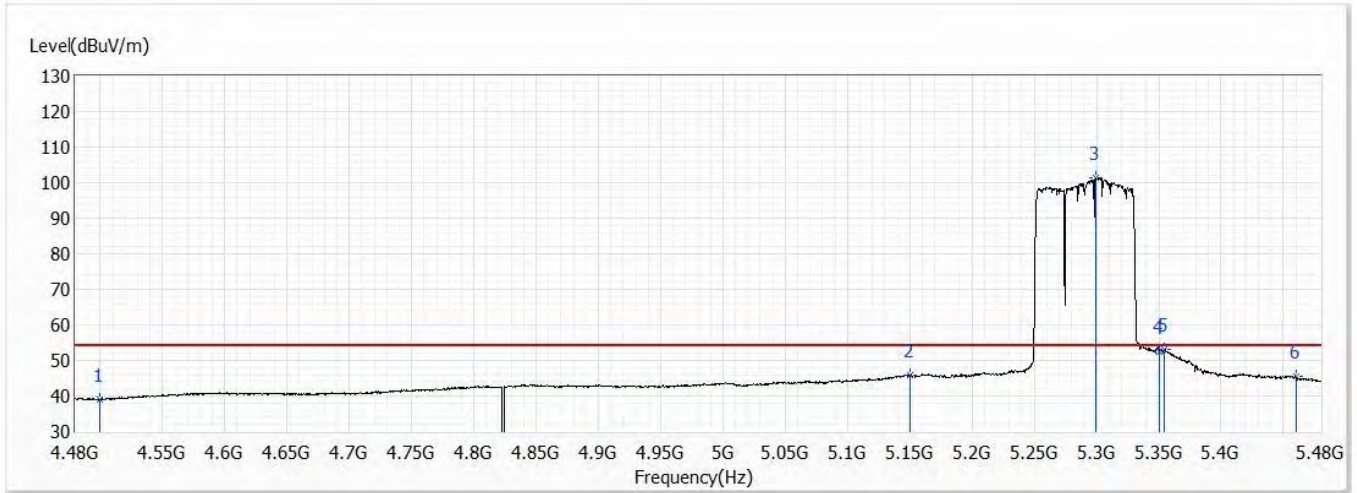

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	38.95	54.00	-15.05	19.15	19.80	AV
2	5150.000	45.80	54.00	-8.20	23.93	21.87	AV
! 3	5299.500	101.54	54.00	47.54	80.44	21.10	AV
4	5350.000	52.42	54.00	-1.58	31.11	21.31	AV
5	5354.500	53.26	54.00	-0.74	31.92	21.34	AV
6	5460.000	45.36	54.00	-8.64	23.70	21.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 100,5.5G,BW20M	Humidity (%RH)	58.0




No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.58	74.00	-18.42	34.27	21.31	PK
2	5448.500	58.17	74.00	-15.83	36.53	21.64	PK
3	5460.000	55.30	74.00	-18.70	33.64	21.66	PK
4	5469.500	65.65	68.20	-2.55	43.97	21.68	PK
! 5	5495.500	117.76	74.00	43.76	96.02	21.74	PK
6	5814.000	58.76	68.20	-9.44	36.39	22.37	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 100,5.5G,BW20M	Humidity (%RH)	58.0

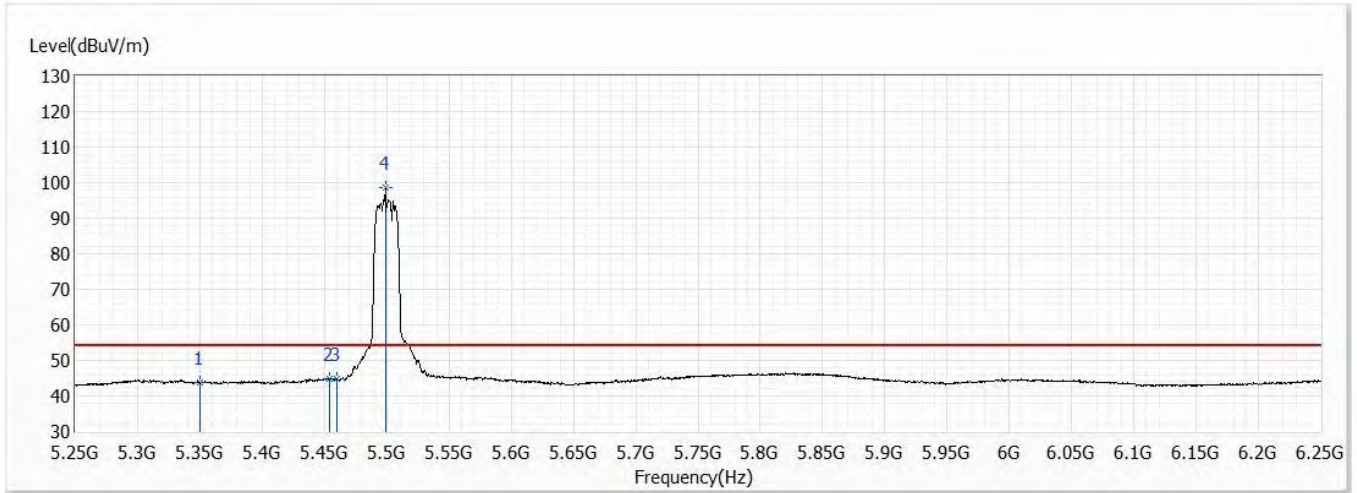


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.90	54.00	-10.10	22.59	21.31	AV
2	5454.000	44.84	54.00	-9.16	23.19	21.65	AV
3	5460.000	44.69	54.00	-9.31	23.03	21.66	AV
! 4	5499.000	98.74	54.00	44.74	76.99	21.75	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 100,5.5G,BW20M	Humidity (%RH)	58.0

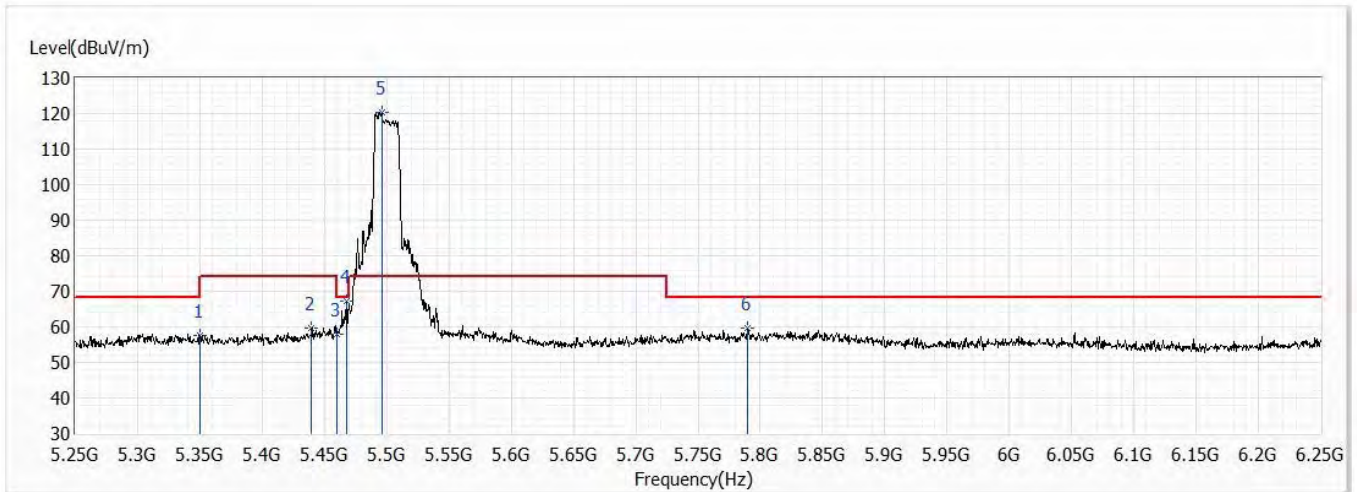


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.46	74.00	-16.54	36.15	21.31	PK
2	5439.500	59.82	74.00	-14.18	38.19	21.63	PK
3	5460.000	58.08	74.00	-15.92	36.42	21.66	PK
! 5	5496.000	120.36	74.00	46.36	98.62	21.74	PK
6	5790.000	59.78	68.20	-8.42	37.41	22.37	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 100,5.5G,BW20M	Humidity (%RH)	58.0

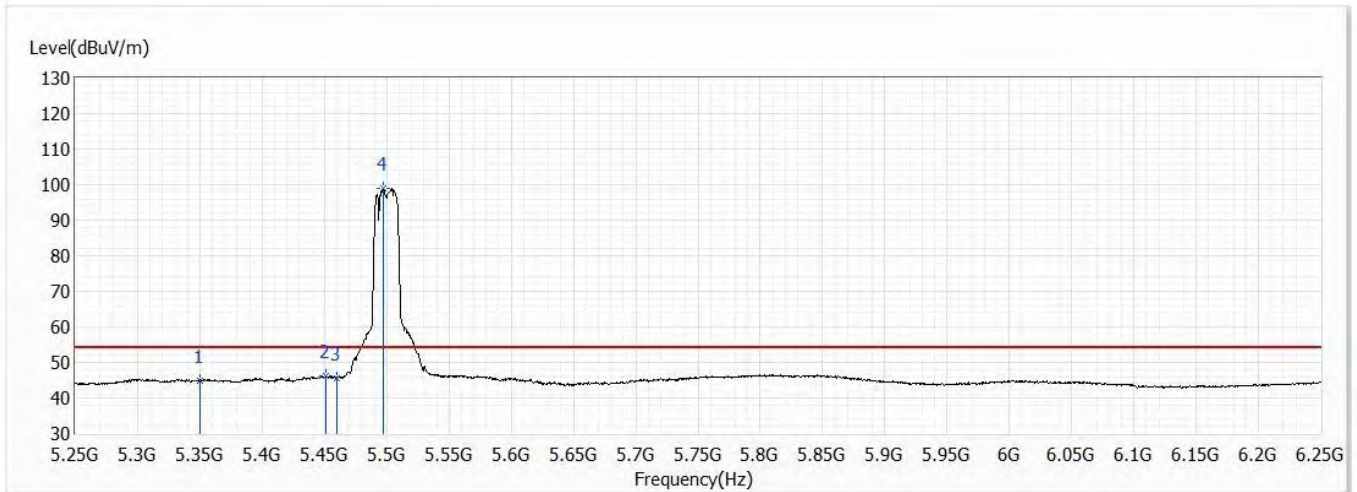


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.97	54.00	-9.03	23.66	21.31	AV
2	5451.000	46.11	54.00	-7.89	24.47	21.64	AV
3	5460.000	45.61	54.00	-8.39	23.95	21.66	AV
! 4	5497.000	98.84	54.00	44.84	77.10	21.74	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 116,5.58G,BW20M	Humidity (%RH)	58.0

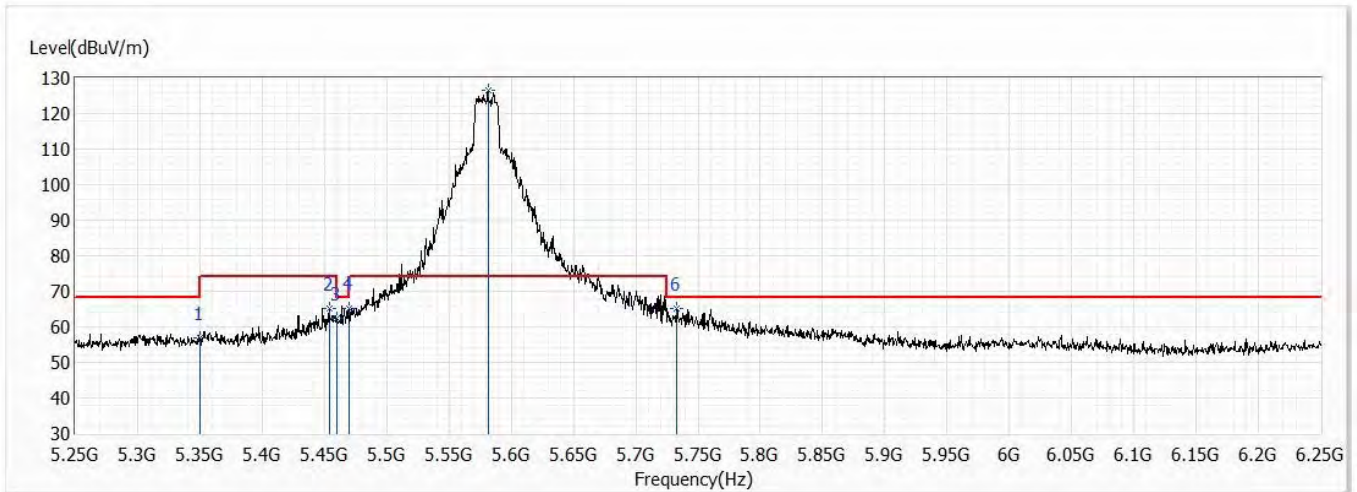


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.80	74.00	-17.20	35.49	21.31	PK
2	5454.000	65.03	74.00	-8.97	43.38	21.65	PK
3	5460.000	62.48	74.00	-11.52	40.82	21.66	PK
4	5469.500	65.32	68.20	-2.88	43.64	21.68	PK
! 5	5581.500	126.52	74.00	52.52	104.60	21.92	PK
6	5733.000	65.31	68.20	-2.89	43.21	22.10	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 116,5.58G,BW20M	Humidity (%RH)	58.0

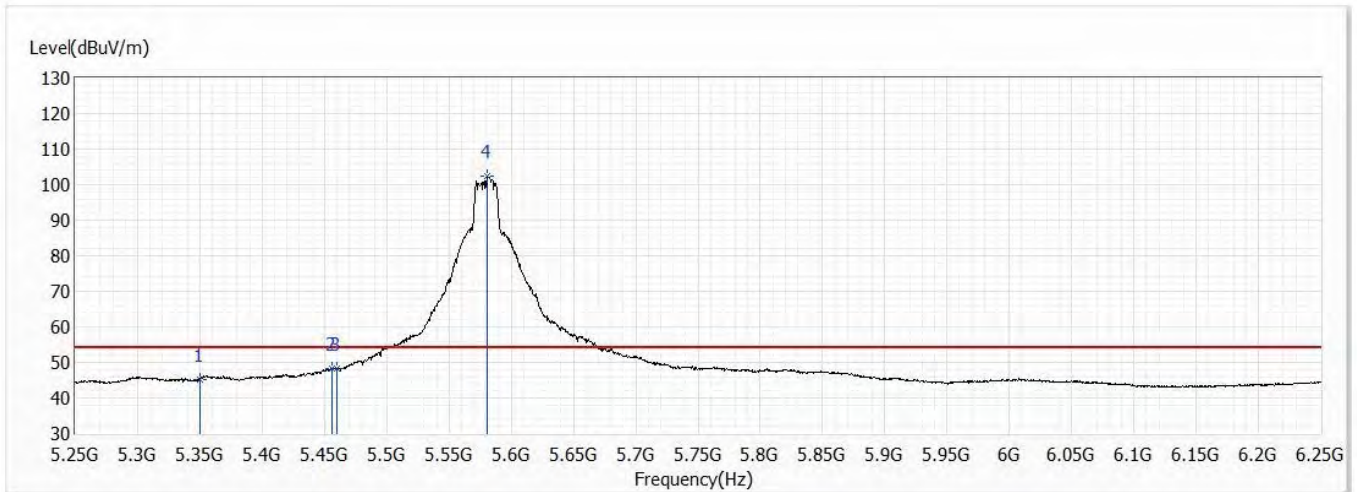


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.27	54.00	-8.73	23.96	21.31	AV
2	5456.500	48.44	54.00	-5.56	26.80	21.64	AV
3	5460.000	48.28	54.00	-5.72	26.62	21.66	AV
! 4	5581.000	102.26	54.00	48.26	80.34	21.92	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 116,5.58G,BW20M	Humidity (%RH)	58.0

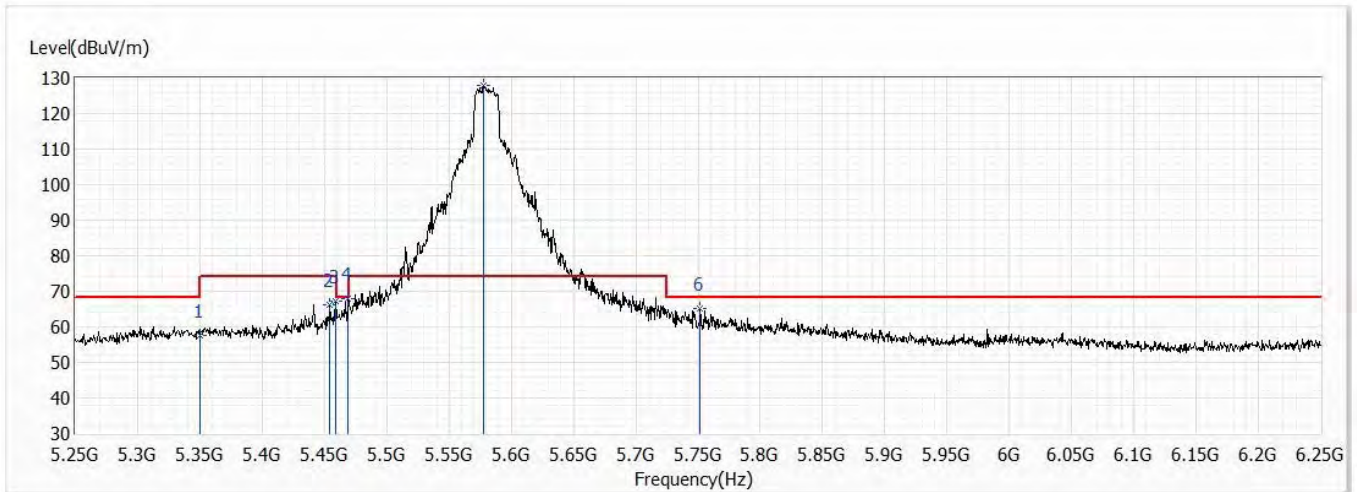


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.60	74.00	-16.40	36.29	21.31	PK
2	5454.500	66.27	74.00	-7.73	44.62	21.65	PK
3	5459.000	67.10	74.00	-6.90	45.44	21.66	PK
4	5469.000	67.99	68.20	-0.21	46.31	21.68	PK
! 5	5577.500	127.97	74.00	53.97	106.05	21.92	PK
6	5751.500	65.01	68.20	-3.19	42.72	22.29	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 116,5.58G,BW20M	Humidity (%RH)	58.0

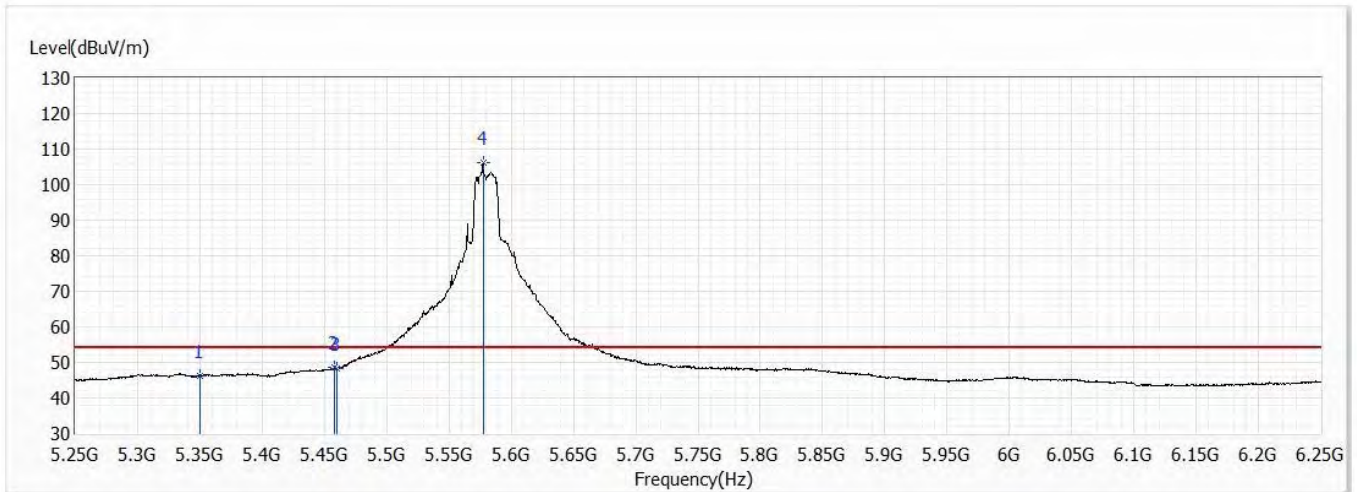


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.29	54.00	-7.71	24.98	21.31	AV
2	5458.500	48.63	54.00	-5.37	26.97	21.66	AV
3	5460.000	48.36	54.00	-5.64	26.70	21.66	AV
! 4	5577.500	106.17	54.00	52.17	84.25	21.92	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

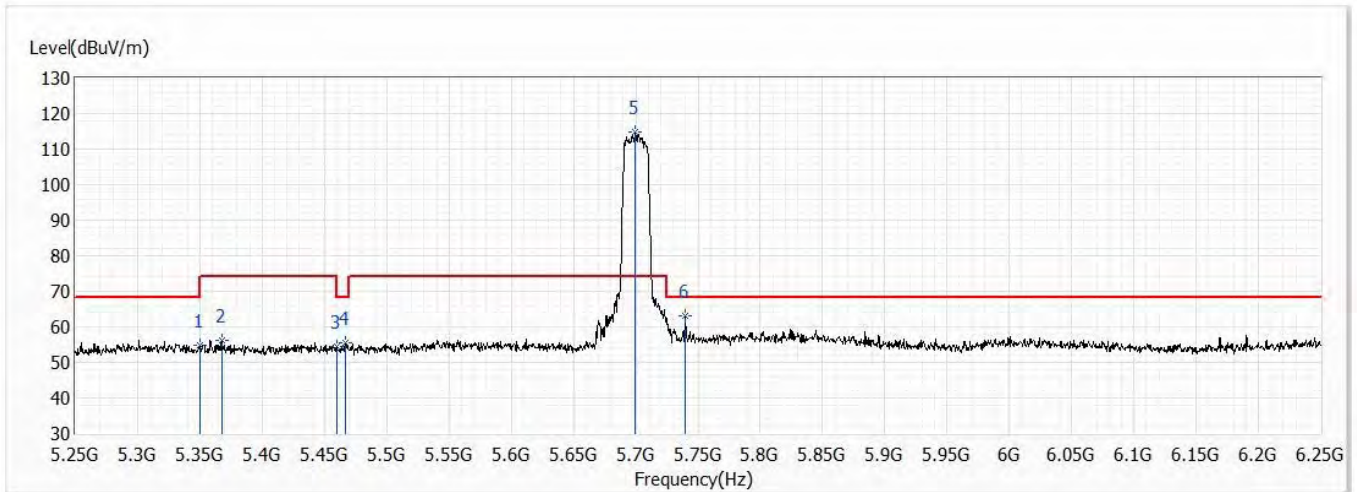


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.72	74.00	-19.28	33.41	21.31	PK
2	5367.500	56.16	74.00	-17.84	34.74	21.42	PK
3	5460.000	54.37	74.00	-19.63	32.71	21.66	PK
4	5466.500	55.65	68.20	-12.55	33.98	21.67	PK
! 5	5699.500	114.92	74.00	40.92	93.18	21.74	PK
6	5740.000	63.21	68.20	-4.99	41.03	22.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

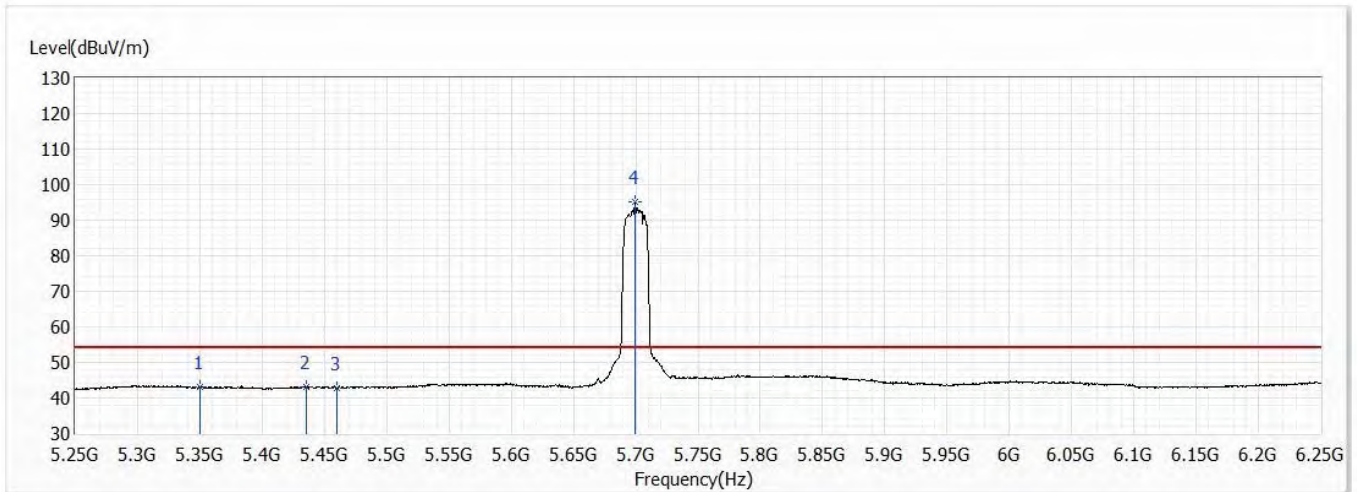


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.02	54.00	-10.98	21.71	21.31	AV
2	5435.500	43.23	54.00	-10.77	21.60	21.63	AV
3	5460.000	42.86	54.00	-11.14	21.20	21.66	AV
! 4	5699.500	95.20	54.00	41.20	73.46	21.74	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

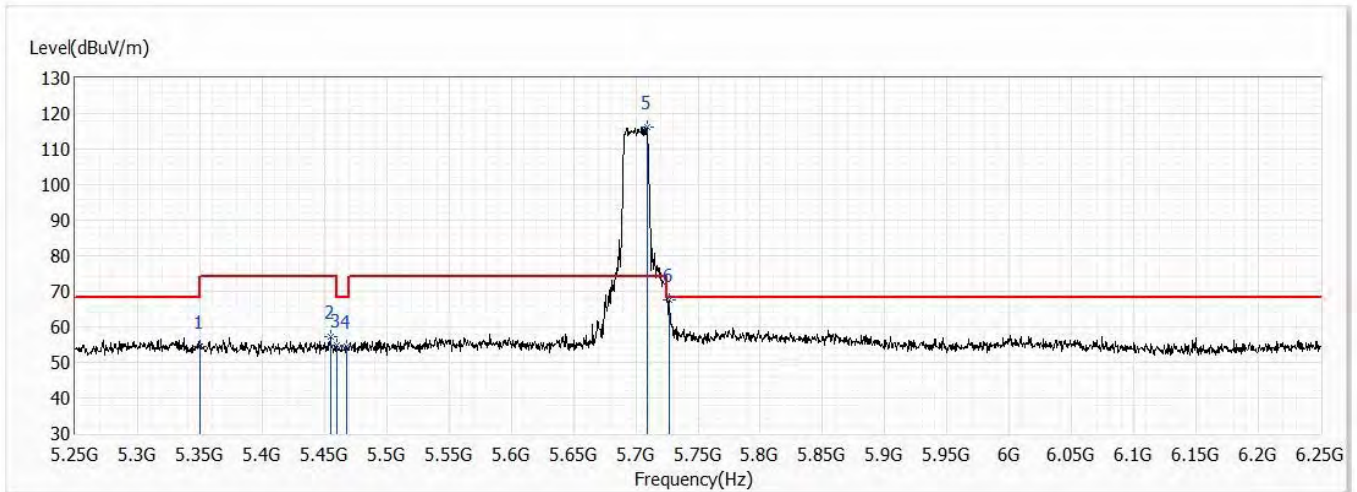


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.35	74.00	-19.65	33.04	21.31	PK
2	5455.000	57.21	74.00	-16.79	35.56	21.65	PK
3	5460.000	54.89	74.00	-19.11	33.23	21.66	PK
4	5467.500	54.39	68.20	-13.81	32.71	21.68	PK
! 5	5709.000	116.08	74.00	42.08	94.24	21.84	PK
6	5726.500	67.51	68.20	-0.69	45.48	22.03	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

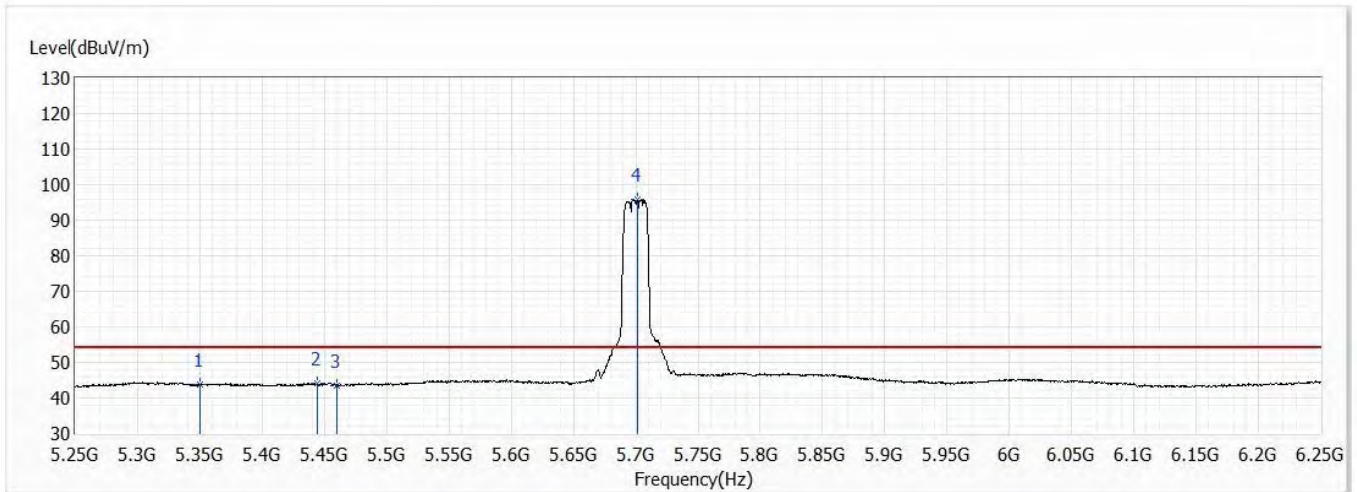


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.75	54.00	-10.25	22.44	21.31	AV
2	5444.000	44.07	54.00	-9.93	22.43	21.64	AV
3	5460.000	43.59	54.00	-10.41	21.93	21.66	AV
! 4	5701.000	96.01	54.00	42.01	74.26	21.75	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

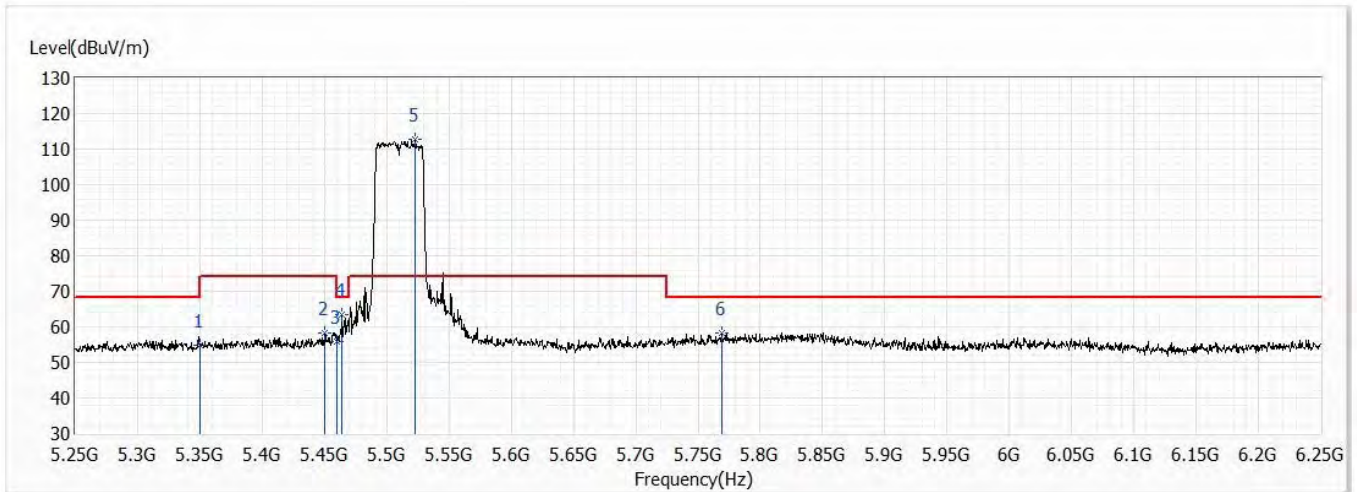


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.89	74.00	-19.11	33.58	21.31	PK
2	5450.500	58.38	74.00	-15.62	36.74	21.64	PK
3	5460.000	55.73	74.00	-18.27	34.07	21.66	PK
4	5464.000	63.54	68.20	-4.66	41.87	21.67	PK
! 5	5523.000	112.84	74.00	38.84	91.01	21.83	PK
6	5769.000	58.31	68.20	-9.89	35.98	22.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

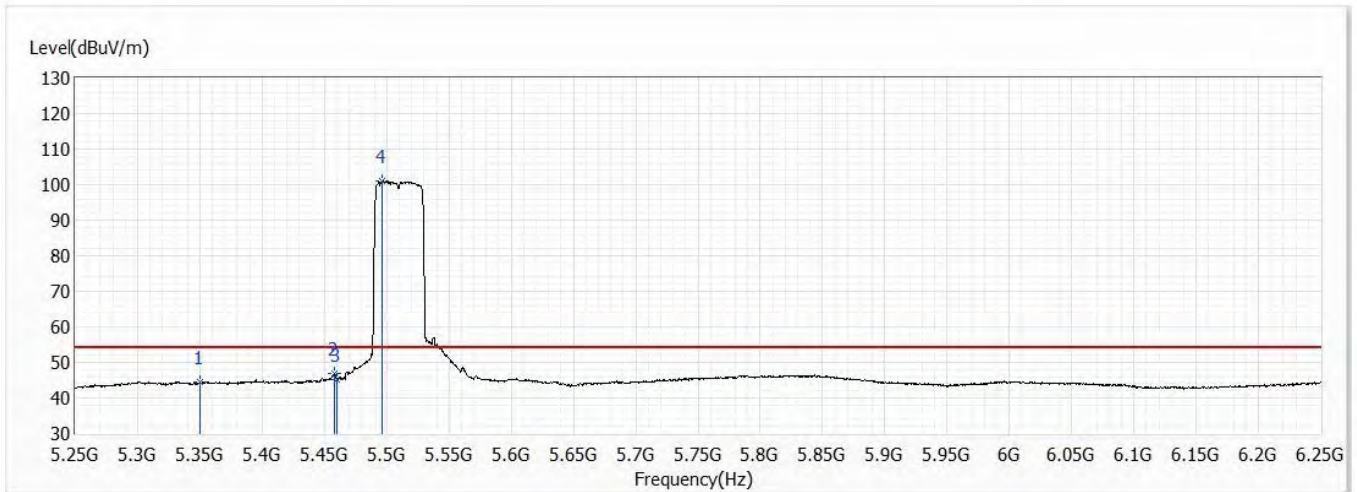


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.38	54.00	-9.62	23.07	21.31	AV
2	5458.500	46.80	54.00	-7.20	25.14	21.66	AV
3	5460.000	45.19	54.00	-8.81	23.53	21.66	AV
! 4	5496.000	100.95	54.00	46.95	79.21	21.74	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

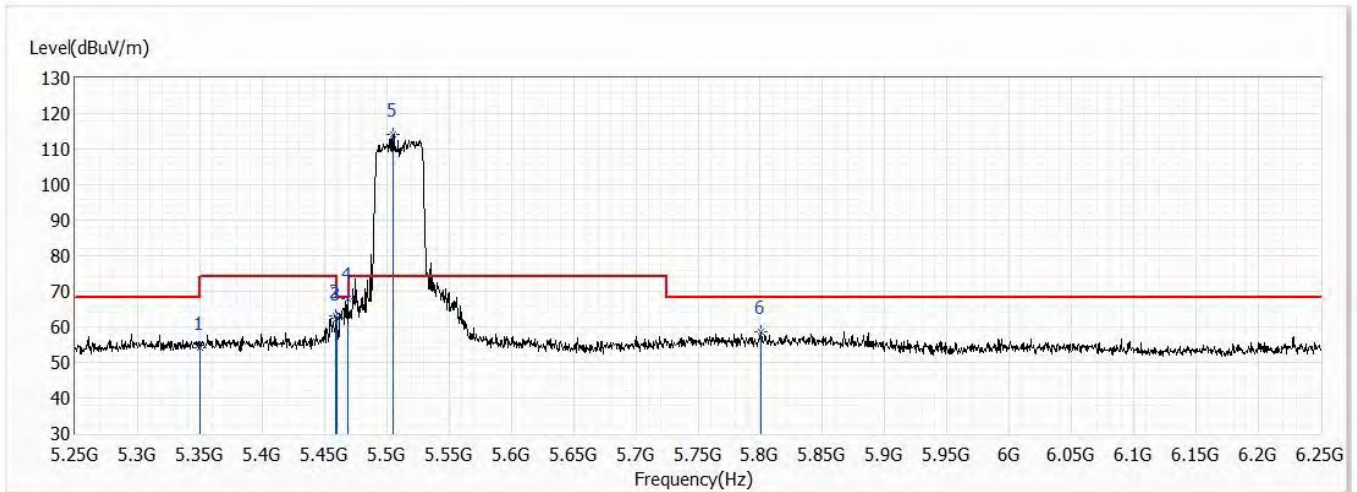


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.20	74.00	-19.80	32.89	21.31	PK
2	5459.500	63.02	74.00	-10.98	41.36	21.66	PK
3	5460.000	62.27	74.00	-11.73	40.61	21.66	PK
4	5468.500	68.05	68.20	-0.15	46.37	21.68	PK
! 5	5505.500	114.02	74.00	40.02	92.25	21.77	PK
6	5801.000	58.46	68.20	-9.74	36.07	22.39	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

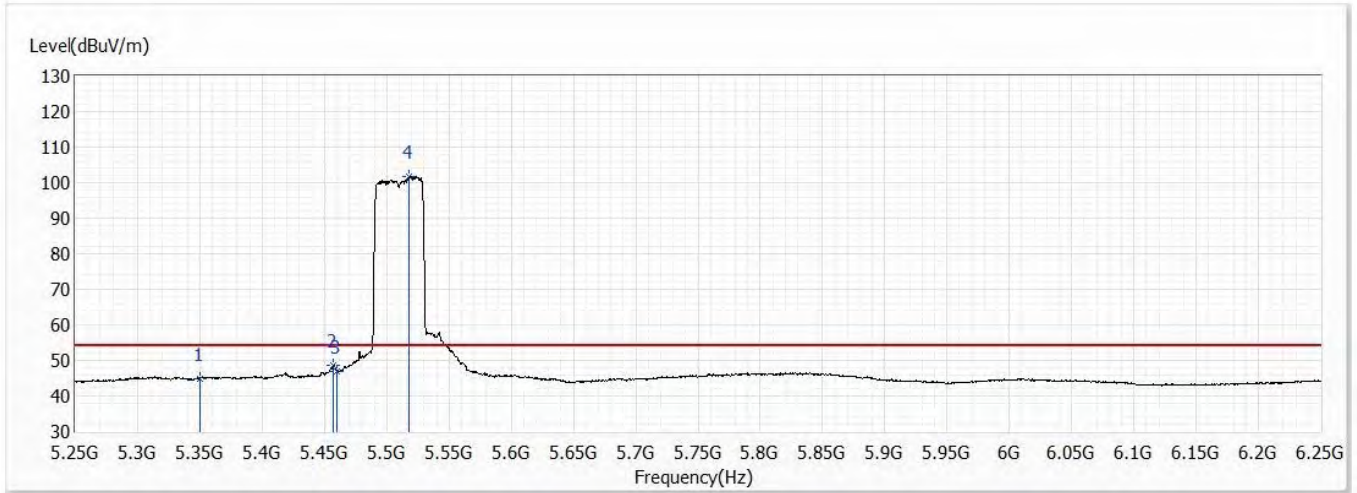


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.98	54.00	-9.02	23.67	21.31	AV
2	5457.500	48.53	54.00	-5.47	26.88	21.65	AV
3	5460.000	47.00	54.00	-7.00	25.34	21.66	AV
! 4	5517.500	101.73	54.00	47.73	79.93	21.80	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

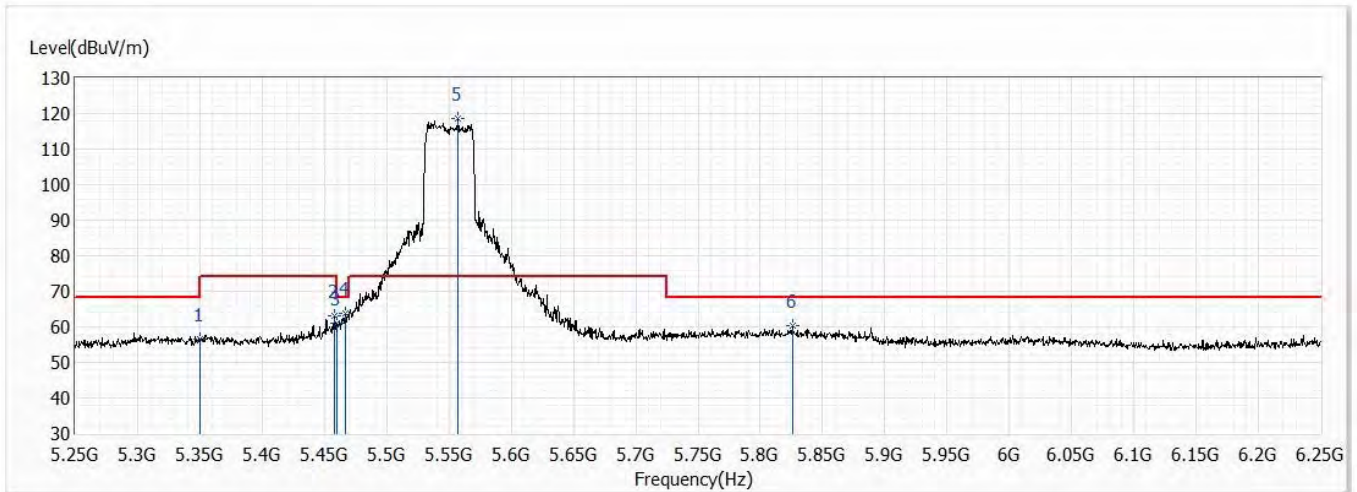


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.48	74.00	-17.52	35.17	21.31	PK
2	5458.000	63.11	74.00	-10.89	41.46	21.65	PK
3	5460.000	61.04	74.00	-12.96	39.38	21.66	PK
4	5466.500	63.91	68.20	-4.29	42.24	21.67	PK
! 5	5557.500	118.46	74.00	44.46	96.55	21.91	PK
6	5826.000	60.19	68.20	-8.01	37.85	22.34	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

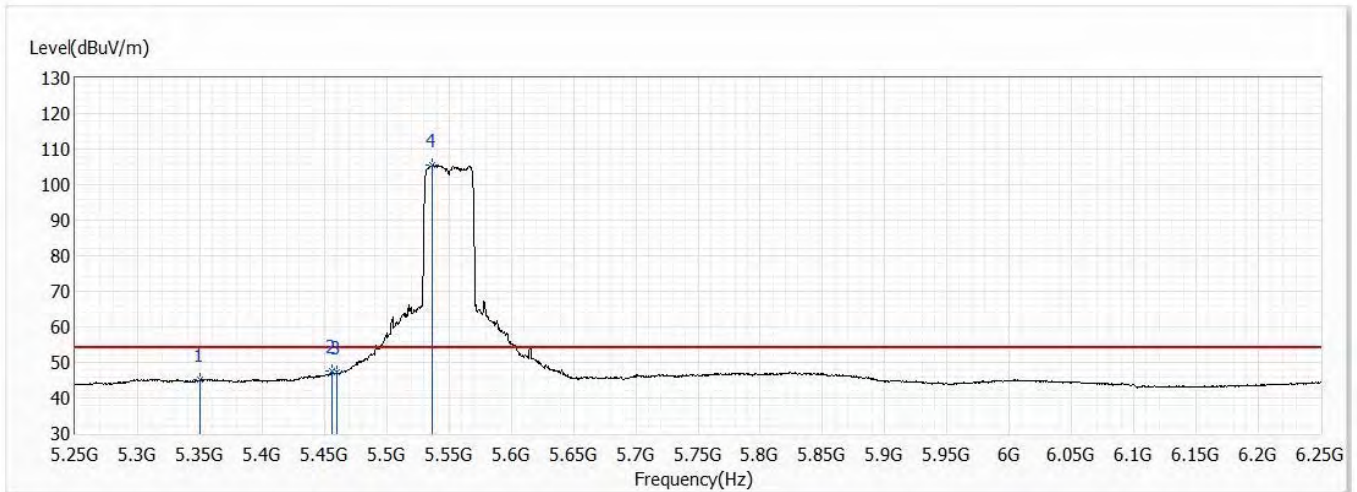


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.10	54.00	-8.90	23.79	21.31	AV
2	5456.500	47.44	54.00	-6.56	25.80	21.64	AV
3	5460.000	47.22	54.00	-6.78	25.56	21.66	AV
! 4	5536.500	105.53	54.00	51.53	83.68	21.85	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

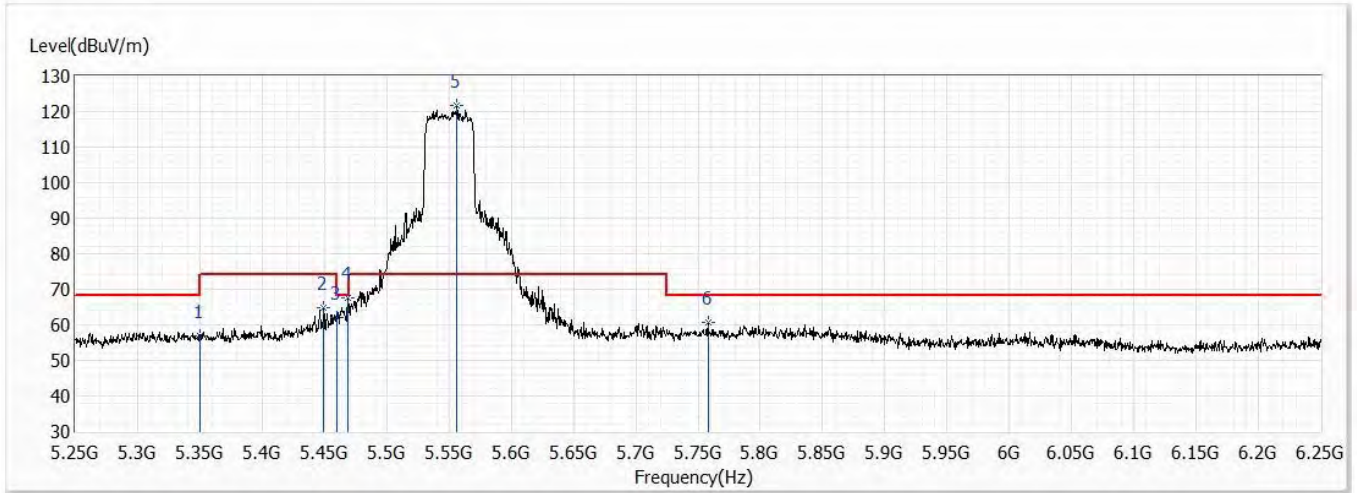


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.90	74.00	-17.10	35.59	21.31	PK
2	5449.500	64.75	74.00	-9.25	43.11	21.64	PK
3	5460.000	62.12	74.00	-11.88	40.46	21.66	PK
4	5468.500	67.50	68.20	-0.70	45.82	21.68	PK
! 5	5556.500	121.58	74.00	47.58	99.67	21.91	PK
6	5758.000	60.64	68.20	-7.56	38.33	22.31	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

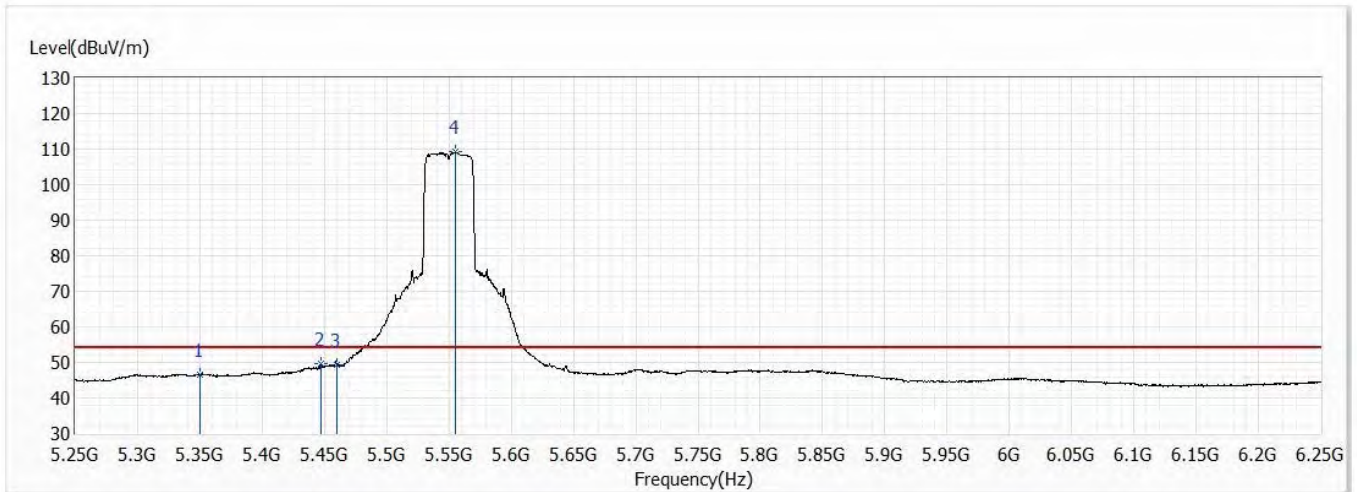


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.65	54.00	-7.35	25.34	21.31	AV
2	5447.000	49.60	54.00	-4.40	27.96	21.64	AV
3	5460.000	49.31	54.00	-4.69	27.65	21.66	AV
! 4	5555.000	109.20	54.00	55.20	87.30	21.90	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

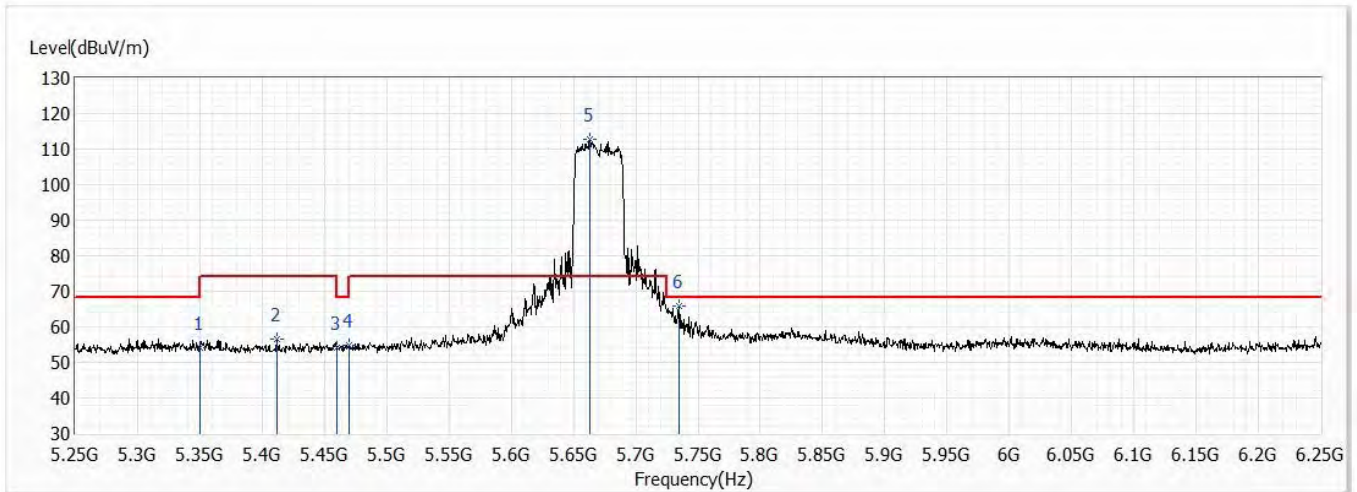


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.14	74.00	-19.86	32.83	21.31	PK
2	5411.500	56.44	74.00	-17.56	34.81	21.63	PK
3	5460.000	54.00	74.00	-20.00	32.34	21.66	PK
4	5469.500	54.89	68.20	-13.31	33.21	21.68	PK
! 5	5663.500	112.83	74.00	38.83	91.12	21.71	PK
6	5734.500	65.86	68.20	-2.34	43.74	22.12	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

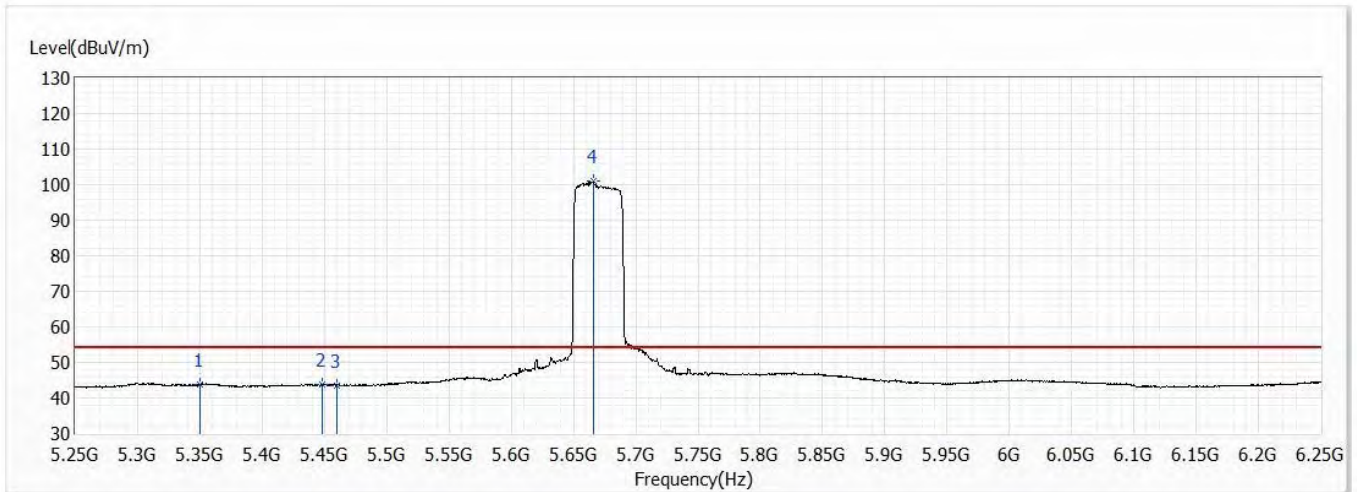


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.66	54.00	-10.34	22.35	21.31	AV
2	5448.500	43.86	54.00	-10.14	22.22	21.64	AV
3	5460.000	43.49	54.00	-10.51	21.83	21.66	AV
! 4	5666.000	100.89	54.00	46.89	79.18	21.71	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

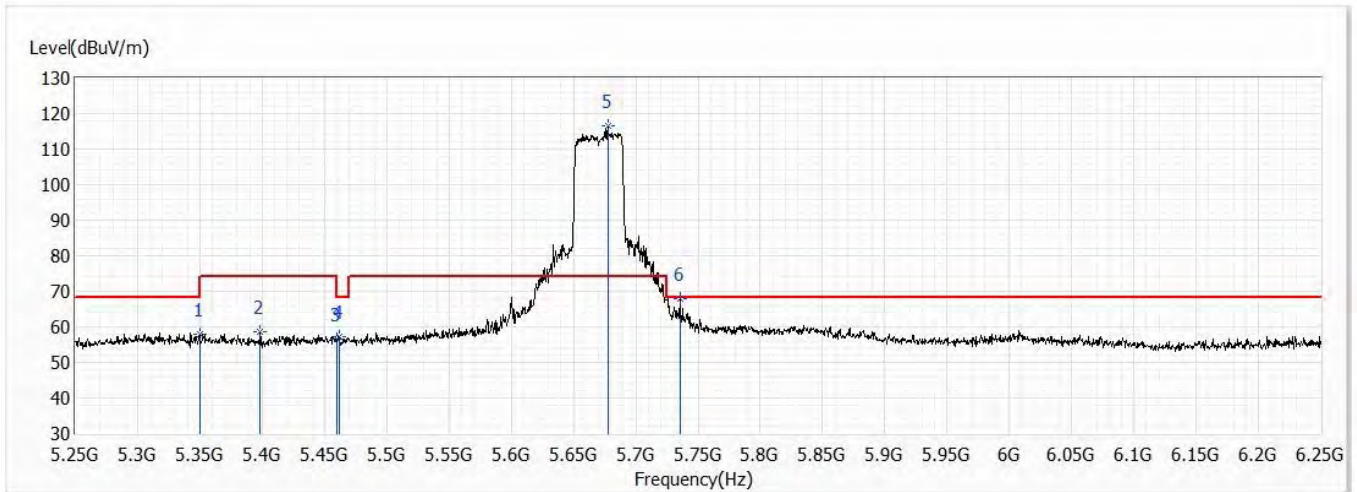


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.79	74.00	-16.21	36.48	21.31	PK
2	5398.500	58.74	74.00	-15.26	37.13	21.61	PK
3	5460.000	56.59	74.00	-17.41	34.93	21.66	PK
4	5461.500	57.07	68.20	-11.13	35.41	21.66	PK
! 5	5677.500	116.45	74.00	42.45	94.73	21.72	PK
6	5735.500	67.99	68.20	-0.21	45.87	22.12	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

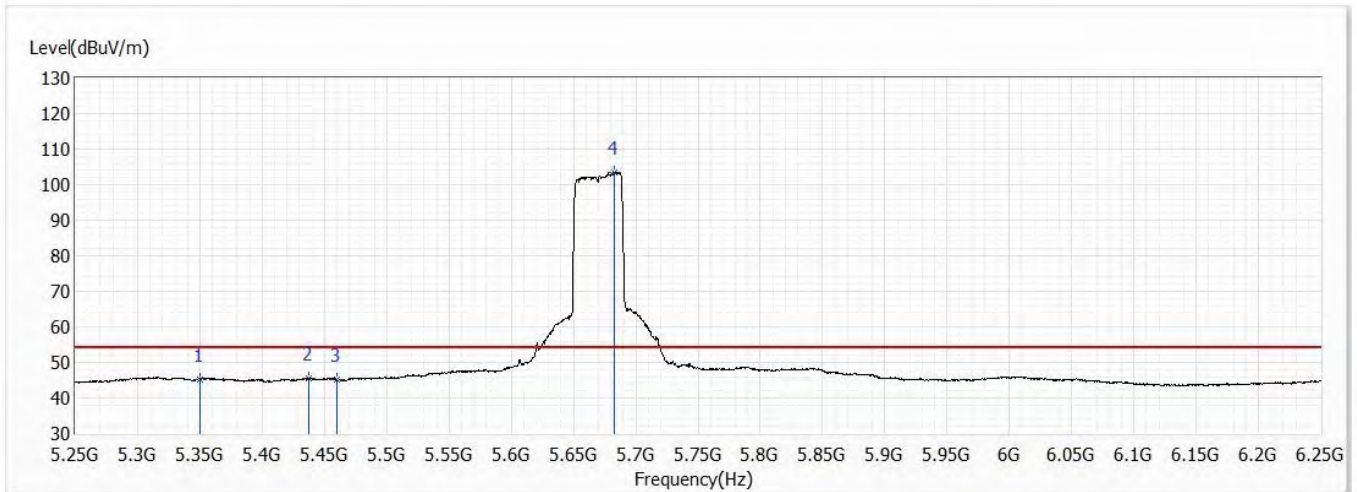


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.34	54.00	-8.66	24.03	21.31	AV
2	5437.500	45.53	54.00	-8.47	23.90	21.63	AV
3	5460.000	45.02	54.00	-8.98	23.36	21.66	AV
! 4	5683.000	103.50	54.00	49.50	81.78	21.72	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

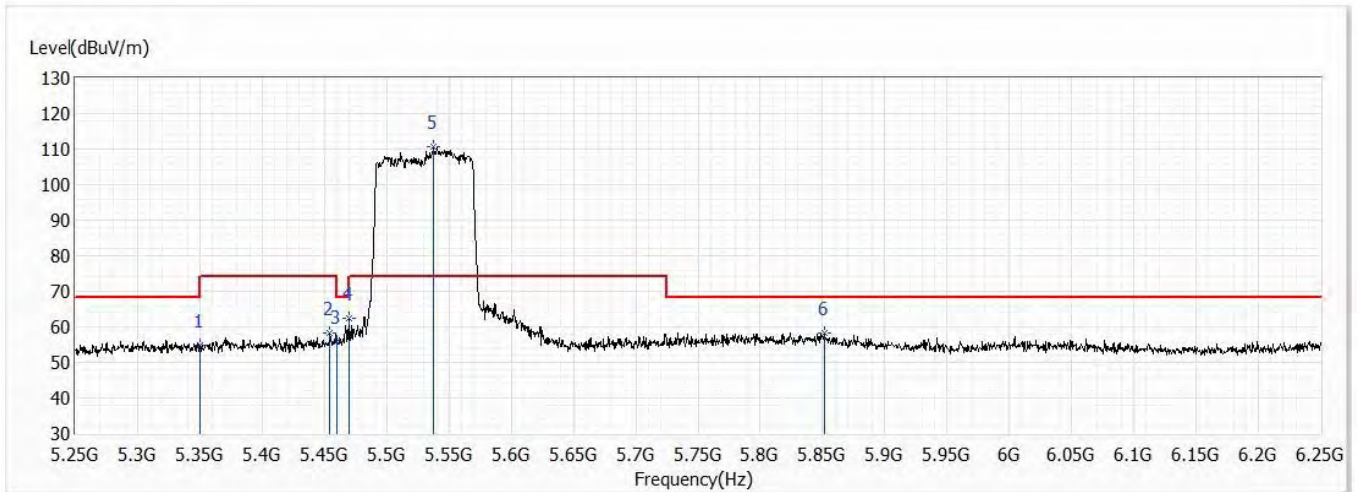


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.87	74.00	-19.13	33.56	21.31	PK
2	5454.500	58.25	74.00	-15.75	36.60	21.65	PK
3	5460.000	55.95	74.00	-18.05	34.29	21.66	PK
4	5469.500	62.42	68.20	-5.78	40.74	21.68	PK
! 5	5538.000	110.65	74.00	36.65	88.79	21.86	PK
6	5851.500	58.25	68.20	-9.95	35.95	22.30	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

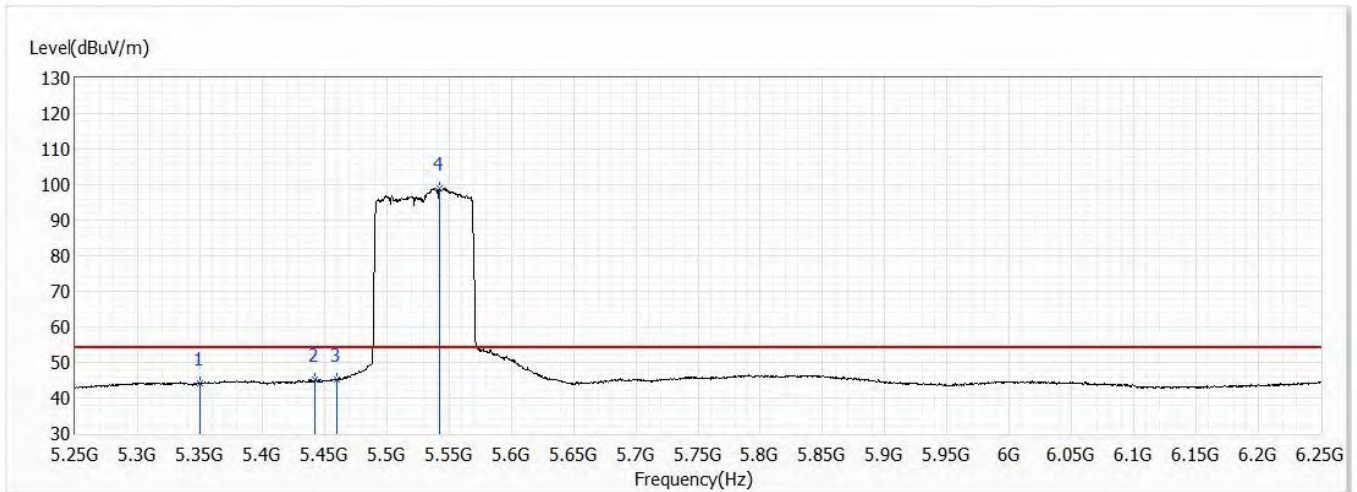


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	44.16	54.00	-9.84	22.85	21.31	AV
2	5442.000	45.29	54.00	-8.71	23.65	21.64	AV
3	5460.000	45.12	54.00	-8.88	23.46	21.66	AV
! 4	5542.500	98.94	54.00	44.94	77.07	21.87	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

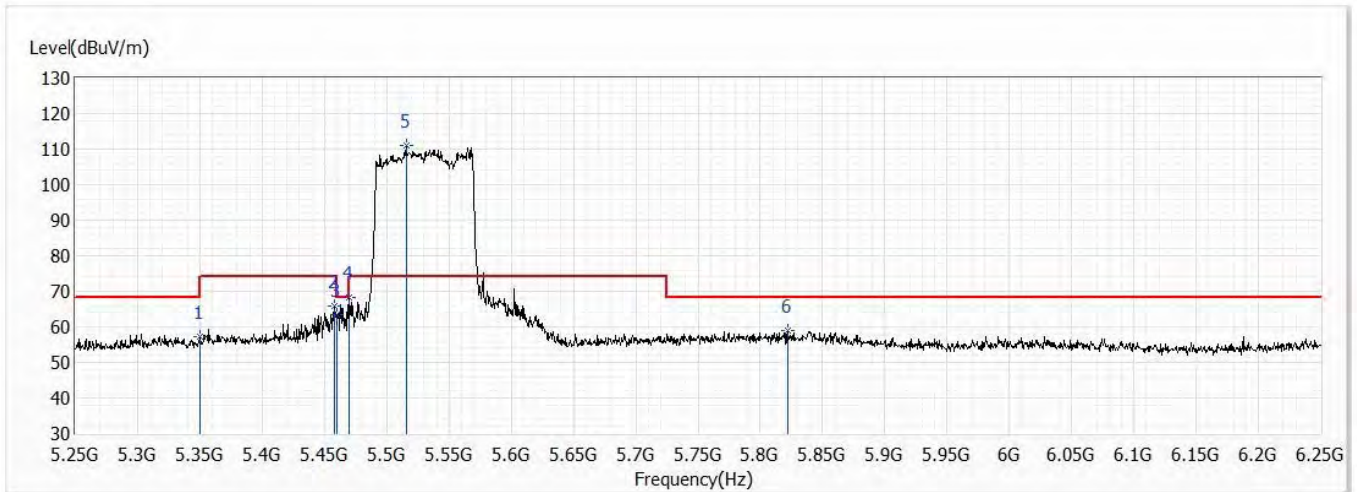


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.23	74.00	-16.77	35.92	21.31	PK
2	5458.000	65.77	74.00	-8.23	44.12	21.65	PK
3	5460.000	63.38	74.00	-10.62	41.72	21.66	PK
4	5469.500	68.19	68.20	-0.01	46.51	21.68	PK
! 5	5515.500	110.99	74.00	36.99	89.19	21.80	PK
6	5822.000	58.87	68.20	-9.33	36.51	22.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

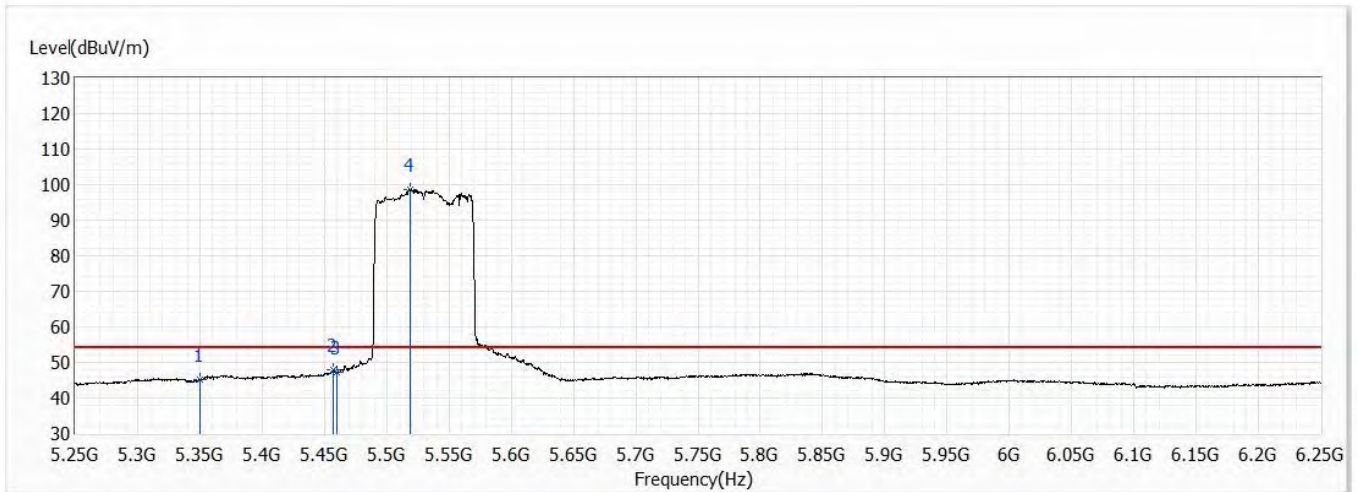


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.32	54.00	-8.68	24.01	21.31	AV
2	5457.000	47.78	54.00	-6.22	26.14	21.64	AV
3	5460.000	47.29	54.00	-6.71	25.63	21.66	AV
! 4	5518.500	98.68	54.00	44.68	76.87	21.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/29
Test Mode	Mode 3: Transmit_BF	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 114,5.57G,BW160M	Humidity (%RH)	63.0

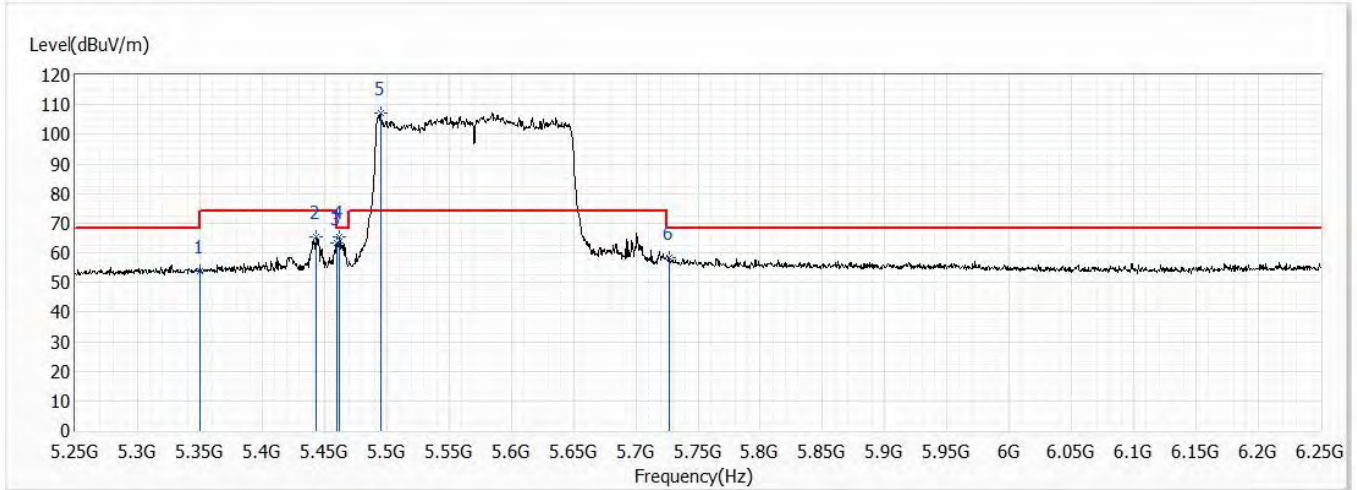


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.70	74.00	-20.30	32.39	21.31	PK
2	5443.000	65.49	74.00	-8.51	43.85	21.64	PK
3	5460.000	63.29	74.00	-10.71	41.63	21.66	PK
4	5461.500	65.46	68.20	-2.74	43.80	21.66	PK
! 5	5495.000	107.21	74.00	33.21	85.47	21.74	PK
6	5727.000	58.25	68.20	-9.95	36.22	22.03	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/29
Test Mode	Mode 3: Transmit_BF	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 114,5.57G,BW160M	Humidity (%RH)	63.0

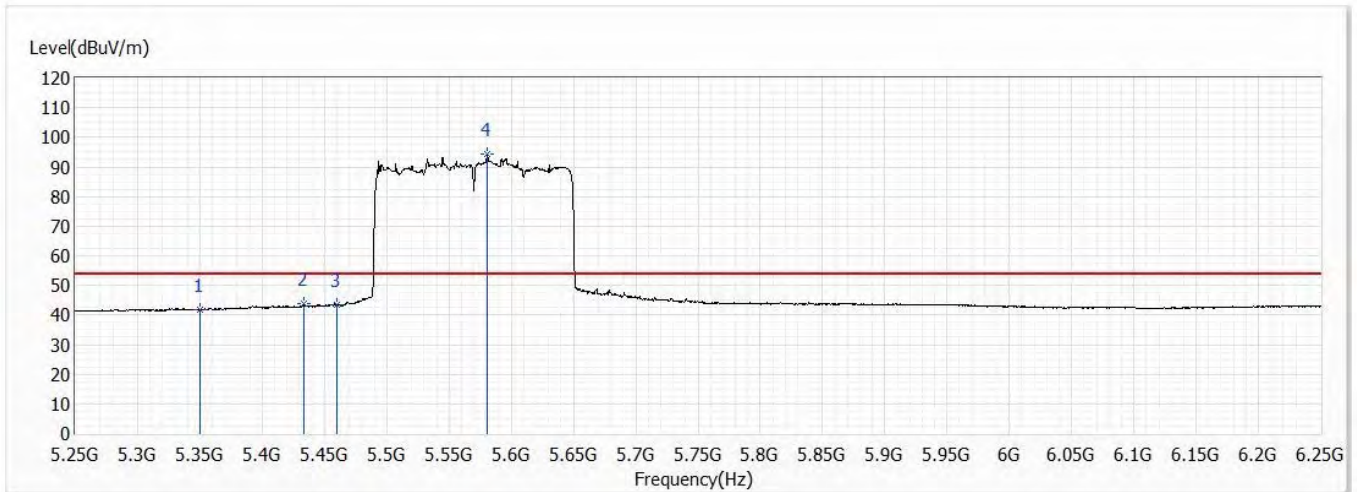


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	41.86	54.00	-12.14	20.55	21.31	AV
2	5433.500	43.78	54.00	-10.22	22.15	21.63	AV
3	5460.000	43.38	54.00	-10.62	21.72	21.66	AV
! 4	5581.000	94.39	54.00	40.39	72.47	21.92	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/29
Test Mode	Mode 3: Transmit_BF	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 114,5.57G,BW160M	Humidity (%RH)	63.0

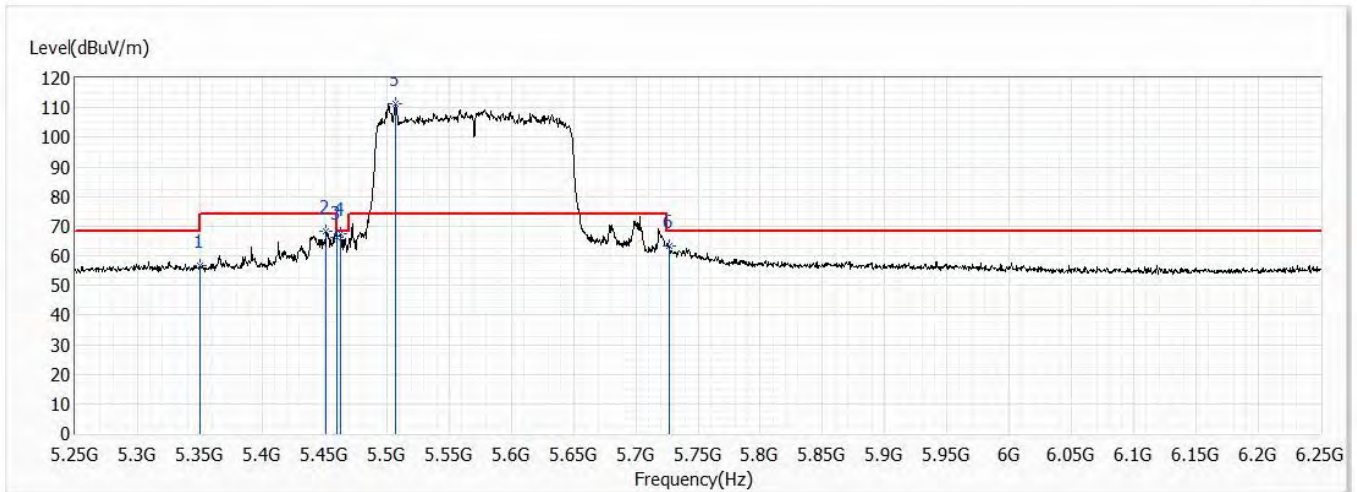


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.62	74.00	-17.38	35.31	21.31	PK
2	5451.500	68.39	74.00	-5.61	46.75	21.64	PK
3	5460.000	66.33	74.00	-7.67	44.67	21.66	PK
4	5462.500	67.27	68.20	-0.93	45.61	21.66	PK
! 5	5507.000	111.30	74.00	37.30	89.53	21.77	PK
6	5726.500	63.30	68.20	-4.90	41.27	22.03	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC120/60Hz	Test Date	2021/6/29
Test Mode	Mode 3: Transmit_BF	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	25.0
Test Condition	802.11ax,Ant0+1+2+3, Ch 114,5.57G,BW160M	Humidity (%RH)	63.0

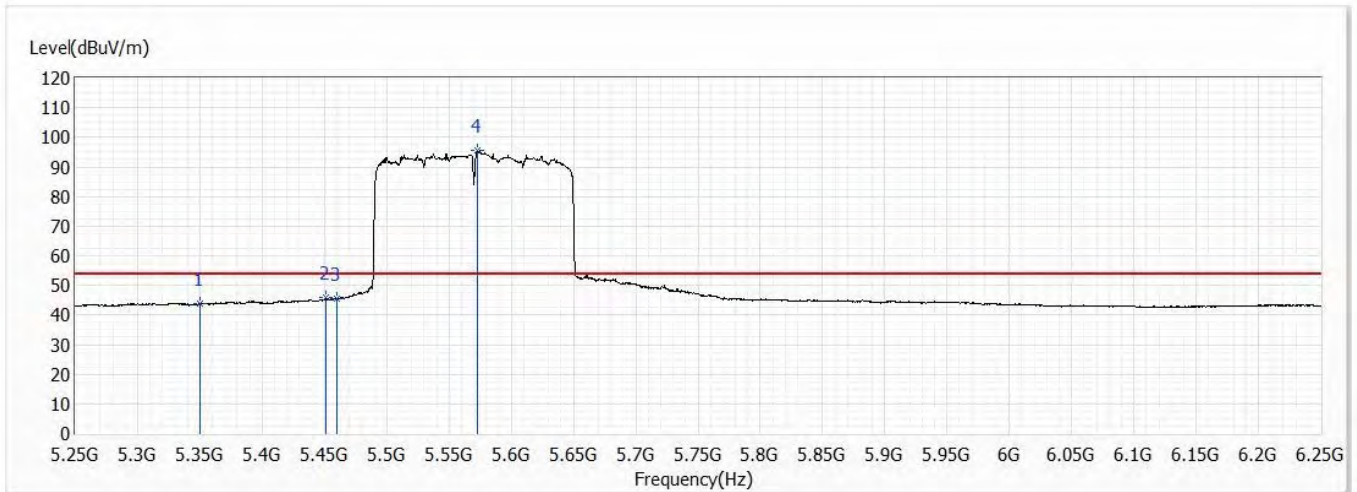


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.66	54.00	-10.34	22.35	21.31	AV
2	5451.000	45.90	54.00	-8.10	24.26	21.64	AV
3	5460.000	45.66	54.00	-8.34	24.00	21.66	AV
! 4	5573.000	95.57	54.00	41.57	73.65	21.92	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

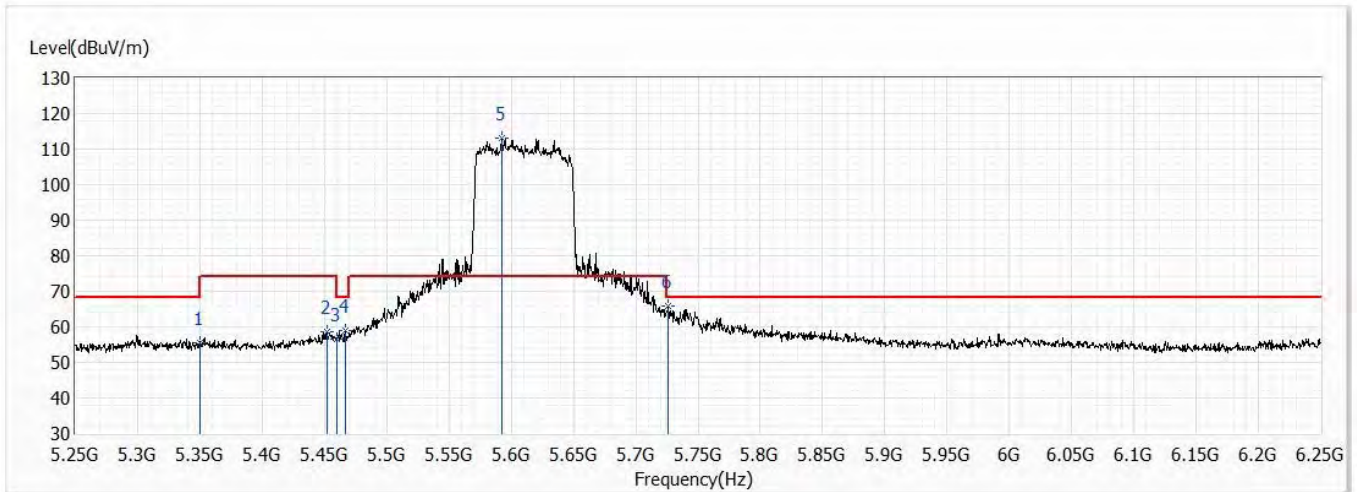


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.60	74.00	-18.40	34.29	21.31	PK
2	5452.000	58.69	74.00	-15.31	37.05	21.64	PK
3	5460.000	56.46	74.00	-17.54	34.80	21.66	PK
4	5467.000	58.92	68.20	-9.28	37.25	21.67	PK
! 5	5592.500	113.19	74.00	39.19	91.25	21.94	PK
6	5726.000	65.97	68.20	-2.23	43.95	22.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

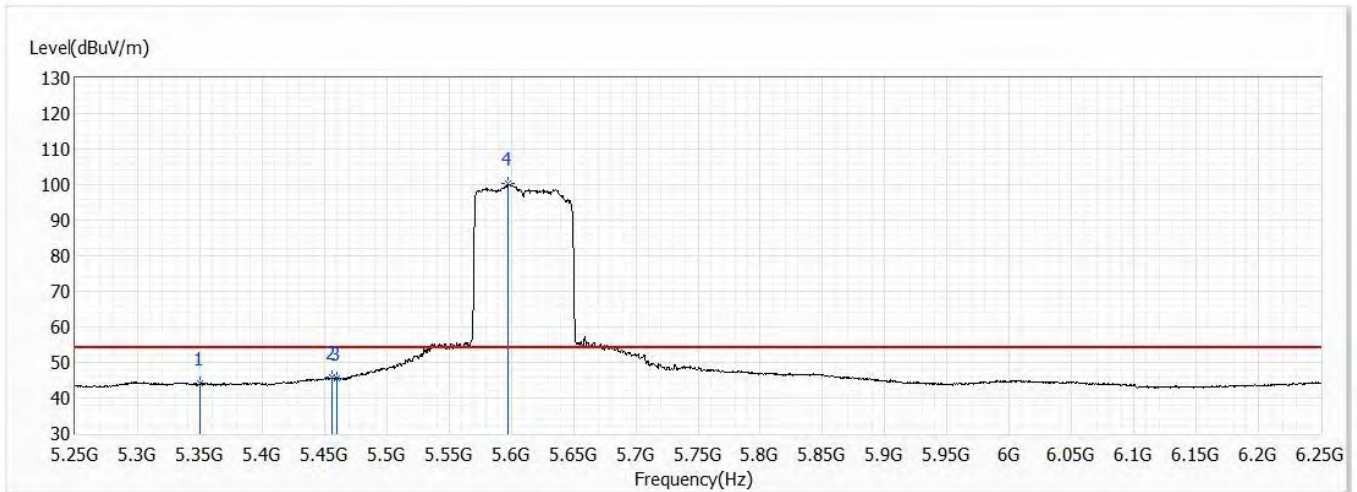


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	43.99	54.00	-10.01	22.68	21.31	AV
2	5456.000	45.75	54.00	-8.25	24.11	21.64	AV
3	5460.000	45.57	54.00	-8.43	23.91	21.66	AV
! 4	5597.500	100.19	54.00	46.19	78.25	21.94	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

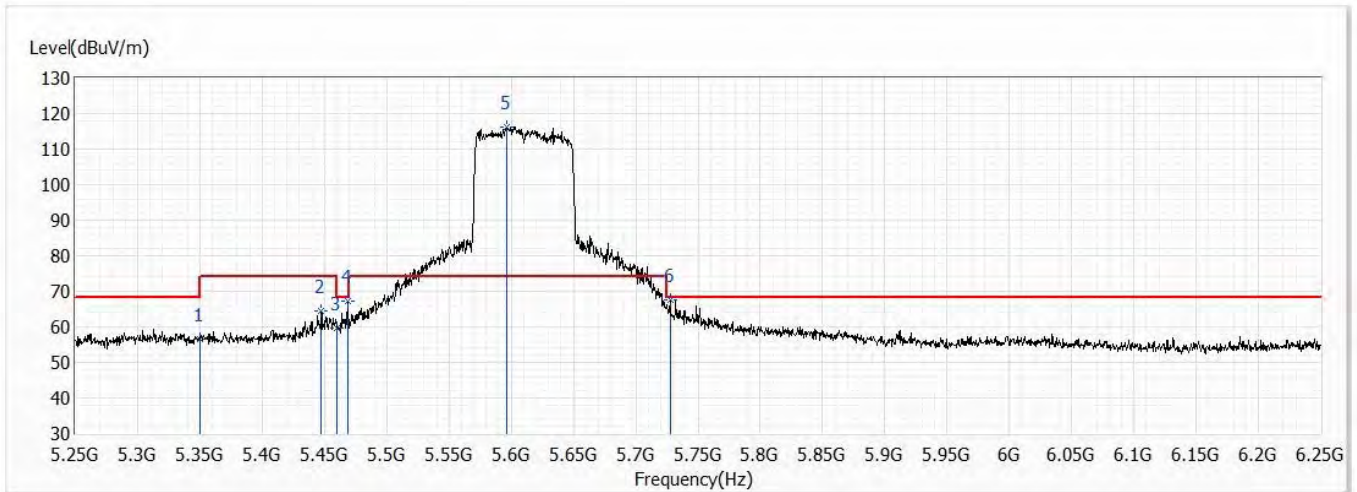


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.60	74.00	-17.40	35.29	21.31	PK
2	5447.500	64.35	74.00	-9.65	42.71	21.64	PK
3	5460.000	59.63	74.00	-14.37	37.97	21.66	PK
4	5468.500	67.12	68.20	-1.08	45.44	21.68	PK
! 5	5596.000	116.30	74.00	42.30	94.36	21.94	PK
6	5727.500	67.43	68.20	-0.77	45.39	22.04	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

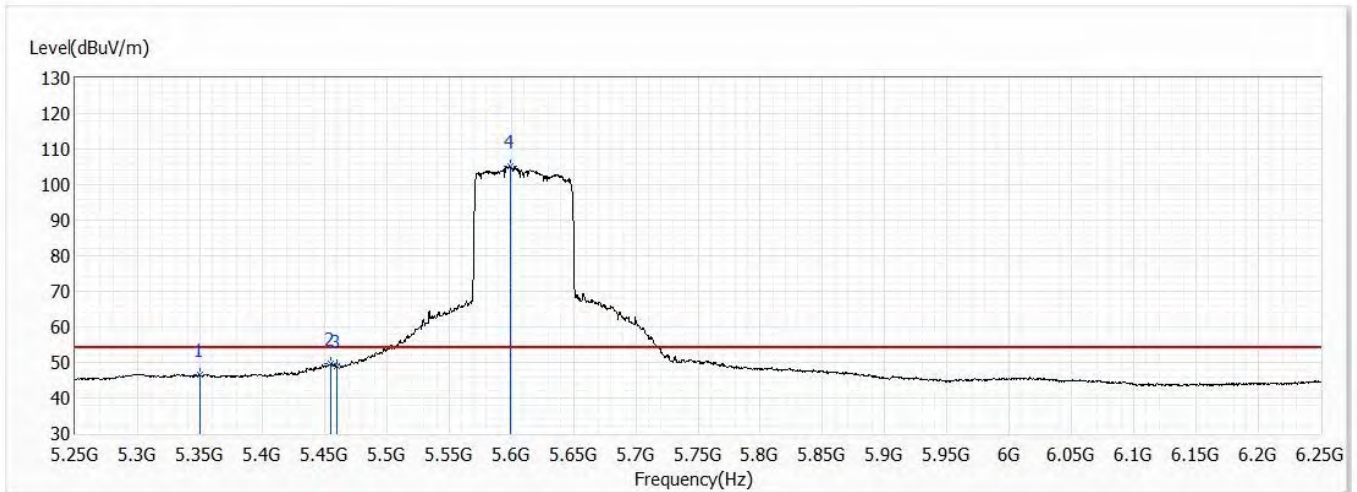


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.60	54.00	-7.40	25.29	21.31	AV
2	5455.500	49.60	54.00	-4.40	27.95	21.65	AV
3	5460.000	48.90	54.00	-5.10	27.24	21.66	AV
! 4	5599.000	105.31	54.00	51.31	83.37	21.94	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	5/14/2021
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 149,5.745G,BW20M	Humidity (%RH)	58.0

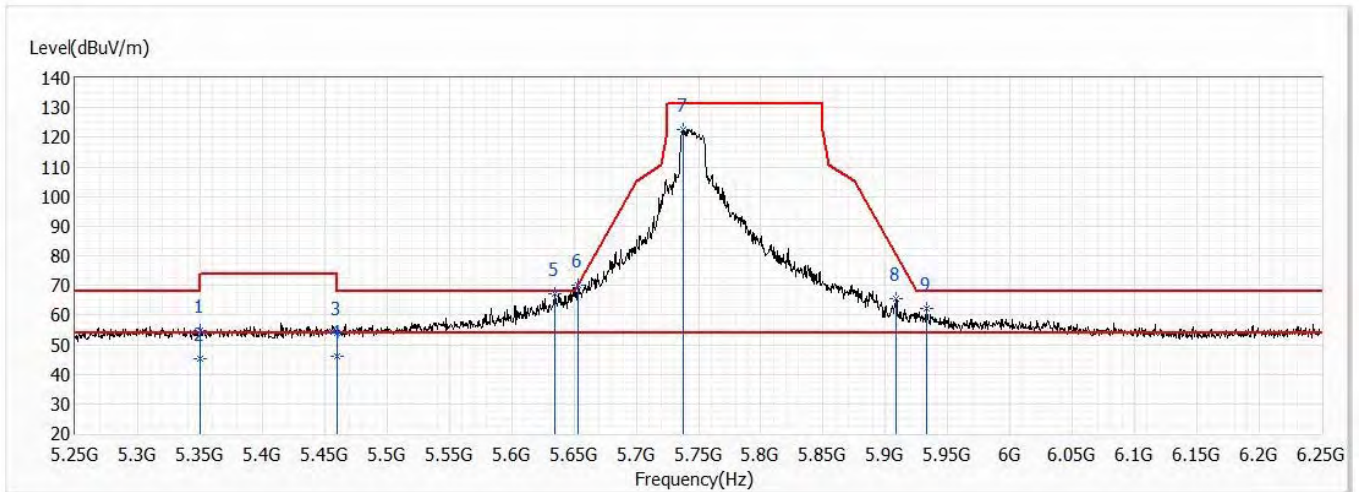


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.66	74.00	-19.34	33.35	21.31	PK
2	5350.000	45.34	54.00	-8.66	24.03	21.31	AV
3	5460.000	54.07	74.00	-19.93	32.41	21.66	PK
4	5460.000	46.19	54.00	-7.81	24.53	21.66	AV
5	5634.500	67.33	68.20	-0.87	45.56	21.77	PK
* 6	5653.000	70.14	70.43	-0.29	48.44	21.70	PK
7	5737.500	122.48	131.20	-8.72	100.32	22.16	PK
8	5908.500	65.59	80.38	-14.79	43.06	22.53	PK
9	5933.500	62.27	68.20	-5.93	39.65	22.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 149,5.745G,BW20M	Humidity (%RH)	58.0

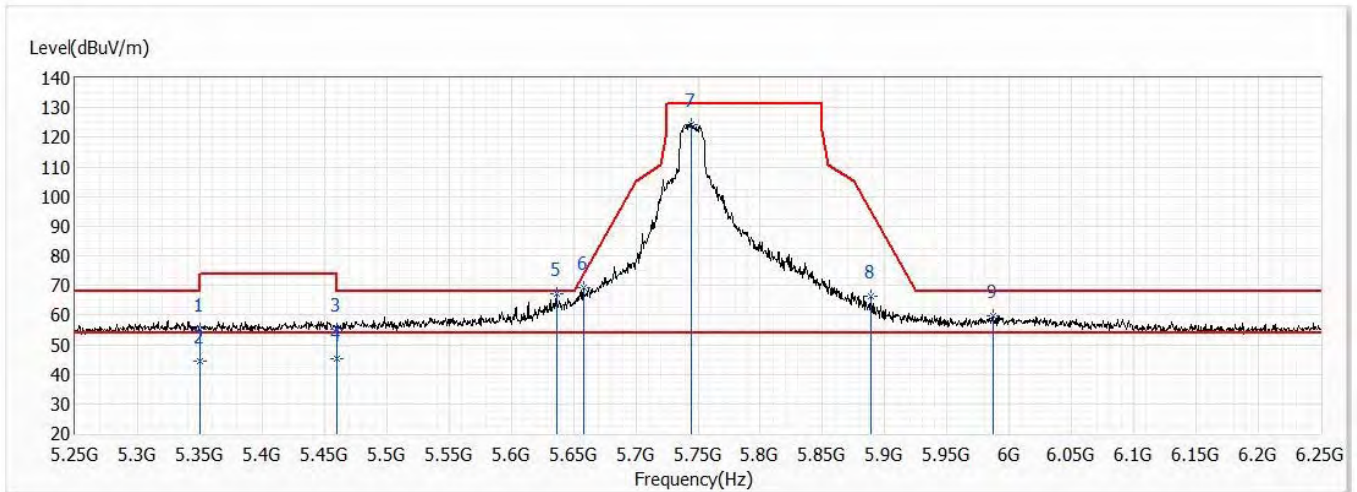


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.10	74.00	-18.90	33.79	21.31	PK
2	5350.000	44.36	54.00	-9.64	23.05	21.31	AV
3	5460.000	54.99	74.00	-19.01	33.33	21.66	PK
4	5460.000	45.15	54.00	-8.85	23.49	21.66	AV
* 5	5636.500	67.35	68.20	-0.85	45.59	21.76	PK
6	5658.000	69.25	74.14	-4.89	47.55	21.70	PK
7	5744.500	124.10	131.20	-7.10	101.87	22.23	PK
8	5888.500	66.19	95.18	-28.99	43.75	22.44	PK
9	5987.000	59.71	68.20	-8.49	37.16	22.55	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 157,5.785G,BW20M	Humidity (%RH)	58.0

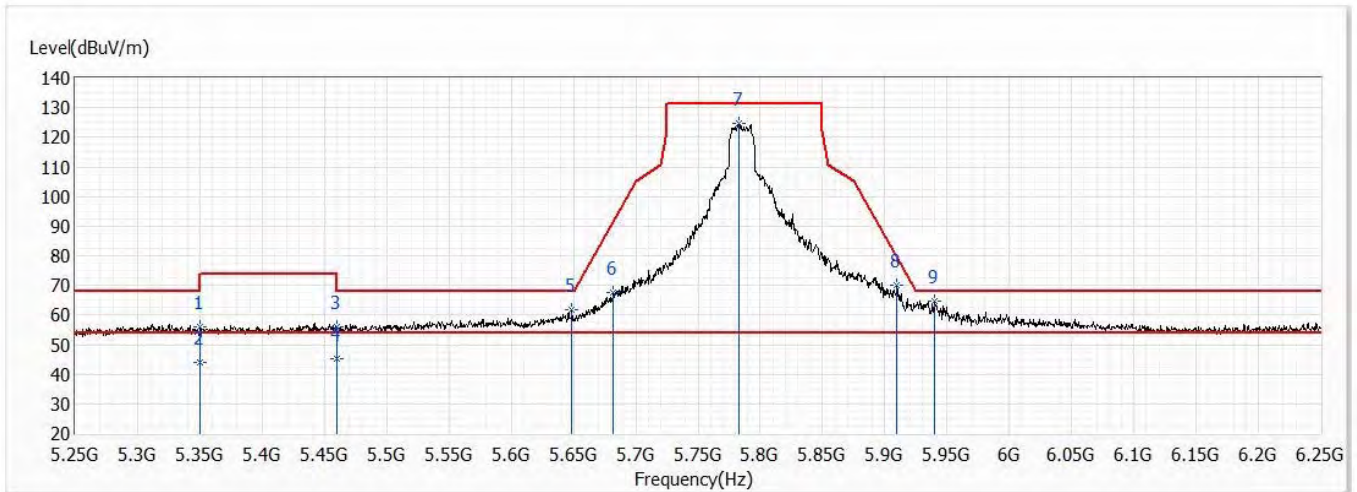


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.89	74.00	-18.11	34.58	21.31	PK
2	5350.000	44.15	54.00	-9.85	22.84	21.31	AV
3	5460.000	56.04	74.00	-17.96	34.38	21.66	PK
4	5460.000	45.10	54.00	-8.90	23.44	21.66	AV
5	5648.500	61.60	68.20	-6.60	39.90	21.70	PK
6	5682.000	67.72	91.92	-24.20	46.00	21.72	PK
7	5782.480	124.69	131.20	-6.51	102.34	22.35	PK
8	5909.500	70.03	79.64	-9.61	47.49	22.54	PK
* 9	5940.000	64.73	68.20	-3.47	42.07	22.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 157,5.785G,BW20M	Humidity (%RH)	58.0

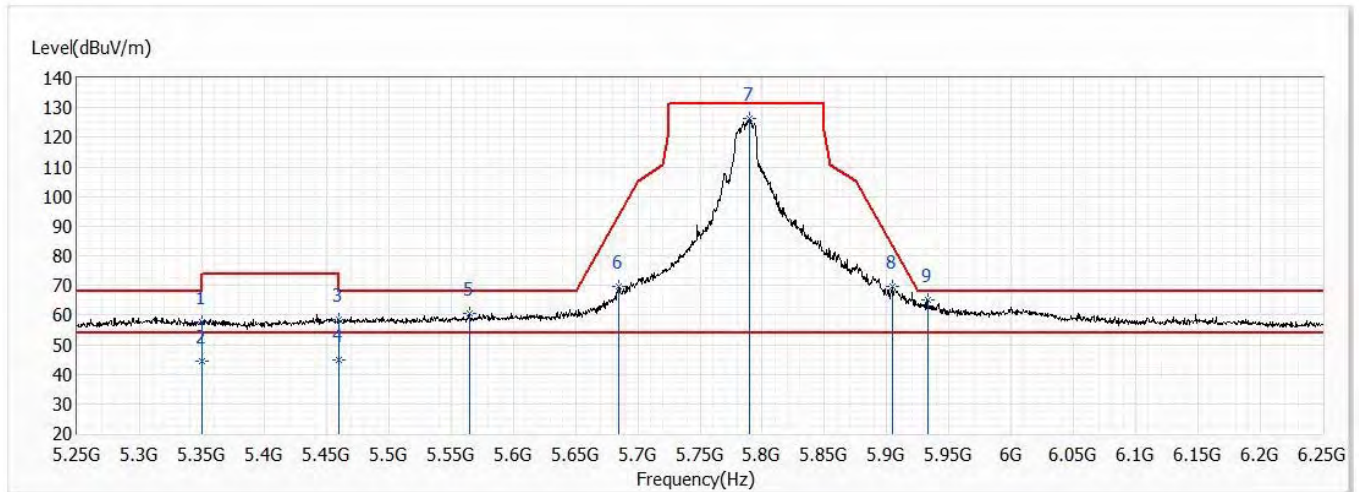


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.45	74.00	-16.55	36.14	21.31	PK
2	5350.000	44.35	54.00	-9.65	23.04	21.31	AV
3	5460.000	58.55	74.00	-15.45	36.89	21.66	PK
4	5460.000	44.67	54.00	-9.33	23.01	21.66	AV
5	5565.000	60.54	68.20	-7.66	38.62	21.92	PK
6	5685.000	69.67	94.13	-24.46	47.95	21.72	PK
7	5790.000	126.28	131.20	-4.92	103.91	22.37	PK
8	5904.500	69.56	83.33	-13.77	47.04	22.52	PK
* 9	5933.000	64.99	68.20	-3.21	42.37	22.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 165,5.852G,BW20M	Humidity (%RH)	58.0

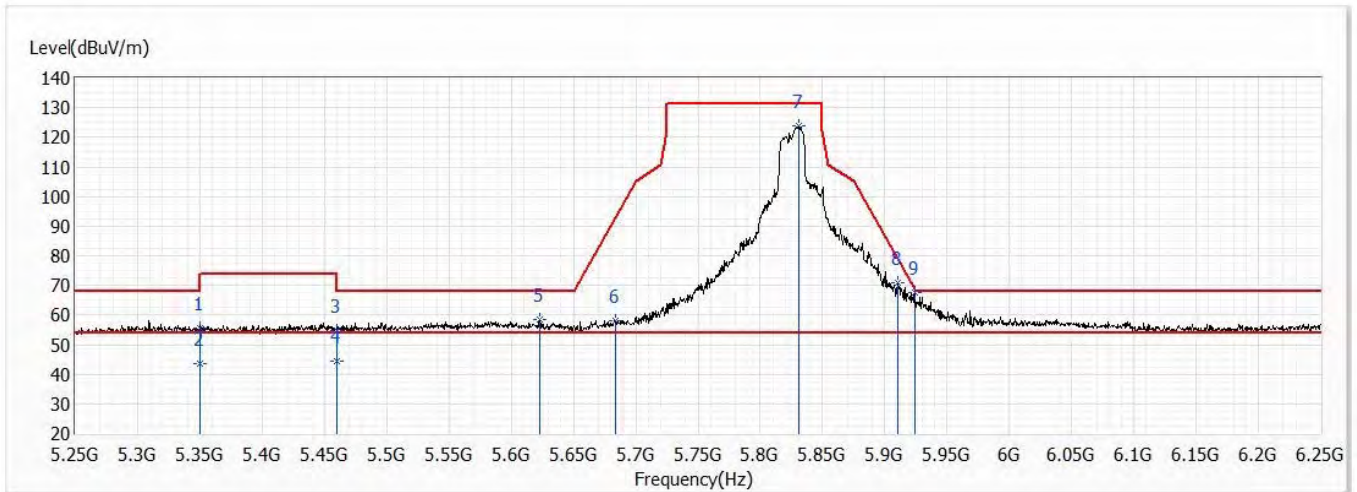


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.45	74.00	-18.55	34.14	21.31	PK
2	5350.000	43.59	54.00	-10.41	22.28	21.31	AV
3	5460.000	54.56	74.00	-19.44	32.90	21.66	PK
4	5460.000	44.33	54.00	-9.67	22.67	21.66	AV
5	5622.500	58.34	68.20	-9.86	36.51	21.83	PK
6	5684.000	58.04	93.40	-35.36	36.32	21.72	PK
7	5831.000	123.74	131.20	-7.46	101.41	22.33	PK
8	5910.500	71.01	78.90	-7.89	48.47	22.54	PK
* 9	5924.000	67.42	68.94	-1.52	44.82	22.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 165,5.852G,BW20M	Humidity (%RH)	58.0

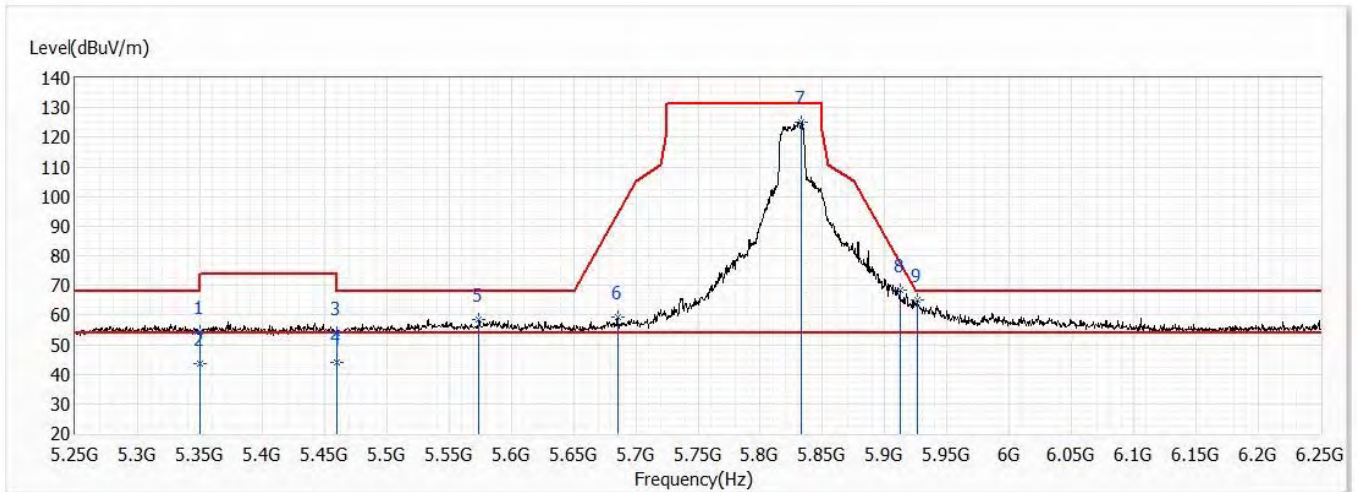


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.17	74.00	-19.83	32.86	21.31	PK
2	5350.000	43.57	54.00	-10.43	22.26	21.31	AV
3	5460.000	54.00	74.00	-20.00	32.34	21.66	PK
4	5460.000	44.19	54.00	-9.81	22.53	21.66	AV
5	5574.000	58.46	68.20	-9.74	36.53	21.93	PK
6	5685.500	59.51	94.50	-34.99	37.78	21.73	PK
7	5833.000	125.27	131.20	-5.93	102.95	22.32	PK
8	5912.000	68.60	77.79	-9.19	46.05	22.55	PK
* 9	5926.000	64.99	68.20	-3.21	42.40	22.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 151,5.755G,BW40M	Humidity (%RH)	58.0

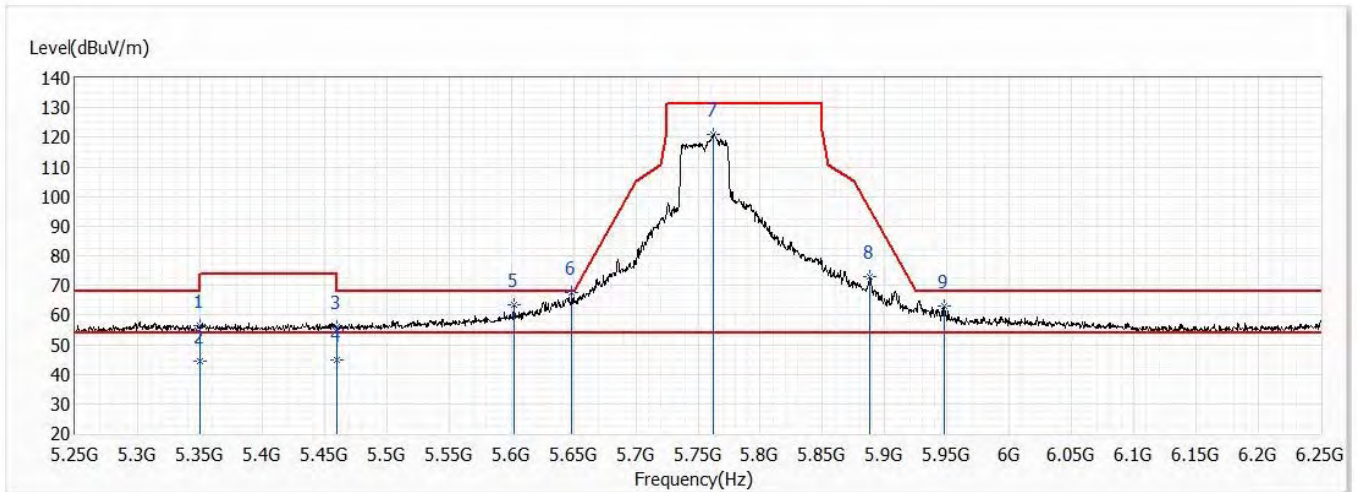


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.35	74.00	-17.65	35.04	21.31	PK
2	5350.000	44.44	54.00	-9.56	23.13	21.31	AV
3	5460.000	56.10	74.00	-17.90	34.44	21.66	PK
4	5460.000	44.78	54.00	-9.22	23.12	21.66	AV
5	5602.000	63.42	68.20	-4.78	41.48	21.94	PK
* 6	5648.500	67.53	68.20	-0.67	45.83	21.70	PK
7	5762.500	120.97	131.20	-10.23	98.65	22.32	PK
8	5888.000	72.77	95.55	-22.78	50.33	22.44	PK
9	5947.500	62.93	68.20	-5.27	40.24	22.69	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 151,5.755G,BW40M	Humidity (%RH)	58.0

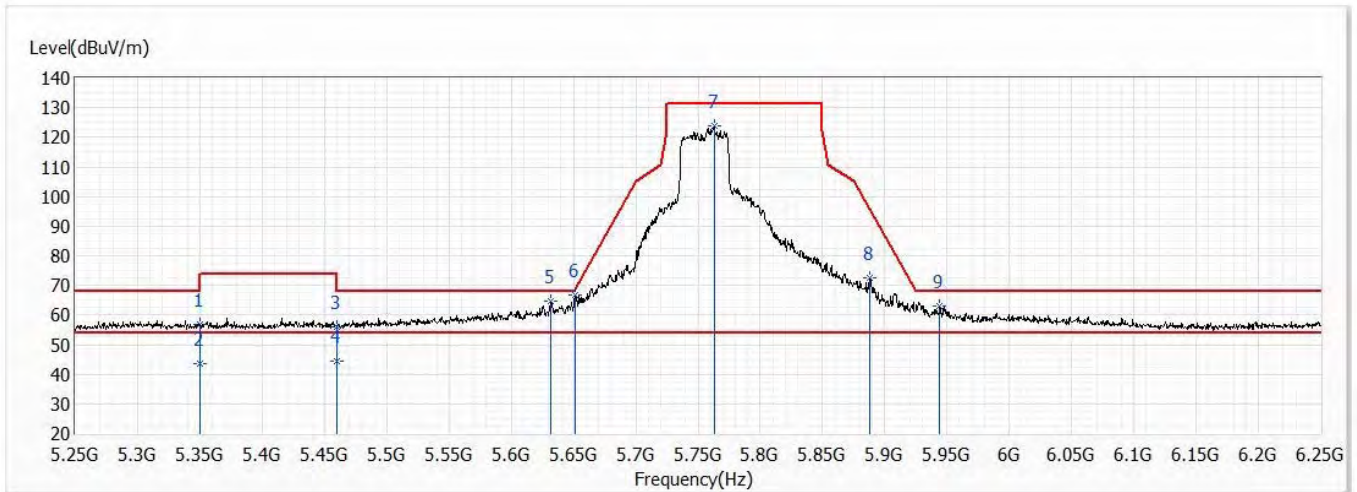


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.96	74.00	-17.04	35.65	21.31	PK
2	5350.000	43.58	54.00	-10.42	22.27	21.31	AV
3	5460.000	55.94	74.00	-18.06	34.28	21.66	PK
4	5460.000	44.35	54.00	-9.65	22.69	21.66	AV
5	5631.500	64.61	68.20	-3.59	42.83	21.78	PK
* 6	5651.500	66.81	69.31	-2.50	45.11	21.70	PK
7	5763.000	123.66	131.20	-7.54	101.34	22.32	PK
8	5888.000	72.56	95.55	-22.99	50.12	22.44	PK
9	5944.000	63.16	68.20	-5.04	40.48	22.68	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 159,5.795G,BW40M	Humidity (%RH)	58.0

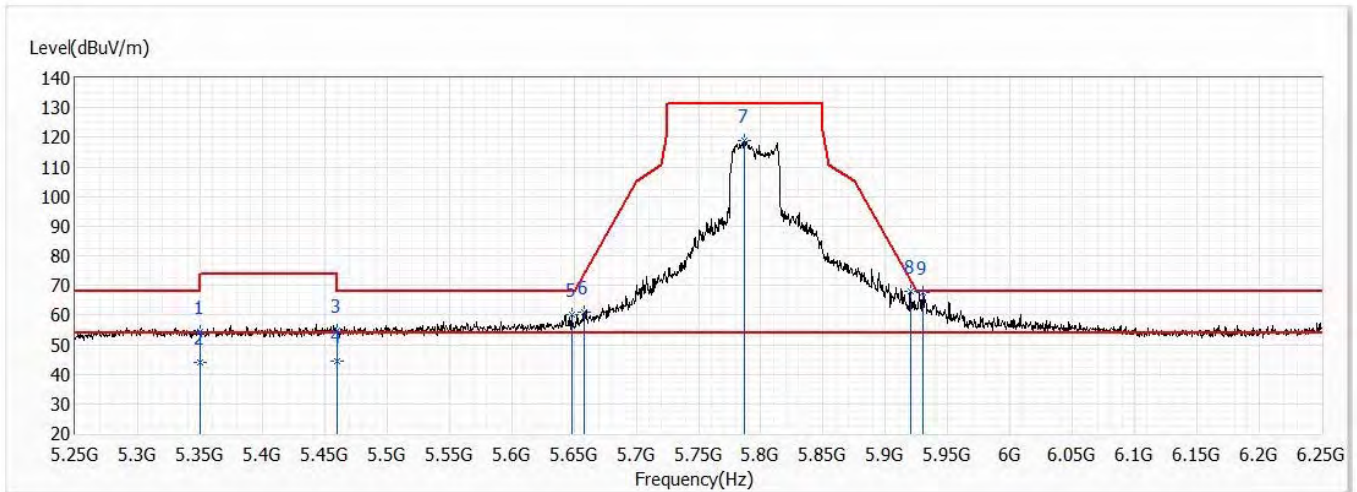


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.38	74.00	-19.62	33.07	21.31	PK
2	5350.000	43.98	54.00	-10.02	22.67	21.31	AV
3	5460.000	54.86	74.00	-19.14	33.20	21.66	PK
4	5460.000	44.52	54.00	-9.48	22.86	21.66	AV
5	5648.000	60.08	68.20	-8.12	38.38	21.70	PK
6	5658.500	61.14	74.51	-13.37	39.44	21.70	PK
7	5786.500	118.98	131.20	-12.22	96.62	22.36	PK
8	5920.000	68.04	71.89	-3.85	45.46	22.58	PK
* 9	5930.000	67.65	68.20	-0.55	45.04	22.61	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 159,5.795G,BW40M	Humidity (%RH)	58.0

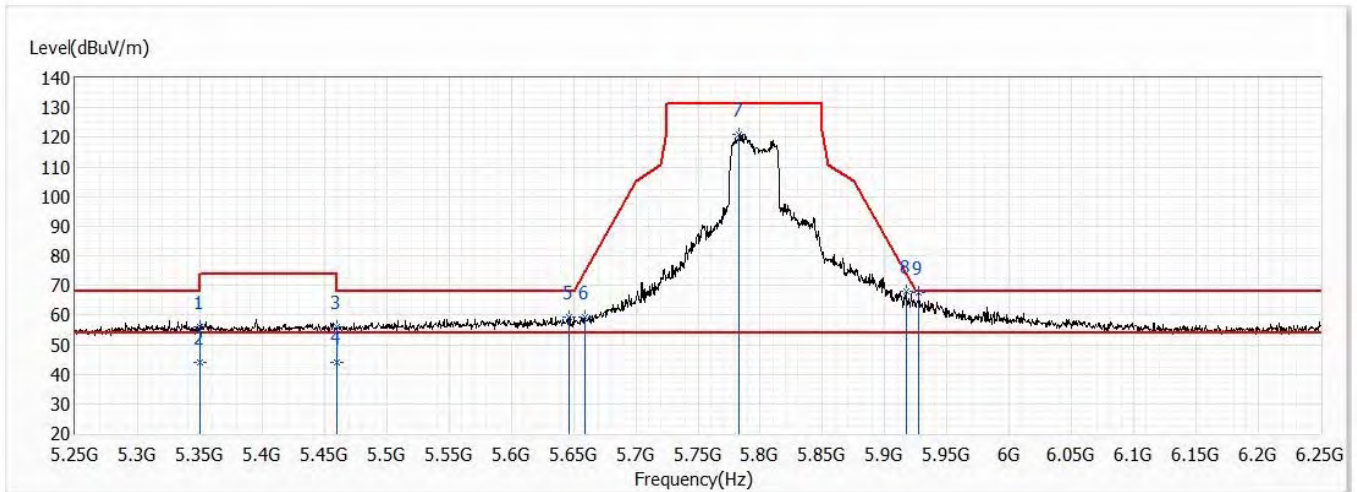


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.07	74.00	-17.93	34.76	21.31	PK
2	5350.000	43.85	54.00	-10.15	22.54	21.31	AV
3	5460.000	55.93	74.00	-18.07	34.27	21.66	PK
4	5460.000	44.12	54.00	-9.88	22.46	21.66	AV
5	5646.500	59.26	68.20	-8.94	37.55	21.71	PK
6	5659.000	59.29	74.88	-15.59	37.59	21.70	PK
7	5783.000	121.11	131.20	-10.09	98.75	22.36	PK
8	5917.000	67.94	74.10	-6.16	45.37	22.57	PK
* 9	5927.500	67.77	68.20	-0.43	45.17	22.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 155,5.775G,BW80M	Humidity (%RH)	58.0

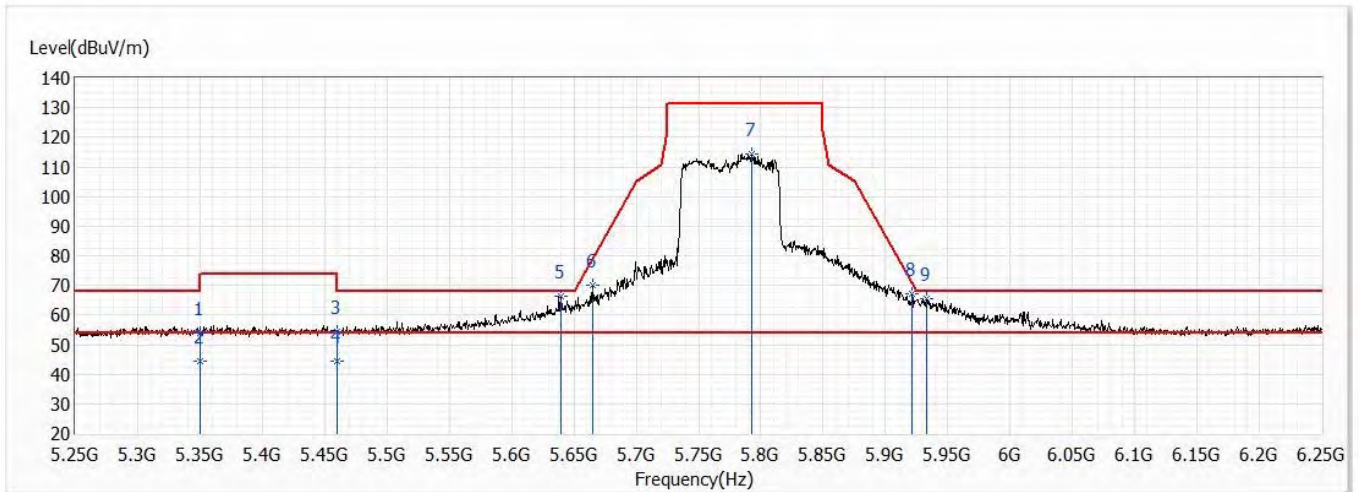


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.12	74.00	-19.88	32.81	21.31	PK
2	5350.000	44.21	54.00	-9.79	22.90	21.31	AV
3	5460.000	54.50	74.00	-19.50	32.84	21.66	PK
4	5460.000	44.35	54.00	-9.65	22.69	21.66	AV
* 5	5639.500	66.17	68.20	-2.03	44.43	21.74	PK
6	5665.000	69.98	79.33	-9.35	48.27	21.71	PK
7	5792.500	114.31	131.20	-16.89	91.94	22.37	PK
8	5921.500	67.15	70.78	-3.63	44.56	22.59	PK
9	5933.000	65.58	68.20	-2.62	42.96	22.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM522U	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/14
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	25.2
Test Condition	BF,802.11ax,Ant0+1+2+3,Ch 155,5.775G,BW80M	Humidity (%RH)	58.0

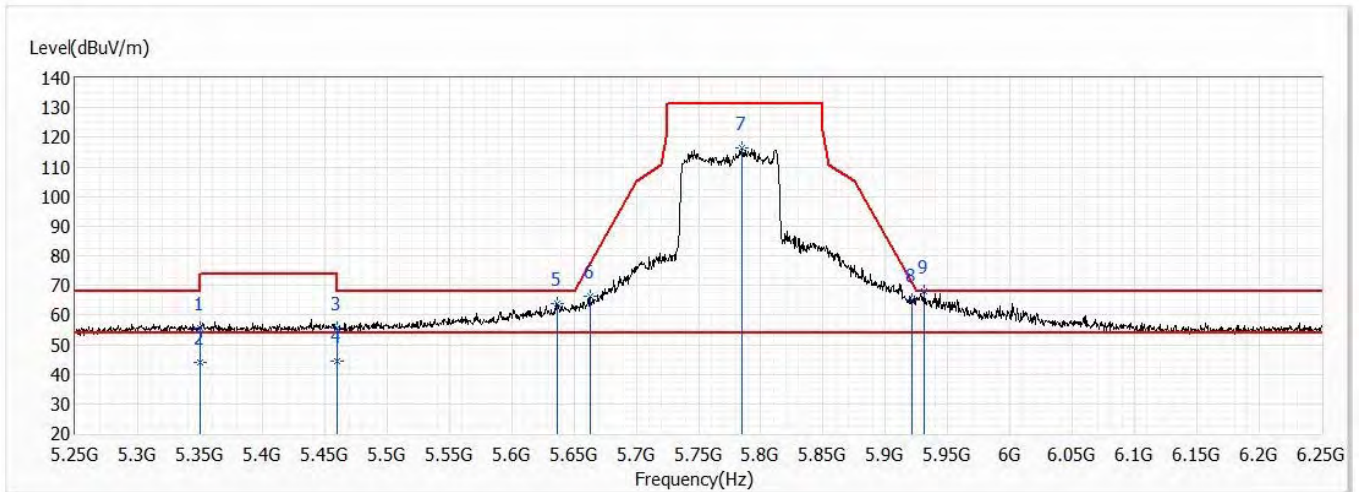

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.59	74.00	-18.41	34.28	21.31	PK
2	5350.000	43.85	54.00	-10.15	22.54	21.31	AV
3	5460.000	55.45	74.00	-18.55	33.79	21.66	PK
4	5460.000	44.26	54.00	-9.74	22.60	21.66	AV
5	5637.000	64.06	68.20	-4.14	42.30	21.76	PK
6	5663.000	66.35	77.85	-11.50	44.64	21.71	PK
7	5784.500	116.50	131.20	-14.70	94.14	22.36	PK
8	5921.500	65.00	70.78	-5.78	42.41	22.59	PK
* 9	5931.500	67.81	68.20	-0.39	45.19	22.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.