


Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 62,5.31G,BW40M	Humidity (%RH)	53.4

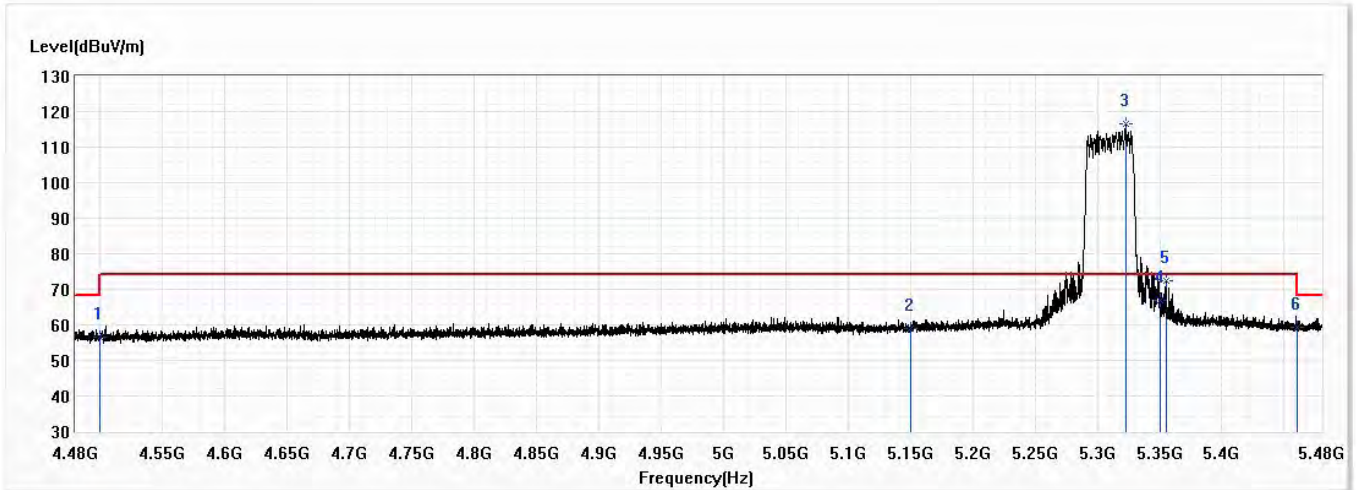


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	56.44	74.00	-17.56	32.77	23.67	PK
2	5150.000	58.85	74.00	-15.15	34.41	24.44	PK
! 3	5322.625	116.68	74.00	42.68	91.94	24.74	PK
4	5350.000	66.99	74.00	-7.01	42.19	24.80	PK
5	5355.125	72.30	74.00	-1.70	47.49	24.81	PK
6	5460.000	59.23	74.00	-14.77	34.24	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 62,5.31G,BW40M	Humidity (%RH)	53.4

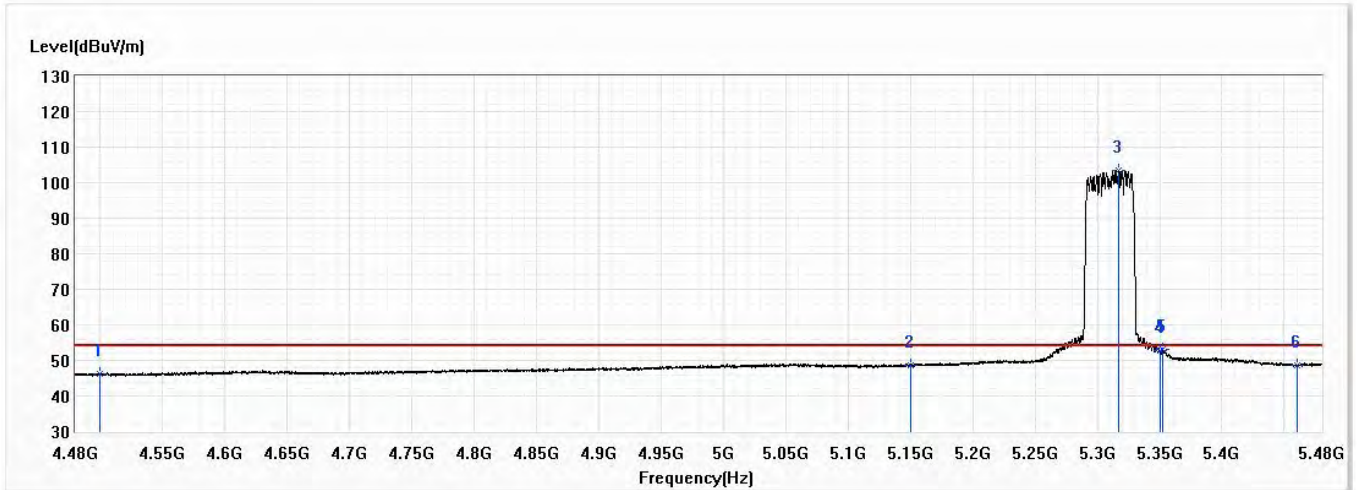


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	46.14	54.00	-7.86	22.47	23.67	AV
2	5150.000	48.70	54.00	-5.30	24.26	24.44	AV
! 3	5317.500	103.57	54.00	49.57	78.83	24.74	AV
4	5350.000	52.80	54.00	-1.20	28.00	24.80	AV
5	5352.500	52.96	54.00	-1.04	28.16	24.80	AV
6	5460.000	48.64	54.00	-5.36	23.65	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 58,5.29G,BW80M	Humidity (%RH)	53.4

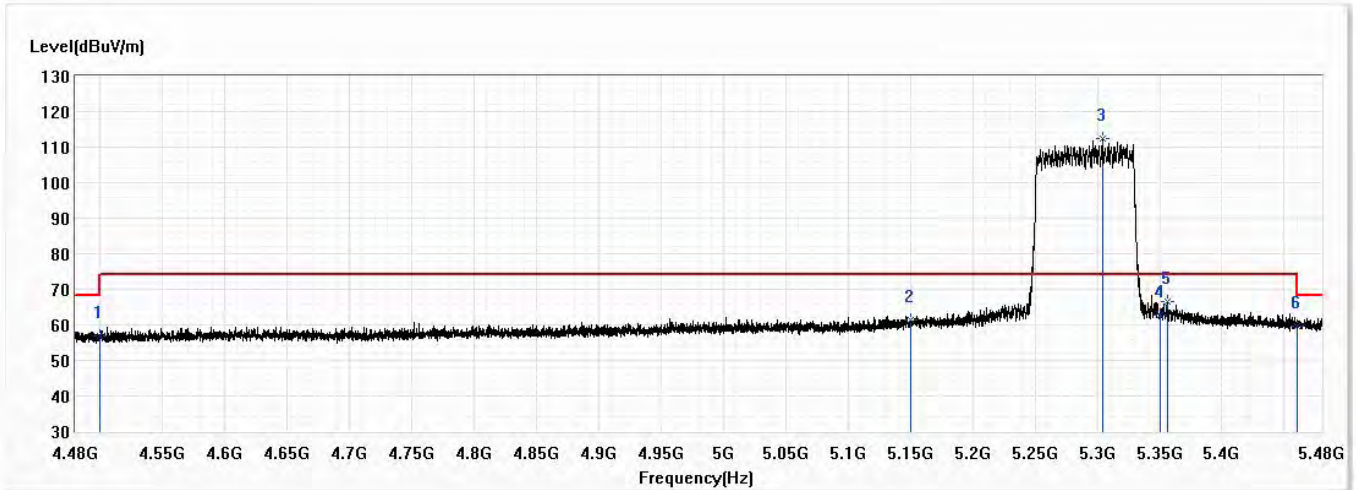


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	56.86	74.00	-17.14	33.19	23.67	PK
2	5150.000	61.48	74.00	-12.52	37.04	24.44	PK
! 3	5304.000	112.30	74.00	38.30	87.59	24.71	PK
4	5350.000	62.72	74.00	-11.28	37.92	24.80	PK
5	5356.125	66.59	74.00	-7.41	41.78	24.81	PK
6	5460.000	59.80	74.00	-14.20	34.81	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 58,5.29G,BW80M	Humidity (%RH)	53.4

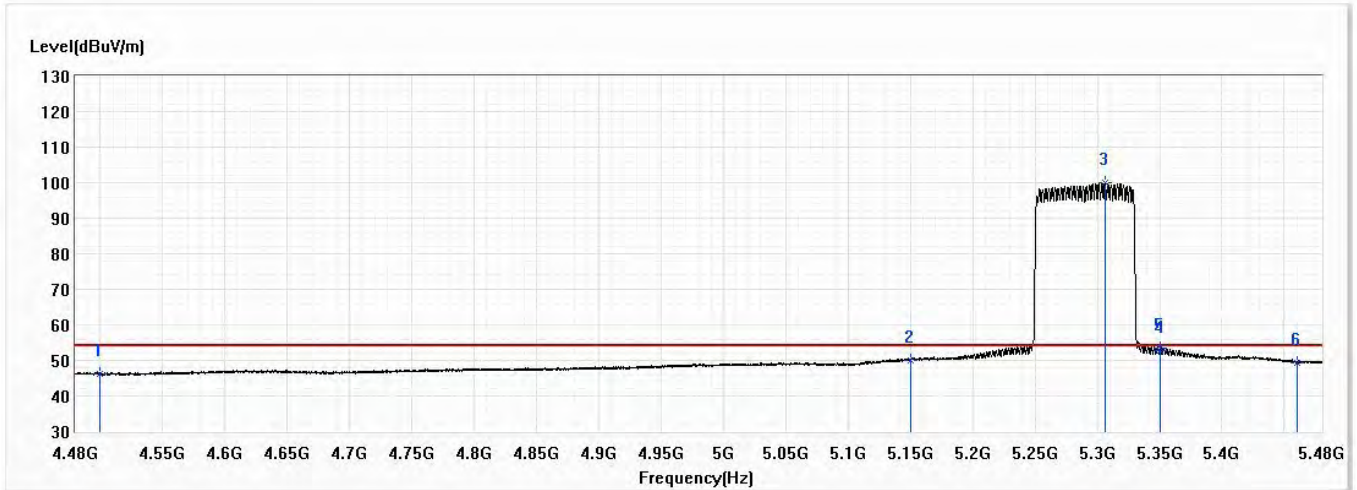


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	46.06	54.00	-7.94	22.39	23.67	AV
2	5150.000	50.11	54.00	-3.89	25.67	24.44	AV
! 3	5306.125	99.83	54.00	45.83	75.11	24.72	AV
4	5350.000	52.76	54.00	-1.24	27.96	24.80	AV
5	5350.750	53.40	54.00	-0.60	28.60	24.80	AV
6	5460.000	49.43	54.00	-4.57	24.44	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 58,5.29G,BW80M	Humidity (%RH)	53.4

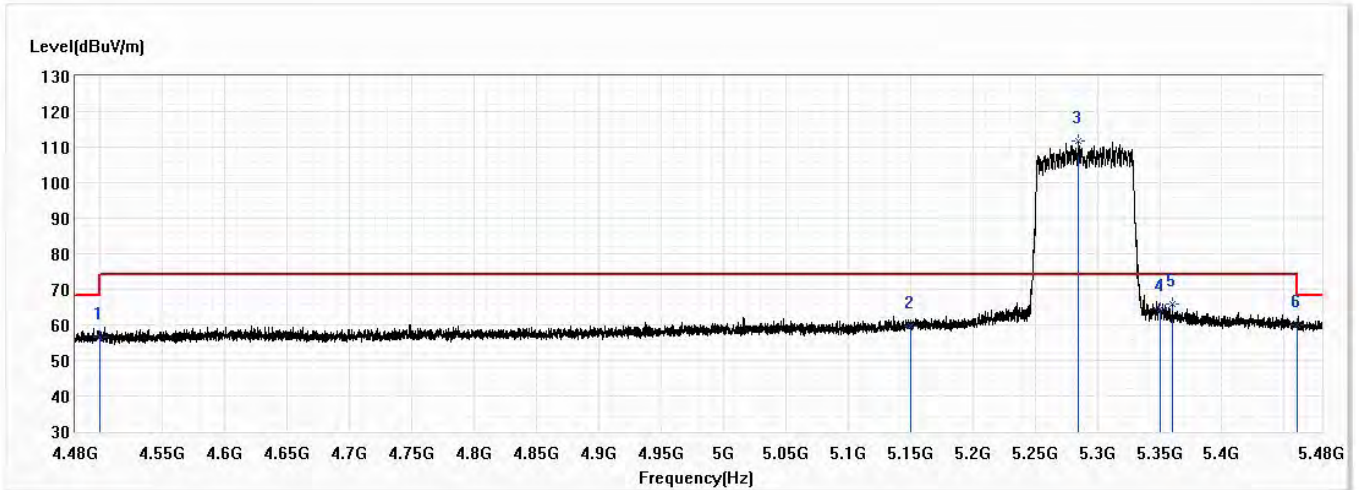


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	56.63	74.00	-17.37	32.96	23.67	PK
2	5150.000	59.51	74.00	-14.49	35.07	24.44	PK
! 3	5284.750	111.78	74.00	37.78	87.10	24.68	PK
4	5350.000	64.63	74.00	-9.37	39.83	24.80	PK
5	5360.000	65.91	74.00	-8.09	41.10	24.81	PK
6	5460.000	60.11	74.00	-13.89	35.12	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 58,5.29G,BW80M	Humidity (%RH)	53.4

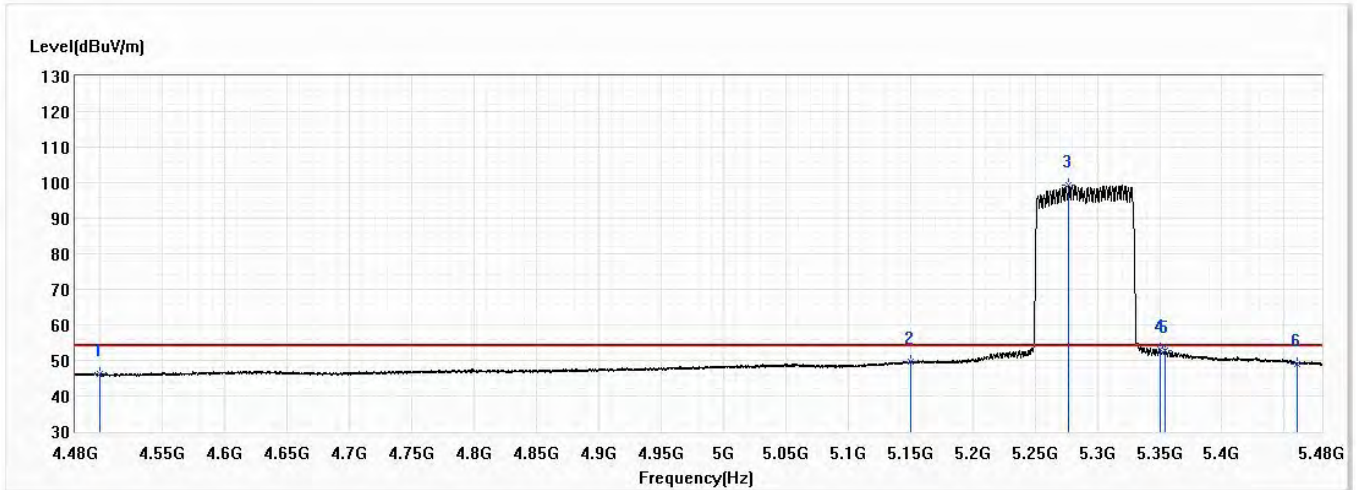


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	46.08	54.00	-7.92	22.41	23.67	AV
2	5150.000	49.50	54.00	-4.50	25.06	24.44	AV
! 3	5277.125	99.23	54.00	45.23	74.55	24.68	AV
4	5350.000	53.03	54.00	-0.97	28.23	24.80	AV
5	5354.750	52.66	54.00	-1.34	27.86	24.80	AV
6	5460.000	49.13	54.00	-4.87	24.14	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/15
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a,Ch 100,5.5G,BW20M	Humidity (%RH)	53.4

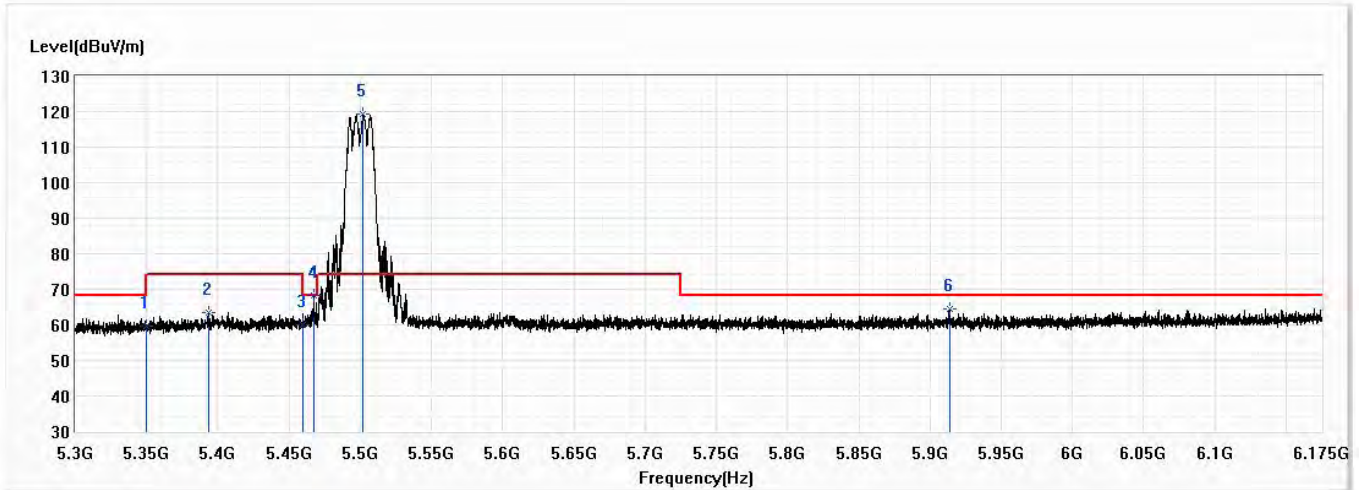


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.67	74.00	-14.33	34.87	24.80	PK
2	5393.953	63.41	74.00	-10.59	38.54	24.87	PK
3	5460.000	60.11	74.00	-13.89	35.12	24.99	PK
4	5467.234	68.11	68.20	-0.09	43.10	25.01	PK
! 5	5502.016	119.32	74.00	45.32	94.25	25.07	PK
6	5913.594	64.35	68.20	-3.85	38.08	26.27	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/15
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a,Ch 100,5.5G,BW20M	Humidity (%RH)	53.4

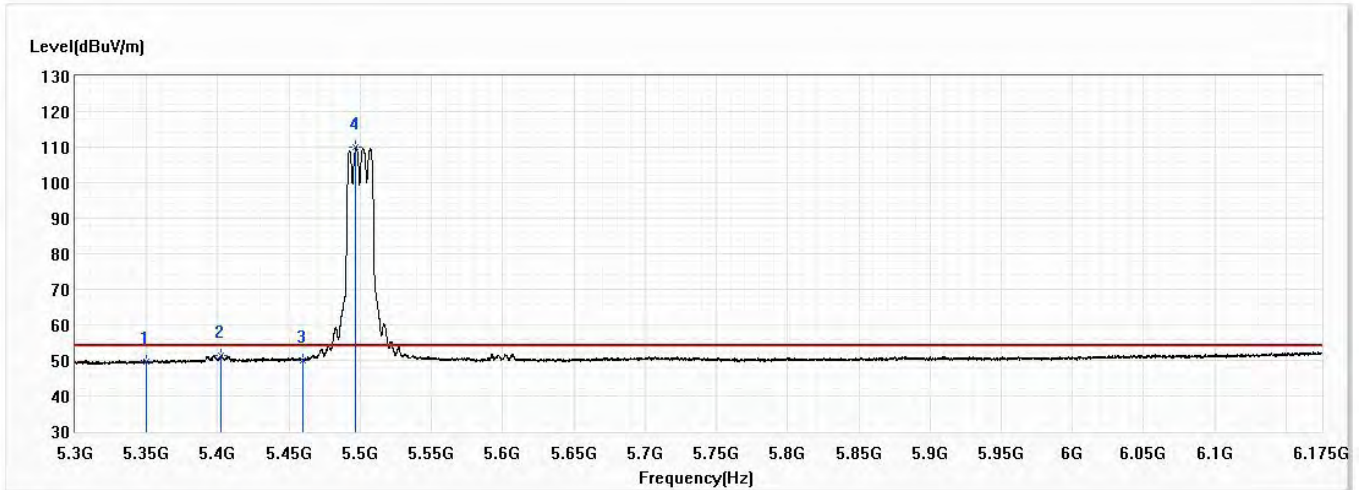


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.68	54.00	-4.32	24.88	24.80	AV
2	5402.047	51.41	54.00	-2.59	26.52	24.89	AV
3	5460.000	50.13	54.00	-3.87	25.14	24.99	AV
! 4	5496.984	109.86	54.00	55.86	84.79	25.07	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/15
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a,Ch 100,5.5G,BW20M	Humidity (%RH)	53.4

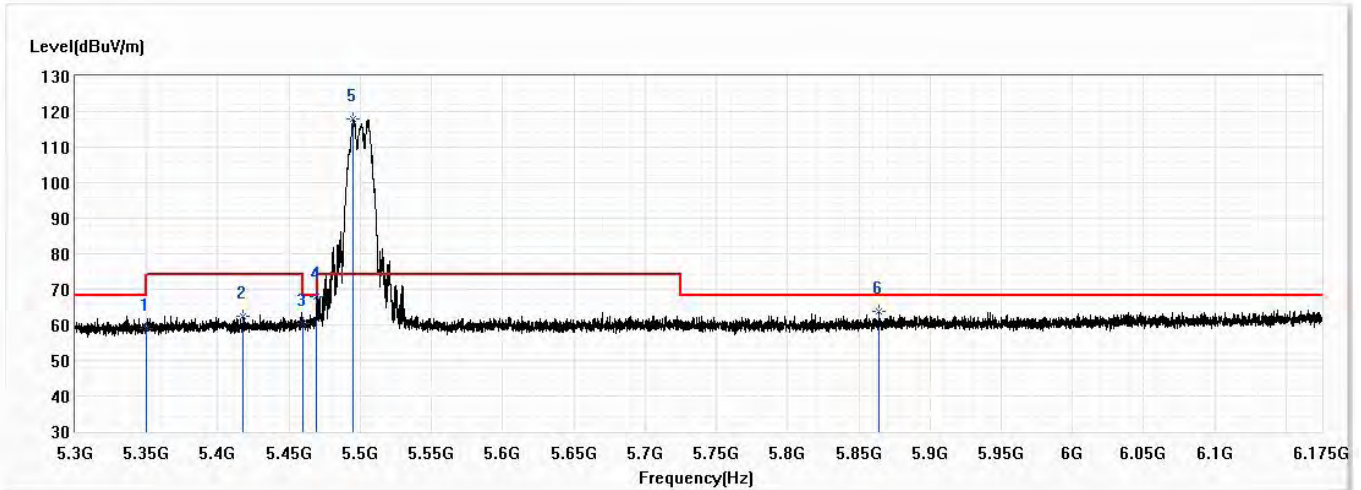


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.90	74.00	-15.10	34.10	24.80	PK
2	5418.016	62.52	74.00	-11.48	37.60	24.92	PK
3	5460.000	60.44	74.00	-13.56	35.45	24.99	PK
4	5469.422	67.97	68.20	-0.23	42.96	25.01	PK
! 5	5495.125	117.90	74.00	43.90	92.84	25.06	PK
6	5864.484	63.88	68.20	-4.32	37.75	26.13	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/15
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a,Ch 100,5.5G,BW20M	Humidity (%RH)	53.4

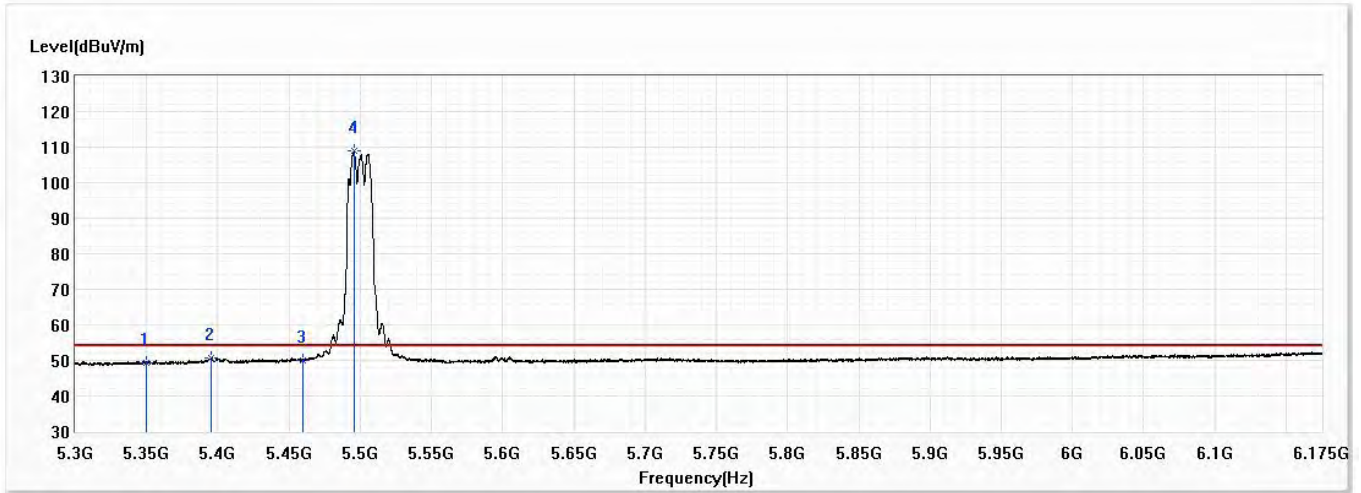


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.32	54.00	-4.68	24.52	24.80	AV
2	5395.047	50.72	54.00	-3.28	25.83	24.89	AV
3	5460.000	50.05	54.00	-3.95	25.06	24.99	AV
! 4	5495.453	108.83	54.00	54.83	83.77	25.06	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/15
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a,Ch 116,5.58G,BW20M	Humidity (%RH)	53.4

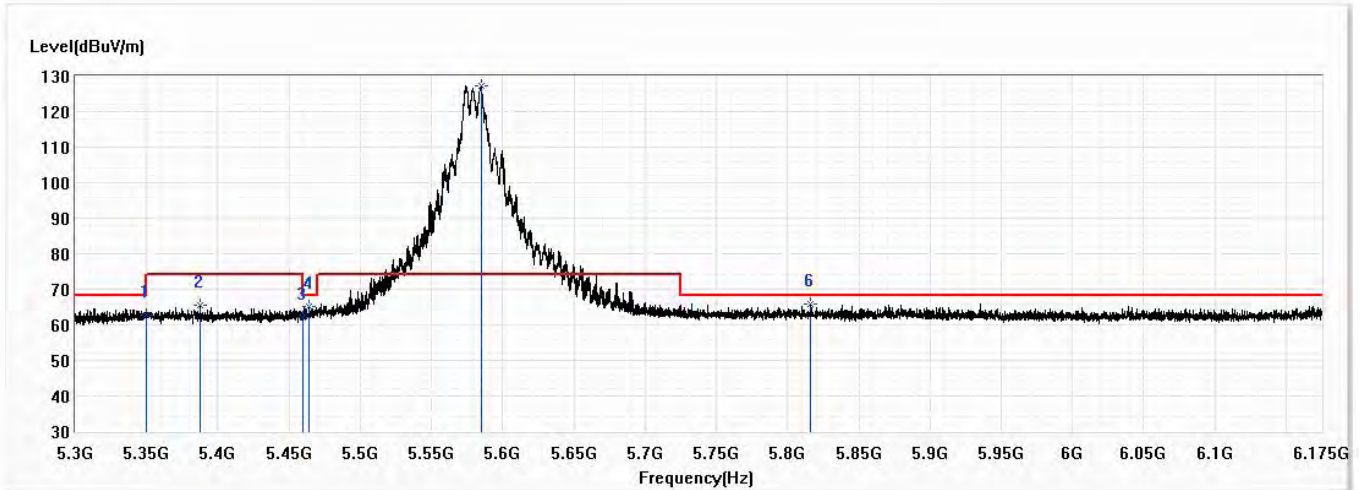


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	62.74	74.00	-11.26	37.94	24.80	PK
2	5387.828	65.54	74.00	-8.46	40.67	24.87	PK
3	5460.000	61.96	74.00	-12.04	36.97	24.99	PK
4	5463.953	65.16	68.20	-3.04	40.16	25.00	PK
! 5	5584.813	127.25	74.00	53.25	101.94	25.31	PK
6	5816.250	65.98	68.20	-2.22	39.99	25.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/15
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a,Ch 116,5.58G,BW20M	Humidity (%RH)	53.4

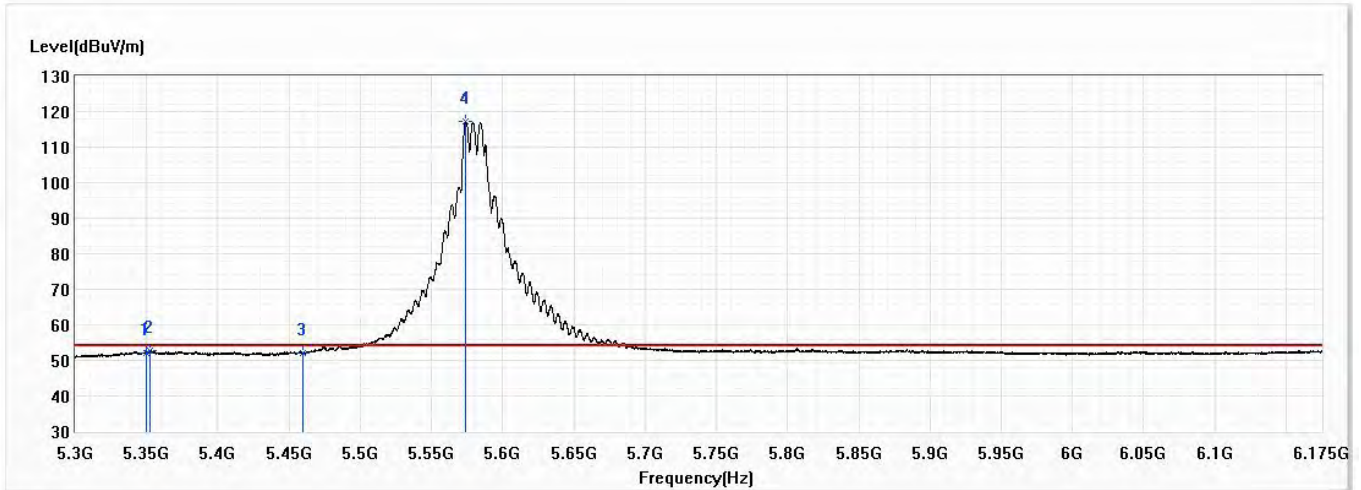


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	52.08	54.00	-1.92	27.28	24.80	AV
2	5352.391	52.76	54.00	-1.24	27.96	24.80	AV
3	5460.000	52.18	54.00	-1.82	27.19	24.99	AV
! 4	5574.203	117.36	54.00	63.36	92.08	25.28	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/15
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a,Ch 116,5.58G,BW20M	Humidity (%RH)	53.4

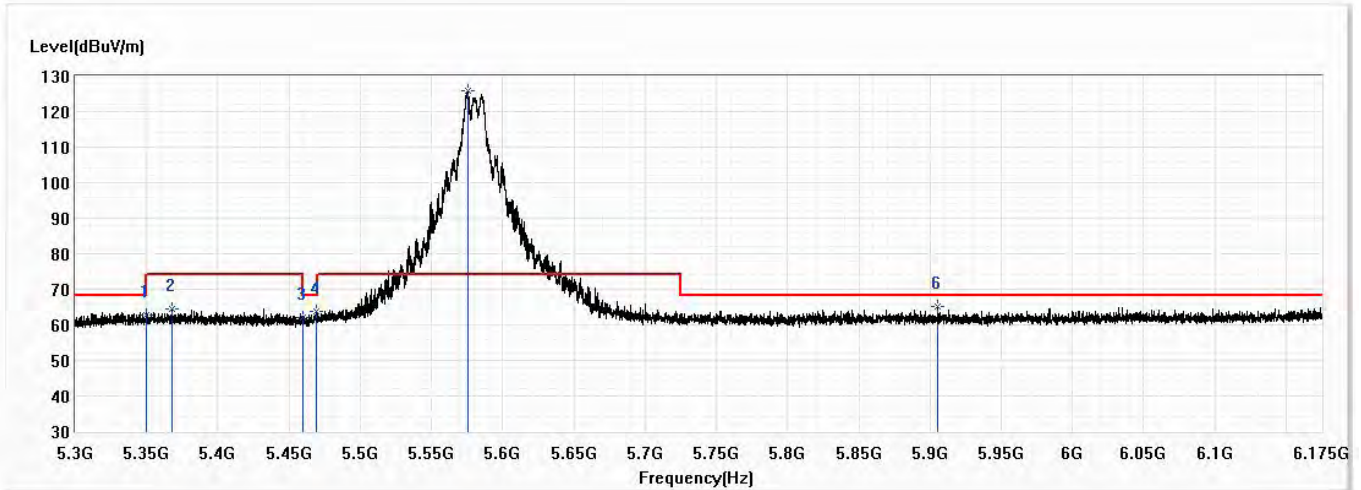


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	62.81	74.00	-11.19	38.01	24.80	PK
2	5367.703	64.46	74.00	-9.54	39.63	24.83	PK
3	5460.000	62.02	74.00	-11.98	37.03	24.99	PK
4	5469.422	63.69	68.20	-4.51	38.68	25.01	PK
! 5	5575.297	126.01	74.00	52.01	100.71	25.30	PK
6	5905.391	65.04	68.20	-3.16	38.80	26.24	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/15
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a,Ch 116,5.58G,BW20M	Humidity (%RH)	53.4

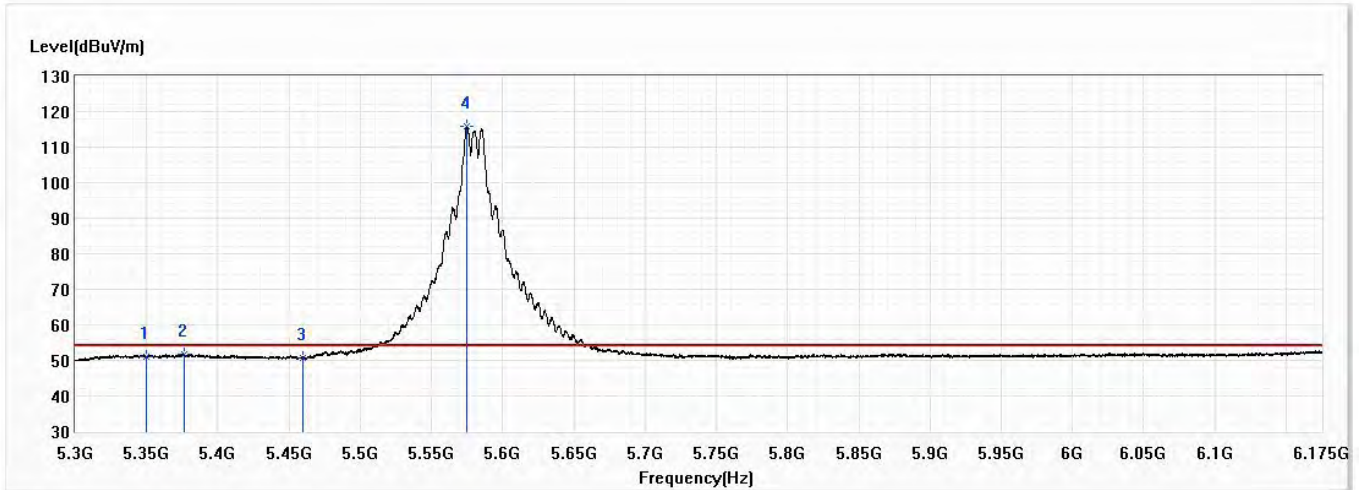


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	51.09	54.00	-2.91	26.29	24.80	AV
2	5376.125	51.80	54.00	-2.20	26.95	24.85	AV
3	5460.000	50.71	54.00	-3.29	25.72	24.99	AV
! 4	5574.969	115.79	54.00	61.79	90.51	25.28	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/16
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a,Ch 140,5.7G,BW20M	Humidity (%RH)	53.4

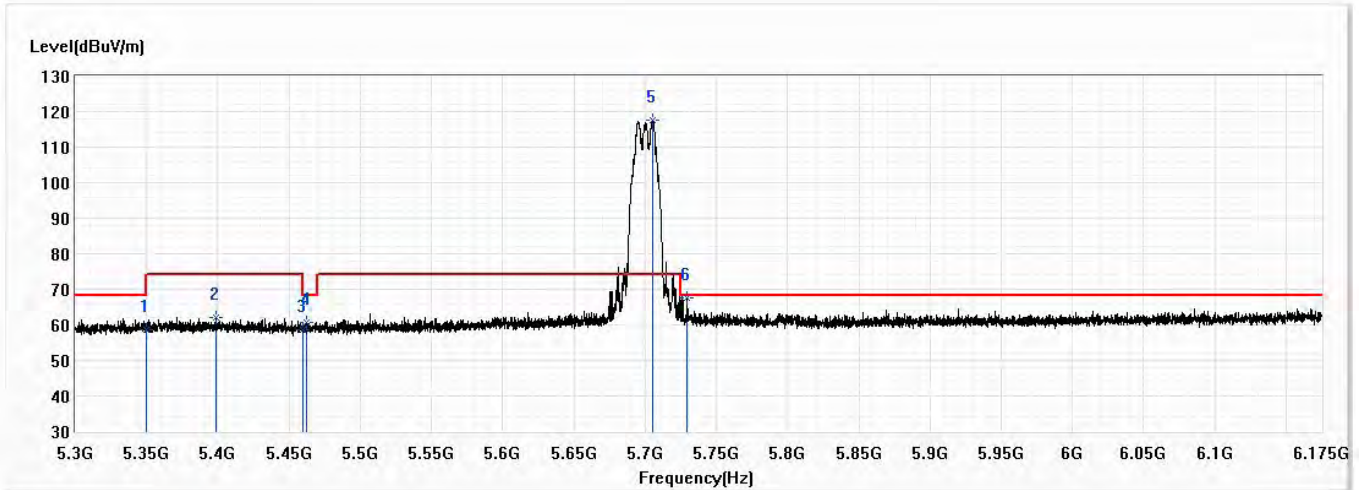


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.58	74.00	-15.42	33.78	24.80	PK
2	5398.328	61.98	74.00	-12.02	37.09	24.89	PK
3	5460.000	58.67	74.00	-15.33	33.68	24.99	PK
4	5461.984	60.83	68.20	-7.37	35.84	24.99	PK
! 5	5705.234	117.72	74.00	43.72	92.06	25.66	PK
6	5729.734	67.57	68.20	-0.63	41.84	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/16
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a,Ch 140,5.7G,BW20M	Humidity (%RH)	53.4

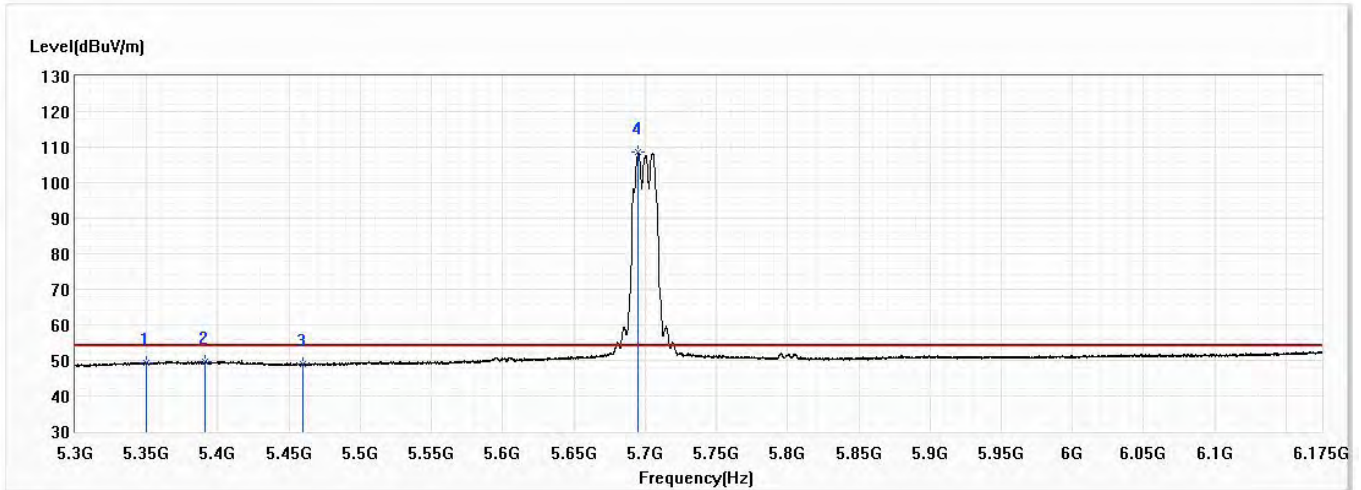


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.30	54.00	-4.70	24.50	24.80	AV
2	5391.328	49.76	54.00	-4.24	24.89	24.87	AV
3	5460.000	49.10	54.00	-4.90	24.11	24.99	AV
! 4	5695.281	108.51	54.00	54.51	82.87	25.64	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/16
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a,Ch 140,5.7G,BW20M	Humidity (%RH)	53.4

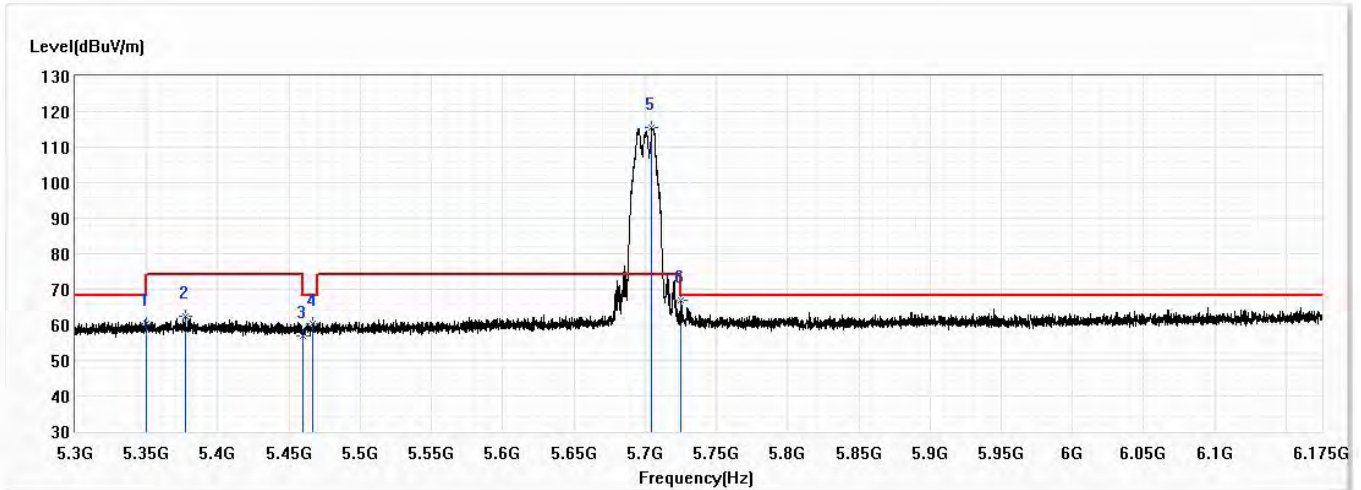


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.33	74.00	-13.67	35.53	24.80	PK
2	5377.000	62.28	74.00	-11.72	37.43	24.85	PK
3	5460.000	56.97	74.00	-17.03	31.98	24.99	PK
4	5466.469	60.45	68.20	-7.75	35.44	25.01	PK
! 5	5704.797	115.62	74.00	41.62	89.96	25.66	PK
6	5724.922	66.76	74.00	-7.24	41.05	25.71	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/16
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a,Ch 140,5.7G,BW20M	Humidity (%RH)	53.4

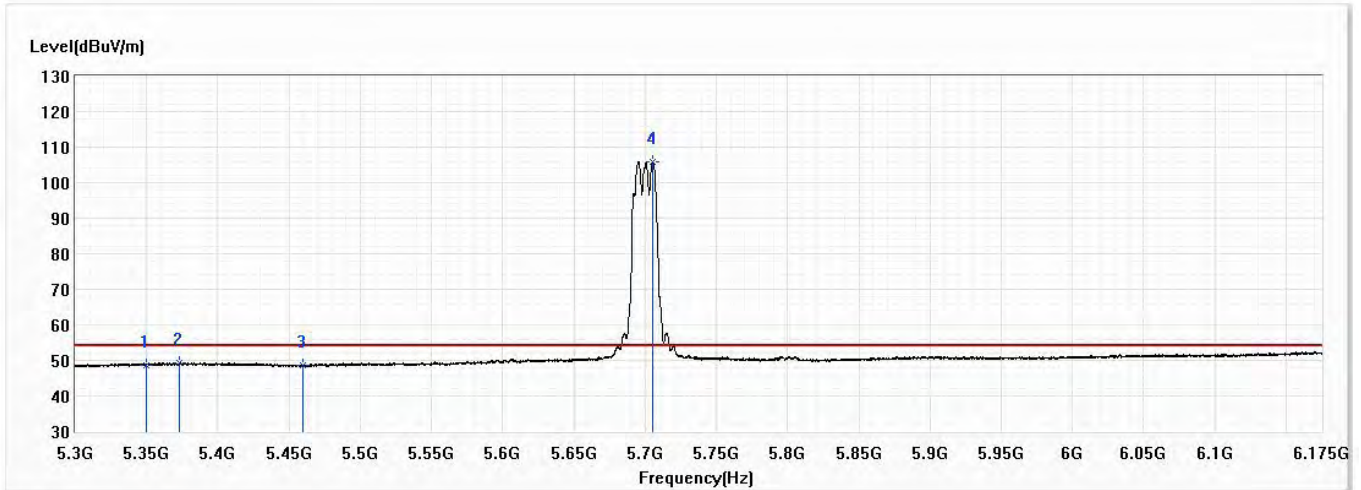


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	48.77	54.00	-5.23	23.97	24.80	AV
2	5372.953	49.42	54.00	-4.58	24.59	24.83	AV
3	5460.000	48.52	54.00	-5.48	23.53	24.99	AV
! 4	5705.125	105.94	54.00	51.94	80.28	25.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 100,5.5G,BW20M	Humidity (%RH)	53.4

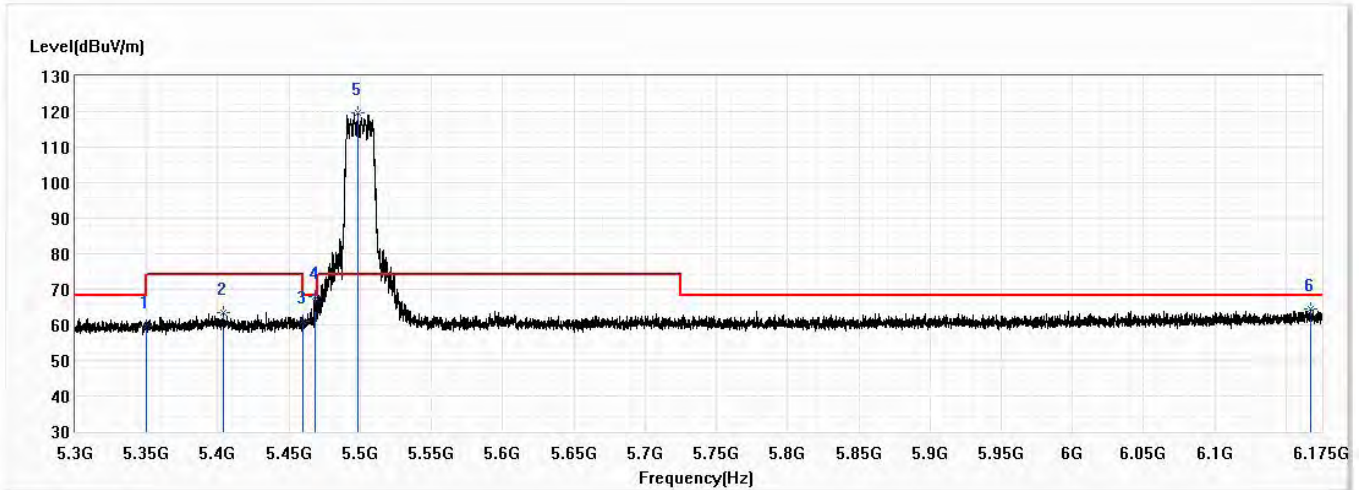


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.73	74.00	-14.27	34.93	24.80	PK
2	5403.797	63.43	74.00	-10.57	38.54	24.89	PK
3	5460.000	61.10	74.00	-12.90	36.11	24.99	PK
4	5467.891	67.77	68.20	-0.43	42.76	25.01	PK
! 5	5498.297	119.58	74.00	45.58	94.51	25.07	PK
6	6167.672	64.45	68.20	-3.75	37.16	27.29	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 100,5.5G,BW20M	Humidity (%RH)	53.4

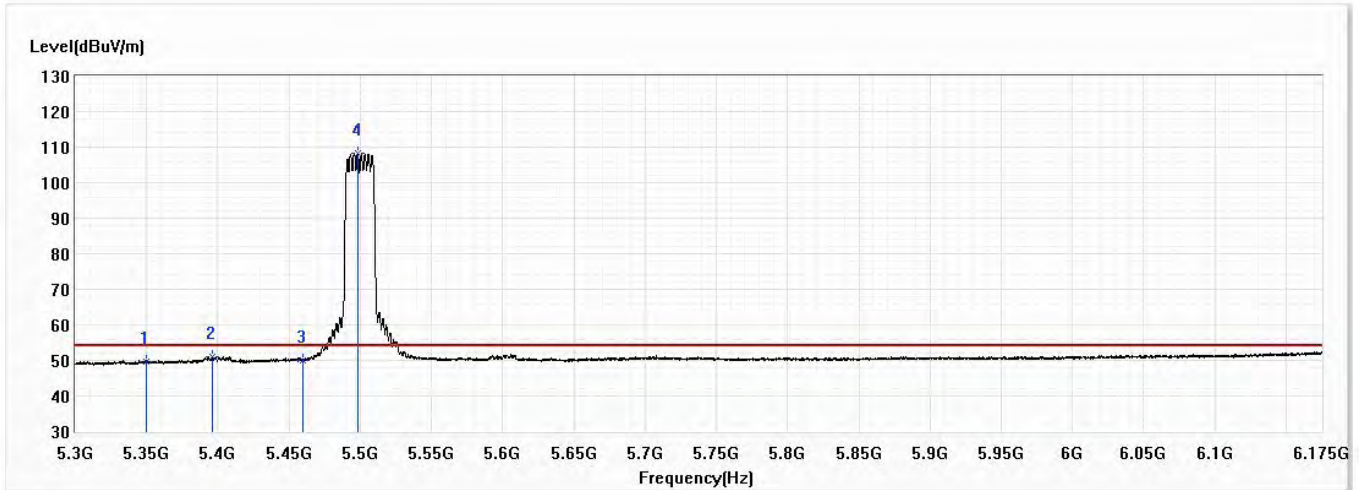


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.50	54.00	-4.50	24.70	24.80	AV
2	5395.922	50.97	54.00	-3.03	26.08	24.89	AV
3	5460.000	50.14	54.00	-3.86	25.15	24.99	AV
! 4	5498.297	108.38	54.00	54.38	83.31	25.07	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 100,5.5G,BW20M	Humidity (%RH)	53.4

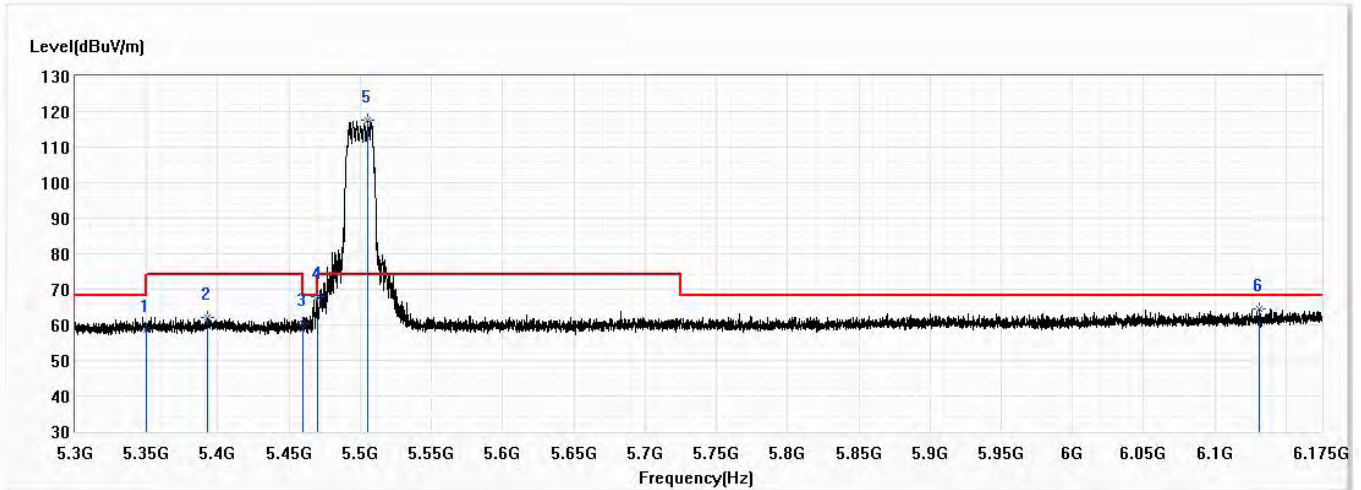


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.75	74.00	-15.25	33.95	24.80	PK
2	5392.641	62.12	74.00	-11.88	37.25	24.87	PK
3	5460.000	60.18	74.00	-13.82	35.19	24.99	PK
4	5469.641	68.07	68.20	-0.13	43.06	25.01	PK
! 5	5505.516	117.53	74.00	43.53	92.45	25.08	PK
6	6131.469	64.48	68.20	-3.72	37.35	27.13	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 100,5.5G,BW20M	Humidity (%RH)	53.4

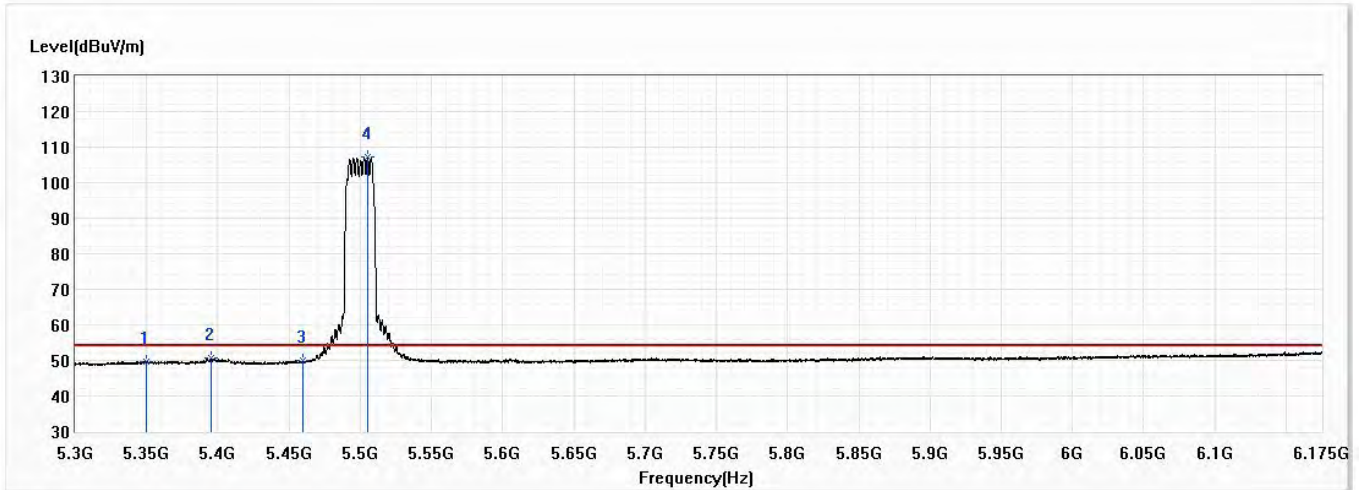


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.60	54.00	-4.40	24.80	24.80	AV
2	5395.156	50.62	54.00	-3.38	25.73	24.89	AV
3	5460.000	49.92	54.00	-4.08	24.93	24.99	AV
! 4	5505.297	107.22	54.00	53.22	82.14	25.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 116,5.58G,BW20M	Humidity (%RH)	53.4

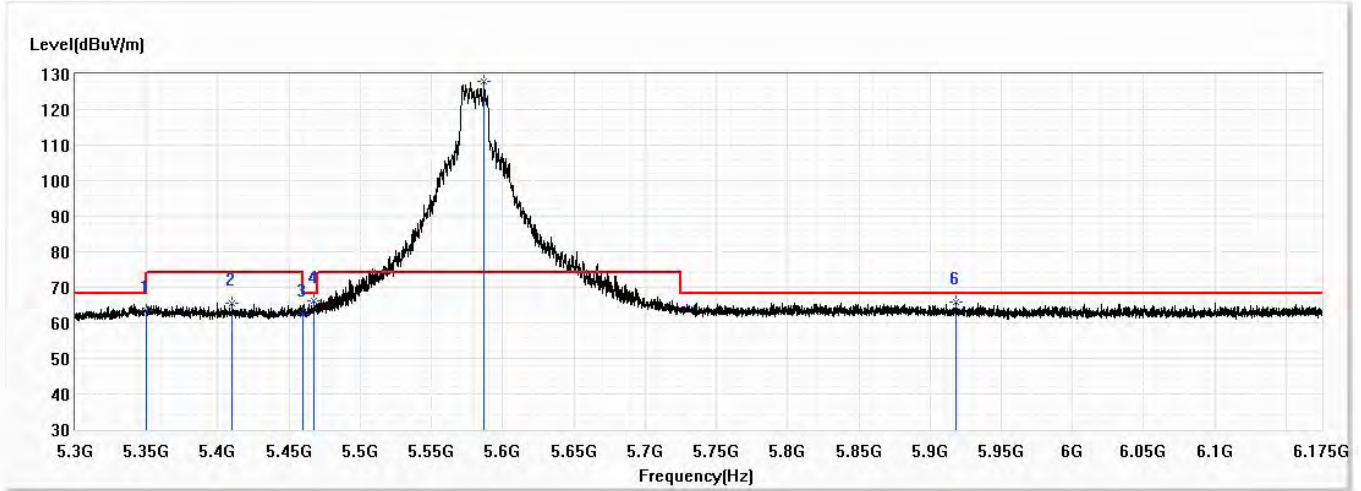


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	63.31	74.00	-10.69	38.51	24.80	PK
2	5410.141	65.55	74.00	-8.45	40.65	24.90	PK
3	5460.000	62.35	74.00	-11.65	37.36	24.99	PK
4	5467.563	66.25	68.20	-1.95	41.24	25.01	PK
! 5	5587.109	127.93	74.00	53.93	102.61	25.32	PK
6	5918.516	65.90	68.20	-2.30	39.62	26.28	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 116,5.58G,BW20M	Humidity (%RH)	53.4

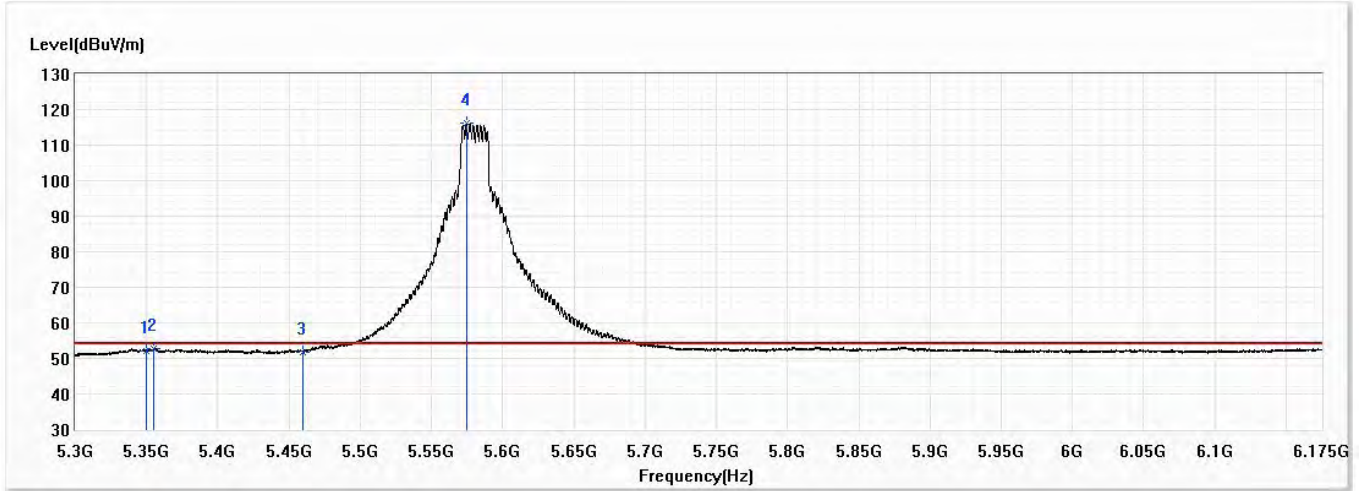


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	52.23	54.00	-1.77	27.43	24.80	AV
2	5354.797	52.63	54.00	-1.37	27.83	24.80	AV
3	5460.000	51.84	54.00	-2.16	26.85	24.99	AV
! 4	5574.422	116.18	54.00	62.18	90.90	25.28	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 116,5.58G,BW20M	Humidity (%RH)	53.4

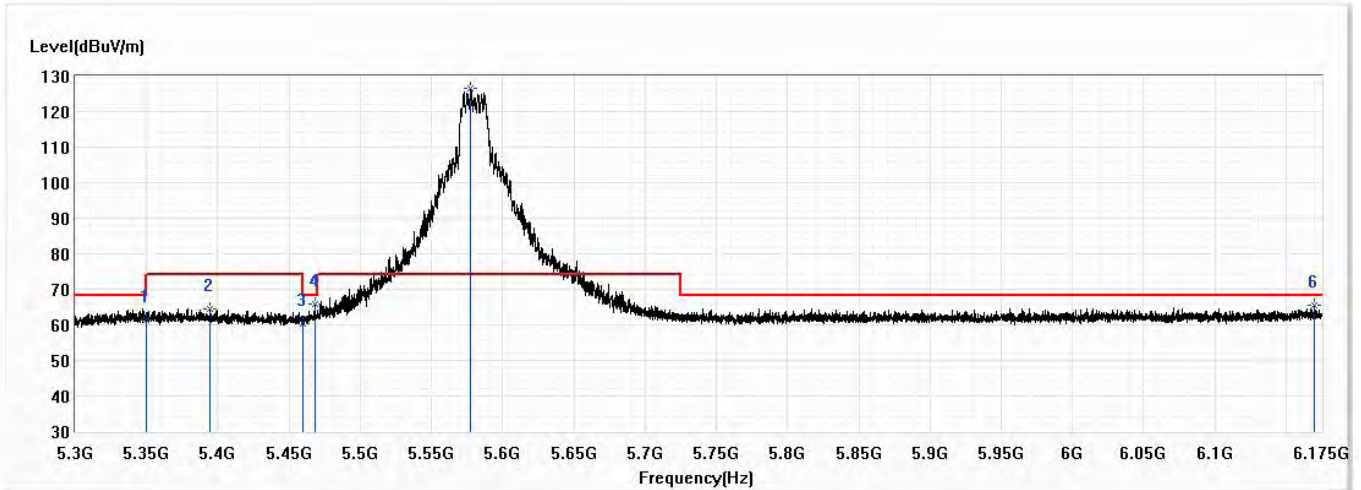


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	61.50	74.00	-12.50	36.70	24.80	PK
2	5394.500	64.48	74.00	-9.52	39.60	24.88	PK
3	5460.000	60.42	74.00	-13.58	35.43	24.99	PK
4	5467.891	65.91	68.20	-2.29	40.90	25.01	PK
! 5	5577.484	126.41	74.00	52.41	101.11	25.30	PK
6	6169.969	65.52	68.20	-2.68	38.22	27.30	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 116,5.58G,BW20M	Humidity (%RH)	53.4

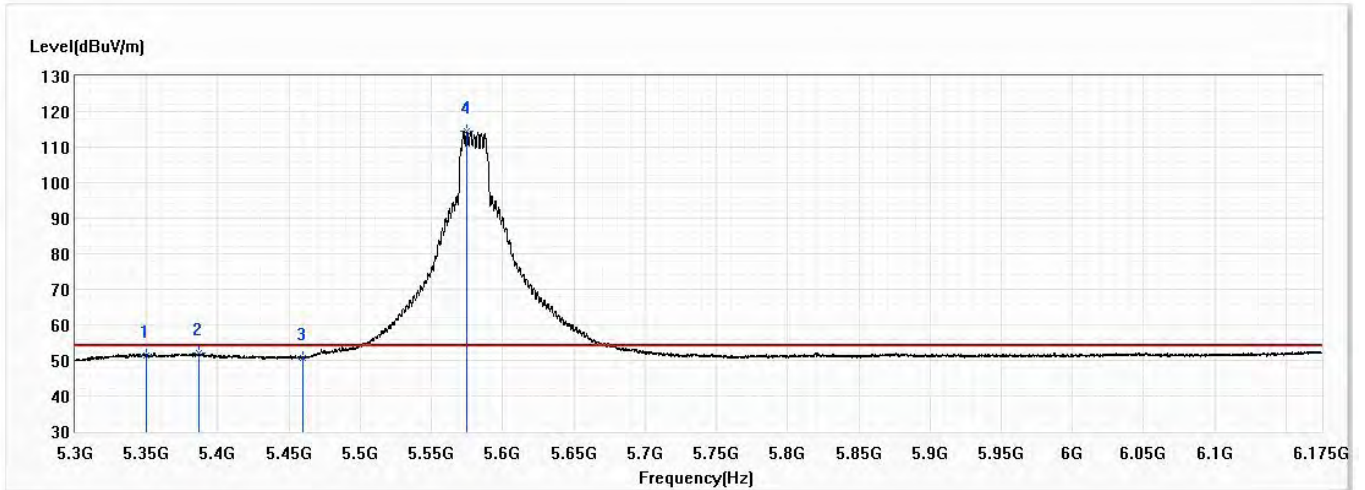


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	51.50	54.00	-2.50	26.70	24.80	AV
2	5386.844	52.03	54.00	-1.97	27.16	24.87	AV
3	5460.000	50.66	54.00	-3.34	25.67	24.99	AV
! 4	5574.969	114.49	54.00	60.49	89.21	25.28	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 140,5.7G,BW20M	Humidity (%RH)	53.4

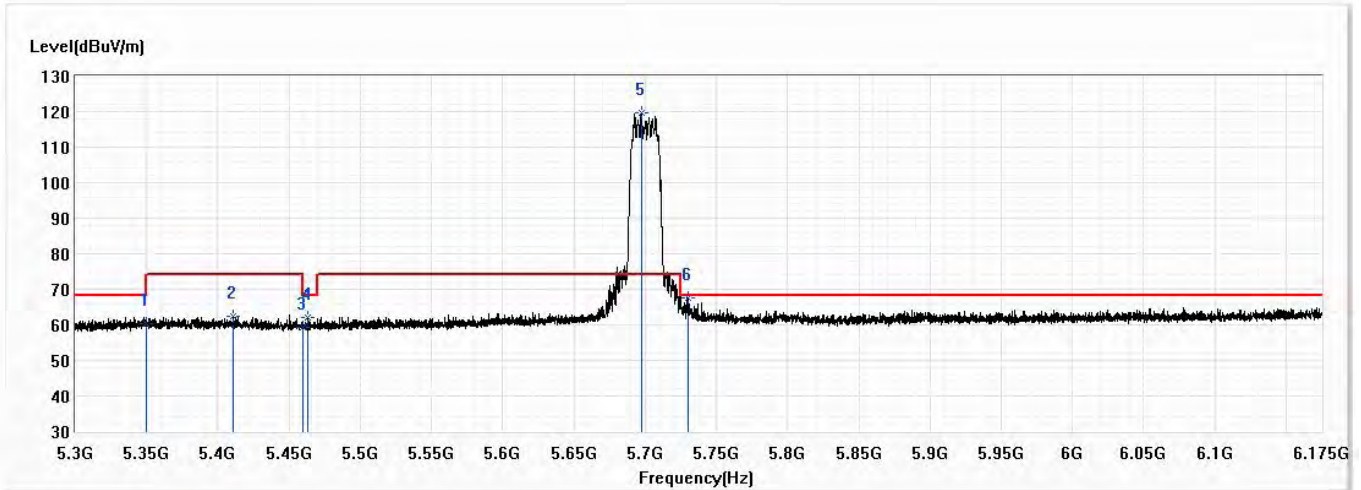


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.23	74.00	-13.77	35.43	24.80	PK
2	5410.688	62.49	74.00	-11.51	37.59	24.90	PK
3	5460.000	59.37	74.00	-14.63	34.38	24.99	PK
4	5462.859	62.23	68.20	-5.97	37.23	25.00	PK
! 5	5697.688	119.78	74.00	45.78	94.13	25.65	PK
6	5729.953	67.73	68.20	-0.47	42.00	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 140,5.7G,BW20M	Humidity (%RH)	53.4

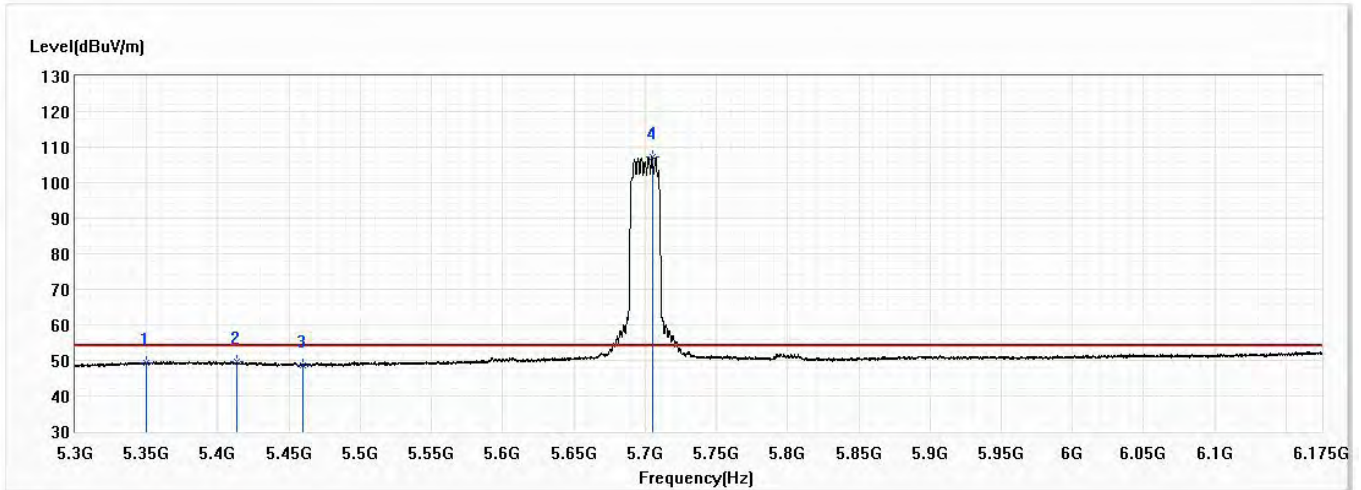


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.46	54.00	-4.54	24.66	24.80	AV
2	5413.641	49.78	54.00	-4.22	24.87	24.91	AV
3	5460.000	48.57	54.00	-5.43	23.58	24.99	AV
! 4	5704.906	107.31	54.00	53.31	81.65	25.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 140,5.7G,BW20M	Humidity (%RH)	53.4

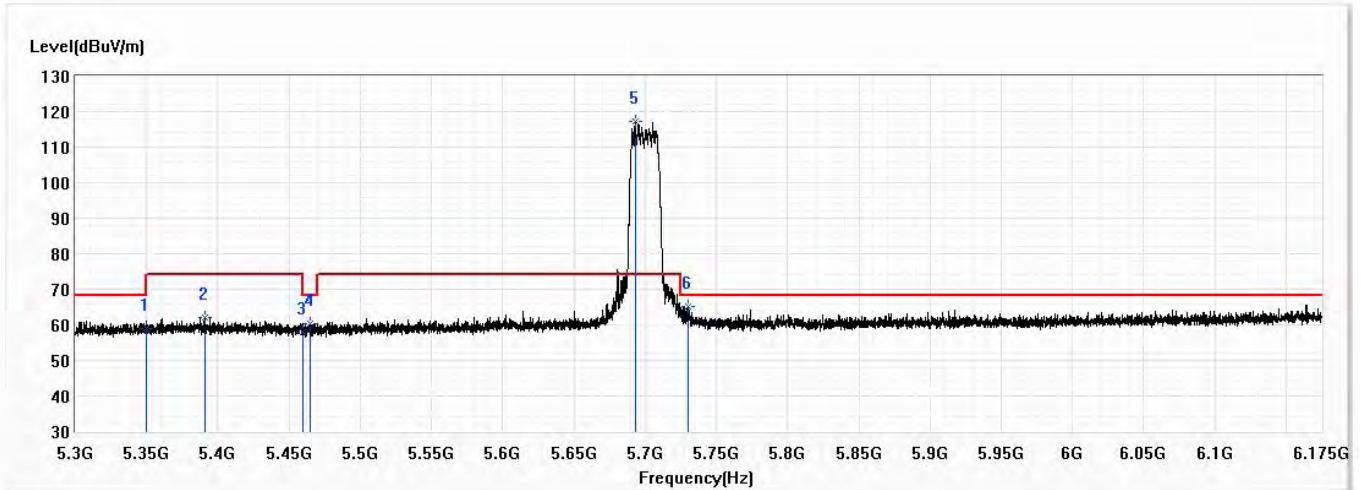


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.91	74.00	-15.09	34.11	24.80	PK
2	5391.219	62.00	74.00	-12.00	37.13	24.87	PK
3	5460.000	57.78	74.00	-16.22	32.79	24.99	PK
4	5465.266	60.50	68.20	-7.70	35.49	25.01	PK
! 5	5692.875	117.36	74.00	43.36	91.72	25.64	PK
6	5729.844	65.16	68.20	-3.04	39.43	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 140,5.7G,BW20M	Humidity (%RH)	53.4

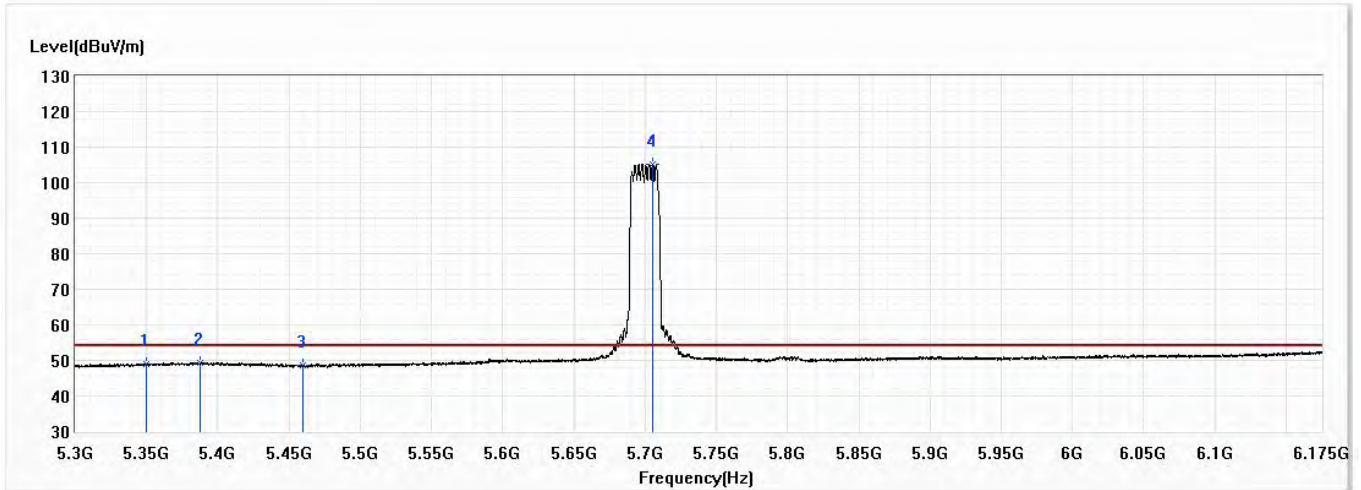


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	48.90	54.00	-5.10	24.10	24.80	AV
2	5387.828	49.38	54.00	-4.62	24.51	24.87	AV
3	5460.000	48.50	54.00	-5.50	23.51	24.99	AV
! 4	5705.344	105.28	54.00	51.28	79.62	25.66	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 102,5.51G,BW40M	Humidity (%RH)	53.4

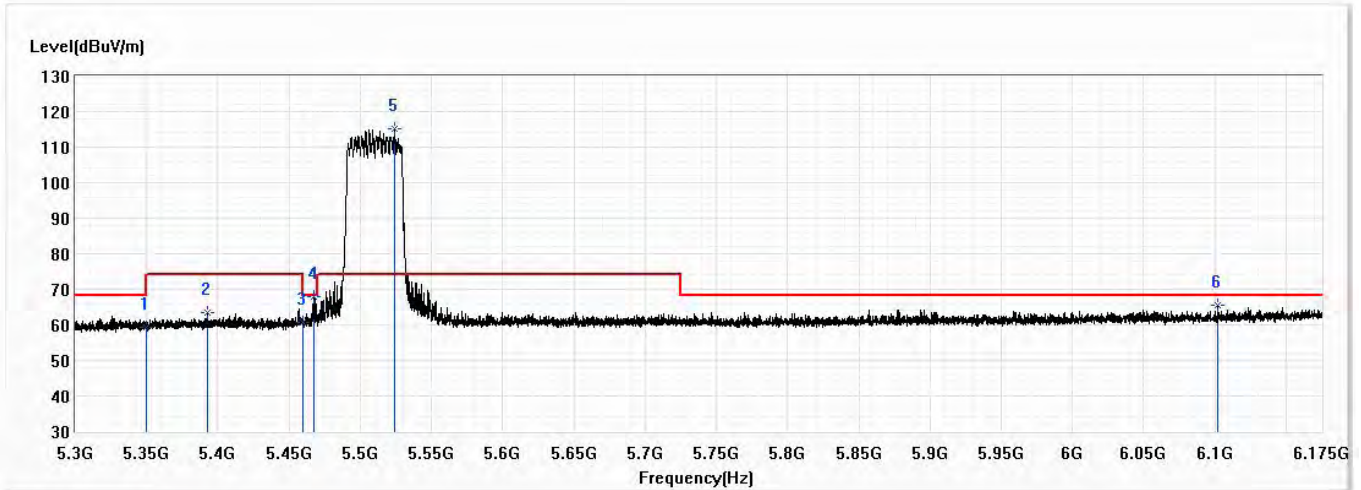


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.19	74.00	-14.81	34.39	24.80	PK
2	5392.969	63.30	74.00	-10.70	38.43	24.87	PK
3	5460.000	60.64	74.00	-13.36	35.65	24.99	PK
4	5467.344	67.83	68.20	-0.37	42.82	25.01	PK
! 5	5524.000	115.23	74.00	41.23	90.10	25.13	PK
6	6101.719	65.52	68.20	-2.68	38.53	26.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 102,5.51G,BW40M	Humidity (%RH)	53.4

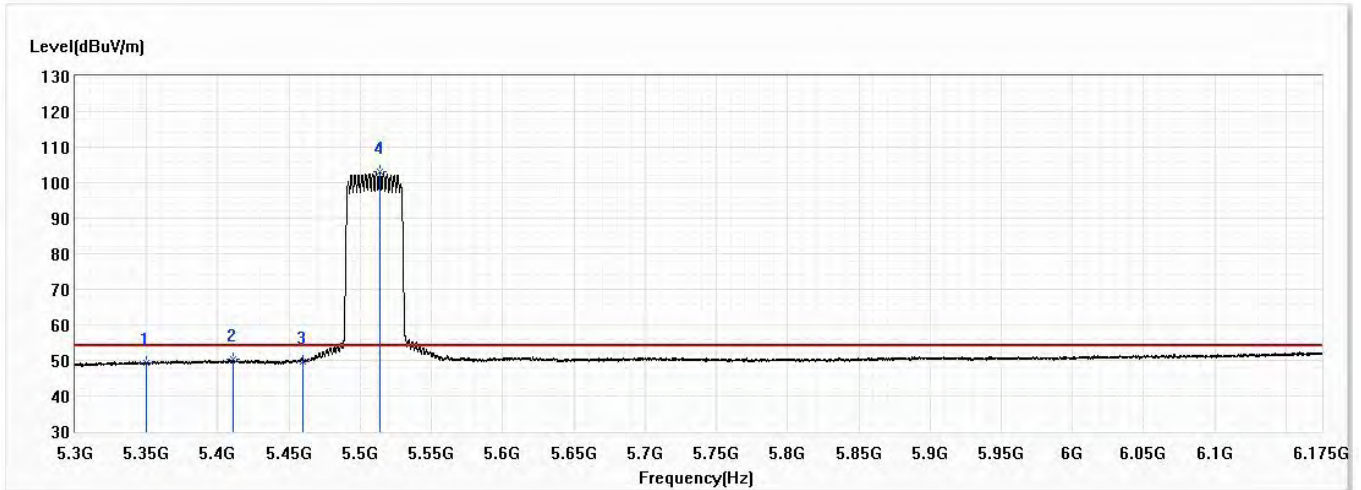


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.27	54.00	-4.73	24.47	24.80	AV
2	5410.906	50.19	54.00	-3.81	25.29	24.90	AV
3	5460.000	49.64	54.00	-4.36	24.65	24.99	AV
! 4	5513.828	102.95	54.00	48.95	77.85	25.10	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 102,5.51G,BW40M	Humidity (%RH)	53.4

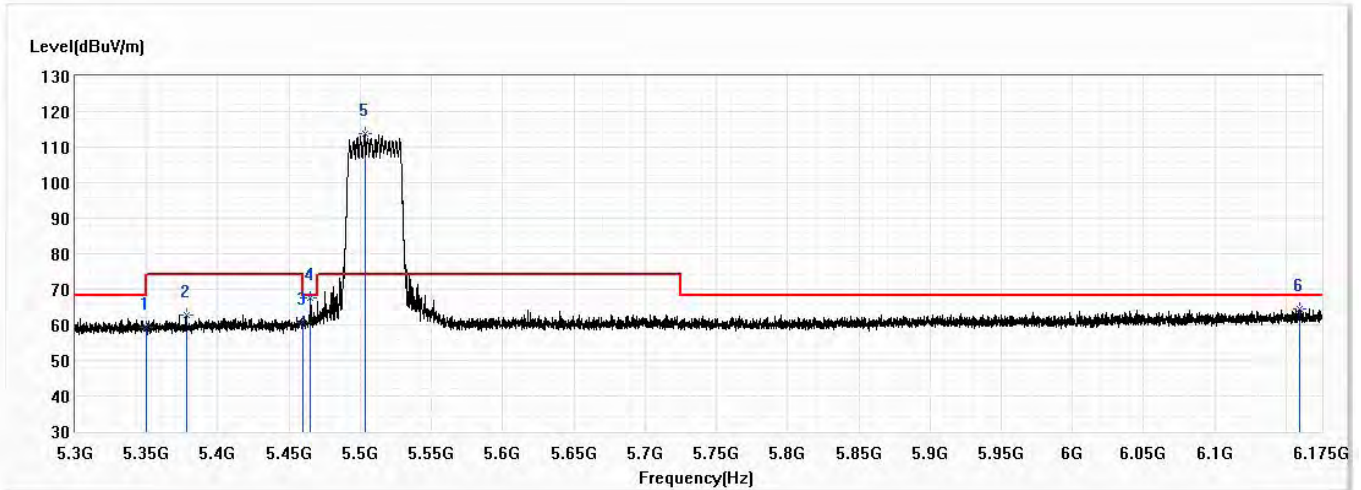


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.24	74.00	-14.76	34.44	24.80	PK
2	5377.766	62.88	74.00	-11.12	38.02	24.86	PK
3	5460.000	60.74	74.00	-13.26	35.75	24.99	PK
4	5465.047	67.72	68.20	-0.48	42.71	25.01	PK
! 5	5503.219	113.66	74.00	39.66	88.58	25.08	PK
6	6159.469	64.49	68.20	-3.71	37.24	27.25	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 102,5.51G,BW40M	Humidity (%RH)	53.4

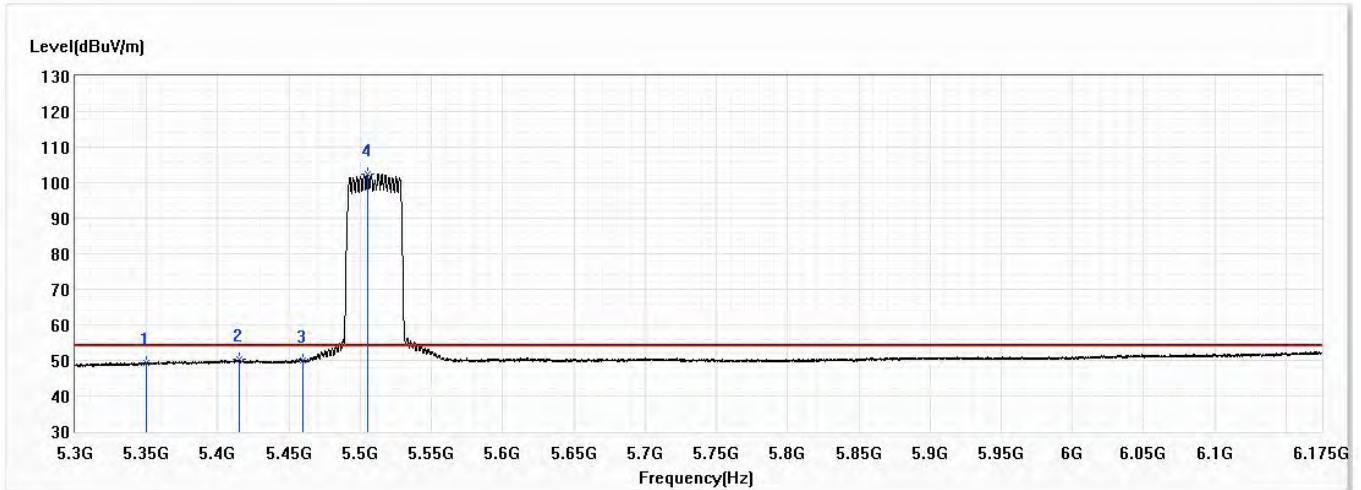


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.15	54.00	-4.85	24.35	24.80	AV
2	5414.844	50.26	54.00	-3.74	25.35	24.91	AV
3	5460.000	49.97	54.00	-4.03	24.98	24.99	AV
! 4	5504.969	102.48	54.00	48.48	77.40	25.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 110,5.55G,BW40M	Humidity (%RH)	53.4

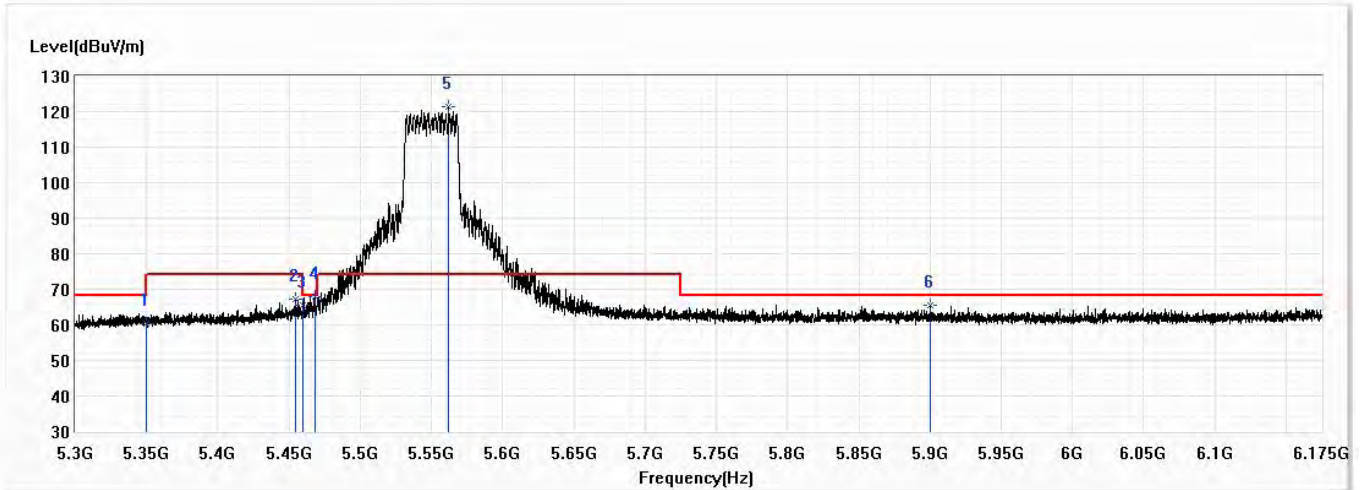


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.46	74.00	-13.54	35.66	24.80	PK
2	5454.438	67.31	74.00	-6.69	42.33	24.98	PK
3	5460.000	65.35	74.00	-8.65	40.36	24.99	PK
4	5468.219	68.05	68.20	-0.15	43.04	25.01	PK
! 5	5562.281	121.44	74.00	47.44	96.19	25.25	PK
6	5900.578	65.44	68.20	-2.76	39.21	26.23	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 110,5.55G,BW40M	Humidity (%RH)	53.4

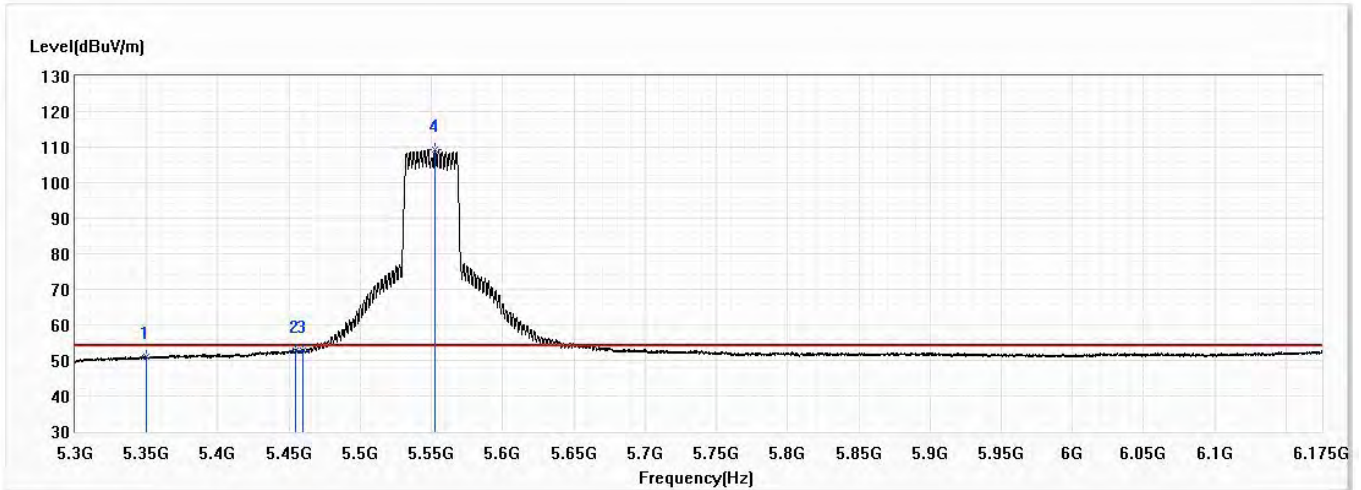


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	51.06	54.00	-2.94	26.26	24.80	AV
2	5454.875	52.88	54.00	-1.12	27.90	24.98	AV
3	5460.000	52.80	54.00	-1.20	27.81	24.99	AV
! 4	5552.438	109.27	54.00	55.27	84.06	25.21	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 110,5.55G,BW40M	Humidity (%RH)	53.4

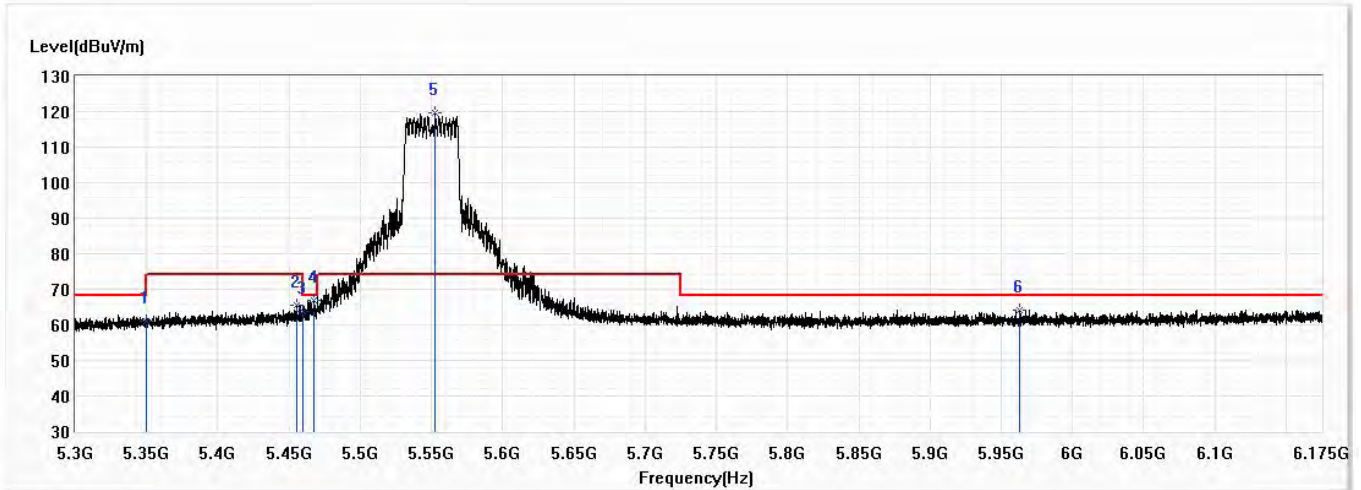


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	61.18	74.00	-12.82	36.38	24.80	PK
2	5455.094	65.56	74.00	-8.44	40.57	24.99	PK
3	5460.000	63.79	74.00	-10.21	38.80	24.99	PK
4	5467.344	66.90	68.20	-1.30	41.89	25.01	PK
! 5	5552.766	119.56	74.00	45.56	94.35	25.21	PK
6	5962.813	64.23	68.20	-3.97	37.82	26.41	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 110,5.55G,BW40M	Humidity (%RH)	53.4

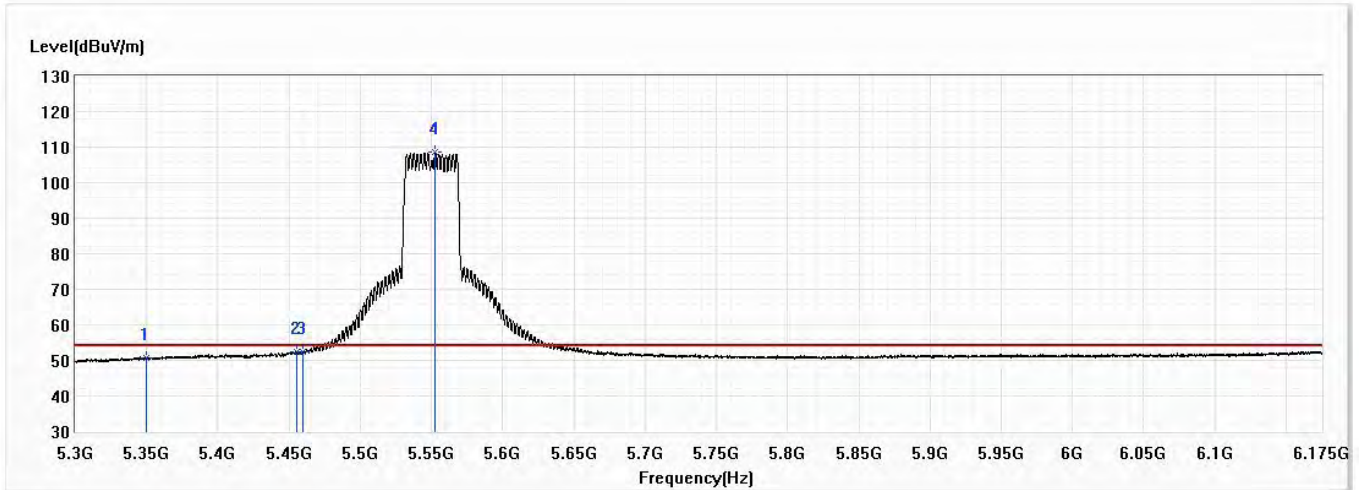


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	50.60	54.00	-3.40	25.80	24.80	AV
2	5455.531	52.42	54.00	-1.58	27.43	24.99	AV
3	5460.000	52.34	54.00	-1.66	27.35	24.99	AV
! 4	5552.656	108.69	54.00	54.69	83.48	25.21	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 134,5.67G,BW40M	Humidity (%RH)	53.4

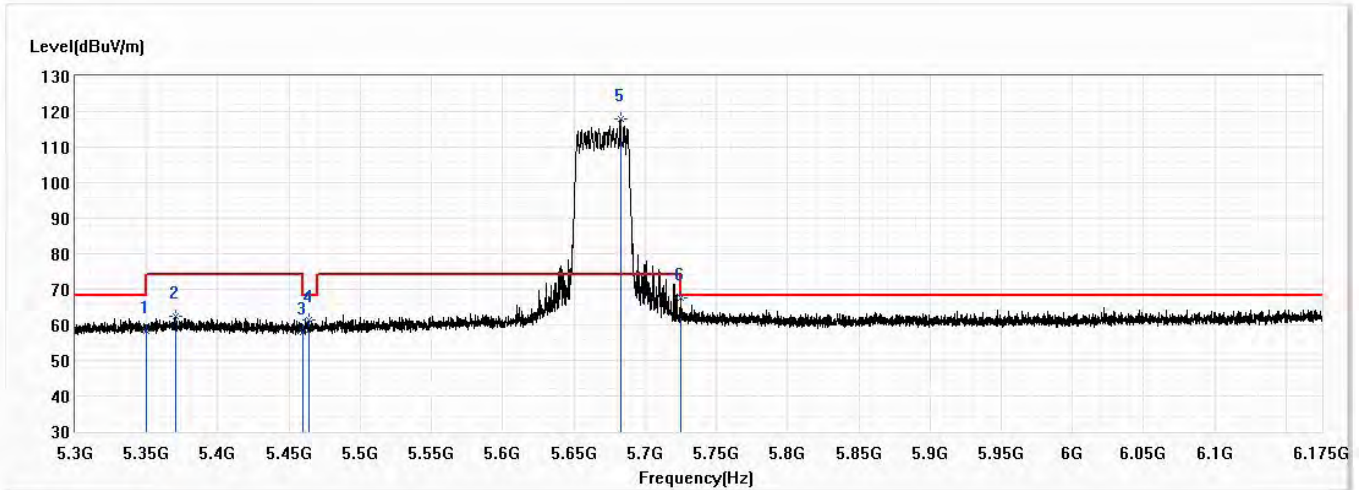


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.21	74.00	-15.79	33.41	24.80	PK
2	5370.656	62.45	74.00	-11.55	37.62	24.83	PK
3	5460.000	58.06	74.00	-15.94	33.07	24.99	PK
4	5464.172	61.51	68.20	-6.69	36.51	25.00	PK
! 5	5682.594	117.95	74.00	43.95	92.35	25.60	PK
6	5725.359	67.62	68.20	-0.58	41.89	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 134,5.67G,BW40M	Humidity (%RH)	53.4

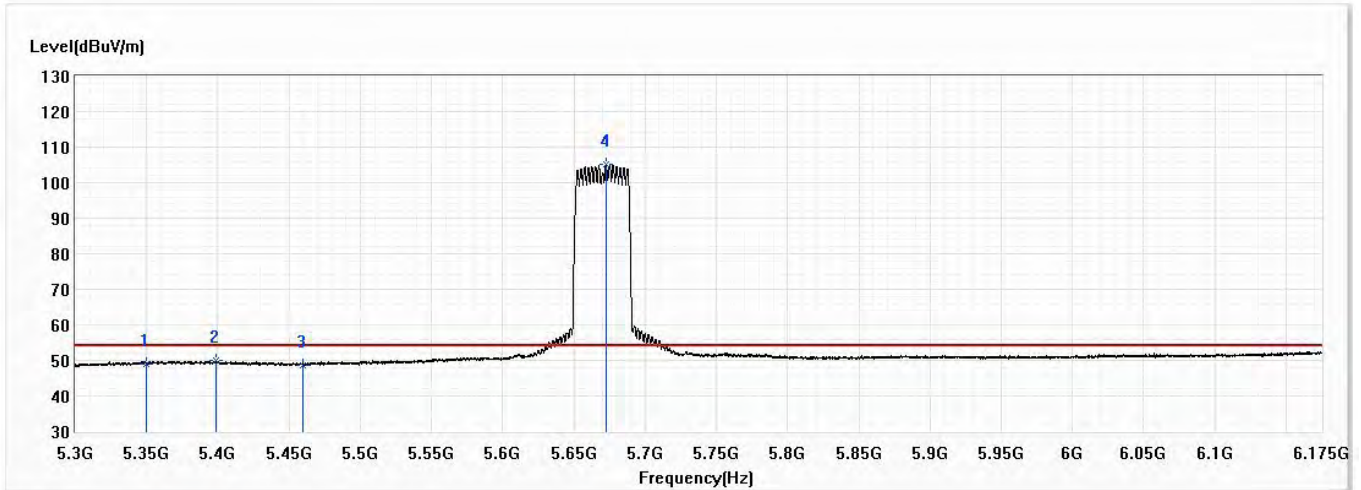


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.07	54.00	-4.93	24.27	24.80	AV
2	5398.875	49.88	54.00	-4.12	24.99	24.89	AV
3	5460.000	48.76	54.00	-5.24	23.77	24.99	AV
! 4	5672.750	105.34	54.00	51.34	79.77	25.57	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 134,5.67G,BW40M	Humidity (%RH)	53.4

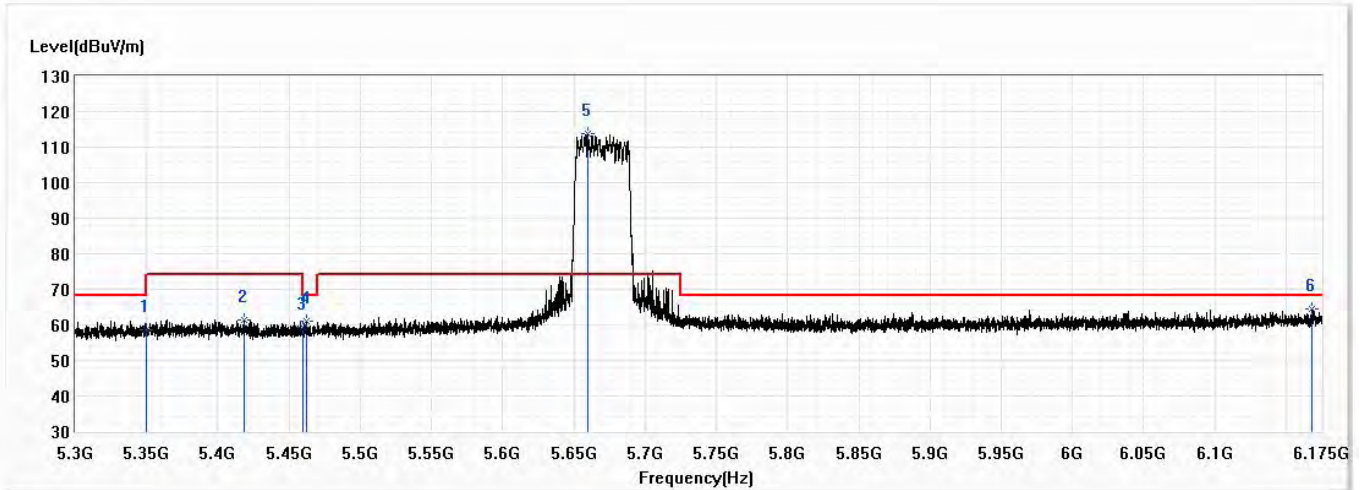


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.50	74.00	-15.50	33.70	24.80	PK
2	5418.453	61.40	74.00	-12.60	36.48	24.92	PK
3	5460.000	59.14	74.00	-14.86	34.15	24.99	PK
4	5462.531	60.91	68.20	-7.29	35.91	25.00	PK
! 5	5660.063	113.96	74.00	39.96	88.42	25.54	PK
6	6167.781	64.60	68.20	-3.60	37.31	27.29	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 134,5.67G,BW40M	Humidity (%RH)	53.4

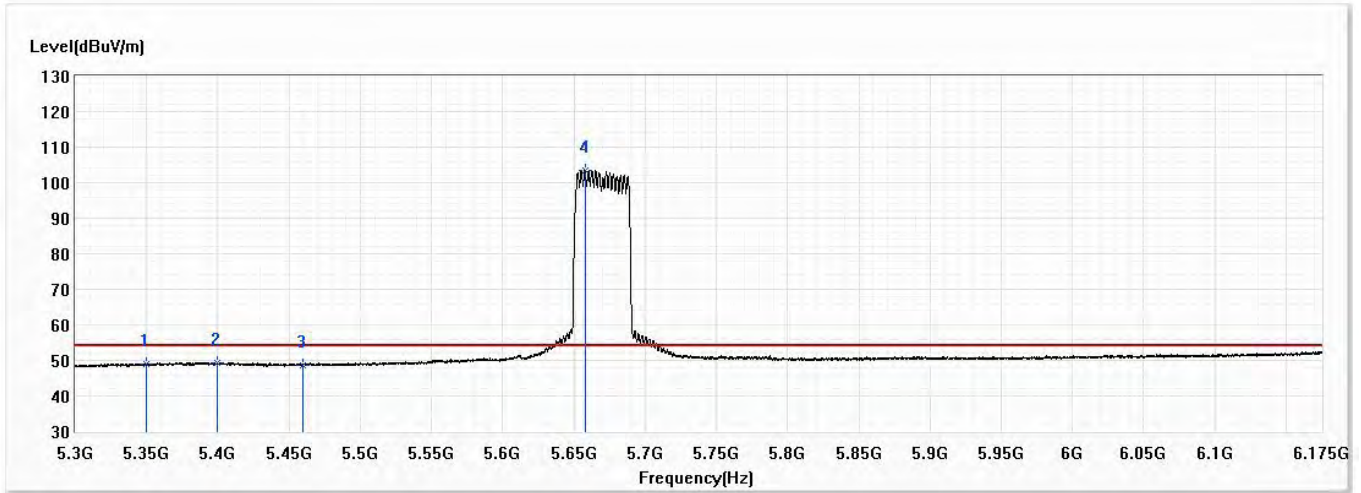


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	48.85	54.00	-5.15	24.05	24.80	AV
2	5399.641	49.43	54.00	-4.57	24.54	24.89	AV
3	5460.000	48.72	54.00	-5.28	23.73	24.99	AV
! 4	5657.656	103.59	54.00	49.59	78.07	25.52	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 106,5.53G,BW80M	Humidity (%RH)	53.4

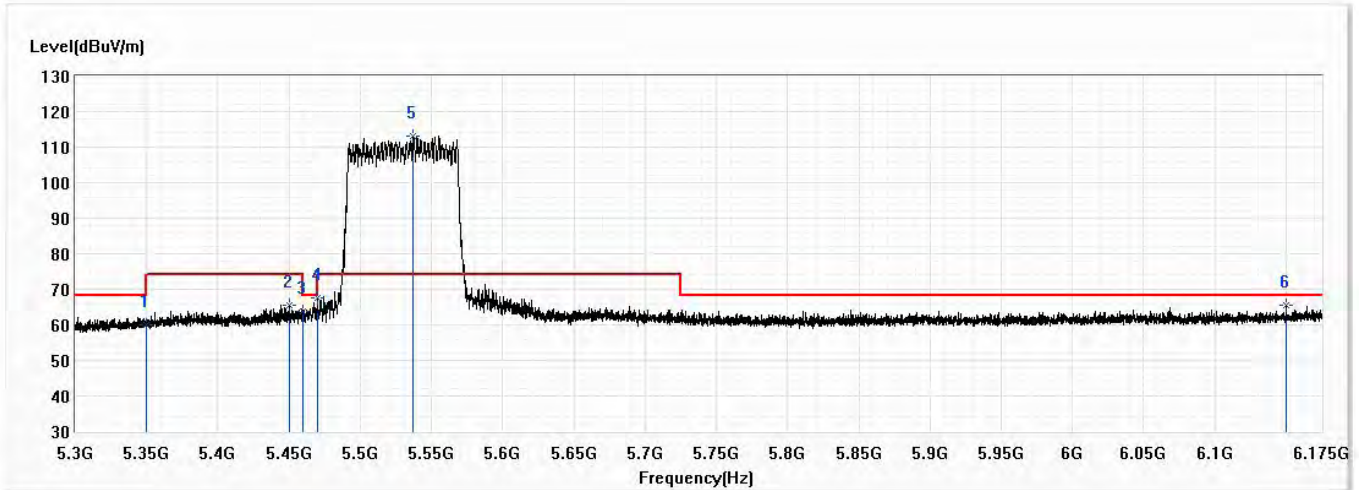


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.15	74.00	-13.85	35.35	24.80	PK
2	5449.844	65.66	74.00	-8.34	40.68	24.98	PK
3	5460.000	63.88	74.00	-10.12	38.89	24.99	PK
4	5469.859	67.55	68.20	-0.65	42.54	25.01	PK
! 5	5537.234	112.99	74.00	38.99	87.81	25.18	PK
6	6150.391	65.52	68.20	-2.68	38.31	27.21	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 106,5.53G,BW80M	Humidity (%RH)	53.4

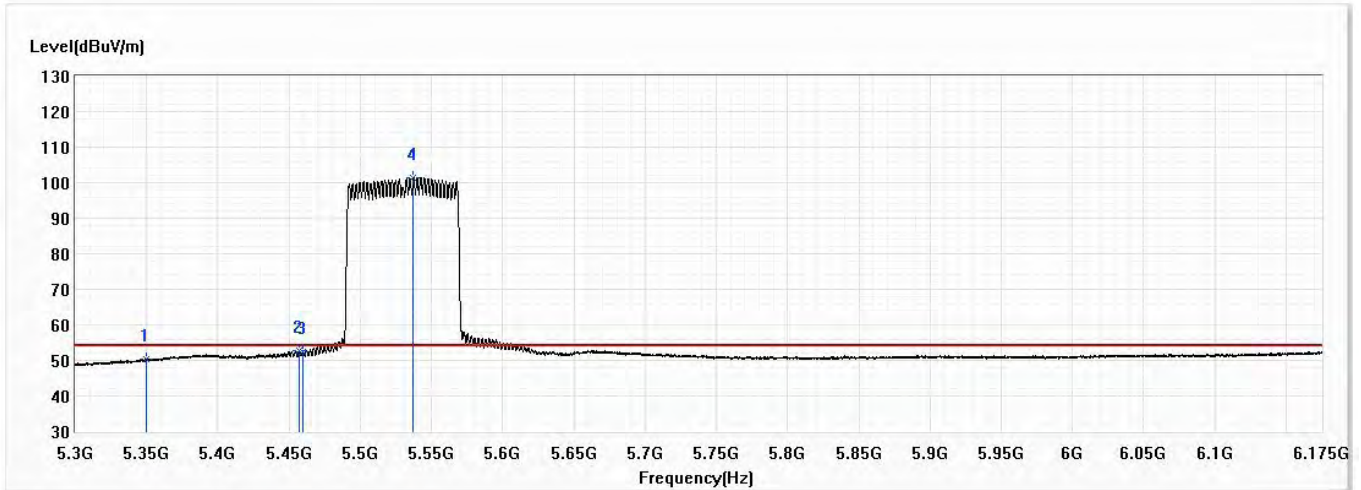


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	50.35	54.00	-3.65	25.55	24.80	AV
2	5457.063	52.74	54.00	-1.26	27.75	24.99	AV
3	5460.000	52.47	54.00	-1.53	27.48	24.99	AV
! 4	5537.344	101.36	54.00	47.36	76.18	25.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 106,5.53G,BW80M	Humidity (%RH)	53.4

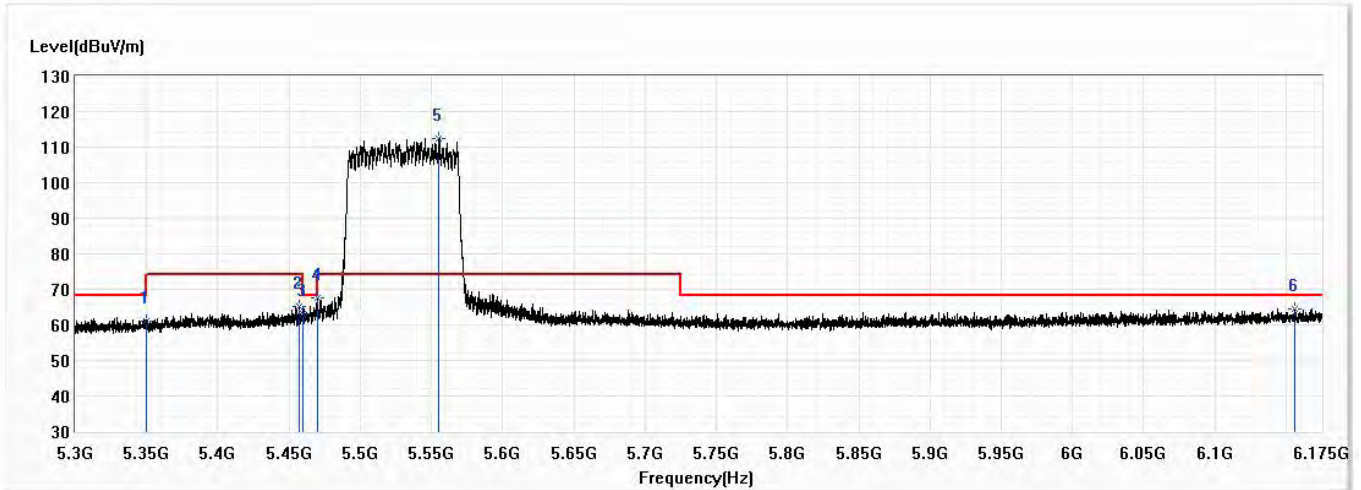


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	61.02	74.00	-12.98	36.22	24.80	PK
2	5457.063	65.14	74.00	-8.86	40.15	24.99	PK
3	5460.000	63.01	74.00	-10.99	38.02	24.99	PK
4	5469.750	67.70	68.20	-0.50	42.69	25.01	PK
! 5	5555.391	112.50	74.00	38.50	87.27	25.23	PK
6	6155.750	64.54	68.20	-3.66	37.31	27.23	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 106,5.53G,BW80M	Humidity (%RH)	53.4

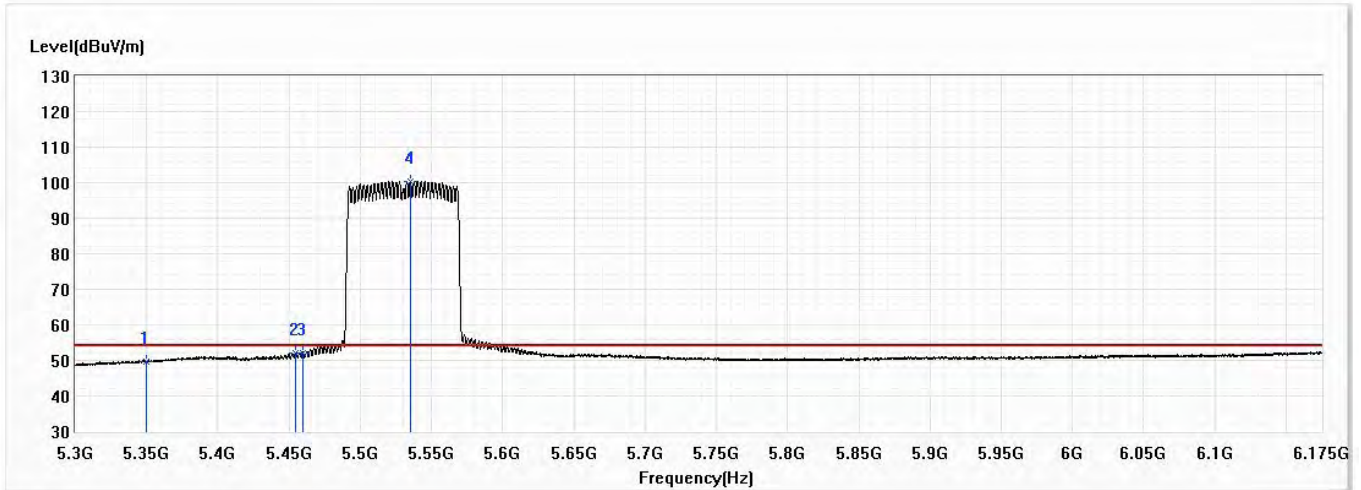


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.53	54.00	-4.47	24.73	24.80	AV
2	5454.438	52.16	54.00	-1.84	27.18	24.98	AV
3	5460.000	52.00	54.00	-2.00	27.01	24.99	AV
! 4	5535.266	100.50	54.00	46.50	75.33	25.17	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/19
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 122,5.61G,BW80M	Humidity (%RH)	53.4

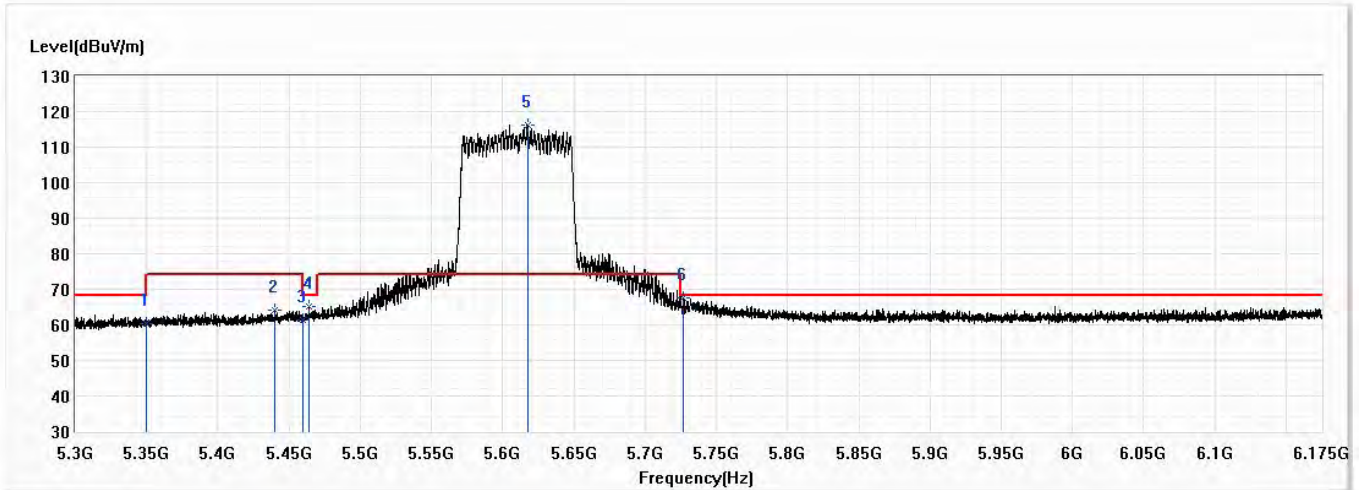


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.21	74.00	-13.79	35.41	24.80	PK
2	5440.219	64.25	74.00	-9.75	39.29	24.96	PK
3	5460.000	61.33	74.00	-12.67	36.34	24.99	PK
4	5463.734	65.33	68.20	-2.87	40.33	25.00	PK
! 5	5617.406	116.35	74.00	42.35	90.94	25.41	PK
6	5726.672	67.71	68.20	-0.49	41.98	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/19
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 122,5.61G,BW80M	Humidity (%RH)	53.4

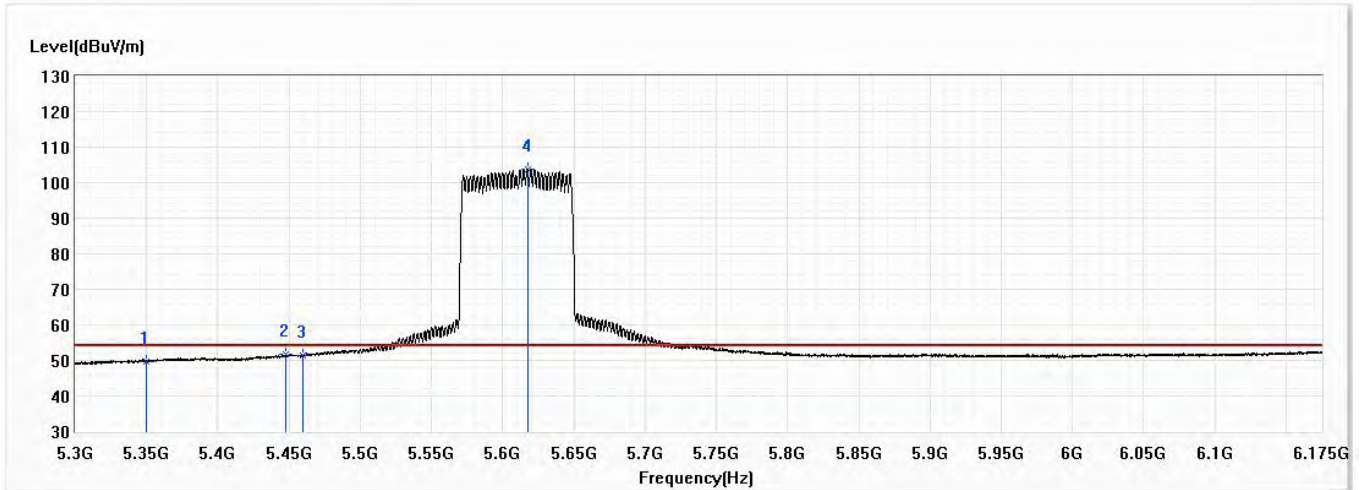


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.77	54.00	-4.23	24.97	24.80	AV
2	5447.984	51.57	54.00	-2.43	26.59	24.98	AV
3	5460.000	51.41	54.00	-2.59	26.42	24.99	AV
! 4	5617.297	103.83	54.00	49.83	78.42	25.41	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/19
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 122,5.61G,BW80M	Humidity (%RH)	53.4

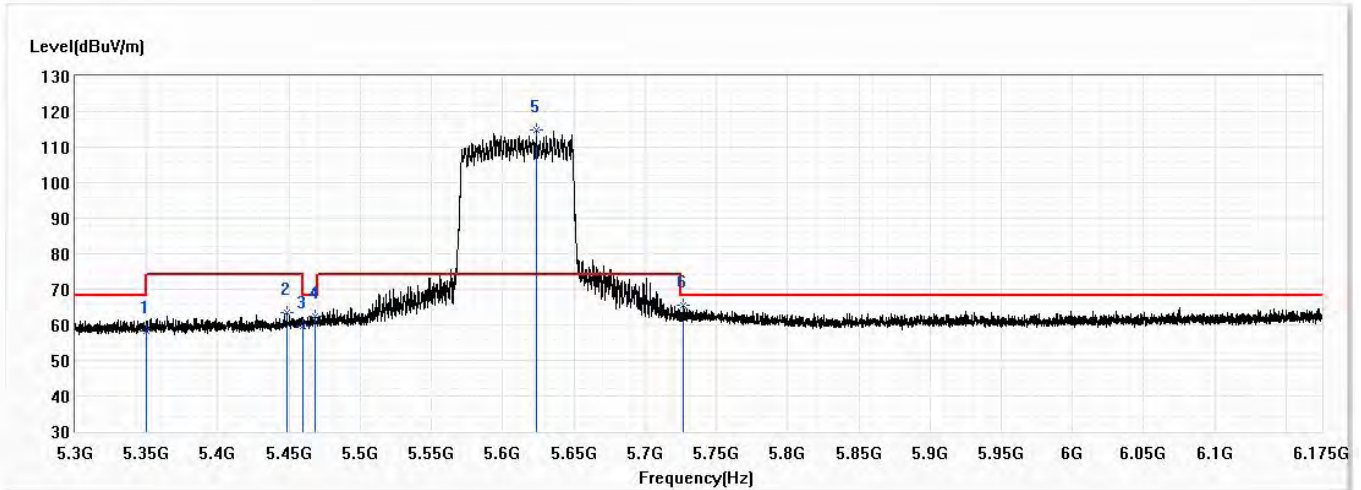


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.19	74.00	-15.81	33.39	24.80	PK
2	5448.641	63.48	74.00	-10.52	38.50	24.98	PK
3	5460.000	59.63	74.00	-14.37	34.64	24.99	PK
4	5468.109	62.40	68.20	-5.80	37.39	25.01	PK
! 5	5623.750	114.99	74.00	40.99	89.57	25.42	PK
6	5727.109	65.52	68.20	-2.68	39.79	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/19
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 122,5.61G,BW80M	Humidity (%RH)	53.4

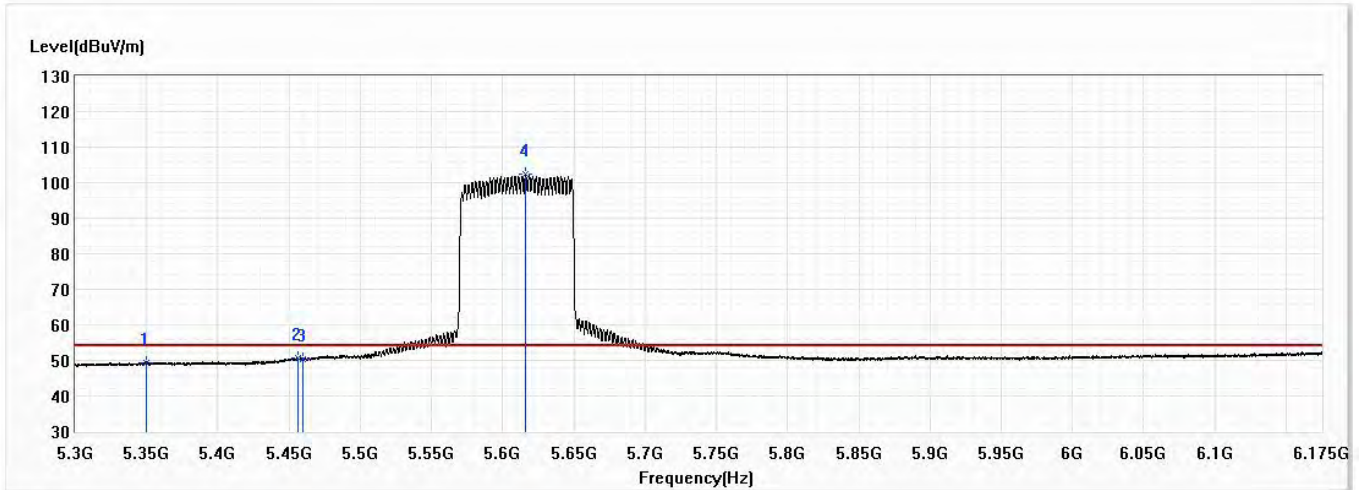


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.27	54.00	-4.73	24.47	24.80	AV
2	5456.406	50.68	54.00	-3.32	25.69	24.99	AV
3	5460.000	50.19	54.00	-3.81	25.20	24.99	AV
! 4	5615.984	102.42	54.00	48.42	77.01	25.41	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a,Ch 149,5.745G,BW20M	Humidity (%RH)	53.4

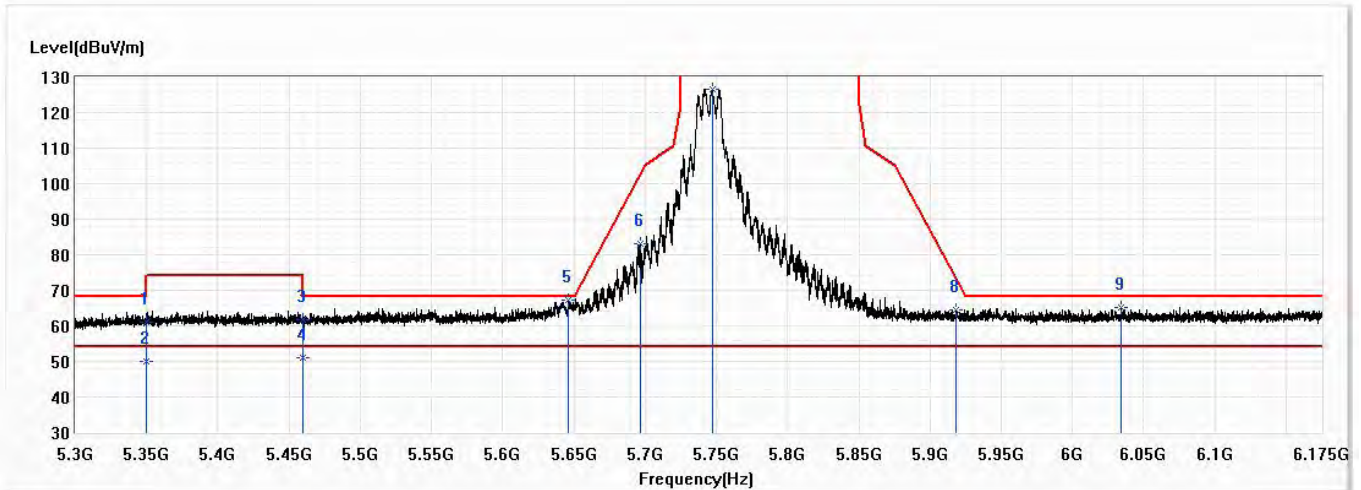


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	61.12	74.00	-12.88	36.32	24.80	PK
2	5350.000	50.10	54.00	-3.90	25.30	24.80	AV
3	5460.000	61.72	74.00	-12.28	36.73	24.99	PK
4	5460.000	50.90	54.00	-3.10	25.91	24.99	AV
* 5	5646.172	67.33	68.20	-0.87	41.84	25.49	PK
6	5696.703	82.98	102.77	-19.79	57.34	25.64	PK
7	5747.016	126.55	131.20	-4.65	100.77	25.78	PK
8	5918.188	64.65	73.22	-8.57	38.37	26.28	PK
9	6034.344	65.14	68.20	-3.06	38.46	26.68	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a,Ch 149,5.745G,BW20M	Humidity (%RH)	53.4

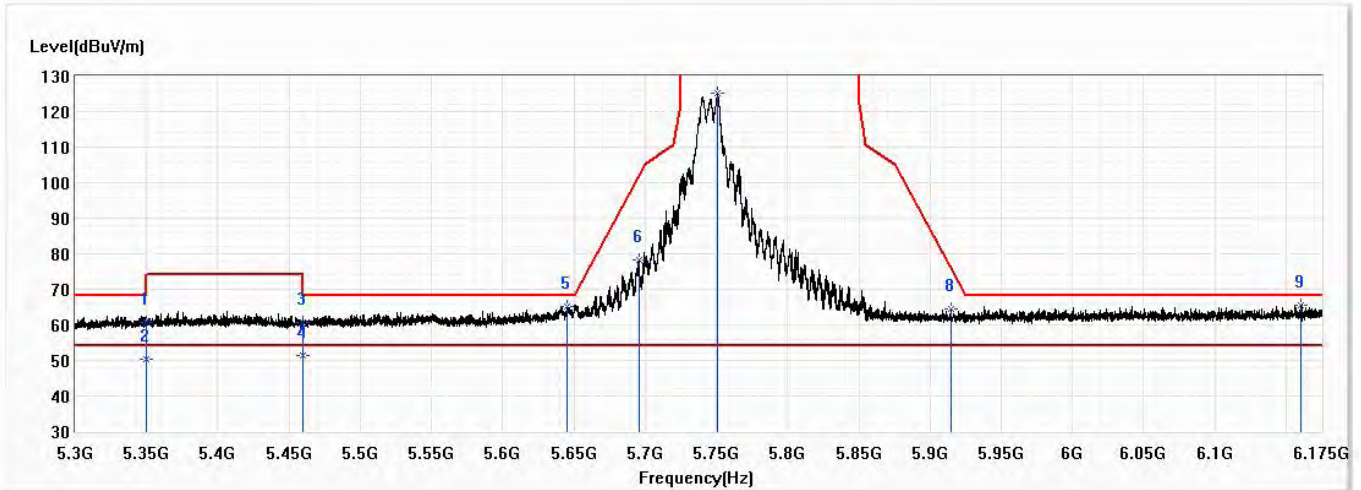


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.72	74.00	-13.28	35.92	24.80	PK
2	5350.000	50.48	54.00	-3.52	25.68	24.80	AV
3	5460.000	60.80	74.00	-13.20	35.81	24.99	PK
* 4	5460.000	51.51	54.00	-2.49	26.52	24.99	AV
5	5645.078	65.20	68.20	-3.00	39.71	25.49	PK
6	5695.609	78.37	101.96	-23.59	52.73	25.64	PK
7	5750.844	125.04	131.20	-6.16	99.24	25.80	PK
8	5914.578	64.44	75.89	-11.44	38.16	26.28	PK
9	6160.016	65.41	68.20	-2.79	38.16	27.25	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a,Ch 157,5.785G,BW20M	Humidity (%RH)	53.4

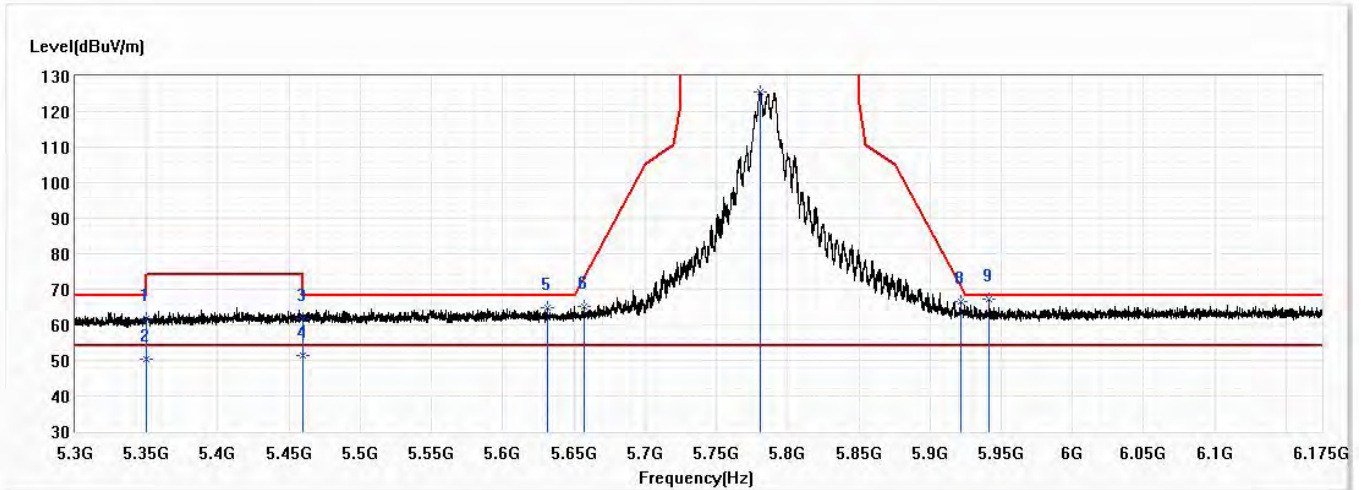


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	61.82	74.00	-12.18	37.02	24.80	PK
2	5350.000	50.36	54.00	-3.64	25.56	24.80	AV
3	5460.000	61.72	74.00	-12.28	36.73	24.99	PK
4	5460.000	51.32	54.00	-2.68	26.33	24.99	AV
5	5631.406	64.83	68.20	-3.37	39.38	25.45	PK
6	5657.328	65.28	73.64	-8.36	39.76	25.52	PK
7	5781.250	125.62	131.20	-5.58	99.73	25.89	PK
8	5921.797	66.65	70.56	-3.91	40.36	26.29	PK
* 9	5941.484	67.13	68.20	-1.07	40.79	26.34	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a,Ch 157,5.785G,BW20M	Humidity (%RH)	53.4

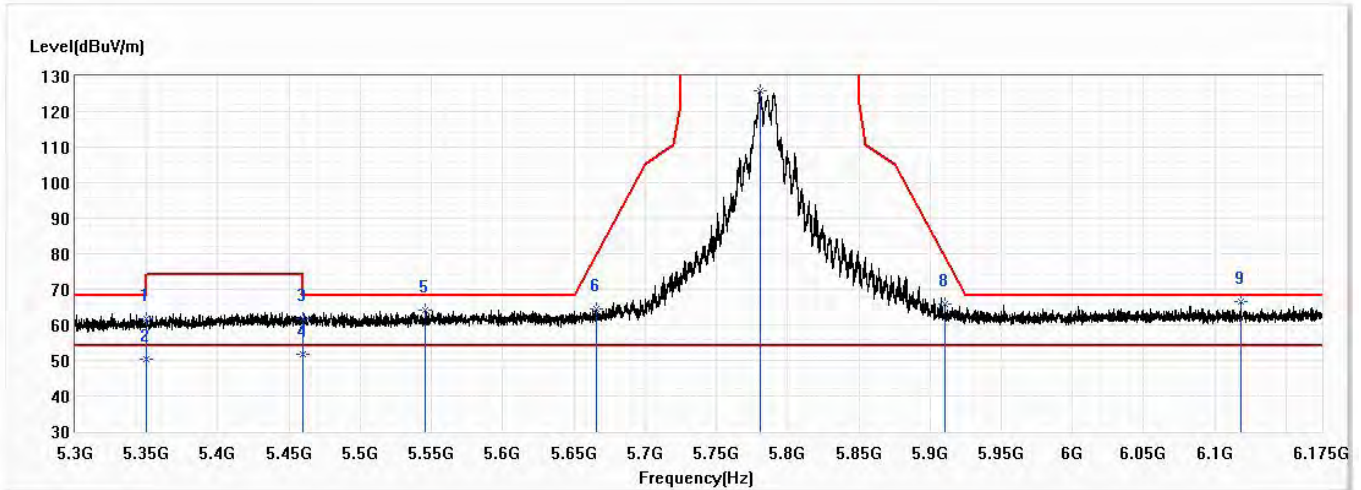


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	61.72	74.00	-12.28	36.92	24.80	PK
2	5350.000	50.34	54.00	-3.66	25.54	24.80	AV
3	5460.000	61.72	74.00	-12.28	36.73	24.99	PK
4	5460.000	51.60	54.00	-2.40	26.61	24.99	AV
5	5545.984	64.19	68.20	-4.01	38.99	25.20	PK
6	5665.422	64.53	79.65	-15.12	38.98	25.55	PK
7	5781.031	125.73	131.20	-5.47	99.84	25.89	PK
8	5910.859	65.78	78.63	-12.86	39.51	26.27	PK
* 9	6118.016	66.45	68.20	-1.75	39.39	27.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11a,Ch 165,5.825G,BW20M	Humidity (%RH)	53.4

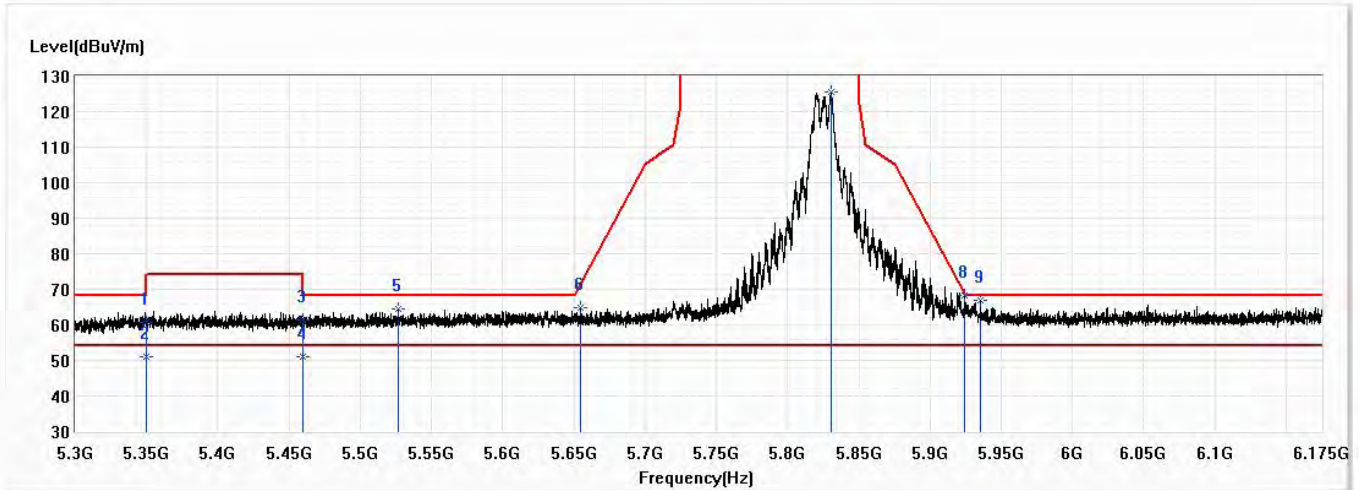


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.84	74.00	-13.16	36.04	24.80	PK
2	5350.000	51.15	54.00	-2.85	26.35	24.80	AV
3	5460.000	61.23	74.00	-12.77	36.24	24.99	PK
4	5460.000	51.06	54.00	-2.94	26.07	24.99	AV
5	5526.953	64.38	68.20	-3.82	39.23	25.15	PK
6	5654.813	64.66	71.78	-7.12	39.14	25.52	PK
7	5830.250	125.41	131.20	-5.79	99.38	26.03	PK
* 8	5924.641	68.27	68.46	-0.20	41.98	26.29	PK
9	5935.688	66.88	68.20	-1.32	40.55	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/17
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11a,Ch 165,5.825G,BW20M	Humidity (%RH)	53.4

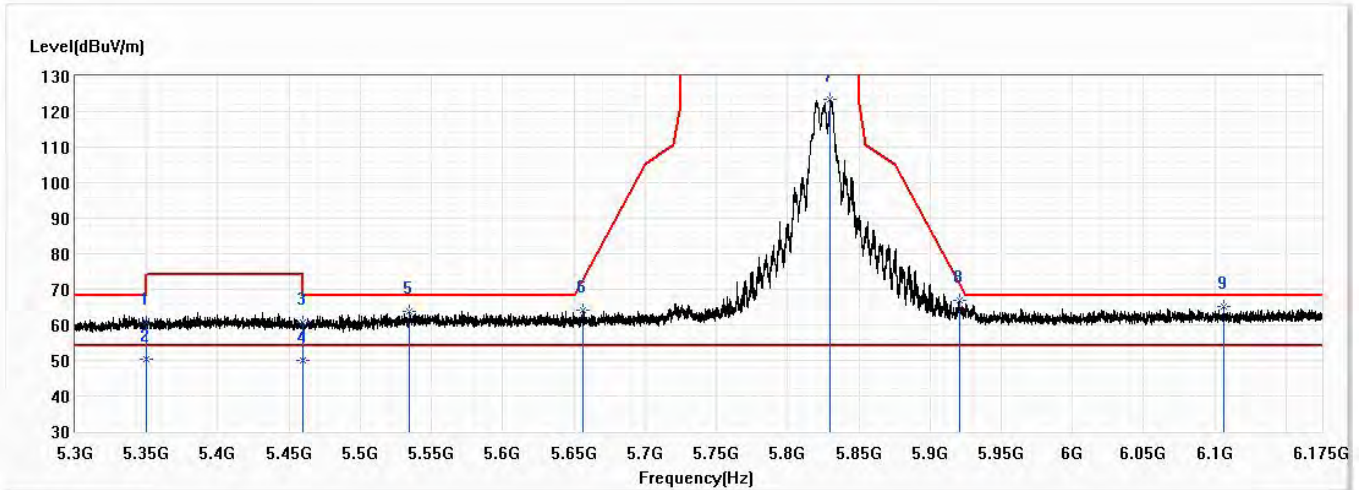


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.71	74.00	-13.29	35.91	24.80	PK
2	5350.000	50.32	54.00	-3.68	25.52	24.80	AV
3	5460.000	60.54	74.00	-13.46	35.55	24.99	PK
4	5460.000	50.06	54.00	-3.94	25.07	24.99	AV
5	5534.828	63.81	68.20	-4.39	38.64	25.17	PK
6	5656.781	64.12	73.24	-9.12	38.60	25.52	PK
7	5830.031	123.61	131.20	-7.59	97.58	26.03	PK
8	5920.484	66.98	71.53	-4.55	40.69	26.29	PK
* 9	6106.422	65.05	68.20	-3.15	38.05	27.00	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 149,5.745G,BW20M	Humidity (%RH)	53.4

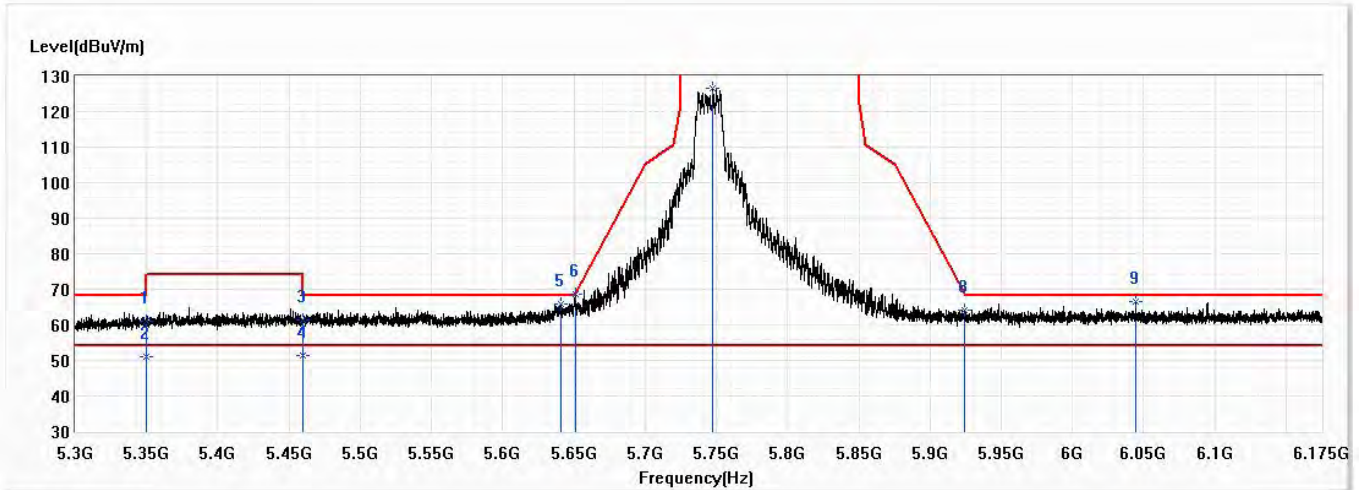


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	61.02	74.00	-12.98	36.22	24.80	PK
2	5350.000	51.20	54.00	-2.80	26.40	24.80	AV
3	5460.000	61.23	74.00	-12.77	36.24	24.99	PK
4	5460.000	51.32	54.00	-2.68	26.33	24.99	AV
5	5640.703	66.00	68.20	-2.20	40.53	25.47	PK
* 6	5651.422	68.72	69.26	-0.54	43.22	25.50	PK
7	5747.672	126.60	131.20	-4.60	100.81	25.79	PK
8	5924.531	64.28	68.55	-4.26	37.99	26.29	PK
9	6044.406	66.68	68.20	-1.52	39.95	26.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 149,5.745G,BW20M	Humidity (%RH)	53.4

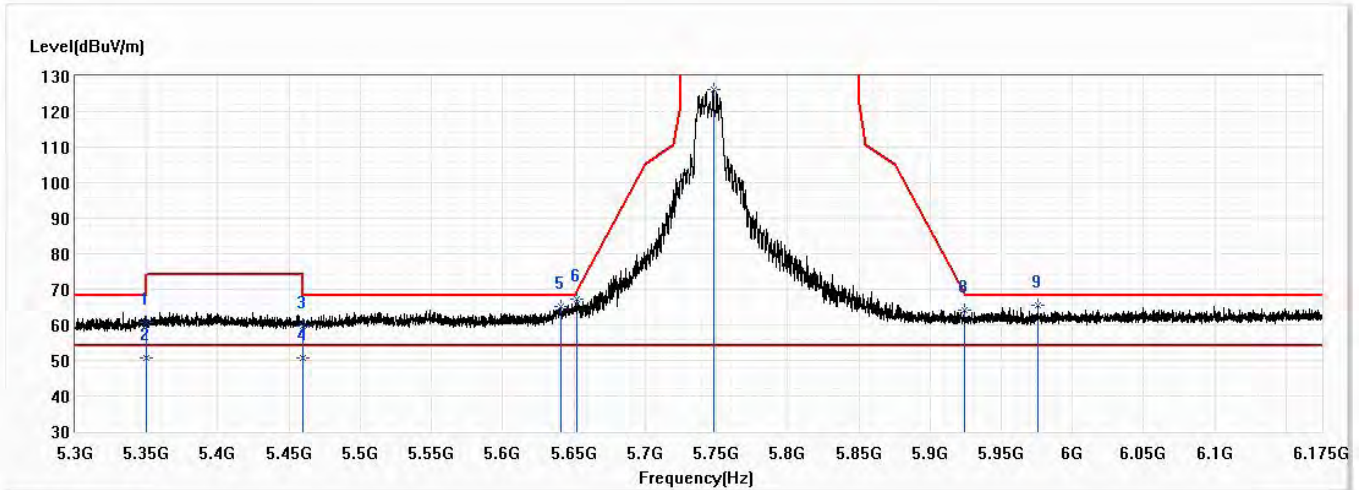


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.69	74.00	-13.31	35.89	24.80	PK
2	5350.000	50.58	54.00	-3.42	25.78	24.80	AV
3	5460.000	59.76	74.00	-14.24	34.77	24.99	PK
4	5460.000	50.56	54.00	-3.44	25.57	24.99	AV
5	5640.484	65.21	68.20	-2.99	39.74	25.47	PK
6	5652.188	67.08	69.83	-2.75	41.57	25.51	PK
7	5747.891	126.36	131.20	-4.84	100.57	25.79	PK
8	5923.984	64.06	68.95	-4.88	37.77	26.29	PK
* 9	5975.719	65.54	68.20	-2.66	39.08	26.46	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 157,5.785G,BW20M	Humidity (%RH)	53.4

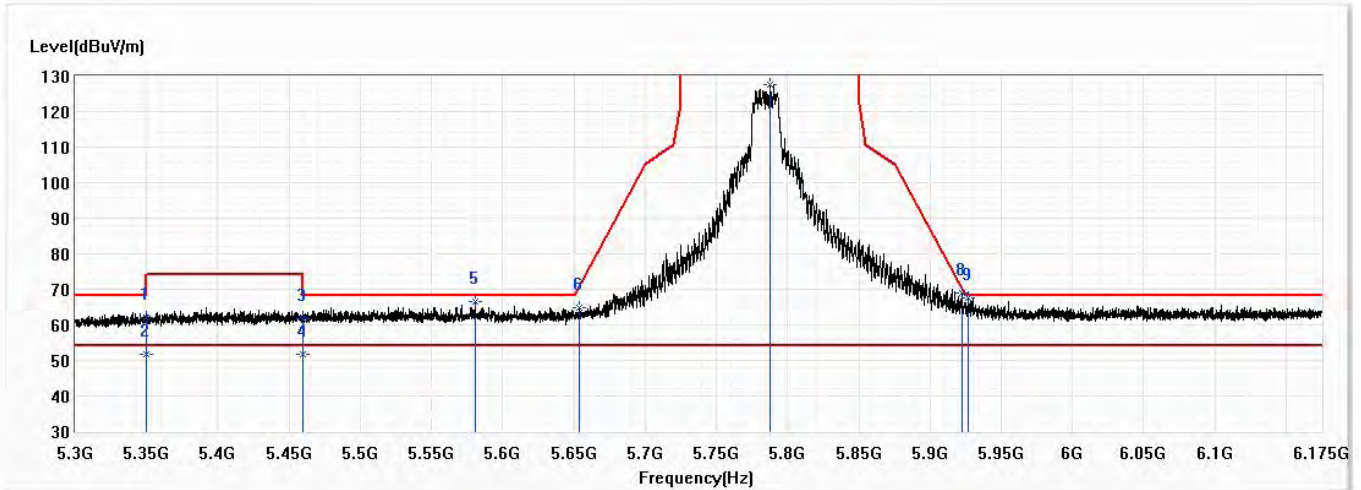


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	62.11	74.00	-11.89	37.31	24.80	PK
2	5350.000	51.59	54.00	-2.41	26.79	24.80	AV
3	5460.000	61.75	74.00	-12.25	36.76	24.99	PK
4	5460.000	51.64	54.00	-2.36	26.65	24.99	AV
5	5580.984	66.57	68.20	-1.63	41.26	25.31	PK
6	5654.047	64.80	71.21	-6.41	39.28	25.52	PK
7	5788.141	127.55	131.20	-3.65	101.65	25.90	PK
8	5922.453	68.96	70.08	-1.11	42.67	26.29	PK
* 9	5926.938	67.73	68.20	-0.47	41.41	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 157,5.785G,BW20M	Humidity (%RH)	53.4

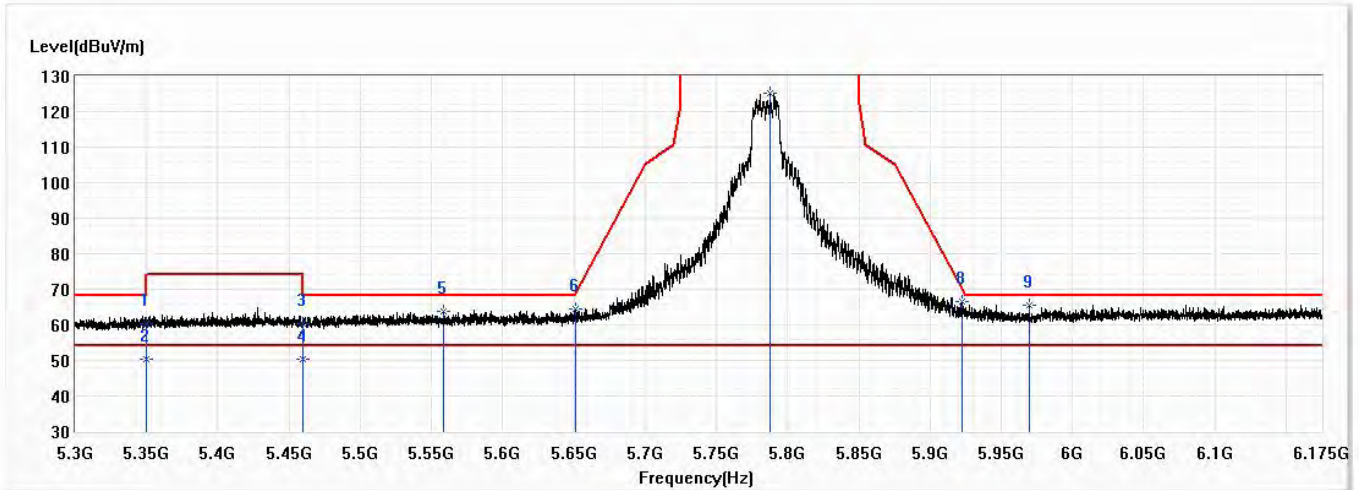


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.33	74.00	-13.67	35.53	24.80	PK
2	5350.000	50.27	54.00	-3.73	25.47	24.80	AV
3	5460.000	60.38	74.00	-13.62	35.39	24.99	PK
4	5460.000	50.34	54.00	-3.66	25.35	24.99	AV
5	5558.453	63.80	68.20	-4.40	38.55	25.25	PK
6	5651.203	64.39	69.09	-4.71	38.89	25.50	PK
7	5787.813	125.21	131.20	-5.99	99.31	25.90	PK
8	5922.672	66.53	69.92	-3.38	40.24	26.29	PK
* 9	5969.813	65.61	68.20	-2.59	39.17	26.44	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 165,5.825G,BW20M	Humidity (%RH)	53.4

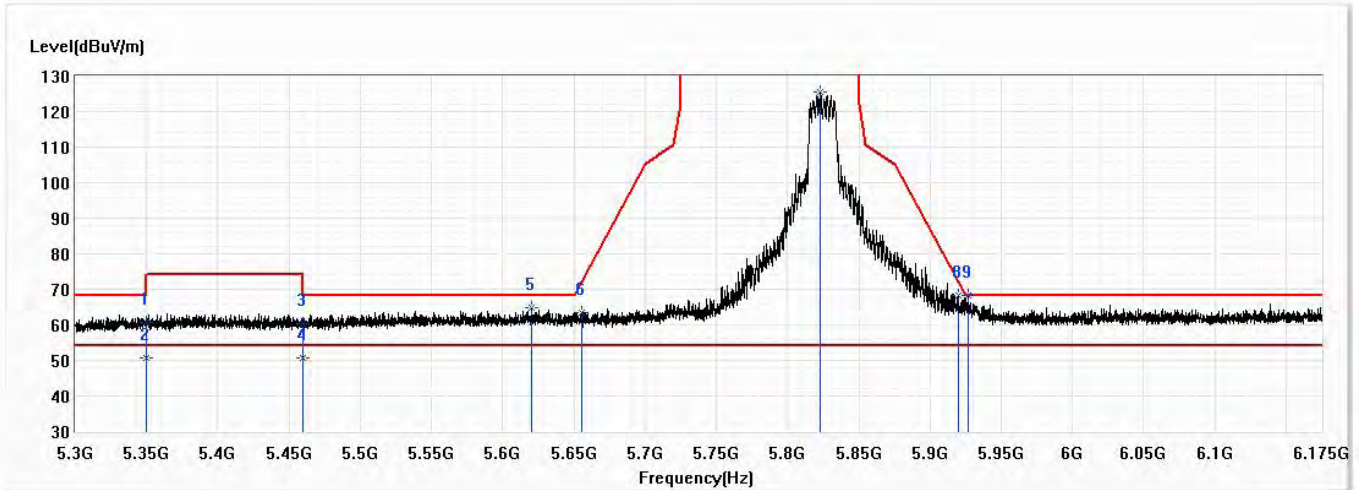


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.70	74.00	-13.30	35.90	24.80	PK
2	5350.000	50.62	54.00	-3.38	25.82	24.80	AV
3	5460.000	60.22	74.00	-13.78	35.23	24.99	PK
4	5460.000	50.72	54.00	-3.28	25.73	24.99	AV
5	5620.141	64.78	68.20	-3.42	39.36	25.42	PK
6	5655.250	63.53	72.10	-8.57	38.01	25.52	PK
7	5823.250	125.57	131.20	-5.63	99.57	26.00	PK
8	5919.609	68.44	72.17	-3.73	42.15	26.29	PK
* 9	5926.609	68.13	68.20	-0.07	41.82	26.31	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax20,Ch 165,5.825G,BW20M	Humidity (%RH)	53.4

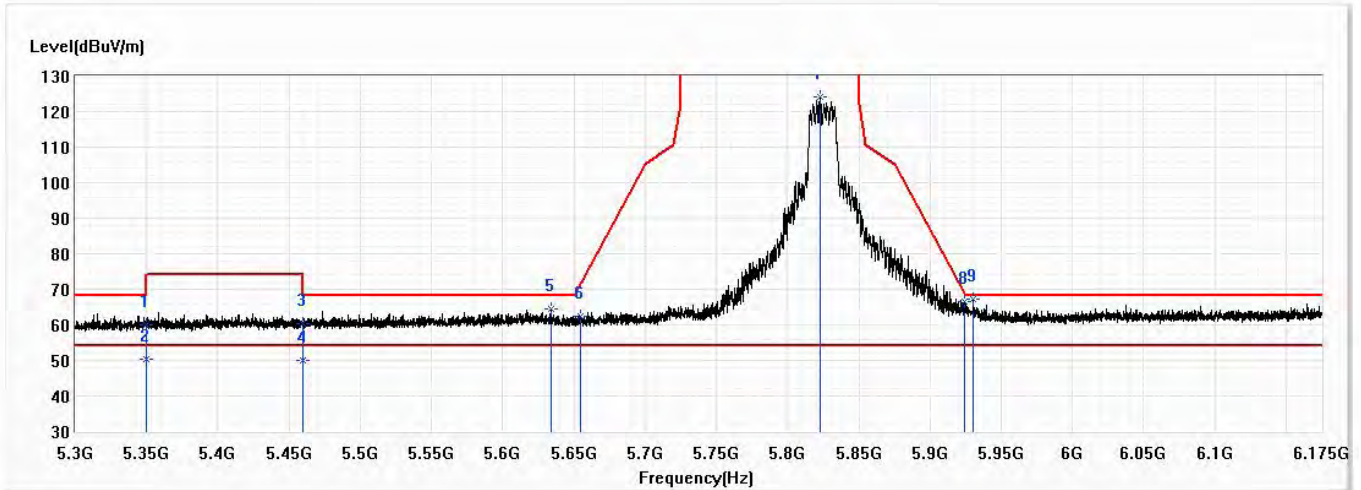


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.83	74.00	-14.17	35.03	24.80	PK
2	5350.000	50.21	54.00	-3.79	25.41	24.80	AV
3	5460.000	60.45	74.00	-13.55	35.46	24.99	PK
4	5460.000	50.04	54.00	-3.96	25.05	24.99	AV
5	5634.250	64.32	68.20	-3.88	38.86	25.46	PK
6	5655.031	62.38	71.94	-9.55	36.86	25.52	PK
7	5822.813	123.98	131.20	-7.22	97.98	26.00	PK
8	5924.094	66.42	68.87	-2.45	40.13	26.29	PK
* 9	5930.328	67.13	68.20	-1.07	40.81	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 151,5.755G,BW40M	Humidity (%RH)	53.4

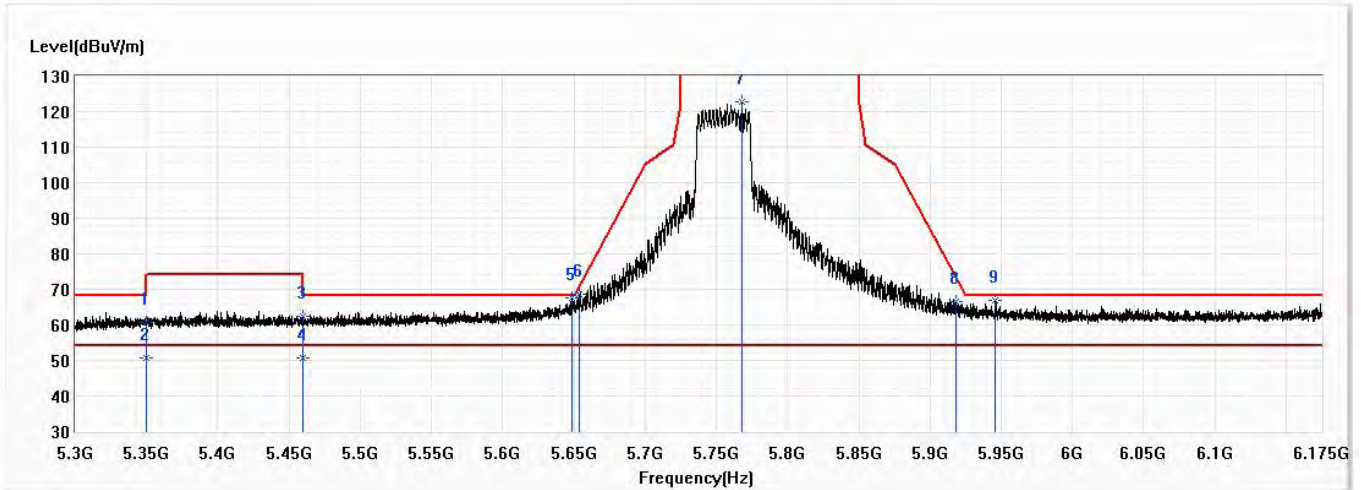


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.67	74.00	-13.33	35.87	24.80	PK
2	5350.000	50.53	54.00	-3.47	25.73	24.80	AV
3	5460.000	62.43	74.00	-11.57	37.44	24.99	PK
4	5460.000	50.55	54.00	-3.45	25.56	24.99	AV
* 5	5649.016	67.56	68.20	-0.64	42.06	25.50	PK
6	5653.391	68.45	70.72	-2.27	42.93	25.52	PK
7	5767.797	122.70	131.20	-8.50	96.86	25.84	PK
8	5918.188	66.72	73.22	-6.50	40.44	26.28	PK
9	5946.078	66.96	68.20	-1.24	40.60	26.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 151,5.755G,BW40M	Humidity (%RH)	53.4

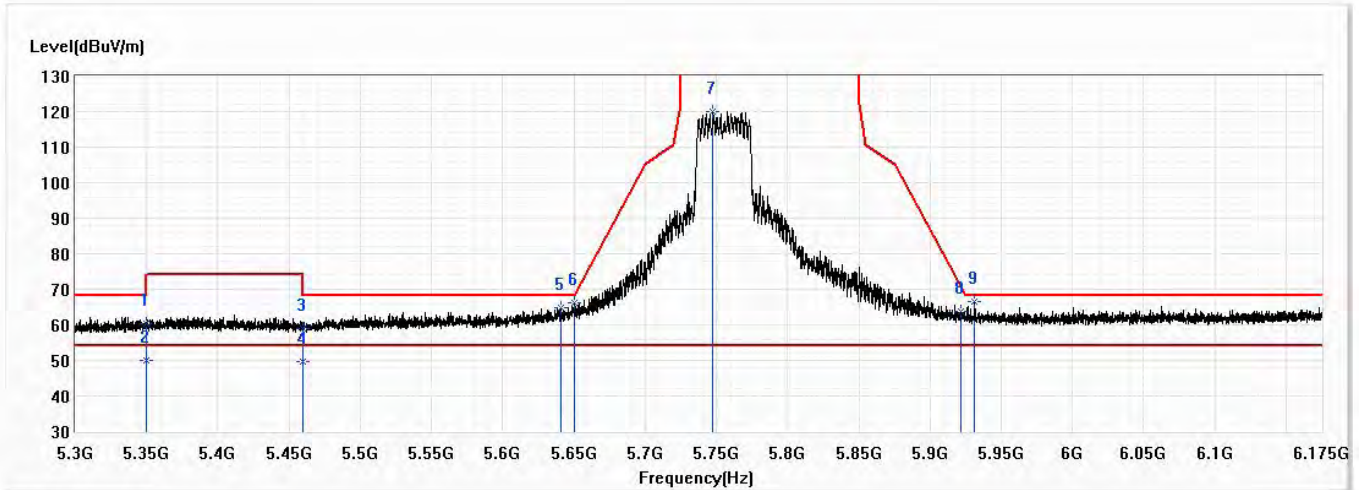


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.34	74.00	-13.66	35.54	24.80	PK
2	5350.000	49.97	54.00	-4.03	25.17	24.80	AV
3	5460.000	58.90	74.00	-15.10	33.91	24.99	PK
4	5460.000	49.57	54.00	-4.43	24.58	24.99	AV
5	5640.484	64.92	68.20	-3.28	39.45	25.47	PK
6	5650.656	66.32	68.69	-2.36	40.82	25.50	PK
7	5747.672	120.02	131.20	-11.18	94.23	25.79	PK
8	5921.469	63.81	70.80	-6.99	37.52	26.29	PK
* 9	5931.422	66.70	68.20	-1.50	40.37	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 159,5.795G,BW40M	Humidity (%RH)	53.4

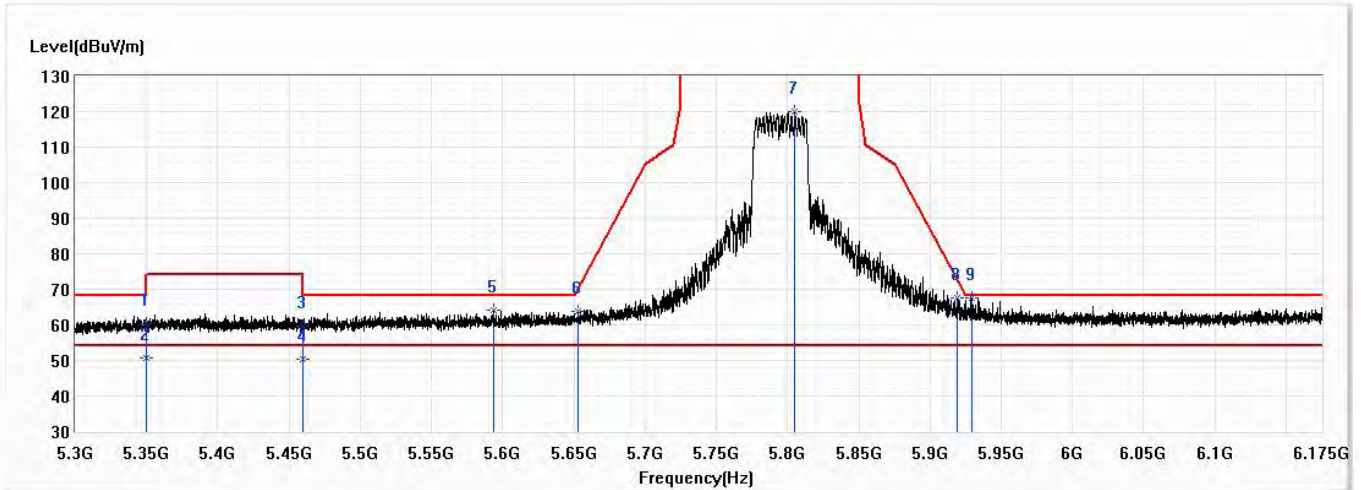


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.51	74.00	-13.49	35.71	24.80	PK
2	5350.000	50.52	54.00	-3.48	25.72	24.80	AV
3	5460.000	59.65	74.00	-14.35	34.66	24.99	PK
4	5460.000	50.46	54.00	-3.54	25.47	24.99	AV
5	5593.453	64.28	68.20	-3.92	38.93	25.35	PK
6	5652.625	63.82	70.15	-6.33	38.31	25.51	PK
7	5805.203	120.09	131.20	-11.11	94.14	25.95	PK
8	5919.500	67.53	72.25	-4.73	41.24	26.29	PK
* 9	5929.016	67.73	68.20	-0.47	41.41	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/18
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax40,Ch 159,5.795G,BW40M	Humidity (%RH)	53.4

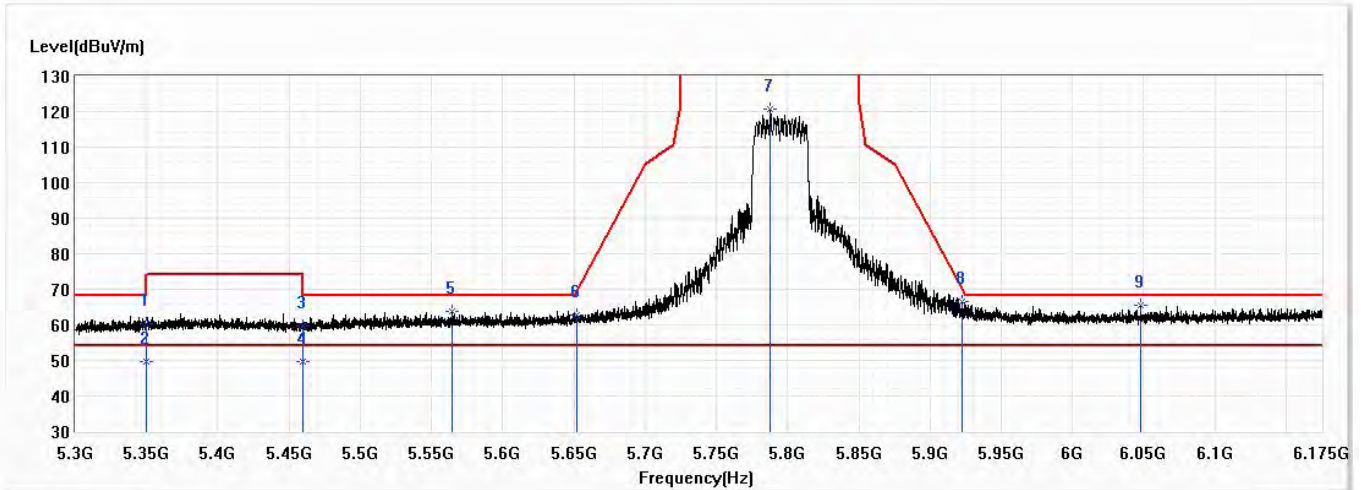


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.48	74.00	-13.52	35.68	24.80	PK
2	5350.000	49.82	54.00	-4.18	25.02	24.80	AV
3	5460.000	59.54	74.00	-14.46	34.55	24.99	PK
4	5460.000	49.59	54.00	-4.41	24.60	24.99	AV
5	5564.688	63.70	68.20	-4.50	38.44	25.26	PK
6	5651.969	62.88	69.66	-6.78	37.38	25.50	PK
7	5788.141	120.71	131.20	-10.49	94.81	25.90	PK
8	5922.234	66.67	70.24	-3.56	40.38	26.29	PK
* 9	6048.234	65.36	68.20	-2.84	38.62	26.74	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/19
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 155,5.775G,BW80M	Humidity (%RH)	53.4

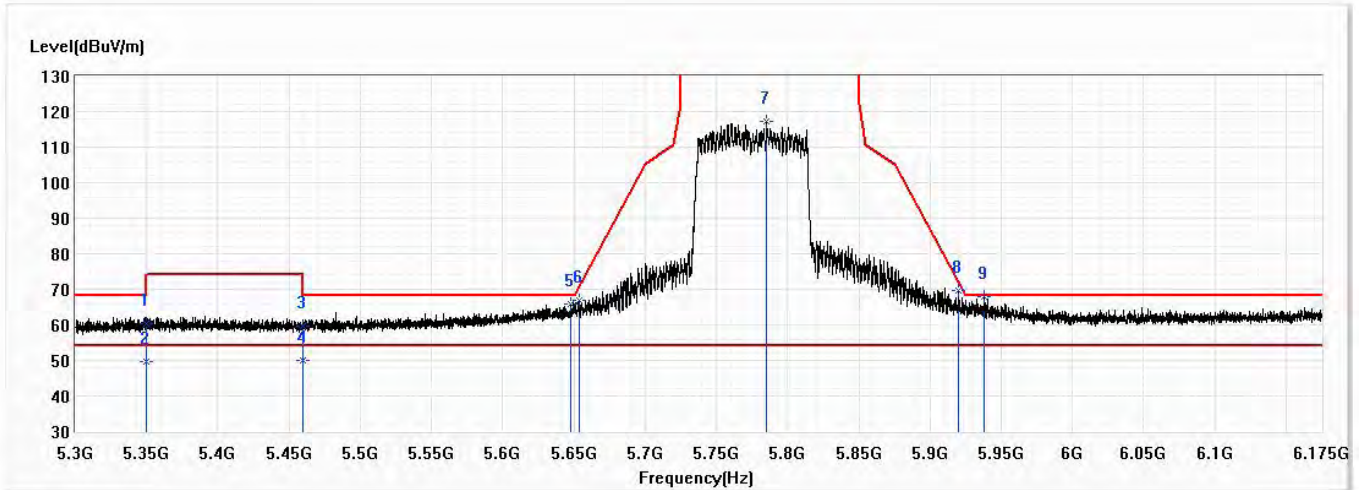


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.48	74.00	-13.52	35.68	24.80	PK
2	5350.000	49.63	54.00	-4.37	24.83	24.80	AV
3	5460.000	59.80	74.00	-14.20	34.81	24.99	PK
4	5460.000	50.11	54.00	-3.89	25.12	24.99	AV
5	5647.484	65.99	68.20	-2.21	40.49	25.50	PK
6	5653.500	67.01	70.80	-3.79	41.49	25.52	PK
7	5785.516	117.13	131.20	-14.07	91.24	25.89	PK
8	5920.156	69.80	71.77	-1.97	43.51	26.29	PK
* 9	5937.766	67.86	68.20	-0.34	41.52	26.34	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/1/19
Test Mode	Mode 1: Transmit_Non-BF_EBM552U	Engineer	Carlos Chen
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax80,Ch 155,5.775G,BW80M	Humidity (%RH)	53.4

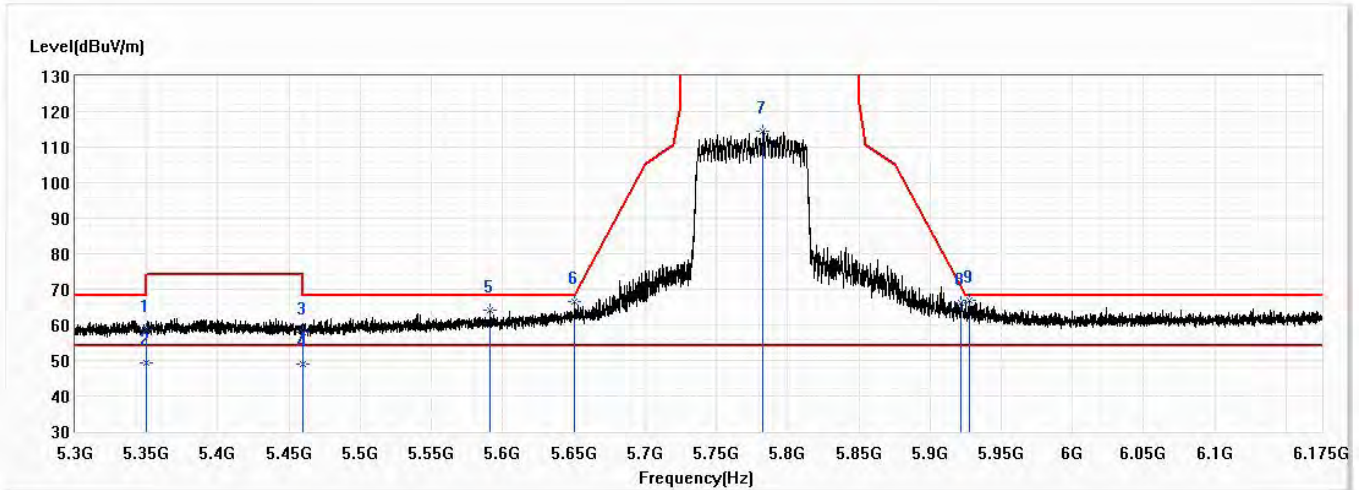


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.52	74.00	-15.48	33.72	24.80	PK
2	5350.000	49.36	54.00	-4.64	24.56	24.80	AV
3	5460.000	58.07	74.00	-15.93	33.08	24.99	PK
4	5460.000	49.07	54.00	-4.93	24.08	24.99	AV
5	5590.828	64.30	68.20	-3.90	38.98	25.32	PK
6	5650.438	66.67	68.53	-1.85	41.17	25.50	PK
7	5783.000	114.53	131.20	-16.67	88.64	25.89	PK
8	5922.016	66.04	70.40	-4.36	39.75	26.29	PK
* 9	5927.594	66.87	68.20	-1.33	40.55	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 36,5.18G,BW20M	Humidity (%RH)	58.0

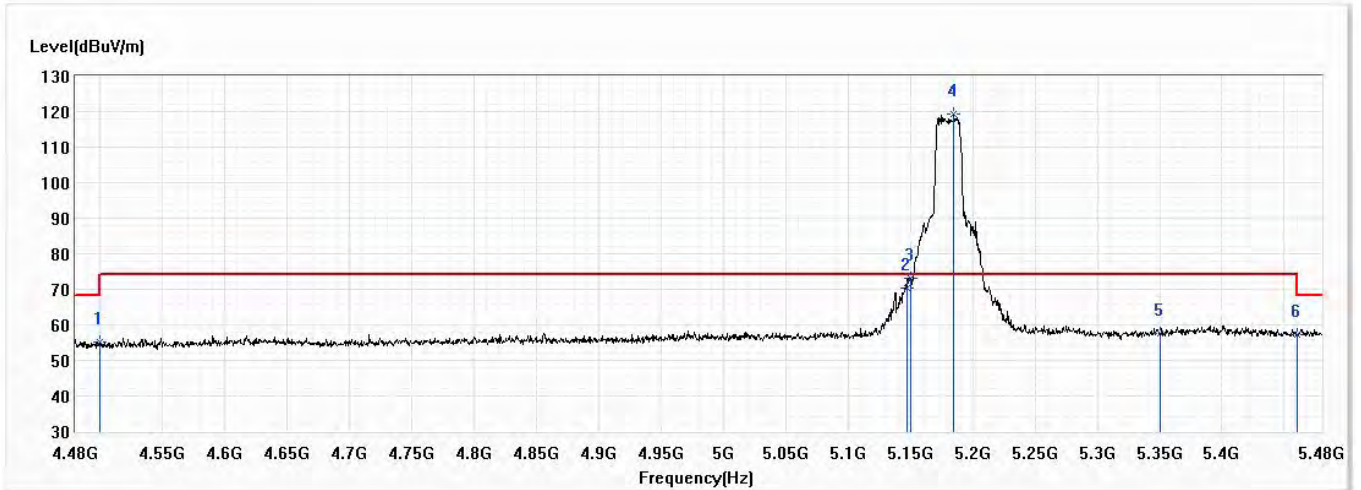


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	55.21	74.00	-18.79	31.54	23.67	PK
2	5147.000	70.41	74.00	-3.59	45.97	24.44	PK
3	5150.000	73.21	74.00	-0.79	48.77	24.44	PK
! 4	5185.000	119.31	74.00	45.31	94.80	24.51	PK
5	5350.000	57.63	74.00	-16.37	32.83	24.80	PK
6	5460.000	57.35	74.00	-16.65	32.36	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 36,5.18G,BW20M	Humidity (%RH)	58.0

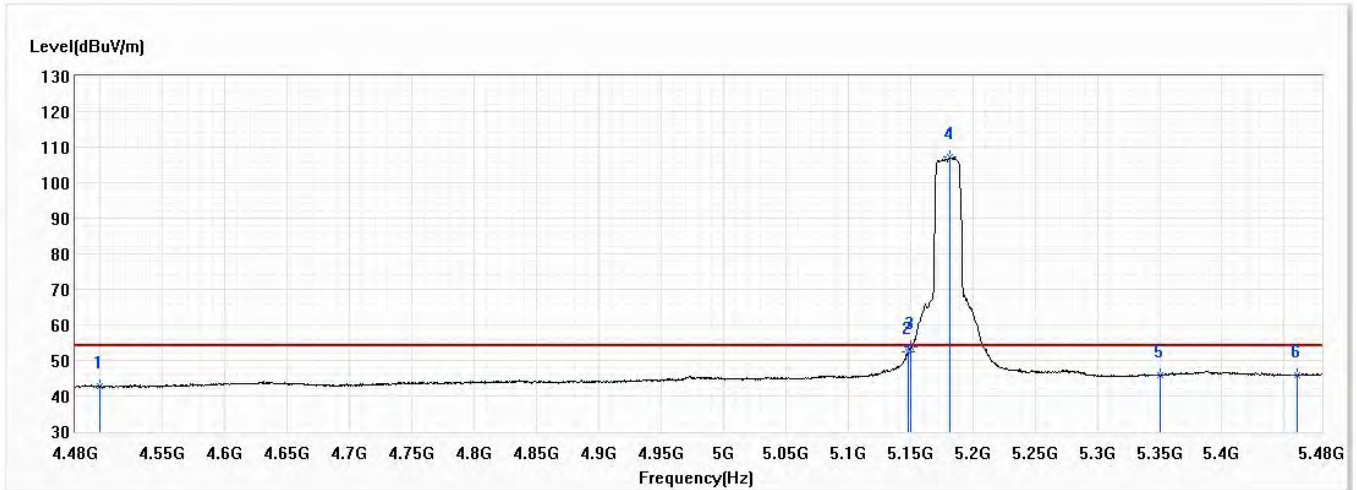


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.62	54.00	-11.38	18.95	23.67	AV
2	5148.000	52.42	54.00	-1.58	27.98	24.44	AV
3	5150.000	53.70	54.00	-0.30	29.26	24.44	AV
! 4	5182.000	107.10	54.00	53.10	82.60	24.50	AV
5	5350.000	45.86	54.00	-8.14	21.06	24.80	AV
6	5460.000	45.92	54.00	-8.08	20.93	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 36,5.18G,BW20M	Humidity (%RH)	58.0

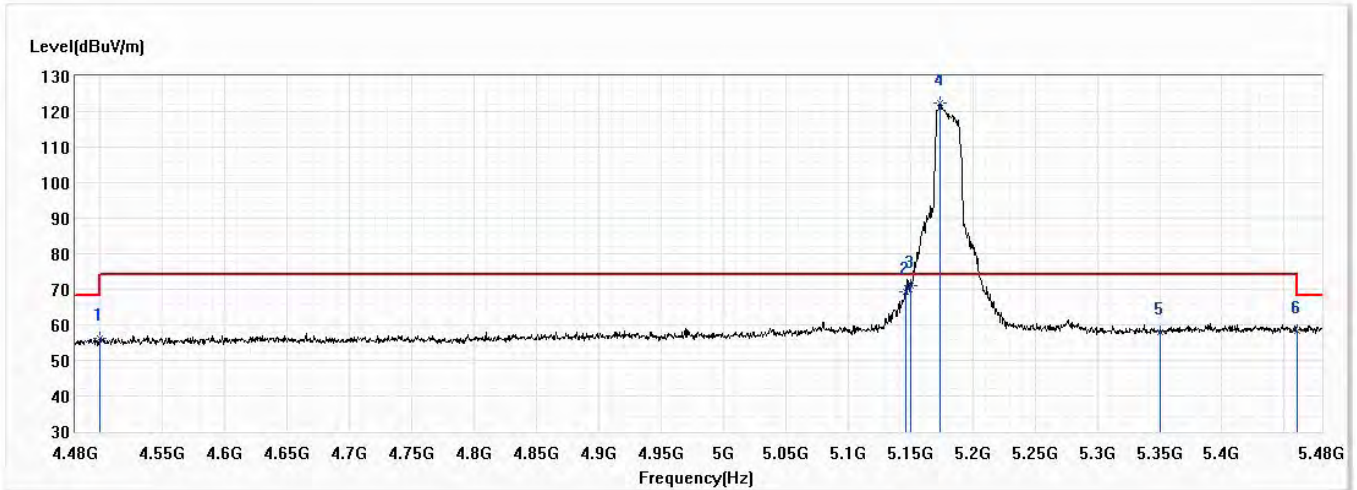


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	56.30	74.00	-17.70	32.63	23.67	PK
2	5146.000	69.28	74.00	-4.72	44.84	24.44	PK
3	5150.000	71.05	74.00	-2.95	46.61	24.44	PK
! 4	5174.000	122.55	74.00	48.55	98.07	24.48	PK
5	5350.000	58.00	74.00	-16.00	33.20	24.80	PK
6	5460.000	58.35	74.00	-15.65	33.36	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 36,5.18G,BW20M	Humidity (%RH)	58.0

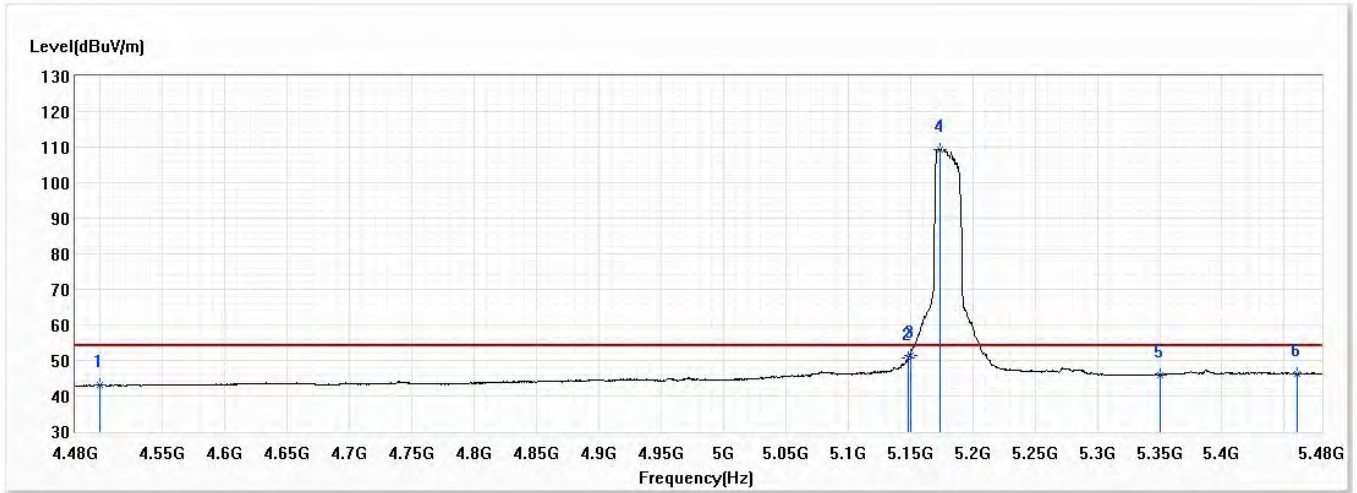


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.06	54.00	-10.94	19.39	23.67	AV
2	5148.500	50.70	54.00	-3.30	26.26	24.44	AV
3	5150.000	51.48	54.00	-2.52	27.04	24.44	AV
! 4	5174.000	109.44	54.00	55.44	84.96	24.48	AV
5	5350.000	45.96	54.00	-8.04	21.16	24.80	AV
6	5460.000	46.27	54.00	-7.73	21.28	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 44,5.22G,BW20M	Humidity (%RH)	58.0

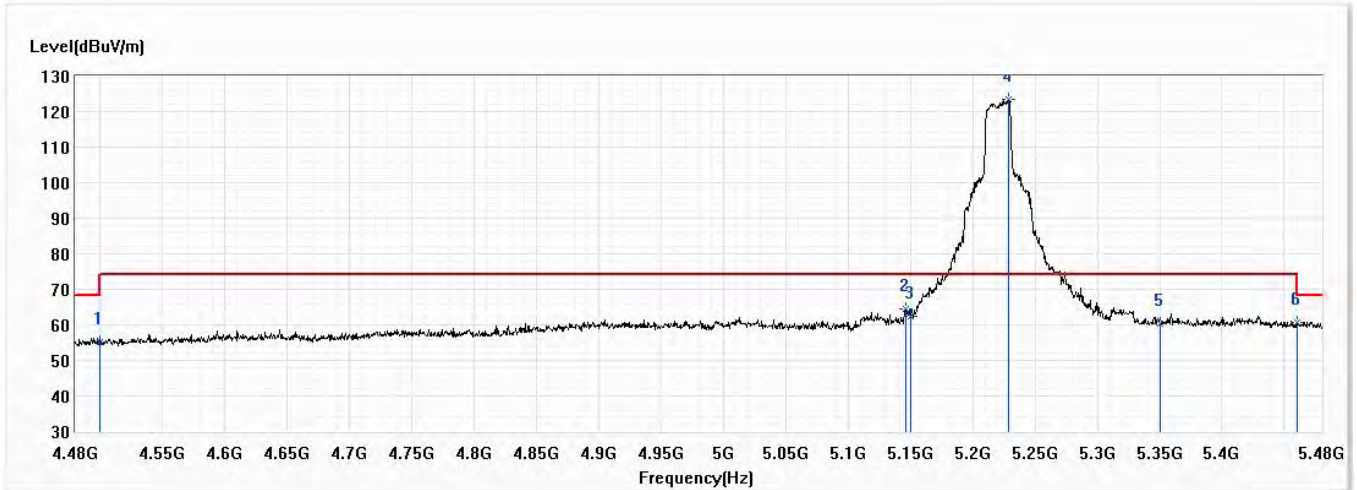


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	55.13	74.00	-18.87	31.46	23.67	PK
2	5146.000	64.46	74.00	-9.54	40.02	24.44	PK
3	5150.000	62.25	74.00	-11.75	37.81	24.44	PK
! 4	5228.500	123.47	74.00	49.47	98.88	24.59	PK
5	5350.000	60.50	74.00	-13.50	35.70	24.80	PK
6	5460.000	60.62	74.00	-13.38	35.63	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 44,5.22G,BW20M	Humidity (%RH)	58.0

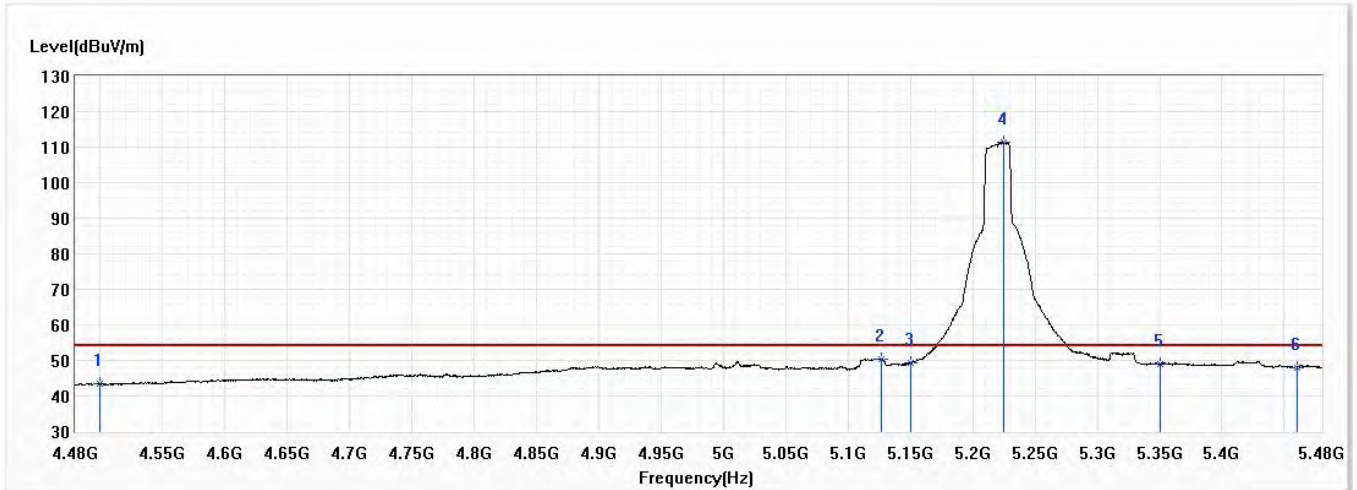


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.41	54.00	-10.59	19.74	23.67	AV
2	5127.000	50.43	54.00	-3.57	26.02	24.41	AV
3	5150.000	49.23	54.00	-4.77	24.79	24.44	AV
! 4	5225.000	111.27	54.00	57.27	86.68	24.59	AV
5	5350.000	48.99	54.00	-5.01	24.19	24.80	AV
6	5460.000	48.08	54.00	-5.92	23.09	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 44,5.22G,BW20M	Humidity (%RH)	58.0

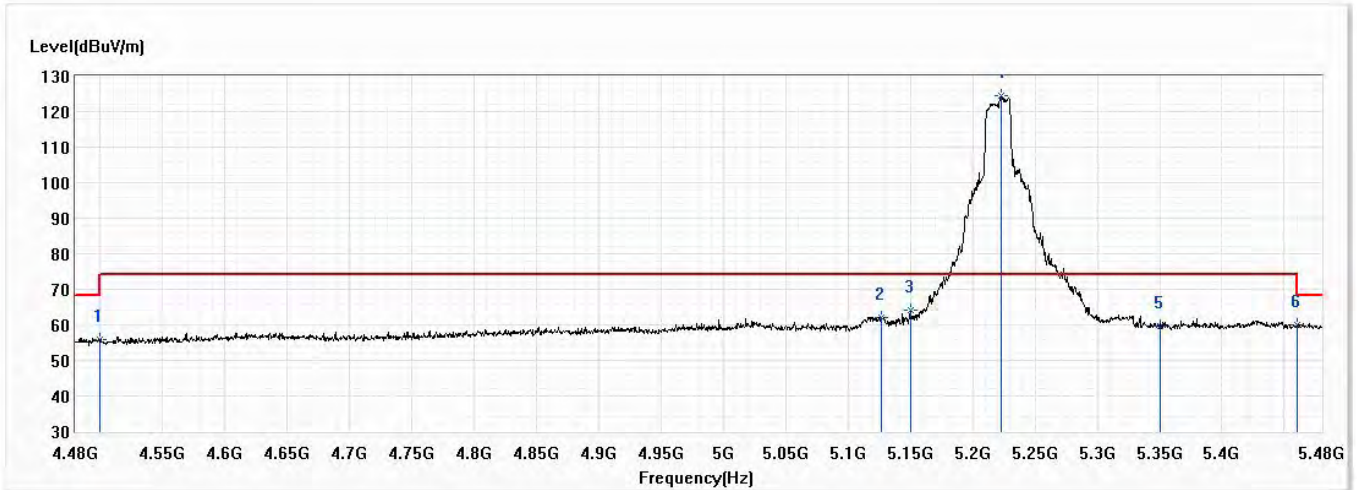


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	55.81	74.00	-18.19	32.14	23.67	PK
2	5126.500	62.09	74.00	-11.91	37.68	24.41	PK
3	5150.000	64.04	74.00	-9.96	39.60	24.44	PK
! 4	5223.000	124.57	74.00	50.57	100.01	24.56	PK
5	5350.000	59.76	74.00	-14.24	34.96	24.80	PK
6	5460.000	59.94	74.00	-14.06	34.95	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 44,5.22G,BW20M	Humidity (%RH)	58.0

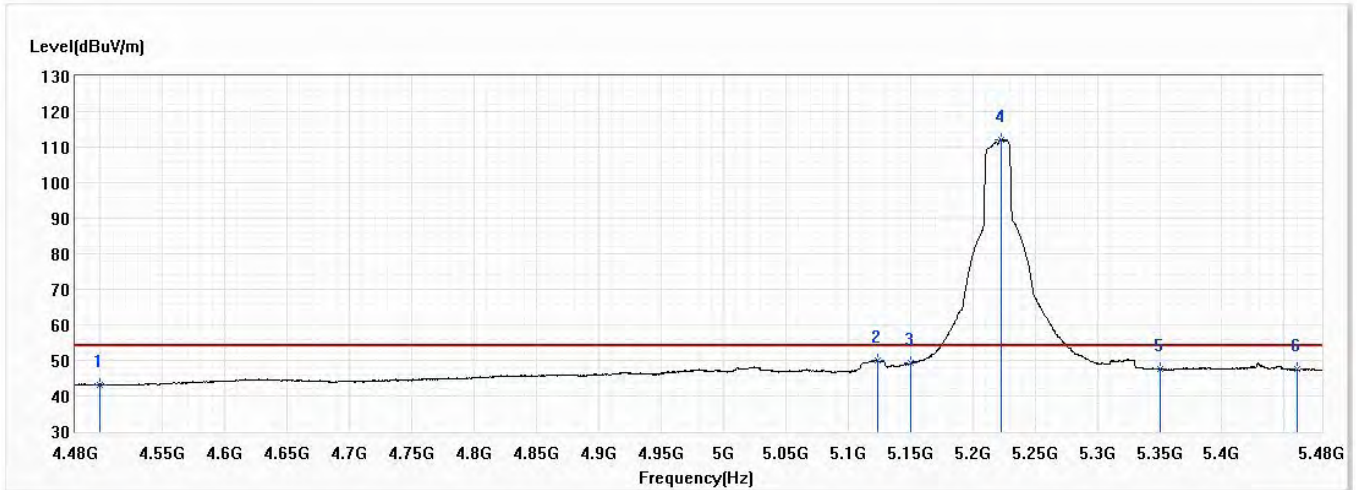


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.18	54.00	-10.82	19.51	23.67	AV
2	5124.000	49.90	54.00	-4.10	25.51	24.39	AV
3	5150.000	49.18	54.00	-4.82	24.74	24.44	AV
! 4	5223.000	112.03	54.00	58.03	87.47	24.56	AV
5	5350.000	47.54	54.00	-6.46	22.74	24.80	AV
6	5460.000	47.45	54.00	-6.55	22.46	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 48,5.24G,BW20M	Humidity (%RH)	58.0

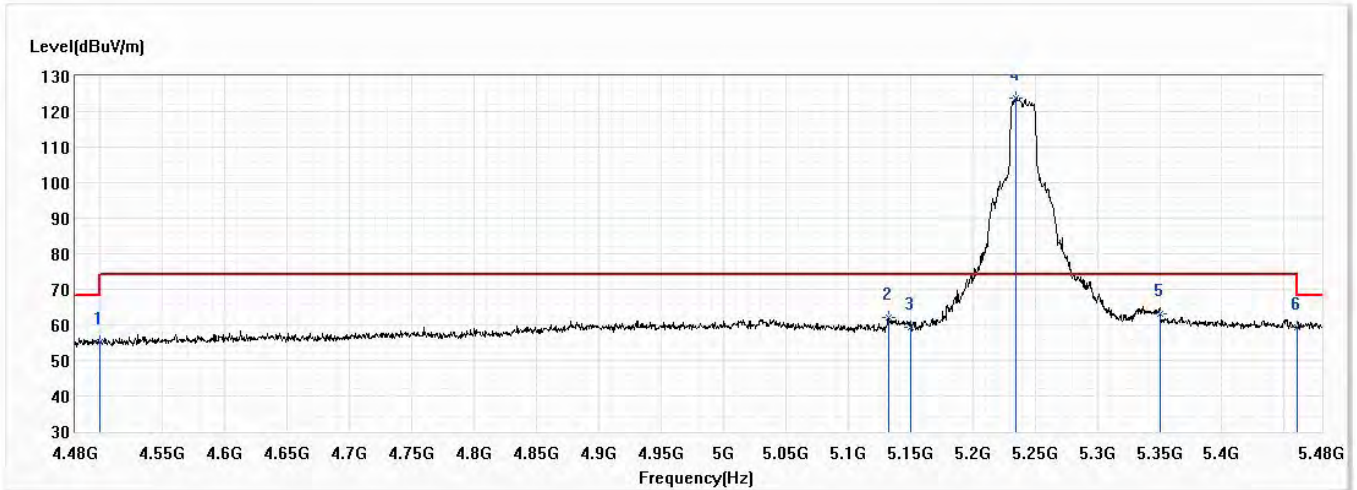


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	55.12	74.00	-18.88	31.45	23.67	PK
2	5132.500	62.00	74.00	-12.00	37.59	24.41	PK
3	5150.000	59.41	74.00	-14.59	34.97	24.44	PK
! 4	5235.000	123.78	74.00	49.78	99.19	24.59	PK
5	5350.000	62.97	74.00	-11.03	38.17	24.80	PK
6	5460.000	59.15	74.00	-14.85	34.16	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 48,5.24G,BW20M	Humidity (%RH)	58.0

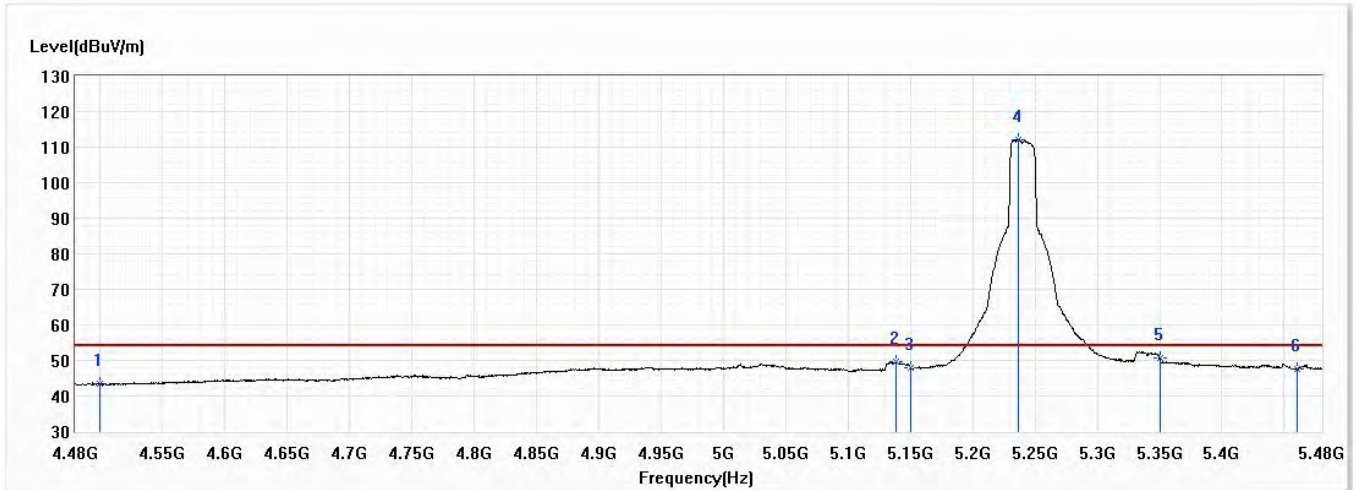


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.32	54.00	-10.68	19.65	23.67	AV
2	5138.500	49.54	54.00	-4.46	25.12	24.42	AV
3	5150.000	48.08	54.00	-5.92	23.64	24.44	AV
! 4	5236.500	112.22	54.00	58.22	87.62	24.60	AV
5	5350.000	50.52	54.00	-3.48	25.72	24.80	AV
6	5460.000	47.68	54.00	-6.32	22.69	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 48,5.24G,BW20M	Humidity (%RH)	58.0

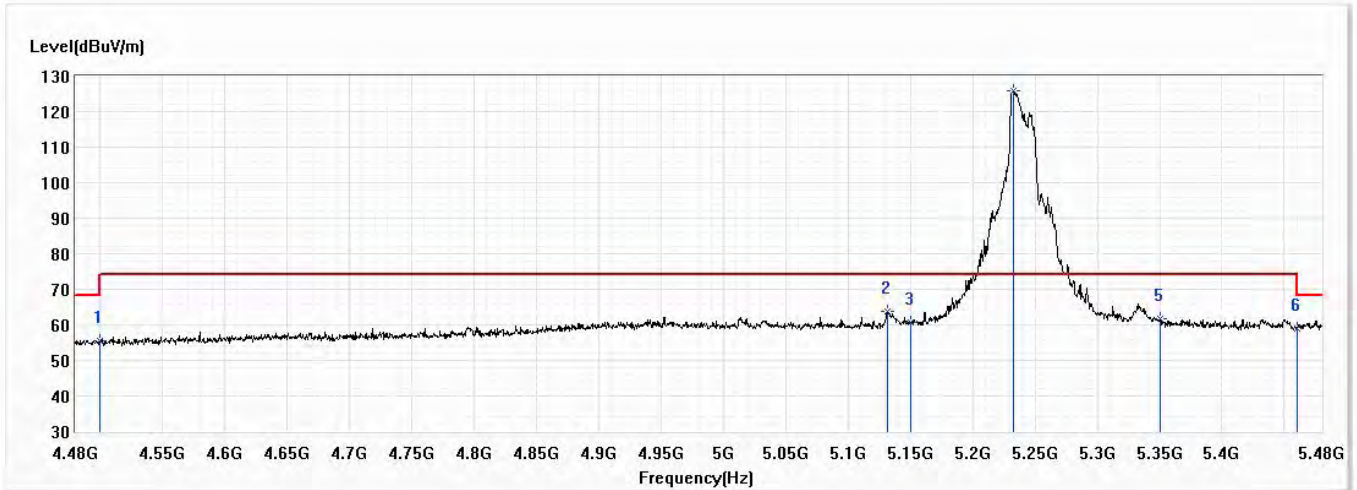


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	55.68	74.00	-18.32	32.01	23.67	PK
2	5131.500	63.68	74.00	-10.32	39.27	24.41	PK
3	5150.000	60.67	74.00	-13.33	36.23	24.44	PK
! 4	5233.000	125.71	74.00	51.71	101.12	24.59	PK
5	5350.000	61.81	74.00	-12.19	37.01	24.80	PK
6	5460.000	58.85	74.00	-15.15	33.86	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 48,5.24G,BW20M	Humidity (%RH)	58.0

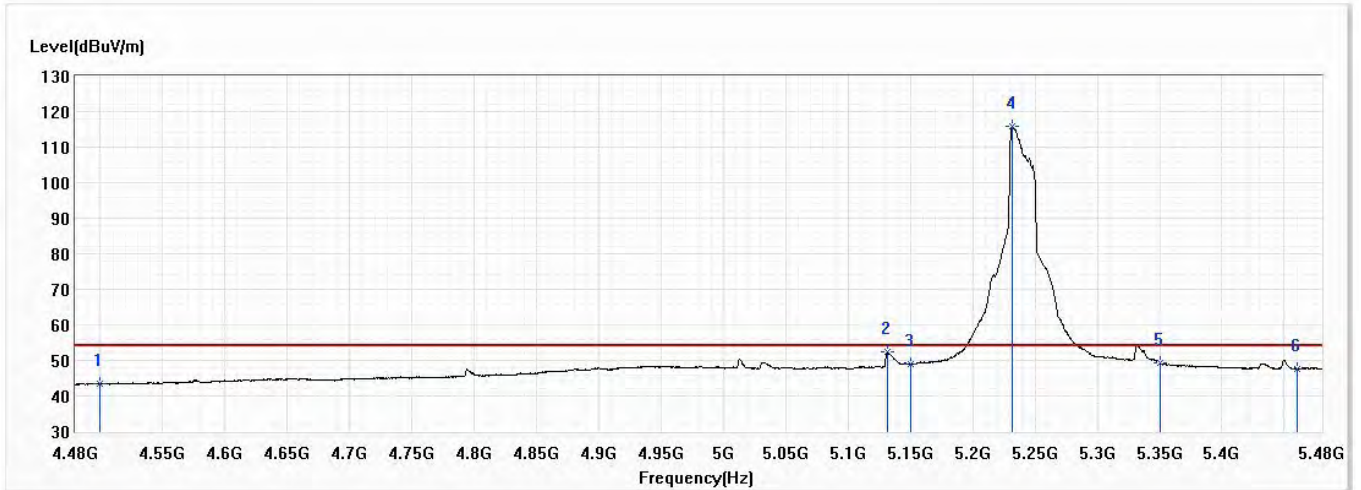


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.49	54.00	-10.51	19.82	23.67	AV
2	5131.500	52.32	54.00	-1.68	27.91	24.41	AV
3	5150.000	49.04	54.00	-4.96	24.60	24.44	AV
! 4	5231.500	115.85	54.00	61.85	91.26	24.59	AV
5	5350.000	49.30	54.00	-4.70	24.50	24.80	AV
6	5460.000	47.59	54.00	-6.41	22.60	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 38,5.19G,BW40M	Humidity (%RH)	58.0

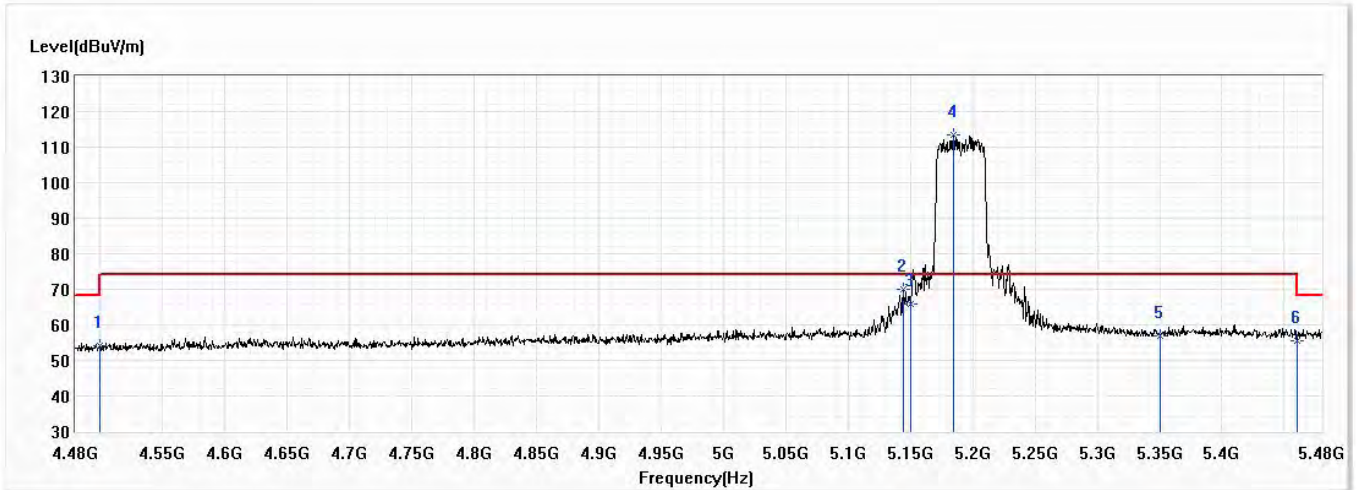


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.13	74.00	-19.87	30.46	23.67	PK
2	5144.000	70.17	74.00	-3.83	45.74	24.43	PK
3	5150.000	66.00	74.00	-8.00	41.56	24.44	PK
! 4	5185.000	113.37	74.00	39.37	88.86	24.51	PK
5	5350.000	57.03	74.00	-16.97	32.23	24.80	PK
6	5460.000	55.64	74.00	-18.36	30.65	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 38,5.19G,BW40M	Humidity (%RH)	58.0

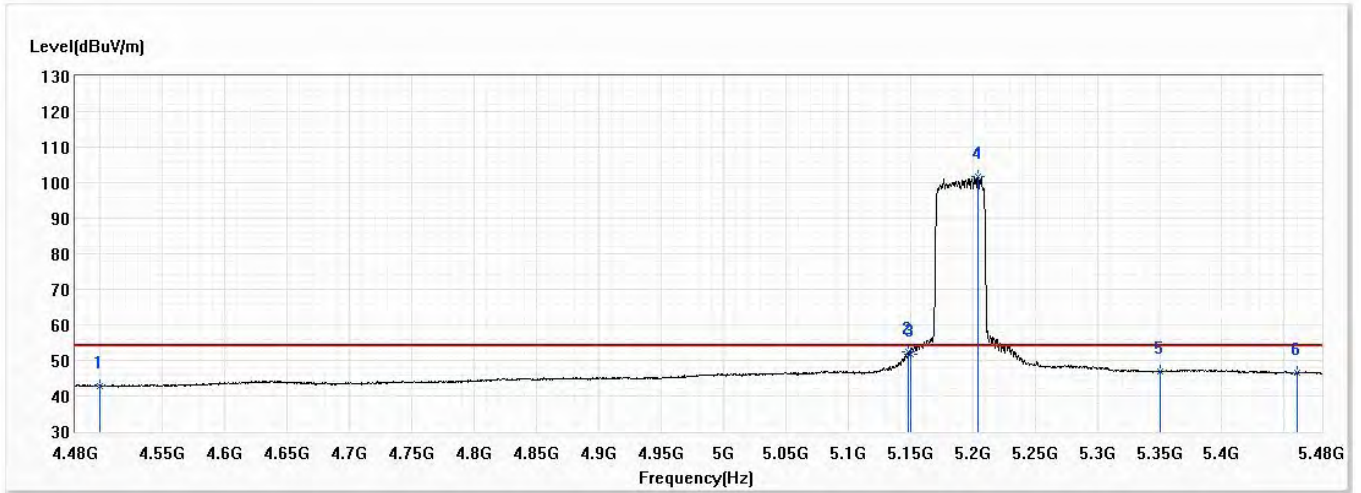


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.83	54.00	-11.17	19.16	23.67	AV
2	5148.500	52.41	54.00	-1.59	27.97	24.44	AV
3	5150.000	51.80	54.00	-2.20	27.36	24.44	AV
! 4	5204.000	101.64	54.00	47.64	77.11	24.53	AV
5	5350.000	47.02	54.00	-6.98	22.22	24.80	AV
6	5460.000	46.56	54.00	-7.44	21.57	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 38,5.19G,BW40M	Humidity (%RH)	58.0

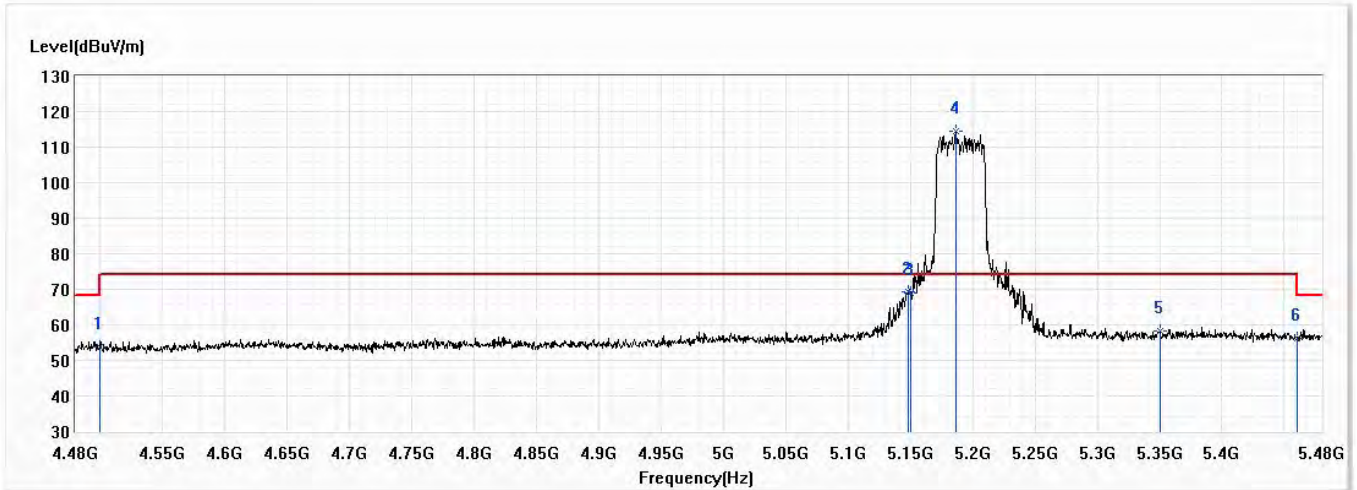


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.83	74.00	-20.17	30.16	23.67	PK
2	5148.000	69.48	74.00	-4.52	45.04	24.44	PK
3	5150.000	69.10	74.00	-4.90	44.66	24.44	PK
! 4	5187.000	114.38	74.00	40.38	89.87	24.51	PK
5	5350.000	58.11	74.00	-15.89	33.31	24.80	PK
6	5460.000	56.37	74.00	-17.63	31.38	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 38,5.19G,BW40M	Humidity (%RH)	58.0

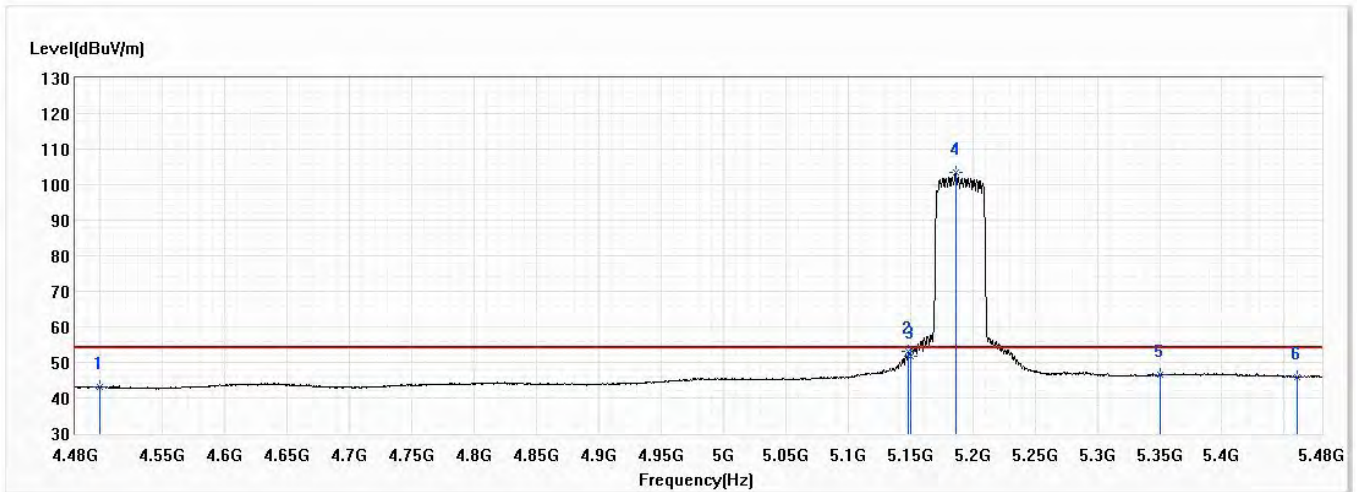


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.02	54.00	-10.98	19.35	23.67	AV
2	5148.500	52.97	54.00	-1.03	28.53	24.44	AV
3	5150.000	51.77	54.00	-2.23	27.33	24.44	AV
! 4	5187.000	103.54	54.00	49.54	79.03	24.51	AV
5	5350.000	46.43	54.00	-7.57	21.63	24.80	AV
6	5460.000	45.80	54.00	-8.20	20.81	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 46,5.23G,BW40M	Humidity (%RH)	58.0

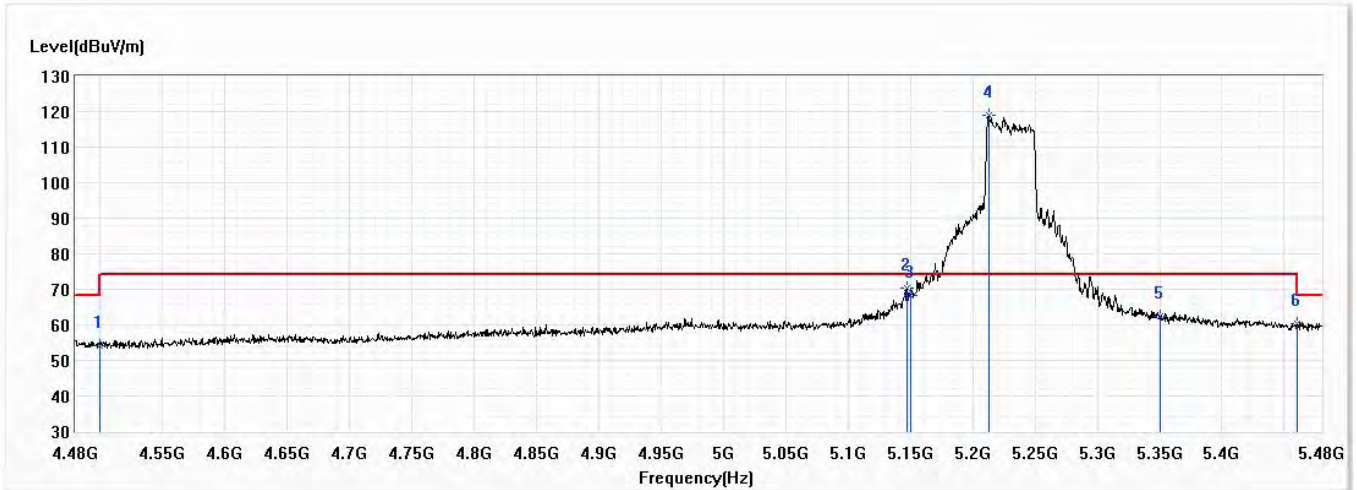


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.23	74.00	-19.77	30.56	23.67	PK
2	5147.500	70.33	74.00	-3.67	45.89	24.44	PK
3	5150.000	68.18	74.00	-5.82	43.74	24.44	PK
! 4	5213.000	118.85	74.00	44.85	94.30	24.55	PK
5	5350.000	62.47	74.00	-11.53	37.67	24.80	PK
6	5460.000	60.25	74.00	-13.75	35.26	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 46,5.23G,BW40M	Humidity (%RH)	58.0

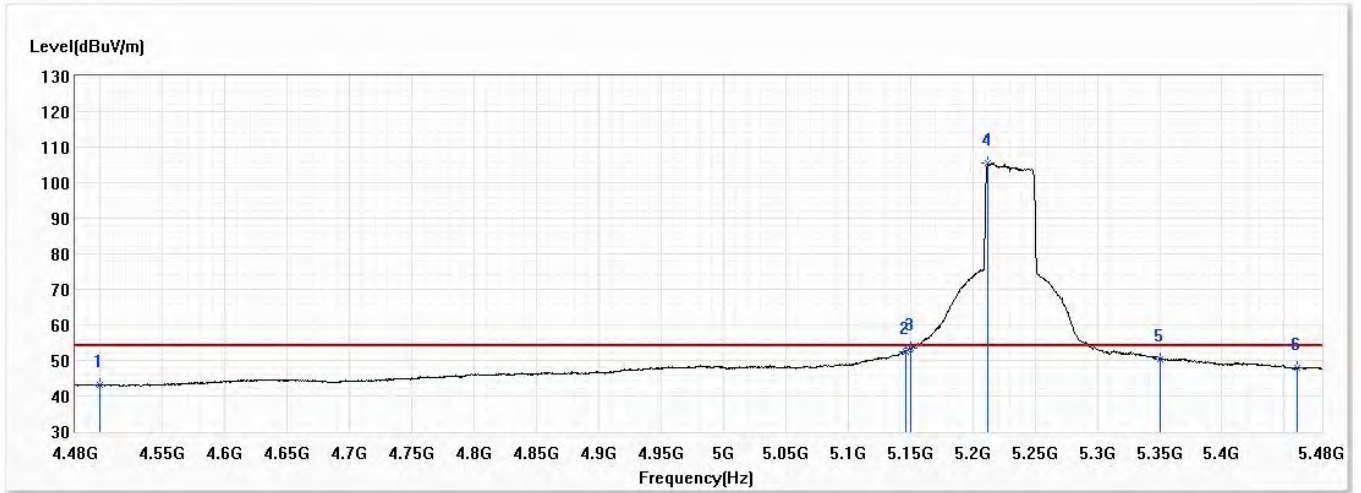


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.11	54.00	-10.89	19.44	23.67	AV
2	5146.000	52.49	54.00	-1.51	28.05	24.44	AV
3	5150.000	53.33	54.00	-0.67	28.89	24.44	AV
! 4	5212.500	105.52	54.00	51.52	80.97	24.55	AV
5	5350.000	50.42	54.00	-3.58	25.62	24.80	AV
6	5460.000	47.88	54.00	-6.12	22.89	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 46,5.23G,BW40M	Humidity (%RH)	58.0

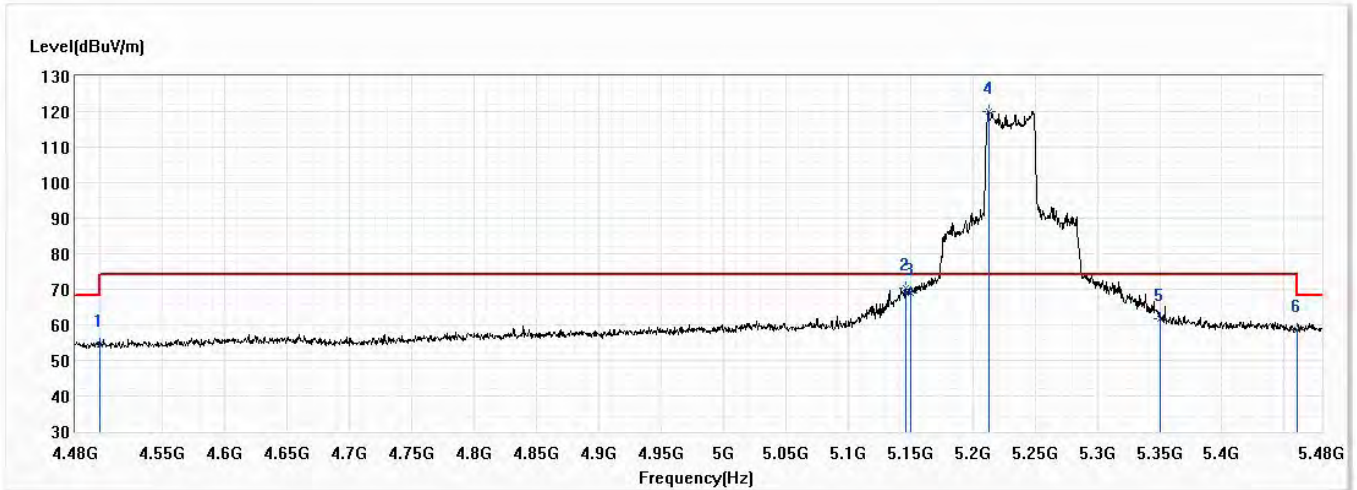


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.50	74.00	-19.50	30.83	23.67	PK
2	5146.500	70.41	74.00	-3.59	45.97	24.44	PK
3	5150.000	68.95	74.00	-5.05	44.51	24.44	PK
! 4	5213.000	119.91	74.00	45.91	95.36	24.55	PK
5	5350.000	61.68	74.00	-12.32	36.88	24.80	PK
6	5460.000	58.60	74.00	-15.40	33.61	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/1
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 46,5.23G,BW40M	Humidity (%RH)	58.0

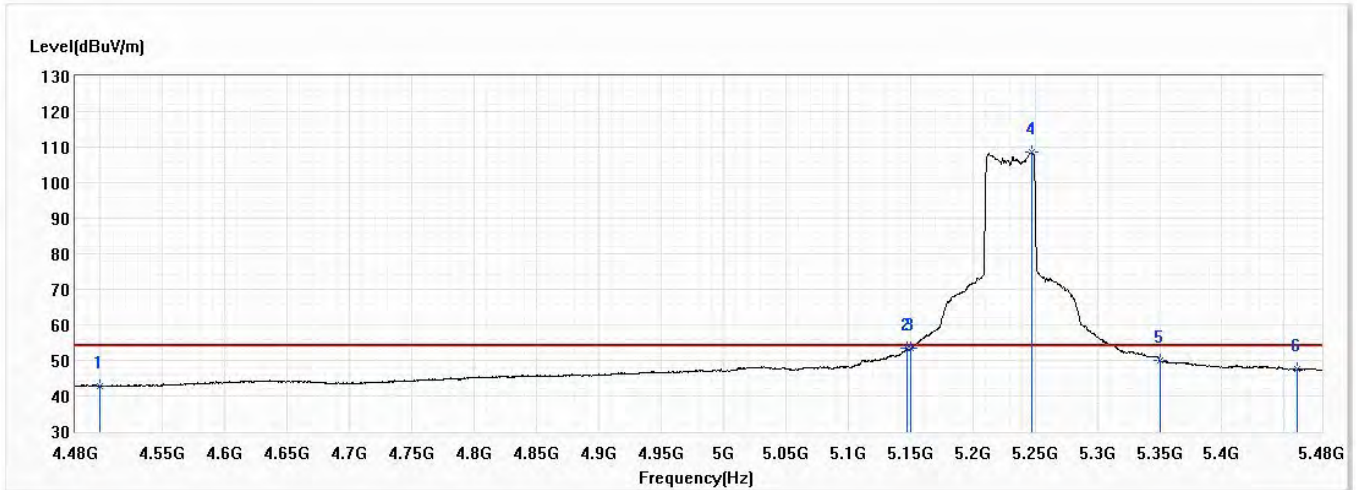


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.73	54.00	-11.27	19.06	23.67	AV
2	5147.500	53.45	54.00	-0.55	29.01	24.44	AV
3	5150.000	53.56	54.00	-0.44	29.12	24.44	AV
! 4	5247.500	108.69	54.00	54.69	84.07	24.62	AV
5	5350.000	49.90	54.00	-4.10	25.10	24.80	AV
6	5460.000	47.44	54.00	-6.56	22.45	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 42,5.21G,BW80M	Humidity (%RH)	58.0

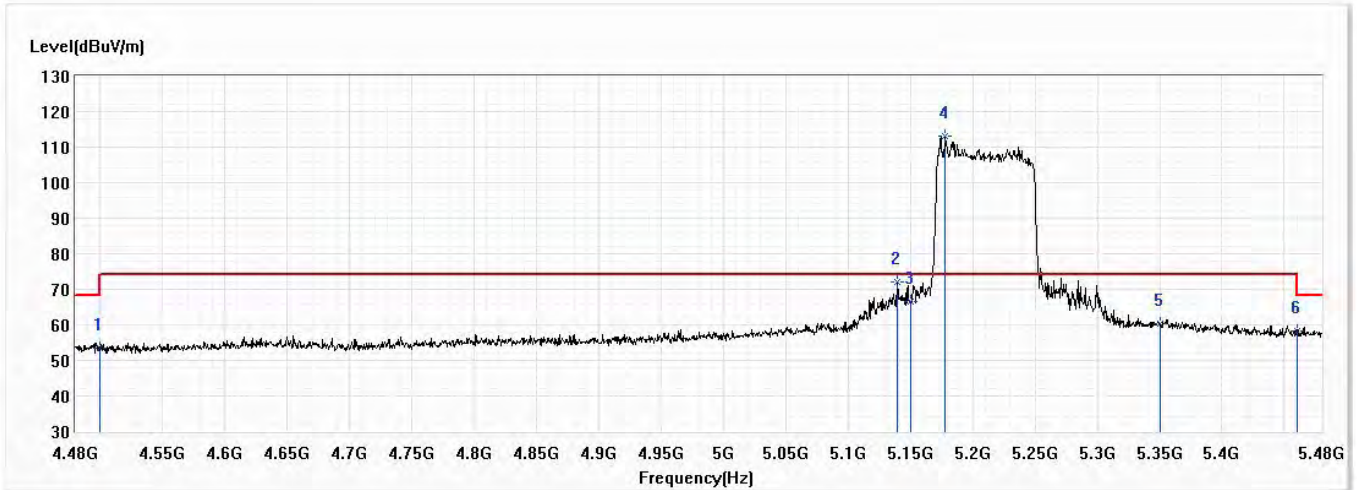


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.41	74.00	-20.59	29.74	23.67	PK
2	5139.500	72.04	74.00	-1.96	47.62	24.42	PK
3	5150.000	66.66	74.00	-7.34	42.22	24.44	PK
! 4	5178.000	113.10	74.00	39.10	88.60	24.50	PK
5	5350.000	60.50	74.00	-13.50	35.70	24.80	PK
6	5460.000	58.17	74.00	-15.83	33.18	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 42,5.21G,BW80M	Humidity (%RH)	58.0

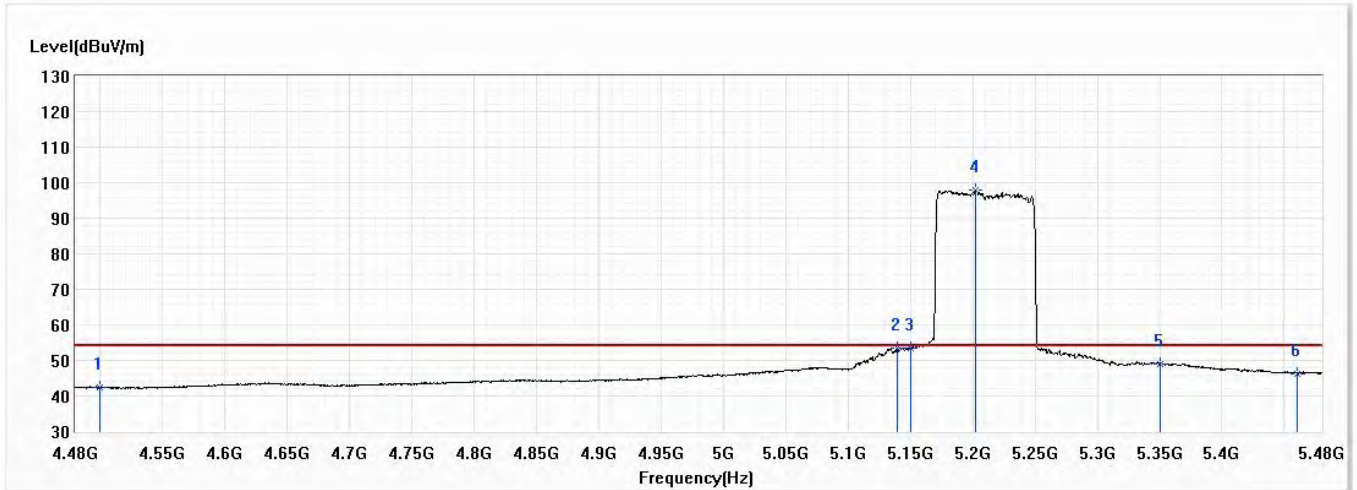


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.41	54.00	-11.59	18.74	23.67	AV
2	5139.000	53.46	54.00	-0.54	29.04	24.42	AV
3	5150.000	53.57	54.00	-0.43	29.13	24.44	AV
! 4	5202.500	97.78	54.00	43.78	73.25	24.53	AV
5	5350.000	49.10	54.00	-4.90	24.30	24.80	AV
6	5460.000	46.29	54.00	-7.71	21.30	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 42,5.21G,BW80M	Humidity (%RH)	58.0

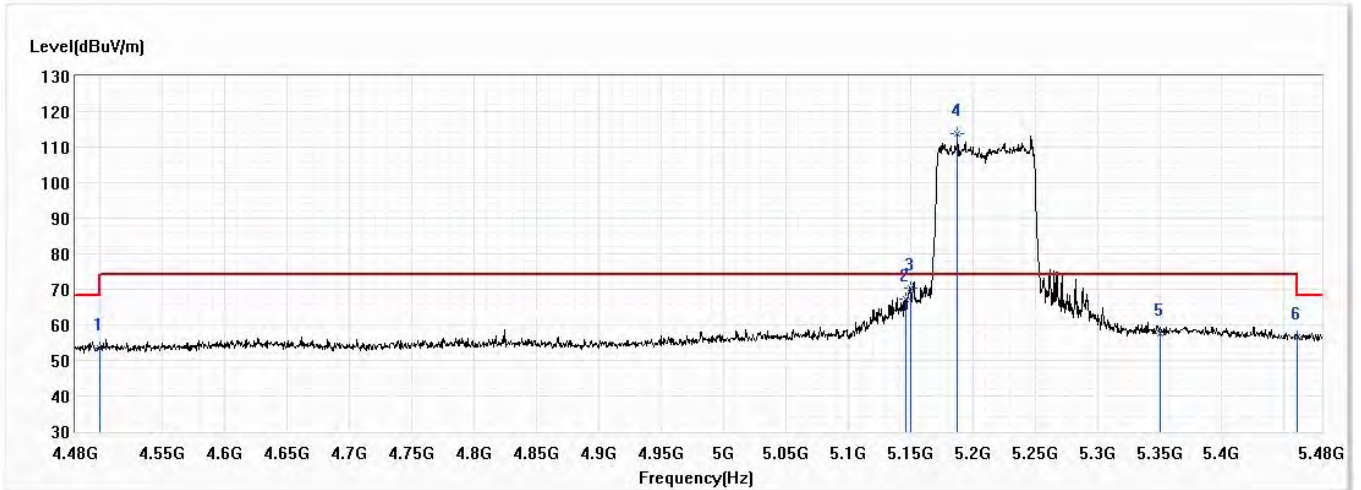


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.49	74.00	-20.51	29.82	23.67	PK
2	5146.500	67.23	74.00	-6.77	42.79	24.44	PK
3	5150.000	70.19	74.00	-3.81	45.75	24.44	PK
! 4	5188.000	113.86	74.00	39.86	89.35	24.51	PK
5	5350.000	57.69	74.00	-16.31	32.89	24.80	PK
6	5460.000	56.54	74.00	-17.46	31.55	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 42,5.21G,BW80M	Humidity (%RH)	58.0

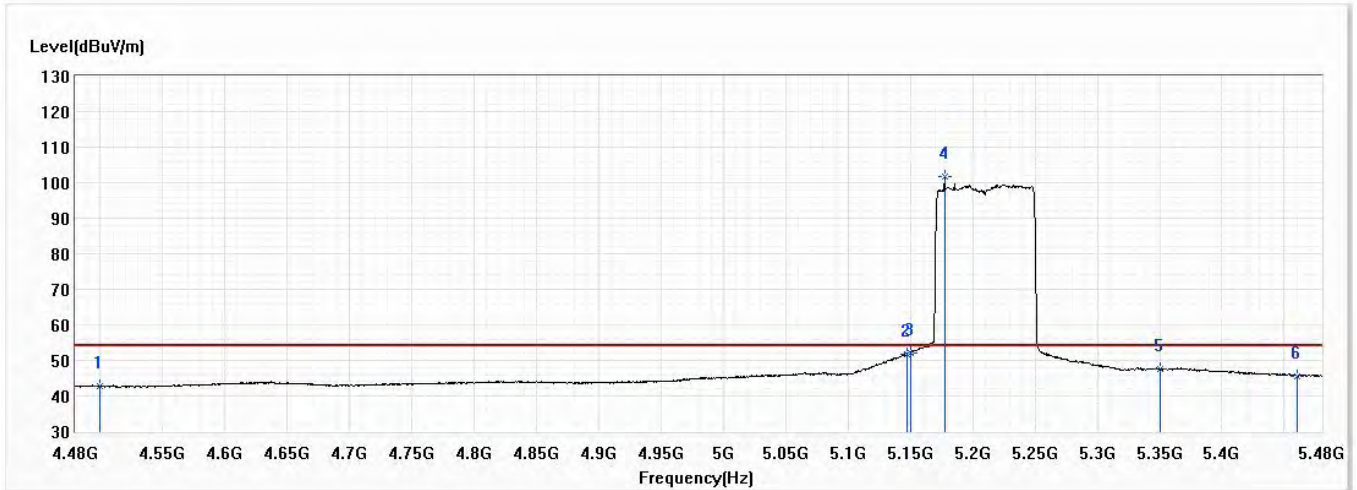


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.73	54.00	-11.27	19.06	23.67	AV
2	5147.500	51.87	54.00	-2.13	27.43	24.44	AV
3	5150.000	52.19	54.00	-1.81	27.75	24.44	AV
! 4	5177.500	101.58	54.00	47.58	77.08	24.50	AV
5	5350.000	47.43	54.00	-6.57	22.63	24.80	AV
6	5460.000	45.66	54.00	-8.34	20.67	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 52,5.26G,BW20M	Humidity (%RH)	58.0

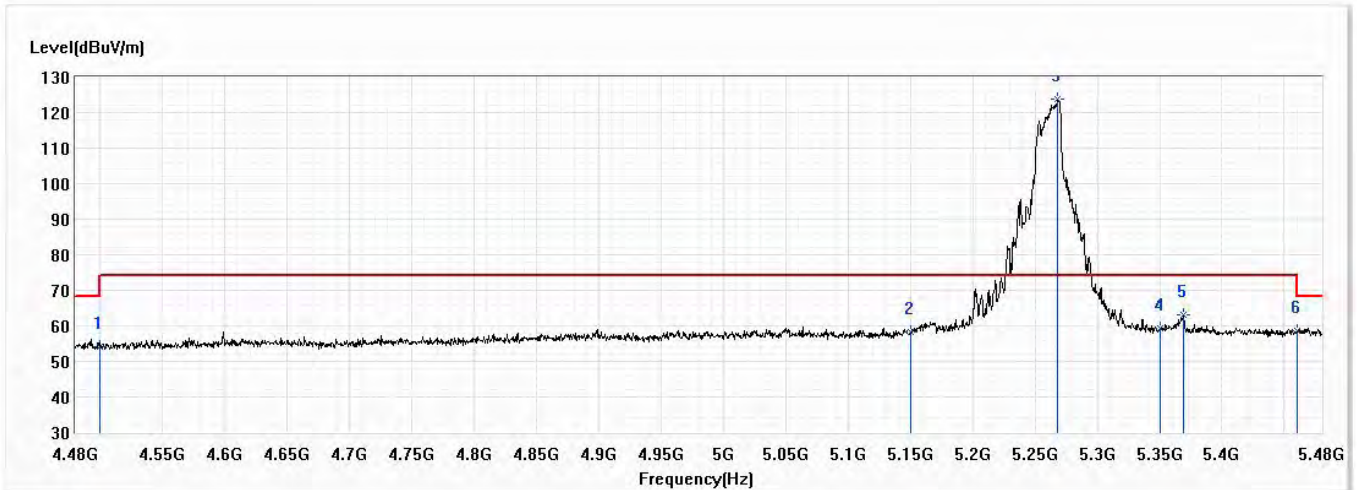


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.28	74.00	-19.72	30.61	23.67	PK
2	5150.000	58.21	74.00	-15.79	33.77	24.44	PK
! 3	5268.500	123.67	74.00	49.67	99.02	24.65	PK
4	5350.000	59.36	74.00	-14.64	34.56	24.80	PK
5	5369.500	62.94	74.00	-11.06	38.11	24.83	PK
6	5460.000	58.64	74.00	-15.36	33.65	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 52,5.26G,BW20M	Humidity (%RH)	58.0

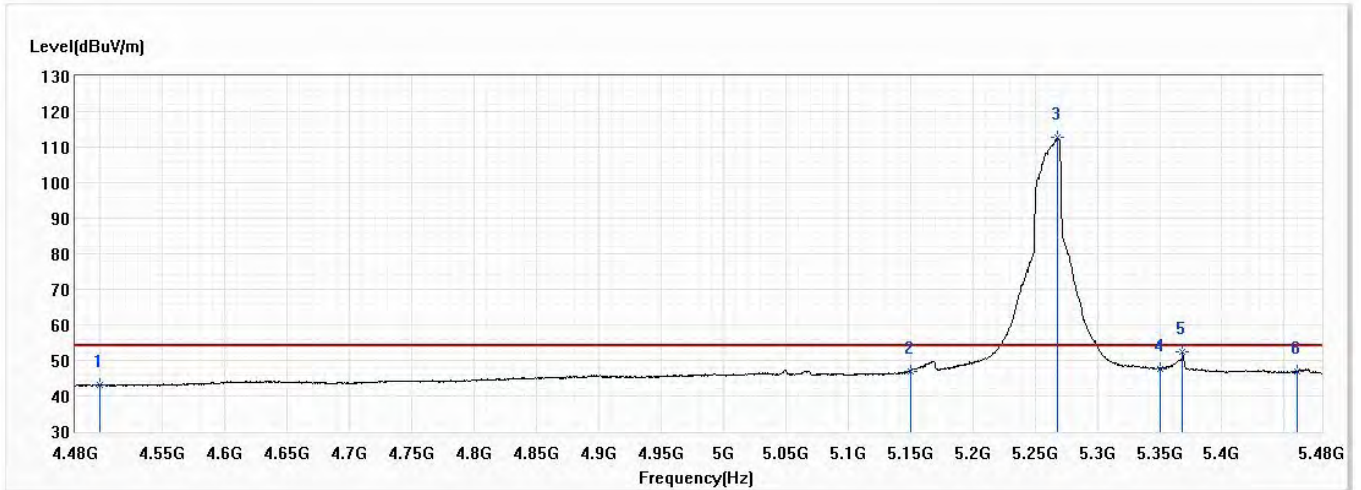


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.94	54.00	-11.06	19.27	23.67	AV
2	5150.000	46.99	54.00	-7.01	22.55	24.44	AV
! 3	5268.500	112.59	54.00	58.59	87.94	24.65	AV
4	5350.000	47.66	54.00	-6.34	22.86	24.80	AV
5	5368.500	52.31	54.00	-1.69	27.48	24.83	AV
6	5460.000	46.83	54.00	-7.17	21.84	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 52,5.26G,BW20M	Humidity (%RH)	58.0

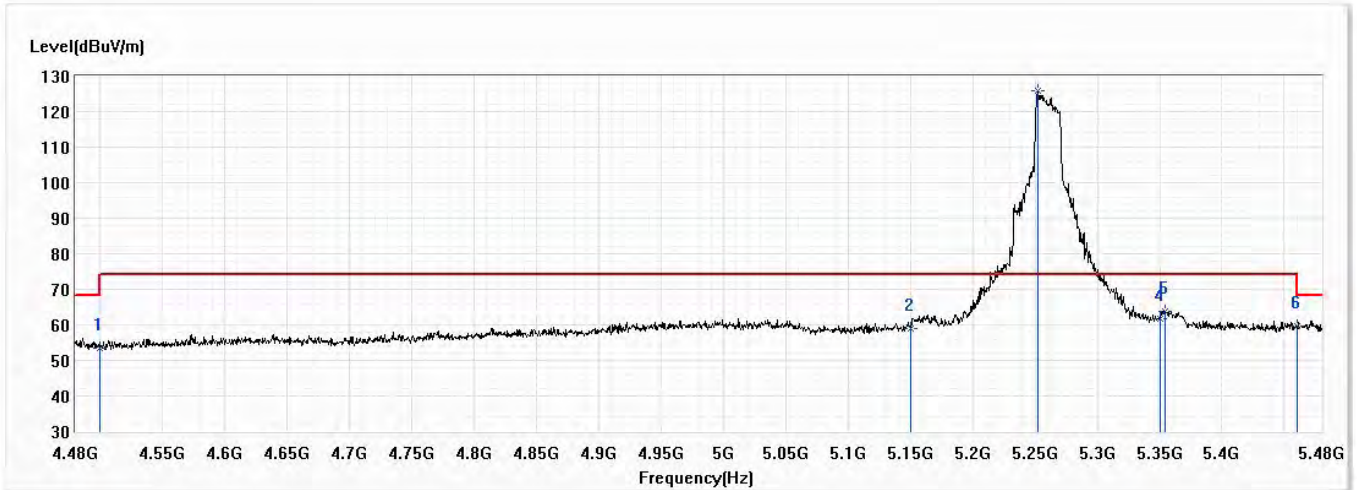


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.52	74.00	-20.48	29.85	23.67	PK
2	5150.000	59.04	74.00	-14.96	34.60	24.44	PK
! 3	5252.500	125.85	74.00	51.85	101.23	24.62	PK
4	5350.000	61.77	74.00	-12.23	36.97	24.80	PK
5	5354.000	63.90	74.00	-10.10	39.10	24.80	PK
6	5460.000	59.59	74.00	-14.41	34.60	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 52,5.26G,BW20M	Humidity (%RH)	58.0

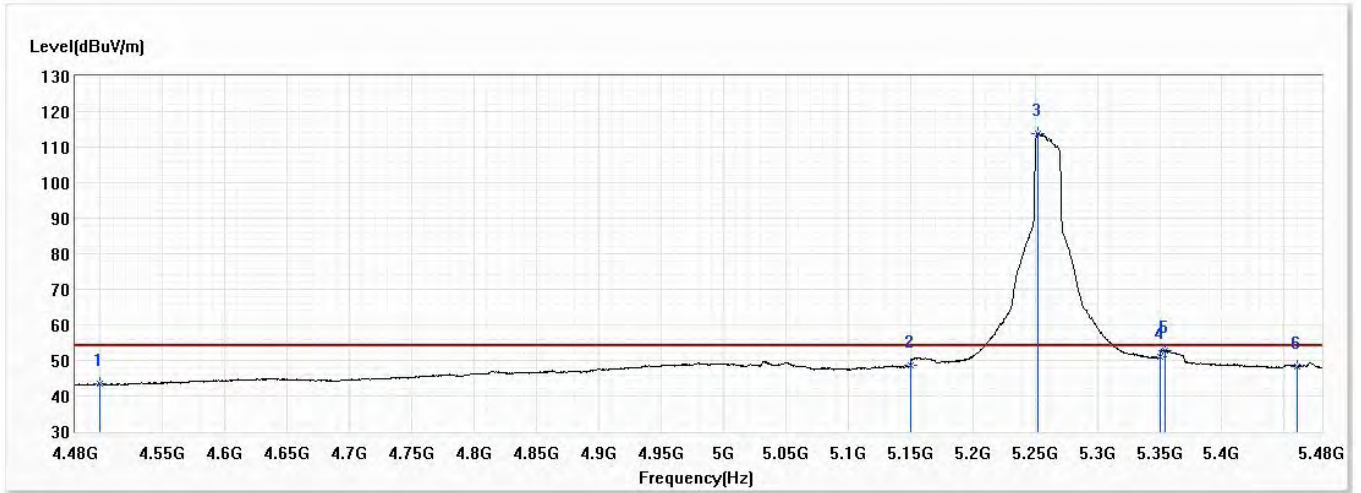


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.30	54.00	-10.70	19.63	23.67	AV
2	5150.000	48.70	54.00	-5.30	24.26	24.44	AV
! 3	5252.000	113.90	54.00	59.90	89.28	24.62	AV
4	5350.000	51.02	54.00	-2.98	26.22	24.80	AV
5	5354.000	52.92	54.00	-1.08	28.12	24.80	AV
6	5460.000	48.42	54.00	-5.58	23.43	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 60,5.3G,BW20M	Humidity (%RH)	58.0

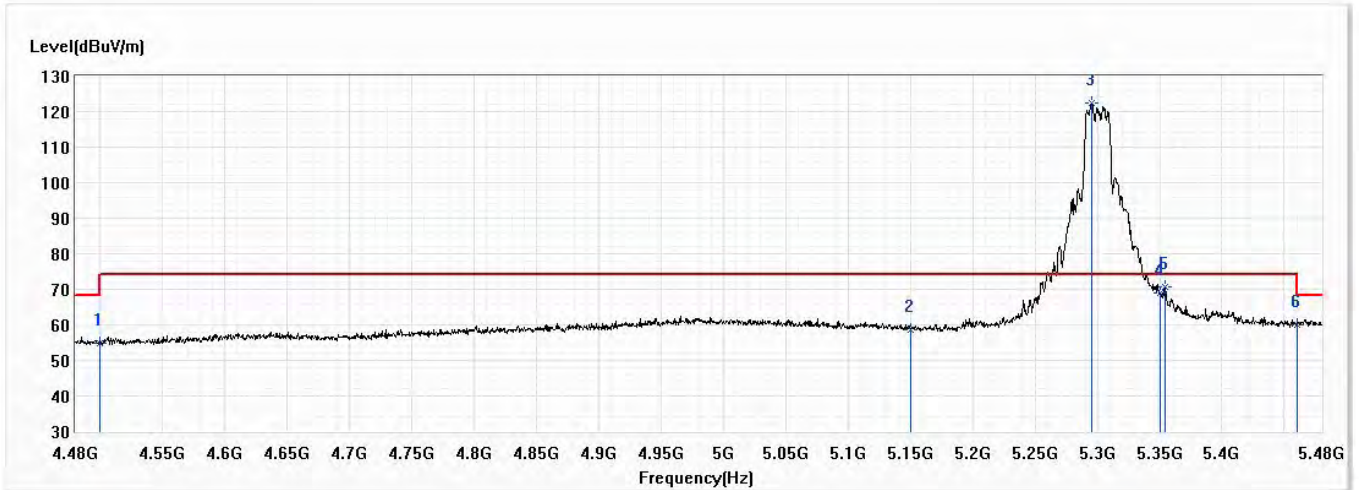


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.81	74.00	-19.19	31.14	23.67	PK
2	5150.000	58.65	74.00	-15.35	34.21	24.44	PK
! 3	5295.500	122.29	74.00	48.29	97.58	24.71	PK
4	5350.000	69.08	74.00	-4.92	44.28	24.80	PK
5	5354.500	70.81	74.00	-3.19	46.01	24.80	PK
6	5460.000	60.05	74.00	-13.95	35.06	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 60,5.3G,BW20M	Humidity (%RH)	58.0

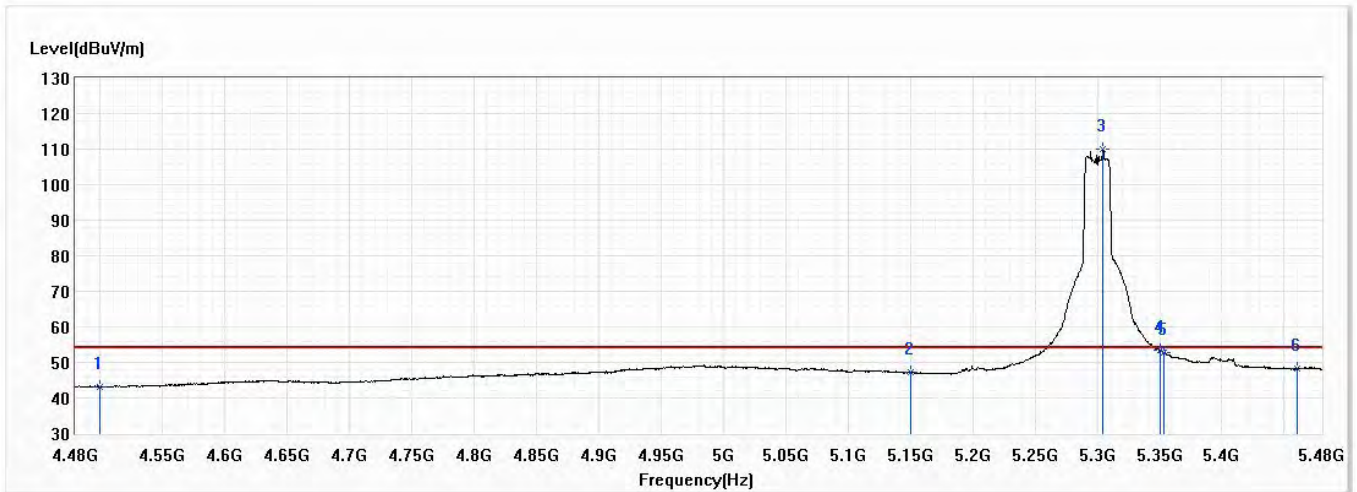


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.25	54.00	-10.75	19.58	23.67	AV
2	5150.000	47.18	54.00	-6.82	22.74	24.44	AV
! 3	5304.500	109.88	54.00	55.88	85.17	24.71	AV
4	5350.000	53.39	54.00	-0.61	28.59	24.80	AV
5	5353.000	52.91	54.00	-1.09	28.11	24.80	AV
6	5460.000	48.21	54.00	-5.79	23.22	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 60,5.3G,BW20M	Humidity (%RH)	58.0

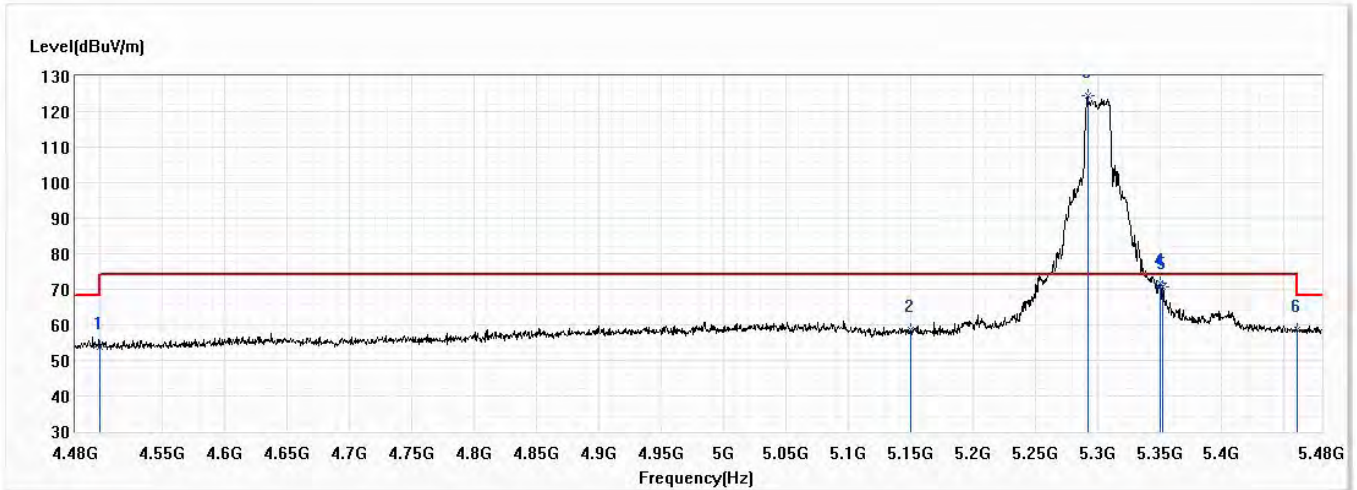


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.86	74.00	-20.14	30.19	23.67	PK
2	5150.000	58.69	74.00	-15.31	34.25	24.44	PK
! 3	5292.500	124.39	74.00	50.39	99.70	24.69	PK
4	5350.000	71.78	74.00	-2.22	46.98	24.80	PK
5	5352.500	70.57	74.00	-3.43	45.77	24.80	PK
6	5460.000	58.63	74.00	-15.37	33.64	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 60,5.3G,BW20M	Humidity (%RH)	58.0

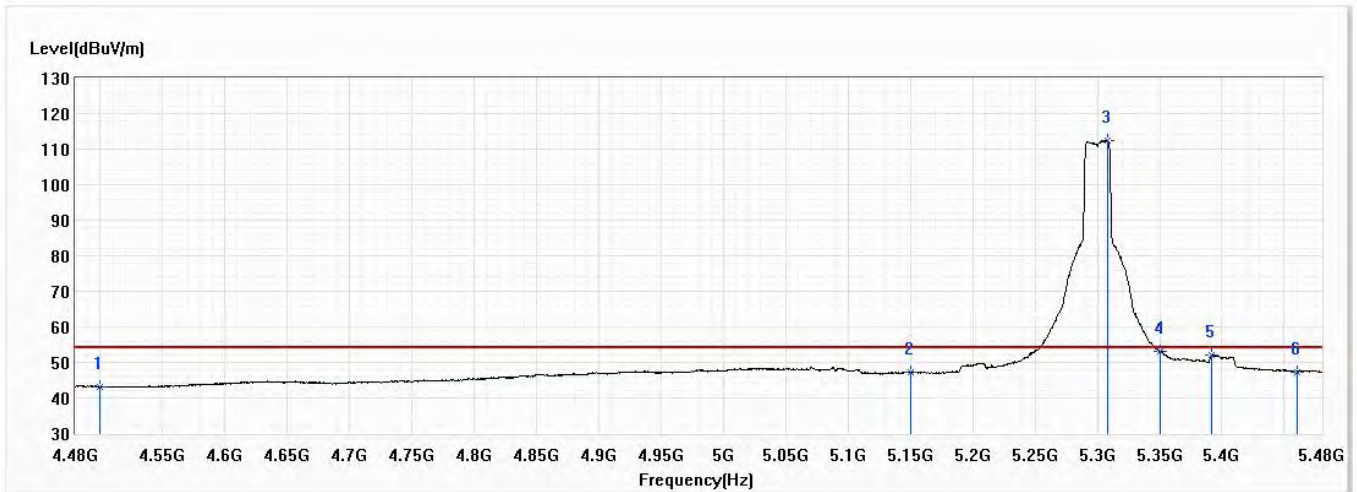


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.19	54.00	-10.81	19.52	23.67	AV
2	5150.000	47.31	54.00	-6.69	22.87	24.44	AV
! 3	5308.000	112.44	54.00	58.44	87.72	24.72	AV
4	5350.000	53.14	54.00	-0.86	28.34	24.80	AV
5	5391.500	52.07	54.00	-1.93	27.20	24.87	AV
6	5460.000	47.32	54.00	-6.68	22.33	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 64,5.32G,BW20M	Humidity (%RH)	58.0

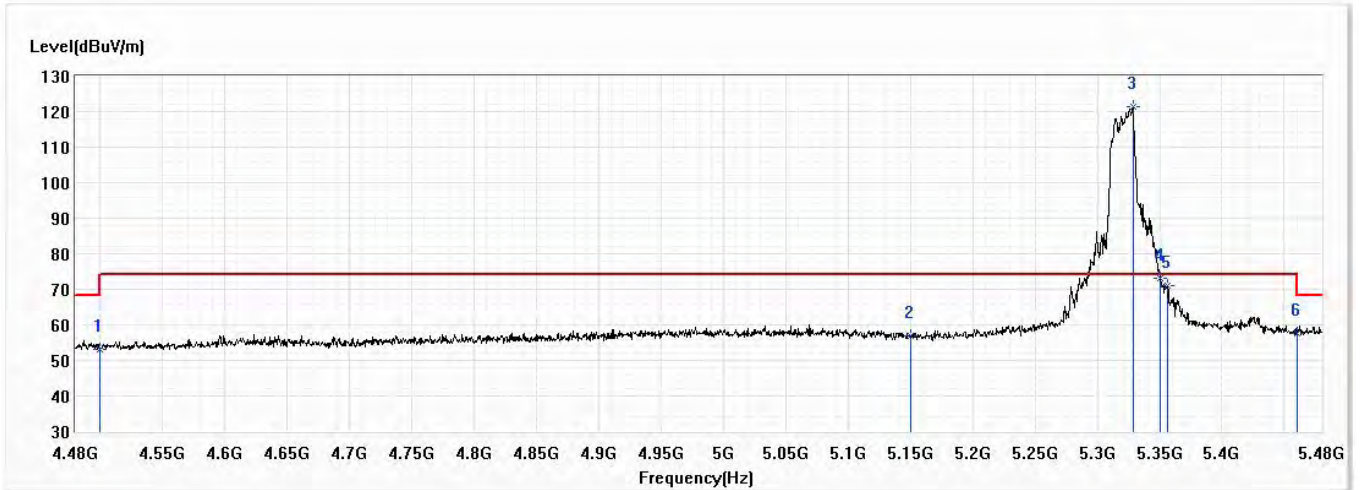


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.17	74.00	-20.83	29.50	23.67	PK
2	5150.000	56.85	74.00	-17.15	32.41	24.44	PK
! 3	5328.500	121.25	74.00	47.25	96.48	24.77	PK
4	5350.000	72.94	74.00	-1.06	48.14	24.80	PK
5	5356.000	71.11	74.00	-2.89	46.30	24.81	PK
6	5460.000	57.50	74.00	-16.50	32.51	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 64,5.32G,BW20M	Humidity (%RH)	58.0

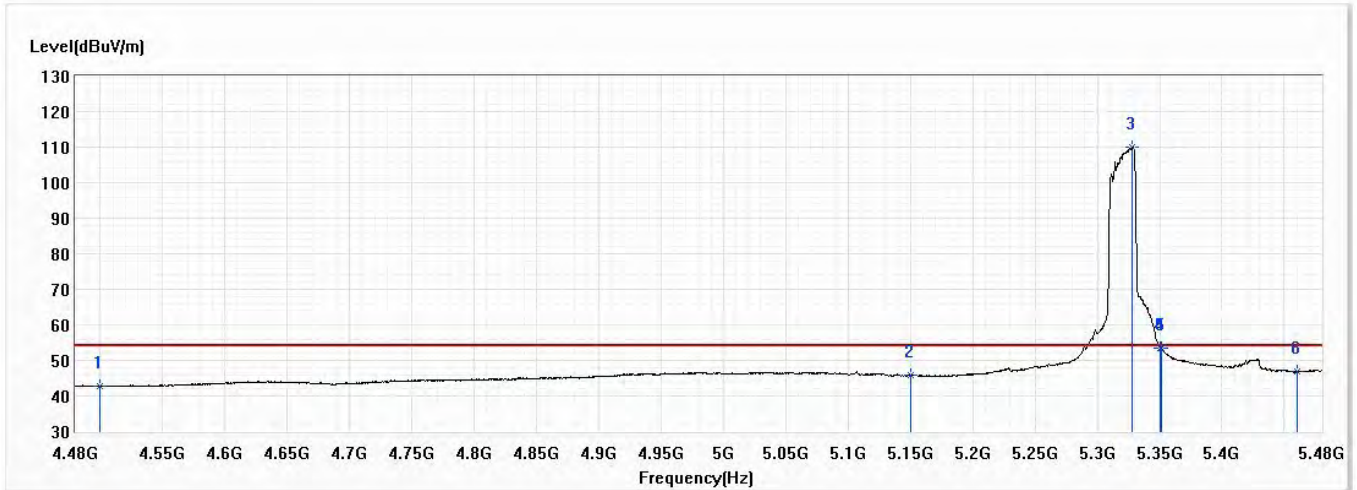


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.79	54.00	-11.21	19.12	23.67	AV
2	5150.000	45.88	54.00	-8.12	21.44	24.44	AV
! 3	5327.500	109.88	54.00	55.88	85.11	24.77	AV
4	5350.000	53.53	54.00	-0.47	28.73	24.80	AV
5	5351.000	53.61	54.00	-0.39	28.81	24.80	AV
6	5460.000	46.90	54.00	-7.10	21.91	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 64,5.32G,BW20M	Humidity (%RH)	58.0

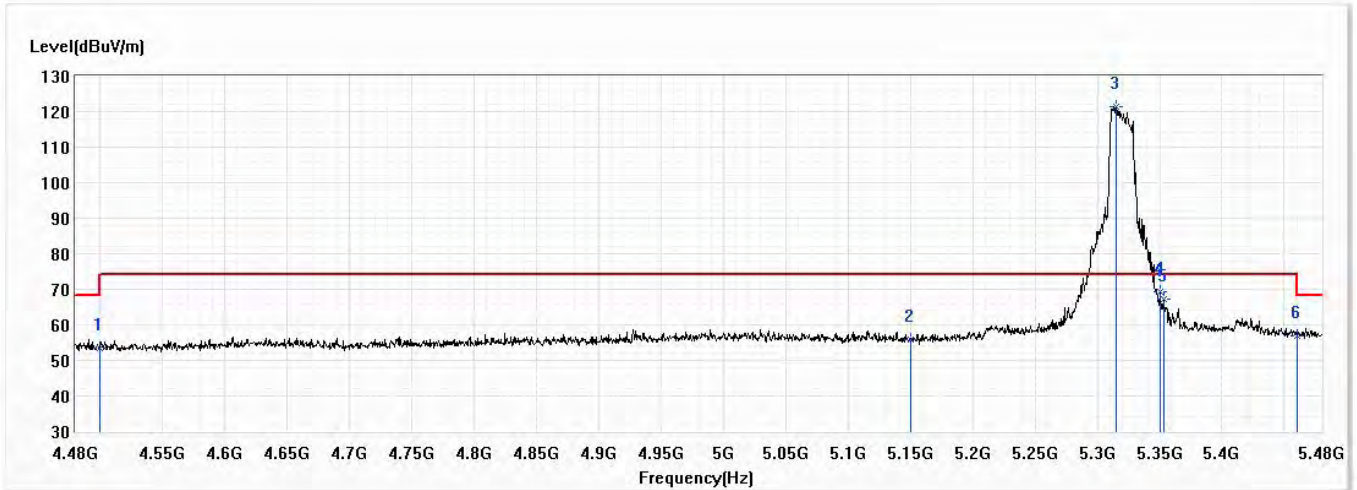


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.45	74.00	-20.55	29.78	23.67	PK
2	5150.000	55.98	74.00	-18.02	31.54	24.44	PK
! 3	5315.500	121.36	74.00	47.36	96.62	24.74	PK
4	5350.000	69.38	74.00	-4.62	44.58	24.80	PK
5	5353.000	67.27	74.00	-6.73	42.47	24.80	PK
6	5460.000	57.05	74.00	-16.95	32.06	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 64,5.32G,BW20M	Humidity (%RH)	58.0

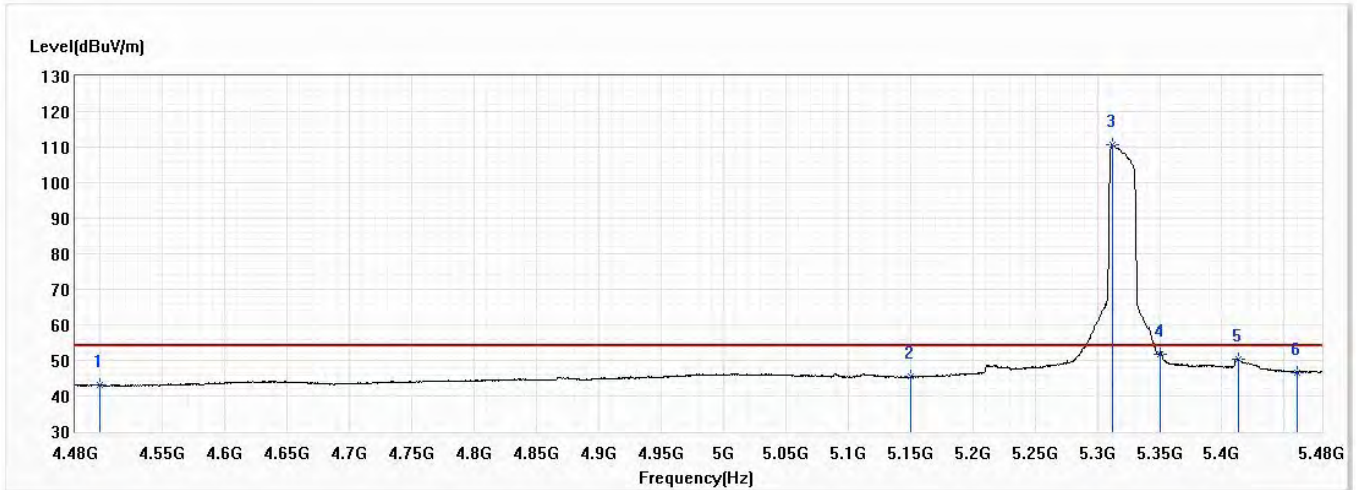


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.99	54.00	-11.01	19.32	23.67	AV
2	5150.000	45.39	54.00	-8.61	20.95	24.44	AV
! 3	5312.000	110.72	54.00	56.72	85.99	24.73	AV
4	5350.000	51.85	54.00	-2.15	27.05	24.80	AV
5	5413.000	50.25	54.00	-3.75	25.34	24.91	AV
6	5460.000	46.64	54.00	-7.36	21.65	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 54,5.27G,BW40M	Humidity (%RH)	58.0

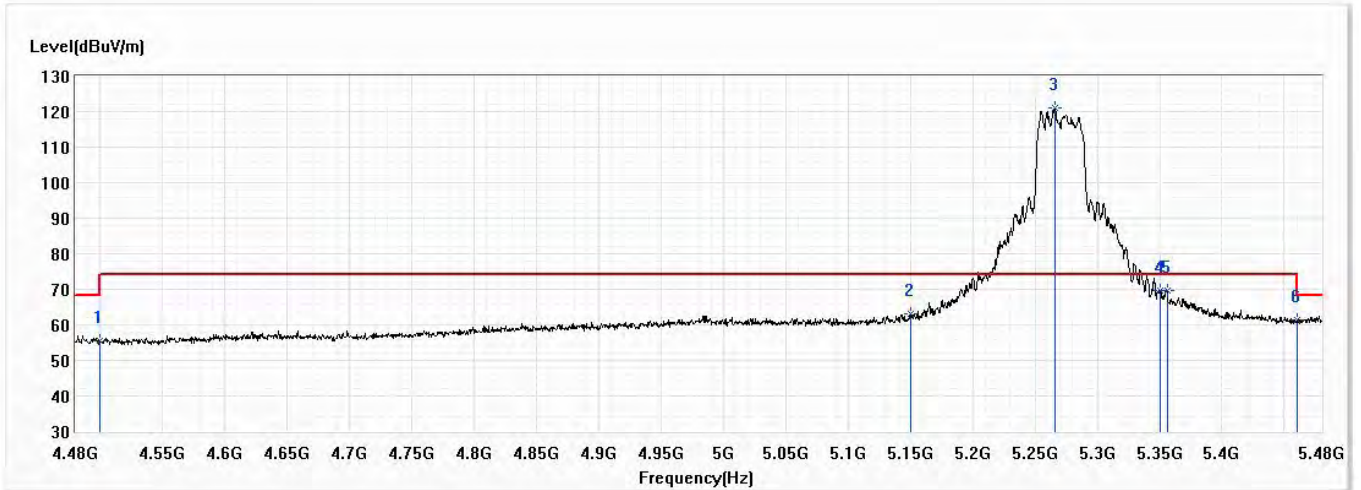


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	55.66	74.00	-18.34	31.99	23.67	PK
2	5150.000	63.17	74.00	-10.83	38.73	24.44	PK
! 3	5266.000	120.98	74.00	46.98	96.33	24.65	PK
4	5350.000	69.52	74.00	-4.48	44.72	24.80	PK
5	5356.000	69.67	74.00	-4.33	44.86	24.81	PK
6	5460.000	61.54	74.00	-12.46	36.55	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 54,5.27G,BW40M	Humidity (%RH)	58.0

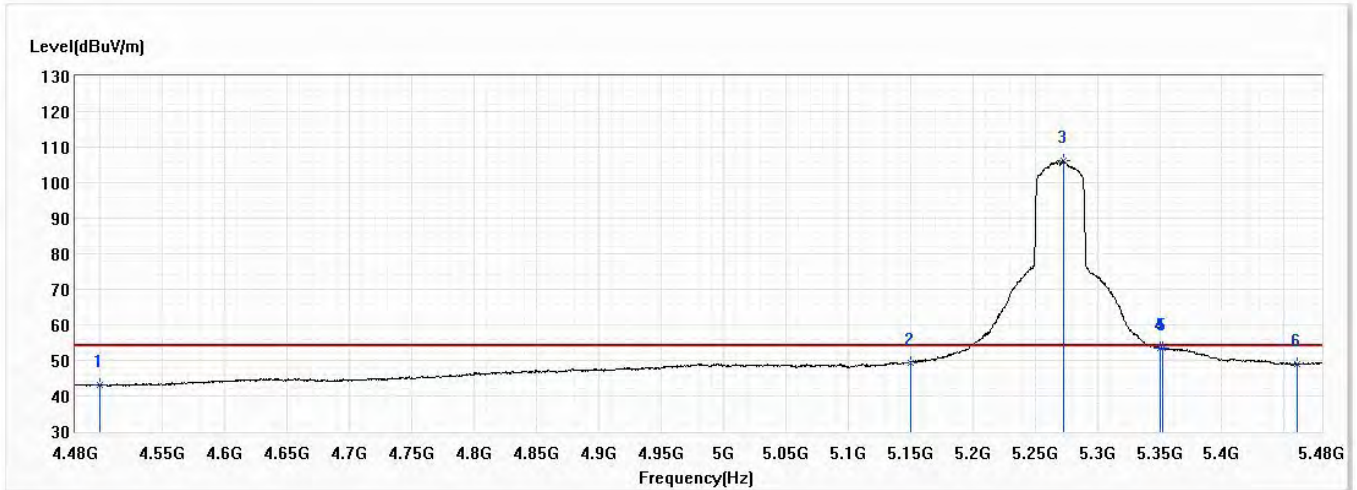


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	43.20	54.00	-10.80	19.53	23.67	AV
2	5150.000	49.30	54.00	-4.70	24.86	24.44	AV
! 3	5272.500	106.20	54.00	52.20	81.55	24.65	AV
4	5350.000	53.46	54.00	-0.54	28.66	24.80	AV
5	5352.500	53.42	54.00	-0.58	28.62	24.80	AV
6	5460.000	48.81	54.00	-5.19	23.82	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 54,5.27G,BW40M	Humidity (%RH)	58.0

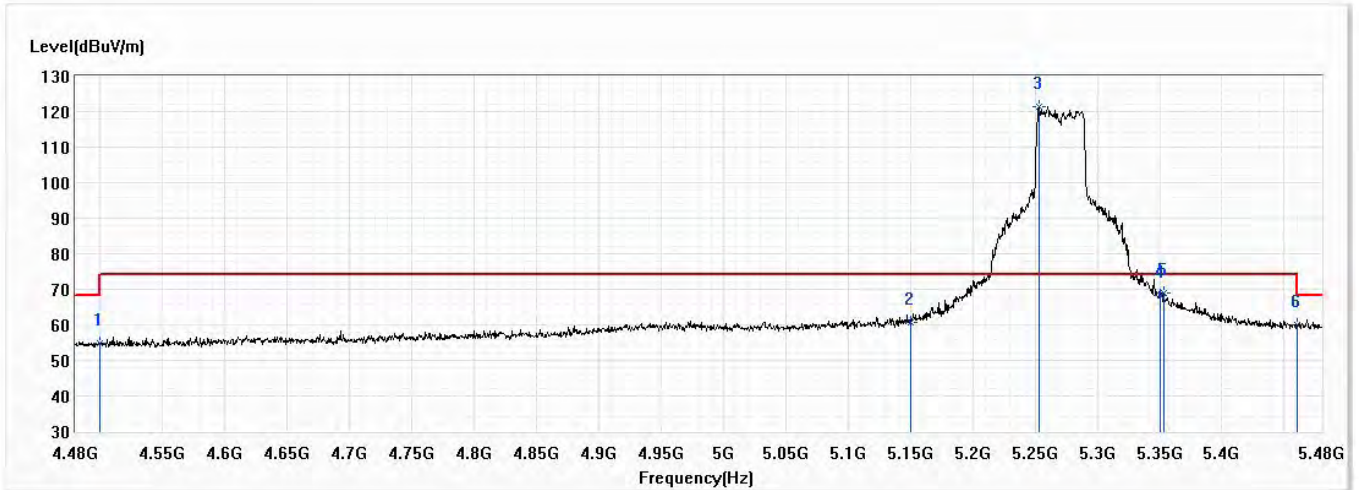


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.89	74.00	-19.11	31.22	23.67	PK
2	5150.000	60.68	74.00	-13.32	36.24	24.44	PK
! 3	5253.000	121.42	74.00	47.42	96.80	24.62	PK
4	5350.000	68.22	74.00	-5.78	43.42	24.80	PK
5	5353.000	68.89	74.00	-5.11	44.09	24.80	PK
6	5460.000	59.84	74.00	-14.16	34.85	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 54,5.27G,BW40M	Humidity (%RH)	58.0

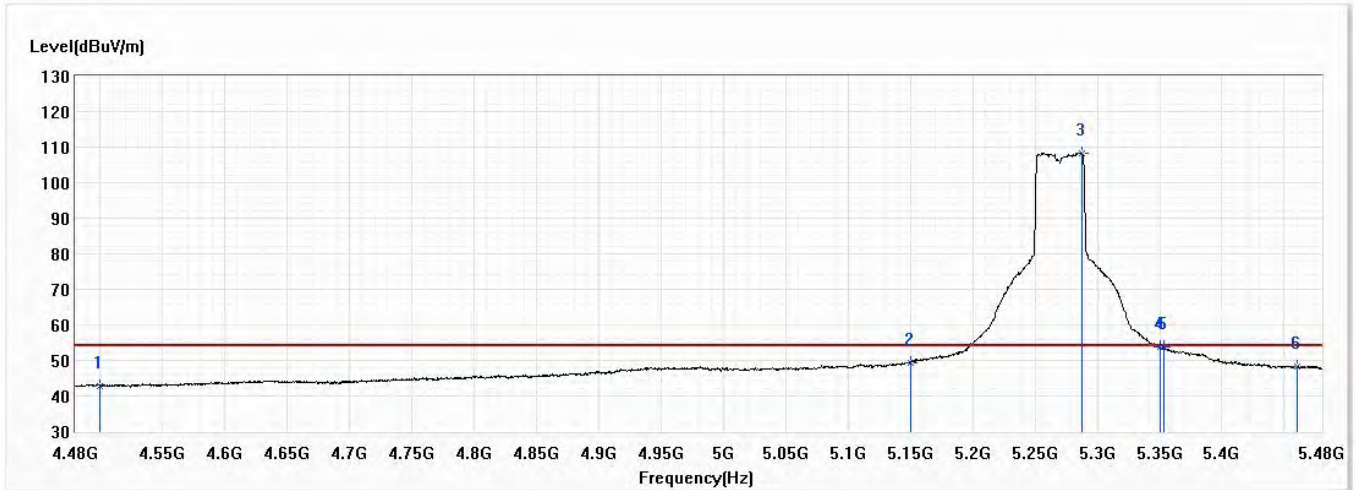


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.93	54.00	-11.07	19.26	23.67	AV
2	5150.000	49.43	54.00	-4.57	24.99	24.44	AV
! 3	5288.000	108.39	54.00	54.39	83.70	24.69	AV
4	5350.000	53.74	54.00	-0.26	28.94	24.80	AV
5	5353.000	53.76	54.00	-0.24	28.96	24.80	AV
6	5460.000	48.23	54.00	-5.77	23.24	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 62,5.31G,BW40M	Humidity (%RH)	58.0

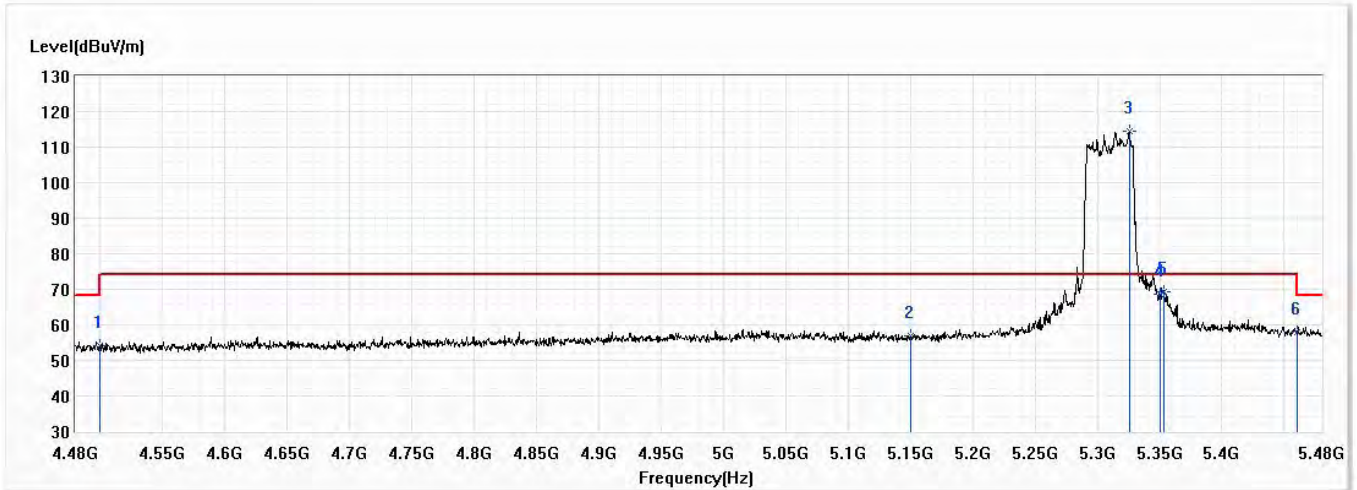


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.24	74.00	-19.76	30.57	23.67	PK
2	5150.000	56.85	74.00	-17.15	32.41	24.44	PK
! 3	5325.500	114.46	74.00	40.46	89.70	24.76	PK
4	5350.000	68.66	74.00	-5.34	43.86	24.80	PK
5	5353.500	69.19	74.00	-4.81	44.39	24.80	PK
6	5460.000	57.78	74.00	-16.22	32.79	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 62,5.31G,BW40M	Humidity (%RH)	58.0

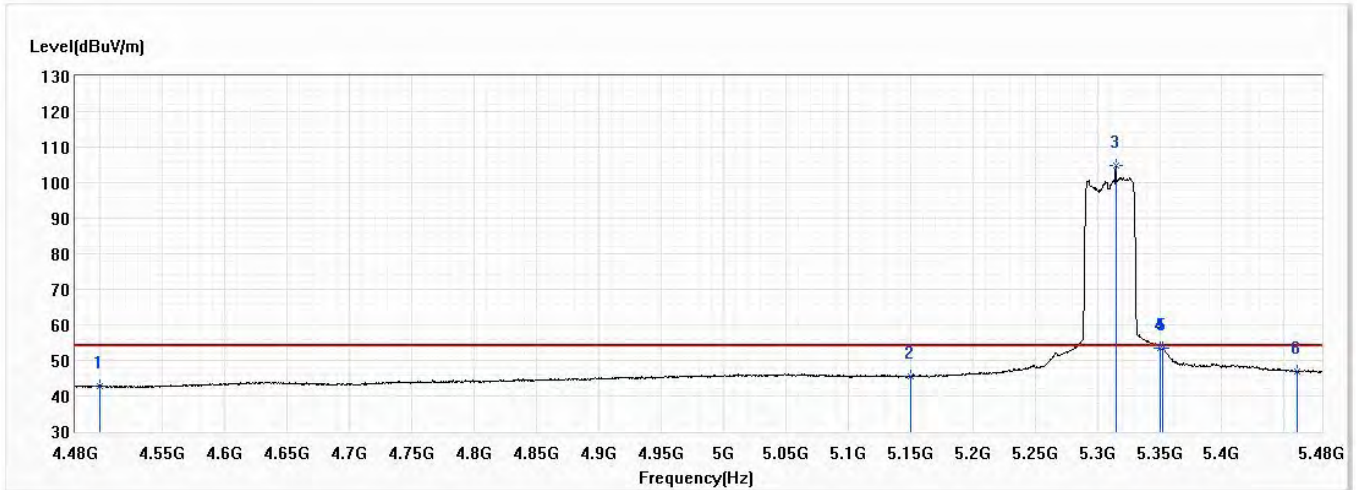


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.59	54.00	-11.41	18.92	23.67	AV
2	5150.000	45.39	54.00	-8.61	20.95	24.44	AV
! 3	5315.000	104.76	54.00	50.76	80.03	24.73	AV
4	5350.000	53.56	54.00	-0.44	28.76	24.80	AV
5	5352.500	53.44	54.00	-0.56	28.64	24.80	AV
6	5460.000	47.03	54.00	-6.97	22.04	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 62,5.31G,BW40M	Humidity (%RH)	58.0

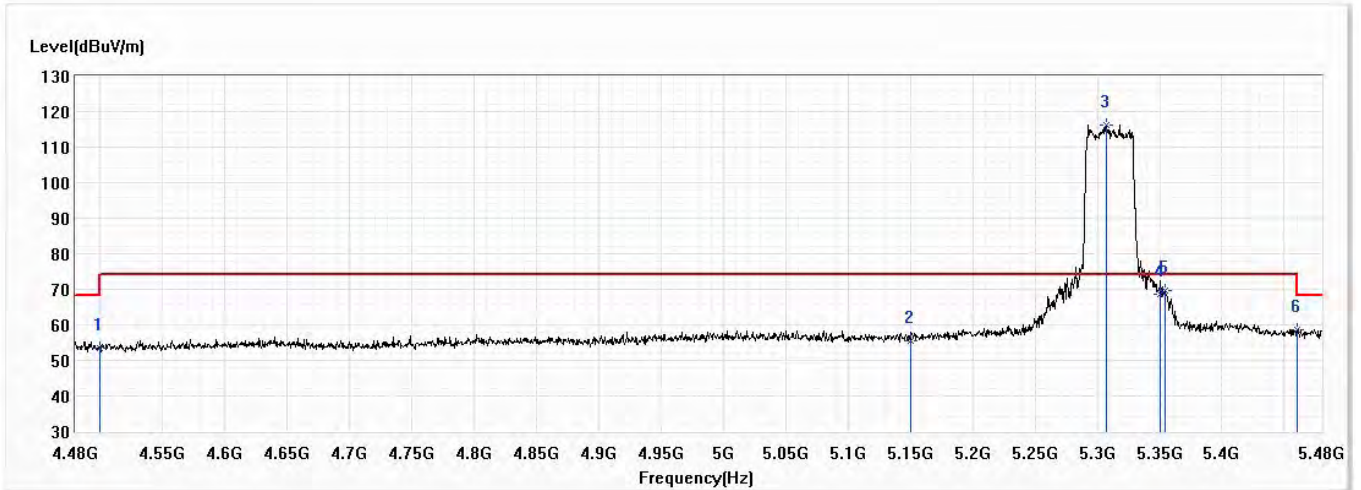


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.37	74.00	-20.63	29.70	23.67	PK
2	5150.000	55.52	74.00	-18.48	31.08	24.44	PK
! 3	5307.000	116.27	74.00	42.27	91.55	24.72	PK
4	5350.000	68.69	74.00	-5.31	43.89	24.80	PK
5	5354.000	69.58	74.00	-4.42	44.78	24.80	PK
6	5460.000	58.48	74.00	-15.52	33.49	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/2
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 62,5.31G,BW40M	Humidity (%RH)	58.0

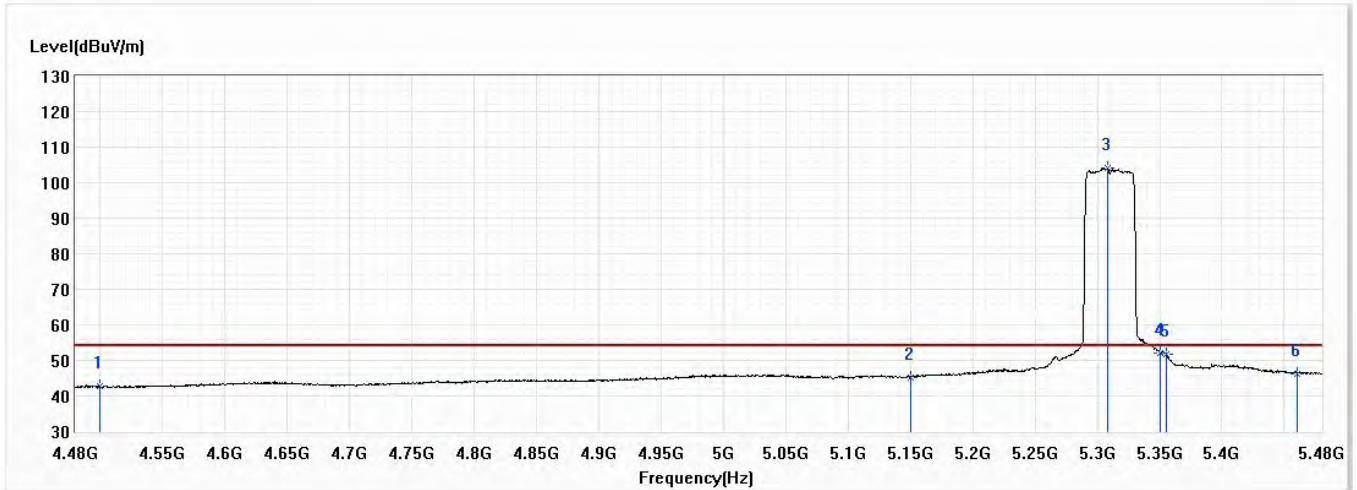


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.61	54.00	-11.39	18.94	23.67	AV
2	5150.000	45.34	54.00	-8.66	20.90	24.44	AV
! 3	5308.000	103.97	54.00	49.97	79.25	24.72	AV
4	5350.000	52.20	54.00	-1.80	27.40	24.80	AV
5	5355.000	51.65	54.00	-2.35	26.84	24.81	AV
6	5460.000	46.36	54.00	-7.64	21.37	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 58,5.29G,BW80M	Humidity (%RH)	58.0

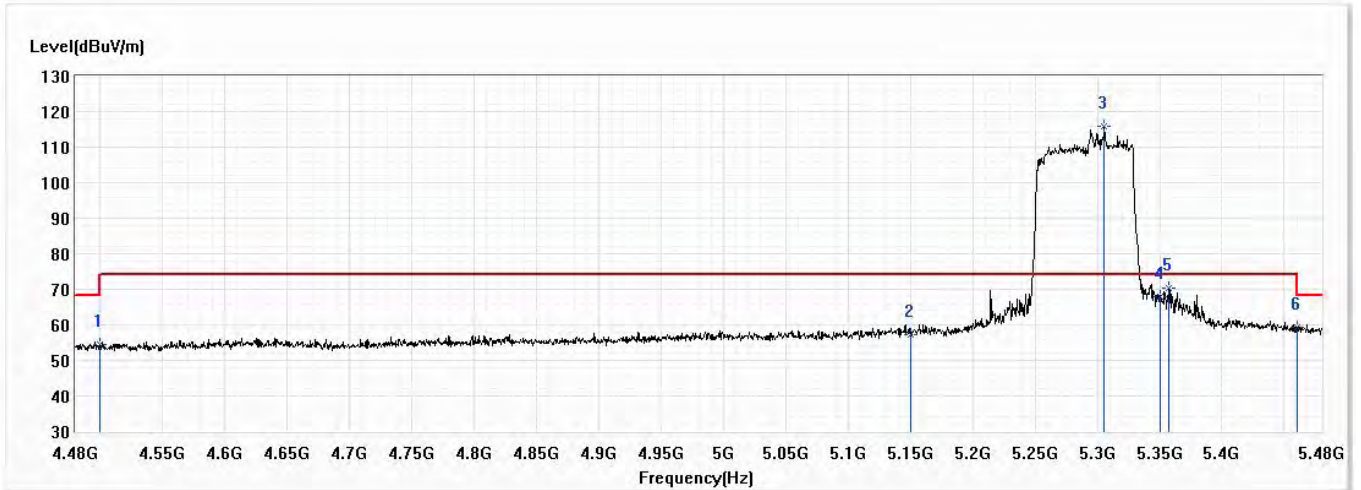


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.40	74.00	-19.60	30.73	23.67	PK
2	5150.000	57.38	74.00	-16.62	32.94	24.44	PK
! 3	5305.500	115.77	74.00	41.77	91.05	24.72	PK
4	5350.000	68.01	74.00	-5.99	43.21	24.80	PK
5	5357.000	70.44	74.00	-3.56	45.63	24.81	PK
6	5460.000	59.18	74.00	-14.82	34.19	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 58,5.29G,BW80M	Humidity (%RH)	58.0

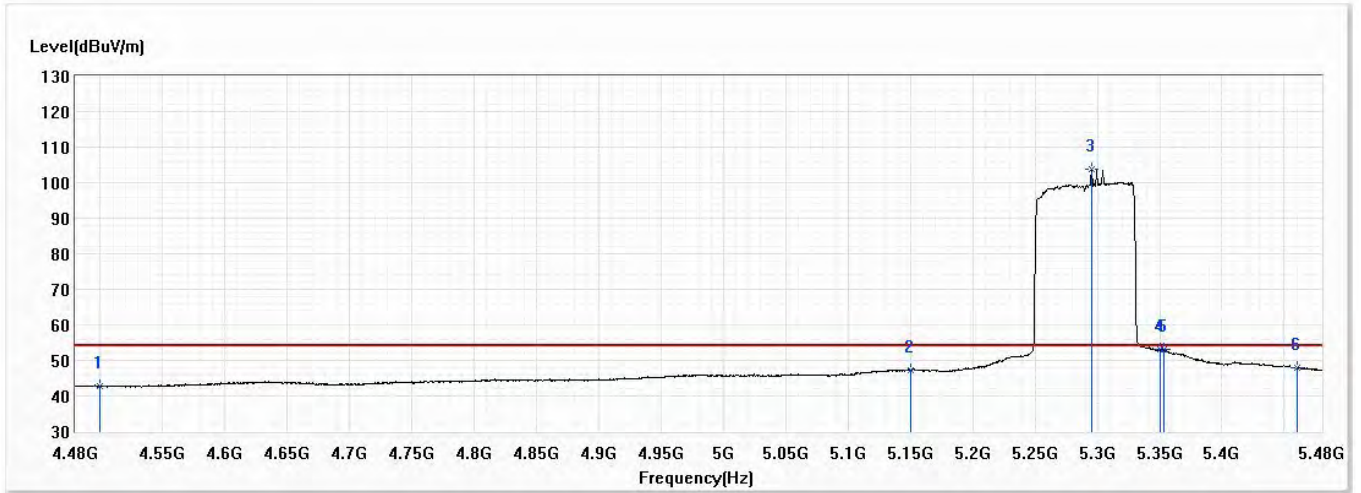


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.62	54.00	-11.38	18.95	23.67	AV
2	5150.000	47.36	54.00	-6.64	22.92	24.44	AV
! 3	5295.500	103.77	54.00	49.77	79.06	24.71	AV
4	5350.000	53.00	54.00	-1.00	28.20	24.80	AV
5	5353.000	53.15	54.00	-0.85	28.35	24.80	AV
6	5460.000	47.78	54.00	-6.22	22.79	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 58,5.29G,BW80M	Humidity (%RH)	58.0

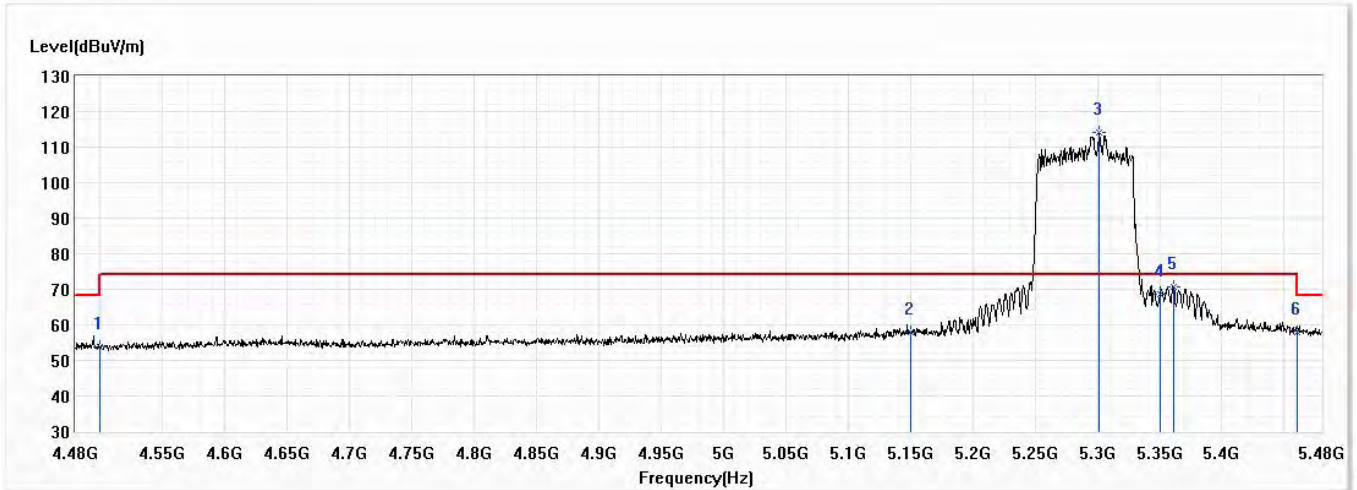


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.74	74.00	-20.26	30.07	23.67	PK
2	5150.000	58.03	74.00	-15.97	33.59	24.44	PK
! 3	5301.500	114.21	74.00	40.21	89.50	24.71	PK
4	5350.000	68.76	74.00	-5.24	43.96	24.80	PK
5	5361.000	70.73	74.00	-3.27	45.91	24.82	PK
6	5460.000	58.10	74.00	-15.90	33.11	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 58,5.29G,BW80M	Humidity (%RH)	58.0

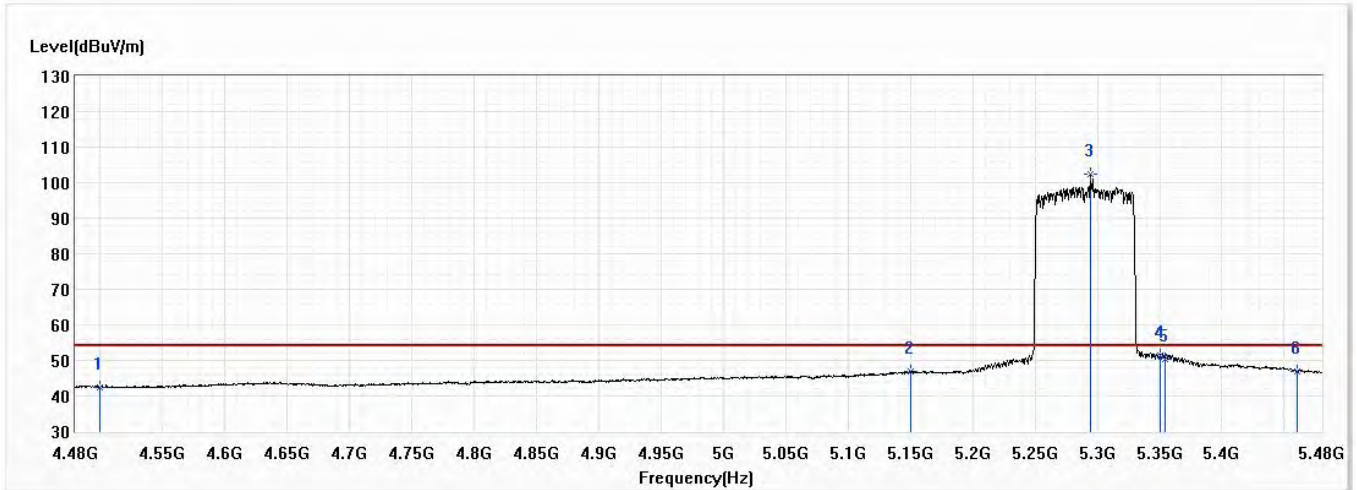


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.49	54.00	-11.51	18.82	23.67	AV
2	5150.000	46.73	54.00	-7.27	22.29	24.44	AV
! 3	5294.500	102.32	54.00	48.32	77.62	24.70	AV
4	5350.000	51.47	54.00	-2.53	26.67	24.80	AV
5	5354.000	50.50	54.00	-3.50	25.70	24.80	AV
6	5460.000	46.80	54.00	-7.20	21.81	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 100,5.5G,BW20M	Humidity (%RH)	58.0

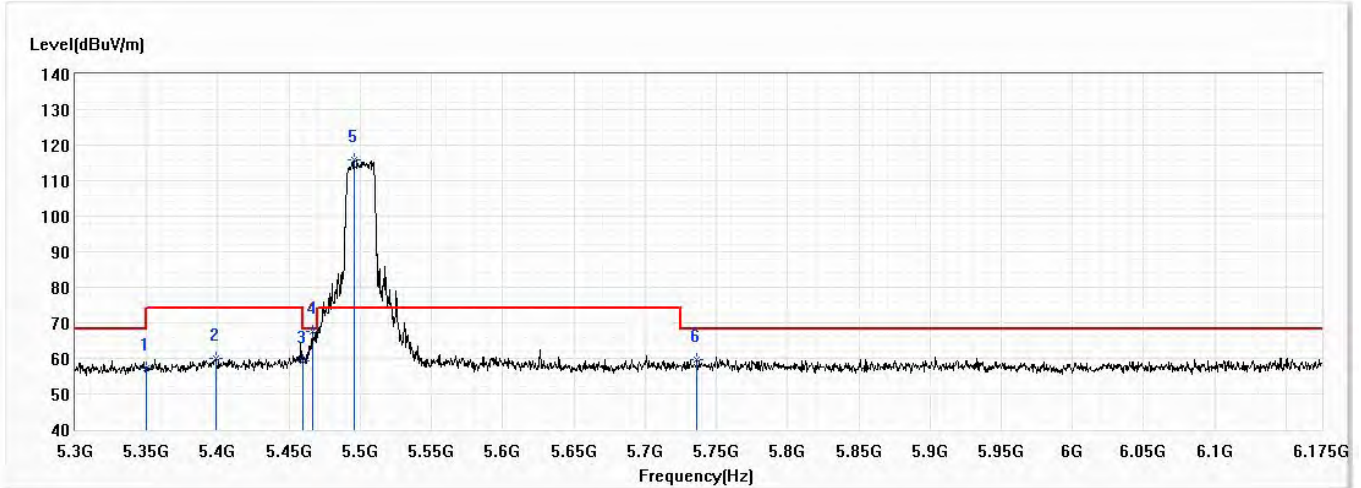


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.37	74.00	-16.63	32.57	24.80	PK
2	5398.438	59.83	74.00	-14.17	34.94	24.89	PK
3	5460.000	59.26	74.00	-14.74	34.27	24.99	PK
4	5466.250	67.54	68.20	-0.66	42.53	25.01	PK
! 5	5495.563	115.76	74.00	41.76	90.70	25.06	PK
6	5736.625	59.50	68.20	-8.70	33.74	25.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 100,5.5G,BW20M	Humidity (%RH)	58.0

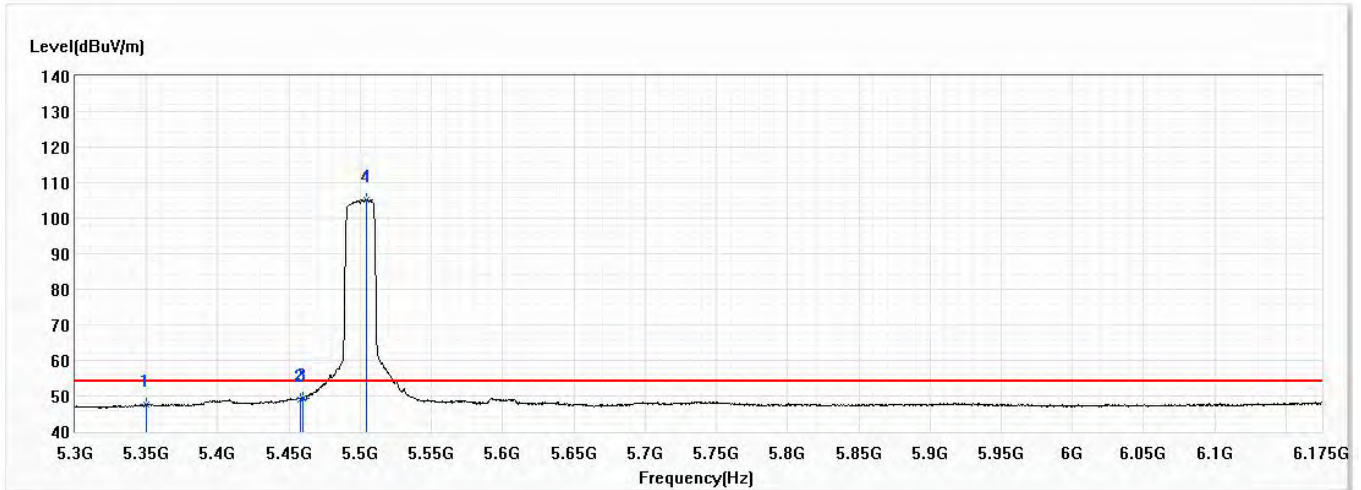


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	47.50	54.00	-6.50	22.70	24.80	AV
2	5457.938	49.09	54.00	-4.91	24.10	24.99	AV
3	5460.000	49.39	54.00	-4.61	24.40	24.99	AV
! 4	5504.750	105.28	54.00	51.28	80.20	25.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 100,5.5G,BW20M	Humidity (%RH)	58.0

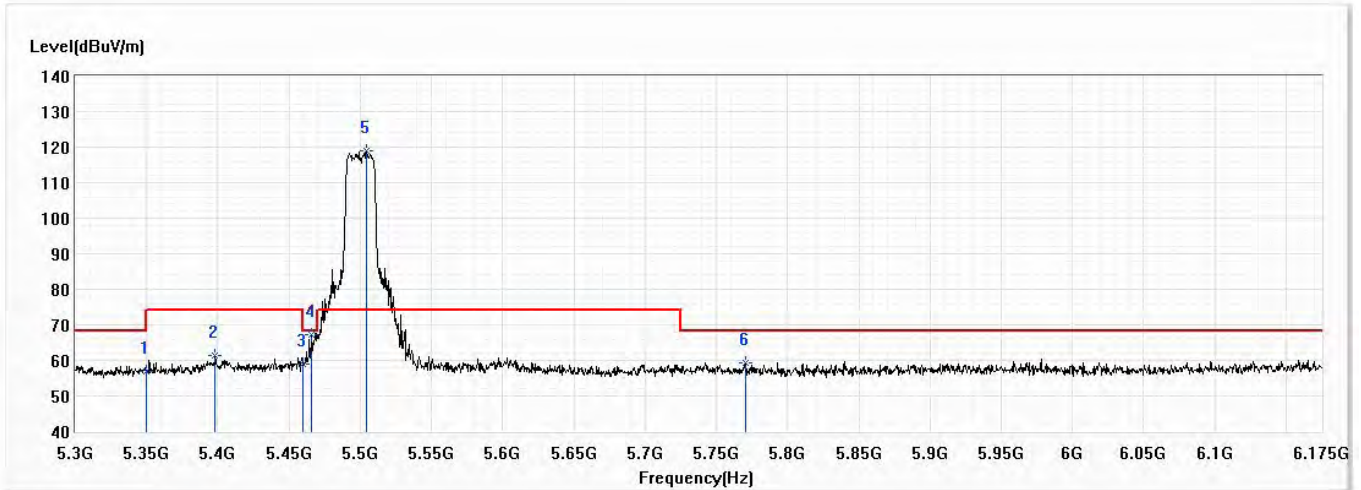


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.85	74.00	-17.15	32.05	24.80	PK
2	5398.000	61.24	74.00	-12.76	36.35	24.89	PK
3	5460.000	59.05	74.00	-14.95	34.06	24.99	PK
4	5465.813	67.15	68.20	-1.05	42.14	25.01	PK
! 5	5504.313	119.12	74.00	45.12	94.04	25.08	PK
6	5770.750	59.15	68.20	-9.05	33.29	25.86	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 100,5.5G,BW20M	Humidity (%RH)	58.0

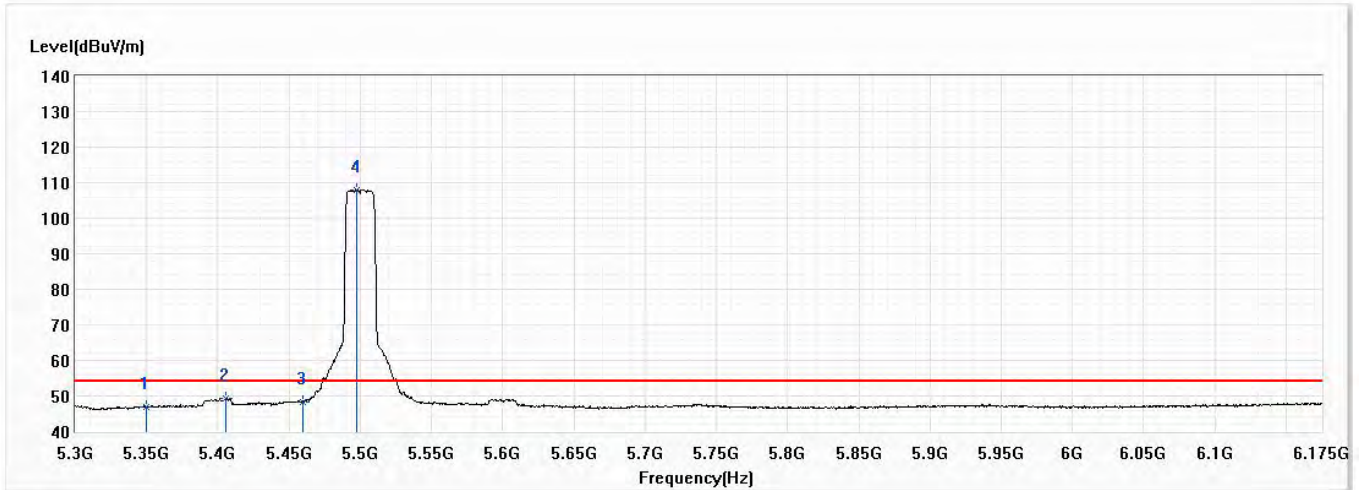


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.89	54.00	-7.11	22.09	24.80	AV
2	5405.438	49.27	54.00	-4.73	24.37	24.90	AV
3	5460.000	48.43	54.00	-5.57	23.44	24.99	AV
! 4	5497.750	108.00	54.00	54.00	82.93	25.07	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 116,5.58G,BW20M	Humidity (%RH)	58.0

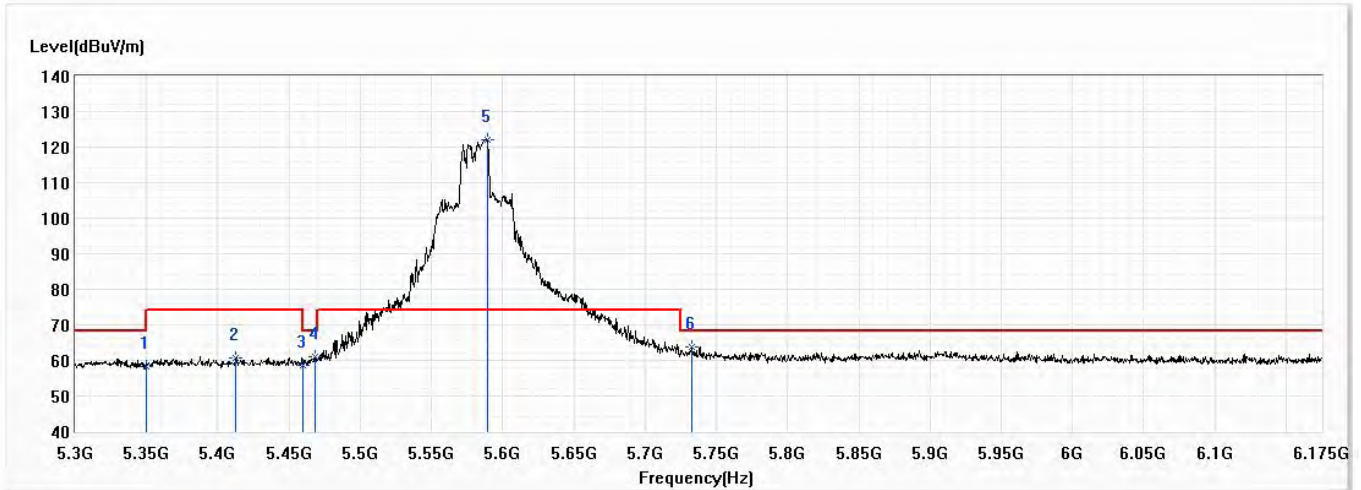


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.31	74.00	-15.69	33.51	24.80	PK
2	5412.875	60.68	74.00	-13.32	35.77	24.91	PK
3	5460.000	58.66	74.00	-15.34	33.67	24.99	PK
4	5468.000	61.04	68.20	-7.16	36.03	25.01	PK
! 5	5589.188	122.20	74.00	48.20	96.88	25.32	PK
6	5733.125	63.63	68.20	-4.57	37.88	25.75	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 116,5.58G,BW20M	Humidity (%RH)	58.0

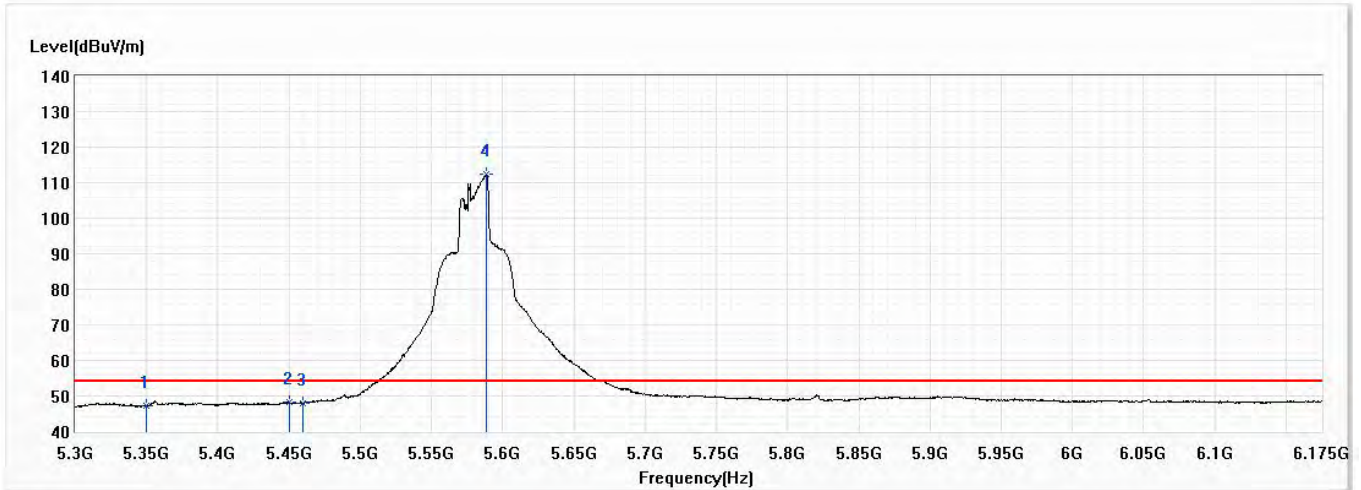


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	47.22	54.00	-6.78	22.42	24.80	AV
2	5450.063	48.22	54.00	-5.78	23.24	24.98	AV
3	5460.000	47.91	54.00	-6.09	22.92	24.99	AV
! 4	5588.313	112.46	54.00	58.46	87.14	25.32	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 116,5.58G,BW20M	Humidity (%RH)	58.0

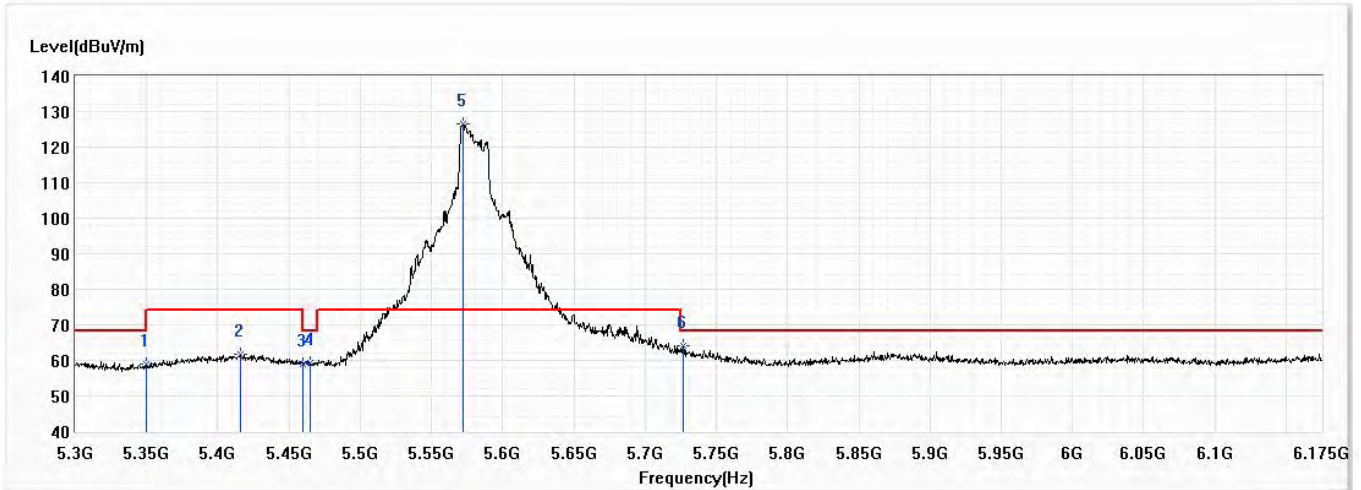


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.89	74.00	-15.11	34.09	24.80	PK
2	5415.500	61.80	74.00	-12.20	36.88	24.92	PK
3	5460.000	59.04	74.00	-14.96	34.05	24.99	PK
4	5464.500	59.38	68.20	-8.82	34.38	25.00	PK
! 5	5572.125	126.63	74.00	52.63	101.36	25.27	PK
6	5726.563	64.28	68.20	-3.92	38.55	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 116,5.58G,BW20M	Humidity (%RH)	58.0

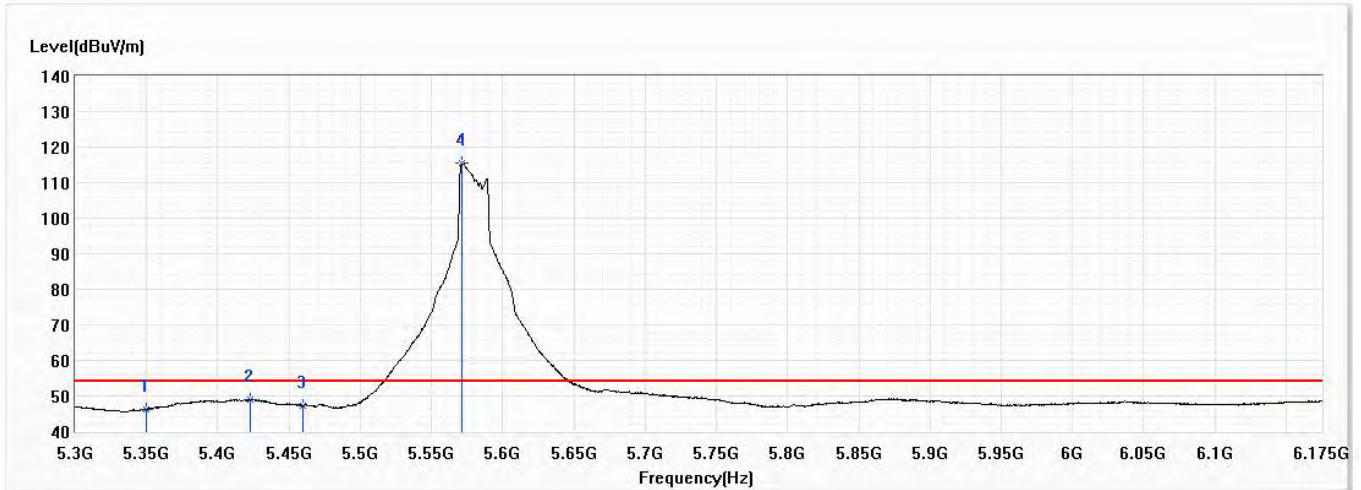


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.29	54.00	-7.71	21.49	24.80	AV
2	5422.938	48.96	54.00	-5.04	24.04	24.92	AV
3	5460.000	47.40	54.00	-6.60	22.41	24.99	AV
! 4	5571.250	115.52	54.00	61.52	90.25	25.27	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

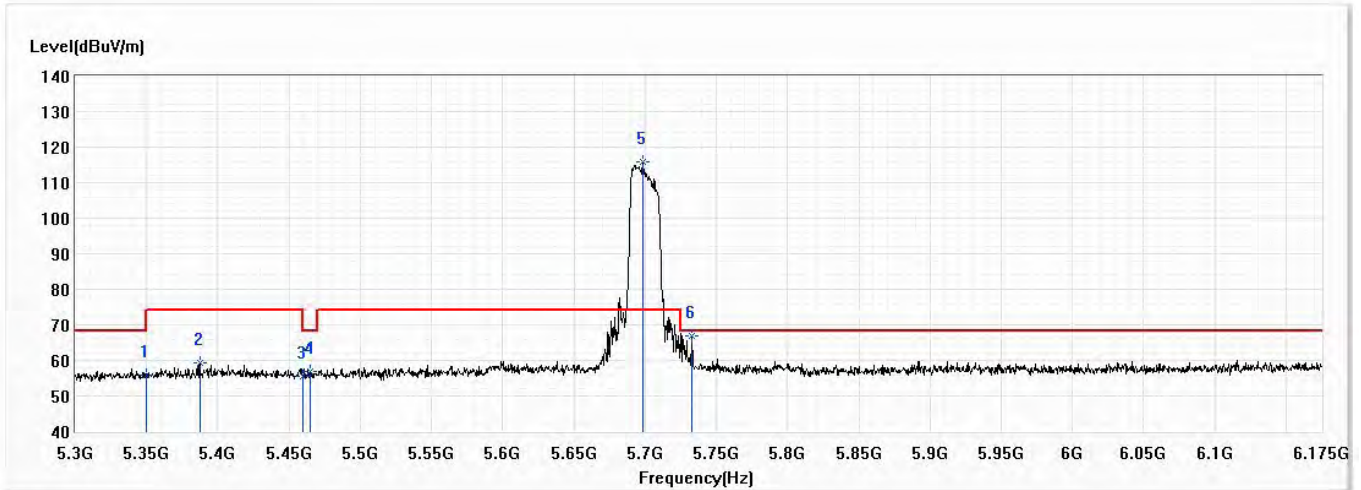


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.96	74.00	-18.04	31.16	24.80	PK
2	5387.500	59.43	74.00	-14.57	34.56	24.87	PK
3	5460.000	55.63	74.00	-18.37	30.64	24.99	PK
4	5464.938	56.84	68.20	-11.36	31.84	25.00	PK
! 5	5698.563	115.72	74.00	41.72	90.07	25.65	PK
6	5733.125	66.90	68.20	-1.30	41.15	25.75	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

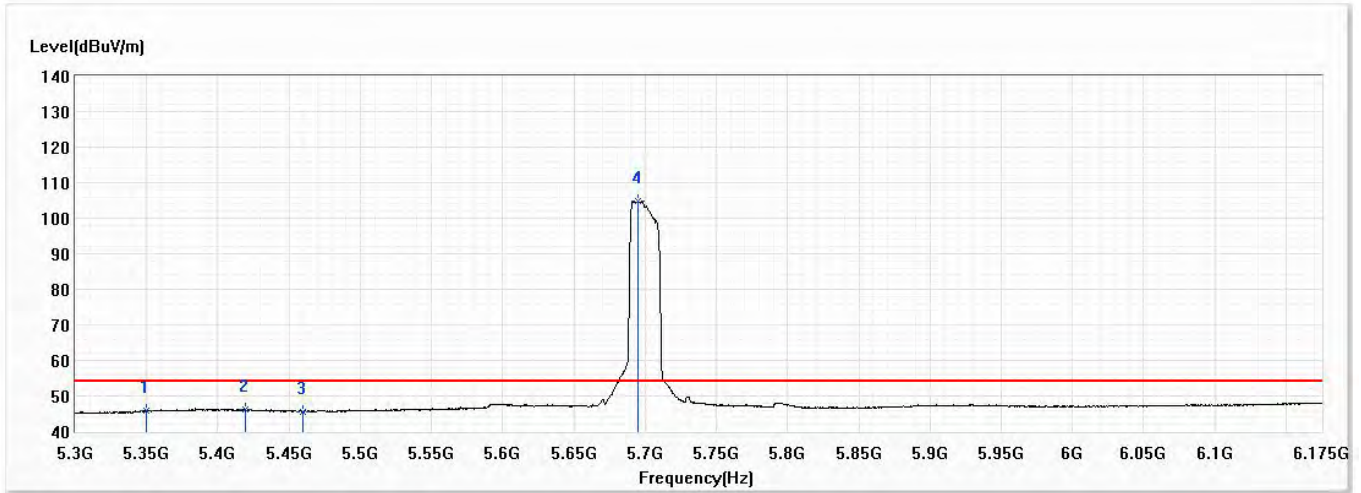


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.71	54.00	-8.29	20.91	24.80	AV
2	5419.438	46.19	54.00	-7.81	21.27	24.92	AV
3	5460.000	45.62	54.00	-8.38	20.63	24.99	AV
! 4	5695.063	104.69	54.00	50.69	79.05	25.64	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

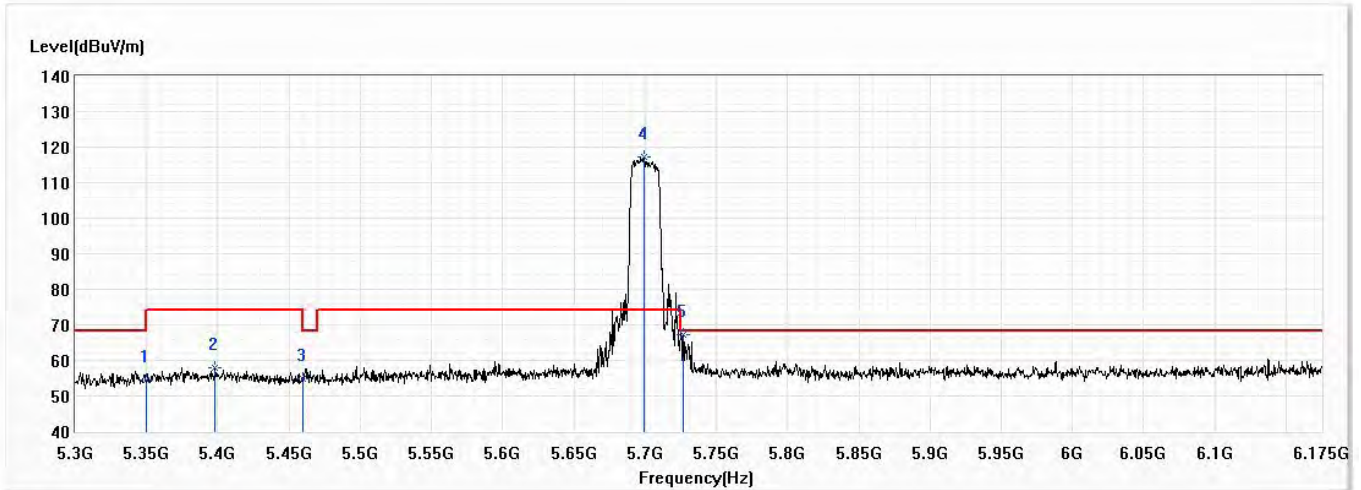


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.38	74.00	-19.62	29.58	24.80	PK
2	5398.000	57.87	74.00	-16.13	32.98	24.89	PK
3	5460.000	54.75	74.00	-19.25	29.76	24.99	PK
! 4	5699.000	117.26	74.00	43.26	91.61	25.65	PK
5	5726.563	67.29	68.20	-0.91	41.56	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 140,5.7G,BW20M	Humidity (%RH)	58.0

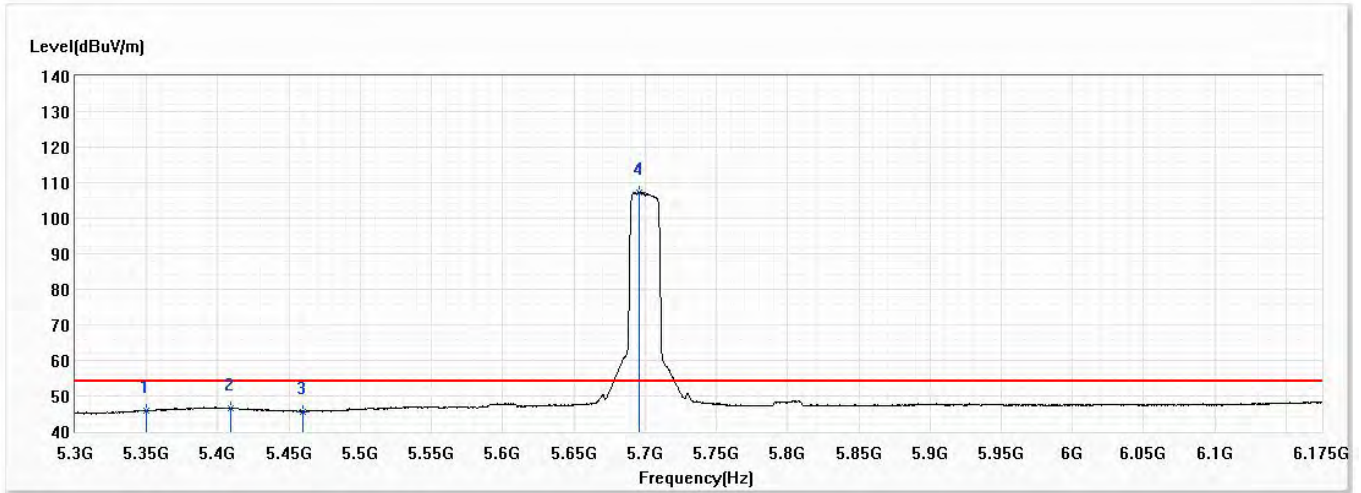


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.86	54.00	-8.14	21.06	24.80	AV
2	5408.938	46.63	54.00	-7.37	21.73	24.90	AV
3	5460.000	45.62	54.00	-8.38	20.63	24.99	AV
! 4	5695.500	107.31	54.00	53.31	81.67	25.64	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

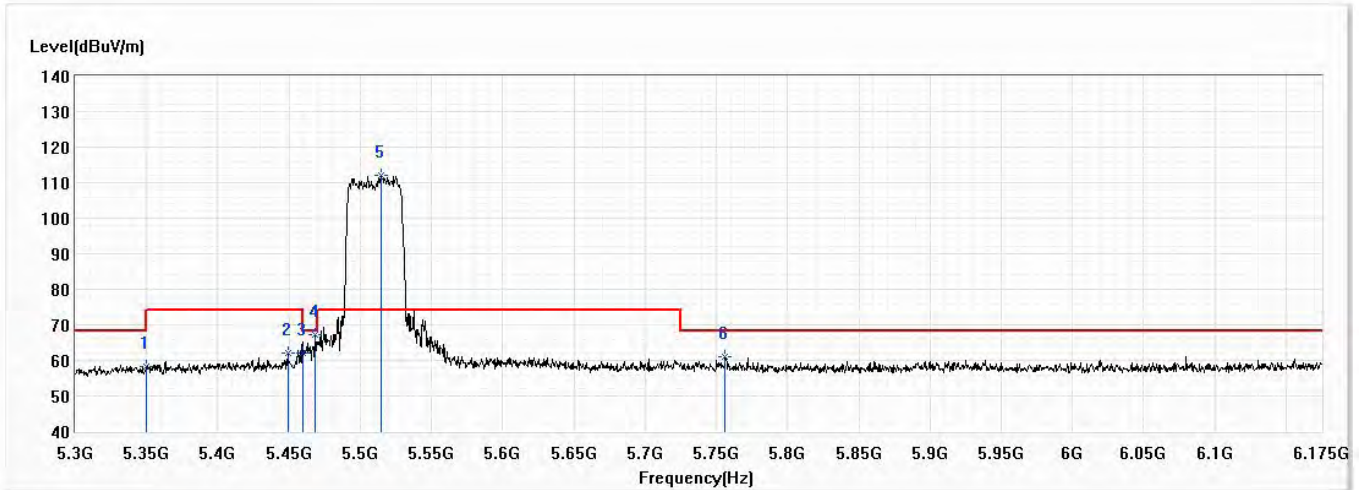


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.15	74.00	-15.85	33.35	24.80	PK
2	5449.188	62.18	74.00	-11.82	37.20	24.98	PK
3	5460.000	61.97	74.00	-12.03	36.98	24.99	PK
4	5468.438	67.32	68.20	-0.88	42.31	25.01	PK
! 5	5514.375	112.23	74.00	38.23	87.12	25.11	PK
6	5756.313	61.14	68.20	-7.06	35.33	25.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

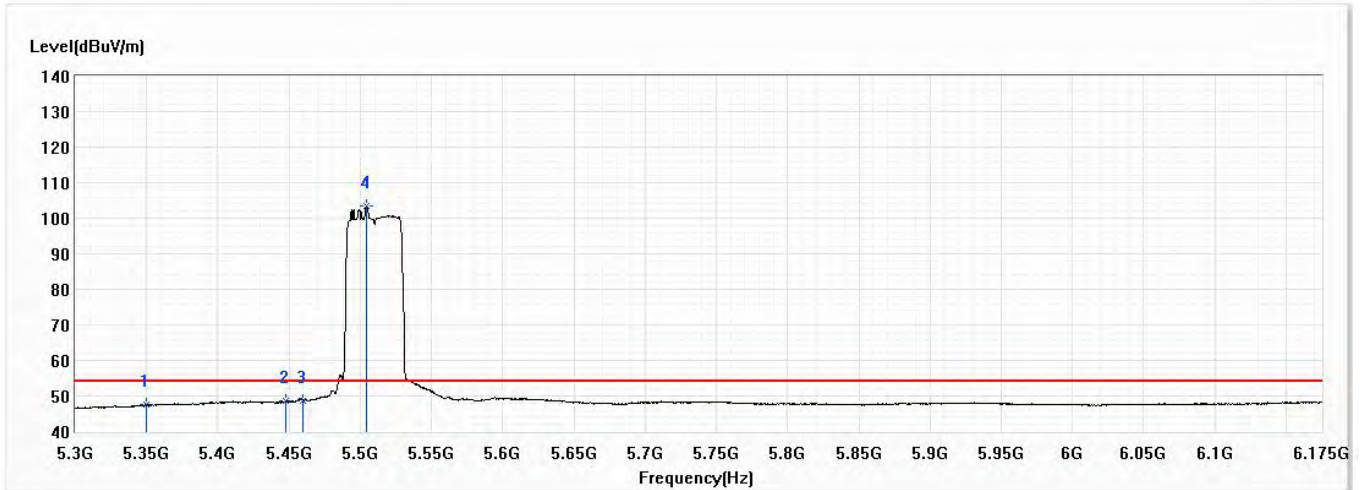


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	47.43	54.00	-6.57	22.63	24.80	AV
2	5447.875	48.64	54.00	-5.36	23.66	24.98	AV
3	5460.000	48.72	54.00	-5.28	23.73	24.99	AV
! 4	5504.313	103.46	54.00	49.46	78.38	25.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

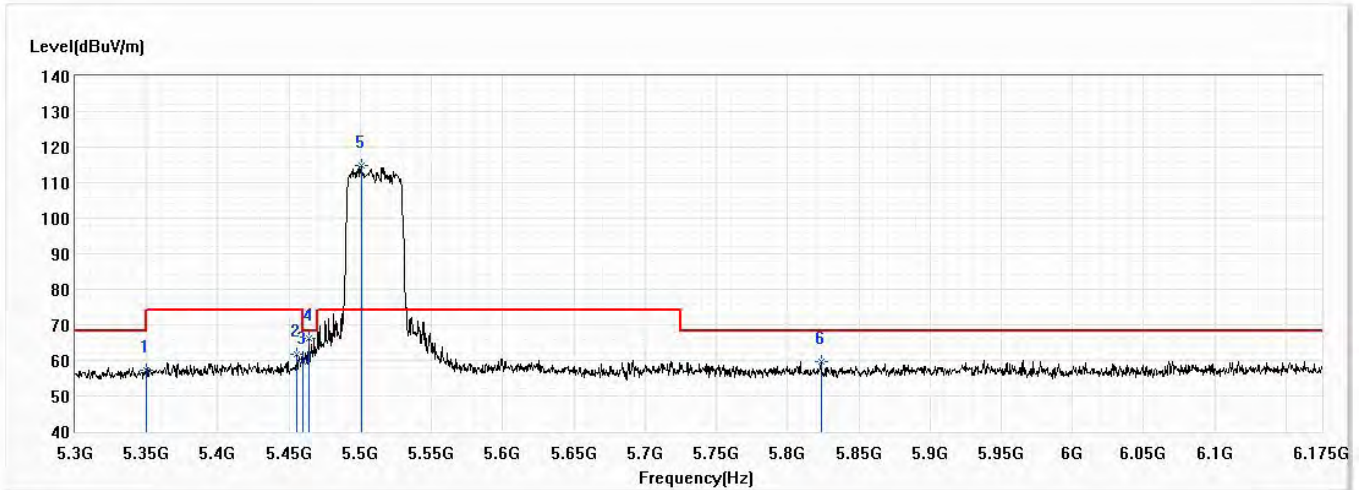


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.30	74.00	-16.70	32.50	24.80	PK
2	5455.750	61.81	74.00	-12.19	36.82	24.99	PK
3	5460.000	59.74	74.00	-14.26	34.75	24.99	PK
4	5463.625	66.24	68.20	-1.96	41.24	25.00	PK
! 5	5500.813	114.67	74.00	40.67	89.60	25.07	PK
6	5823.688	59.64	68.20	-8.56	33.64	26.00	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 102,5.51G,BW40M	Humidity (%RH)	58.0

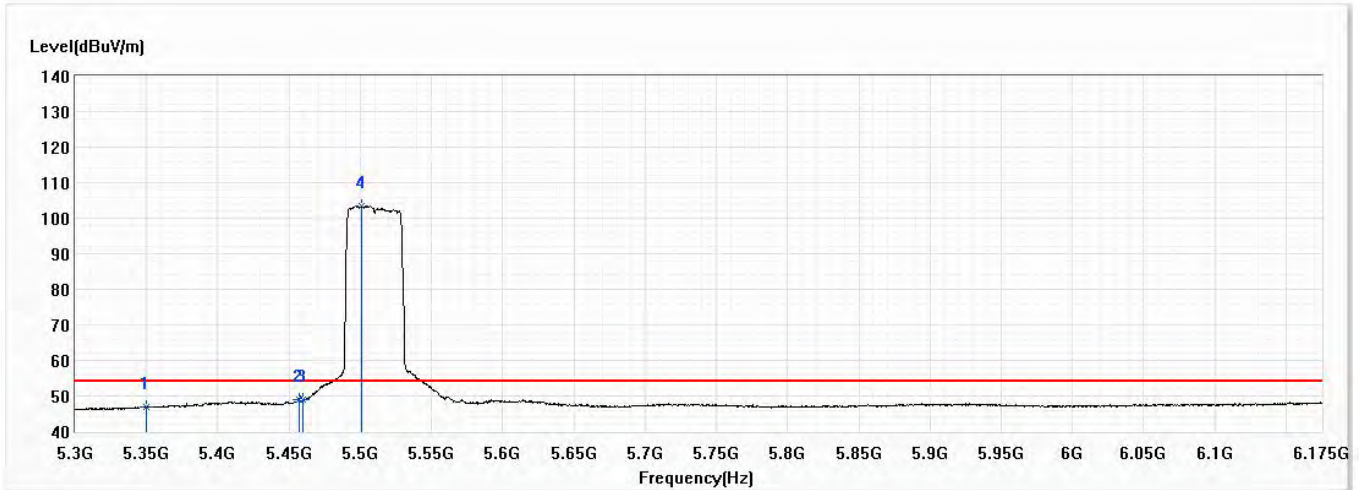


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.78	54.00	-7.22	21.98	24.80	AV
2	5457.063	49.12	54.00	-4.88	24.13	24.99	AV
3	5460.000	48.83	54.00	-5.17	23.84	24.99	AV
! 4	5501.250	103.34	54.00	49.34	78.27	25.07	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

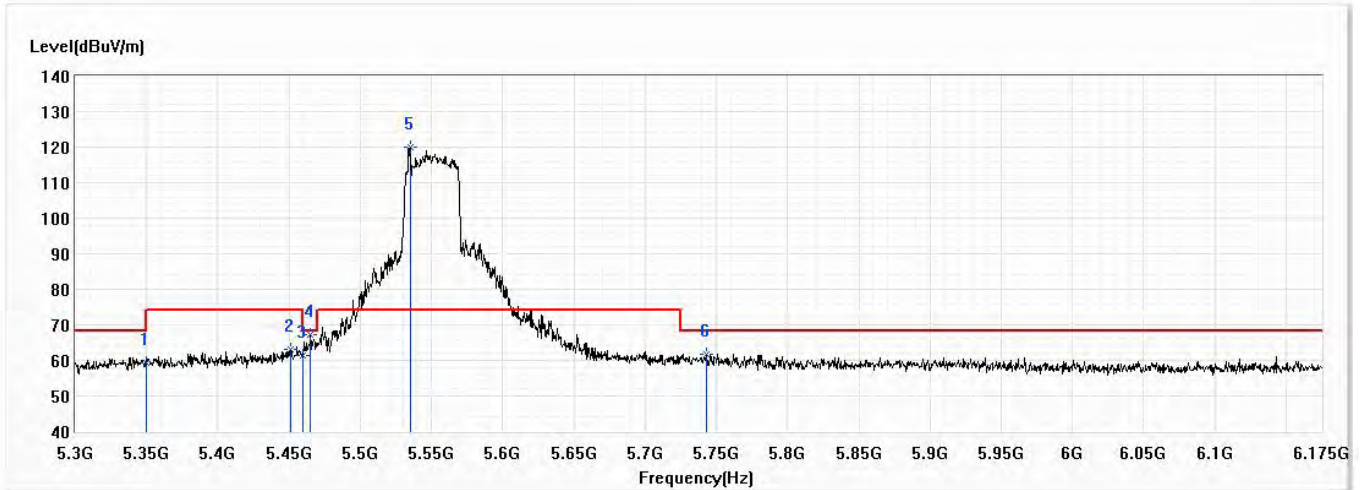


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.42	74.00	-14.58	34.62	24.80	PK
2	5450.938	63.03	74.00	-10.97	38.05	24.98	PK
3	5460.000	61.43	74.00	-12.57	36.44	24.99	PK
4	5464.938	67.31	68.20	-0.89	42.31	25.00	PK
! 5	5534.938	119.91	74.00	45.91	94.74	25.17	PK
6	5743.188	61.83	68.20	-6.37	36.05	25.78	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

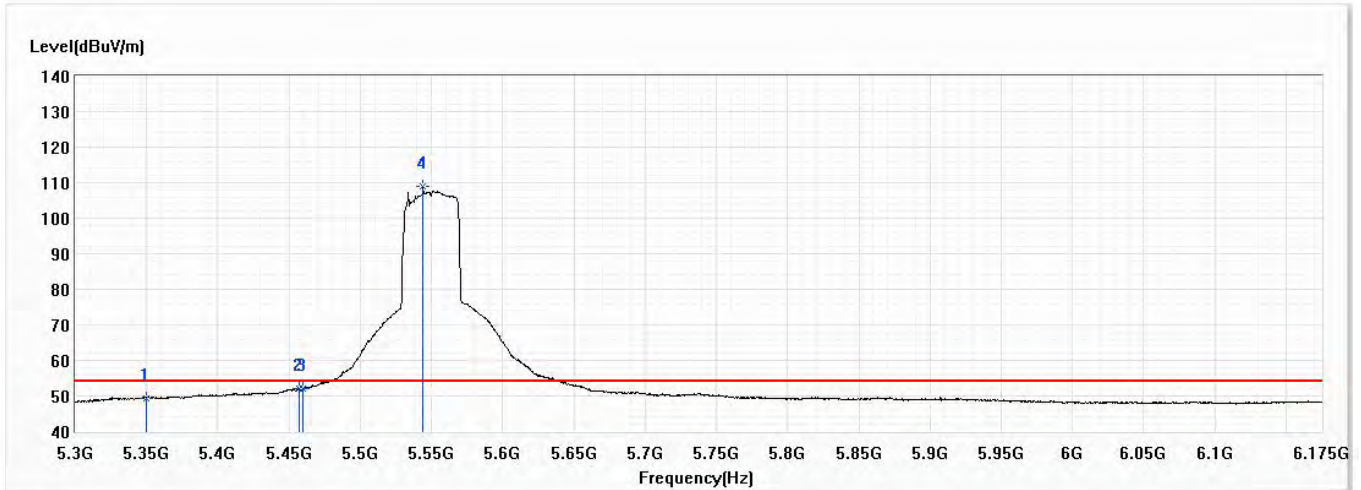


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	49.46	54.00	-4.54	24.66	24.80	AV
2	5457.500	51.90	54.00	-2.10	26.91	24.99	AV
3	5460.000	51.99	54.00	-2.01	27.00	24.99	AV
! 4	5544.125	109.03	54.00	55.03	83.83	25.20	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

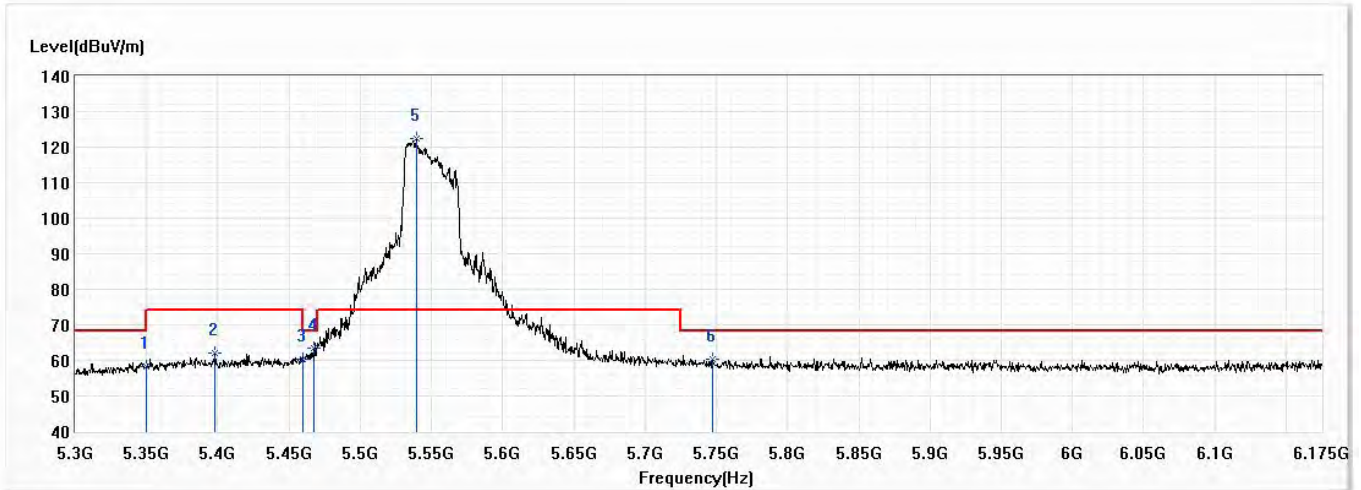


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.35	74.00	-15.65	33.55	24.80	PK
2	5398.000	61.91	74.00	-12.09	37.02	24.89	PK
3	5460.000	60.38	74.00	-13.62	35.39	24.99	PK
4	5467.125	63.60	68.20	-4.60	38.59	25.01	PK
! 5	5539.313	122.44	74.00	48.44	97.26	25.18	PK
6	5747.125	60.42	68.20	-7.78	34.64	25.78	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 110,5.55G,BW40M	Humidity (%RH)	58.0

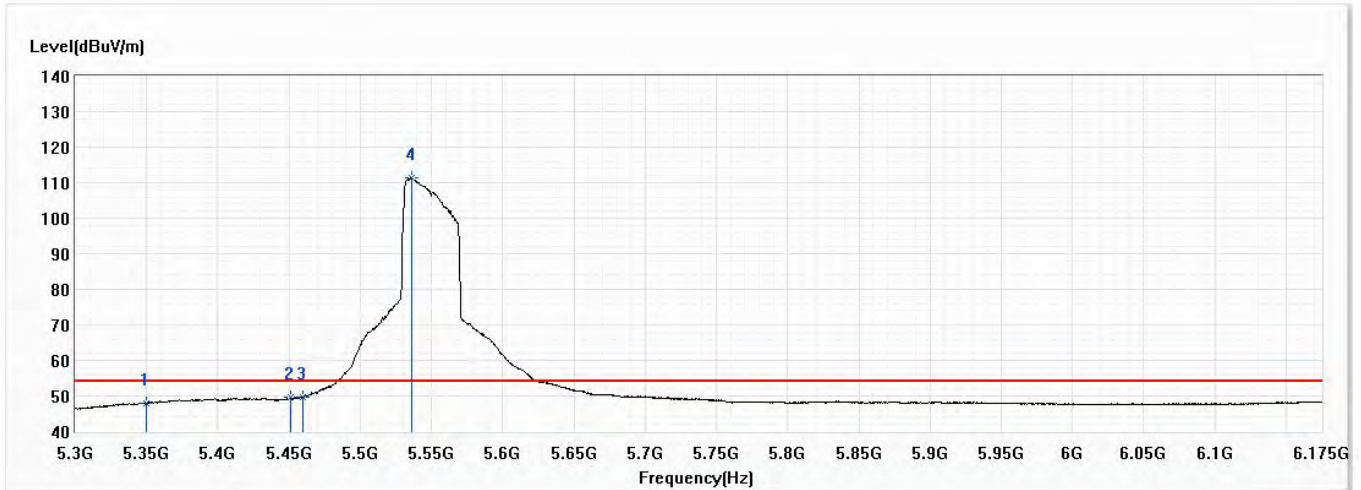


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	48.01	54.00	-5.99	23.21	24.80	AV
2	5450.938	49.56	54.00	-4.44	24.58	24.98	AV
3	5460.000	49.72	54.00	-4.28	24.73	24.99	AV
! 4	5536.250	111.31	54.00	57.31	86.13	25.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

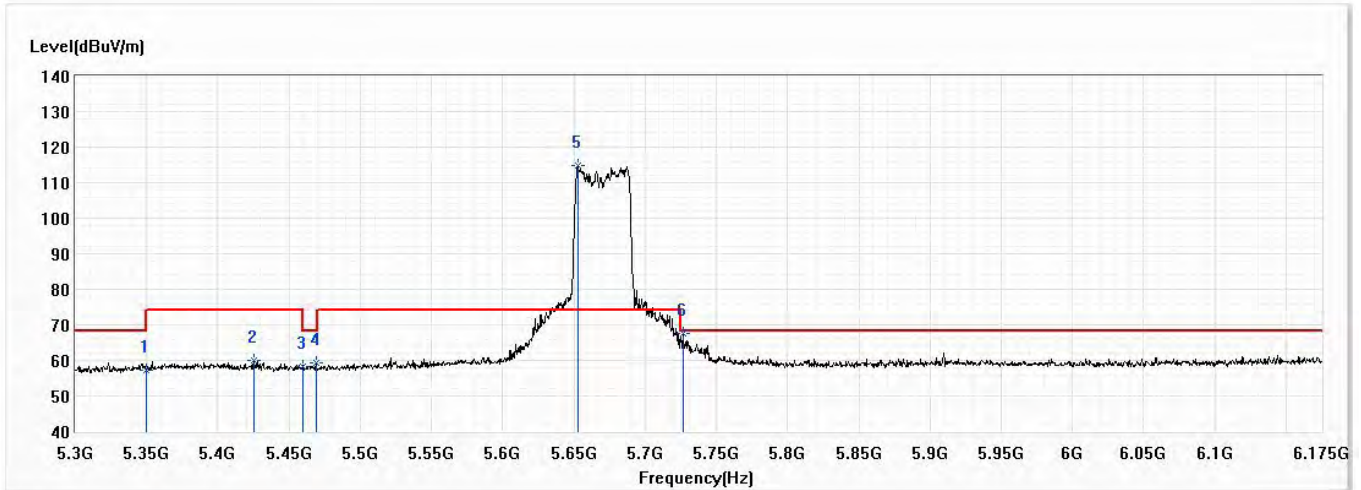


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.28	74.00	-16.72	32.48	24.80	PK
2	5425.563	59.92	74.00	-14.08	34.98	24.94	PK
3	5460.000	58.36	74.00	-15.64	33.37	24.99	PK
4	5468.875	59.47	68.20	-8.73	34.46	25.01	PK
! 5	5652.625	115.00	74.00	41.00	89.49	25.51	PK
6	5726.563	67.53	68.20	-0.67	41.80	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

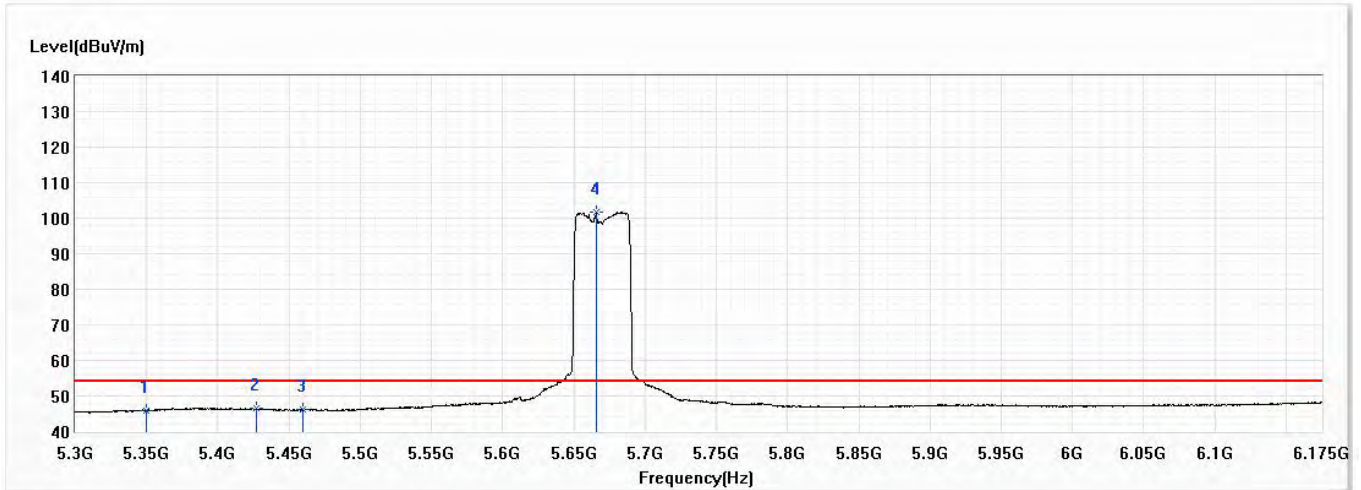


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	45.90	54.00	-8.10	21.10	24.80	AV
2	5427.313	46.43	54.00	-7.57	21.49	24.94	AV
3	5460.000	46.05	54.00	-7.95	21.06	24.99	AV
4	5665.750	101.67	54.00	47.67	76.12	25.55	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

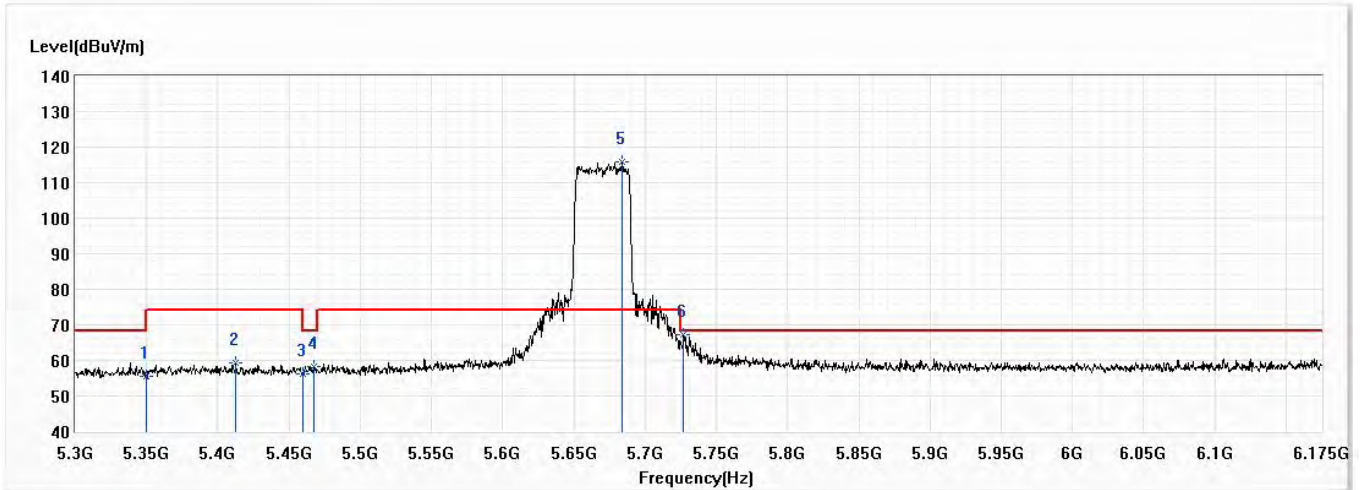


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.60	74.00	-18.40	30.80	24.80	PK
2	5412.875	59.20	74.00	-14.80	34.29	24.91	PK
3	5460.000	56.36	74.00	-17.64	31.37	24.99	PK
4	5467.563	58.13	68.20	-10.07	33.12	25.01	PK
! 5	5684.125	116.03	74.00	42.03	90.43	25.60	PK
6	5727.000	67.19	68.20	-1.01	41.46	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 134,5.67G,BW40M	Humidity (%RH)	58.0

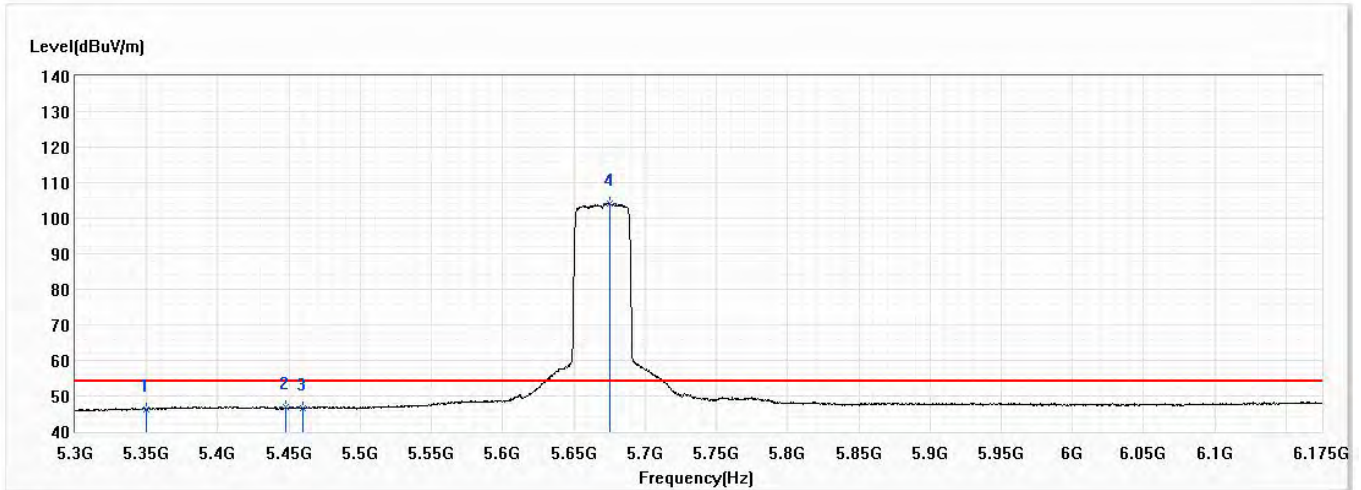


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.30	54.00	-7.70	21.50	24.80	AV
2	5447.438	46.96	54.00	-7.04	21.98	24.98	AV
3	5460.000	46.54	54.00	-7.46	21.55	24.99	AV
! 4	5674.938	104.10	54.00	50.10	78.53	25.57	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

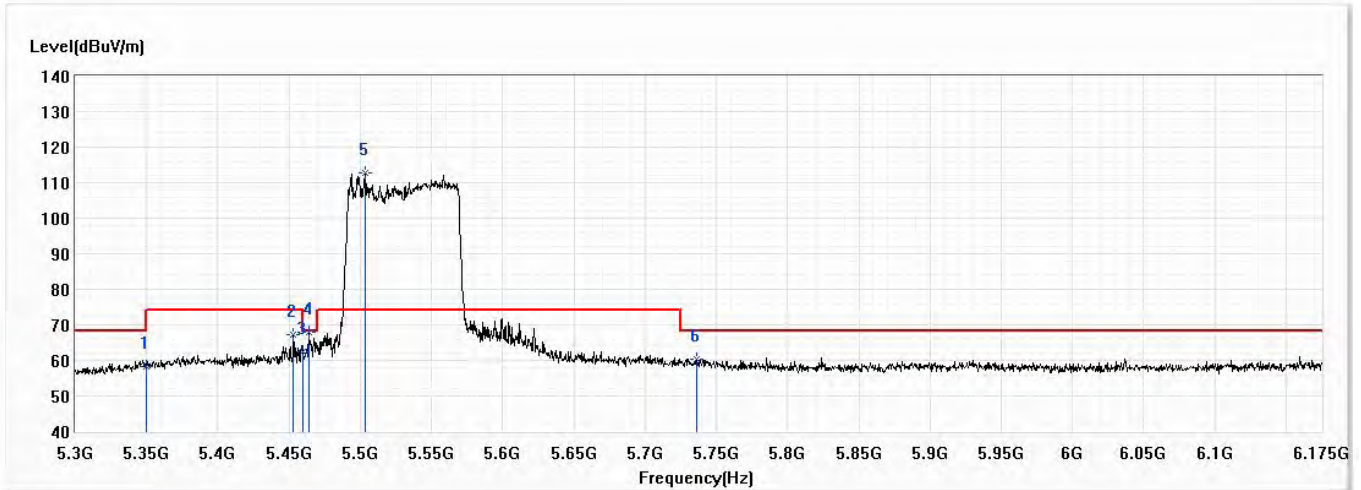


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.39	74.00	-15.61	33.59	24.80	PK
2	5453.125	67.30	74.00	-6.70	42.32	24.98	PK
3	5460.000	62.25	74.00	-11.75	37.26	24.99	PK
4	5463.625	67.86	68.20	-0.34	42.86	25.00	PK
! 5	5503.875	112.63	74.00	38.63	87.55	25.08	PK
6	5736.625	60.47	68.20	-7.73	34.71	25.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

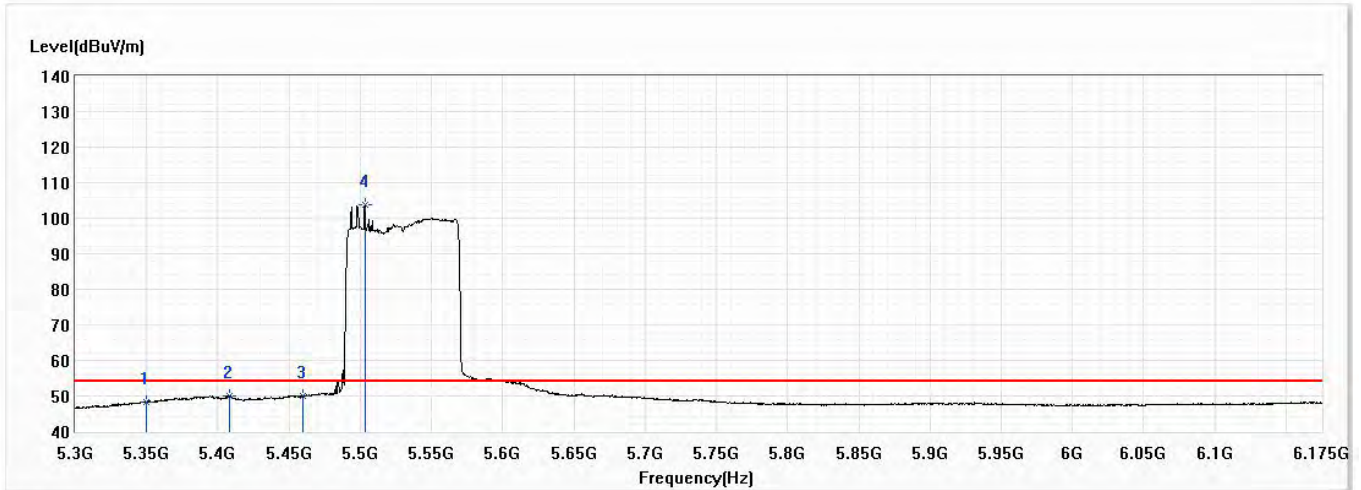


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	48.29	54.00	-5.71	23.49	24.80	AV
2	5408.500	49.83	54.00	-4.17	24.93	24.90	AV
3	5460.000	49.85	54.00	-4.15	24.86	24.99	AV
! 4	5503.438	103.80	54.00	49.80	78.72	25.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

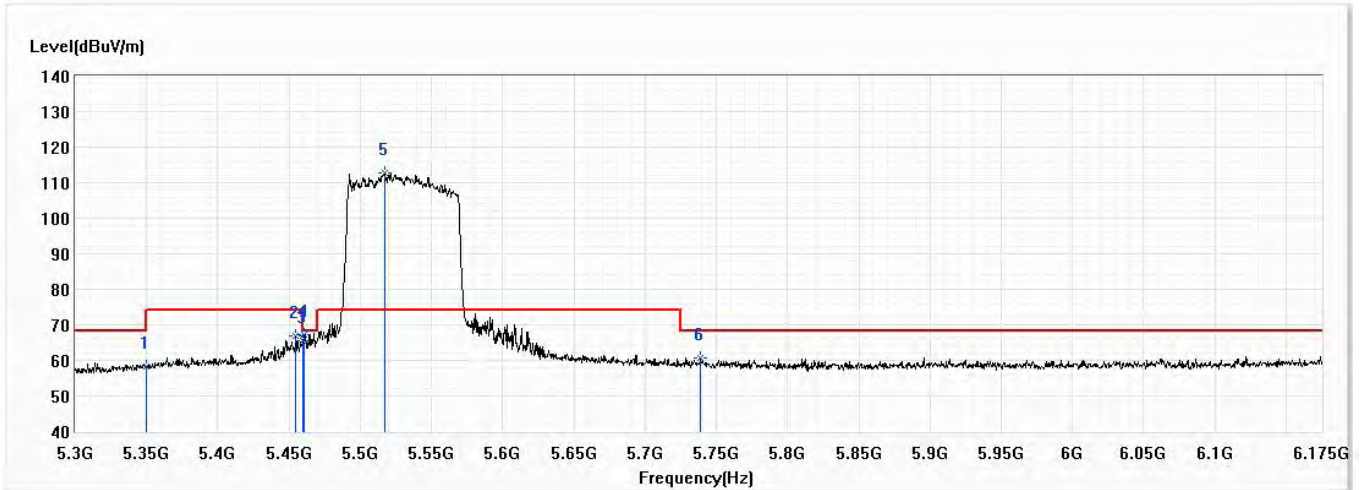


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.26	74.00	-15.74	33.46	24.80	PK
2	5454.875	66.79	74.00	-7.21	41.81	24.98	PK
3	5460.000	65.56	74.00	-8.44	40.57	24.99	PK
4	5461.000	67.31	68.20	-0.89	42.32	24.99	PK
! 5	5517.000	112.78	74.00	38.78	87.66	25.12	PK
6	5738.813	60.54	68.20	-7.66	34.78	25.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 106,5.53G,BW80M	Humidity (%RH)	58.0

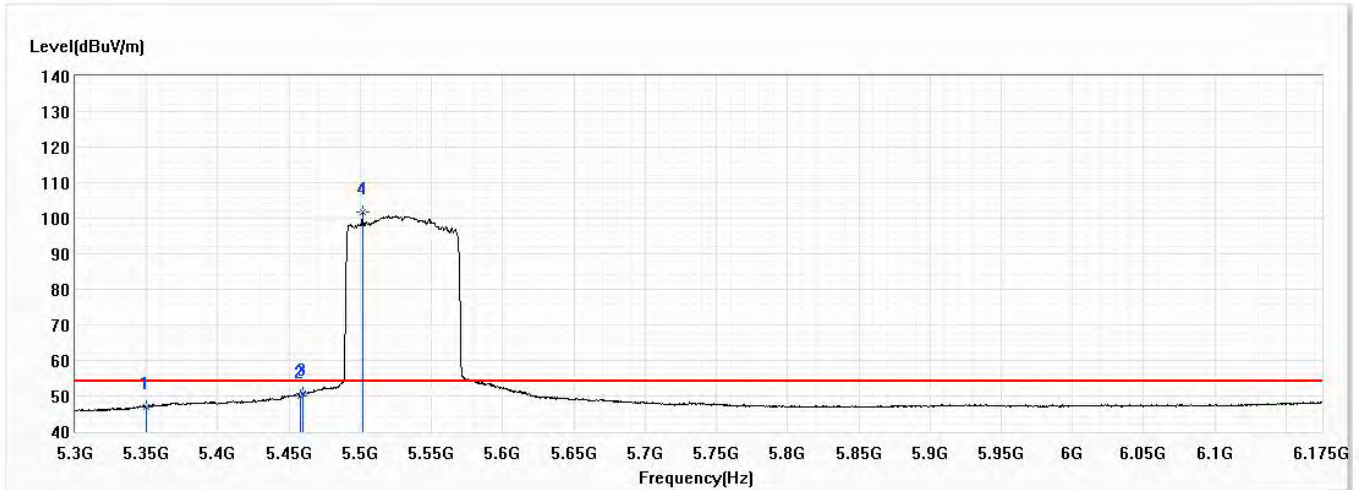


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	47.04	54.00	-6.96	22.24	24.80	AV
2	5458.375	50.11	54.00	-3.89	25.12	24.99	AV
3	5460.000	50.54	54.00	-3.46	25.55	24.99	AV
! 4	5501.688	101.77	54.00	47.77	76.70	25.07	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

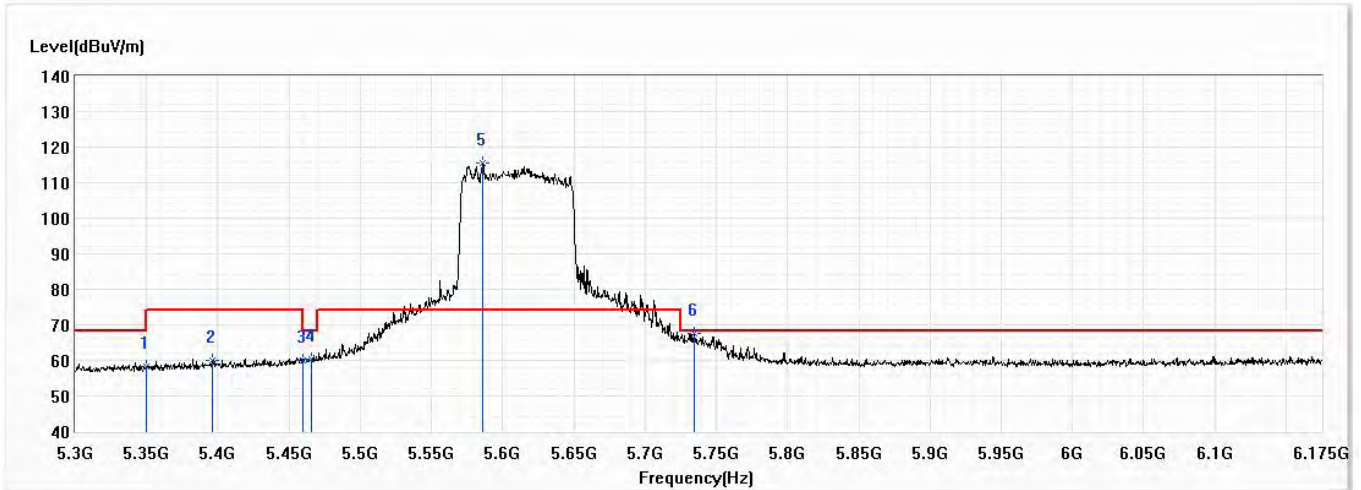


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.34	74.00	-15.66	33.54	24.80	PK
2	5396.250	60.17	74.00	-13.83	35.28	24.89	PK
3	5460.000	60.15	74.00	-13.85	35.16	24.99	PK
4	5465.813	60.45	68.20	-7.75	35.44	25.01	PK
! 5	5586.125	115.66	74.00	41.66	90.34	25.32	PK
6	5734.438	67.47	68.20	-0.73	41.72	25.75	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

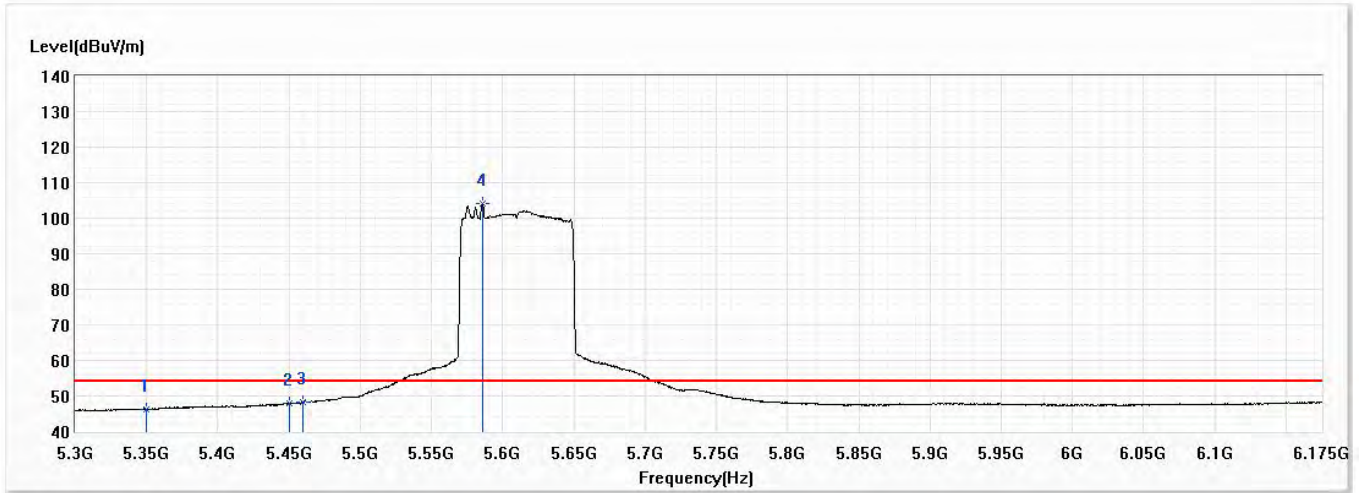


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	46.21	54.00	-7.79	21.41	24.80	AV
2	5450.063	48.04	54.00	-5.96	23.06	24.98	AV
3	5460.000	48.23	54.00	-5.77	23.24	24.99	AV
! 4	5585.688	104.14	54.00	50.14	78.83	25.31	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

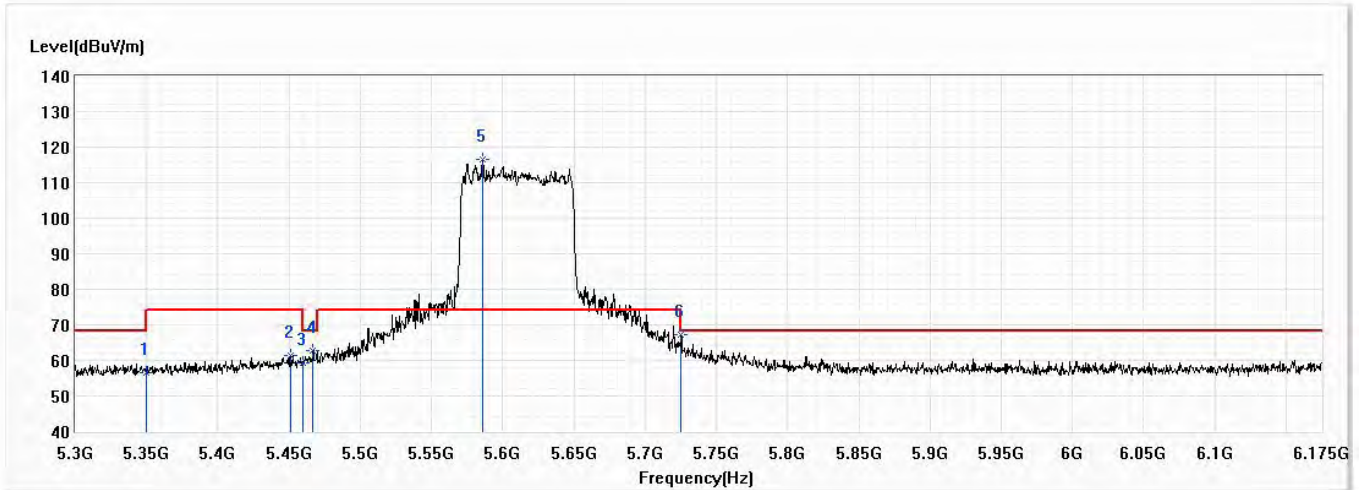


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.46	74.00	-17.54	31.66	24.80	PK
2	5450.938	61.34	74.00	-12.66	36.36	24.98	PK
3	5460.000	59.41	74.00	-14.59	34.42	24.99	PK
4	5466.688	62.59	68.20	-5.61	37.58	25.01	PK
! 5	5585.688	116.46	74.00	42.46	91.15	25.31	PK
6	5725.250	67.34	68.20	-0.86	41.61	25.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/3
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 122,5.61G,BW80M	Humidity (%RH)	58.0

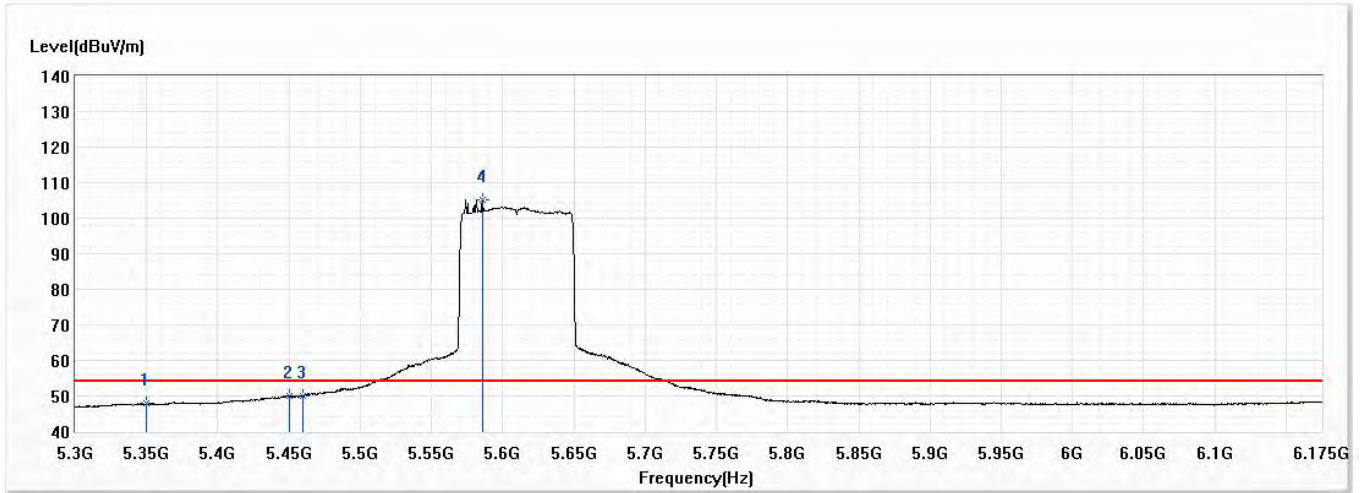


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	47.77	54.00	-6.23	22.97	24.80	AV
2	5450.063	50.07	54.00	-3.93	25.09	24.98	AV
3	5460.000	50.11	54.00	-3.89	25.12	24.99	AV
! 4	5585.688	105.33	54.00	51.33	80.02	25.31	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,5.745G,BW20M	Humidity (%RH)	58.0

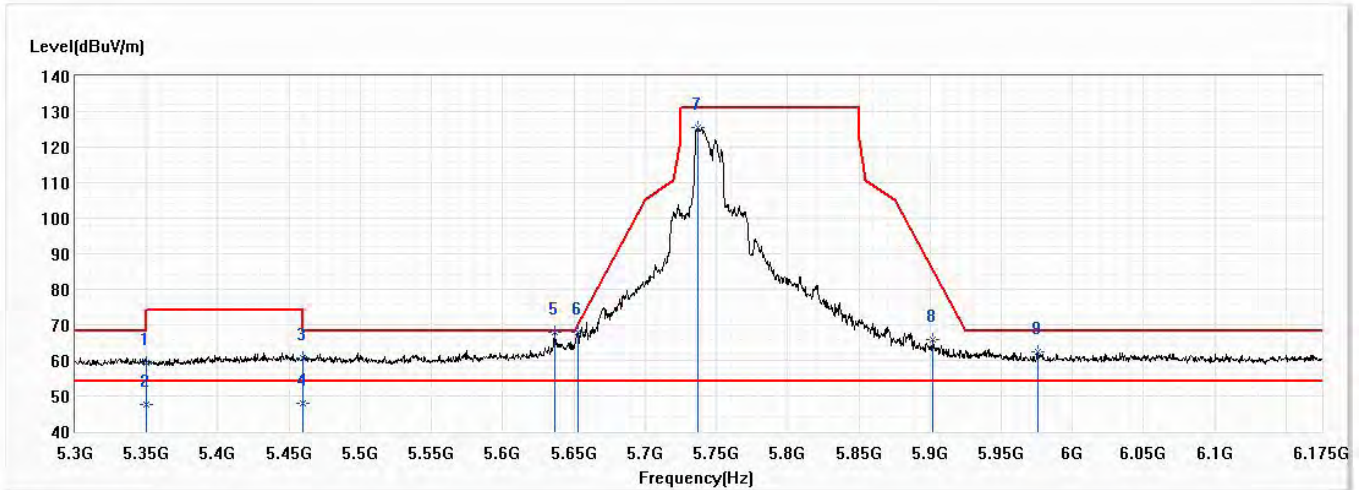


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.15	74.00	-14.85	34.35	24.80	PK
2	5350.000	47.44	54.00	-6.56	22.64	24.80	AV
3	5460.000	60.73	74.00	-13.27	35.74	24.99	PK
4	5460.000	48.10	54.00	-5.90	23.11	24.99	AV
* 5	5636.438	67.78	68.20	-0.42	42.31	25.47	PK
6	5652.625	68.07	70.15	-2.09	42.56	25.51	PK
7	5737.063	125.44	131.20	-5.76	99.68	25.76	PK
8	5902.000	65.76	85.18	-19.42	39.53	26.23	PK
9	5975.500	62.25	68.20	-5.95	35.79	26.46	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,5.745G,BW20M	Humidity (%RH)	58.0

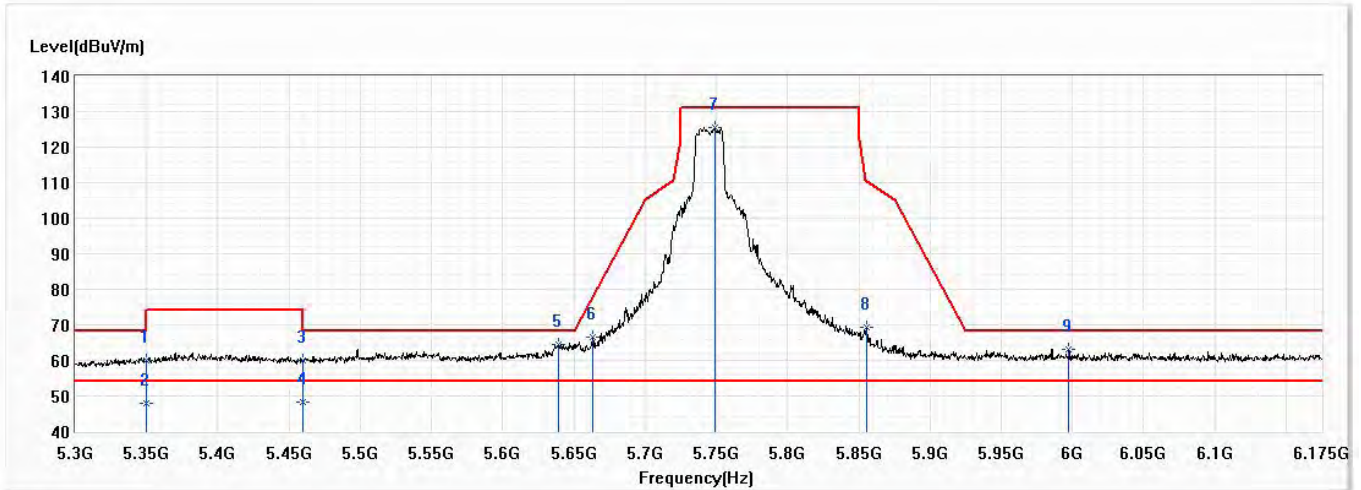


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.17	74.00	-13.83	35.37	24.80	PK
2	5350.000	47.88	54.00	-6.12	23.08	24.80	AV
3	5460.000	59.83	74.00	-14.17	34.84	24.99	PK
4	5460.000	48.26	54.00	-5.74	23.27	24.99	AV
* 5	5639.063	64.42	68.20	-3.78	38.95	25.47	PK
6	5663.125	66.52	77.94	-11.42	40.98	25.54	PK
7	5748.875	125.64	131.20	-5.56	99.85	25.79	PK
8	5855.625	69.14	110.62	-41.48	43.04	26.10	PK
9	5997.375	63.20	68.20	-5.00	36.68	26.52	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 157,5.785G,BW20M	Humidity (%RH)	58.0

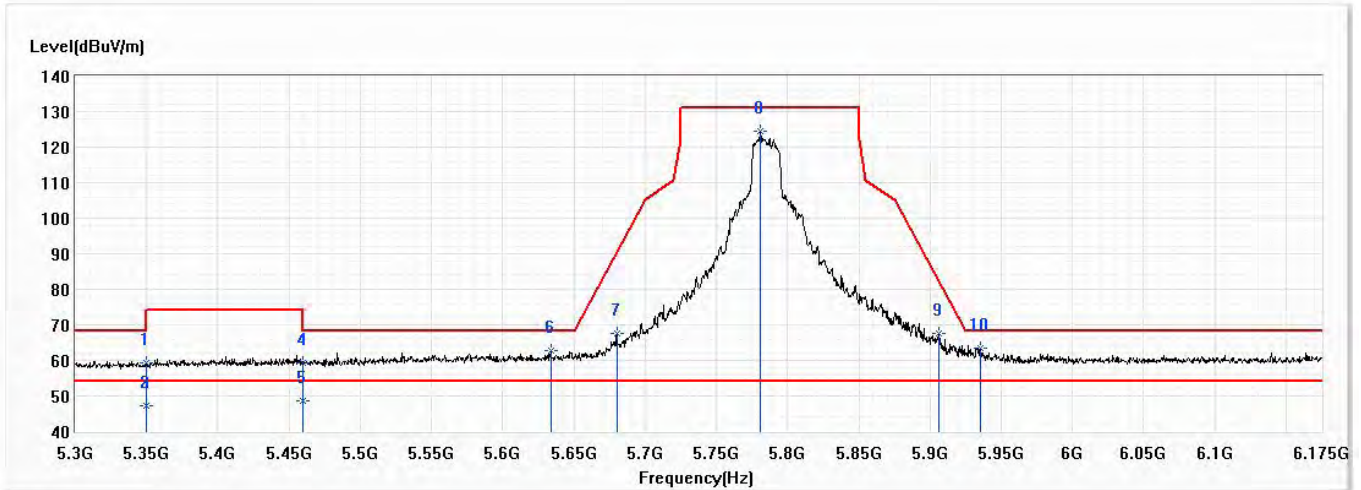


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.23	74.00	-14.77	34.43	24.80	PK
2	5350.000	47.36	54.00	-6.64	22.56	24.80	AV
3	5350.000	47.36	54.00	-6.64	22.56	24.80	AV
4	5460.000	59.46	74.00	-14.54	34.47	24.99	PK
5	5460.000	48.63	54.00	-5.37	23.64	24.99	AV
6	5633.813	62.66	68.20	-5.54	37.20	25.46	PK
7	5680.188	67.52	90.58	-23.06	41.93	25.59	PK
8	5781.250	124.58	131.20	-6.62	98.69	25.89	PK
9	5905.938	67.46	82.27	-14.81	41.22	26.24	PK
* 10	5935.688	63.46	68.20	-4.74	37.13	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 157,5.785G,BW20M	Humidity (%RH)	58.0

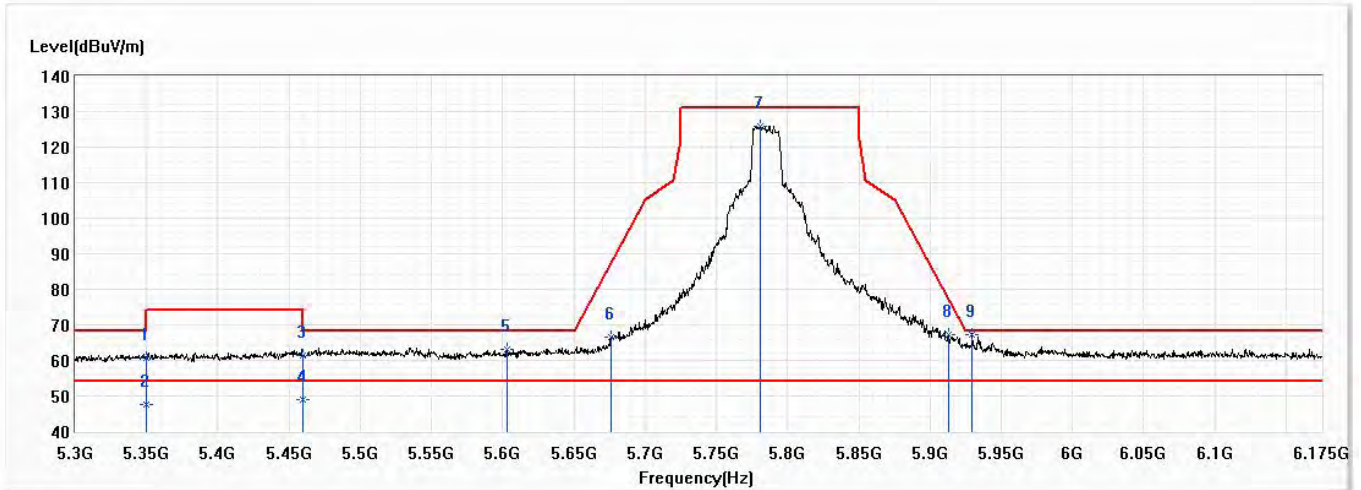


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.72	74.00	-13.28	35.92	24.80	PK
2	5350.000	47.70	54.00	-6.30	22.90	24.80	AV
3	5460.000	61.35	74.00	-12.65	36.36	24.99	PK
4	5460.000	48.90	54.00	-5.10	23.91	24.99	AV
5	5602.750	63.14	68.20	-5.06	37.78	25.36	PK
6	5675.813	66.47	87.34	-20.83	40.88	25.59	PK
7	5781.250	125.94	131.20	-5.26	100.05	25.89	PK
8	5912.938	67.35	77.10	-9.78	41.08	26.27	PK
* 9	5929.563	67.41	68.20	-0.79	41.09	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 165,5.825G,BW20M	Humidity (%RH)	58.0

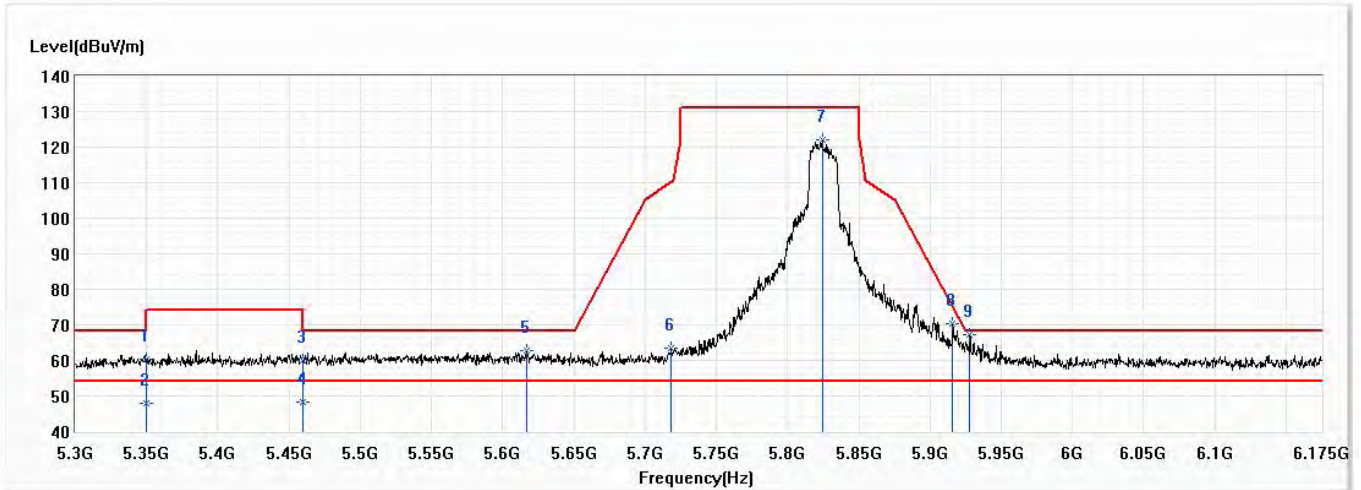


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	60.20	74.00	-13.80	35.40	24.80	PK
2	5350.000	47.77	54.00	-6.23	22.97	24.80	AV
3	5460.000	59.85	74.00	-14.15	34.86	24.99	PK
4	5460.000	48.35	54.00	-5.65	23.36	24.99	AV
5	5616.750	62.78	68.20	-5.42	37.37	25.41	PK
6	5718.250	63.44	110.31	-46.87	37.74	25.70	PK
7	5824.563	122.01	131.20	-9.19	96.01	26.00	PK
8	5916.000	70.34	74.84	-4.50	44.06	26.28	PK
* 9	5927.813	67.39	68.20	-0.81	41.07	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 165,5.825G,BW20M	Humidity (%RH)	58.0

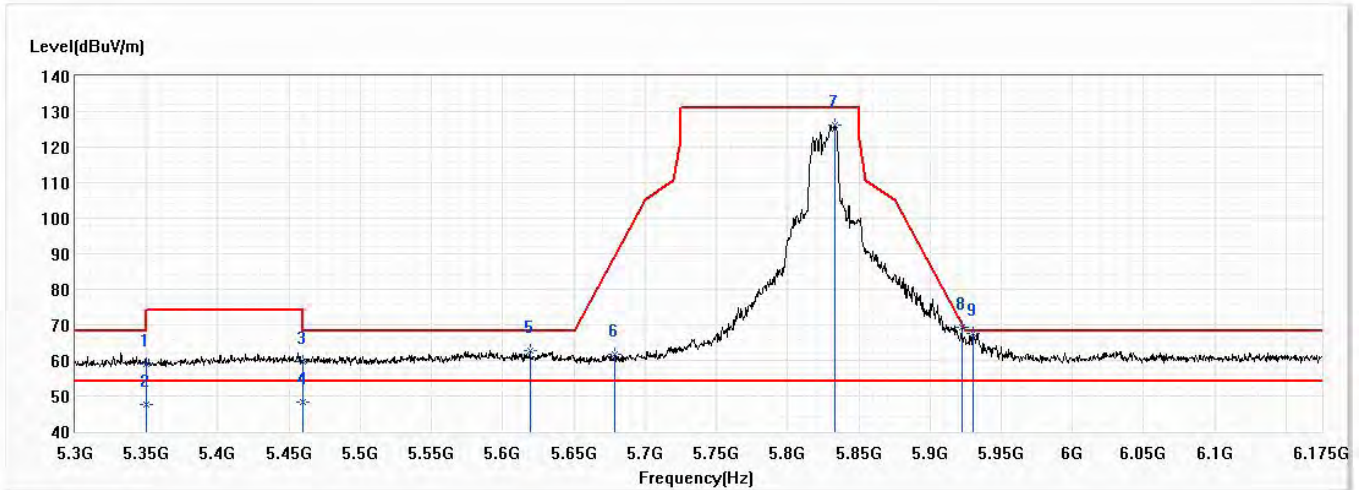


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.82	74.00	-15.18	34.02	24.80	PK
2	5350.000	47.66	54.00	-6.34	22.86	24.80	AV
3	5460.000	59.69	74.00	-14.31	34.70	24.99	PK
4	5460.000	48.37	54.00	-5.63	23.38	24.99	AV
5	5619.375	62.68	68.20	-5.52	37.27	25.41	PK
6	5678.875	61.69	89.61	-27.92	36.10	25.59	PK
7	5833.313	126.30	131.20	-4.90	100.26	26.04	PK
8	5922.125	69.41	70.32	-0.91	43.12	26.29	PK
* 9	5930.438	67.63	68.20	-0.57	41.31	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 151,5.755G,BW40M	Humidity (%RH)	58.0

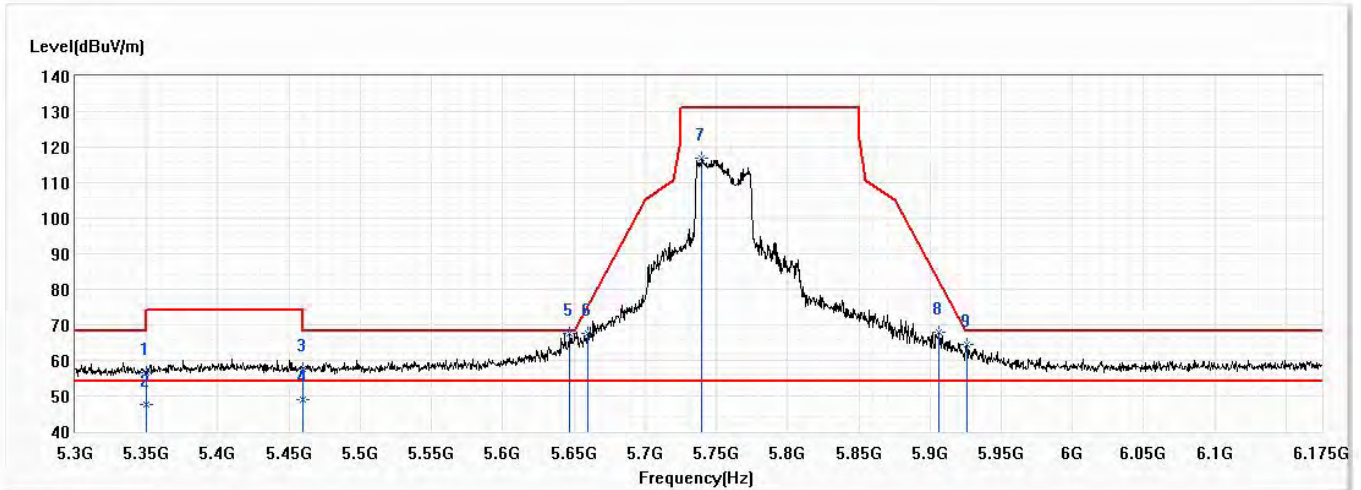


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.62	74.00	-17.38	31.82	24.80	PK
2	5350.000	47.44	54.00	-6.56	22.64	24.80	AV
3	5460.000	57.73	74.00	-16.27	32.74	24.99	PK
4	5460.000	48.90	54.00	-5.10	23.91	24.99	AV
* 5	5646.938	67.47	68.20	-0.73	41.98	25.49	PK
6	5659.625	67.57	75.35	-7.75	42.03	25.54	PK
7	5739.688	116.86	131.20	-14.34	91.10	25.76	PK
8	5906.375	67.93	81.95	-14.06	41.69	26.24	PK
9	5925.625	64.56	68.20	-3.64	38.25	26.31	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 151,5.755G,BW40M	Humidity (%RH)	58.0

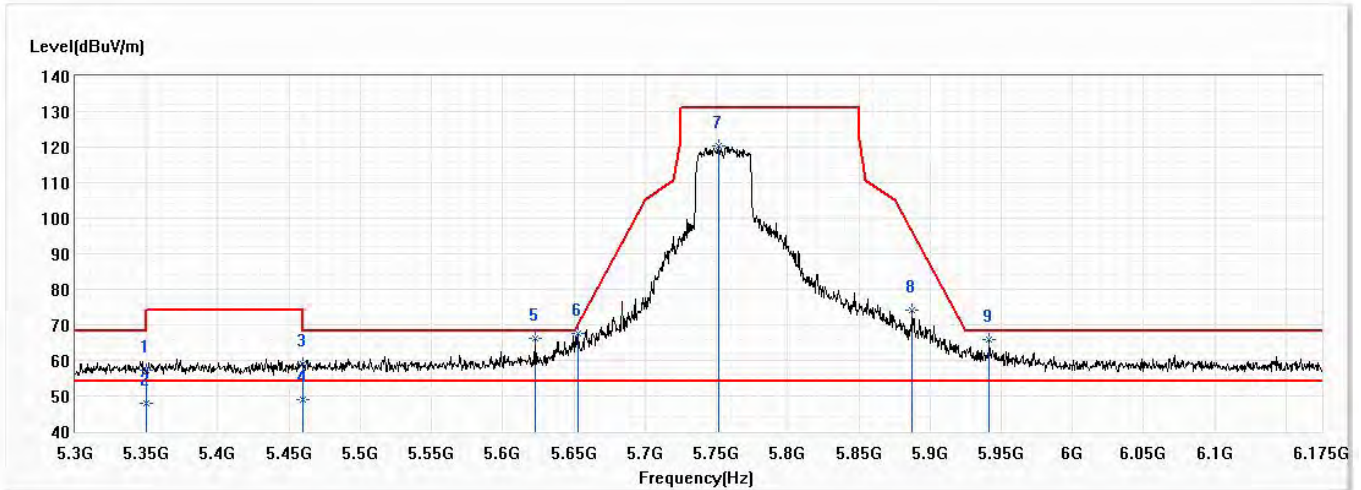


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.18	74.00	-16.82	32.38	24.80	PK
2	5350.000	48.01	54.00	-5.99	23.21	24.80	AV
3	5460.000	58.99	74.00	-15.01	34.00	24.99	PK
4	5460.000	49.11	54.00	-4.89	24.12	24.99	AV
* 5	5622.438	66.06	68.20	-2.14	40.64	25.42	PK
6	5652.625	67.73	70.15	-2.42	42.22	25.51	PK
7	5751.500	120.50	131.20	-10.70	94.70	25.80	PK
8	5887.563	74.10	95.87	-21.78	47.90	26.20	PK
9	5941.813	66.00	68.20	-2.20	39.64	26.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 159,5.795G,BW40M	Humidity (%RH)	58.0

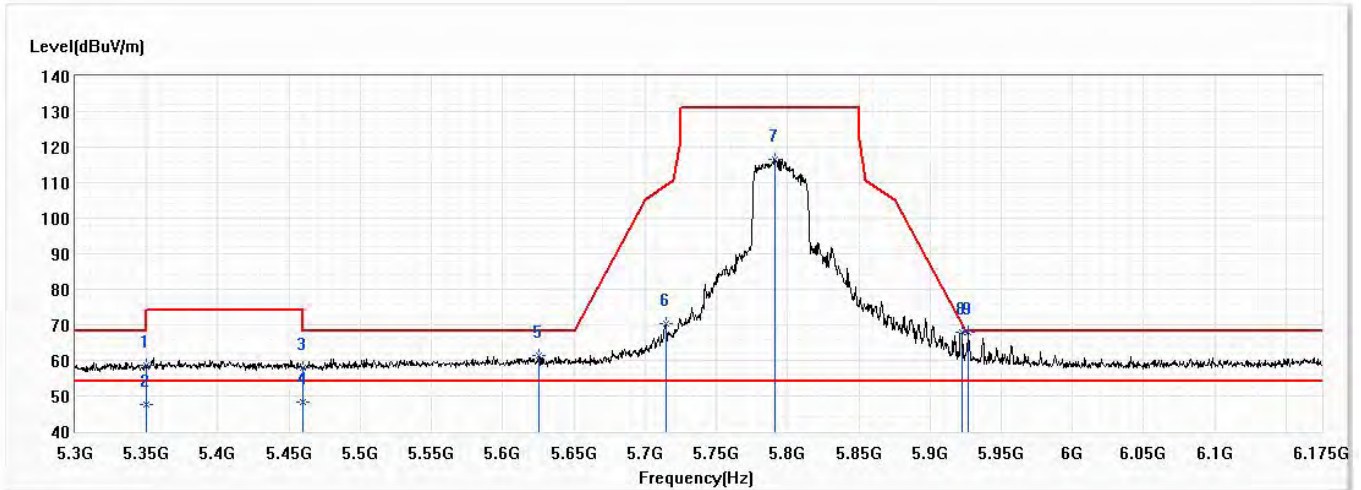


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.54	74.00	-15.46	33.74	24.80	PK
2	5350.000	47.68	54.00	-6.32	22.88	24.80	AV
3	5460.000	57.95	74.00	-16.05	32.96	24.99	PK
4	5460.000	48.33	54.00	-5.67	23.34	24.99	AV
5	5625.500	61.33	68.20	-6.87	35.89	25.44	PK
6	5714.750	70.26	109.33	-39.07	44.56	25.70	PK
7	5790.875	116.57	131.20	-14.63	90.66	25.91	PK
8	5922.125	68.01	70.32	-2.30	41.72	26.29	PK
* 9	5926.938	67.87	68.20	-0.33	41.55	26.32	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 159,5.795G,BW40M	Humidity (%RH)	58.0

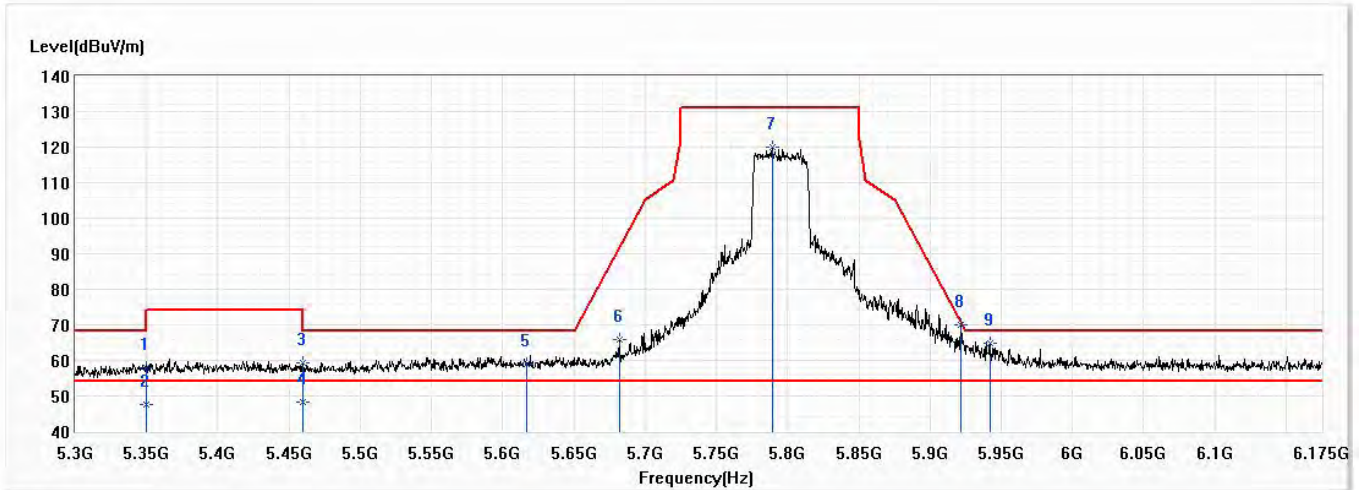


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.85	74.00	-16.15	33.05	24.80	PK
2	5350.000	47.61	54.00	-6.39	22.81	24.80	AV
3	5460.000	59.23	74.00	-14.77	34.24	24.99	PK
4	5460.000	48.29	54.00	-5.71	23.30	24.99	AV
5	5617.188	58.81	68.20	-9.39	33.40	25.41	PK
6	5681.938	65.83	91.87	-26.04	40.23	25.60	PK
7	5789.100	120.11	131.20	-11.09	94.21	25.90	PK
* 8	5921.688	69.89	70.64	-0.75	43.60	26.29	PK
9	5942.250	64.97	68.20	-3.23	38.61	26.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Horizontal	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 155,5.775G,BW80M	Humidity (%RH)	58.0

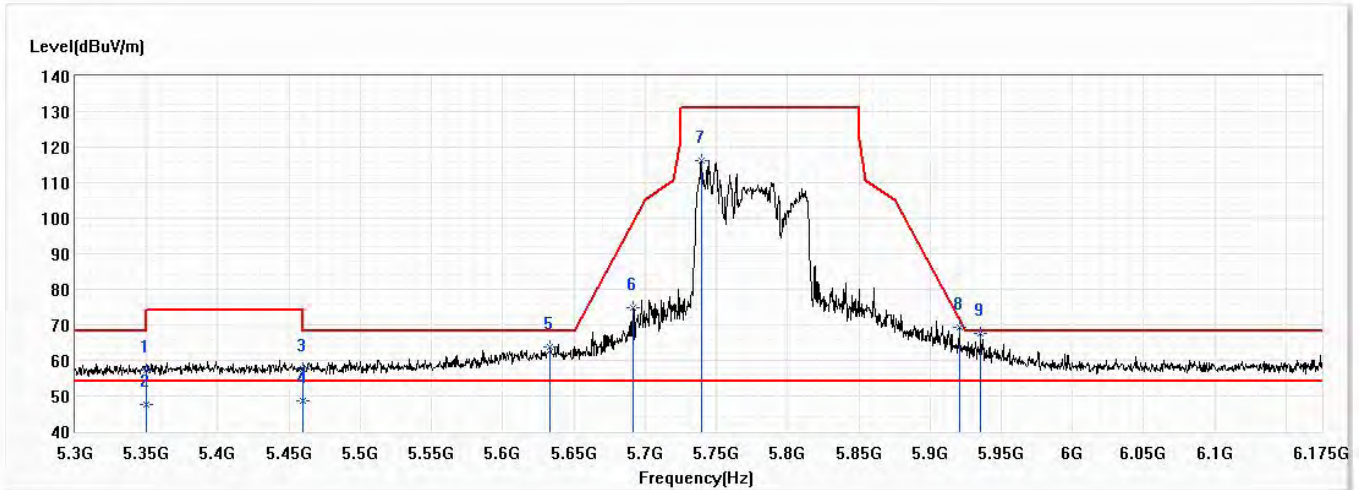


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.26	74.00	-16.74	32.46	24.80	PK
2	5350.000	47.47	54.00	-6.53	22.67	24.80	AV
3	5460.000	57.51	74.00	-16.49	32.52	24.99	PK
4	5460.000	48.66	54.00	-5.34	23.67	24.99	AV
5	5633.375	63.89	68.20	-4.31	38.43	25.46	PK
6	5691.563	74.82	98.98	-24.16	49.20	25.62	PK
7	5739.688	116.20	131.20	-15.00	90.44	25.76	PK
8	5920.813	69.16	71.29	-2.13	42.87	26.29	PK
* 9	5935.688	67.51	68.20	-0.69	41.18	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	EBM552U	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/4
Test Mode	Mode 3: Transmit_BF	Engineer	Scott Chang
Polarity	Vertical	Temperature (°C)	22.5
Test Condition	802.11ax,Ch 155,5.775G,BW80M	Humidity (%RH)	58.0

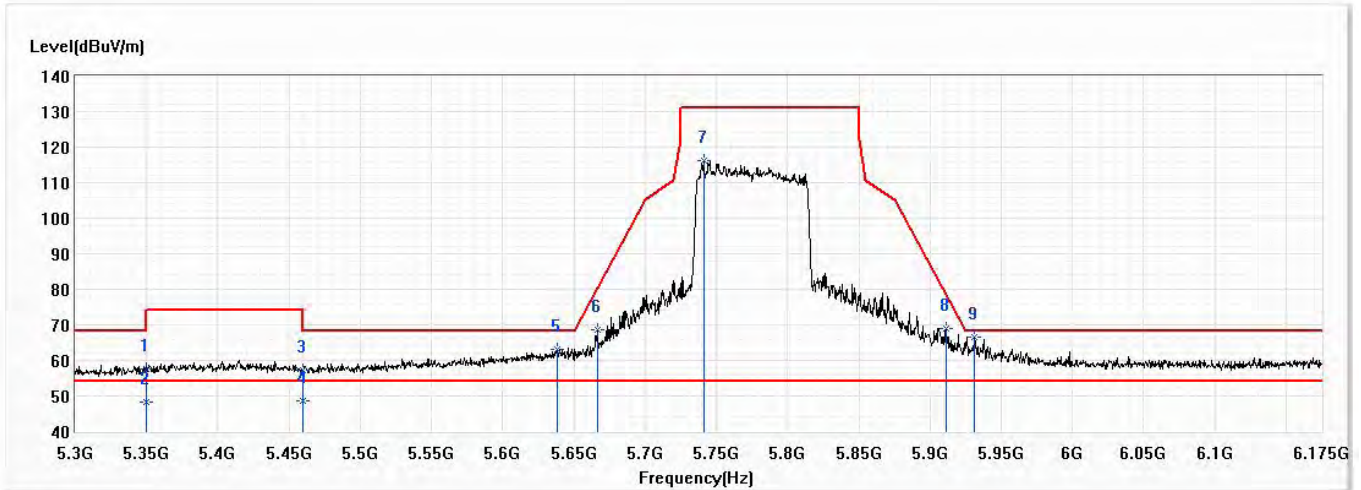

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.42	74.00	-16.58	32.62	24.80	PK
2	5350.000	48.11	54.00	-5.89	23.31	24.80	AV
3	5460.000	57.15	74.00	-16.85	32.16	24.99	PK
4	5460.000	48.61	54.00	-5.39	23.62	24.99	AV
5	5638.188	63.27	68.20	-4.93	37.80	25.47	PK
6	5666.625	68.60	80.54	-11.94	43.05	25.55	PK
7	5741.000	116.36	131.20	-14.84	90.60	25.76	PK
8	5911.188	69.11	78.39	-9.28	42.84	26.27	PK
* 9	5931.313	66.72	68.20	-1.48	40.39	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.