



# FCC RADIO TEST REPORT

Applicant : CASTLENET TECHNOLOGY INC.

---

Address : No. 14, Ln. 141, Sec. 3, Beishen Rd., Shenkeng  
Dist., New Taipei City 22244, Taiwan (R.O.C.)

---

Equipment : D3.0 Cable Gateway

---

Model No. : 1.Infinity401  
2.CBV384Z4-AC1600MP

---

Trade Name : CASTLENET

---

FCC ID : RK9-INFINITY401

---

## I HEREBY CERTIFY THAT :

The sample was received on Apr. 29, 2021 and the testing was completed on Jul. 26, 2021 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





## Contents

<b>1. Summary of Test Procedure and Test Results.....</b>	<b>5</b>
1.1 Applicable Standards .....	5
<b>2. Test Configuration of Equipment under Test .....</b>	<b>6</b>
2.1 Feature of Equipment.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	10
2.5 General Information of Test.....	11
2.6 Measurement Uncertainty .....	11
<b>3. Test Equipment and Ancillaries Used for Tests .....</b>	<b>12</b>
<b>4. Antenna Requirements.....</b>	<b>14</b>
4.1 Antenna Construction and Directional Gain.....	14
<b>5. Test of AC Power Line Conducted Emission .....</b>	<b>15</b>
5.1 Test Limit .....	15
5.2 Test Procedures .....	15
5.3 Typical Test Setup .....	16
5.4 Test Result and Data.....	17
5.5 Test Photographs .....	19
<b>6. Test of Radiated Spurious Emission.....</b>	<b>20</b>
6.1 Test Limit .....	20
6.2 Test Procedures .....	21
6.3 Typical Test Setup .....	22
6.4 Test Result and Data (9KHz ~ 30MHz) .....	23
6.5 Test Result and Data (30MHz ~ 1GHz).....	23
6.6 Test Result and Data (1GHz ~ 25GHz).....	25
6.7 Restricted Bands of Operation .....	49
6.8 Test Photographs (30MHz ~ 1GHz).....	50
6.9 Test Photographs (1GHz ~ 25GHz).....	51
<b>7. Test of Conducted Spurious Emission .....</b>	<b>53</b>
7.1 Test Limit .....	53
7.2 Test Procedure .....	53
7.3 Test Setup Layout .....	53
7.4 Test Result and Data.....	53
<b>8. On Time, Duty Cycle and Measurement methods .....</b>	<b>68</b>
8.1 Test Limit .....	68
8.2 Test Procedure .....	68
8.3 Test Setup Layout .....	68
8.4 Test Result and Data.....	68
<b>9. 6dB Bandwidth Measurement Data .....</b>	<b>70</b>
9.1 Test Limit .....	70
9.2 Test Procedures .....	70
9.3 Test Setup Layout .....	70



9.4 Test Result and Data ..... 70

**10. Maximum Peak and Average Output Power ..... 75**

10.1 Test Limit ..... 75

10.2 Test Procedures ..... 75

10.3 Test Setup Layout ..... 75

10.4 Test Result and Data ..... 76

**11. Power Spectral Density ..... 77**

11.1 Test Limit ..... 77

11.2 Test Procedures ..... 77

11.3 Test Setup Layout ..... 77

11.4 Test Result and Data ..... 78

**12. Radio Frequency Exposure ..... 83**

12.1 Applicable Standards ..... 83

12.2 EUT Specification ..... 83

12.3 Test Results ..... 84

12.4 Calculation ..... 84

12.5 Maximum Permissible Exposure ..... 85



### History of this test report

Report No.	Issue Date	Description
21010191-TRFCC01	Jul. 30, 2021	Original



# 1. Summary of Test Procedure and Test Results

## 1.1 Applicable Standards

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Maximum Peak and Average Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.

\*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(21010191-TEFV01).



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment

Frequency Range	802.11b/g/n: 2412~2462MHz 802.11a/n/ac:5180-5240MHz, 5745-5825MHz
Modulation Type	2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 5GHz: 802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	DSSS, OFDM
Data Rate	WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS23, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	Dipole Antenna
Antenna Gain	2412-2462MHz: ANT A: 3.00dBi, ANT C: 4.82dBi 5180-5240MHz: ANT A :3.00dBi, ANT B :6.20dB, ANT C: 5.88dBi 5745-5825MHz: ANT A :3.00dBi, ANT B :6.20dB, ANT C: 5.88dBi
Adapter	1.Brand:MOSO, Model:MS-V2000R120-024H0-US 2.Brand:AcBel, Model:WAM005

Note:

- 1.802.11b fix ANT A(AJ1) transmit signal.
- 2.EUT not support TPC Function.
- 3.For more details, please refer to the User's manual of the EUT.

Difference description

Model No.	Remark
Infinity401	For market distinction
CBV384Z4-AC1600MP	



## 2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*01</b>	<b>2412</b>	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	<b>*11</b>	<b>2462</b>
<b>*06</b>	<b>2437</b>	---	---

802.11n HT40 (2422MHz~2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
<b>*03</b>	<b>2422</b>	<b>*09</b>	<b>2452</b>
04	2427	---	---
05	2432	---	---
<b>*06</b>	<b>2437</b>	---	---

Note: Channels remarked \* are selected to perform test.



### 2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Remote workstation and EUT for RF test. The Remote workstation included Notebook.
- c. An executive program, "Mtool ver.2.0.1.0" under Windows OS system was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11b (1Mbps) Adapter: MS-V2000R120-024H0-US
2	802.11g (6Mbps) Adapter: MS-V2000R120-024H0-US
3	802.11n HT20 (6.5Mbps) Adapter: MS-V2000R120-024H0-US
4	802.11n HT40 (13.5Mbps) Adapter: MS-V2000R120-024H0-US
1	802.11b (1Mbps) Adapter: WAM005
2	802.11g (6Mbps) Adapter: WAM005
3	802.11n HT20 (6.5Mbps) Adapter: WAM005
4	802.11n HT40 (13.5Mbps) Adapter: WAM005
caused "Test Mode 3" generated the worst case, it was reported as the final data.	
Radiation Emissions ((9KHz ~30MHz & 30MHz ~ 1GHz))	
Test Mode	Operating Description
1	802.11b (1Mbps) Adapter: MS-V2000R120-024H0-US
2	802.11g (6Mbps) Adapter: MS-V2000R120-024H0-US
3	802.11n HT20 (6.5Mbps) Adapter: MS-V2000R120-024H0-US
4	802.11n HT40 (13.5Mbps) Adapter: MS-V2000R120-024H0-US
5	802.11b (1Mbps) Adapter: WAM005
6	802.11g (6Mbps) Adapter: WAM005
7	802.11n HT20 (6.5Mbps) Adapter: WAM005
8	802.11n HT40 (13.5Mbps) Adapter: WAM005
caused "Test Mode 3" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps) Adapter: MS-V2000R120-024H0-US
2	802.11g (6Mbps) Adapter: MS-V2000R120-024H0-US
3	802.11n HT20 (6.5Mbps) Adapter: MS-V2000R120-024H0-US
4	802.11n HT40 (13.5Mbps) Adapter: MS-V2000R120-024H0-US
5	802.11b (1Mbps) Adapter: WAM005
6	802.11g (6Mbps) Adapter: WAM005
7	802.11n HT20 (6.5Mbps) Adapter: WAM005
8	802.11n HT40 (13.5Mbps) Adapter: WAM005
caused "Test Mode 1~4" generated the worst case, they were reported as the final data.	





The EUT incorporates a MIMO function

Modulation Type	TX CONFIGURATION
802.11b	1TX ,ANT A(AJ1)
802.11g	2TX
802.11n HT20	2TX
802.11n HT40	2TX



### 2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A



## 2.5 General Information of Test

Test Site	<b>CerpPASS Technology Corporation Test Laboratory</b> Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1079, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2021/07/09	25°C / 51%	Nick Guan
Radiated Emissions	3M02-NK	2021/07/08~2021/07/12	23~24°C / 42~46%	Nick Guan
AC Power Line Conducted Emission	CON01-NK	2021/07/26	27°C / 50%	Dian Chen

## 2.6 Measurement Uncertainty

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.63dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
Radiated Spurious Emission(1GHz~25GHz)	±6.6dB
Conducted Spurious Emission	±1.8dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±1.2%
Power Spectral Density	±1.8dB
Duty Cycle	±1.2%



### 3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2021/04/26	2022/04/25
Active Loop Antenna	EMCO	6507	40855	2021/06/10	2022/06/09
Horn Antenna	EMCO	3115	31601	2020/10/16	2021/10/15
Horn Antenna	EMCO	3116	31974	2020/09/24	2021/09/23
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2021/06/30	2022/06/29
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2020/08/03	2021/08/02
Preamplifier	EM Electronics corp.	EM330	60658	2020/10/20	2021/10/19
Preamplifier	EM Electronics corp.	EM330	60660	2021/03/18	2022/03/17
Preamplifier	Agilent	8449B	3008A01954	2021/03/22	2022/03/21
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2020/11/06	2021/11/05
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2021/04/12	2022/04/11
Cable-0.5m(1G-18G)	EMEC	EM104-SMSM-0.5M	CCE1354	2021/05/06	2022/05/05
Cable-3m(1G-18G)	EMEC	EM104-SMSM-3M	CCE1355	2021/05/06	2022/05/05
Cable-8m(1G-18G)	EMEC	EM104-SMSM-8M	CCE1356	2021/05/06	2022/05/05
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2021/04/03	2022/04/02
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2021/04/09	2022/04/08
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2021/04/08	2022/04/07
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2020/08/03	2021/08/02
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2021/04/19	2022/04/18
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2020/12/25	2021/12/24
Attenuator	KEYSIGHT	8491B	MY39250703	2021/04/09	2022/04/08
TEMP & HUMIDITY CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2020/08/25	2021/08/24
Power Meter	Anritsu	ML2495A	1224005	2021/04/14	2022/04/13
Power Sensor	Anritsu	MA2411B	1207295	2021/04/14	2022/04/13



Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2020/09/11	2021/09/10
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-516	2020/09/26	2021/09/25
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2020/09/17	2021/09/16
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



## 4. Antenna Requirements

### 4.1 Antenna Construction and Directional Gain

Antenna Type	Dipole Antenna
Antenna Gain	ANT A: 3.00dBi, ANT C: 4.82dBi

2412-2462MHz:

For 11b:

For Power directional gain=  $G_{ant}= 3.00$  dBi

For PSD directional gain =  $G_{ant}= 3.00$  dBi

For 11g / 11n:

For Power directional gain=  $G_{ant}= 4.82$  dBi

For PSD directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$   
= 6.97 (dBi)



## 5. Test of AC Power Line Conducted Emission

### 5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



### 5.3 Typical Test Setup

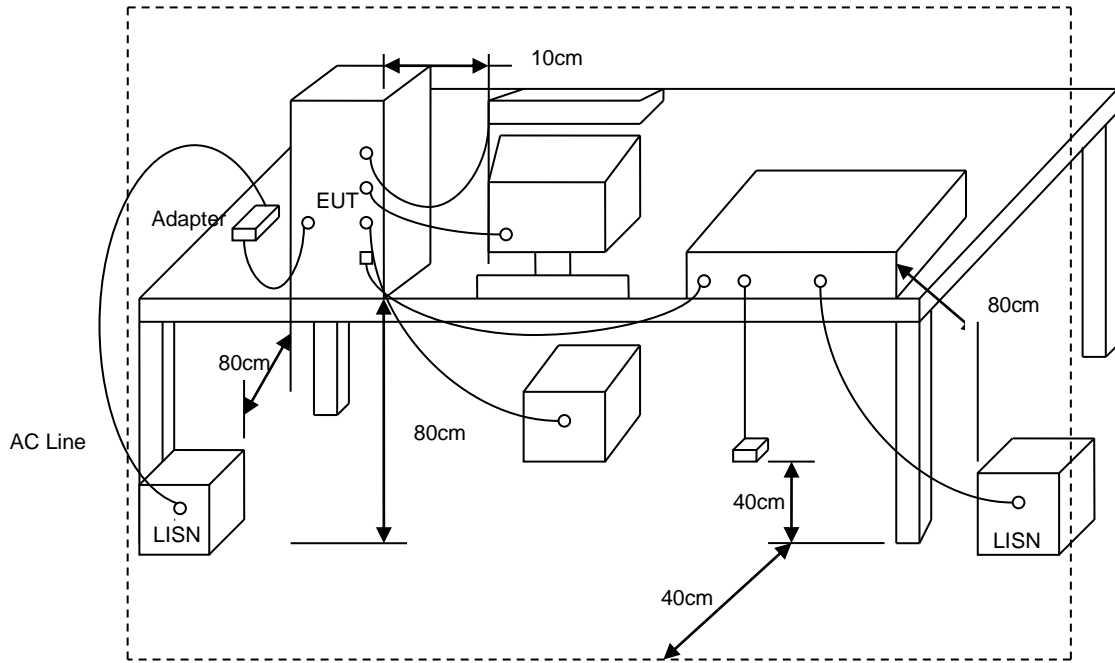






5.4 Test Result and Data

Power	: AC 120V / 60Hz	Pol/Phase	: LINE
Test Mode	: Mode 3		

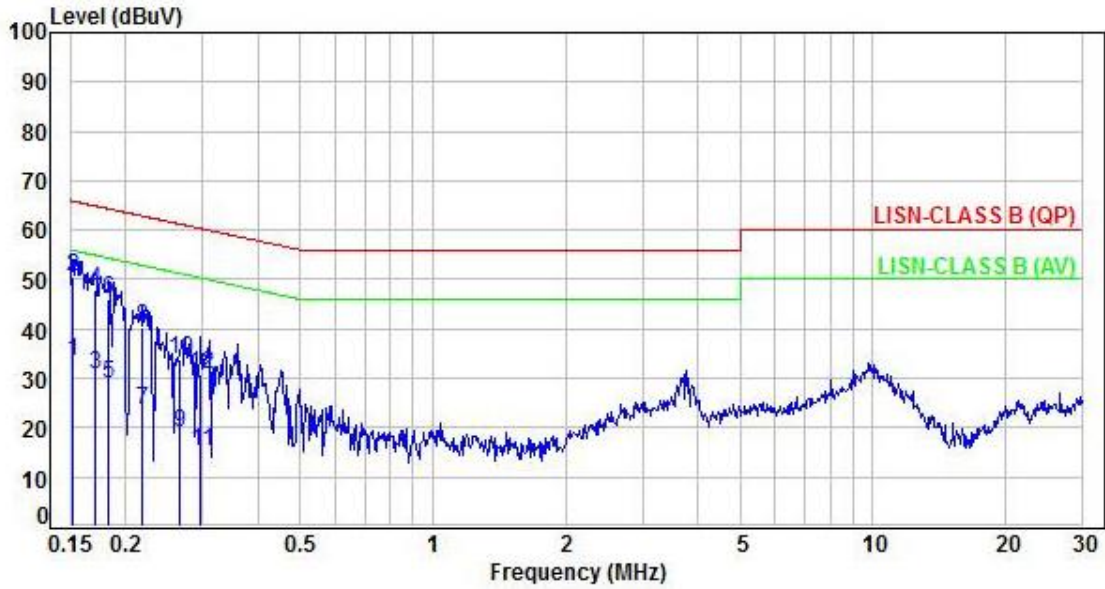


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.96	23.43	33.39	55.94	-22.55	Average	P
2	0.15	9.96	40.74	50.70	65.94	-15.24	QP	P
3	0.17	9.96	20.69	30.65	54.94	-24.29	Average	P
4	0.17	9.96	37.91	47.87	64.94	-17.07	QP	P
5	0.18	9.96	19.03	28.99	54.32	-25.33	Average	P
6	0.18	9.96	35.87	45.83	64.32	-18.49	QP	P
7	0.22	9.96	13.71	23.67	52.92	-29.25	Average	P
8	0.22	9.96	30.22	40.18	62.92	-22.74	QP	P
9	0.27	9.96	9.00	18.96	51.22	-32.26	Average	P
10	0.27	9.96	24.04	34.00	61.22	-27.22	QP	P
11	0.30	9.96	5.34	15.30	50.32	-35.02	Average	P
12	0.30	9.96	20.80	30.76	60.32	-29.56	QP	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 120V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 3		

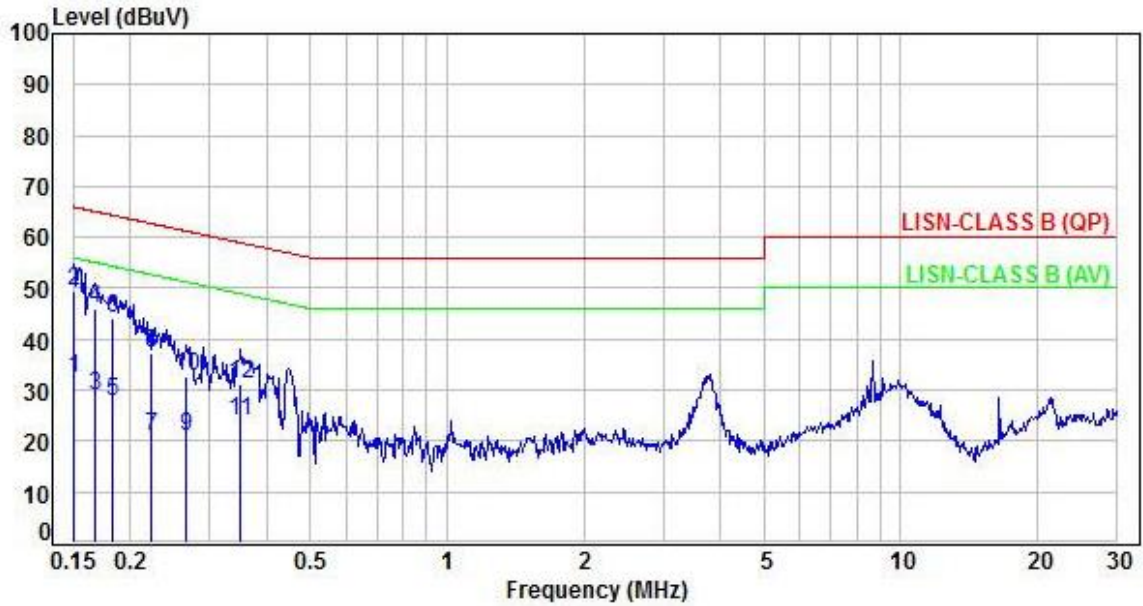

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.97	22.29	32.26	55.98	-23.72	Average	P
2	0.15	9.97	39.38	49.35	65.98	-16.63	QP	P
3	0.17	9.97	19.02	28.99	55.08	-26.09	Average	P
4	0.17	9.97	36.11	46.08	65.08	-19.00	QP	P
5	0.18	9.97	17.82	27.79	54.33	-26.54	Average	P
6	0.18	9.97	34.15	44.12	64.33	-20.21	QP	P
7	0.22	9.97	11.01	20.98	52.71	-31.73	Average	P
8	0.22	9.97	27.25	37.22	62.71	-25.49	QP	P
9	0.27	9.97	11.00	20.97	51.25	-30.28	Average	P
10	0.27	9.97	22.62	32.59	61.25	-28.66	QP	P
11	0.35	9.98	13.93	23.91	48.96	-25.05	Average	P
12	0.35	9.98	21.39	31.37	58.96	-27.59	QP	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



## 6. Test of Radiated Spurious Emission

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



## 6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized. (Y-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m). There's no corresponding limitation in the actual test item.




### 6.3 Typical Test Setup


Below 30MHz test setup

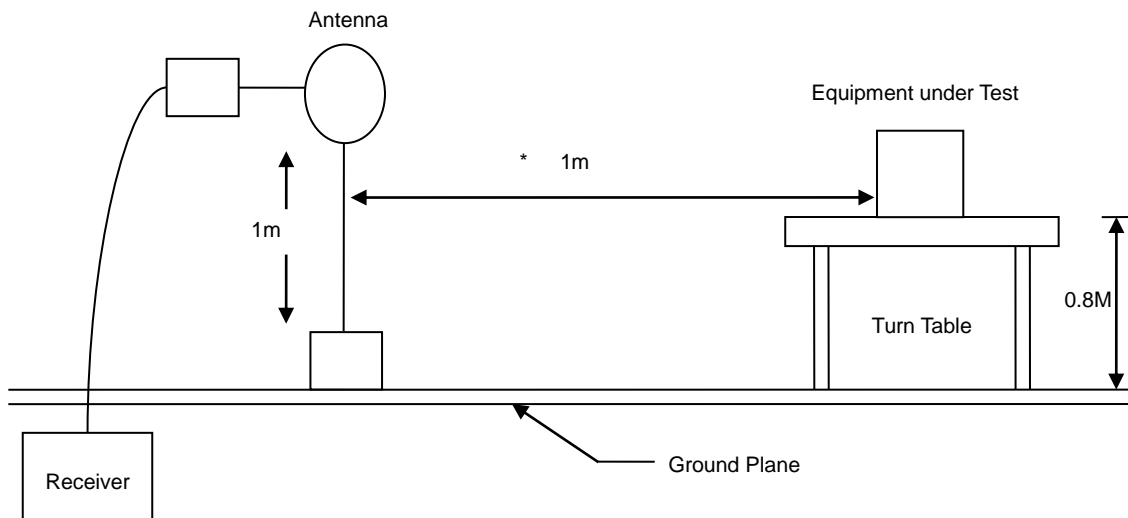

30MHz- 1GHz Test Setup

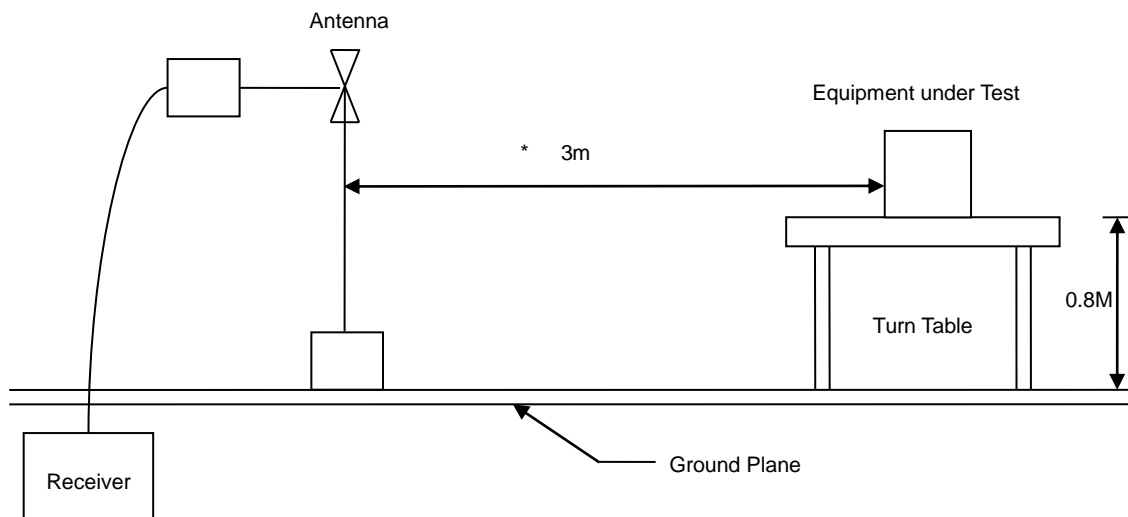

Above 1GHz Test Setup

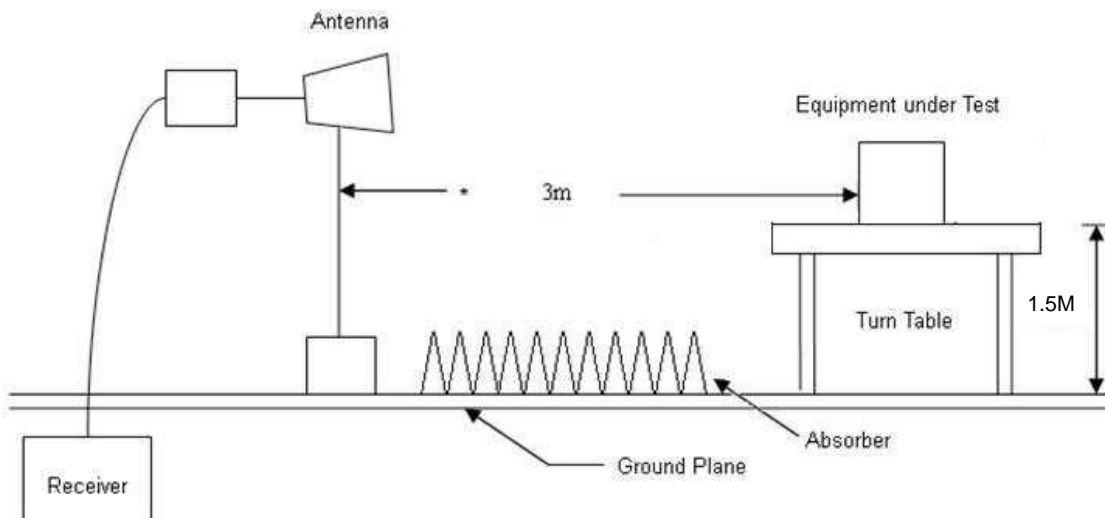




### 6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

### 6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3		:

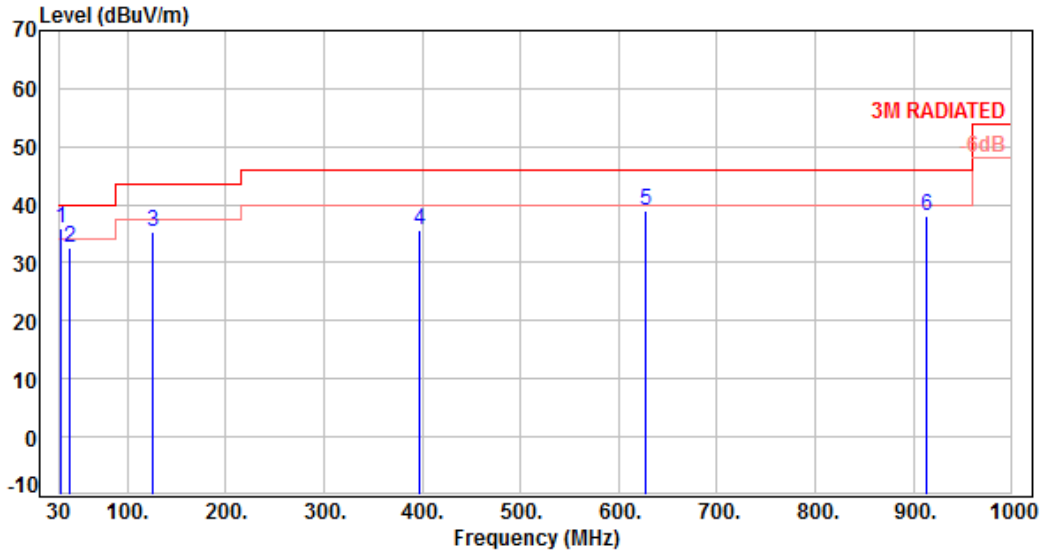


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	32.18	-11.81	47.67	35.86	40.00	-4.14	Peak	400	360	P
2	41.57	-10.90	43.58	32.68	40.00	-7.32	Peak	400	360	P
3	125.74	-12.46	47.87	35.41	43.50	-8.09	Peak	400	360	P
4	397.85	-7.09	42.58	35.49	46.00	-10.51	Peak	400	360	P
5	627.43	-2.07	41.05	38.98	46.00	-7.02	Peak	400	360	P
6	912.85	2.17	35.78	37.95	46.00	-8.05	Peak	400	360	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3		:

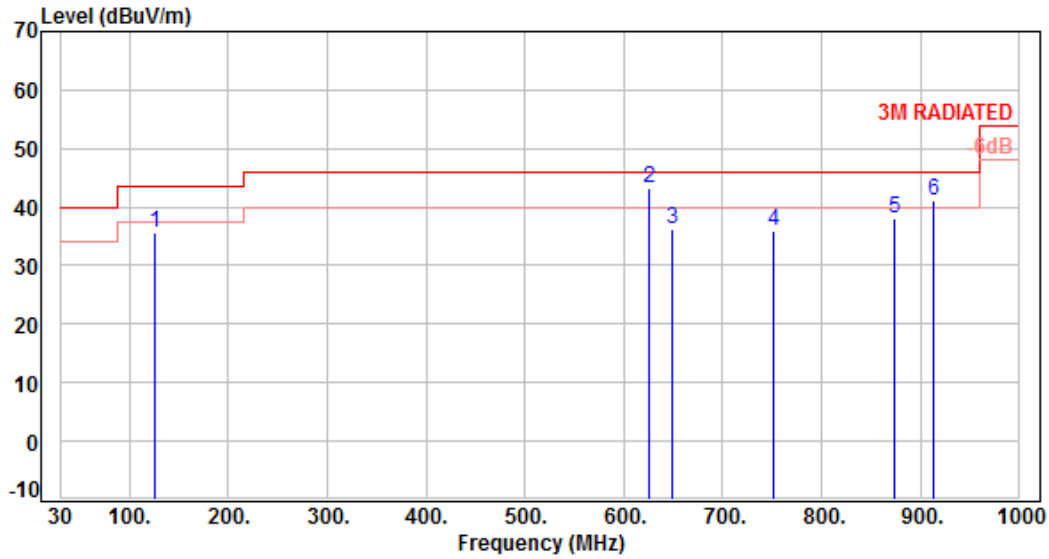


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	125.97	-12.46	48.00	35.54	43.50	-7.96	Peak	400	360	P
2	625.90	-2.04	45.41	43.37	46.00	-2.63	QP	125	358	P
3	648.75	-1.94	38.03	36.09	46.00	-9.91	Peak	400	360	P
4	751.26	-0.19	36.02	35.83	46.00	-10.17	Peak	400	360	P
5	873.90	1.47	36.72	38.19	46.00	-7.81	Peak	400	360	P
6	912.64	2.16	38.92	41.08	46.00	-4.92	Peak	400	360	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01		:

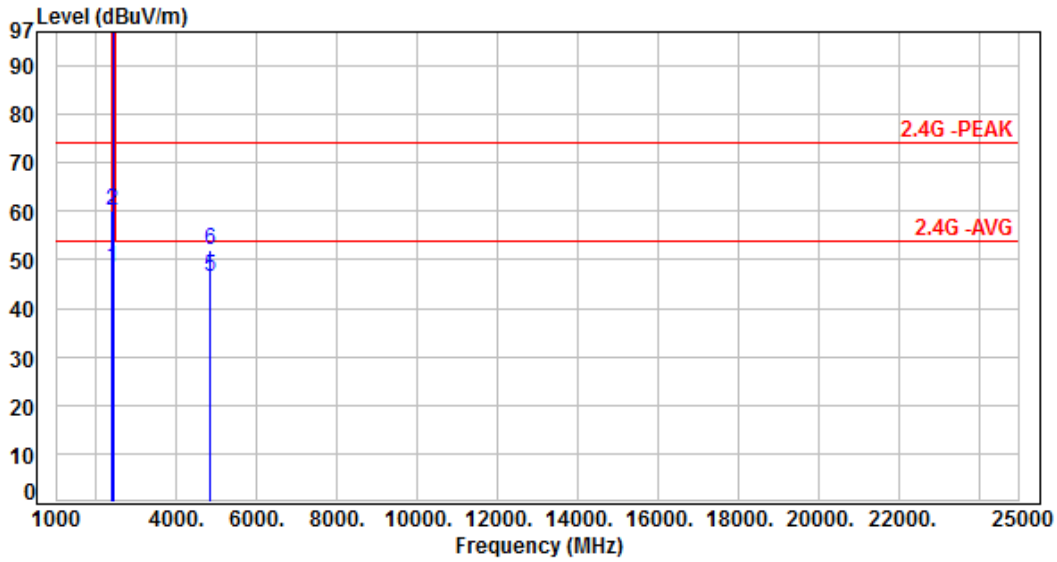


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	51.88	48.26	54.00	-5.74	Average	224	343	P
2	2390.00	-3.62	63.59	59.97	74.00	-14.03	Peak	224	343	P
3	2412.00	-3.60	110.38	106.78	200.00	-93.22	Average	224	343	P
4	2412.00	-3.60	113.01	109.41	200.00	-90.59	Peak	224	343	P
5	4824.00	3.73	42.70	46.43	54.00	-7.57	Average	100	277	P
6	4824.00	3.73	48.17	51.90	74.00	-22.10	Peak	100	277	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor





Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01		:

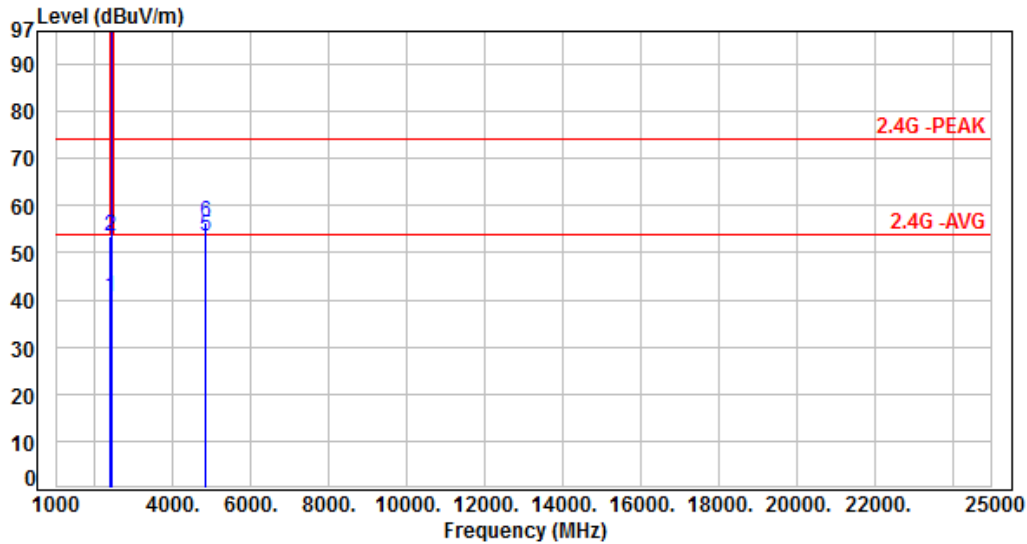


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	44.09	40.47	54.00	-13.53	Average	244	199	P
2	2390.00	-3.62	57.21	53.59	74.00	-20.41	Peak	244	199	P
3	2412.00	-3.60	104.02	100.42	200.00	-99.58	Average	244	199	P
4	2412.00	-3.60	106.63	103.03	200.00	-96.97	Peak	244	199	P
5	4824.00	3.73	49.76	53.49	54.00	-0.51	Average	259	273	P
6	4824.00	3.73	52.55	56.28	74.00	-17.72	Peak	259	273	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH06		:

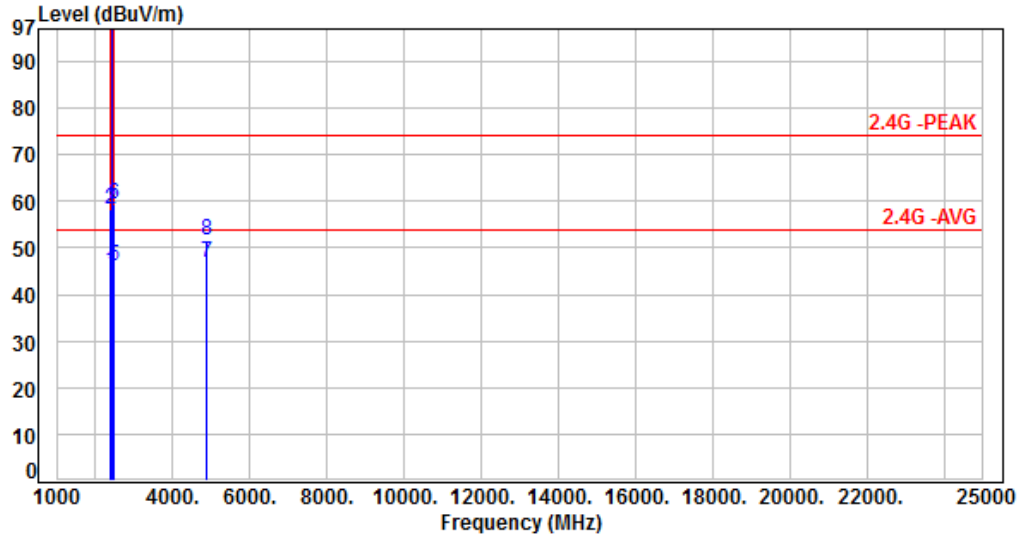


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	48.51	44.89	54.00	-9.11	Average	231	314	P
2	2390.00	-3.62	61.86	58.24	74.00	-15.76	Peak	231	314	P
3	2437.00	-3.57	108.90	105.33	200.00	-94.67	Average	231	314	P
4	2437.00	-3.57	111.53	107.96	200.00	-92.04	Peak	231	314	P
5	2483.50	-3.40	49.63	46.23	54.00	-7.77	Average	231	314	P
6	2483.50	-3.40	62.67	59.27	74.00	-14.73	Peak	231	314	P
7	4874.00	3.90	43.05	46.95	54.00	-7.05	Average	211	61	P
8	4874.00	3.90	47.67	51.57	74.00	-22.43	Peak	211	61	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH06		:

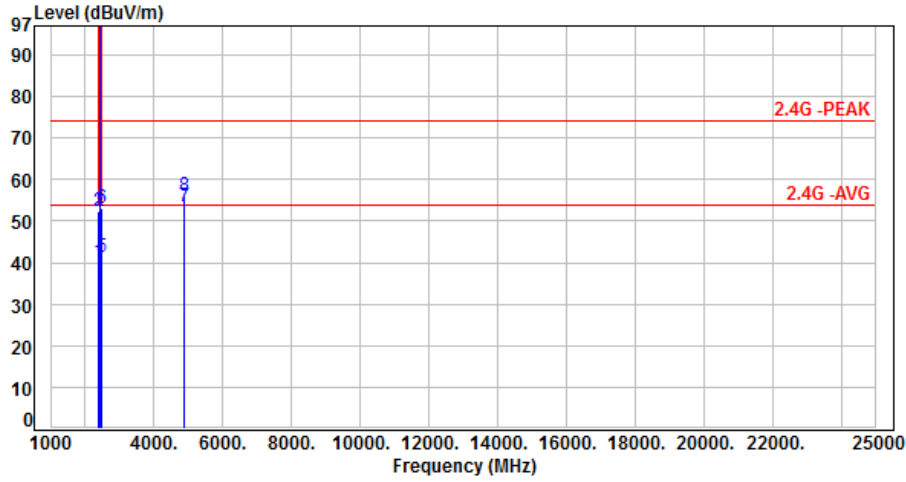


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	43.83	40.21	54.00	-13.79	Average	216	194	P
2	2390.00	-3.62	55.95	52.33	74.00	-21.67	Peak	216	194	P
3	2437.00	-3.57	101.98	98.41	200.00	-101.59	Average	216	194	P
4	2437.00	-3.57	104.53	100.96	200.00	-99.04	Peak	216	194	P
5	2483.50	-3.40	44.57	41.17	54.00	-12.83	Average	188	300	P
6	2483.50	-3.40	56.68	53.28	74.00	-20.72	Peak	188	300	P
7	4874.00	3.90	49.50	53.40	54.00	-0.60	Average	188	300	P
8	4874.00	3.90	52.13	56.03	74.00	-17.97	Peak	188	300	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH11		:

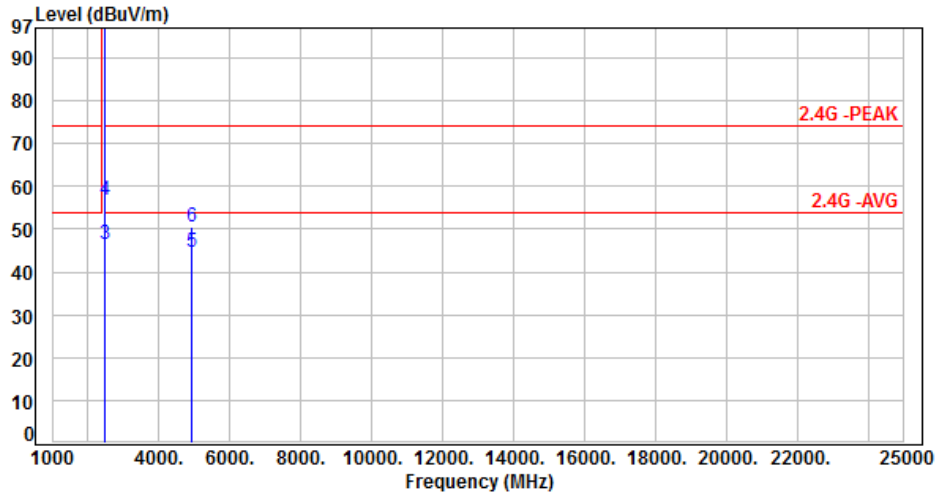


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.50	107.33	103.83	200.00	-96.17	Average	170	334	P
2	2462.00	-3.50	109.93	106.43	200.00	-93.57	Peak	170	334	P
3	2483.50	-3.40	50.04	46.64	54.00	-7.36	Average	170	334	P
4	2483.50	-3.40	60.21	56.81	74.00	-17.19	Peak	170	334	P
5	4924.00	4.10	40.68	44.78	54.00	-9.22	Average	104	18	P
6	4924.00	4.10	46.29	50.39	74.00	-23.61	Peak	104	18	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH11		:

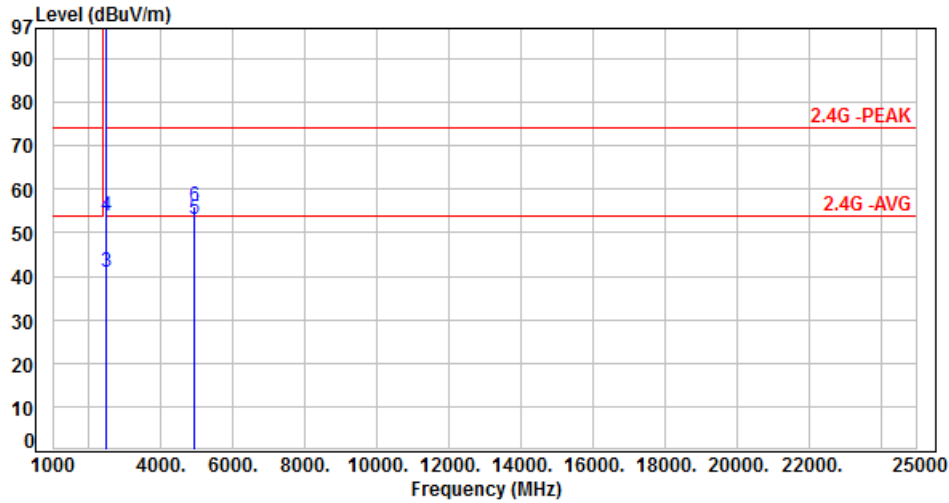


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.50	101.86	98.36	200.00	-101.64	Average	205	218	P
2	2462.00	-3.50	104.55	101.05	200.00	-98.95	Peak	205	218	P
3	2483.50	-3.40	44.26	40.86	54.00	-13.14	Average	205	218	P
4	2483.50	-3.40	57.17	53.77	74.00	-20.23	Peak	205	218	P
5	4924.00	4.10	49.03	53.13	54.00	-0.87	Average	208	302	P
6	4924.00	4.10	52.12	56.22	74.00	-17.78	Peak	208	302	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH01		:

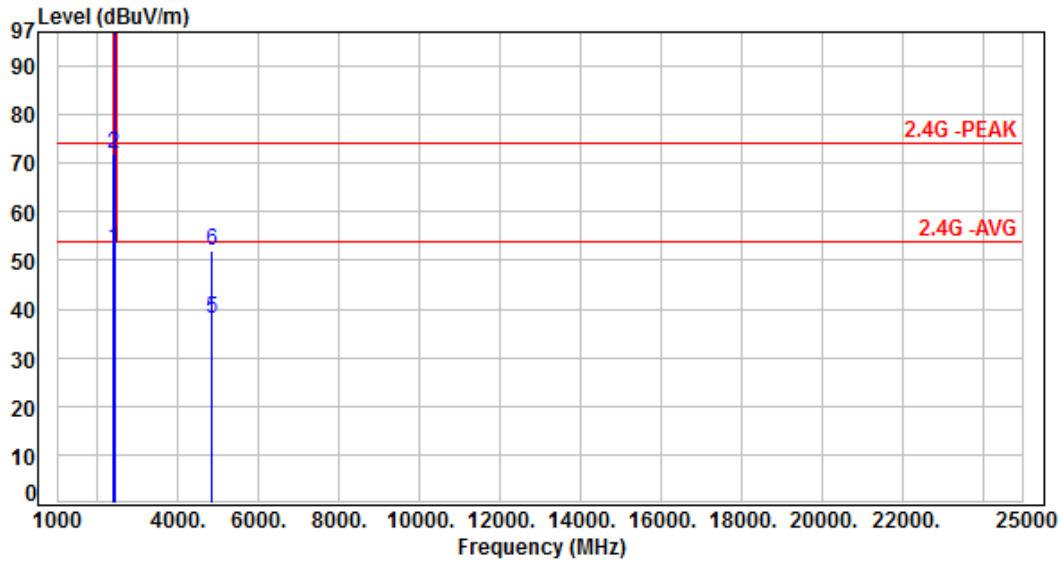

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	55.83	52.21	54.00	-1.79	Average	100	279	P
2	2390.00	-3.62	75.70	72.08	74.00	-1.92	Peak	103	360	P
3	2412.00	-3.60	106.94	103.34	200.00	-96.66	Average	103	360	P
4	2412.00	-3.60	117.32	113.72	200.00	-86.28	Peak	103	360	P
5	4824.00	3.73	34.40	38.13	54.00	-15.87	Average	100	279	P
6	4824.00	3.73	48.11	51.84	74.00	-22.16	Peak	100	279	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH01		:

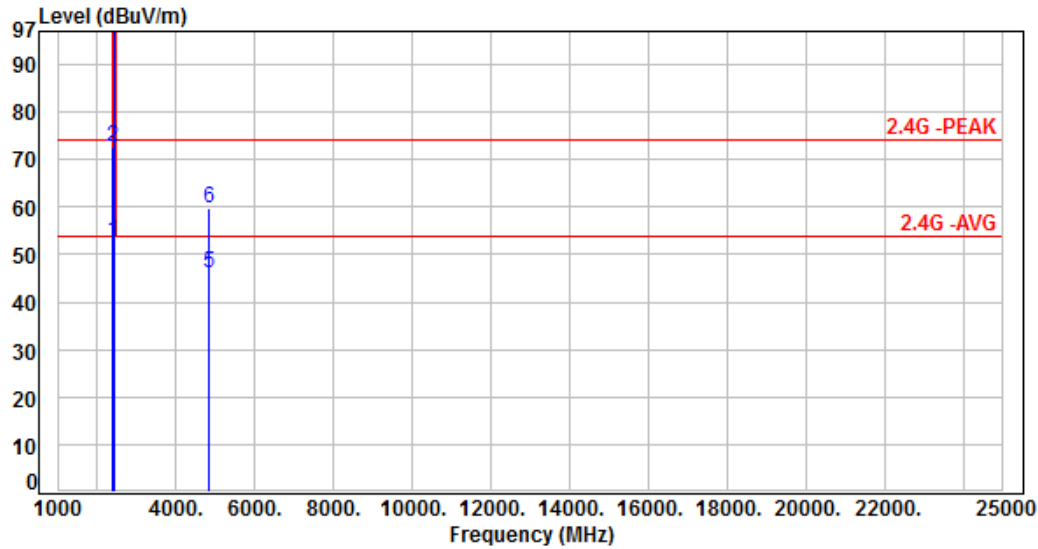


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	56.21	52.59	54.00	-1.41	Average	220	283	P
2	2390.00	-3.62	76.13	72.51	74.00	-1.49	Peak	220	283	P
3	2412.00	-3.60	107.08	103.48	200.00	-96.52	Average	220	283	P
4	2412.00	-3.60	118.62	115.02	200.00	-84.98	Peak	220	283	P
5	4824.00	3.73	42.36	46.09	54.00	-7.91	Average	257	271	P
6	4824.00	3.73	55.93	59.66	74.00	-14.34	Peak	257	271	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH06		:

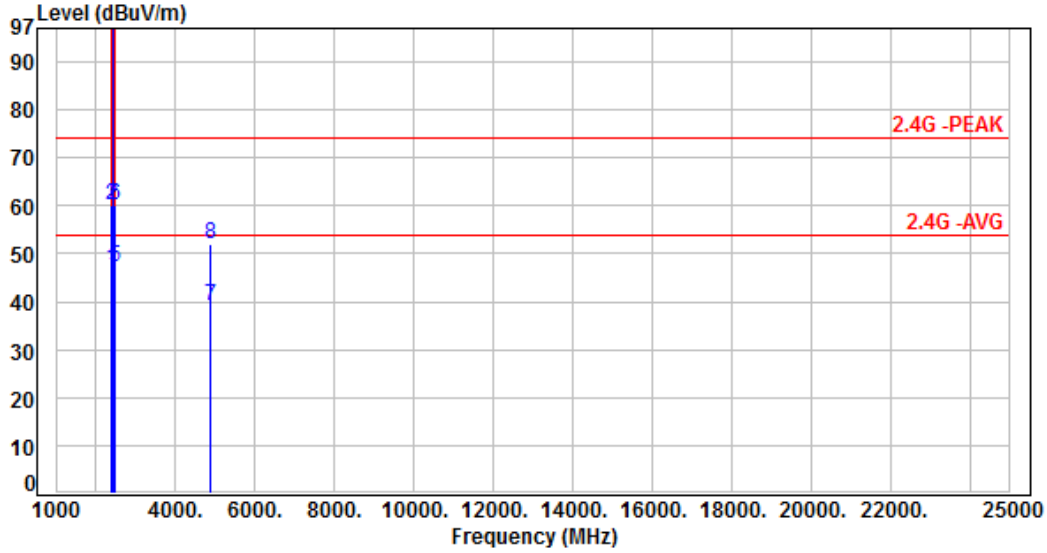


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	50.28	46.66	54.00	-7.34	Average	102	350	P
2	2390.00	-3.62	63.88	60.26	74.00	-13.74	Peak	102	350	P
3	2437.00	-3.57	107.16	103.59	200.00	-96.41	Average	102	350	P
4	2437.00	-3.57	118.63	115.06	200.00	-84.94	Peak	102	350	P
5	2483.50	-3.40	50.54	47.14	54.00	-6.86	Average	102	350	P
6	2483.50	-3.40	63.52	60.12	74.00	-13.88	Peak	102	350	P
7	4874.00	3.90	35.12	39.02	54.00	-14.98	Average	231	268	P
8	4874.00	3.90	48.08	51.98	74.00	-22.02	Peak	231	268	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor





Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH06		:

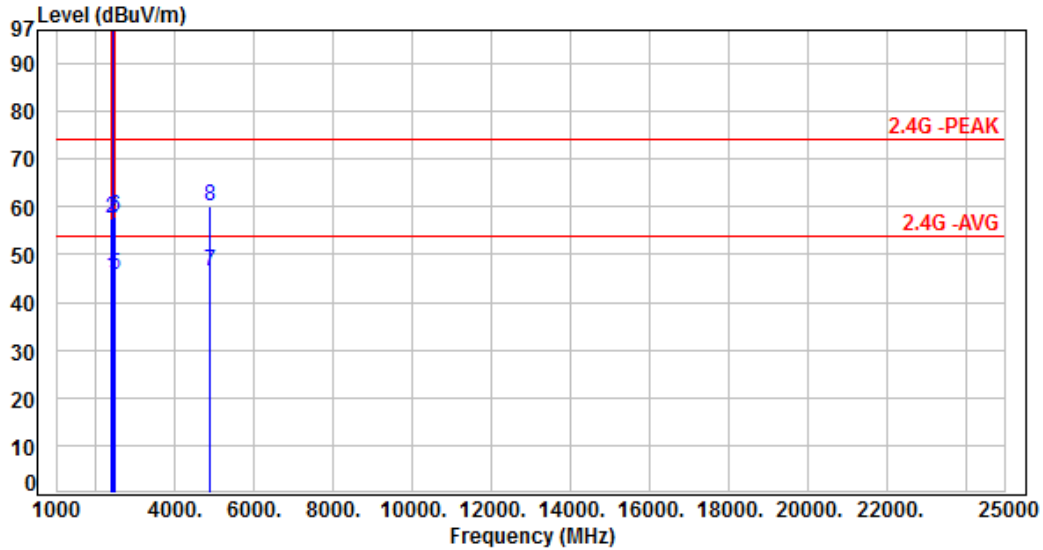


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	48.98	45.36	54.00	-8.64	Average	372	263	P
2	2390.00	-3.62	61.06	57.44	74.00	-16.56	Peak	372	263	P
3	2437.00	-3.57	108.43	104.86	200.00	-95.14	Average	372	263	P
4	2437.00	-3.57	119.79	116.22	200.00	-83.78	Peak	372	263	P
5	2483.50	-3.40	49.29	45.89	54.00	-8.11	Average	372	263	P
6	2483.50	-3.40	61.39	57.99	74.00	-16.01	Peak	372	263	P
7	4874.00	3.90	42.46	46.36	54.00	-7.64	Average	186	300	P
8	4874.00	3.90	56.31	60.21	74.00	-13.79	Peak	186	300	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH11		:

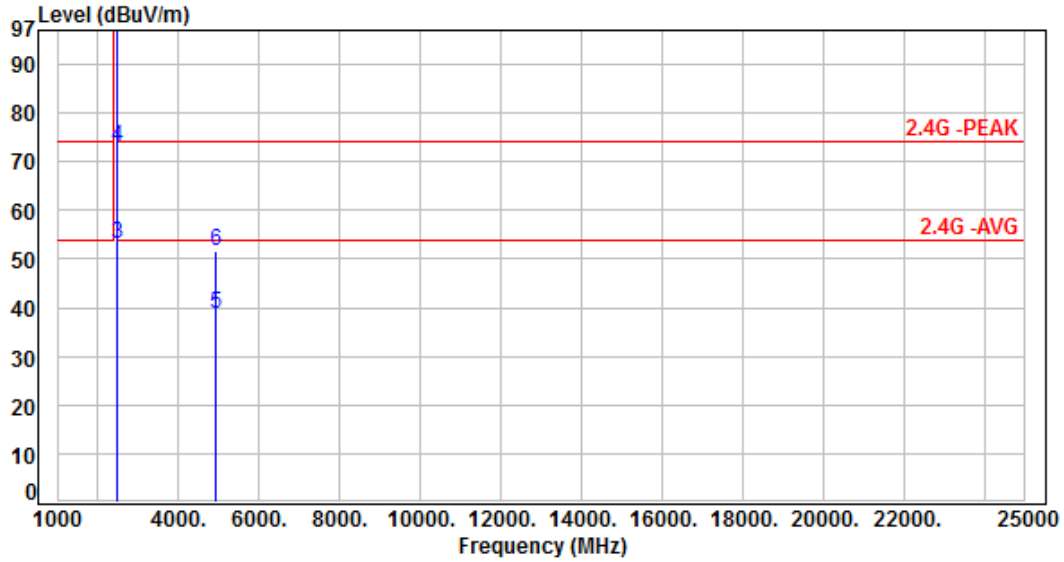


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.50	105.62	102.12	200.00	-97.88	Average	100	341	P
2	2462.00	-3.50	116.23	112.73	200.00	-87.27	Peak	100	341	P
3	2483.50	-3.40	56.35	52.95	54.00	-1.05	Average	100	341	P
4	2483.50	-3.40	76.47	73.07	74.00	-0.93	Peak	100	341	P
5	4924.00	4.10	34.49	38.59	54.00	-15.41	Average	240	271	P
6	4924.00	4.10	47.48	51.58	74.00	-22.42	Peak	240	271	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, CH11		:

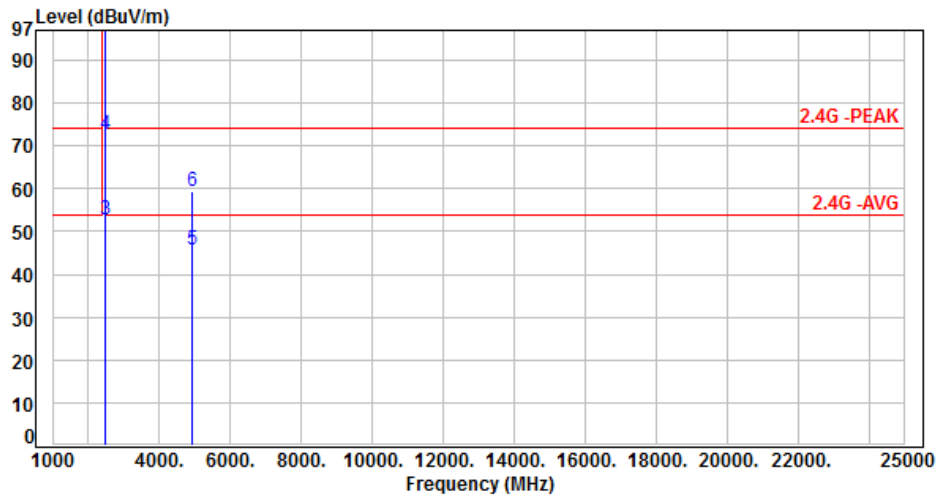


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.50	107.50	104.00	200.00	-96.00	Average	235	268	P
2	2462.00	-3.50	118.06	114.56	200.00	-85.44	Peak	235	268	P
3	2483.50	-3.40	56.17	52.77	54.00	-1.23	Average	235	268	P
4	2483.50	-3.40	75.91	72.51	74.00	-1.49	Peak	235	268	P
5	4924.00	4.10	41.47	45.57	54.00	-8.43	Average	242	268	P
6	4924.00	4.10	55.41	59.51	74.00	-14.49	Peak	242	268	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH01		:

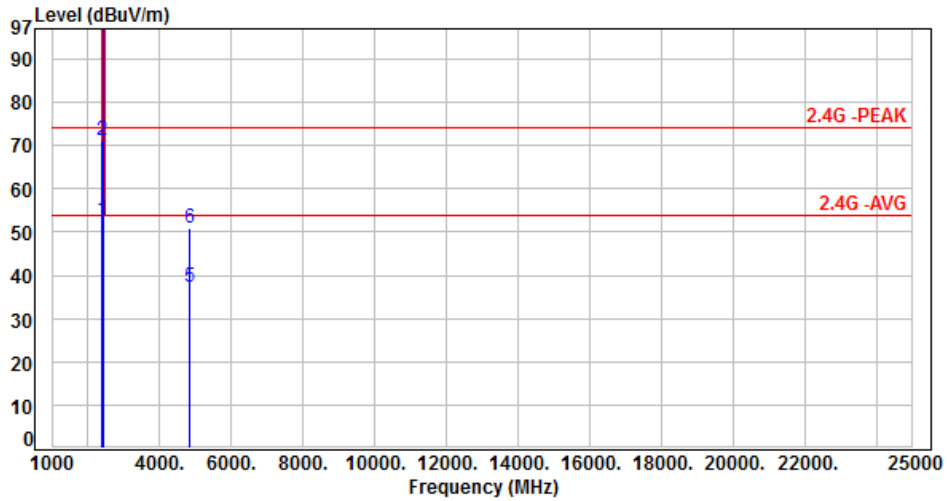


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	56.53	52.91	54.00	-1.09	Average	107	353	P
2	2390.00	-3.62	74.96	71.34	74.00	-2.66	Peak	107	353	P
3	2412.00	-3.60	105.41	101.81	200.00	-98.19	Average	107	353	P
4	2412.00	-3.60	115.33	111.73	200.00	-88.27	Peak	107	353	P
5	4824.00	3.73	33.48	37.21	54.00	-16.79	Average	100	274	P
6	4824.00	3.73	47.11	50.84	74.00	-23.16	Peak	100	274	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH01		:

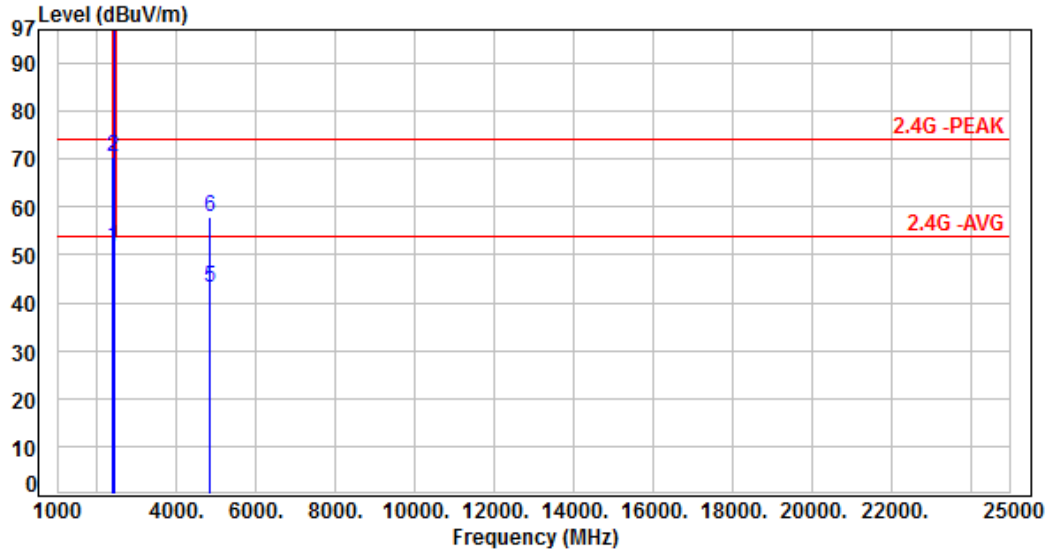


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	55.32	51.70	54.00	-2.30	Average	245	276	P
2	2390.00	-3.62	73.95	70.33	74.00	-3.67	Peak	245	276	P
3	2412.00	-3.60	106.28	102.68	200.00	-97.32	Average	245	276	P
4	2412.00	-3.60	117.76	114.16	200.00	-85.84	Peak	245	276	P
5	4824.00	3.73	39.46	43.19	54.00	-10.81	Average	187	288	P
6	4824.00	3.73	54.34	58.07	74.00	-15.93	Peak	187	288	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH06		:

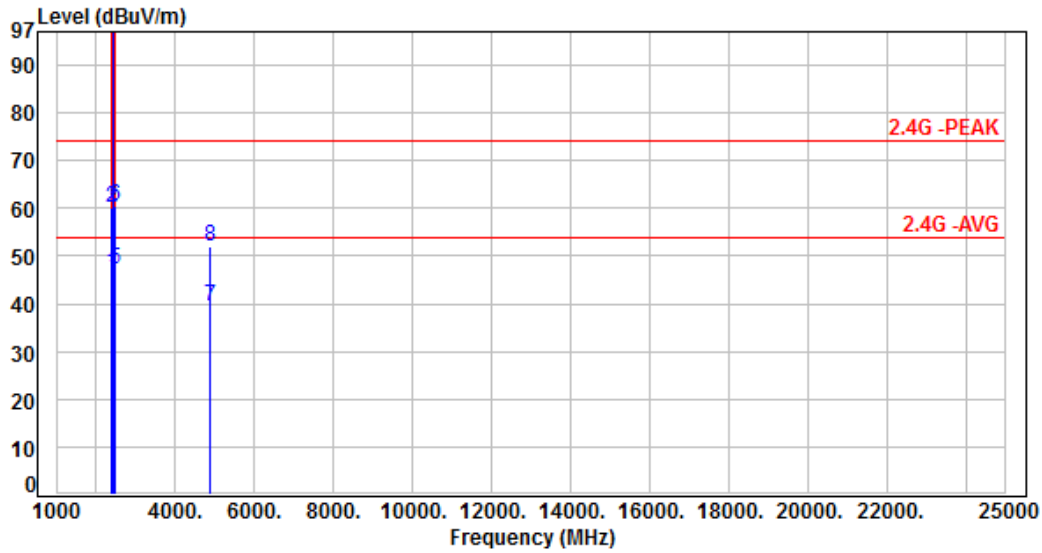


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	50.15	46.53	54.00	-7.47	Average	104	356	P
2	2390.00	-3.62	63.66	60.04	74.00	-13.96	Peak	104	356	P
3	2437.00	-3.57	107.62	104.05	200.00	-95.95	Average	104	356	P
4	2437.00	-3.57	117.23	113.66	200.00	-86.34	Peak	104	356	P
5	2483.50	-3.40	50.66	47.26	54.00	-6.74	Average	104	356	P
6	2483.50	-3.40	63.96	60.56	74.00	-13.44	Peak	104	356	P
7	4874.00	3.90	35.61	39.51	54.00	-14.49	Average	205	279	P
8	4874.00	3.90	47.96	51.86	74.00	-22.14	Peak	205	279	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH06		:

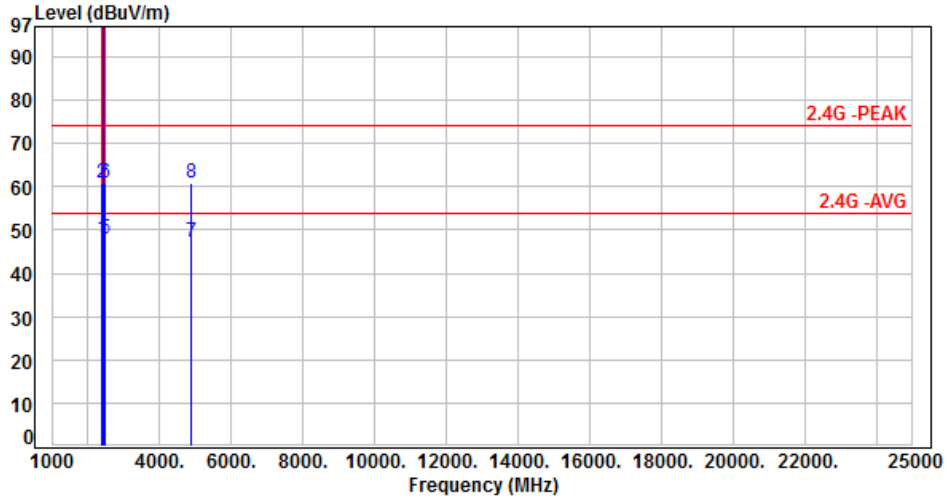


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	51.46	47.84	54.00	-6.16	Average	334	265	P
2	2390.00	-3.62	64.31	60.69	74.00	-13.31	Peak	334	265	P
3	2437.00	-3.57	108.77	105.20	200.00	-94.80	Average	334	265	P
4	2437.00	-3.57	119.54	115.97	200.00	-84.03	Peak	334	265	P
5	2483.50	-3.40	51.23	47.83	54.00	-6.17	Average	334	265	P
6	2483.50	-3.40	64.17	60.77	74.00	-13.23	Peak	334	265	P
7	4874.00	3.90	43.21	47.11	54.00	-6.89	Average	189	299	P
8	4874.00	3.90	57.02	60.92	74.00	-13.08	Peak	189	299	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 3, CH11		:

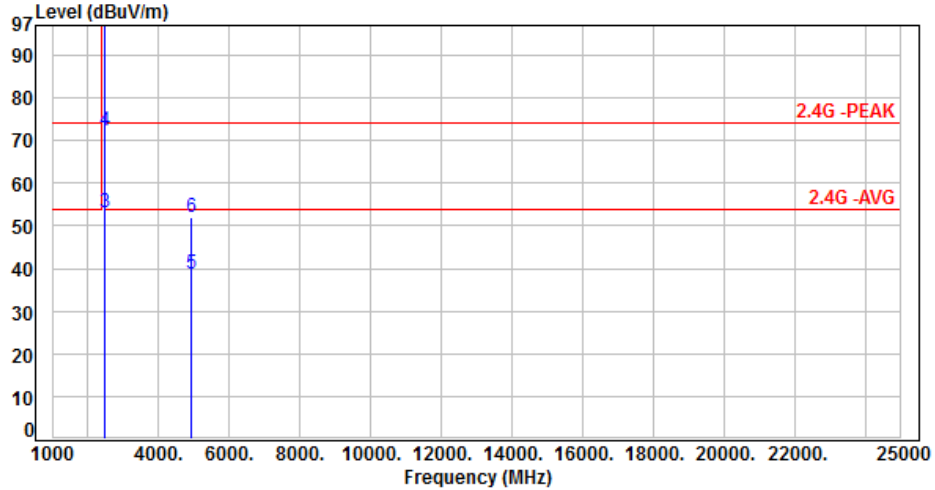


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.50	104.82	101.32	200.00	-98.68	Average	100	337	P
2	2462.00	-3.50	115.11	111.61	200.00	-88.39	Peak	100	337	P
3	2483.50	-3.40	56.44	53.04	54.00	-0.96	Average	100	337	P
4	2483.50	-3.40	75.86	72.46	74.00	-1.54	Peak	100	337	P
5	4924.00	4.10	34.75	38.85	54.00	-15.15	Average	342	275	P
6	4924.00	4.10	47.89	51.99	74.00	-22.01	Peak	342	275	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor





Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 3, CH11		:

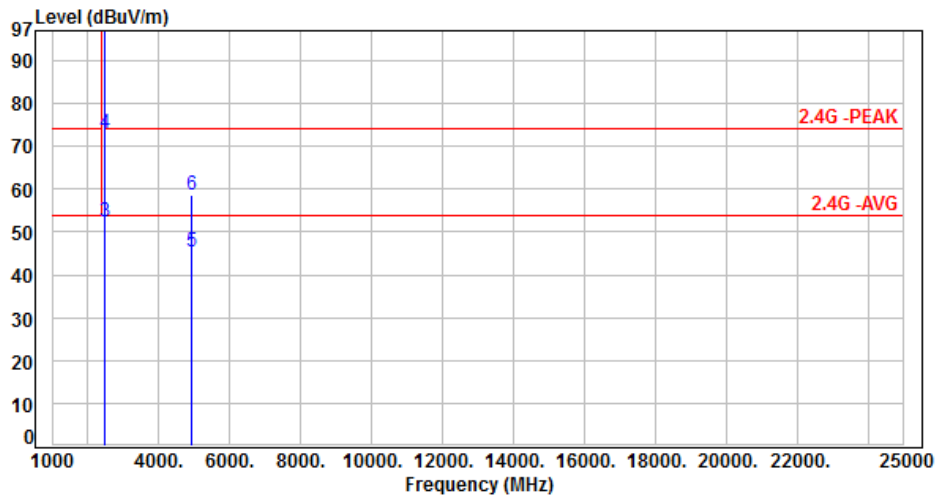


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.50	107.24	103.74	200.00	-96.26	Average	239	273	P
2	2462.00	-3.50	119.05	115.55	200.00	-84.45	Peak	239	273	P
3	2483.50	-3.40	55.84	52.44	54.00	-1.56	Average	239	273	P
4	2483.50	-3.40	76.29	72.89	74.00	-1.11	Peak	239	273	P
5	4924.00	4.10	41.23	45.33	54.00	-8.67	Average	205	303	P
6	4924.00	4.10	54.38	58.48	74.00	-15.52	Peak	205	303	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH03		:

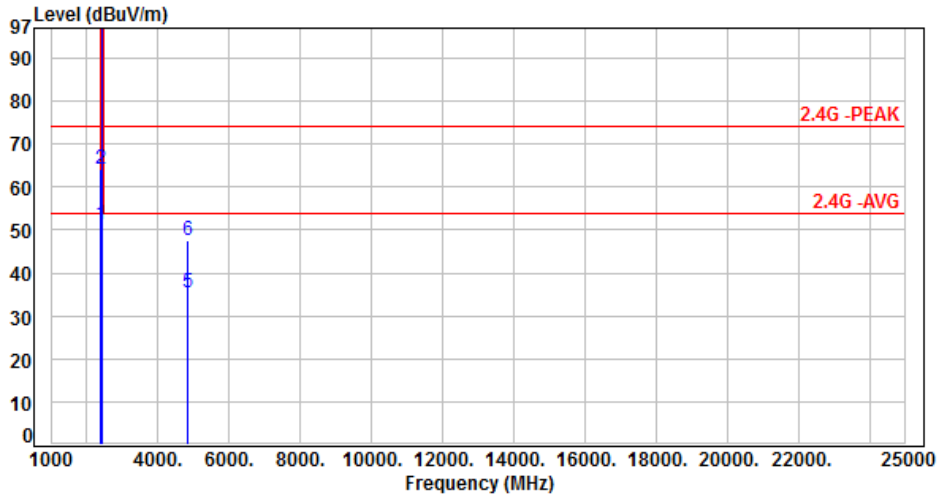


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	54.79	51.17	54.00	-2.83	Average	110	347	P
2	2390.00	-3.62	67.74	64.12	74.00	-9.88	Peak	110	347	P
3	2422.00	-3.59	100.41	96.82	200.00	-103.18	Average	110	347	P
4	2422.00	-3.59	110.06	106.47	200.00	-93.53	Peak	110	347	P
5	4844.00	3.80	31.74	35.54	54.00	-18.46	Average	196	274	P
6	4844.00	3.80	43.81	47.61	74.00	-26.39	Peak	196	274	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH03		:

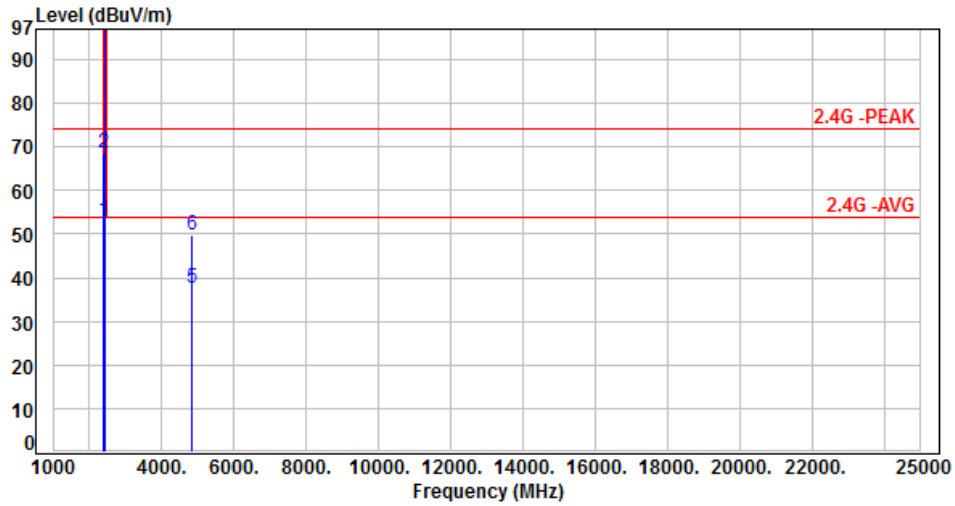


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	56.85	53.23	54.00	-0.77	Average	169	277	P
2	2390.00	-3.62	72.31	68.69	74.00	-5.31	Peak	169	277	P
3	2422.00	-3.59	101.18	97.59	200.00	-102.41	Average	169	277	P
4	2422.00	-3.59	111.84	108.25	200.00	-91.75	Peak	169	277	P
5	4844.00	3.80	33.77	37.57	54.00	-16.43	Average	161	293	P
6	4844.00	3.80	45.95	49.75	74.00	-24.25	Peak	161	293	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH06		:

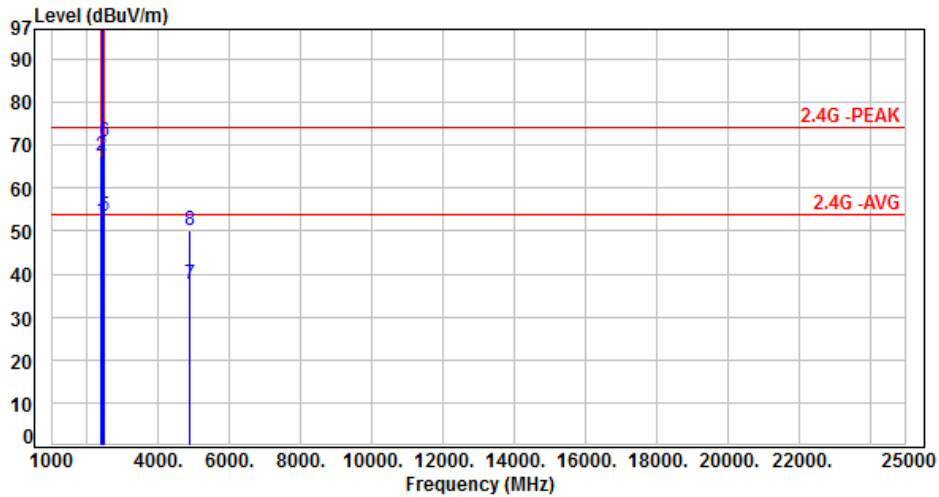


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	55.96	52.34	54.00	-1.66	Average	104	347	P
2	2390.00	-3.62	71.03	67.41	74.00	-6.59	Peak	104	347	P
3	2437.00	-3.57	103.98	100.41	200.00	-99.59	Average	104	347	P
4	2437.00	-3.57	114.36	110.79	200.00	-89.21	Peak	104	347	P
5	2483.50	-3.40	56.73	53.33	54.00	-0.67	Average	104	347	P
6	2483.50	-3.40	74.22	70.82	74.00	-3.18	Peak	104	347	P
7	4874.00	3.90	33.90	37.80	54.00	-16.20	Average	189	275	P
8	4874.00	3.90	46.33	50.23	74.00	-23.77	Peak	189	275	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH06		:

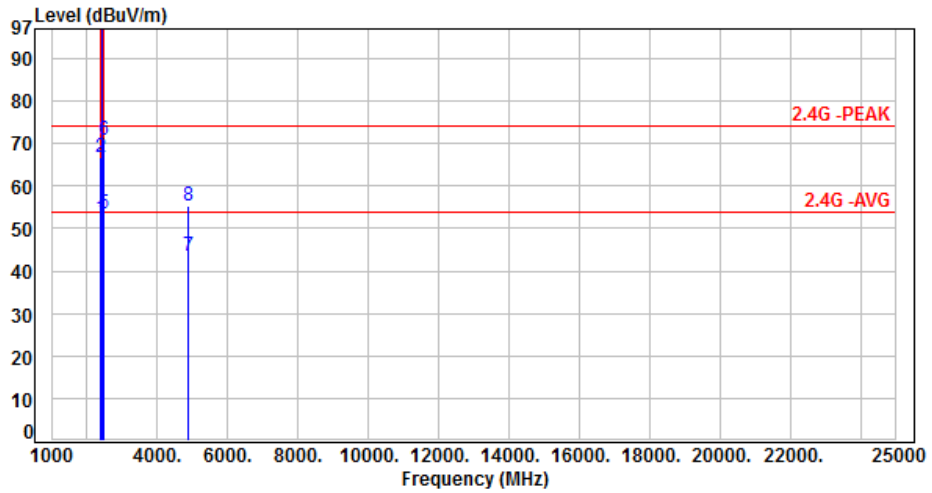


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.62	56.02	52.40	54.00	-1.60	Average	297	266	P
2	2390.00	-3.62	70.54	66.92	74.00	-7.08	Peak	297	266	P
3	2437.00	-3.57	105.37	101.80	200.00	-98.20	Average	297	266	P
4	2437.00	-3.57	115.83	112.26	200.00	-87.74	Peak	297	266	P
5	2483.50	-3.40	56.87	53.47	54.00	-0.53	Average	297	266	P
6	2483.50	-3.40	74.23	70.83	74.00	-3.17	Peak	297	266	P
7	4874.00	3.90	39.58	43.48	54.00	-10.52	Average	188	301	P
8	4874.00	3.90	51.54	55.44	74.00	-18.56	Peak	188	301	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 4, CH09		:

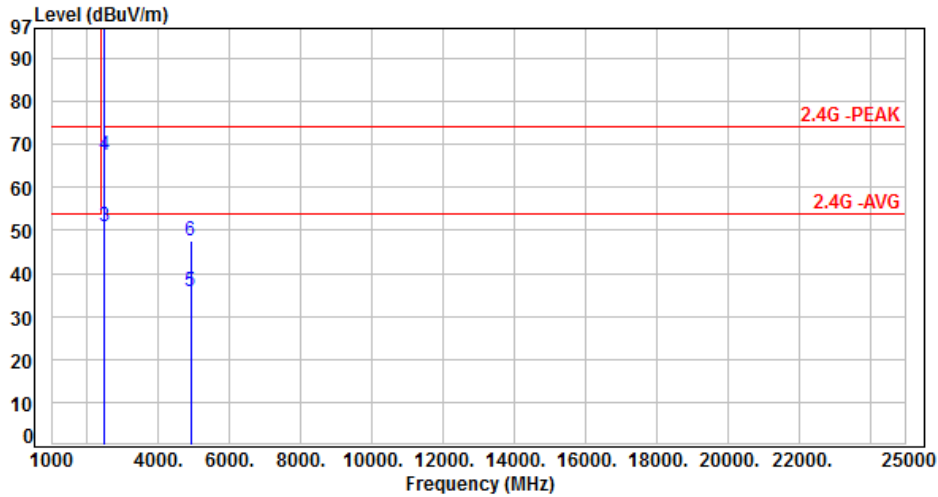


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-3.50	100.41	96.91	200.00	-103.09	Average	105	340	P
2	2462.00	-3.50	109.95	106.45	200.00	-93.55	Peak	105	340	P
3	2483.50	-3.40	54.33	50.93	54.00	-3.07	Average	155	340	P
4	2483.50	-3.40	70.90	67.50	74.00	-6.50	Peak	155	340	P
5	4904.00	4.00	31.62	35.62	54.00	-18.38	Average	189	279	P
6	4904.00	4.00	43.59	47.59	74.00	-26.41	Peak	189	279	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 4, CH09		:

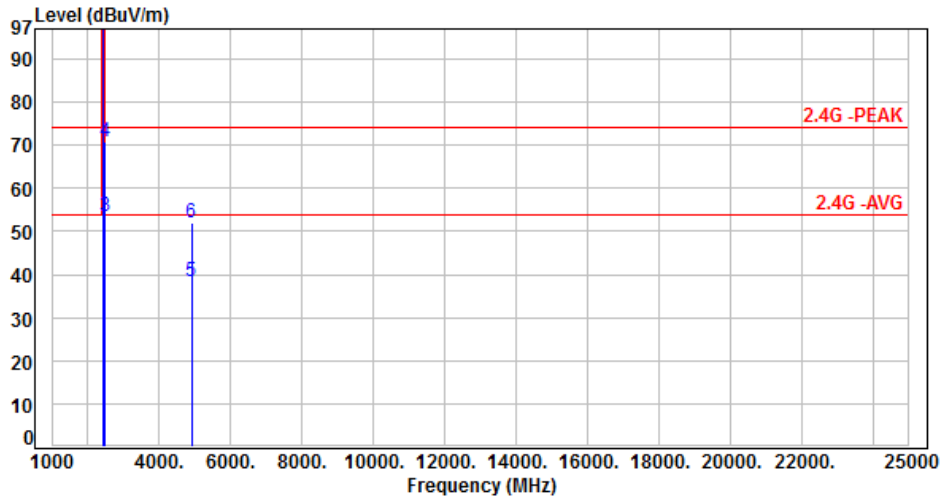

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2452.00	-3.55	103.82	100.27	200.00	-99.73	Average	190	278	P
2	2452.00	-3.55	114.83	111.28	200.00	-88.72	Peak	190	278	P
3	2483.50	-3.40	56.92	53.52	54.00	-0.48	Average	190	278	P
4	2483.50	-3.40	74.14	70.74	74.00	-3.26	Peak	190	278	P
5	4904.00	4.00	34.46	38.46	54.00	-15.54	Average	184	306	P
6	4904.00	4.00	47.96	51.96	74.00	-22.04	Peak	184	306	P

Note: Level=Reading+Factor  
 Margin=Level-Limit  
 Factor=Antenna Factor + cable loss - Amplifier Factor



### 6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz





## 7. Test of Conducted Spurious Emission


### 7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### 7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

### 7.3 Test Setup Layout



### 7.4 Test Result and Data

Note: Test plots refers to the following pages.





ANT A

Modulation Type: 802.11b, CH 01




Modulation Type: 802.11b, CH 06

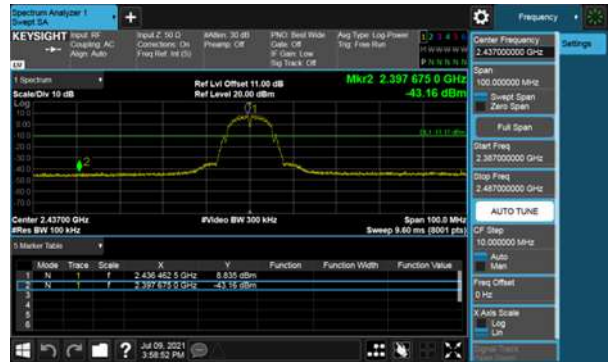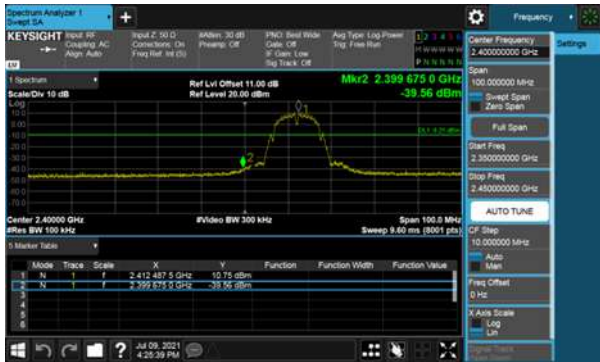



ANT A

Modulation Type: 802.11b, CH 11

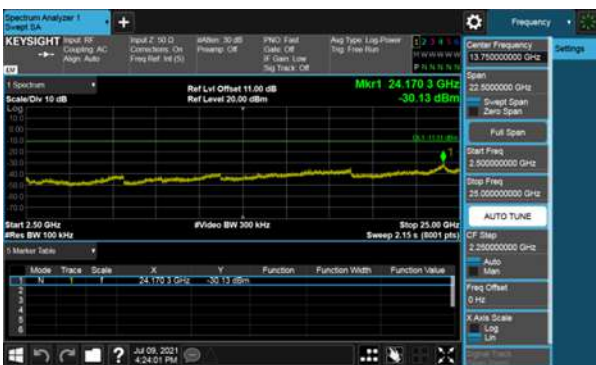




ANT A

Modulation Type: 802.11g, CH 01



Modulation Type: 802.11g, CH 06

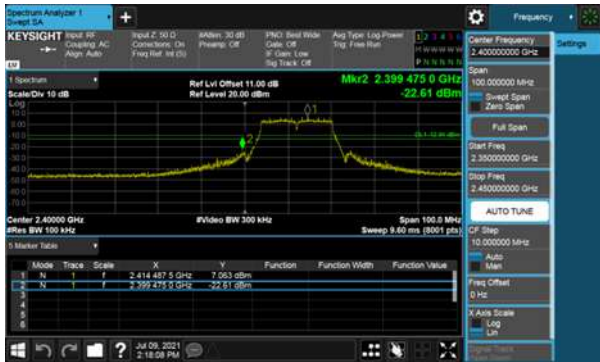



ANT A

Modulation Type: 802.11g, CH 11









ANT A

Modulation Type: 802.11n HT20, CH01



Modulation Type: 802.11n HT20, CH06

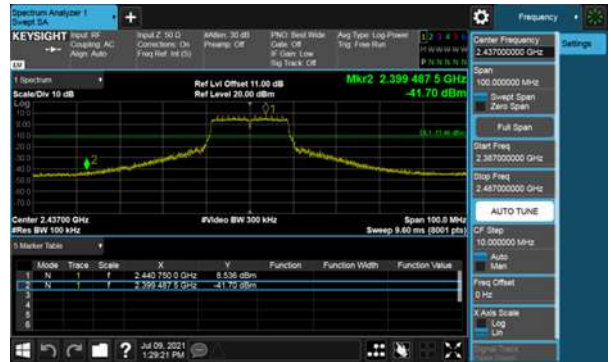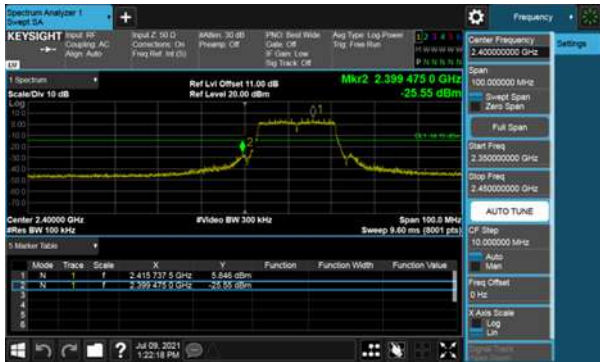



ANT A

Modulation Type: 802.11n HT20, CH11







ANT A

Modulation Type: 802.11n HT40, CH03



Modulation Type: 802.11n HT40, CH06

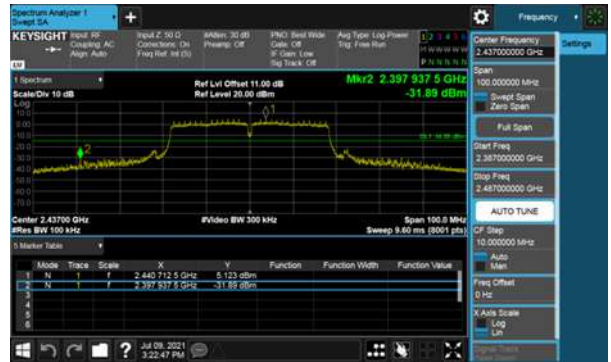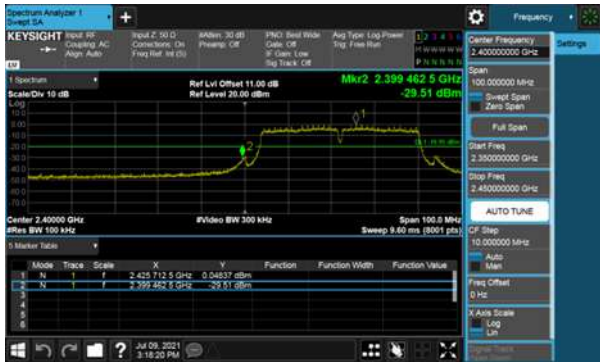





ANT A

Modulation Type: 802.11n HT40, CH09







ANT C

Modulation Type: 802.11g, CH 01



Modulation Type: 802.11g, CH 06

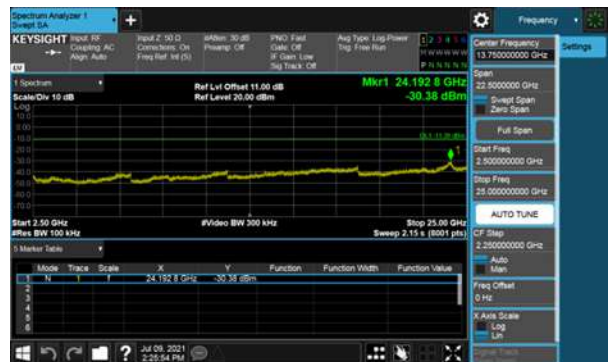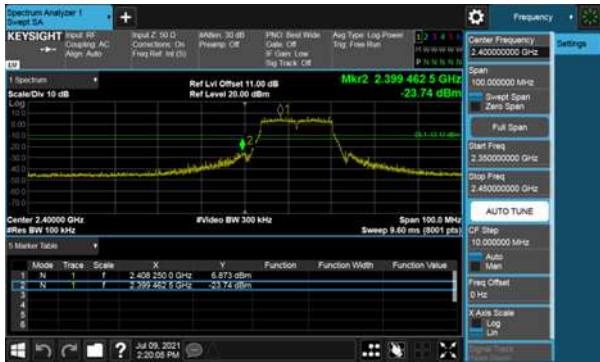



ANT C

Modulation Type: 802.11g, CH 11






ANT C

Modulation Type: 802.11n HT20, CH01



Modulation Type: 802.11n HT20, CH06

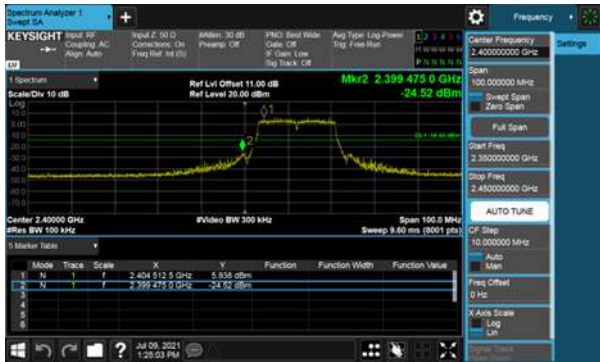



ANT C

Modulation Type: 802.11n HT20, CH11









ANT C

Modulation Type: 802.11n HT40, CH03



Modulation Type: 802.11n HT40, CH06

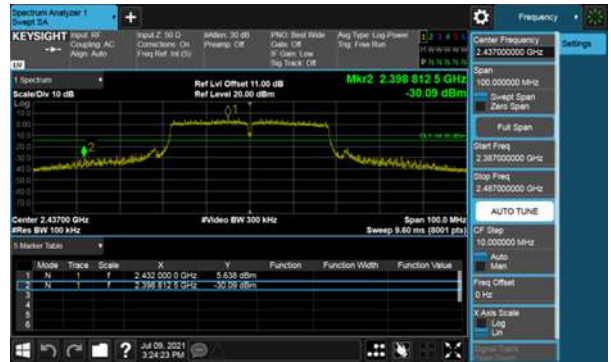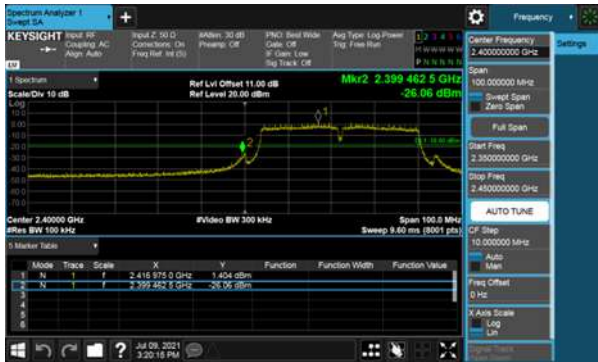



ANT C

Modulation Type: 802.11n HT40, CH09





## 8. On Time, Duty Cycle and Measurement methods


### 8.1 Test Limit

None; for reporting purposes only.

### 8.2 Test Procedure

Zero-Span Spectrum Analyzer Method.

### 8.3 Test Setup Layout



### 8.4 Test Result and Data

Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
11b,1M	12.45	13.10	95.04%
11g,6M	2.07	2.17	95.08%
11n HT20	1.91	2.01	95.07%
11n HT40	0.93	1.03	90.37%





Modulation Type: 802.11b(1Mbps)



Modulation Type: 802.11n HT40(13.5Mbps)



Modulation Type: 802.11g(6Mbps)



Modulation Type: 802.11n HT20(6.5Mbps)





### 9. 6dB Bandwidth Measurement Data


#### 9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

#### 9.3 Test Setup Layout



#### 9.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			ANT A	ANT C	
11b	1	2412	8.07	-	0.5
	6	2437	8.07	-	0.5
	11	2462	8.07	-	0.5
11g	1	2412	16.41	16.41	0.5
	6	2437	16.38	16.41	0.5
	11	2462	16.41	16.44	0.5
11n HT20	1	2412	17.61	17.61	0.5
	6	2437	17.61	17.64	0.5
	11	2462	17.61	17.61	0.5
11n HT40	3	2422	35.46	35.70	0.5
	6	2437	35.16	35.70	0.5
	9	2452	35.64	35.70	0.5



ANT A  
Modulation Type: 802.11b  
CH01

Modulation Type: 802.11g  
CH01



CH06

CH06



CH11

CH11





ANT A  
Modulation Type: 802.11n HT20  
CH01



Modulation Type: 802.11n HT40  
CH03



CH06



CH06



CH11



CH09





ANT C  
Modulation Type: 802.11g  
CH01



Modulation Type: 802.11n HT20  
CH01



CH06



CH06



CH11



CH11







ANT C  
Modulation Type: 802.11n HT40  
CH03



CH06



CH09





## 10. Maximum Peak and Average Output Power

### 10.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

### 10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 10.3 Test Setup Layout



**10.4 Test Result and Data**

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted(peak) output power (dBm)		Total PK power (dBm)	Total PK power (mW)	Power Limit (dBm)
				ANT A (AJ1)	ANT C (AJ6)			
74	11b	1	2412	22.43	-	22.43	174.985	30.00
68		6	2437	20.91	-	20.91	123.310	30.00
66		11	2462	20.32	-	20.32	107.647	30.00
74	11g	1	2412	26.01	26.85	29.46	883.197	30.00
80		6	2437	26.64	27.09	29.88	972.999	30.00
76		11	2462	26.19	26.78	29.51	892.342	30.00
69	11n HT20	1	2412	25.73	26.41	29.09	811.633	30.00
80		6	2437	26.59	27.32	<b>29.98</b>	995.548	30.00
72		11	2462	26.01	26.67	29.36	863.540	30.00
52	11n HT40	3	2422	23.27	24.17	26.75	473.541	30.00
72		6	2437	26.08	26.81	29.47	885.242	30.00
57		9	2452	24.11	24.98	27.58	572.407	30.00

Setting	Modulation Mode	Channel	Frequency (MHz)	Conducted(average) output power (dBm)		Total AV power (dBm)	Total AV power (mW)	Power Limit (dBm)
				ANT A (AJ1)	ANT C (AJ6)			
74	11b	1	2412	18.37	-	18.37	68.707	NA
68		6	2437	16.81	-	16.81	47.973	NA
66		11	2462	16.32	-	16.32	42.855	NA
74	11g	1	2412	17.96	18.47	21.23	132.825	NA
80		6	2437	19.38	19.57	22.49	177.269	NA
76		11	2462	18.39	18.84	21.63	145.584	NA
69	11n HT20	1	2412	17.12	17.77	20.47	111.364	NA
80		6	2437	19.44	19.92	22.70	186.077	NA
72		11	2462	17.78	18.47	21.15	130.286	NA
52	11n HT40	3	2422	13.99	14.83	17.44	55.470	NA
72		6	2437	18.06	18.83	21.47	140.357	NA
57		9	2452	14.89	15.81	18.38	68.938	NA

Note: Average power is for reference only.





## 11. Power Spectral Density

### 11.1 Test Limit


The Maximum of Power Spectral Density Measurement is 8dBm.

If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

### 11.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 3kHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

### 11.3 Test Setup Layout





**11.4 Test Result and Data**

Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3KHz Bandwidth(dBm)		Sum chain (dBm)	Duty Cycle CF(dB)	Total PSD (dBm)	Limit (dBm)
			ANT A	ANT C				
11b	1	2412	-3.16	-	-3.16	0.00	-3.16	8.00
	6	2437	-5.02	-	-5.02	0.00	-5.02	8.00
	11	2462	-5.75	-	-5.75	0.00	-5.75	8.00
11g	1	2412	-6.86	-6.89	-3.86	0.00	-3.86	7.03
	6	2437	-4.49	-5.17	-1.81	0.00	-1.81	7.03
	11	2462	-7.11	-7.03	-4.06	0.00	-4.06	7.03
11n HT20	1	2412	-8.19	-7.68	-4.92	0.00	-4.92	7.03
	6	2437	-5.04	-4.46	-1.73	0.00	-1.73	7.03
	11	2462	-7.03	-6.45	-3.72	0.00	-3.72	7.03
11n HT40	3	2422	-13.17	-11.12	-9.01	0.00	-9.01	7.03
	6	2437	-10.01	-8.83	-6.37	0.00	-6.37	7.03
	9	2452	-13.10	-11.88	-9.44	0.00	-9.44	7.03



ANT A  
Modulation Type: 802.11b  
CH01



Modulation Type: 802.11g  
CH01



CH06




CH06



CH11



CH11

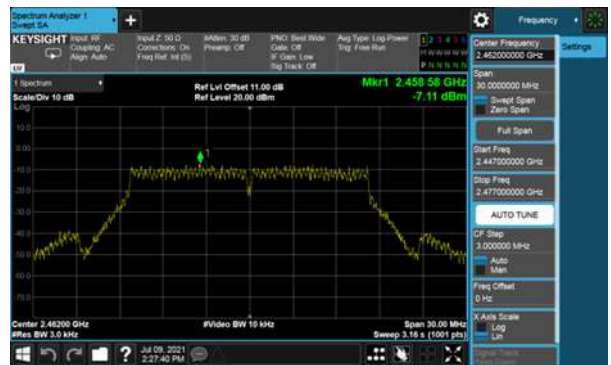



ANT A  
Modulation Type: 802.11n HT20  
CH01

Modulation Type: 802.11n HT40  
CH03





CH06

CH06




CH11

CH09

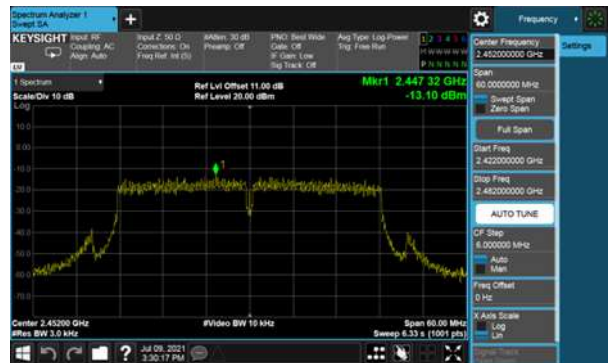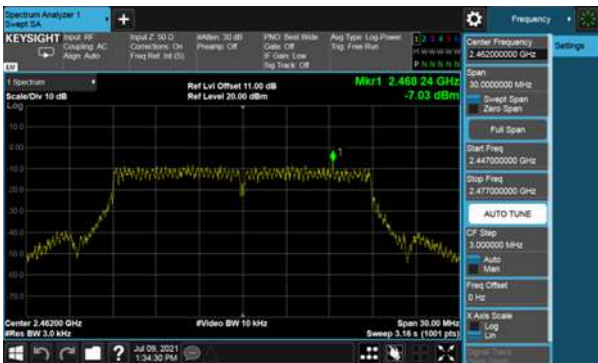





ANT C  
Modulation Type: 802.11g  
CH01

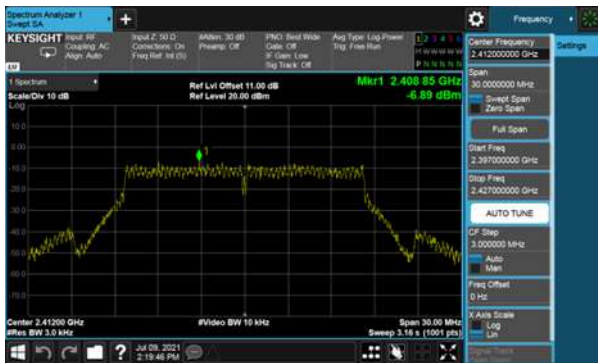


Modulation Type: 802.11n HT20  
CH01

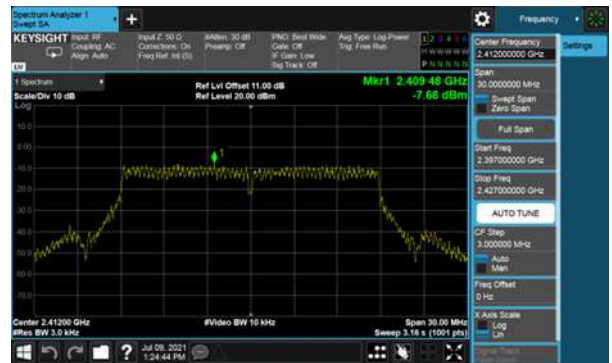

CH06

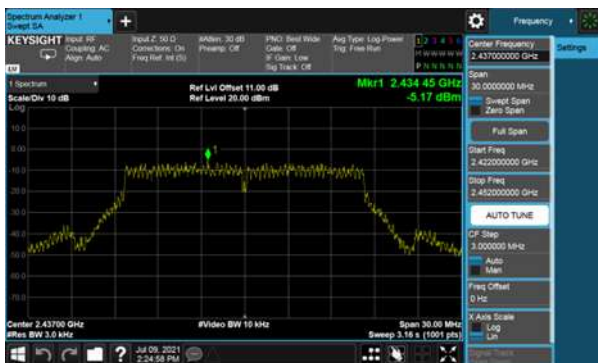


CH06

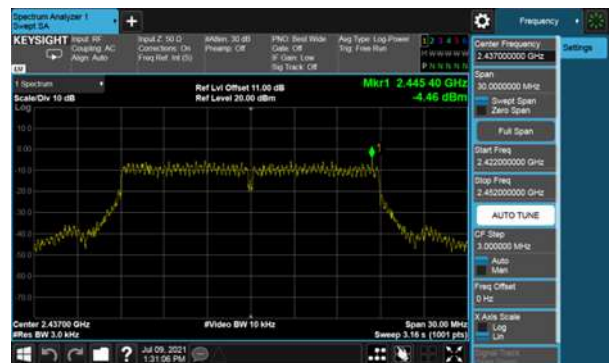

CH11




CH11

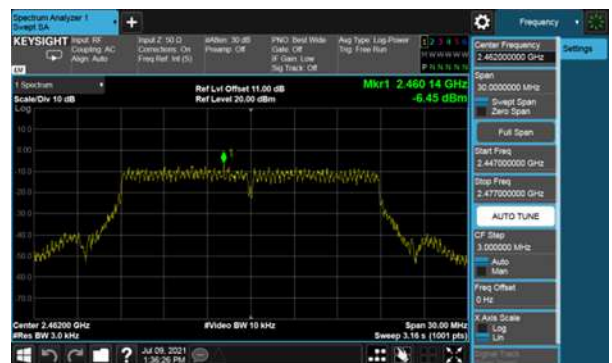



ANT C  
Modulation Type: 802.11n HT40  
CH03

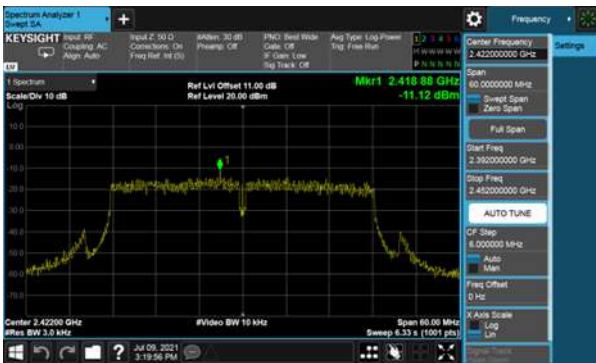

CH06



CH09

