

**InterLab®**

## FCC Measurement/Technical Report on

WLAN transceiver  
Parrot FC7100 (Module)

FCC ID RKXFC7100  
IC: 5119A-FC7100

**Report Reference:** MDE\_PARRO\_1426\_FCCd

**Test Laboratory:**

7Layers AG  
Borsigstrasse 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
www.7Layers.com

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Peter Mertel  
Vorstand • Board:  
Dr. H.-J. Meckelburg  
Dr. H. Ansorge

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385

## Table of Contents

<b>0</b>	<b>Applied Standards and Test Summary</b>	<b>3</b>
0.1	Applied Standards	3
0.2	FCC-IC Correlation Table	4
0.3	Measurement Summary / Signatures	5
<b>1</b>	<b>Administrative Data</b>	<b>8</b>
1.1	Testing Laboratory	8
1.2	Project Data	8
1.3	Applicant Data	8
1.4	Manufacturer Data	8
<b>2</b>	<b>Test object Data</b>	<b>9</b>
2.1	General EUT Description	9
2.2	EUT Main components	10
2.3	Ancillary Equipment	10
2.4	Auxiliary Equipment	10
2.5	EUT Setups	11
2.6	Operating Modes	11
2.7	Special software used for testing	11
2.8	Product labelling	12
<b>3</b>	<b>Test Results</b>	<b>13</b>
3.1	Conducted emissions (AC power line)	13
3.2	26 / 6 dB Emission bandwidth / 99 % occupied bandwidth	16
3.3	Maximum conducted output power	24
3.4	Maximum Power Spectral Density	28
3.5	Frequency Stability	32
<b>4</b>	<b>Test Equipment</b>	<b>42</b>
<b>5</b>	<b>Photo Report</b>	<b>53</b>
<b>6</b>	<b>Setup Drawings</b>	<b>53</b>

## 0 Applied Standards and Test Summary

### 0.1 Applied Standards

#### Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

#### Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-13 Edition) and 15 (10-1-13 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

#### Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures v01, 2014-06-06".

Instead of applying ANSI C63.4–1992 which is referenced in the FCC Public Note, the newer ANSI C63.4–2009 is applied.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules") is applied.

#### Summary Test Results:

**The EUT complied with all performed tests as listed in chapter 0.3 Measurement Summary / Signatures.**

## 0.2 FCC-IC Correlation Table

### Correlation of measurement requirements for UNII / LE-LAN (e.g. WLAN 5 GHz) equipment

#### UNII equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.403 (i) (26 dB) / § 15.407 (e) (6 dB)	RSS-210 Issue 8: A9.2, 9.4 (99%)
Maximum conducted output power	§ 15.407 (a) (1),(2),(3),(4)	RSS-210 Issue 8: A9.2, 9.4
Maximum power spectral density	§ 15.407 (a) (1),(2),(3),(5)	RSS-210 Issue 8: A9.2, 9.4
Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands	15.407 (b) § 15.209 (a)	RSS-Gen Issue 4: 6.13/8.9/8.10; RSS-210 Issue 8: A9.2, 9.4
Frequency stability	§ 15.407 (g)	RSS-Gen Issue 4: 6.11/8.11
Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	§ 15.407 (h)	RSS-210 Issue 8: A9.2, 9.4
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	–	RSS-210 Issue 8: 2.3; RSS Gen Issue 4: 5/7 *)

\*) Receivers are exempted from certification besides if operating in stand-alone mode in the frequency range 30–960 MHz or if these are scanner receivers.

### 0.3 Measurement Summary / Signatures

#### FCC Part 15, Subpart C

#### § 15.207

Conducted emissions (AC power line)

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result
n-Mode, CH 36, 20 MHz	Setup_03	AC Port (power line)	passed

#### FCC Part 15, Subpart E

#### § 15.403 (i), 15.407 (e)

26 / 6 dB Emission bandwidth / 99 % occupied bandwidth

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
a-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 149, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 157, 20 MHz	Setup_01	Temp.ant.connector	passed
a-Mode, CH 165, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 149, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 157, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 165, 20 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 38, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 46, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 151, 40 MHz	Setup_01	Temp.ant.connector	passed
n-Mode, CH 159, 40 MHz	Setup_01	Temp.ant.connector	passed

#### FCC Part 15, Subpart E

#### § 15.407 (a)(1,2,3,4)

Maximum Conducted Output Power

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result	
			FCC	IC
a-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 149, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 157, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 165, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 149, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 157, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 165, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 38, 40 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 46, 40 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 151, 40 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 159, 40 MHz	Setup_01	Temp.ant.connector	passed	passed

## FCC Part 15, Subpart E

## § 15.407 (a)(1,2,3,5)

### Maximum Power Spectral Density

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result	
			FCC	IC
a-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 149, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 157, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
a-Mode, CH 165, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 36, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 44, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 48, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 149, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 157, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 165, 20 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 38, 40 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 46, 40 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 151, 40 MHz	Setup_01	Temp.ant.connector	passed	passed
n-Mode, CH 159, 40 MHz	Setup_01	Temp.ant.connector	passed	passed

## FCC Part 15, Subpart E

## § 15.407 (g)

### Frequency Stability

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
-	-	-	N/P

**FCC Part 15, Subpart C & E**

**§ 15.205, § 15.209**

**§ 15.407 (b) (1,2,3,4,5,6)**

Undesirable Emissions, General Field Strength Limits;

Restricted Bands and Radiated Emission Limits

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result	
			FCC	IC
a-Mode, CH 36, 20 MHz	Setup_02/04	Enclosure	passed*	passed*
a-Mode, CH 44, 20 MHz	Setup_02/04	Enclosure	passed*	passed*
a-Mode, CH 48, 20 MHz	Setup_02/04	Enclosure	passed*	passed*
a-Mode, CH 149, 20 MHz	Setup_02/04	Enclosure	passed*	passed*
a-Mode, CH 157, 20 MHz	Setup_02/04	Enclosure	passed*	passed*
a-Mode, CH 165, 20 MHz	Setup_02/04	Enclosure	passed*	–
a-Mode, CH 161, 20 MHz	Setup_02/04	Enclosure	–	passed*
n-Mode, CH 36, 20 MHz	Setup_02	Enclosure	passed*	passed*
n-Mode, CH 44, 20 MHz	Setup_02	Enclosure	passed*	passed*
n-Mode, CH 48, 20 MHz	Setup_02	Enclosure	passed*	passed*
n-Mode, CH 149, 20 MHz	Setup_02	Enclosure	passed*	passed*
n-Mode, CH 157, 20 MHz	Setup_02	Enclosure	passed*	passed*
n-Mode, CH 165, 20 MHz	Setup_02	Enclosure	passed*	–
n-Mode, CH 161, 20 MHz	Setup_02	Enclosure	–	passed*
n-Mode, CH 38, 40 MHz	Setup_02	Enclosure	passed*	passed*
n-Mode, CH 46, 40 MHz	Setup_02	Enclosure	passed*	passed*
n-Mode, CH 151, 40 MHz	Setup_02	Enclosure	passed*	passed*
n-Mode, CH 159, 40 MHz	Setup_02	Enclosure	passed*	passed*

**FCC Part 15, Subpart E**

**§ 15.407 (h)**

Dynamic Frequency selection

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result	
			FCC	IC
–	–	–	N/A	N/A

N/A Not applicable: the EUT operates only in bands where DFS is not required.

N/P Not performed

\* Tests not performed over the complete frequency range, for details please refer to the test protocols.

Responsible for  
Accreditation Scope: \_\_\_\_\_

Responsible  
for Test Report: \_\_\_\_\_

## 1 Administrative Data

### 1.1 Testing Laboratory

Company Name: 7Layers AG  
Address Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:  
Laboratory accreditation no.: DAkkS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka  
Dipl.-Ing. Robert Machulec  
Dipl.-Ing. Thomas Hoell  
Dipl.-Ing. Andreas Petz  
Dipl.-Ing. Marco Kullik

Report Template Version: 2014-11-24

### 1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Daniel Gall  
Employees who performed the tests: documented internally at 7Layers  
Date of Test(s): 2014-09-21 to 2014-11-25  
Date of Report: 2014-11-26

### 1.3 Applicant Data

Company Name: Parrot S.A.  
Address: 174, quai de Jemmapes  
75010 Paris  
France  
Contact Person: Ms. Meryam ABOU EL ANOUAR

### 1.4 Manufacturer Data

Company Name: Please see applicant data

Address:

Contact Person:



## 2 Test object Data

### 2.1 General EUT Description

<b>Equipment under Test:</b>	IEEE 802.11a/n WLAN transceiver (5 GHz)
<b>Type Designation:</b>	FC7100
<b>Kind of Device:</b>	Module supporting these technologies:
<b>(optional)</b>	1) WLAN 2.4 GHz modes b/g/n, 20+40 MHz BW
	2) WLAN 5 GHz modes a/n, 20+40 MHz BW
	3) Bluetooth, normal and low energy mode
	4) GPS receiver
<b>Voltage Type:</b>	DC
<b>Voltage Level:</b>	3.3 V
<b>Tested Modulation Type:</b>	DBPSK; OFDM:BPSK; OFDM:64-QAM

#### General product description:

The WLAN Transceiver is operating in the 5 GHz band using Direct Sequence Spread Spectrum (DSSS) Modulation and Orthogonal Frequency Division Multiplexing (OFDM).

#### Specific product description for the EUT:

The EUT is a dual band WLAN (802.11 a/b/g/n, 2.4 and 5 GHz) and Bluetooth module with one joint antenna connector for WLAN 2.4 GHz and Bluetooth, but simultaneous transmission is not possible and is managed by the module. In IEEE 802.11n mode it supports 20 MHz and 40 MHz bandwidth channels (both with MCS7), providing 72.2 Mbit/s, and 150 Mbit/s transfer data rates respectively.

The WLAN (Wireless Local Area Network) transceiver is operating in the 5 GHz band in the range 5.15 – 5.25 GHz and 5.725 – 5.850 GHz.

Additionally, it contains a GPS receiver.

The object of this test report is the WLAN transceiver, it was tested at 20 and 40 MHz channel bandwidth.

#### The EUT provides the following ports:

##### Ports

Enclosure

Data / DC port (system connector)

2.4 GHz Antenna (UFL connector)

5 GHz Antenna (UFL connector)

GPS Antenna (UFL connector)

The main components of the EUT are listed and described in chapter 2.2

## 2.2 EUT Main components

### Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
EUT A (Code: DE1018007ac01)	WLAN transceiver	FC7100	PF814000CA 4G000119	08	samus-0.0.13-20-g046b348
Remark: EUT A is equipped with a permanent antenna connector (gain = 2.5 dBi).					
EUT B (Code: DE1018007ab01)	WLAN transceiver	FC7100	PF814000CA 4G000170	08	samus-0.0.13-20-g046b348
Remark: EUT B is equipped with a permanent antenna connector (gain = 2.5 dBi).					

NOTE: The short description is used to simplify the identification of the EUT in this test report.

## 2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
-	-	-	-	-	-

## 2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
AUX1	Development Board	Parrot FC7100_EMC_WB_H W00	AFF1310-13	HW00	-
AUX2	External Antenna	Inverted-F, PIFA	-	-	-
AUX3	AC/DC laboratory power supply	Philips PE 1540 (40 V / 3 A)	WB2045	-	-
AUX4	Development Board	Parrot FC7100_EMC_MEZZH W01	A8424/015	HW01	-

## 2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
Setup_01	EUT A + AUX1	setup for conducted measurements
Setup_02	EUT A + AUX1 + AUX2 + AUX4	setup for radiated measurements
Setup_03	EUT A + AUX1 to AUX4	setup for conducted emissions (AC power line) measurements
Setup_04	EUT B + AUX1 + AUX2 + AUX4	setup for radiated measurements

## 2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

### 2.6.1 Test Channels

UNII-Subband 1 5150 - 5250 MHz			UNII-Subband 2A 5250 - 5350 MHz			UNII-Subband 2C 5470 - 5725 MHz			UNII-Subband 3 5725 - 5850 MHz			Nom. BW
Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	20 MHz
36	44	48							149	157	165	Ch.-No.
5180	5220	5240							5745	5785	5825	MHz

Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	Bottom	Middle	Top	40 MHz
38	-	46		-					151	-	159	Ch.-No.
5190	-	5230		-					5755	-	5795	MHz

Note: For IC the highest channel in Subband 3 is set to 161 (5805 MHz) instead of 165 for the Band Edge compliance test.

### 2.6.2 Datarates

WLAN a-Mode; 20 MHz; 6 Mbit/s
WLAN n-Mode; 20 MHz; 6.5 Mbit/s (MCS0)
WLAN n-Mode; 40 MHz; 13.5 Mbit/s (MCS0)
WLAN n-Mode; 40 MHz; 150 Mbit/s (MCS7)

## 2.7 Special software used for testing

A tool which is called "Pulsar Shell" (an adb tool) is used to set the EUT into the desired WLAN test modes. Different commands can be entered via the "calibrator tool".

The LAN interface at AUX1 is used for this purpose.

A description is available from the applicant.

## **2.8 Product labelling**

### **2.8.1 FCC ID label**

Please refer to the documentation of the applicant.

### **2.8.2 Location of the label on the EUT**

Please refer to the documentation of the applicant.

## 3 Test Results

### 3.1 Conducted emissions (AC power line)

Standard      FCC Part 15 Subpart C & E

**The test was performed according to:** ANSI C 63.4

#### 3.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

#### Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

#### Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

### 3.1.2 Test Requirements / Limits

FCC Part 15, Subpart E, §15407 (b)(6) and Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dBμV)	AV Limit (dBμV)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dBμV) = 20 log (Limit (μV)/1μV).


### 3.1.3 Test Protocol

Temperature: 25 °C  
Air Pressure: 1017 hPa  
Humidity: 34 %

Power line	Frequency MHz	Measured value QP dBμV	Measured value AV dBμV	QP Limit dBμV	AV Limit dBμV	Margin QP dB	Margin AV dB
N	0.20	50.6	–	63.6	–	13.0	–
N	0.27	47.3	–	61.1	–	13.8	–
N	0.70	36.0	–	56.0	–	20.0	–

Remark: Please see next sub-clause for the measurement plot. Mode n, 6.5 Mbit/s.  
The chosen operating mode is selected as representative mode to generate “worst-case” conditions, i.e. high power consumption.  
The EUT is operated at 12 V DC while supplied by AUX3 which is connected to AC Mains at 120 V / 60 Hz.

### 3.1.4 Measurement Plot (showing the highest value, "worst case")

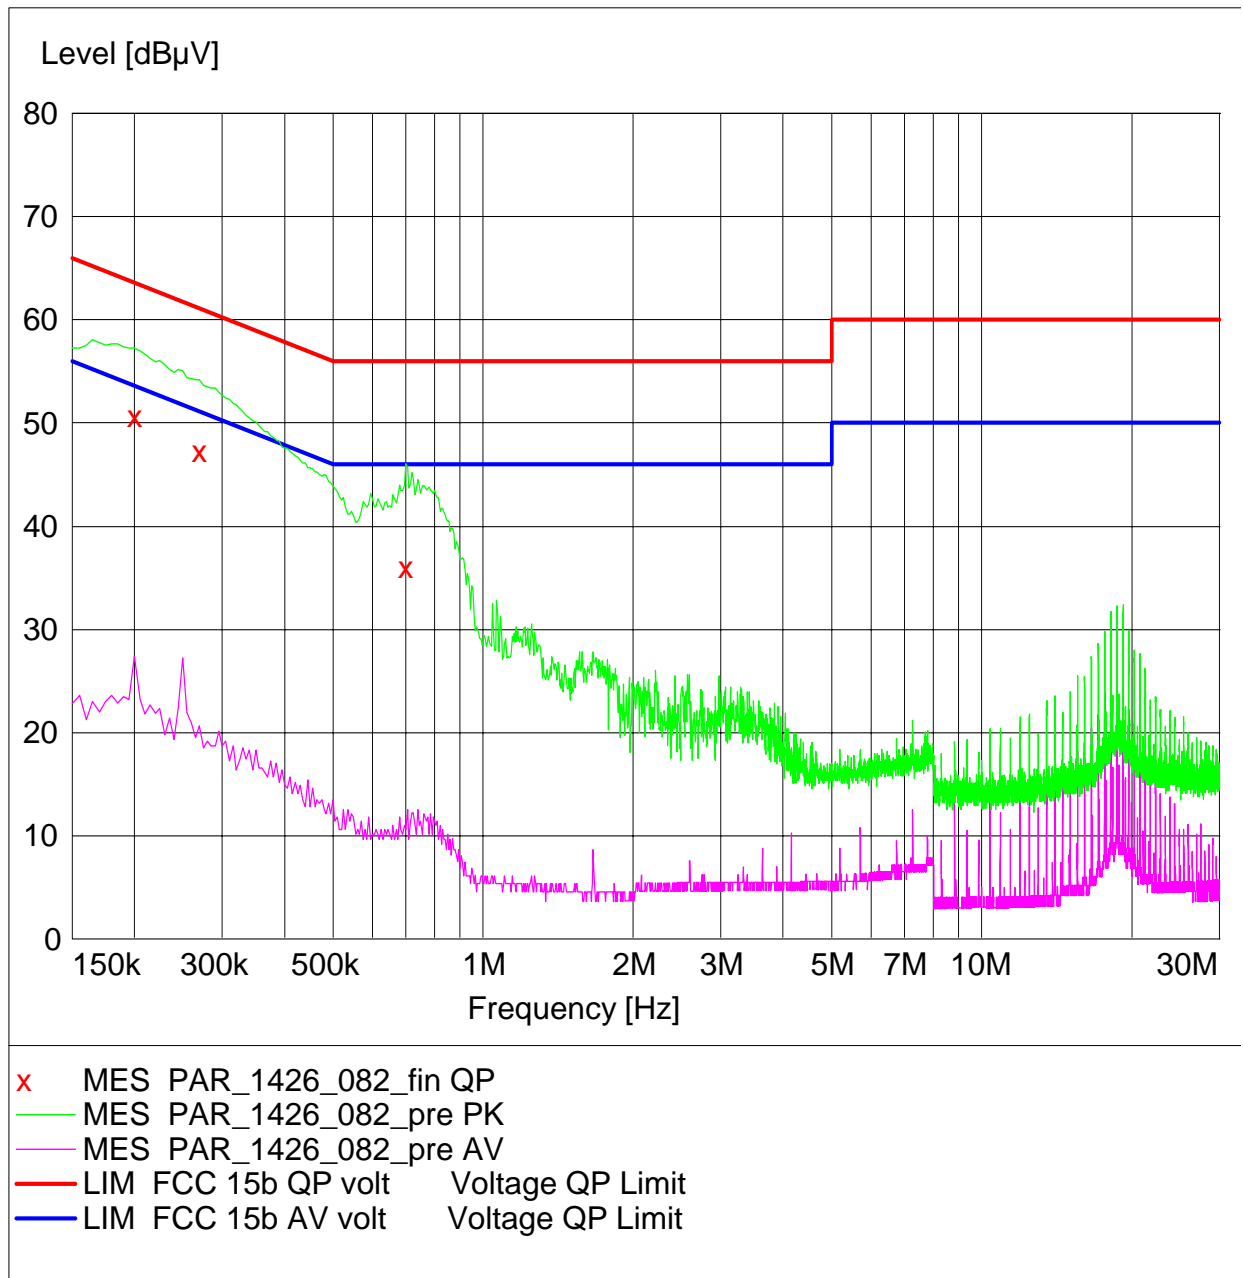

### 3.2 26 / 6 dB Emission bandwidth / 99 % occupied bandwidth

**Standard** FCC Part 15, Subpart E

**The test was performed according to:** FCC §15.31

#### 3.2.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth (26 / 6 dB and 99%).

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- 1) 26 bandwidth, sub-bands 1, 2A and 2C:
  - Resolution Bandwidth (RBW): initially approx. 1 % of nominal emission bandwidth
  - Video Bandwidth (VBW): > RBW
  - readjust RBW close to 1 % of measured bandwidth and repeat the measurement
- 2) 6 dB bandwidth, sub-band 3:
  - Resolution Bandwidth (RBW): 100 kHz
  - Video Bandwidth (VBW):  $\geq 3$  times the RBW
- 1+2) 26 / 6 dB bandwidth:
  - Detector: Peak
  - Trace: Maxhold
  - Sweeps:  $\geq 200$
  - Sweep time: at least coupled
- 3) 99% occupied bandwidth:
  - Span: 1.5 to 5 times the occupied bandwidth
  - Resolution Bandwidth (RBW): approx.  $\geq 1$  % of the span, but not below
  - Video Bandwidth (VBW):  $\geq 3$  times the RBW
  - Detector: Sample
  - Trace: Maxhold
  - Sweeps:  $\geq 200$
  - Sweep time: at least coupled

#### 3.2.2 Test Requirements / Limits

FCC Part 15, Subpart E, §15.403 (i)

There exist no applicable limits for the U-NII subbands 1, 2A and 2C. The test was performed to determine the limits for the "Maximum Conducted Output Power" test case. Therefore no result was applied.

FCC Part 15, Subpart E, §15.407 (e)

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.



### 3.2.3 Test Protocol

Temperature: 23–27 °C  
Air Pressure: 1010–1016 hPa  
Humidity: 37–40 %

#### 1) 26 dB bandwidth

WLAN a-Mode; 20 MHz; 6 Mbit/s			
UNII-Subband	Channel No.	Frequency [MHz]	26 dB Bandwidth [MHz]
1	36	5180	32.995
	44	5220	34.385
	48	5240	35.341
3	149	5745	36.932
	157	5785	35.890
	165	5825	35.427

WLAN n-Mode; 20 MHz; 6.5 Mbit/s			
UNII-Subband	Channel No.	Frequency [MHz]	26 dB Bandwidth [MHz]
1	36	5180	33.690
	44	5220	34.819
	48	5240	34.327
3	149	5745	36.585
	157	5785	35.195
	165	5825	35.369

WLAN n-Mode; 40 MHz; 13.5 Mbit/s			
UNII-Subband	Channel No.	Frequency [MHz]	26 dB Bandwidth [MHz]
1	38	5190	87.640
	46	5230	89.290
3	151	5755	90.770
	159	5795	90.550

Maximum [MHz]:	20 MHz:	36.932	40 MHz:	90.770
Minimum [MHz]:		32.995		87.640

2) 6 dB bandwidth

WLAN a-Mode; 20 MHz; 6 Mbit/s					
UNII-Subband	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]
3	149	5745	15.540	0.500	15.040
	157	5785	15.543	0.500	15.043
	165	5825	15.456	0.500	14.956

WLAN n-Mode; 20 MHz; 6.5 Mbit/s					
UNII-Subband	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]
3	149	5745	15.629	0.500	15.129
	157	5785	15.630	0.500	15.130
	165	5825	15.629	0.500	15.129

WLAN n-Mode; 40 MHz; 13.5 Mbit/s					
UNII-Subband	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]
3	151	5755	35.340	0.500	34.840
	159	5795	35.283	0.500	34.783

3) 99% bandwidth

WLAN a-Mode; 20 MHz; 6 Mbit/s			
UNII-Subband	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
1	36	5180	21.710
	44	5220	21.346
	48	5240	20.984
3	149	5745	22.286
	157	5785	22.431
	165	5825	21.129

WLAN n-Mode; 20 MHz; 6.5 Mbit/s			
UNII-Subband	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
1	36	5180	20.623
	44	5220	21.274
	48	5240	20.984
3	149	5745	22.504
	157	5785	22.359
	165	5825	21.997


WLAN n-Mode; 40 MHz; 13.5 Mbit/s			
1	38	5190	36.613
	46	5230	36.686
3	151	5755	36.831
	159	5795	36.975

Maximum [MHz]:	20 MHz:	22.504	40 MHz:	36.975
Minimum [MHz]:		20.623		36.613

### 3.2.4 Measurement Plot (showing the highest value, "worst case")


1) 26 dB bandwidth

a) 20 MHz nominal bandwidth

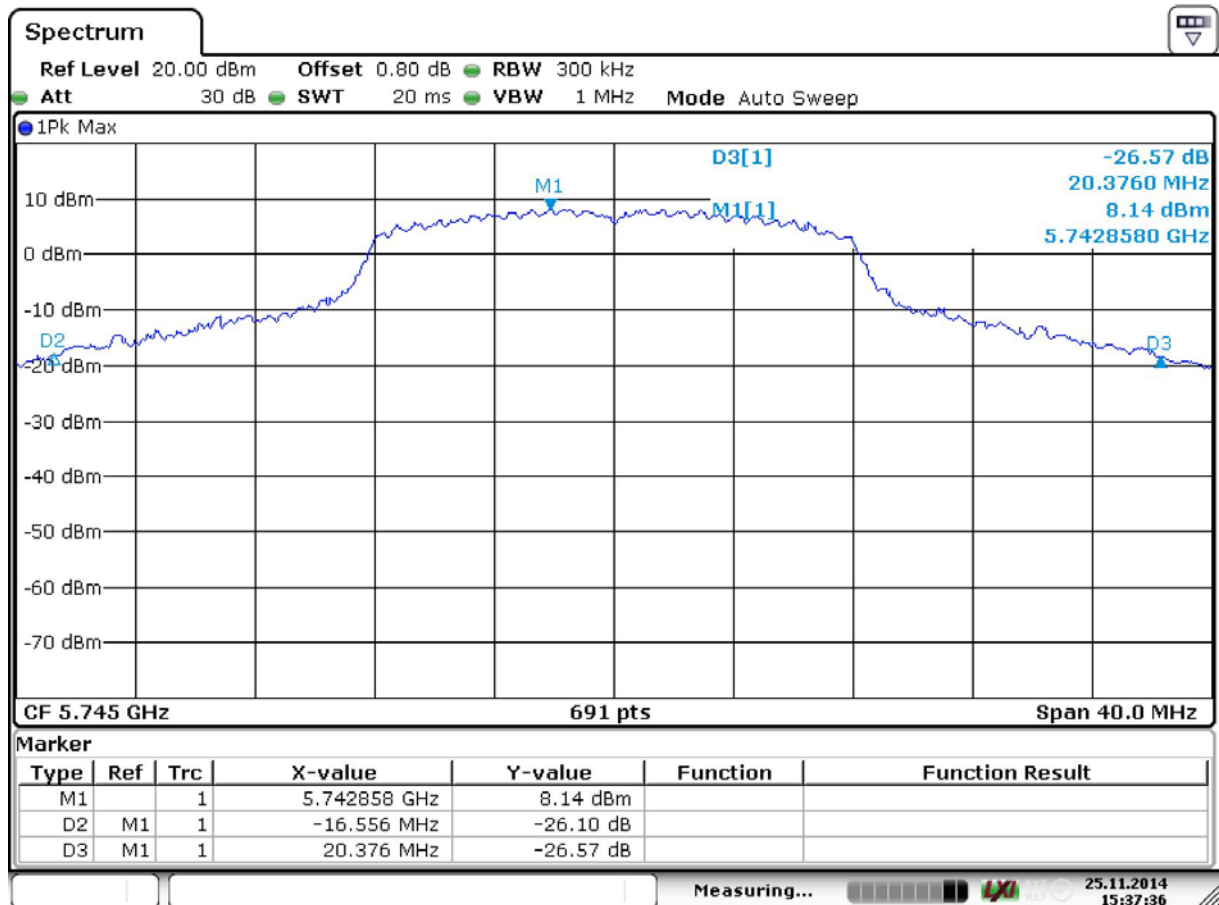


Date: 25.NOV.2014 15:37:36

b) 40 MHz nominal bandwidth

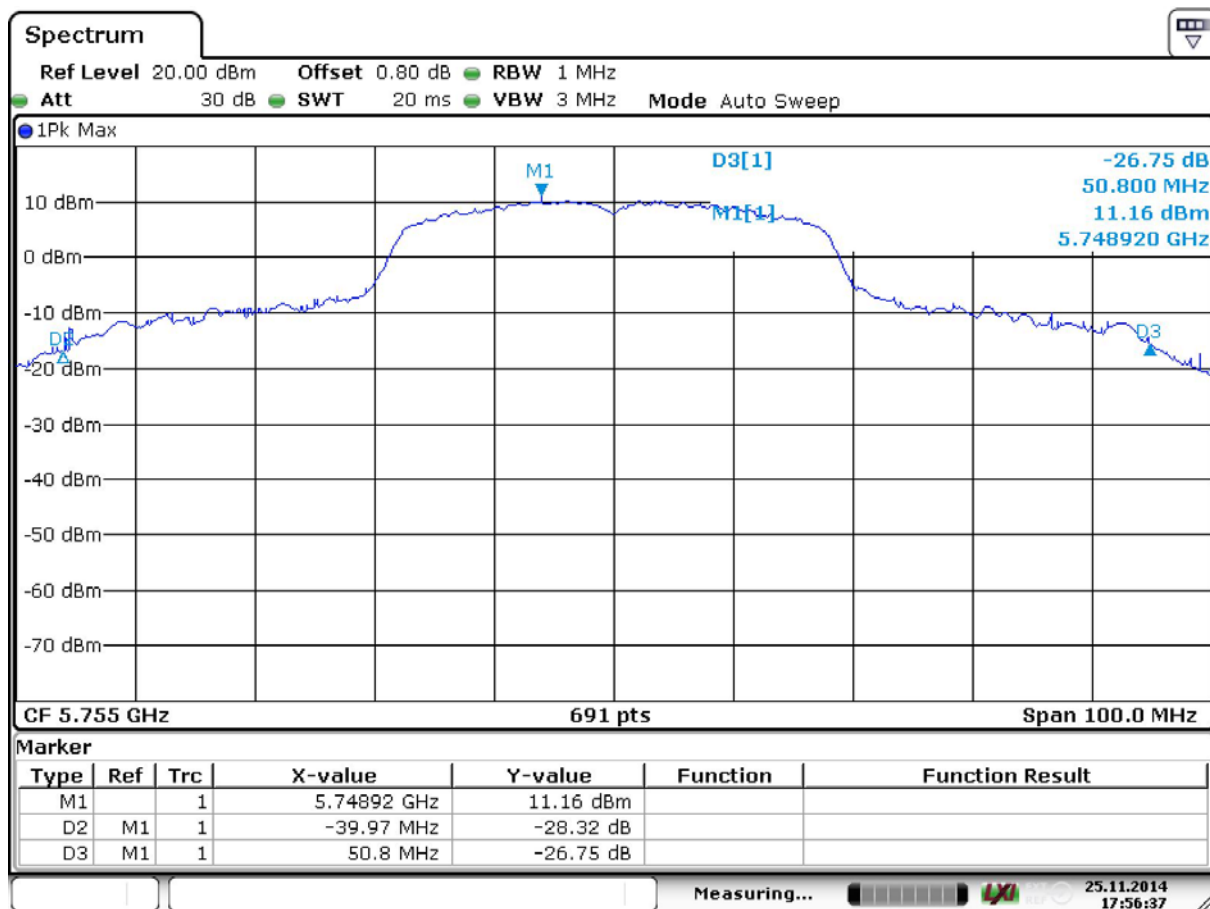

Date: 25.NOV.2014 17:56:37


## 2) 6 dB bandwidth

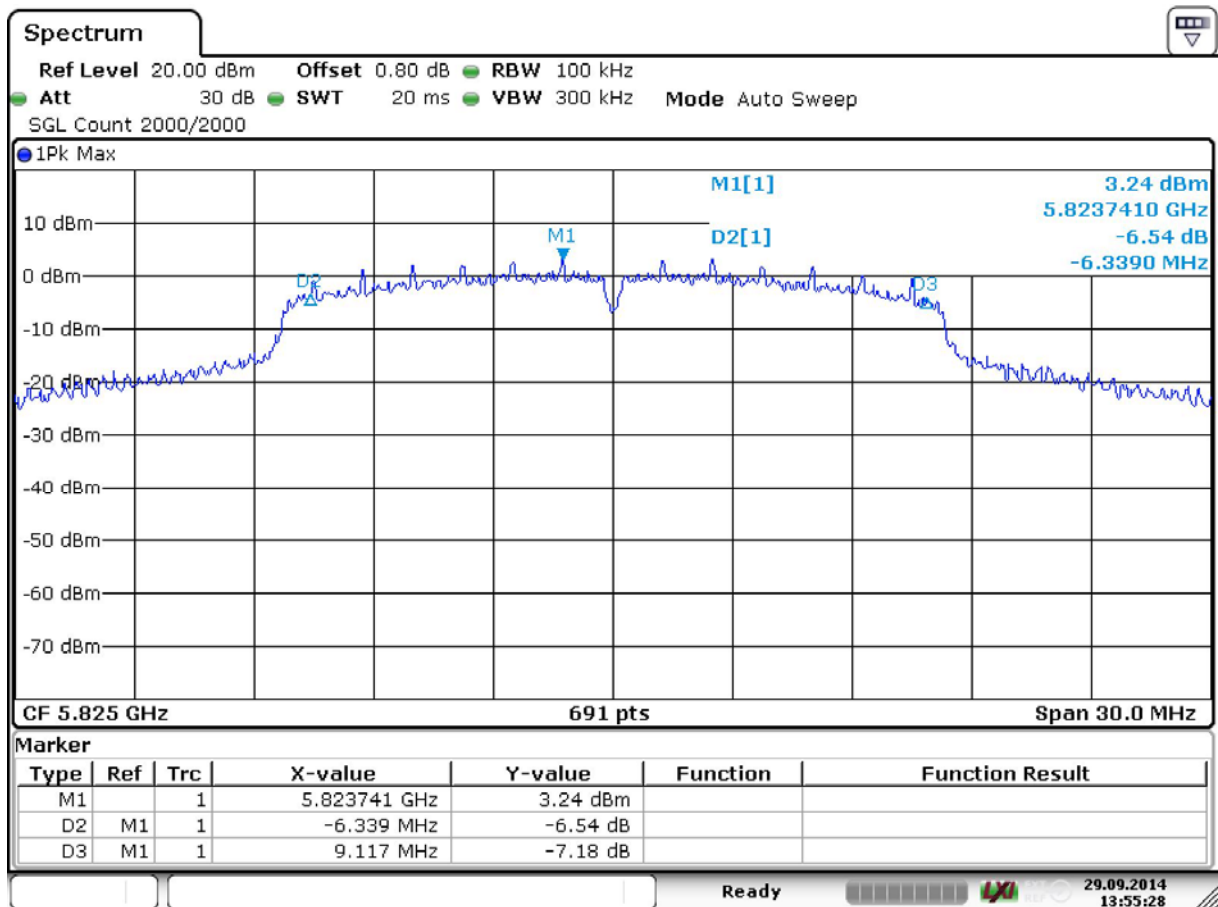

Date: 29.SEP.2014 13:55:28

"worst-case" plot of (smallest) 6 dB Bandwidth measurement

### 3) 99% bandwidth

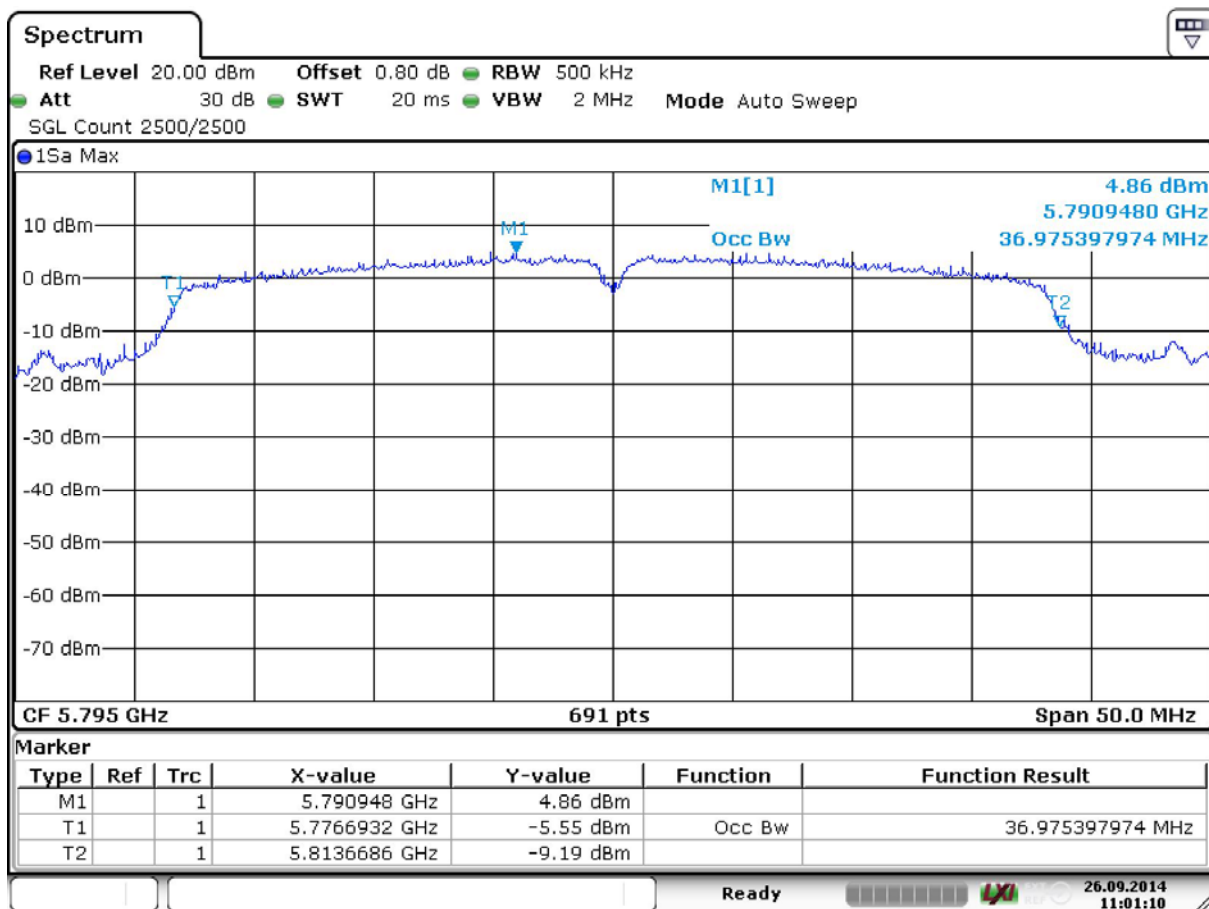

Date: 26.SEP.2014 11:01:11

"worst-case" plot of 99 % Bandwidth measurement

### 3.3 Maximum conducted output power

**Standard** FCC Part 15, Subpart E

**The test was performed according to:** FCC §15.31

#### 3.3.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The EUT was connected to spectrum analyser via a short coax cable with a known loss.

Analyser settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Detector: RMS
- Trace: Average, RMS power averaging mode
- Sweeps: 100
- Sweep time: coupled
- Trigger: gated mode

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D01 General UNII Test Procedures v01r03, 2013-4-08", method **SA-1**.

#### 3.3.2 Test Requirements / Limits

##### A) FCC

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

§15.407 (a) (1)

Limit: 50 mW (17 dBm) or 4 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (1) (i): Outdoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iv): Mobile and portable client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

§15.407 (a) (2)

Limit: 250 mW (24 dBm) or 11 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

§15.407 (a) (3)

Limit: 1 W (30 dBm) or 17 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.



FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):  
§15.407 (a) (3):  
Limit: 1 W (30 dBm).

§15.407 (a) (4):  
The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

## **B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-210, A9.2 (1), Band 5150-5250 MHz, indoor operation only:  
Limit (e.i.r.p.): 200 mW (23 dBm) or  $10 + 10 \log_{10} B$  [dBm], whichever power is less.  
B is the 99% emission bandwidth in MHz.

RSS-210, A9.2 (2), Band 5250-5350 MHz:  
Limits:  
Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B$  [dBm], whichever power is less.  
e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B$  [dBm], whichever power is less.

Note: For EUTs operating at a higher e.i.r.p. than 200 mW (23 dBm), compliance with the e.i.r.p. elevation mask is required.

RSS-210, A9.2 (3), Bands 5470-5600 MHz and 5650-5725 MHz:  
Limits:  
Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B$  [dBm], whichever power is less.  
e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B$  [dBm], whichever power is less.

RSS-210, A9.2 (4), Band 5725-5825 MHz:  
Limits:  
Maximum conducted Power: 1W (30 dBm) or  $17 + 10 \log_{10} B$  [dBm], whichever power is less.  
e.i.r.p.: 4.0 W (36 dBm) or  $23 + 10 \log_{10} B$  [dBm], whichever power is less.

All frequency bands: B is the 99% emission bandwidth in MHz.

### 3.3.3 Test Protocol

Temperature: 23 °C  
Air Pressure: 1010 hPa  
Humidity: 40 %

WLAN a-Mode; 20 MHz; 6 Mbit/s					FCC		IC				
UNII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]	Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]	
1	36	5180	15.6	18.1	30.0	14.4	N/A		23.0	4.9	1)
	44	5220	15.7	18.2	30.0	14.3	N/A		23.0	4.8	1)
	48	5240	15.8	18.3	30.0	14.2	N/A		23.0	4.7	1)
3	149	5745	14.4	16.9	30.0	15.6	30.0	15.6	36.0	19.1	
	157	5785	13.9	16.4	30.0	16.1	30.0	16.1	36.0	19.6	
	165	5825	13.4	15.9	30.0	16.6	30.0	16.6	36.0	20.1	


WLAN n-Mode; 20 MHz; 6.5 Mbit/s					FCC		IC				
UNII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]	Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]	
1	36	5180	16.5	19.0	30.0	13.5	N/A		23.0	4.0	1)
	44	5220	15.4	17.9	30.0	14.6	N/A		23.0	5.1	1)
	48	5240	15.5	18.0	30.0	14.5	N/A		23.0	5.0	1)
3	149	5745	14.5	17.0	30.0	15.5	30.0	15.5	36.0	19.0	
	157	5785	13.8	16.3	30.0	16.2	30.0	16.2	36.0	19.7	
	165	5825	13.3	15.8	30.0	16.7	30.0	16.7	36.0	20.2	

WLAN n-Mode; 40 MHz; 13.5 Mbit/s					FCC		IC				
UNII-Sub-band	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	Cond. Limit [dBm]	Margin [dB]	Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]	
1	38	5190	15.3	17.8	30.0	14.7	N/A		23.0	5.2	1)
	46	5230	14.9	17.4	30.0	15.1	N/A		23.0	5.6	1)
3	151	5755	13.8	16.3	30.0	16.2	30.0	16.2	36.0	19.7	
	159	5795	13.5	16.0	30.0	16.6	30.0	16.6	36.0	20.1	

Maximum [dBm]:	20 MHz:	16.5	40 MHz:	15.3	(conducted)
Maximum [dBm]:	20 MHz:	19.0	40 MHz:	17.8	(EIRP)

- 1) = no additional limit applies related to the elevation.  
2) = check to comply with FCC limit for elevation > 30° !  
3) = check to comply with IC elevation mask requirement !

### 3.3.4 Measurement Plot (showing the highest value, “worst case”)

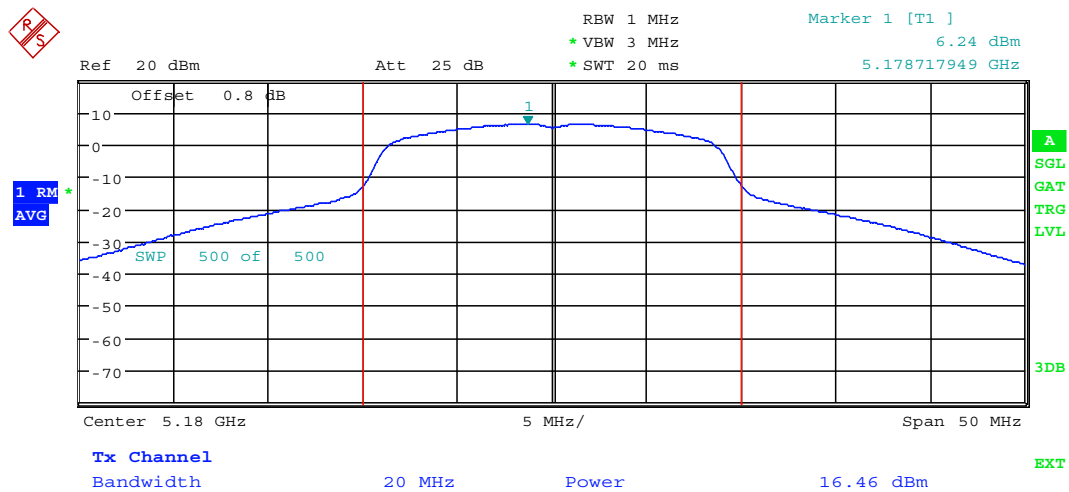

Date: 24.SEP.2014 08:58:24

“worst-case” plot of “Maximum Conducted Output Power” measurement

### 3.4 Maximum Power Spectral Density

**Standard** FCC Part 15, Subpart E

**The test was performed according to:** FCC §15.31

#### 3.4.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the Maximum Power Spectral Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to spectrum analyser via a short coax cable with a known loss.

Analyser settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Detector: RMS
- Trace: Average
- Sweeps: 100
- Sweep time: coupled
- Marker: Peak

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D01 General UNII Test Procedures v01r03, 2013-4-08", method **SA-1**.

#### 3.4.2 Test Requirements / Limits

##### A) FCC

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

(i) and (ii), outdoor and indoor access points: Limit: 17 dBm/MHz.

(iv), mobile and portable client devices: Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 30 dBm/500 kHz.

Note: The limit will be also fulfilled when measuring at any bandwidth greater than 500 kHz. This applies to signals where the maximum conducted output power was measured at a bandwidth exceeding 500 kHz and which fulfil that limit of 30 dBm.

**B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-210, A9.2 (1), Band 5150-5250 MHz, indoor operation only:  
Limit (e.i.r.p.): 10 dBm/MHz.

RSS-210, A9.2 (2), Band 5250-5350 MHz:  
Limit: 11 dBm/MHz.

RSS-210, A9.2 (3), Bands 5470-5600 MHz and 5650-5725 MHz:  
Limit: 11 dBm/MHz.

RSS-210, A9.2 (4), Band 5725-5825 MHz:  
Limit: 17 dBm/MHz.

### 3.4.3 Test Protocol

Temperature: 23 °C  
Air Pressure: 1010 hPa  
Humidity: 40 %

WLAN a-Mode; 20 MHz; 6 Mbit/s								
UNII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm]	Margin [dB]	IC Limit [dBm]	Margin [dB]	IC EIRP MPSD
1	36	5180	5.5	17.0	11.5	10.0	2.0	8.0
	44	5220	5.6	17.0	11.4	10.0	1.9	8.1
	48	5240	5.6	17.0	11.4	10.0	1.9	8.1
2A	0			11.0	11.0	11.0	11.0	unit: dBm/MHz
	0			11.0	11.0	11.0	11.0	
	0			11.0	11.0	11.0	11.0	
2C	0			11.0	11.0	11.0	11.0	
	0			11.0	11.0	11.0	11.0	
	0			11.0	11.0	11.0	11.0	
3	149	5745	4.2	30.0	25.8	17.0	12.8	
	157	5785	3.7	30.0	26.3	17.0	13.3	
	165	5825	3.4	30.0	26.7	17.0	13.7	

WLAN n-Mode; 20 MHz; 6.5 Mbit/s								
UNII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm]	Margin [dB]	IC Limit [dBm]	Margin [dB]	IC EIRP MPSD
1	36	5180	6.2	17.0	10.8	10.0	1.3	8.7
	44	5220	5.2	17.0	11.8	10.0	2.3	7.7
	48	5240	5.2	17.0	11.8	10.0	2.3	7.7
2A	0			11.0	11.0	11.0	11.0	unit: dBm/MHz
	0			11.0	11.0	11.0	11.0	
	0			11.0	11.0	11.0	11.0	
2C	0			11.0	11.0	11.0	11.0	
	0			11.0	11.0	11.0	11.0	
	0			11.0	11.0	11.0	11.0	
3	149	5745	4.3	30.0	25.7	17.0	12.7	
	157	5785	3.5	30.0	26.5	17.0	13.5	
	165	5825	3.1	30.0	27.0	17.0	14.0	


WLAN n-Mode; 40 MHz; 13.5 Mbit/s								
UNII-Sub-band	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm]	Margin [dB]	IC Limit [dBm]	Margin [dB]	IC EIRP MPD
1	38	5190	2.0	17.0	15.0	10.0	5.5	4.5
	46	5230	1.4	17.0	15.6	10.0	6.1	3.9
2A	0			11.0	11.0	11.0	11.0	unit: dBm/ MHz
	0			11.0	11.0	11.0	11.0	
2C	0			11.0	11.0	11.0	11.0	
	0			11.0	11.0	11.0	11.0	
	0			11.0	11.0	11.0	11.0	
3	151	5755	0.5	30.0	29.5	17.0	16.5	
	159	5795	0.0	30.0	30.0	17.0	17.0	

Maximum [dBm]:

20 MHz:	6.2	40 MHz:	2.0
---------	-----	---------	-----

Note: MPSD for subband 3 is measured at 1 MHz bandwidth.

### 3.4.4 Measurement Plot (showing the highest value, "worst case")

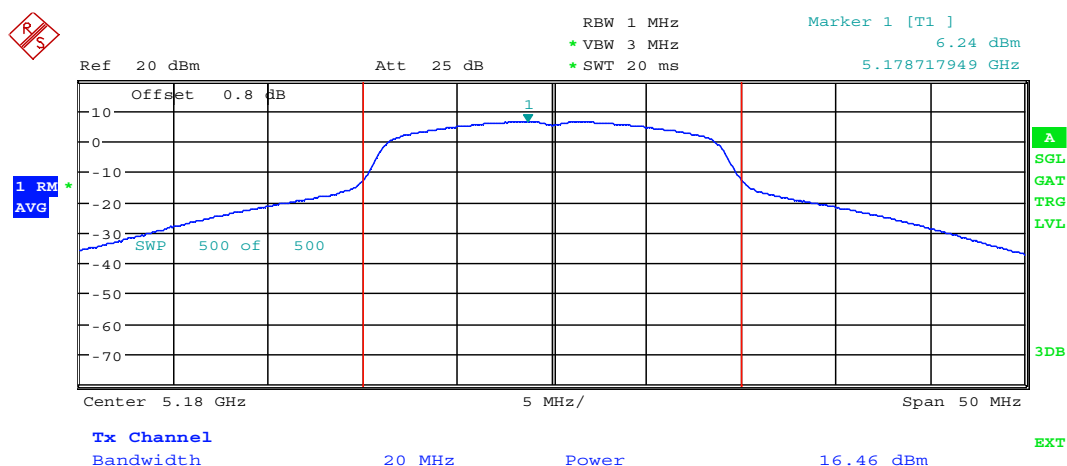

Date: 24.SEP.2014 08:58:24

"worst-case" plot of "Maximum Power Spectral Density" measurement

### **3.5 Frequency Stability**

**Standard** FCC Part 15, Subpart E

#### **3.5.1 Test Description**

The Equipment Under Test (EUT) was set up in an temperature chamber to perform the frequency stability test.

The results recorded, were measured while the EUT is transmitting a CW signal on the required frequency.

The EUT was connected to spectrum analyser via a short coax cable with a known loss.

Analyser settings:

- Frequency Counter activated, Resolution 1 Hz

#### **3.5.2 Test Requirements / Limits**

FCC Part 15, Subpart E, § 15.407 (g)

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

IC, RSS-Gen, 8.11:

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable standard (RSS), measurement of the frequency stability is not required provided that the occupied bandwidth of the licence-exempt radio apparatus lies entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz.

#### **3.5.3 Test Protocol**

Test was not performed.



### 3.5.4 Undesirable Emissions / General Field Strength Limits; Restricted Band and Radiated Emission Limits, Band Edge

**Standard** FCC Part 15, Subpart C & E

**The test was performed according to:** ANSI C 63.4

### 3.5.5 Test Description

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

#### 1. Measurement up to 30 MHz

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The Loop antenna HFH2-Z2 is used.

**Step 1:** pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 and 0.15 - 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

**Step 2:** final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

#### 2. Measurement above 30 MHz and up to 1 GHz

**Step 1:** Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 30 - 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s
- Turntable angle range: -180 to 180°
- Turntable step size: 90°
- Height variation range: 1 - 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### **Step 2: second measurement**

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-180$  to  $180^{\circ}$
- Turntable step size:  $45^{\circ}$
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable):  $45^{\circ}$
- Antenna height: 0.5 m

### **Step 3: final measurement**

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by  $\pm 22.5^{\circ}$  around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by  $\pm 25$  cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $-22.5^{\circ}$  to  $+22.5^{\circ}$  around the determined value
- Height variation range:  $-0.25$  m to  $+0.25$  m around the determined value

### **Step 4: final measurement with QP detector**

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

#### Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support at 1.4 m height in the fully-anechoic chamber. The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 15 GHz) and a horn antenna (15-26 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

For the data rate in mode n the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at modes b and g. Typically, the measurement is performed in the frequency range 1 to 15 GHz but it depends on the emissions found during the test for the modes b and g. Please refer to the results for the used frequency range.

In the frequency range 26 – 40 GHz the measurement was performed conducted.

#### 3.5.6 Test Requirements / Limits

##### A) FCC

FCC Part 15 Subpart E , §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E , §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E , §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E , §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5715–5860 MHz and additionally

Limit: –17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5850–5860 MHz.

## B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-210, A9.2 (1), Emissions outside the band 5150-5250 MHz, indoor operation only:  
Limit: -27 dBm/MHz EIRP outside of the band 5150-5250 MHz.

RSS-210, A9.2 (2), Emissions outside the band 5250-5350 MHz:  
Limit: -27 dBm/MHz EIRP outside of the band 5250-5350 MHz.

RSS-210, A9.2 (3), Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:  
Limit: -27 dBm/MHz EIRP outside of the band 5470-5725 MHz.  
Note: No operation is permitted for the frequency range 5600-5650 MHz.

RSS-210, A9.2 (4), Emissions outside the band 5725-5825 MHz:  
Limit: -27 dBm/MHz EIRP outside of the band 5715-5835 MHz and additionally  
Limit: -17 dBm/MHz EIRP within the frequency ranges 5715-5725 and 5825-5835 MHz.

## C) FCC & IC

FCC Part 15 Subpart E , §15.405 and §15.407 (b)(6,7)  
Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. The provisions of §§ 15.203 and 15.205 are included.

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Calculated Limits(dBµV/m @10m)	Limits(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300 10	(48.5 – 13.8) + 59.1 dB	107.6 – 72.9
0.49 – 1.705	24000/F(kHz)	30 10	(48.9 – 23.0) + 19.1 dB	60.0 – 42.1
1.705 – 30	30	30 10	29.5 + 19.1 dB	48.6

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

### §15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$   
 $\text{Limit (dBµV/m)} = \text{EIRP [dBm]} - 20 \log (d [\text{m}]) + 104.8$   
 where d is the measurement distance

### 3.5.7 Test Protocol

#### Limit types:

RB – Emissions falls into a “Restricted Band” according FCC §§15.205 and 15.209

UE – “Undesirable Emission Limit” according FCC §15.407

BE-RB – Band Edge Limit basing on “Restricted Band Limits”

BE-RB – Band Edge Limit basing on “Undesirable Emission Limit”

Temperature: 24–26 °C

Air Pressure: 1005–1023 hPa

Humidity: 39–50 %

#### 3.5.7.1 Radiated spurious and undesired emissions

WLAN a-Mode; 20 MHz; 6 Mbit/s				Applied duty cycle correction (AV) [dB]				0.7
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
44	5220	1259.0	51.6	PEAK	1000	68.0	16.4	UE
44	5220	5114.5	54.2	PEAK	1000	74.0	19.8	RB
44	5220	5114.5	43.9	AV	1000	54.0	10.1	RB
44	5220	5250.0	64.0	PEAK	1000	68.0	4.0	UE
44	5220	5324.0	53.4	PEAK	1000	68.0	14.6	UE
44	5240	15657.0	58.0	PEAK	1000	74.0	16.0	RB
44	5220	15659.5	44.4	AV	1000	54.0	9.6	RB
157	5785	2005.0	48.5	PEAK	1000	68.0	19.5	UE
157	5785	5679.5	52.4	PEAK	1000	68.0	15.6	UE

WLAN n-Mode; 20 MHz; 6.5 Mbit/s				Applied duty cycle correction (AV) [dB]				0.8
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
36	5180	10360.0	49.1	PEAK	1000	68.0	18.9	UE
44	5220	10440.0	50.2	PEAK	1000	68.0	17.8	UE
48	5240	6489.0	50.7	PEAK	1000	68.0	17.3	UE
48	5240	10440.0	50.6	PEAK	1000	68.0	17.4	UE
48	5240	14988.0	48.5	PEAK	1000	68.0	19.5	UE
149	5745	6287.0	51.0	PEAK	1000	68.0	17.0	UE
157	5785	6094.5	50.6	PEAK	1000	68.0	17.4	UE

Note: No (further) spurious emissions in the range 20 dB below the limit found.  
The tests for mode a have been performed in the frequency range 30–26500 MHz, for mode n in the range 1–15 GHz in order to check i.e. for harmonics in respect to the measured conducted output power and because at pre-measurements no significant spurious emissions have been found outside this frequency range.  
In the ranges 30–1000 MHz and 18–26.5 GHz setup\_04 was tested, otherwise setup\_02.

WLAN n-Mode; 40 MHz; 13.5 Mbit/s				Applied duty cycle correction (AV) [dB]				1.4
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
-								

Note: No (further) spurious emissions in the range 20 dB below the limit found.  
The measurement was performed from 1 GHz up to 15 GHz because at pre-measurements no significant spurious emissions have been found outside this frequency range.

### 3.5.7.2 Band Edge

WLAN a-Mode; 20 MHz; 6 Mbit/s					Applied duty cycle correction (AV) [dB]: 0.7					
UNII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	61.2	PEAK	1000	74.0	12.8	BE-RB	FCC&IC
	36	5180	5150.0	43.6	AV	1000	54.0	10.4	BE-RB	FCC&IC
3	161	5805	5825.0	72.1	PEAK	1000	78.0	5.9	BE-UE	IC

WLAN n-Mode; 20 MHz; 6.5 Mbit/s					Applied duty cycle correction (AV) [dB]: 0.8					
UNII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	61.6	PEAK	1000	74.0	12.4	BE-RB	FCC&IC
	36	5180	5150.0	43.4	AV	1000	54.0	10.6	BE-RB	FCC&IC
3	161	5805	5825.0	72.3	PEAK	1000	78.0	5.7	BE-UE	IC


WLAN n-Mode; 40 MHz; 13.5 Mbit/s					Applied duty cycle correction (AV) [dB]: 1.4					
UNII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	38	5190	5150.0	69.8	PEAK	1000	74.0	4.2	BE-RB	FCC&IC
	38	5190	5150.0	53.3	AV	1000	54.0	0.7	BE-RB	FCC&IC

WLAN n-Mode; 40 MHz; 150 Mbit/s					Applied duty cycle correction (AV) [dB]: 5.4					
UNII-Sub-band	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	38	5190	5150.0	55.8	PEAK	1000	74.0	18.2	BE-RB	FCC&IC
	38	5190	5150.0	40.0	AV	1000	54.0	14.0	BE-RB	FCC&IC

Note: Tests at the Band Edges are implicitly performed together with the undesired emission tests, which are performed as radiated test. The measurements are performed up to the band edges using the bandwidth specified for the undesired emissions.  
If this test is passed, no additional test especially at the band edges will be performed, e.g. applying a reduced bandwidth or carrying out tests using the marker-delta method. Otherwise, the results will be reported in this sub-clause.  
Band Edge tests are always performed and reported when the band directly adjacent to a Restricted Band.  
Spurious emissions in the range 20 dB below the limit need not to be reported.


### 3.5.8 Measurement Plot Band Edge (showing the highest value, "worst case")

a) at restricted band

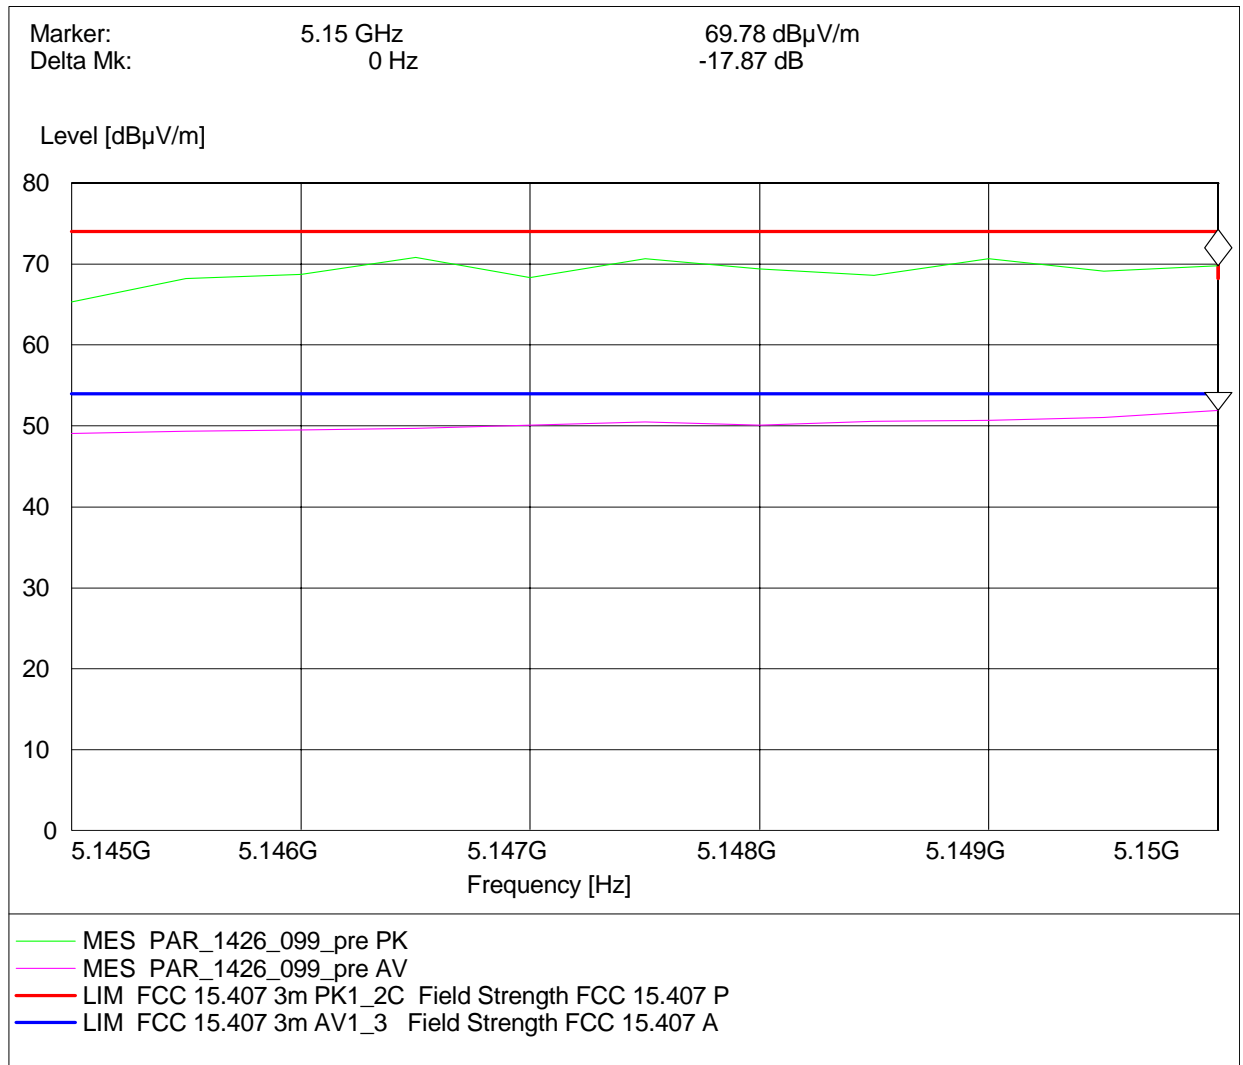



b) IC undesired emissions

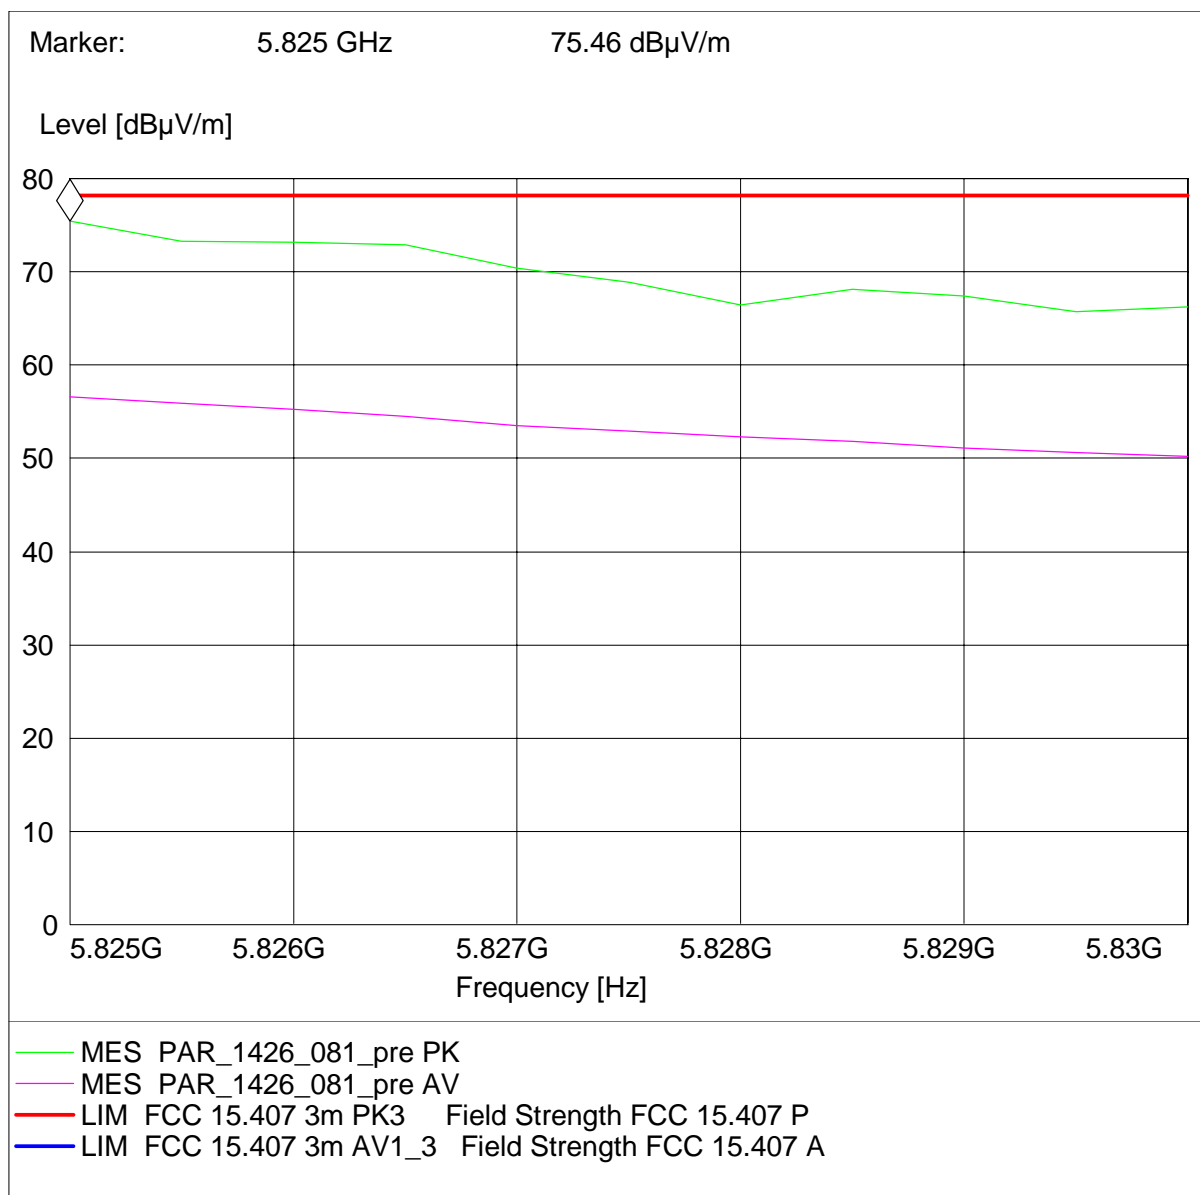

## 4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

### Test Equipment Anechoic Chamber

<b>Lab ID:</b>	<b>Lab 2</b>		
<b>Manufacturer:</b>	Frankonia		
<b>Description:</b>	Anechoic Chamber for radiated testing		
<b>Type:</b>	10.58x6.38x6.00 m <sup>3</sup>		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	NSA (FCC)	2014/01/09	2017/01/09

### Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

### Test Equipment Auxiliary Equipment for Conducted emissions

<b>Lab ID:</b>	<b>Lab 1</b>
<b>Manufacturer:</b>	Rohde & Schwarz GmbH & Co.KG
<b>Description:</b>	EMI Conducted Auxiliary Equipment

### Single Devices for Auxiliary Equipment for Conducted emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31

### Single Devices for Auxiliary Equipment for Conducted emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer	
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH	
One-Line V-Network	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2014/01/08	2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG	
One-Line V-Network	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	standard calibration		2014/06/18	2017/11/30
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG	
Two-Line V-Network	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/11/25	2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG	
Two-Line V-Network	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standart Calibration		2013/03/01	2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG	
Two-Line V-Network	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/03/01	2015/02/28

## Test Equipment Auxiliary Equipment for Radiated emissions

**Lab ID:** Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

### Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer	
Antenna mast	AM 4.0	AM4.0/180/119205 13	Maturo GmbH	
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck	
Biconical dipole	VUBA 9117 <i>Calibration Details</i>	9117-108	Schwarzbeck	
	Standard Calibration			<i>Last Execution</i> <i>Next Exec.</i>
				2012/01/18   2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq	
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq	
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq	
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01- 2	Kabel Kusch	
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02- 2	Rosenberger Micro-Coax	
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration			2012/05/18   2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration			2012/06/26   2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic	
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic	
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic	
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright	
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170			
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration			2012/12/18   2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG	
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration			2011/10/27   2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH	
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH	

### Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

### Test Equipment Auxiliary Test Equipment

<b>Lab ID:</b>	<b>Lab 2, Lab 3</b>
<b>Manufacturer:</b>	see single devices
<b>Description:</b>	Single Devices for various Test Equipment
<b>Type:</b>	various
<b>Serial Number:</b>	none

### Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider1506A / 93459 N (Aux)		LM390	Weinschel Associates
Broadband Power DividerWA1515 SMA		A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/12/04   2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard			2014/02/10   2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard			2012/06/13   2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2014/07/29   2015/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

## Test Equipment Digital Signalling Devices

**Lab ID:** Lab 1, Lab 2, Lab 3

**Description:** Signalling equipment for various wireless technologies.

### Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2011/11/24 2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2011/11/28 2014/11/27
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	HW/SW Status		Date of Start Date of End
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	Calibration Details		Last Execution Next Exec.
	Standard calibration		2011/12/07 2014/12/06
	HW/SW Status		Date of Start Date of End
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG

### Test Equipment Emission measurement devices

**Lab ID:** Lab 1, Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

#### Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
Calibration Details			Last Execution Next Exec.
Standard calibration			2014/05/13 2015/05/12
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
Calibration Details			Last Execution Next Exec.
Standard calibration			2014/05/13 2015/05/12
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
Calibration Details			Last Execution Next Exec.
Standard Calibration			2014/06/24 2017/06/23
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
Calibration Details			Last Execution Next Exec.
Standard Calibration			2014/01/07 2016/01/31
HW/SW Status			Date of Start Date of End
Firmware-Update 4.34.4 from 3.45 during calibration			2009/12/03

### Test Equipment Multimeter 12

**Lab ID:** Lab 4, Lab 5  
**Description:** Ex-Tech 520  
**Serial Number:** 05157876

#### Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/12/04 2015/12/03

## Test Equipment Radio Lab Test Equipment

**Lab ID:** Lab 3  
**Description:** Radio Lab Test Equipment

### Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power DividerWA1515 SMA		A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/12
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS	5489/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/03 2015/07/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/12
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/25 2014/11/24
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/06 2016/05/05
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/02/12 2015/02/11



### Test Equipment Regulatory Bluetooth RF Test Solution

**Lab ID:** Lab 4  
**Description:** Regulatory Bluetooth RF Tests  
**Type:** Bluetooth RF  
**Serial Number:** 001

### Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer	
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.	
Bluetooth Signalling Unit CBT CBT		100302	Rohde & Schwarz GmbH & Co.KG	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2014/08/29	2015/08/28
Power Meter NRVD	NRVD	832025/059	Last Execution Next Exec.	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2014/08/29	2015/08/28
Power Sensor NRV Z1 A	PROBE	832279/013	Last Execution Next Exec.	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2014/08/28	2015/08/27
Power Supply	NGSM 32/10	2725	Last Execution Next Exec.	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2013/06/20	2015/06/19
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH	
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG	
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	Last Execution Next Exec.	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2013/06/21	2016/06/20

### Test Equipment Shielded Room 02

**Lab ID:** Lab 1  
**Manufacturer:** Frankonia  
**Description:** Shielded Room for conducted testing  
**Type:** 12 qm  
**Serial Number:** none

### Test Equipment Shielded Room 07

**Lab ID:** Lab 4, Lab 5  
**Description:** Shielded Room 4m x 6m

### Test Equipment T/A Logger 13

**Lab ID:** Lab 1, Lab 2, Lab 3  
**Description:** Lufft Opus10 TPR  
**Type:** Opus10 TPR  
**Serial Number:** 13936

#### Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/02/07 2015/02/06

### Test Equipment T/H Logger 02

**Lab ID:** Lab 1  
**Description:** Lufft Opus10  
**Serial Number:** 7489

#### Single Devices for T/H Logger 02

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 02 (Environ)	Opus10 THI (8152.00)	7489	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/02/07 2015/02/06

### Test Equipment T/H Logger 03

**Lab ID:** Lab 3  
**Description:** Lufft Opus10  
**Serial Number:** 7482

#### Single Devices for T/H Logger 03

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 03 (Environ)	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/02/07 2015/02/06

### Test Equipment T/H Logger 12

**Lab ID:** Lab 2  
**Description:** Lufft Opus10  
**Serial Number:** 12482

#### Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
Calibration Details			Last Execution Next Exec.
Customized calibration			2013/01/07 2015/01/06

#### Test Equipment T/H Logger 15

**Lab ID:** Lab 4, Lab 5  
**Description:** Lufft Opus10  
**Serial Number:** 13985

#### Single Devices for T/H Logger 15

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 15 (Environ)		13985	Lufft Mess- und Regeltechnik GmbH
		Calibration Details	Last Execution Next Exec.
		Customized calibration	2013/01/07 2015/01/06

#### Test Equipment Temperature Chamber 01

**Lab ID:** Lab 4, Lab 5  
**Manufacturer:** see single devices  
**Description:** Temperature Chamber KWP 120/70  
**Type:** Weiss  
**Serial Number:** see single devices

#### Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
		Calibration Details	Last Execution Next Exec.
		Customized calibration	2014/03/12 2016/03/11

#### Test Equipment Temperature Chamber 05

**Lab ID:** Lab 3  
**Manufacturer:** see single devices  
**Description:** Temperature Chamber VT4002  
**Type:** Vötsch  
**Serial Number:** see single devices

#### Single Devices for Temperature Chamber 05

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Vötsch 05	VT 4002	58566080550010	Vötsch
		Calibration Details	Last Execution Next Exec.
		Customized calibration	2014/03/11 2016/03/10

## Test Equipment WLAN RF Test Solution

**Lab ID:** Lab 5  
**Manufacturer:** 7 layers AG  
**Description:** Regulatory WLAN RF Tests  
**Type:** WLAN RF  
**Serial Number:** 001


## Single Devices for WLAN RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer	
Arbitrary Waveform Generator	TGA12101	284482		
Power Meter NRVD	NRVD	832025/059	Last Execution Next Exec.	
	Calibration Details			
	Standard calibration		2014/08/29	2015/08/28
Power Sensor NRV Z1 A	PROBE	832279/013	Last Execution Next Exec.	
	Calibration Details			
	Standard calibration		2014/08/28	2015/08/27
Power Supply	NGSM 32/10	2725	Last Execution Next Exec.	
	Calibration Details			
	Standard calibration		2013/06/20	2015/06/19
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH	
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG	
Spectrum Analyser	FSU26	100136	Rohde & Schwarz GmbH & Co.KG	
	Calibration Details		Last Execution Next Exec.	
	Standard Calibration		2014/01/06	2015/01/05
	HW/SW Status		Date of Start	Date of End
	FSU FW Update to v4.61 SP3, K5 v4.60 and K73 v4.61		2011/12/05	
Spectrum Analyser	FSU3	200046	Rohde & Schwarz GmbH & Co.KG	
	Calibration Details		Last Execution Next Exec.	
	Standard calibration		2014/07/01	2015/06/30
	HW/SW Status		Date of Start	Date of End
	Firmware Version 4.51 SP1		2011/12/07	
	Option FS-K72 4.50 SP1			
	Option FS-K73 4.50 SP1			
TOCT Switching Unit	Switching Unit	040107	7 layers, Inc.	
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	Last Execution Next Exec.	
	Calibration Details			
	Standard calibration		2013/06/21	2016/06/20

## 5 Photo Report

Please refer to external report.

## 6 Setup Drawings

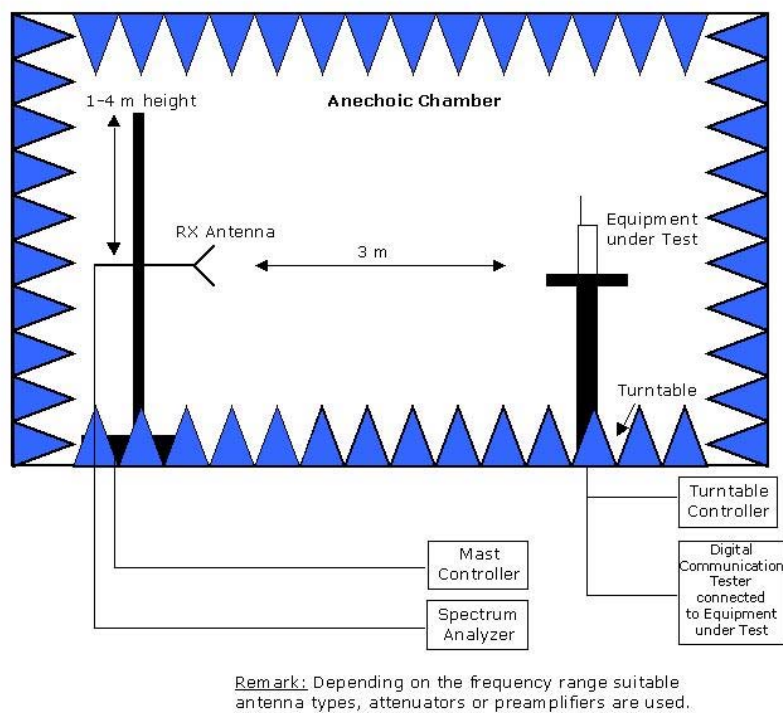

**Drawing 1:** Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.