



RA-24-07105389-2/A Ed. 0

**FCC CERTIFICATION
RADIO Measurement
Technical Report**

**standard to apply:
FCC Part 15**

**Equipment under test:
BLUETOOTH AND RECEIVER 433 MHz
HANDS-FREE KIT FOR SCOOTER AND
MOTO (Headset part)
SK4000**

**FCC ID :
RKXMOTOS**

**Company:
PARROT**

DISTRIBUTION: Mr PIDOU

Company: PARROT

Number of pages: 37 including 5 annexes

Ed.	Date	Modified pages	Written by		Technical Verification Quality Approval	
			Name	Visa	Name	Visa
0	25-Apr-08	Creation	L. BERTHAUD	LB		

Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.

This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.



PRODUCT: BLUETOOTH AND RECEIVER 433 MHz HANDS-FREE KIT FOR SCOOTER AND MOTO (Headset part)

Reference / model: SK4000

Serial number: not communicated

MANUFACTURER: not communicated

COMPANY SUBMITTING THE PRODUCT:

Company: PARROT

Address: 174, quai de Jemmapes
75010 PARIS
FRANCE

Responsible: Mr PIDOU

DATE(S) OF TEST: 19 December 2007

TESTING LOCATION: EMITECH ATLANTIQUE laboratory at ANGERS (49) FRANCE
EMITECH ATLANTIQUE open area test site in LA POUEZE (49)
FRANCE

Registration Number by FCC: 101696/FRN: 0006 6490 08

TESTED BY: L. BERTHAUD

CONTENTS

TITLE	PAGE
1. INTRODUCTION.....	4
2. PRODUCT DESCRIPTION	4
3. NORMATIVE REFERENCE.....	4
4. TEST METHODOLOGY	5
5. ADD ATTACHMENTS FILES	5
6. TESTS AND CONCLUSIONS	6
7. PEAK OUTPUT POWER.....	7
8. RADIATED EMISSION OF TRANSMITTER (INTENTIONAL RADIATOR).....	9
9. RADIATED INTERFERENCE (UNINTENTIONAL RADIATOR).....	11
10. BAND EDGE COMPLIANCE	13
CURVE N°: 1.....	14
CURVE N°: 2.....	15
ANNEX 1: OCCUPIED POWER BANDWIDTH AND CHANNEL SEPARATION	16
ANNEX 2: AVERAGE TIME OF OCCUPANCY ON ANY FREQUENCY	22
ANNEX 3: NUMBER OF HOPPING FREQUENCIES	28
ANNEX 4: PHOTOS OF THE EQUIPMENT UNDER TEST	32
ANNEX 5: TEST SET UP AND OPEN AREA TEST SITE	36

1. INTRODUCTION

This document presents the result of RADIO test carried out on the following equipment: BLUETOOTH AND RECEIVER 433 MHz HANDS-FREE KIT FOR SCOOTER AND MOTO (Headset part) SK4000 in accordance with normative reference.

2. PRODUCT DESCRIPTION

ITU Emission code:	1M00F7D
Class:	B (residential environment)
Utilization:	Bluetooth hands-free kit
Antenna type:	incorporated antenna
Operating frequency range:	from 2402 MHz to 2480 MHz (transmitter) 433.92 MHz (receiver)
Number of channels:	79 (transmitter) 1 (receiver)
Channel spacing:	1 MHz
Frequency generation:	<input type="radio"/> SAW Resonator <input type="radio"/> Crystal <input checked="" type="radio"/> Synthesizer
Modulation: Frequency Hopping Spread Spectrum (FHSS)	<input checked="" type="radio"/> Amplitude <input type="radio"/> Digital <input checked="" type="radio"/> Frequency <input type="radio"/> Phase
Power source:	5 Vd.c. (Lithium battery)

Power level, frequency range and channels characteristics are not user adjustable.
The details pictures of the product and the circuit boards are joined with this file.

3. NORMATIVE REFERENCE

The standards and testing methods related throughout this report are those listed below.
They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

FCC Part 15 (2007)	Code of Federal Regulations Title 47 - Telecommunication Chapter 1 - Federal Communications Commission Part 15 - Radio frequency devices Subpart C - Intentional Radiators
ANSI C63.4 (2003)	Methods of Measurement of Radio-Noise Emissions from Low-voltage Electrical and Electronics Equipment in the range of 9 kHz to 40 GHz.
Public Notice DA 00-705	Filing and Measurement Guideline for Frequency Hopping Spread Spectrum Systems.

4. TEST METHODOLOGY

Radio performance tests procedures given in part 15:

- Paragraph 33: frequency range of radiated measurements
- Paragraph 35: measurement detector functions and bandwidths
- Paragraph 109: radiated emission limits (unintentional radiator)
- Paragraph 203: antenna requirement
- Paragraph 205: restricted bands of operation
- Paragraph 207: conducted limits
- Paragraph 209: radiated emission limits; general requirements (intentional radiator)
- Paragraph 247: operation within the bands 2400-2483.5 MHz

5. ADD ATTACHMENTS FILES

- “Synoptic“***
- “Block diagram“***
- “External photos and Product labeling“***
- “Assembly of components“***
- “Internal photos“***
- “Layout pcb“***
- “Bil of materials“***
- “Schematics“***
- “Product description“***
- “User guide“***

6. TESTS AND CONCLUSIONS

Test procedure	Description of test	Criteria respected ?				Comment
		Yes	No	NAp	NAs	
FCC Part 15.109	RADIATED EMISSION LIMITS (unintentional radiator)	X				433 MHz receiver part
FCC Part 15.203	ANTENNA REQUIREMENT	X				Note 1
FCC Part 15.205	RESTRICTED BANDS OF OPERATION	X				
FCC Part 15.207	CONDUCTED LIMITS			X		
FCC Part 15.209	RADIATED EMISSION LIMITS; general requirements (intentional radiator)	X				Note 2
FCC Part 15.247	OPERATION WITHIN THE BAND 2400-2483.5 MHz					Bluetooth part
	(a) (1) <i>hopping systems</i>	X				Note 3
	(a) (1) (i) 902 – 928 MHz			X		
	(a) (1) (ii) 5725 – 5850 MHz			X		
	(a) (1) (iii) 2400 – 2483.5 MHz	X				Note 4
	(a) (2) <i>digital modulation techniques</i>			X		
	(b) <i>max output power</i>	X				Note 5
	(c) <i>operation with directional antenna gains > 6 dBi</i>			X		Note 6
	(d) <i>intentional radiator</i>	X				
	(e) <i>peak power spectral density</i>			X		
	(f) <i>hybrid system</i>			X		
	(g)	X				
	(h)	X				
	(i) <i>RF exposure compliance</i>	X				Note 7
DA 00-705	BAND EDGE COMPLIANCE	X				

NAp: Not Applicable

NAs: Not Asked

Note 1: internal antenna (pcb antenna), see photos in annex 4.

Note 2: see FCC part 15.247 (d).

Note 3: the system hops to channel frequencies from a pseudo randomly ordered list of hopping frequencies. Each frequency is used equally on the average by the transmitter, and separated by a minimum of 20 dB bandwidth of the hopping channel (735.5 kHz; see annex 1).

Note 4: the frequency hopping system uses 79 channels (see annex 3).

The timing by channel is 181 μs. During 79 channels × 0.4 s (part 15) = 31.6 s, any channel is used 120 times, then 120 × 181 μs = 21.72 ms, thus the average time of occupancy on any channel is less than 400 ms within a period of 0.4 s multiplied by the number of hopping channels employed, in normal operating mode (see annex 2).

Note 5: conducted measurement is not possible (integral antenna), so we used the radiated method in open field.

Note 6: the antenna gain is less than 6 dBi.

Note 7: this type of equipment uses less than 0.5 W of output power with a high signal transmitting duty factor (section 3 from Oet 65c).

Conclusion:

The sample of BLUETOOTH AND RECEIVER 433 MHz HANDS-FREE KIT FOR SCOOTER AND MOTO (Headset part) SK4000 submitted to the tests complies with the regulations of the standard FCC Part 15 in accordance with the limits or criteria defined in this report.

7. PEAK OUTPUT POWER

Standard: FCC Part 15

Test procedure: paragraph 15.247

Test equipment:

TYPE	BRAND	EMITECH NUMBER
Spectrum analyzer FSP 40	Rohde & Schwarz	4088
Antenna RGA60	Electrometrics	1938
Antenna RGA60	Electrometrics	1204
Open site	EMITECH	1274
Radio frequency generator SME06	Rohde & Schwarz	1669
High pass filter HPM11630	Micro-tronics	1673
Low-noise amplifier 1 to 18 GHz	ALC	2648
Power meter 8541B	Gigatronics	3479
Power sensor 80401A	Gigatronics	3182
Power source E3610A	Hewlett Packard	4195

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

We use for this measure outdoor test site and substitution method. The measuring distance between the equipment and the test antenna is 3 m. The test antenna has been oriented in the two polarizations, we have recorded only the highest level.

A measurement of the electro-magnetic field is realized, with a resolution bandwidth and video bandwidth adjusted at 1 MHz.

Distance of antenna: 3 meters

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal

Equipment under test operating condition:

The equipment under test is blocked in continuous transmission mode, modulated by internal data signal, at the highest output power level which the transmitter is intended to operate.

Results:

Ambient temperature (°C): 20
 Relative humidity (%): 38

Polarization of test antenna: horizontal (height: 175 cm)
 Position of equipment: use position (azimuth: 270 degrees)

Sample n° 1 Channel 1 (2402 MHz)

		Level dB μ V	Cable loss dB	Antenna factor dB	Electro-magnetic field (dB μ V/m):	P* (W)
Normal test conditions	Nominal power source (V): 5	62.49	4.62	28.9	96.01	0.725×10^{-3}

Sample n° 1 Channel 40 (2441 MHz)

		Level dB μ V	Cable loss dB	Antenna factor dB	Electro-magnetic field (dB μ V/m):	P* (W)
Normal test conditions	Nominal power source (V): 5	62.87	4.65	29	96.52	0.816×10^{-3}

Sample n° 1 Channel 79 (2480 MHz)

		Level dB μ V	Cable loss dB	Antenna factor dB	Electro-magnetic field (dB μ V/m):	P* (W)
Normal test conditions	Nominal power source (V): 5	62.73	4.68	29.14	96.55	0.822×10^{-3}

* $P = (E \times d)^2 / (30 \times G_p)$ with $d = 3$ m and $G_p = 1.65$

Test conclusion:

RESPECTED STANDARD

8. RADIATED EMISSION OF TRANSMITTER (INTENTIONAL RADIATOR)

Standard: FCC Part 15

Test procedure: paragraph 15.205
 paragraph 15.209
 paragraph 15.247

Test equipment:

TYPE	BRAND	EMITECH NUMBER
Test receiver ESH3	Rohde & Schwarz	1058
Test receiver ESVS 10	Rohde & Schwarz	1219
Spectrum analyzer FSP 40	Rohde & Schwarz	4088
Loop antenna	EMCO	1406
Biconical antenna HP 11966C	Hewlett Packard	728
Log periodic antenna HL 223	Rohde & Schwarz	1999
Open site	Emitech	1274
Antenna RGA-60	Electrometrics	1204
Low-noise amplifier 2 to 18 GHz	Microwave DB	1922
High pass filter HP12/3200-5AA	Filtek	
Antenna WR42	IMC	1939
Low-noise amplifier 18 to 26 GHz	ALC	3036
Power source E3610A	Hewlett Packard	4195

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

Frequency range: from 9 kHz to harmonic 10 ($F_{\text{carrier}} \leq 10 \text{ GHz}$)

Bandwidth: 120 kHz ($F < 1 \text{ GHz}$) or 100 kHz, following 15.205 or 15.247
 1 MHz ($F > 1 \text{ GHz}$) or 100 kHz, following 15.205 or 15.247

Distance of antenna: between 30 m and 3 m according the frequencies and the limits.

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal, only the highest level is recorded.

Equipment under test operating condition:

The equipment under test is blocked in continuous transmission mode, modulated by internal data signal, at the highest output power level which the transmitter is intended to operate.

Results:

Ambient temperature (°C): 20
Relative humidity (%): 38

Power source: 5 Vd.c.

The polarity column refers to the antenna polarity at which the maximum emissions level is measured.

Not any spurious has been detected.

Any spurious which has more than 20 dB margin compared to the limit is not necessarily recorded.

Applicable limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The highest level recorded in a 100 kHz bandwidth is 96.49 dB μ V/m on channel 40. So the applicable limit is **76.49 dB μ V/m**.

In addition, radiated emissions which fall in the restricted band, as defined in section 15.205 (a), must also comply with the radiated emission limits specified in section 15.209 (a) (see section 15.205 (c)).

TEST CONCLUSION:

RESPECTED STANDARD

9. RADIATED INTERFERENCE (UNINTENTIONAL RADIATOR)

Standard: FCC Part 15

Test procedure: FCC Part 15 Sec.15.109

Limits: Class B

Test equipment:

TYPE	BRAND	EMITECH NUMBER
Test receiver ESV10	Rohde & Schwarz	1219
Biconical antenna HP11966C	Hewlett Packard	728
Log periodic antenna HL 223	Rohde & Schwarz	1999
Antenna RGA-60	Electrometrics	1204
Spectrum analyzer FSP40	Rohde & Schwarz	4088
Open area test site	EMITECH	1274
Low-noise amplifier 1 to 18 GHz	ALC	2648
High pass filter HPM11630	Micro-Tronics	1673
Low noise amplifier	Hewlett Packard	1181

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

Cables disposition of unit under test:

See photos of the test unit configuration in annex.

Frequency range: The highest frequency generated in the device being $F = 433.92$ MHz.
the frequency range is 30 MHz – 2 GHz.
(See FCC Part 15 Sec.15.33)

Detection mode: Quasi-peak for the range 30 MHz - 1 GHz
Average for $F > 1$ GHz

Bandwidth: 120 kHz for the range 30 MHz - 1 GHz
1 MHz for $F > 1$ GHz

Distance of antenna: 3 meters

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal

Equipment under test operating condition:

The equipment is blocked in continuous reception mode.

Results:

For the range 30 MHz - 1 GHz, the initial measurements are made in Peak detection mode with a spectrum analyser. Emissions with peak levels within 6 dB of the prescribed limits are re-measured using a Quasi-peak detector and noted in the following table.

For $F > 1$ GHz, the measurements are made only with peak detector with a spectrum analyser and noted in the following table.

The polarity column refers to the antenna polarity at which the maximum emissions level is measured.

FREQUENCIES (MHz)	Antenna height (cm)	Polarization H: Horizontal V: Vertical	Azimuth (degrees)	Field strength (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
157	230	H	38	22	43.5	21.5
173.1	190	H	51	26.6	43.5	16.9
177	200	H	49	25.7	43.5	17.8
234	100	H	234	26.8	46	19.2
281	120	H	79	21.6	46	24.4
312	100	H	112	35	46	11
416	100	H	240	24.3	46	21.7

Any spurious which has more than 20 dB of margin compared to the limit is not necessary recorded.

TEST CONCLUSION:

RESPECTED STANDARD

10. BAND EDGE COMPLIANCE

Standard: FCC Part 15.247

Test procedure: Public Notice DA 00-705, Delta Marker method

Test equipment used:

TYPE	MANUFACTURER	EMITECH NUMBER
Spectrum analyzer FSP 40	Rohde & Schwarz	4088
Antenna RGA-60	Electrometrics	1204
Power source E3610A	Hewlett Packard	4195

Measured condition:

Requirements: Emissions that fall in the restricted bands (part 15.205). These emissions must be less than or equal to 500 $\mu\text{V/m}$ (54 $\text{dB}\mu\text{V/m}$) Part 15.35b applies in the restricted bands.

Test procedure: An in band field strength measurement of the fundamental Emission using the RBw and detector function required by C63.4-2003 and FCC Rules.

Test operating condition of the equipment:

The equipment is blocked in frequency hopping mode.

Results:

Lower Band Edge: from 2310 MHz to 2390 MHz, CURVE n° 1

Upper Band Edge: from 2483.5 MHz to 2500 MHz, CURVE n° 2

Sample n°1:

Fundamental frequency (MHz)	Field Strength Level of fundamental ($\text{dB}\mu\text{V/m}$)	Detector (Peak or Average)	Frequency of maximum Band-edges Emission (MHz)	Delta Marker (dB)*	Calculated Max Out of Band Emission Level ($\text{dB}\mu\text{V/m}$ **)	Limit ($\text{dB}\mu\text{V/m}$)	Margin (dB)
2402	96.01	Peak	2338.9	-54.8	41.21 ⁽¹⁾	73.98	32.77
2480	96.55	Peak	2484.8	-55.8	40.75 ⁽¹⁾	73.98	33.23

* according to step 2 of Marker-Delta Method DA 00-705.

** according to step 3 of Marker-Delta Method:


Calculated Emission Level = Field Strength Level – Delta Marker Level

⁽¹⁾ the peak level is lower than the average limit (53.98 $\text{dB}\mu\text{V/m}$).


Test conclusion:

RESPECTED PUBLIC NOTICE

CURVE N°: 1.

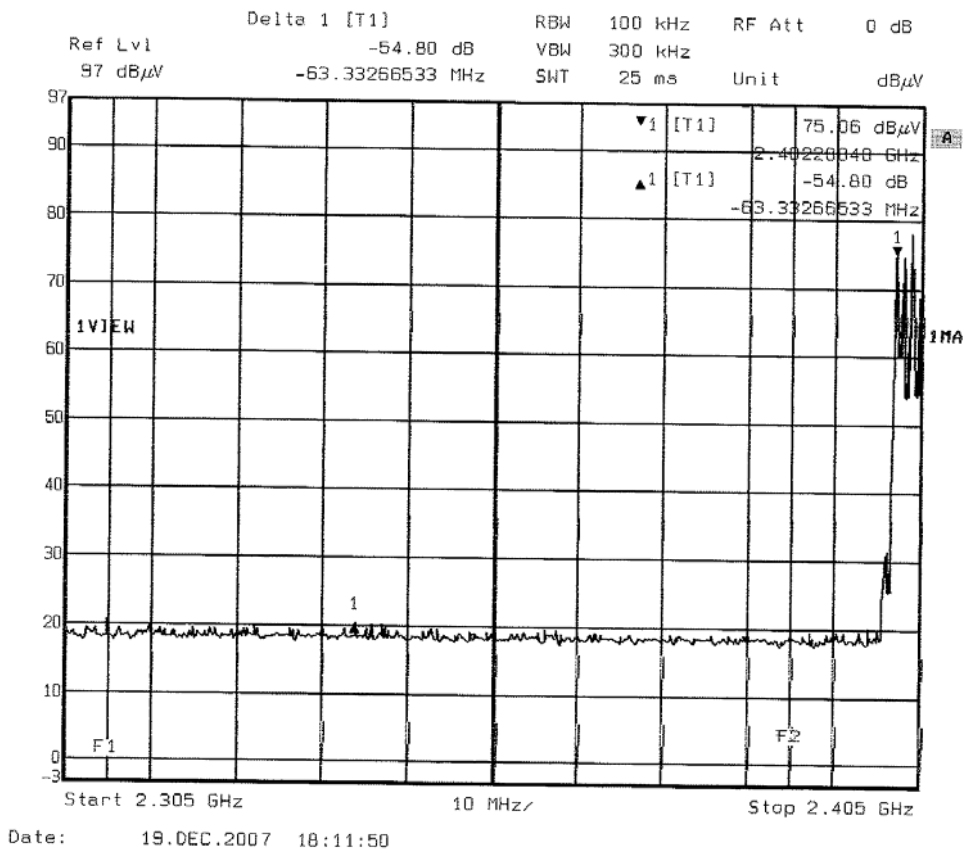

CURVE N°: 2.

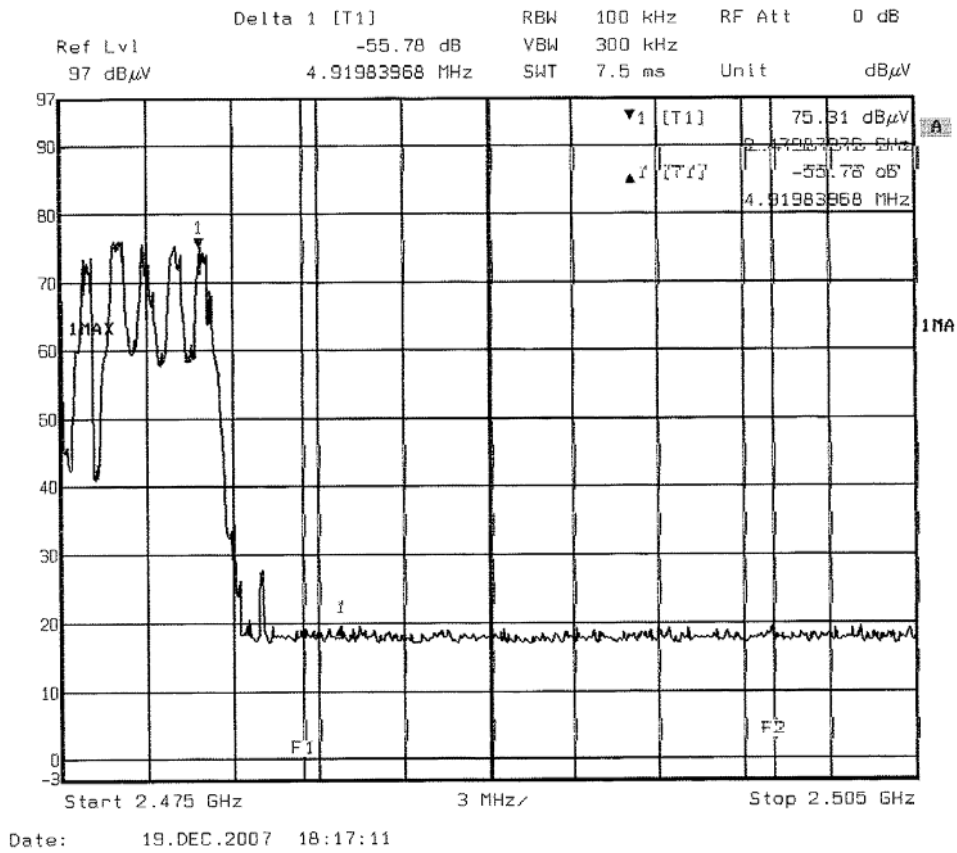



EM


EM


□□□ End of report, 5 annexes to be forwarded □□□

ANNEX 1: OCCUPIED POWER BANDWIDTH AND CHANNEL SEPARATION

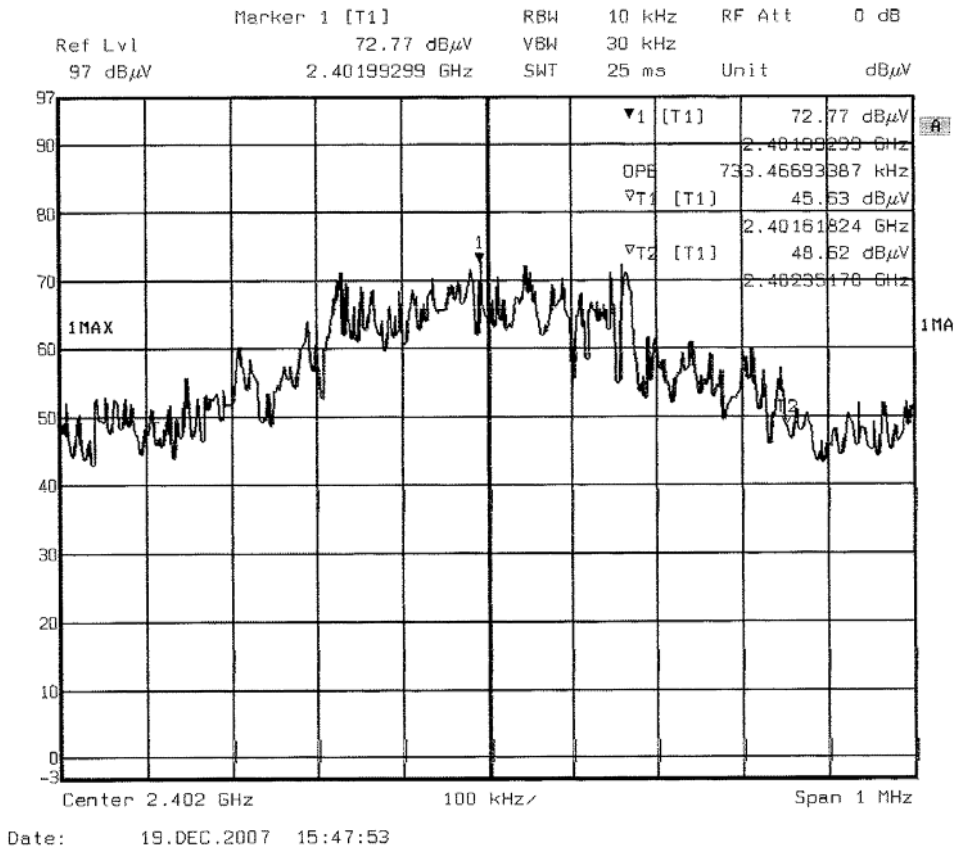


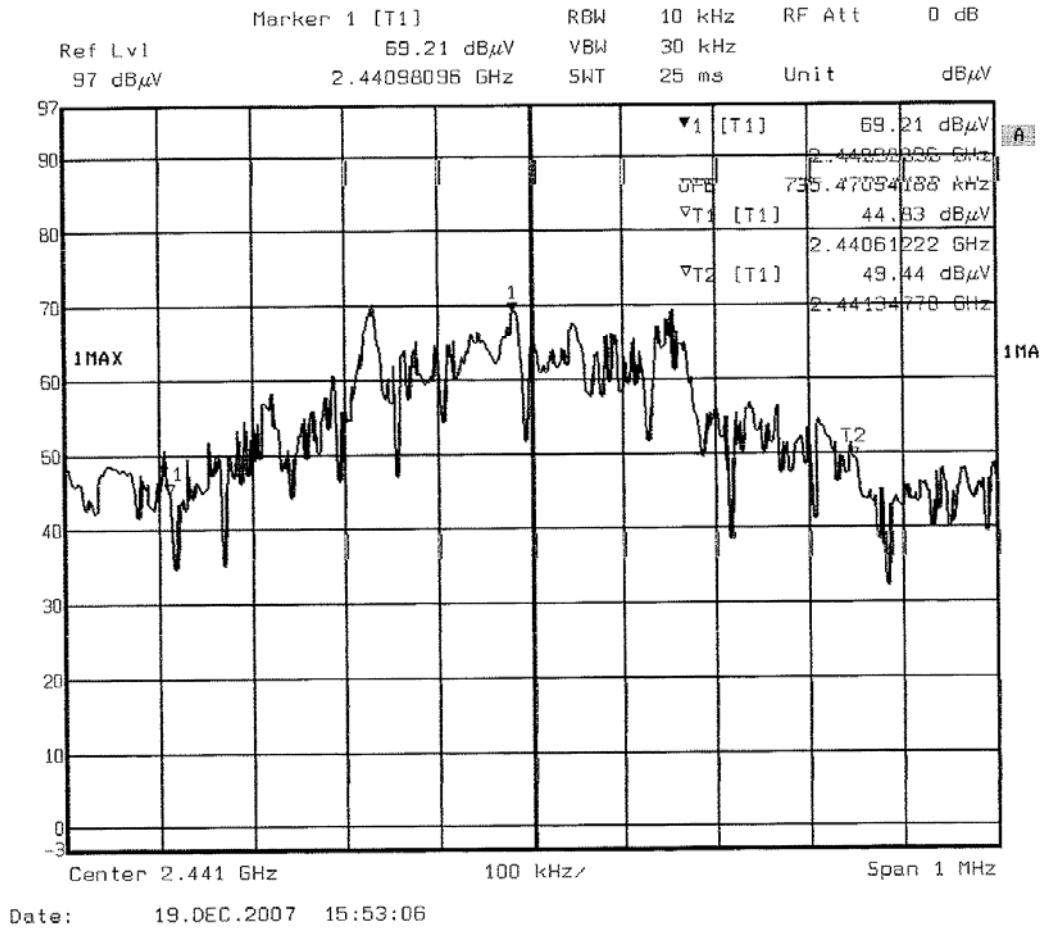


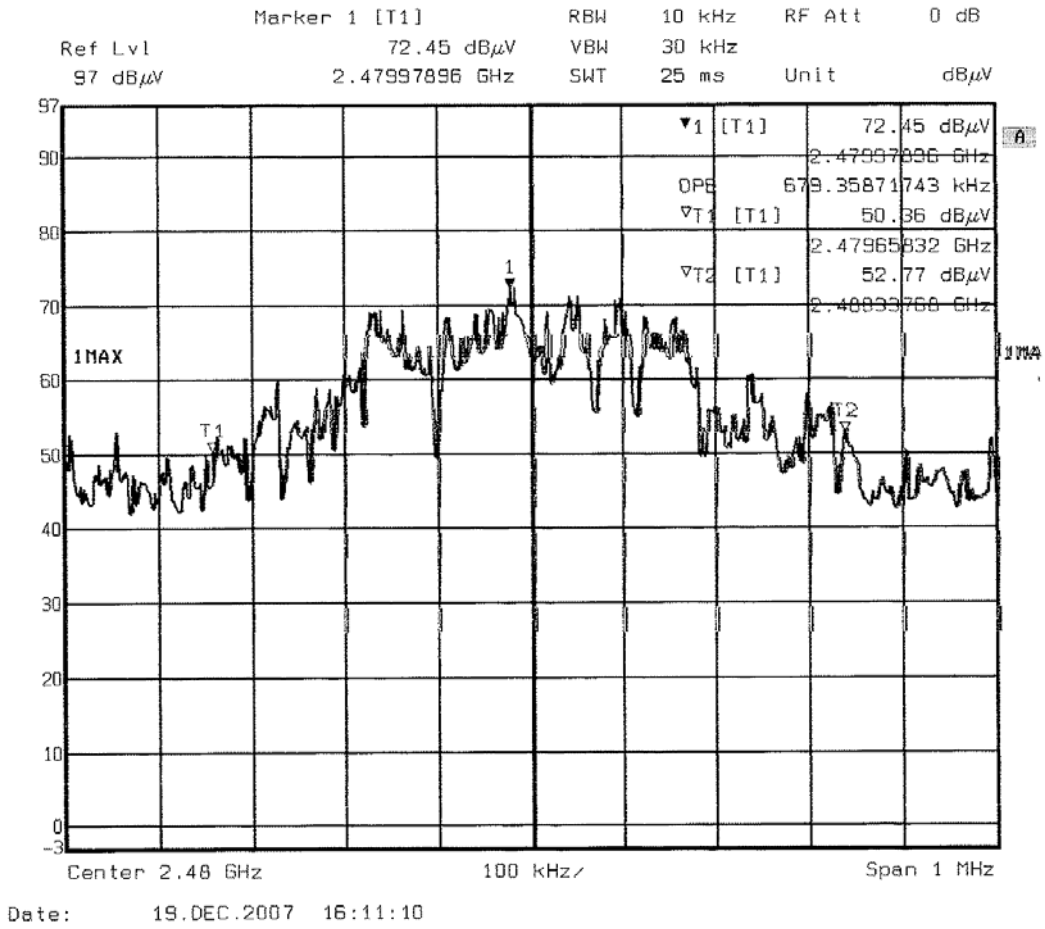

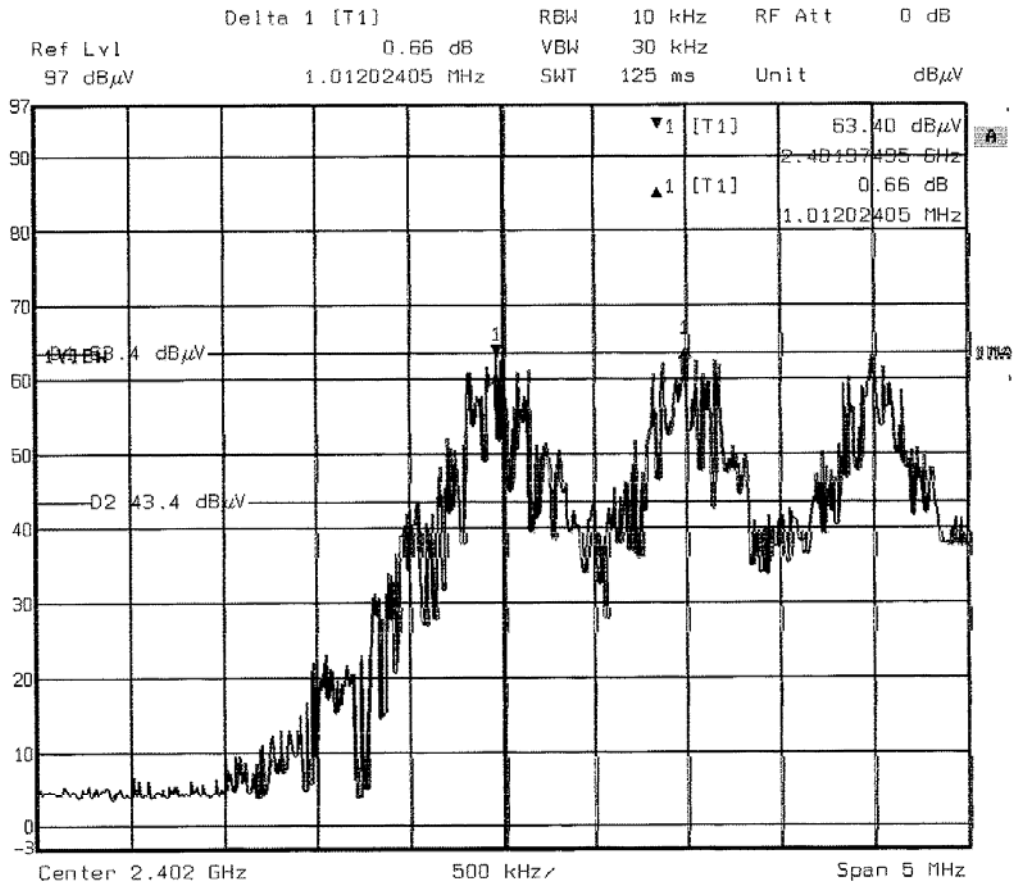


Date: 19.DEC.2007 17:20:31

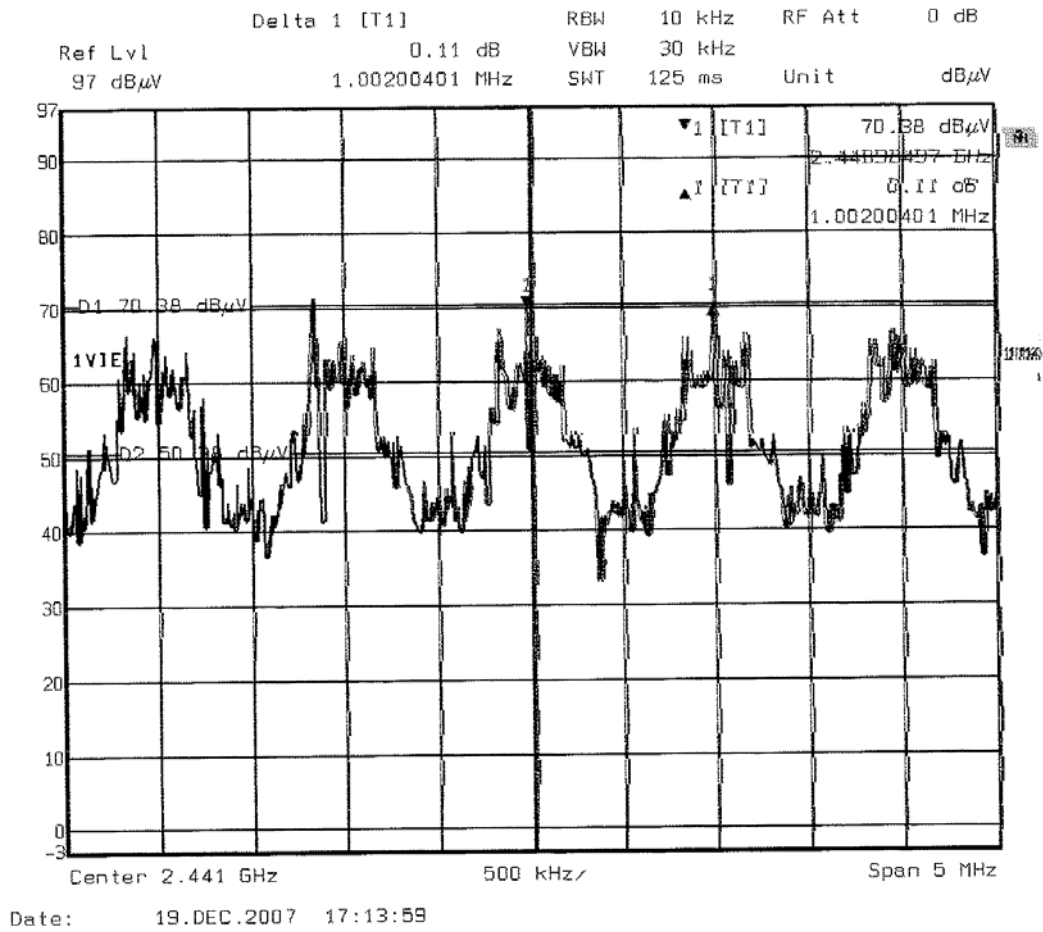

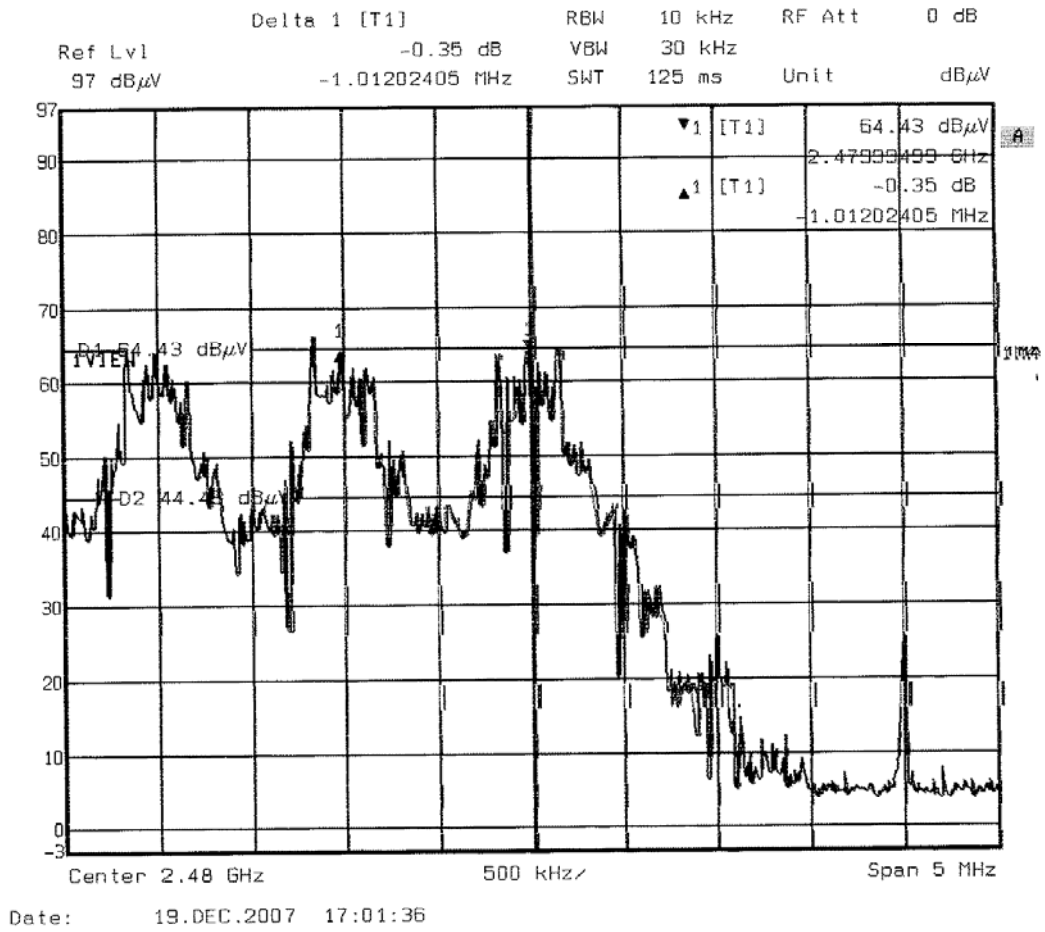



ANNEX 2: AVERAGE TIME OF OCCUPANCY ON ANY FREQUENCY

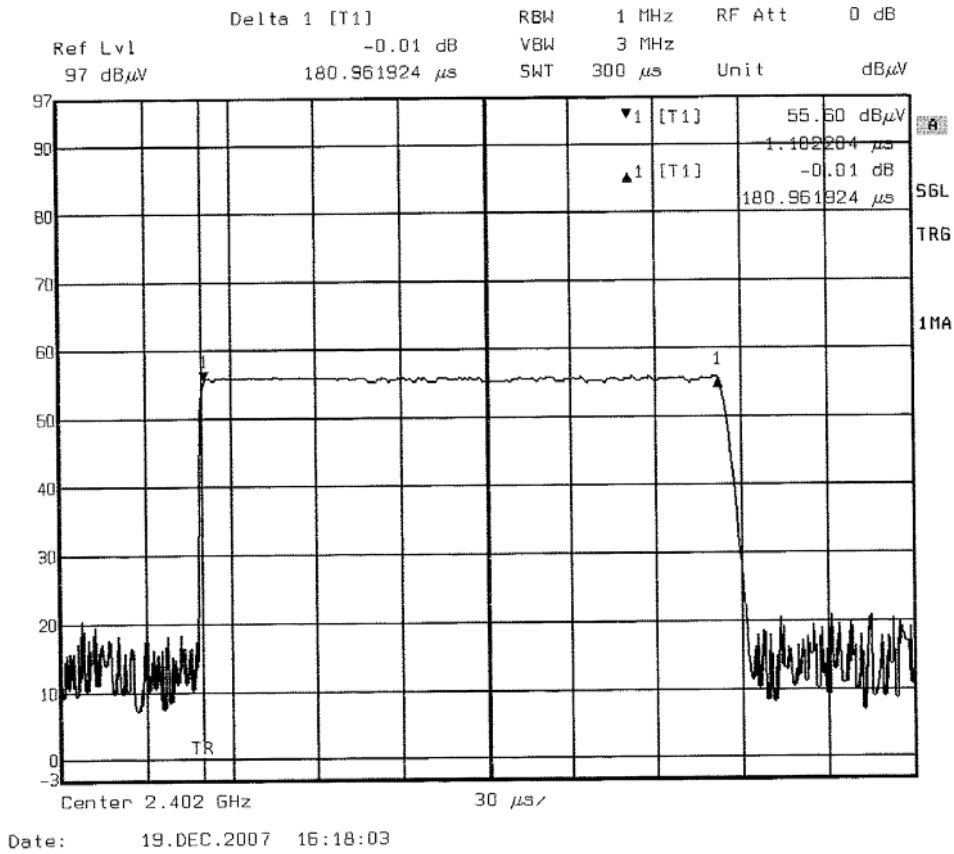



EM


EM

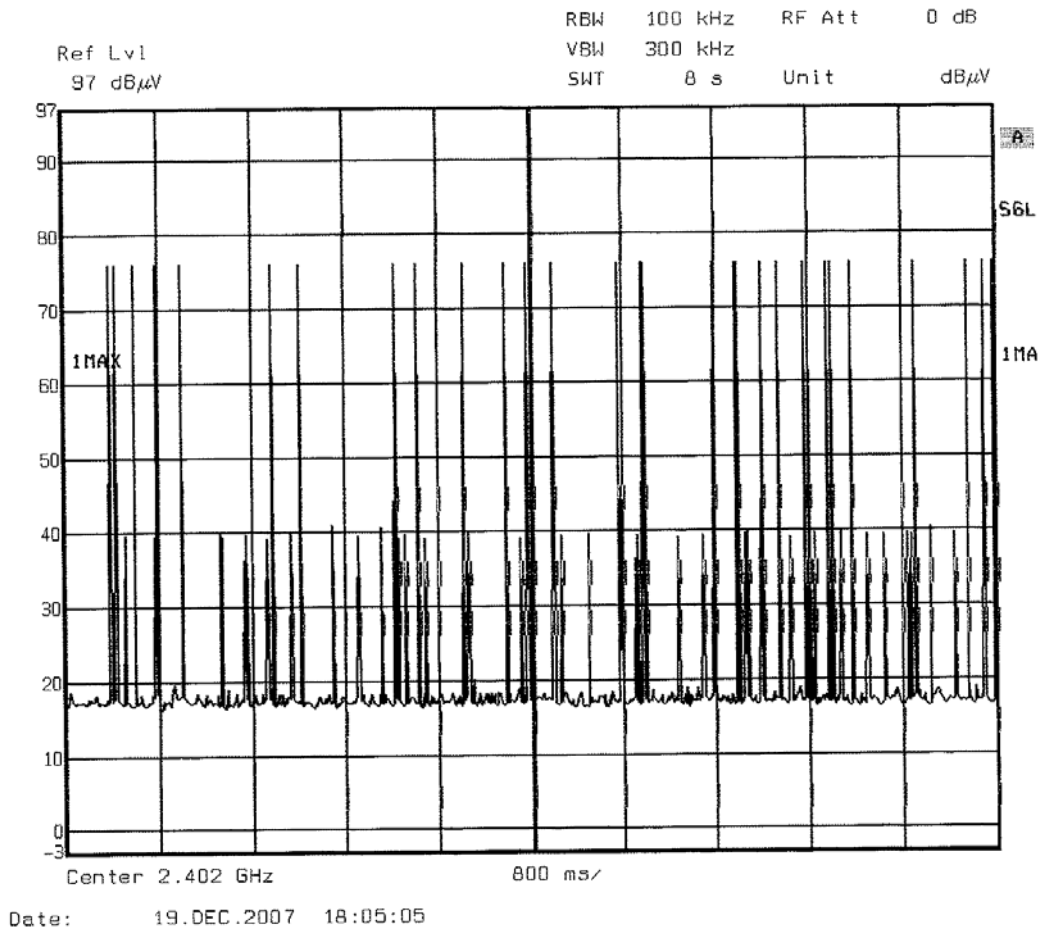

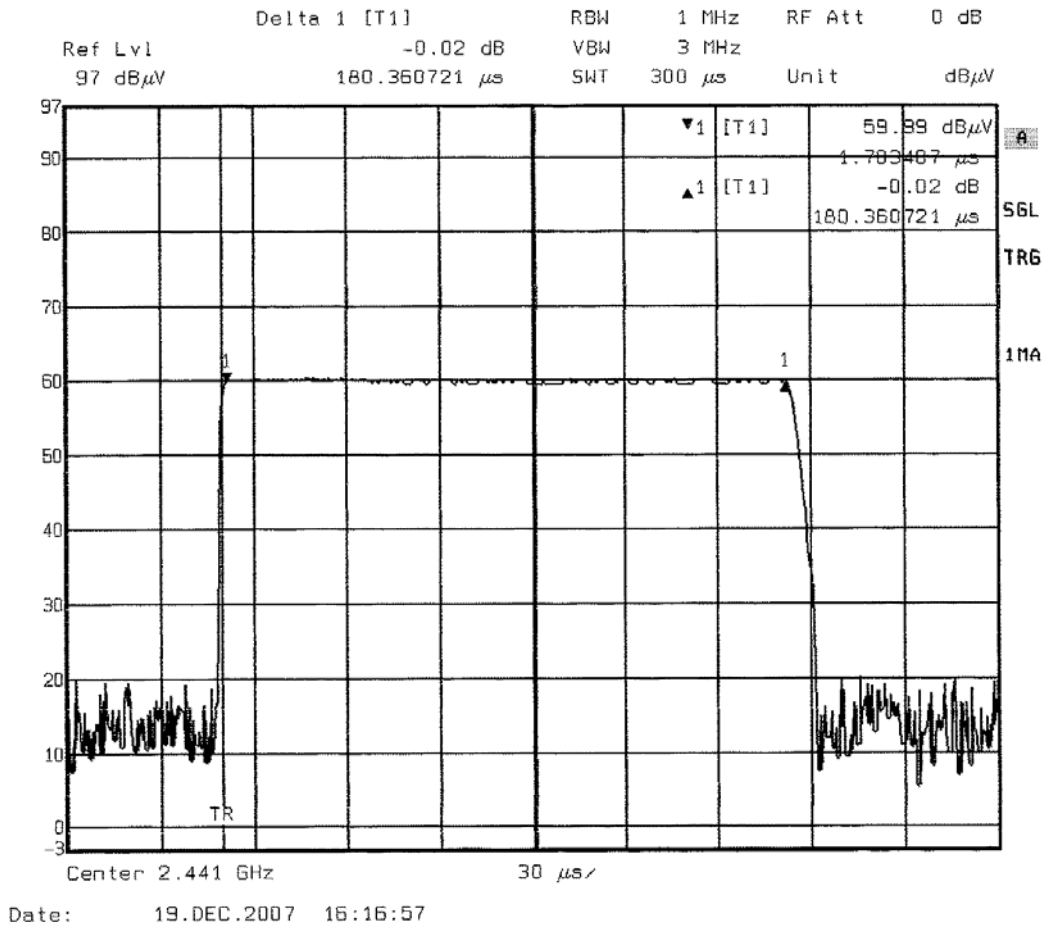


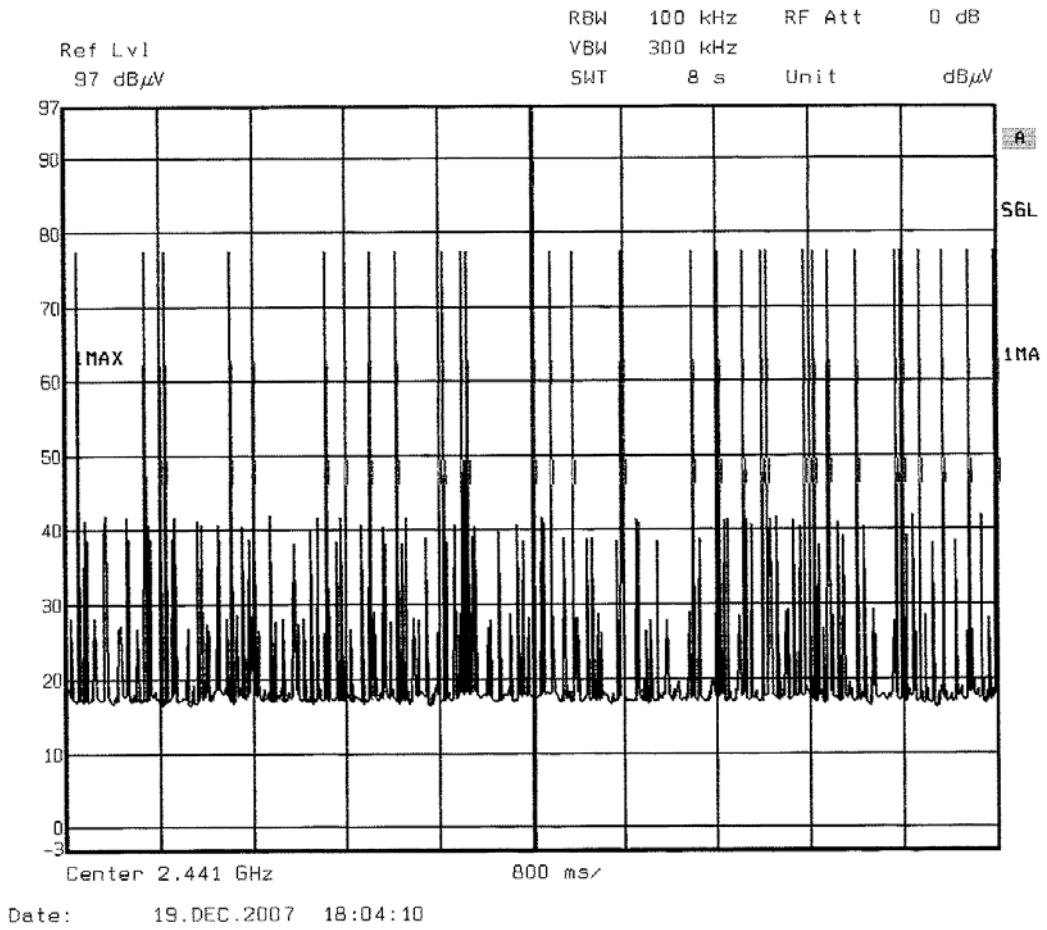

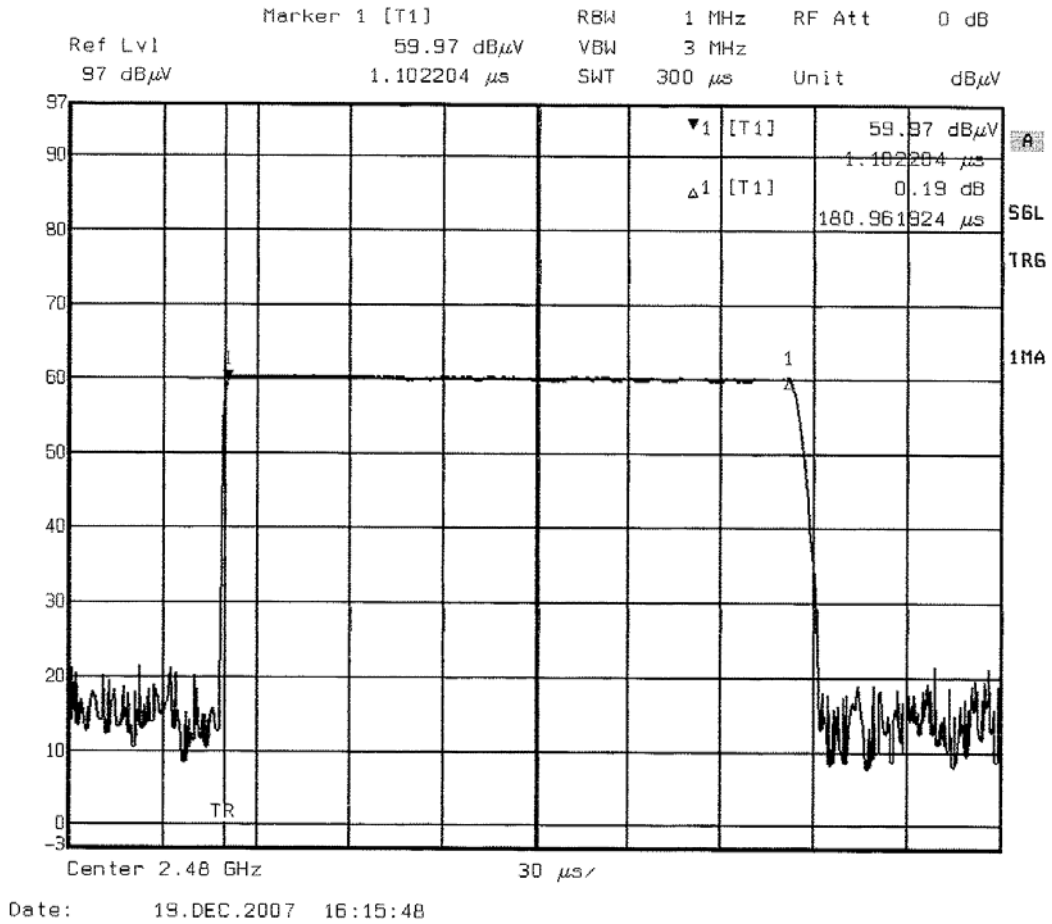

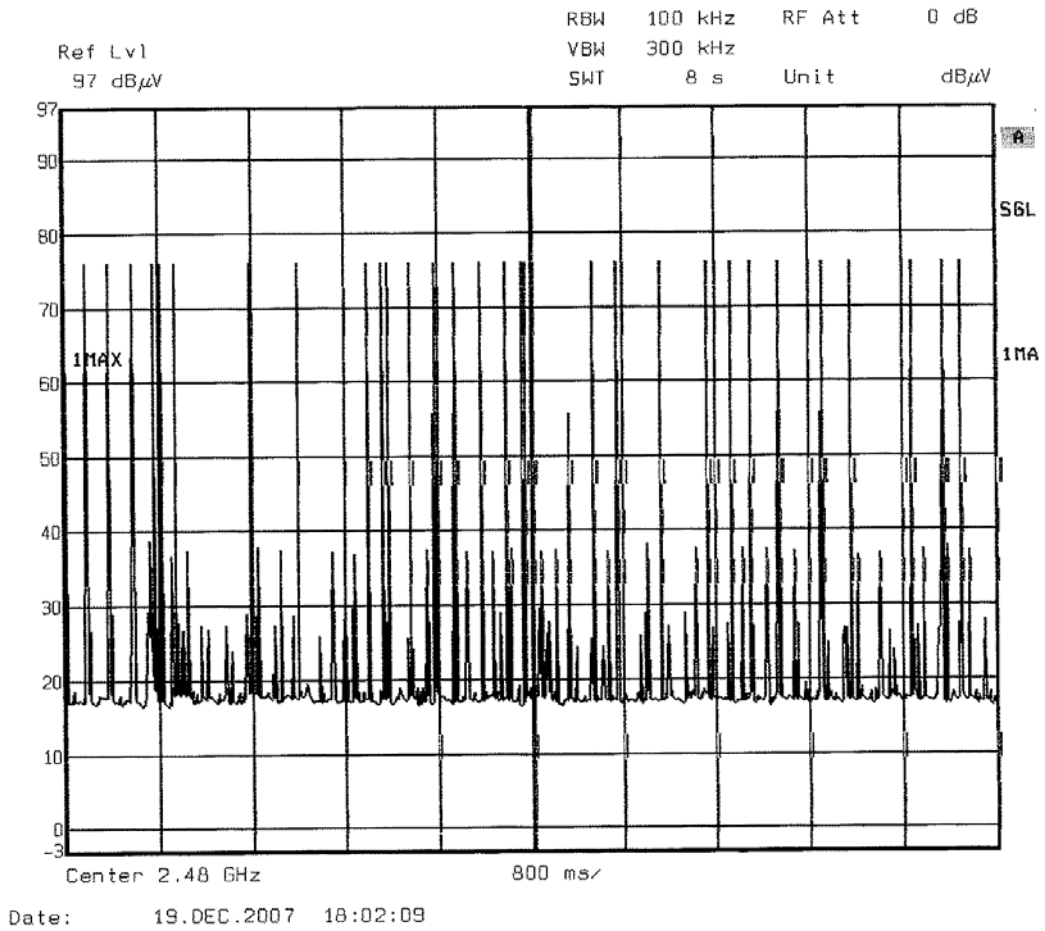



ANNEX 3: NUMBER OF HOPPING FREQUENCIES

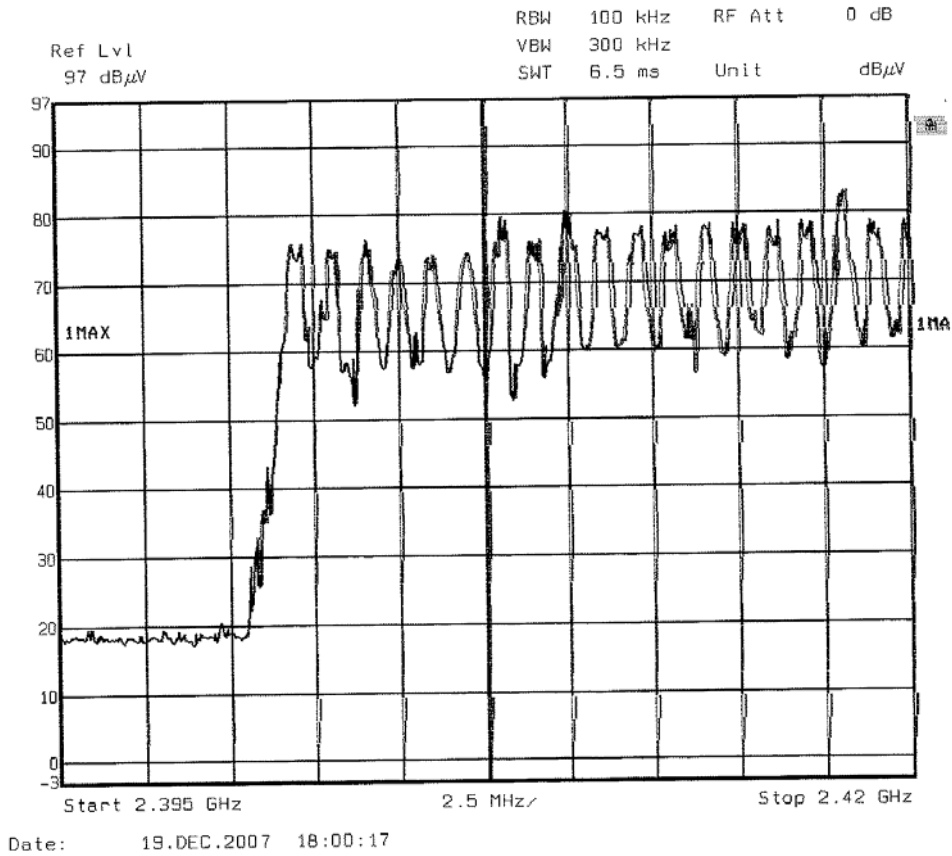


EM

EM

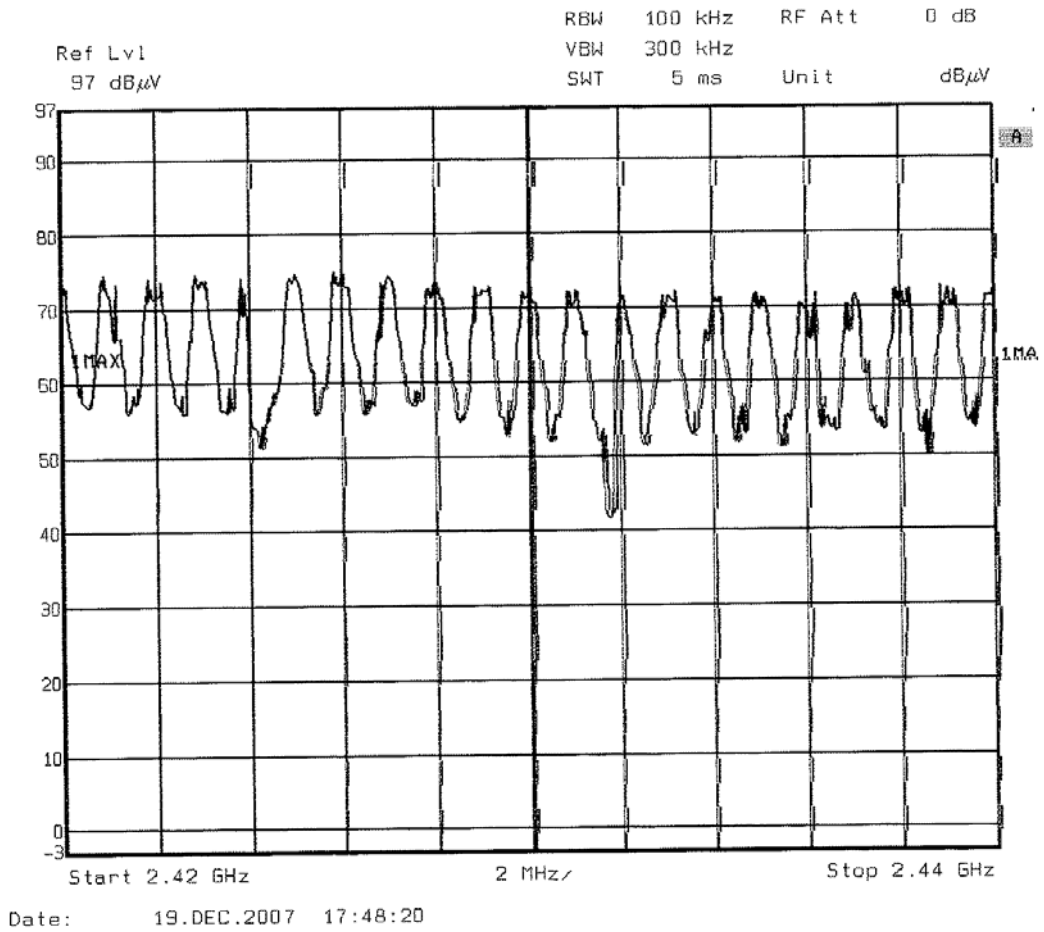

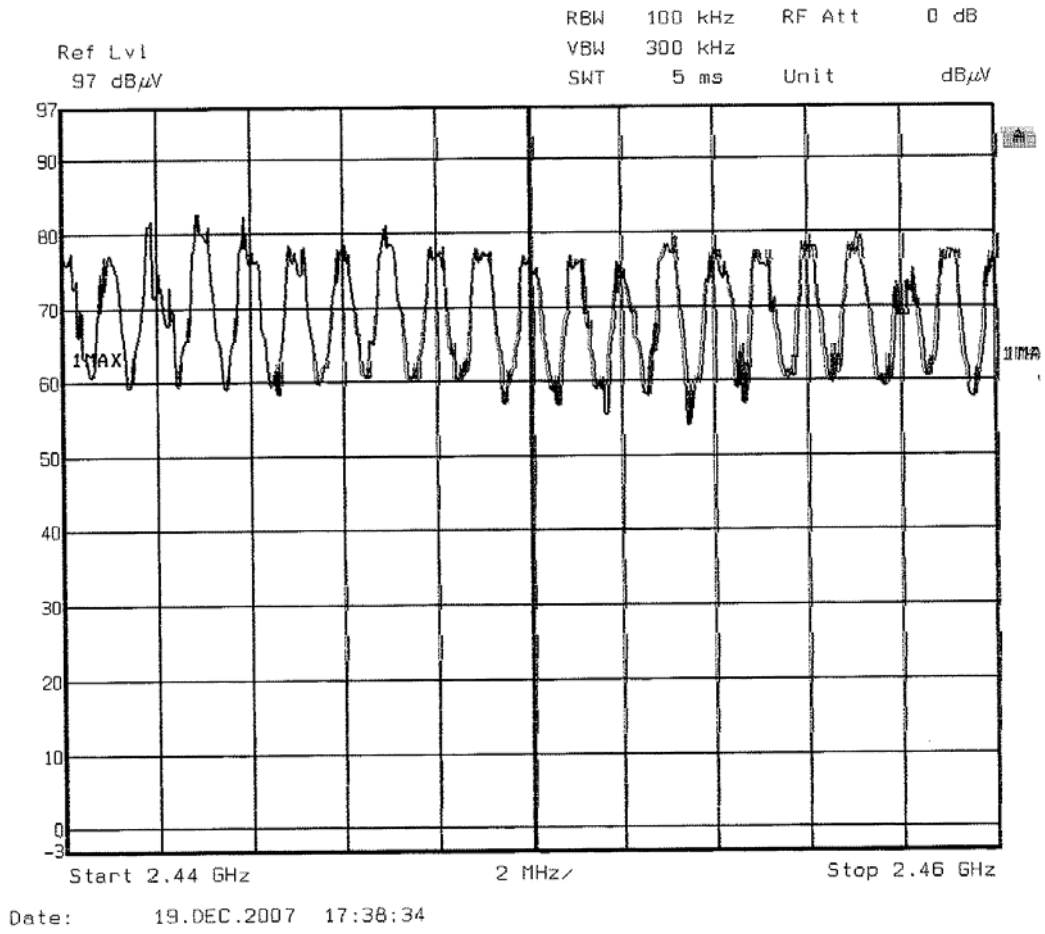

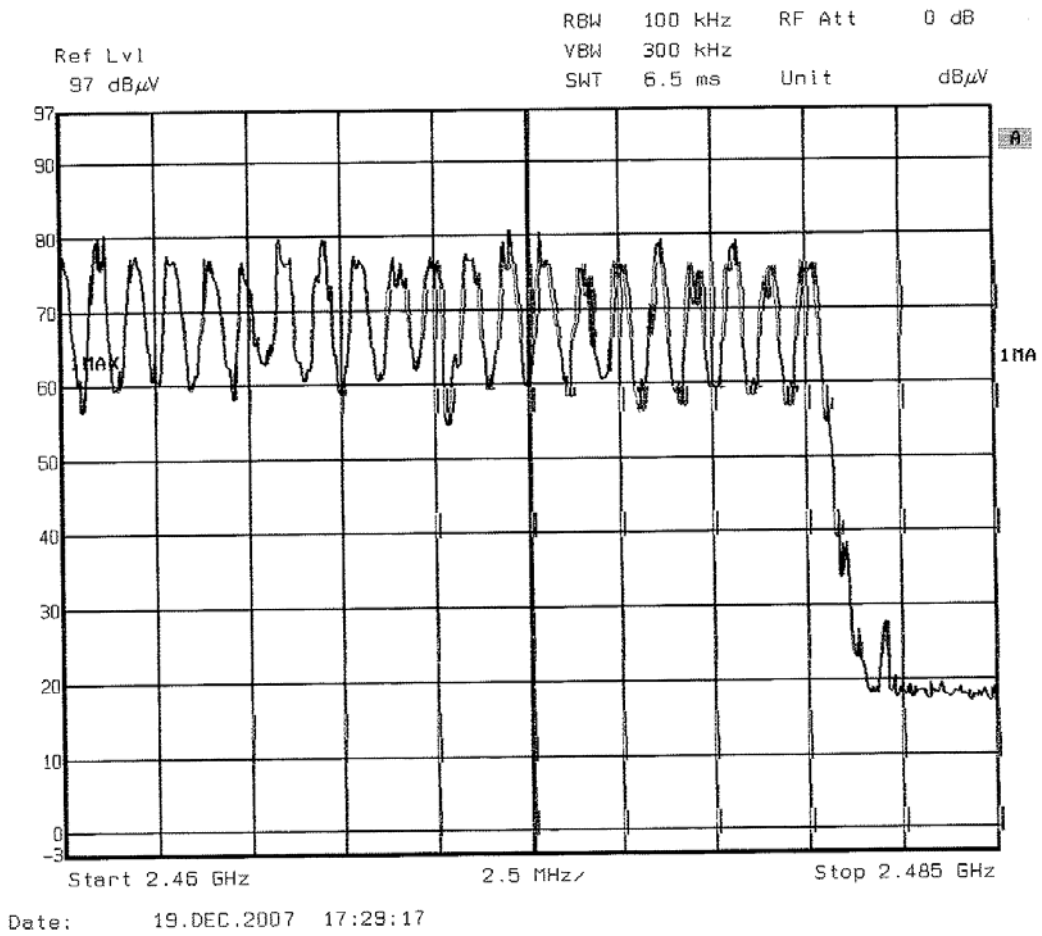

ANNEX 4: PHOTOS OF THE EQUIPMENT UNDER TEST

GENERAL VIEW



Internal view:



EMITECH


EMITECH

EMITECH


EMITECH

EMITECH



Printed circuit board: face 1

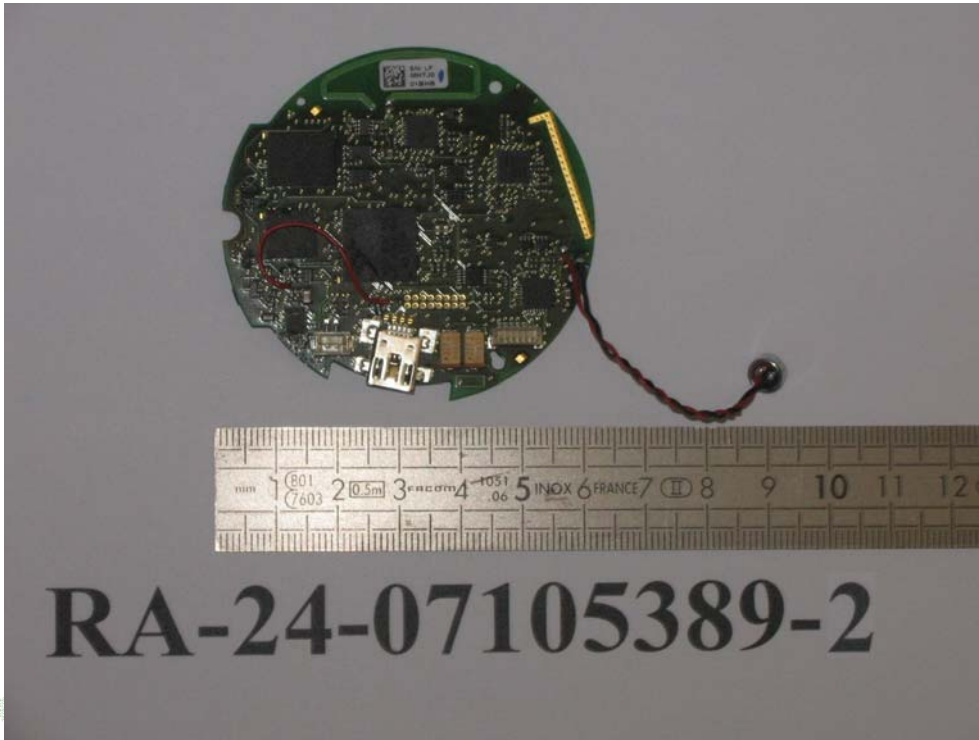

Printed circuit board: face 2

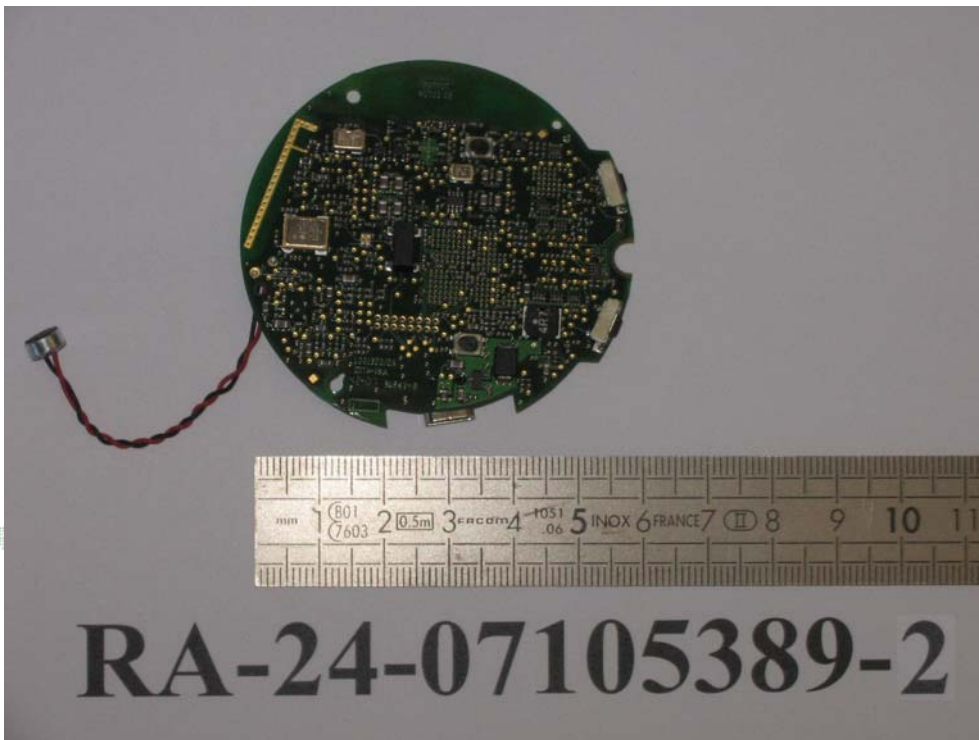

Antenna

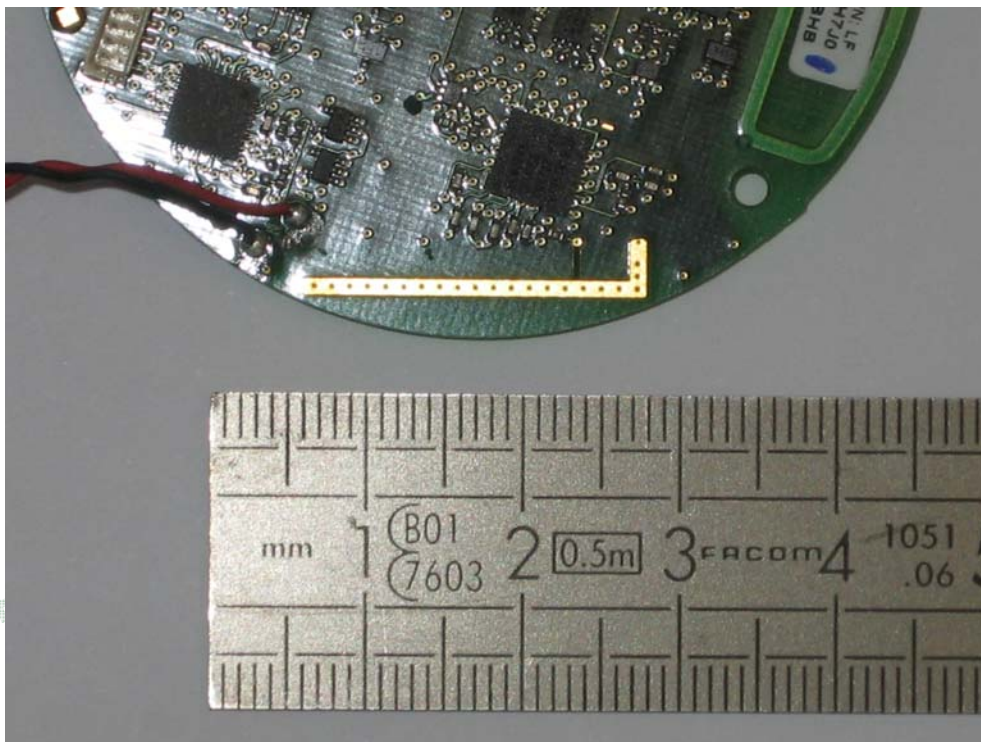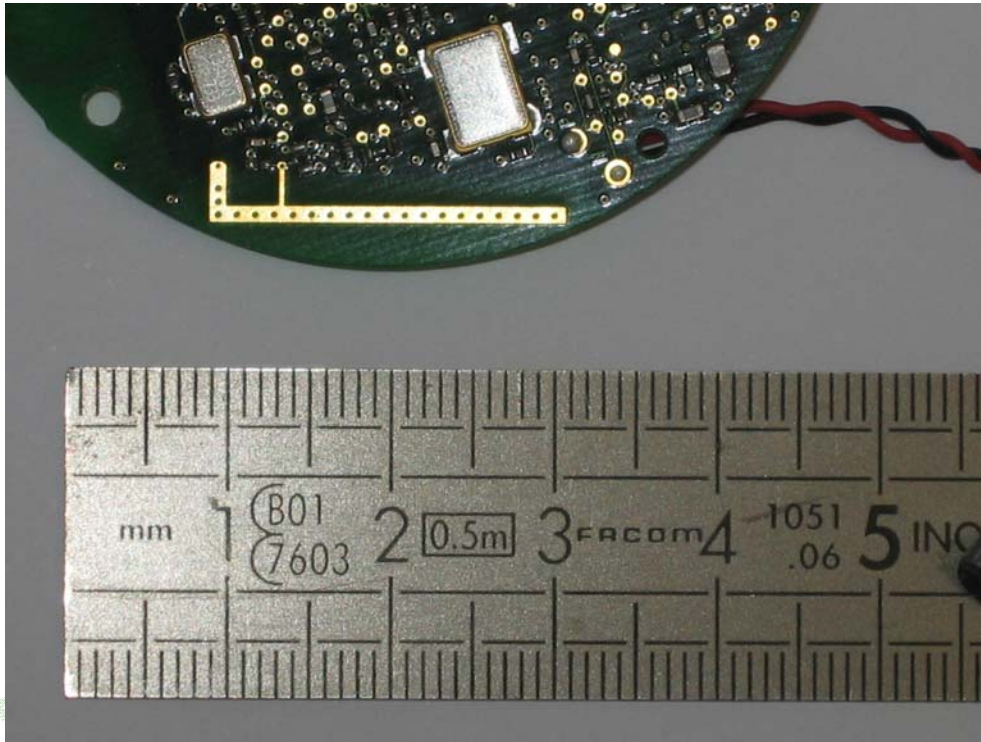

ANNEX 5: TEST SET UP AND OPEN AREA TEST SITE

TEST SET UP RADIATED MEASUREMENT



OPEN AREA TEST SITE



EMITECH

CH

EMITECH

EMITECH

EMITECH

EMITECH