

Inter**Lab**[®]

FCC Measurement/Technical Report on

WLAN transceiver

in

BEBOP DRONE

FCC ID: RKXMYKONOS3

IC: 5119A-MYKONOS3

Report Reference: MDE_PARRO_1430_FCCa_rev1

Test Laboratory:

7Layers AG
Borsigstrasse 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Peter Mertel
Vorstand • Board:
Dr. H.-J. Meckelburg
Dr. H. Ansorge

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385

Table of Contents

0	Applied Standards and Test Summary	3
0.1	Technical Report Summary	3
0.2	FCC and IC Correlation Table	4
	Measurement Summary	5
0.3	Revision History	7
1	Administrative Data	8
1.1	Testing Laboratory	8
1.2	Project Data	8
1.3	Applicant Data	8
1.4	Manufacturer Data	8
2	Test object Data	9
2.1	General EUT Description	9
2.2	EUT Main components	10
2.3	Ancillary Equipment	10
2.4	Auxiliary Equipment	10
2.5	EUT Setups	11
2.6	Operating Modes	11
2.7	Special software used for testing	11
2.8	Product labelling	12
3	Test Results	13
3.1	Occupied bandwidth	13
3.2	Peak power output	18
3.3	Spurious RF conducted emissions	21
3.4	Spurious radiated emissions	24
3.5	Band edge compliance	30
3.6	Power density	36
4	Test Equipment	39
5	Photo Report	50
6	Setup Drawings	50

0 Applied Standards and Test Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-13 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, 558074 D01 DTS Meas Guidance v03r02, 2014-06-05".

Instead of applying ANSI C63.4–1992 which is referenced in the FCC Public Note, the newer ANSI C63.4–2009 is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0 Measurement Summary.

0.2 FCC and IC Correlation Table

Correlation of measurement requirements for DTS devices (e.g. WLAN 2.4/5 GHz) equipment

The following tables show the correlation of measurement requirements for DTS (e.g. WLAN) equipment and Information Technology Equipment (ITE) from FCC and IC standards.

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 3: 7.2.4
Occupied bandwidth	§ 15.247 (a) (2)	RSS-210 Issue 8: A8.2 (a)
Peak power output	§ 15.247 (b) (3), (4)	RSS-210 Issue 8: A8.4 (4)
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210 Issue 8: A8.5
Power density	§ 15.247 (e)	RSS-210 Issue 8: A8.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 3: 7.1.2
Receiver spurious emissions	-	RSS-210 Issue 8: 2.3 RSS Gen Issue 3: 6 *)

*) Receivers which are part of Transceivers are exempted with respect to Notice 2012-DRS0126.

Measurement Summary

FCC Part 15, Subpart C

§ 15.207

Conducted emissions (AC power line)

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result
-	-	AC port	N/A

FCC Part 15, Subpart C

§ 15.247 (a) (1)

Occupied bandwidth

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_02	Temp.ant.connector	Passed
op-mode 1g	Setup_02	Temp.ant.connector	Passed
op-mode 1n	Setup_02	Temp.ant.connector	Passed
op-mode 2b	Setup_02	Temp.ant.connector	Passed
op-mode 2g	Setup_02	Temp.ant.connector	Passed
op-mode 2n	Setup_02	Temp.ant.connector	Passed
op-mode 3b	Setup_02	Temp.ant.connector	Passed
op-mode 3g	Setup_02	Temp.ant.connector	Passed
op-mode 3n	Setup_02	Temp.ant.connector	Passed

FCC Part 15, Subpart C

§ 15.247 (b) (1)

Peak power output

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_02	Temp.ant.connector	Passed
op-mode 2b	Setup_02	Temp.ant.connector	Passed
op-mode 3b	Setup_02	Temp.ant.connector	Passed
op-mode 1g	Setup_02	Temp.ant.connector	Passed
op-mode 2g	Setup_02	Temp.ant.connector	Passed
op-mode 3g	Setup_02	Temp.ant.connector	Passed
op-mode 1n+	Setup_02	Temp.ant.connector	Passed
op-mode 2n+	Setup_02	Temp.ant.connector	Passed
op-mode 3n+	Setup_02	Temp.ant.connector	Passed

FCC Part 15, Subpart C

§ 15.247 (d), § 15.35 (b), § 15.207

Spurious conducted emissions

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_02	Temp.ant.connector	Passed
op-mode 1g	Setup_02	Temp.ant.connector	Passed
op-mode 1n	Setup_02	Temp.ant.connector	Passed
op-mode 2b	Setup_02	Temp.ant.connector	Passed
op-mode 2g	Setup_02	Temp.ant.connector	Passed
op-mode 2n	Setup_02	Temp.ant.connector	Passed
op-mode 3b	Setup_02	Temp.ant.connector	Passed
op-mode 3g	Setup_02	Temp.ant.connector	Passed
op-mode 3n	Setup_02	Temp.ant.connector	Passed

FCC Part 15, Subpart C **§ 15.247 (d), § 15.35 (b), § 15.209**

Spurious radiated emissions

The measurement was performed according to ANSI C63.4

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	Enclosure	Passed
op-mode 2b	Setup_01	Enclosure	Passed
op-mode 3b	Setup_01	Enclosure	Passed
op-mode 1g	Setup_01	Enclosure	Passed
op-mode 2g	Setup_01	Enclosure	Passed
op-mode 3g	Setup_01	Enclosure	Passed
op-mode 1n+	Setup_01	Enclosure	Passed
op-mode 2n+	Setup_01	Enclosure	Passed
op-mode 3n+	Setup_01	Enclosure	Passed

FCC Part 15, Subpart C **§ 15.247 (d)**

Band edge compliance

The measurement was performed according to FCC § 15.31 / ANSI C63.4

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_02	Temp.ant.connector	Passed
op-mode 1g	Setup_02	Temp.ant.connector	Passed
op-mode 1n	Setup_02	Temp.ant.connector	Passed
op-mode 3b	Setup_02	Temp.ant.connector	Passed
op-mode 3g	Setup_02	Temp.ant.connector	Passed
op-mode 3n	Setup_02	Temp.ant.connector	Passed
op-mode 3b	Setup_01	Enclosure	Passed
op-mode 3g	Setup_01	Enclosure	Passed
op-mode 3n+	Setup_01	Enclosure	Passed

FCC Part 15, Subpart C **§ 15.247 (e)**

Power density

The measurement was performed according to FCC § 15.31

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_02	Temp.ant.connector	Passed
op-mode 2b	Setup_02	Temp.ant.connector	Passed
op-mode 3b	Setup_02	Temp.ant.connector	Passed
op-mode 1g	Setup_02	Temp.ant.connector	Passed
op-mode 2g	Setup_02	Temp.ant.connector	Passed
op-mode 3g	Setup_02	Temp.ant.connector	Passed
op-mode 1n+	Setup_02	Temp.ant.connector	Passed
op-mode 2n+	Setup_02	Temp.ant.connector	Passed
op-mode 3n+	Setup_02	Temp.ant.connector	Passed

N/A not applicable (the EUT is powered by DC, transmitter is automatically switched off when connected to USB)

Note: Pre-Tests showed that the output power for mode n and n+ is approx. identical. Therefore tests have been reported either in one of both modes, as worst-case in respect to each test case.

Responsible for Accreditation Scope: _____ Responsible for Test Report: _____

0.3 Revision History

Report version control			
Version	Release date	Change Description	Version validity
initial	2014-10-05	--	invalid
rev1	2014-11-07	Added WLAN mode b in description and results	valid

1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:
Laboratory accreditation no.: DAkKS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell
Dipl.-Ing. Andreas Petz
Dipl.-Ing. Marco Kullik

Report Template Version: 2014-07-23

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Daniel Gall
Date of Test(s): 2014-08-04 to 2014-11-04
Date of Report: 2014-11-07

1.3 Applicant Data

Company Name: Parrot S.A
Address: 174 quai de jemmaes
75010 Paris
France
Contact Person: Mr. Imad Benyacoub

1.4 Manufacturer Data

Company Name: Please see applicant data
Address:
Contact Person:

2 Test object Data

2.1 General EUT Description

Equipment under Test:	IEEE 802.11 g/n WLAN transceiver
Type Designation:	Parrot BEBOP DRONE
Kind of Device:	Quadricopter wifi controlled by smartphones
(optional)	
Voltage Type:	AC (primary voltage of charger) / DC (secondary voltage and Li-Po rechargeable battery voltage)
Voltage Level:	AC: 120 V (auxiliary); DC 5.0 / 3.7 V
Tested Modulation Type:	OFDM:BPSK; OFDM:64-QAM

General product description:

The EUT is a RC toy (quadcopter drone) that includes a video camera and a WLAN access point as well as four electric motors and a speaker. It can fly and is remotely controlled by the user via a Wi-Fi link, by the ways of a smartphone or a tablet.

Specific product description for the EUT:

The EUT is a dual band WLAN (802.11 2.4 GHz b/g/n and 5 GHz a/n) access point. In IEEE 802.11n mode it supports 20 MHz bandwidth channels (both with MCS15), providing 72.2 Mbit/s, and 150 Mbit/s transfer data rates respectively. The object of this test report is the WLAN transceiver.

The EUT provides the following ports:

Ports

Enclosure
USB/DC port

The main components of the EUT are listed and described in Chapter 2.2

2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
EUT A (Code: DE1018005aa01)	WLAN transceiver	Parrot BEBOP DRONE	PI040306D14 E000127	HW07	1.3.0
Remark: EUT A is equipped with a temporary antenna connector and a temporary power supply cable.					
EUT B (Code: DE1018005ab01)	WLAN transceiver	Parrot BEBOP DRONE	PI040306D14 E000137	HW07	1.3.0
Remark: EUT B is equipped with two dual-band integral antennae with different antenna gain: Antenna1: -1.04 dBi in 2.4 GHz and 0.8 dBi (SB1) / 2.12 dBi (SB3) in 5 GHz band, Antenna2: -1.29 dBi in 2.4 GHz and 0.5 dBi (SB1) / 1.43 dBi (SB3) in 5 GHz band.					

NOTE: The short description used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment, which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
ANC1	USB cable	-	-	-	-

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment, which is used temporarily to enable operational and control features especially used for the tests of the EUT, which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status
LiPo battery	Lithium-ion polymer rechargeable battery	PI020572	-	-	-
Cable adapter usb / RJ45	-	-	-	-	-

2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
Setup_01	EUT B + ANC1	setup for radiated measurements
Setup_02	EUT A	setup for conducted radio measurements

2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

2.6.1 Test Channels

2.4 GHz ISM band (2400 - 2483.5 MHz)	Bottom	Middle	Top
Channel No.	1	6	11
Frequency / MHz	2412	2437	2462

COMMENT: Subband 3 not tested according to §15c247!

2.6.2 Datarates

WLAN b-Mode; 20 MHz; 1 Mbit/s
WLAN g-Mode; 20 MHz; 6 Mbit/s
WLAN n-Mode; 20 MHz; 72.2 Mbit/s
MIMO:
WLAN n-Mode; 20 MHz; 150 Mbit/s

2.6.3 Abbreviations of operating modes used for tests

Data rate / frequency	2412	2437	2462
b-mode, 1 Mbit/s	1b	2b	3b
g-mode, 6 Mbit/s	1g	2g	3g
n-Mode, 72.2 Mbit/s (MCS7)	1n	2n	3n
n-Mode, 150 Mbit/s (MCS15)	1n+	2n+	3n+

2.7 Special software used for testing

In the engineering mode provided for the tests, the EUT can be controlled by an external computer where a terminal program runs. Using the terminal emulation, remote control of the EUT is possible when running script files that i.e. will command the EUT to transmit at the desired data rate, antenna port, RF power level and duty cycle. Nominal power is set to a value of: mode b/g: +15 dBm, mode n: +14 dBm.

2.8 Product labelling

2.8.1 FCC ID label

Please refer to the documentation of the applicant.

2.8.2 Location of the label on the EUT

Please refer to the documentation of the applicant.

3 Test Results

3.1 Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.1.1 Test Description

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss. Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 MHz
- Detector: Peak / Sample (6 dB bandwidth / 99% bandwidth)

3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

3.1.3 Test Protocol

Temperature: 23 °C
 Air Pressure: 1010 hPa
 Humidity: 45 %

3.1.3.1 6 dB bandwidth

WLAN b-Mode; 20 MHz; 1 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	9.084	0.5	8.6
	6	2437	8.604	0.5	8.1
	11	2462	8.604	0.5	8.1

WLAN g-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	16.416	0.5	15.9
	6	2437	16.416	0.5	15.9
	11	2462	16.416	0.5	15.9

WLAN n-Mode; 20 MHz; 72.2 Mbit/s					
Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	17.736	0.5	17.3
	6	2437	17.796	0.5	17.3
	11	2462	17.796	0.5	17.2

3.1.3.2 99% bandwidth


WLAN b-Mode; 20 MHz; 1 Mbit/s					
Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]	Limit [MHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	11.693	0.5	11.2
	6	2437	11.635	0.5	11.1
	11	2462	11.635	0.5	11.1

WLAN g-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]	Limit [MHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	17.535	0.5	17.0
	6	2437	17.635	0.5	17.1
	11	2462	17.635	0.5	17.1

WLAN n-Mode; 20 MHz; 72.2 Mbit/s					
Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]	Limit [MHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	18.036	0.5	17.5
	6	2437	18.236	0.5	17.7
	11	2462	18.236	0.5	17.7

3.1.4 Measurement Plot (showing the highest value, "worst case")

6 dB Bandwidth

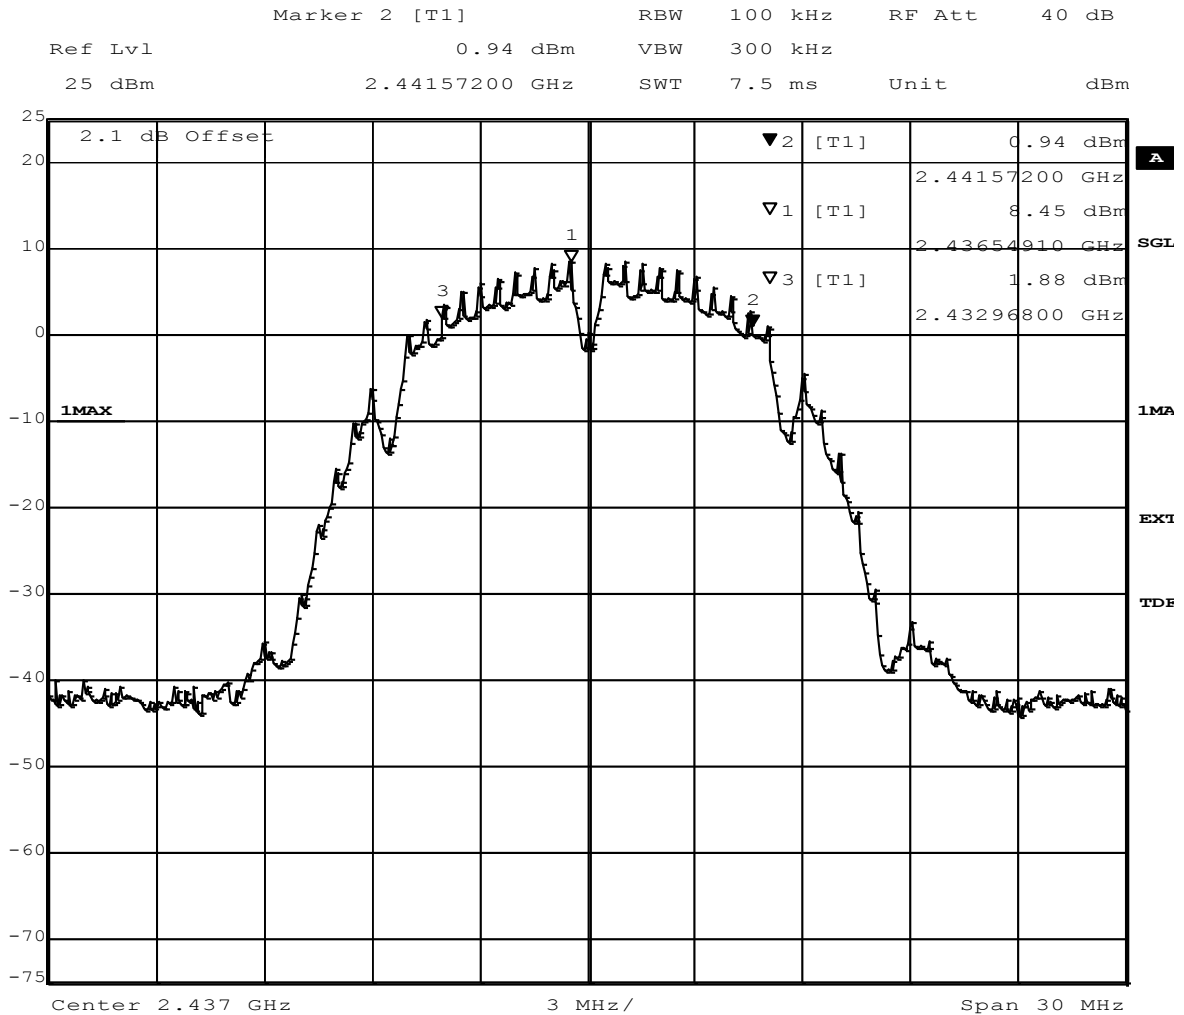


Title: 6dB Bandwidth
 Comment A: CH M: 2437 MHz; 6dB bandwidth (kHz):8604
 Date: 4.NOV.2014 09:57:43

b-mode, 2437 MHz

99 % Bandwidth

b

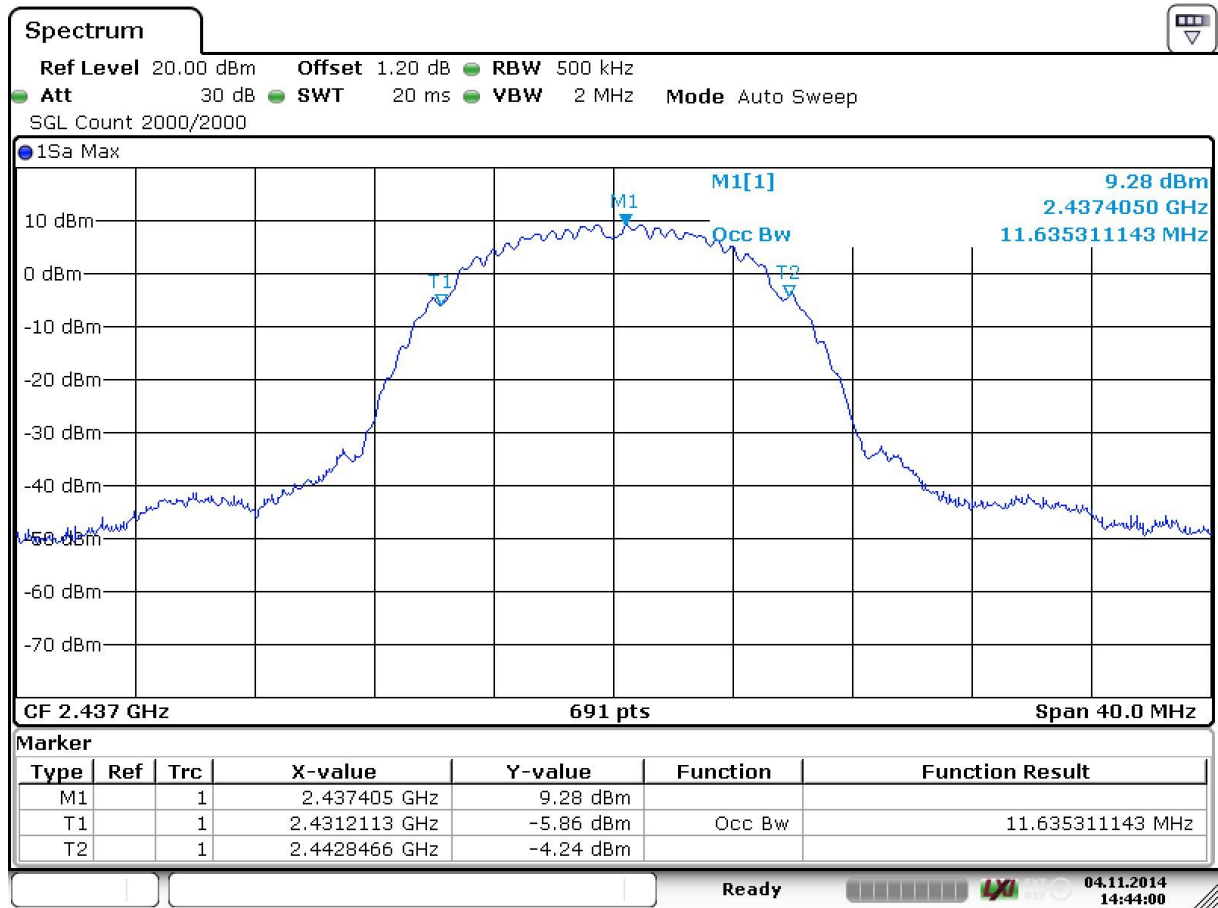

Date: 4.NOV.2014 14:43:59

b-mode, 2412 MHz

3.2 Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.2.1 Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak

3.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

3.2.3 Test Protocol

Temperature: 23 °C
 Air Pressure: 1010 hPa
 Humidity: 45 %

The antenna gain is excluded in the table.

3.2.3.1 SISO-mode, measured at antenna 1


WLAN b-Mode; 20 MHz; 1 Mbit/s						
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	20.6	30.0	9.4	19.6
	6	2437	20.4	30.0	9.6	19.4
	11	2462	20.3	30.0	9.7	19.3

WLAN g-Mode; 20 MHz; 6 Mbit/s						
Band	Channel No.	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	25.2	30.0	4.8	24.2
	6	2437	25.7	30.0	4.3	24.7
	11	2462	25.7	30.0	4.3	24.7

3.2.3.2 MIMO-mode, measured at antenna 1 and 2

WLAN n-Mode; 20 MHz; 150 Mbit/s						TX1	TX1	EIRP [dBm]
Band	Ch. No.	Freq. [MHz]	Peak Power [dBm]	Limit [dBm]	Margin to Limit [dB]	ANT1	ANT2	
2.4 GHz ISM	1	2412	29.0	30.0	1.0	26.1	25.8	
	6	2437	29.2	30.0	0.8	26.2	26.1	28.0
	11	2462	29.2	30.0	0.8	26.4	26.0	28.1

3.2.4 Measurement Plot (showing the highest value, "worst case")

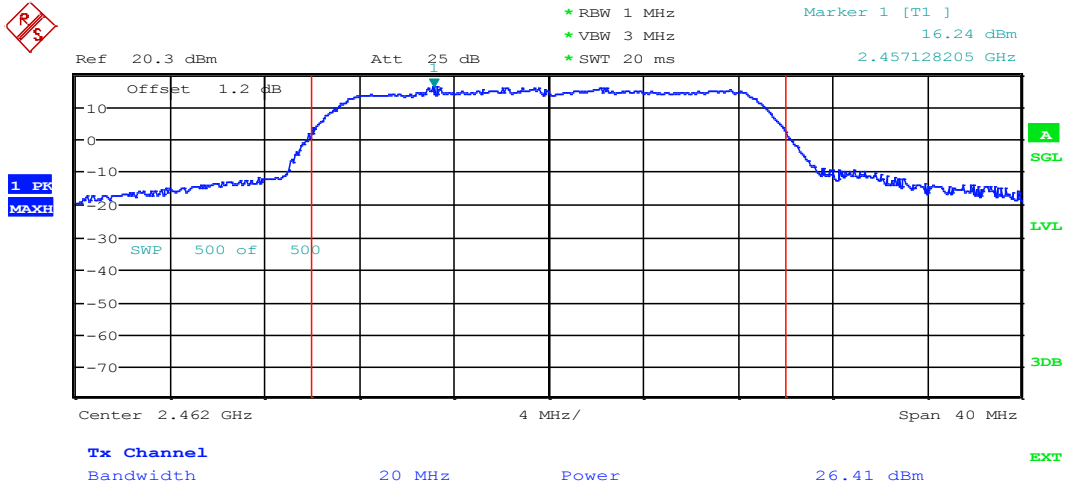

Date: 8.AUG.2014 09:44:20

n-mode, MIMO, 2462 MHz

3.3 Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.3.1 Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 40000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.5). This value is used to calculate the 20 dBc limit.

3.3.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.3.3 Test Protocol

Temperature: 23 °C
 Air Pressure: 1010 hPa
 Humidity: 45 %

WLAN b-Mode; 20 MHz; 1 Mbit/s								
Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412			PEAK	100		-20.0	---
6	2437			PEAK	100		-20.0	---
11	2462			PEAK	100		-20.0	---

Note: No (further) spurious emissions in the range 20 dB below the limit found.


WLAN g-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412			PEAK	100		-20.0	---
6	2437			PEAK	100		-20.0	---
11	2462			PEAK	100		-20.0	---

Note: No (further) spurious emissions in the range 20 dB below the limit found.

WLAN n-Mode; 20 MHz; 150 Mbit/s								
Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412			PEAK	100		-20.0	---
6	2437			PEAK	100		-20.0	---
11	2462			PEAK	100		-20.0	---

Note: No (further) spurious emissions in the range 20 dB below the limit found.

3.3.4 Measurement Plot (showing the highest value, "worst case")

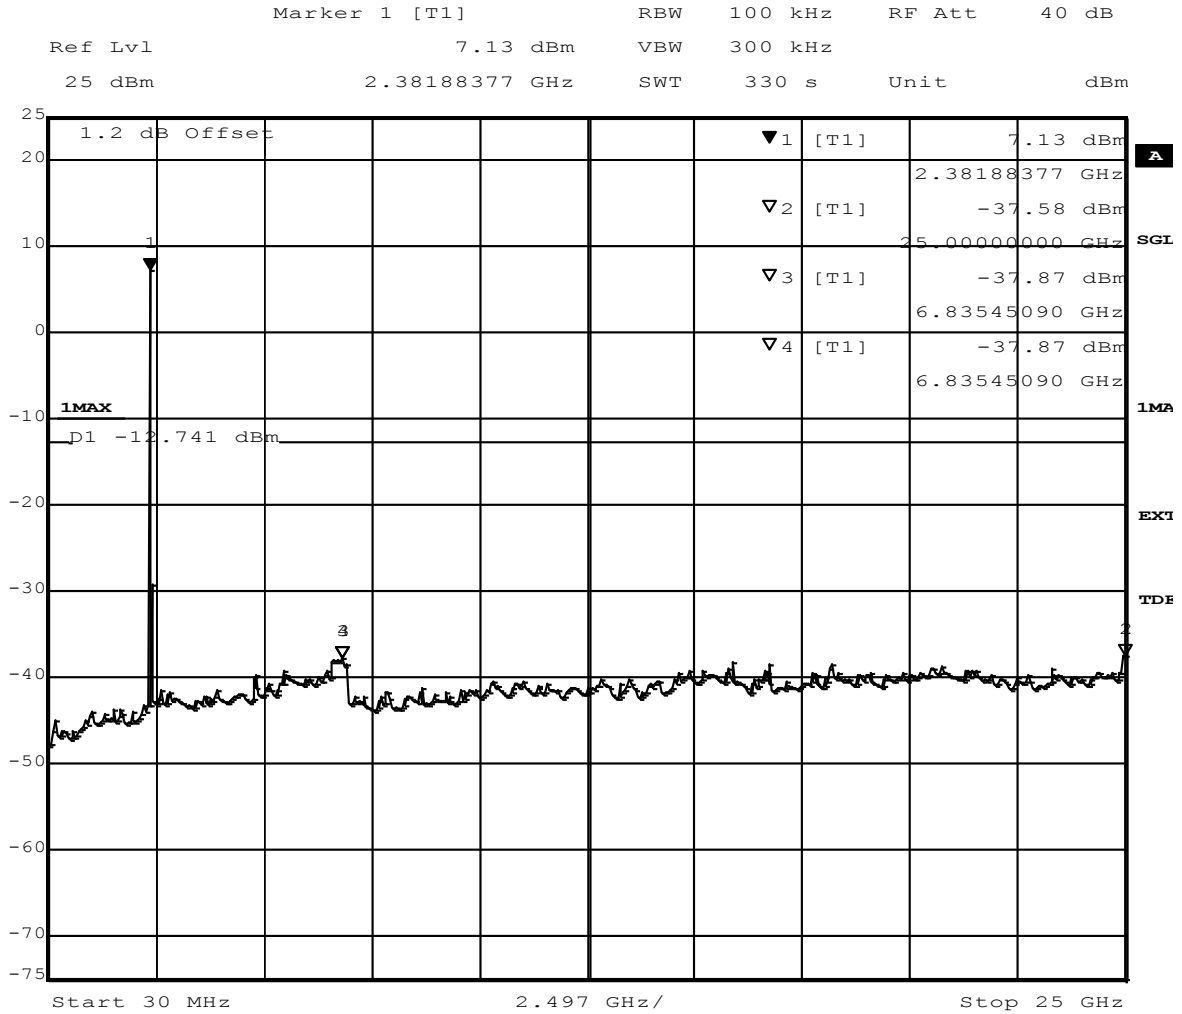

Title: spurious emissions
 Comment A: CH B: 2412 MHz
 Date: 7.AUG.2014 10:35:22

3.4 Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.4

3.4.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is performed while the EUT is powered from a DC power source.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180° to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step, the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved.

This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 22.5^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 25 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 22.5^{\circ}$ around the determined value
- Height variation range: ± 25 cm around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support at 1.4 m height in the fully-anechoic chamber. The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact, that in this frequency range a double-ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

For the data rate in mode n the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at modes b and g. Typically, the measurement is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the modes b and g. Please refer to the results for the used frequency range.

3.4.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

3.4.3 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Calculated Limits($\text{dB}\mu\text{V}/\text{m}$ @10m)	Limits($\text{dB}\mu\text{V}/\text{m}$ @10m)
0.009 – 0.49	2400/F(kHz)	300 10	(48.5 – 13.8) + 59.1 dB	107.6 – 72.9
0.49 – 1.705	24000/F(kHz)	30 10	(48.9 – 23.0) + 19.1 dB	60.0 – 42.1
1.705 – 30	30	30 10	29.5 + 19.1 dB	48.6

Frequency in MHz	Limit ($\mu\text{V}/\text{m}$)	Measurement distance (m)	Limit ($\text{dB}\mu\text{V}/\text{m}$)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit ($\text{dB}\mu\text{V}/\text{m}$) = 20 log (Limit ($\mu\text{V}/\text{m}$)/1 $\mu\text{V}/\text{m}$)

3.4.4 Test Protocol

Temperature: 26 °C
Air Pressure: 1009 hPa
Humidity: 43 %

WLAN b-Mode; 20 MHz; 1 Mbit/s				Applied duty cycle correction (AV) [dB]:				0.1
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin to Limit [dB]	Limit Type
1	2412	325.0	39.3	QP	120	46.0	6.7	RB
1	2412	403.0	43.5	QP	120	46.0	2.5	RB
6	2437	4874.0	54.4	PEAK	1000	74.0	19.6	RB
6	2437	4874.0	52.8	AV	1000	54.0	1.2	RB

Note: The results of the pre-test with peak detector have been similar for all three transmit frequencies in the frequency range 30–1000 MHz and independent from the transmit frequency. Therefore the final test applying the QP-(quasi-peak-)detector was performed only for one transmit frequency. The measurement was performed from 30 MHz up to 25 GHz because at pre-measurements no significant spurious emissions have been found outside this frequency range.

WLAN g-Mode; 20 MHz; 6 Mbit/s				Applied duty cycle correction (AV) [dB]:				0.3
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBµV/m]	Detector	RBW [kHz]	Limit [dBµV/m]	Margin to Limit [dB]	Limit Type
1	2412	2390.0	64.4	PEAK	1000	74.0	9.6	RB
1	2412	4822.5	54.5	PEAK	1000	74.0	19.6	RB
1	2412	2390.0	44.2	AV	1000	54.0	9.8	RB
1	2412	4822.5	40.2	AV	1000	54.0	13.8	RB
6	2437	4873.0	59.1	PEAK	1000	74.0	14.9	RB
6	2437	7314.0	53.0	PEAK	1000	74.0	21.0	RB
6	2437	4873.0	45.4	AV	1000	54.0	8.6	RB
6	2437	7314.0	38.1	AV	1000	54.0	15.9	RB
11	2462	2484.0	72.1	PEAK	1000	74.0	1.9	RB
11	2462	4923.0	57.2	PEAK	1000	74.0	16.8	RB
11	2462	7389.0	53.6	PEAK	1000	74.0	20.4	RB
11	2462	2484.0	52.3	AV	1000	54.0	1.7	RB
11	2462	4923.0	43.8	AV	1000	54.0	10.2	RB
11	2462	7389.0	39.0	AV	1000	54.0	15.0	RB

Note: No (further) spurious emissions in the range 20 dB below the limit found. The measurement was performed from 1 GHz up to 8 GHz because at pre-measurements no significant spurious emissions have been found outside this frequency range. No (further) spurious emissions in the range 20 dB below the limit found.

WLAN n-Mode; 20 MHz; 150 Mbit/s				Applied duty cycle correction (AV) [dB]: 2.9				
Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
1	2412	2390.0	63.4	PEAK	1000	74.0	10.6	RB
1	2412	4829.0	53.6	PEAK	1000	74.0	20.4	RB
1	2412	2390.0	48.5	AV	1000	54.0	5.5	RB
1	2412	4829.0	42.1	AV	1000	54.0	11.9	RB
6	2437	2483.5	51.9	PEAK	1000	74.0	22.1	RB
6	2437	4874.0	55.2	PEAK	1000	74.0	18.8	RB
6	2437	7317.0	49.2	PEAK	1000	74.0	24.8	RB
6	2437	4874.0	45.8	AV	1000	54.0	8.2	RB
6	2437	7317.0	38.0	AV	1000	54.0	16.0	RB
11	2462	2483.5	71.8	PEAK	1000	74.0	2.2	RB
11	2462	4923.0	52.6	PEAK	1000	74.0	21.4	RB
11	2462	7386.0	48.2	PEAK	1000	74.0	25.8	RB
11	2462	4923.0	44.6	AV	1000	54.0	9.4	RB
11	2462	7386.0	39.1	AV	1000	54.0	14.9	RB

Note: The results of the pre-test with peak detector have been similar for all three transmit frequencies in the frequency range 30–1000 MHz and independent from the transmit frequency. Therefore the final test applying the QP-(quasi-peak-)detector was performed only for one transmit frequency.

3.5 Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.4-2009, FCC §15.31

3.5.1 Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements:

1. Show compliance of the lower and higher band edge by a conducted measurement. For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room.

For the lower band edge the EUT is set to transmit as follows:

For a WLAN transmitter working in the 2.4 GHz band on lowest channel:

CH1 = 2412 MHz / CH3 = 2422 MHz for a channel bandwidth of 20 / 40 MHz.

The lower band edge is 2400 MHz for 2.4 GHz band transmitter.

For the higher band edge the EUT is set to transmit as follows:

For a WLAN transmitter working in the 2.4 GHz band on highest channel:

CH11 = 2462 MHz or CH13 = 2472 MHz / CH11= 2462 MHz for a channel bandwidth of 20 / 40 MHz.

The higher band edge is 2483.5 MHz for a 2.4 GHz band transmitter.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW / VBW = 100 / 300 kHz

2. Showing compliance of the higher band edge falls in to restricted bands by a radiated measurement.

The radiated emissions measurements are performed in a typical installation configuration inside the fully anechoic chamber using a horn antenna at 1 m distance.

EMI receiver settings for radiated measurement:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

3.5.2 Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."



For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the radiated measurement of the higher band edge connected to a restricted band the limit is "specified in Section 15.209(a)".

3.5.3 Test Protocol

3.5.3.1 Conducted measurement, lower and higher band edge


Temperature: 26 °C
 Air Pressure: 1009 hPa
 Humidity: 45 %

WLAN b-Mode; 20 MHz; 1 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-42.6	PEAK	100	7.9	-12.1	30.5
11	2462	2483.5	-44.1	PEAK	100	8.1	-11.9	32.2

WLAN g-Mode; 20 MHz; 6 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-27.8	PEAK	100	7.5	-12.5	15.3
11	2462	2483.5	-36.3	PEAK	100	7.3	-12.7	23.6

WLAN n-Mode; 20 MHz; 150 Mbit/s								
Channel No	Channel Center Frequency [MHz]	Frequency [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-27.9	PEAK	100	7.3	-12.7	15.1
11	2462	2483.5	-36.2	PEAK	100	7.1	-12.9	23.3

3.5.3.2 Measurement Plot (showing the highest value, "worst case")

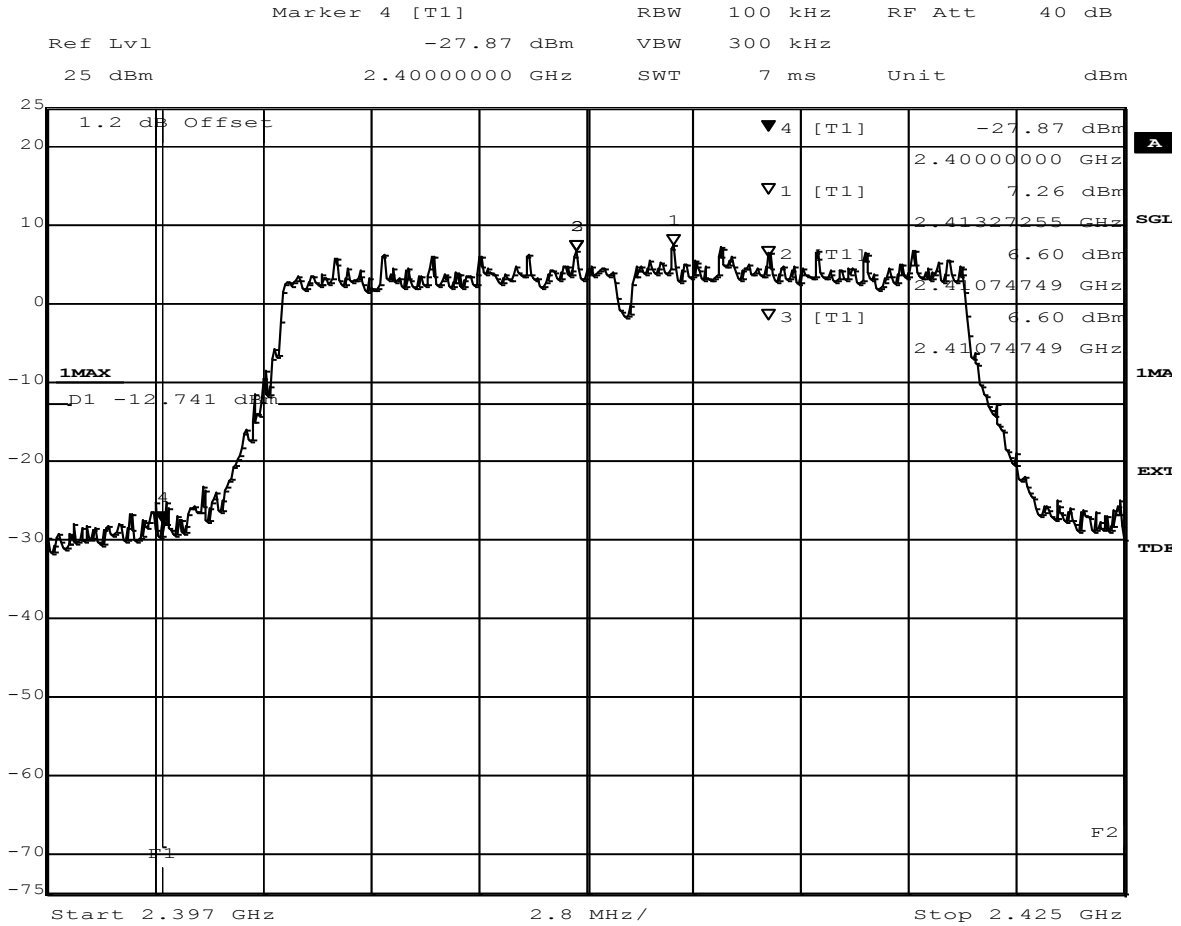

Title: Band Edge Compliance
 Comment A: CH B: 2412 MHz
 Date: 7.AUG.2014 10:23:43

3.5.3.3 Radiated measurement, higher band edge


Temperature: 26 °C
 Air Pressure: 1009 hPa
 Humidity: 45 %

WLAN b-Mode; 20 MHz; 1 Mbit/s								
Ch. No	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	50.1	PEAK	1000	74.0	23.9	BE
11	2462	2483.5	38.6	AV	1000	54.0	15.4	BE

WLAN g-Mode; 20 MHz; 6 Mbit/s								
Ch. No	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	72.1	PEAK	1000	74.0	1.9	BE
11	2462	2483.5	52.0	AV	1000	54.0	2.0	BE

WLAN n-Mode; 20 MHz; 150 Mbit/s								
Ch. No	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	71.8	PEAK	1000	74.0	2.2	BE
11	2462	2483.5	52.6	AV	1000	54.0	1.4	BE

3.5.3.4 Measurement Plot (showing the highest value, "worst case")

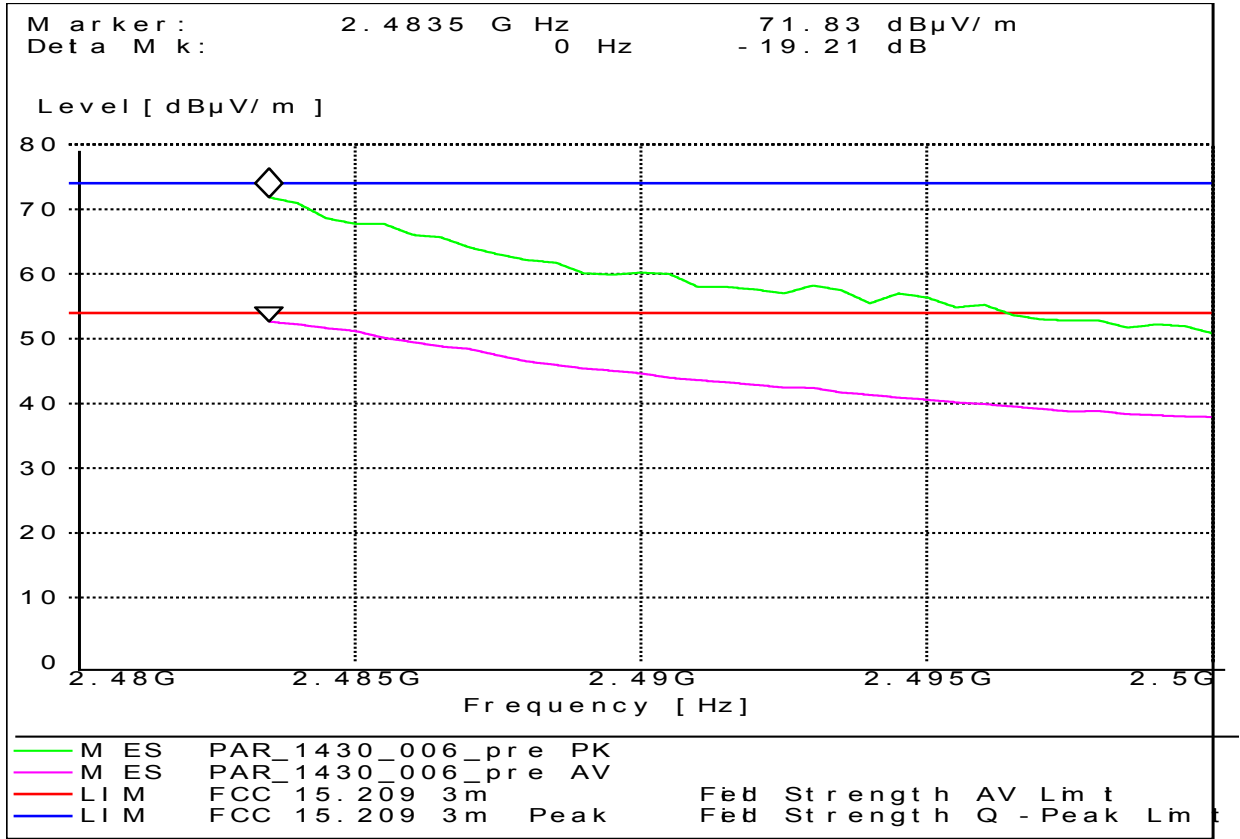

3.6 Power density

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.6.1 Test Description

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: Coupled

3.6.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.3 Test Protocol


Temperature: 23 °C
 Air Pressure: 1010 hPa
 Humidity: 45 %

WLAN b-Mode; 20 MHz; 1 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-4.5	8.0	12.5
	6	2437	-4.6	8.0	12.6
	11	2462	-3.6	8.0	11.6

WLAN g-Mode; 20 MHz; 6 Mbit/s					
Band	Channel No.	Frequency [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-7.0	8.0	15.0
	6	2437	-7.5	8.0	15.5
	11	2462	-6.9	8.0	14.9

WLAN n-Mode; 20 MHz; 150 Mbit/s						Power 1	Power 2
Band	Ch. No.	Freq. [MHz]	Power Density [dBm/3kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]	ANT1	ANT2
2.4 GHz ISM	1	2412	-9.0	8.0	17.0	-10.7	-13.9
	6	2437	-8.8	8.0	16.8	-10.9	-13.0
	11	2462	-8.8	8.0	16.8	-10.5	-13.8

3.6.4 Measurement Plot (showing the highest value, "worst case")

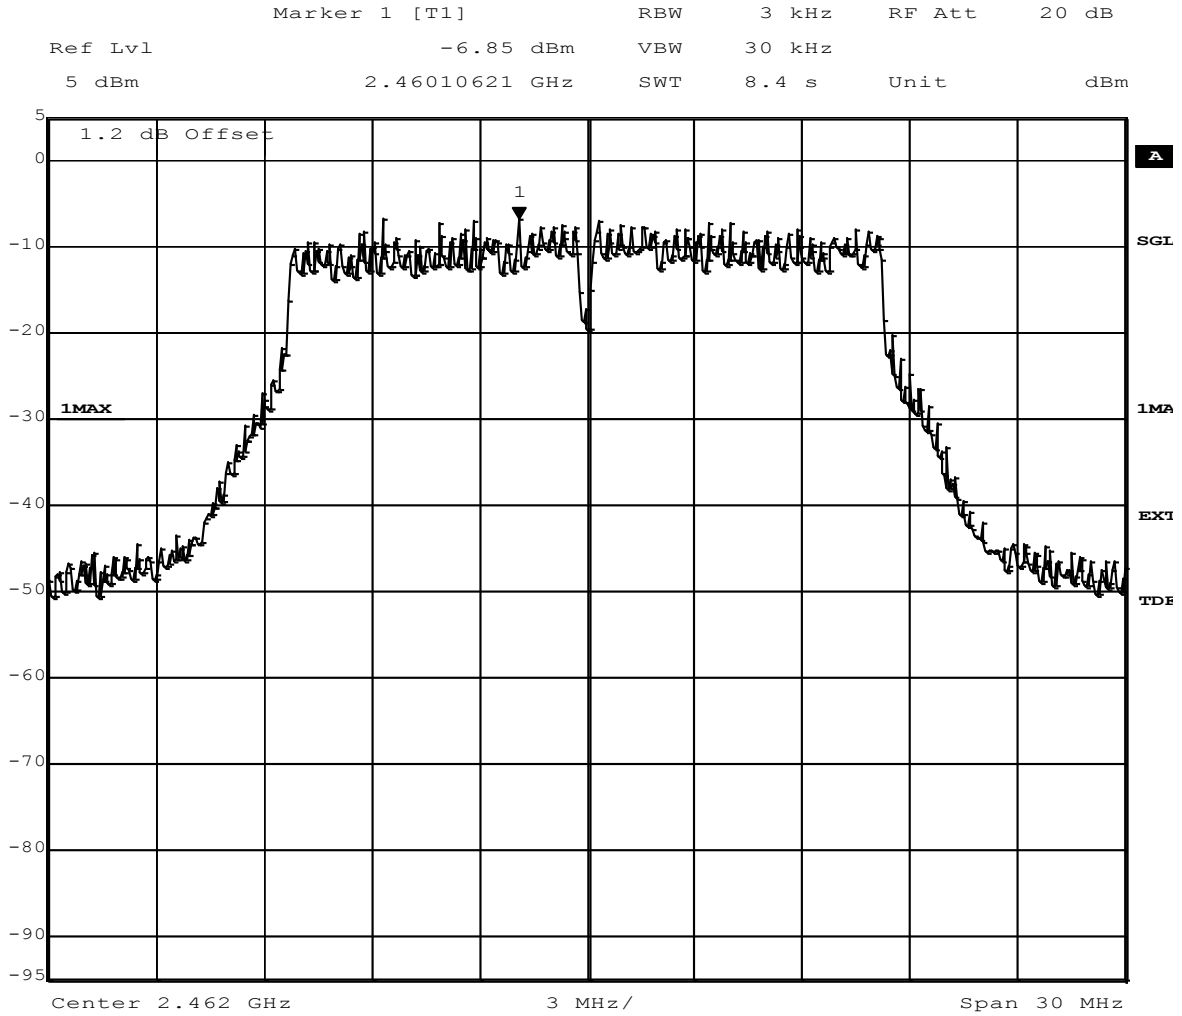

Title: Power Density
 Comment A: CH T: 2462 MHz;
 Date: 7.AUG.2014 09:49:06

4 Test Equipment

List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	NSA (FCC)		2014/01/09 2017/01/09

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
Manufacturer:	Rohde & Schwarz GmbH & Co.KG
Description:	EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31

Single Devices for Auxiliary Equipment for Conducted emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2014/01/08	2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	standard calibration		2014/06/18	2017/11/30
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/11/25	2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standart Calibration		2013/03/01	2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2013/03/01	2015/02/28

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer		
Antenna mast	AM 4.0	AM4.0/180/119205	Maturo GmbH		
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck		
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/01/18	2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq		
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq		
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq		
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch		
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax		
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/05/18	2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/06/26	2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic		
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic		
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic		
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright		
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170				
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/12/18	2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG		
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration			2011/10/27	2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH		
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH		

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2, Lab 3
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/07/29 2014/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2, Lab 3
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24 2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/28 2014/11/27
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07 2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG

Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/12
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/12
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/07 2016/01/31
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

Test Equipment Multimeter 12

Lab ID: Lab 4, Lab 5
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03

Test Equipment Radio Lab Test Equipment

Lab ID: Lab 3
Description: Radio Lab Test Equipment

Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/12
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS	5489/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/06/24 2014/07/02
	Standard calibration		2014/07/03 2015/07/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/05/13 2015/05/12
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/25 2014/11/24
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/06 2016/05/05
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/02/12 2015/02/11

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 4
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT CBT		100302	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/08/28 2014/08/27
Power Meter NRVD	NRVD	832025/059	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/08/26 2014/08/25
Power Sensor NRV Z1 A	PROBE	832279/013	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/08/28 2014/08/27
Power Supply	NGSM 32/10	2725	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/06/20 2015/06/19
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/08/27 2014/08/26
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B SMIQ03B	SMIQ03B	832870/017	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/06/21 2016/06/20

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: Lab 4, Lab 5
Description: Shielded Room 4m x 6m

Test Equipment T/A Logger 13

Lab ID: Lab 1, Lab 2, Lab 3
Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/02/07 2015/02/06

Test Equipment T/H Logger 02

Lab ID: Lab 1
Description: Lufft Opus10
Serial Number: 7489

Single Devices for T/H Logger 02

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 02 (Environ)	Opus10 THI (8152.00)	7489	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/02/07 2015/02/06

Test Equipment T/H Logger 03

Lab ID: Lab 3
Description: Lufft Opus10
Serial Number: 7482

Single Devices for T/H Logger 03

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 03 (Environ)	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/02/07 2015/02/06

Test Equipment T/H Logger 12

Lab ID: Lab 2
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/01/07 2015/01/06

Test Equipment T/H Logger 15

Lab ID: Lab 4, Lab 5
Description: Lufft Opus10
Serial Number: 13985

Single Devices for T/H Logger 15

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 15 (Environ)		13985	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/01/07 2015/01/06

Test Equipment Temperature Chamber 01

Lab ID: Lab 4, Lab 5
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2014/03/12 2016/03/11

Test Equipment Temperature Chamber 05

Lab ID: Lab 3
Manufacturer: see single devices
Description: Temperature Chamber VT4002
Type: Vötsch
Serial Number: see single devices

Single Devices for Temperature Chamber 05

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Vötsch 05	VT 4002	58566080550010	Vötsch
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2014/03/11 2016/03/10

Test Equipment WLAN RF Test Solution

Lab ID: Lab 5
Manufacturer: 7 layers AG
Description: Regulatory WLAN RF Tests
Type: WLAN RF
Serial Number: 001


Single Devices for WLAN RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer	Last Execution	Next Exec.
Arbitrary Waveform Generator	TGA12101	284482			
Power Meter NRVD	NRVD <i>Calibration Details</i> Standard calibration	832025/059		2013/08/26	2014/08/25
Power Sensor NRV Z1 A	PROBE <i>Calibration Details</i> Standard calibration	832279/013		2013/08/28	2014/08/27
Power Supply	NGSM 32/10 <i>Calibration Details</i> Standard calibration	2725		2013/06/20	2015/06/19
Rubidium Frequency Normal MFS	Datum MFS <i>Calibration Details</i> Standard calibration	002	Datum GmbH	2013/08/27	2014/08/26
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG		
Spectrum Analyser	FSU26 <i>Calibration Details</i> Standard Calibration <i>HW/SW Status</i> FSU FW Update to v4.61 SP3, K5 v4.60 and K73 v4.61	100136	Rohde & Schwarz GmbH & Co.KG	2014/01/06	2015/01/05
Spectrum Analyser	FSU3 <i>Calibration Details</i> Standard calibration <i>HW/SW Status</i> Firmware Version 4.51 SP1 Option FS-K72 4.50 SP1 Option FS-K73 4.50 SP1	200046	Rohde & Schwarz GmbH & Co.KG	2013/06/20	2014/06/19
TOCT Switching Unit	Switching Unit	040107	7 layers, Inc.		
Vector Signal Generator SMIQ03B	SMIQ03B <i>Calibration Details</i> Standard calibration	832870/017		2013/06/21	2016/06/20

5 Photo Report

Please refer to external report.

6 Setup Drawings

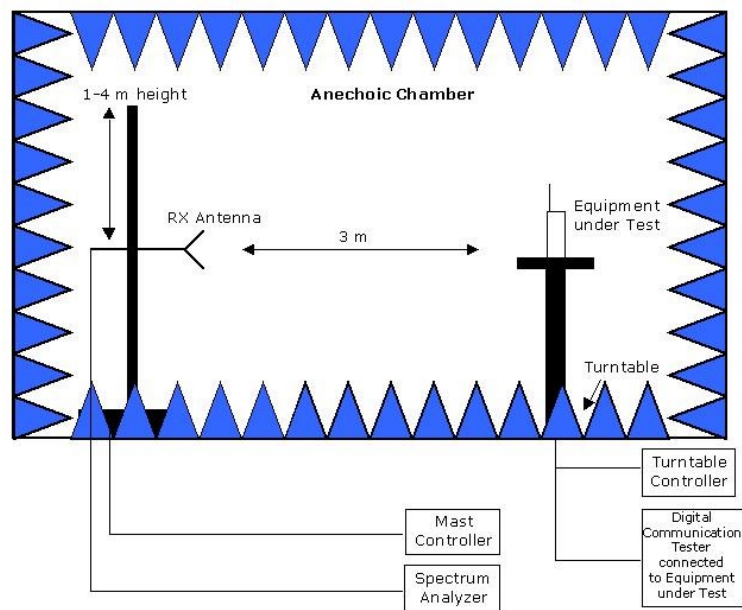

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.