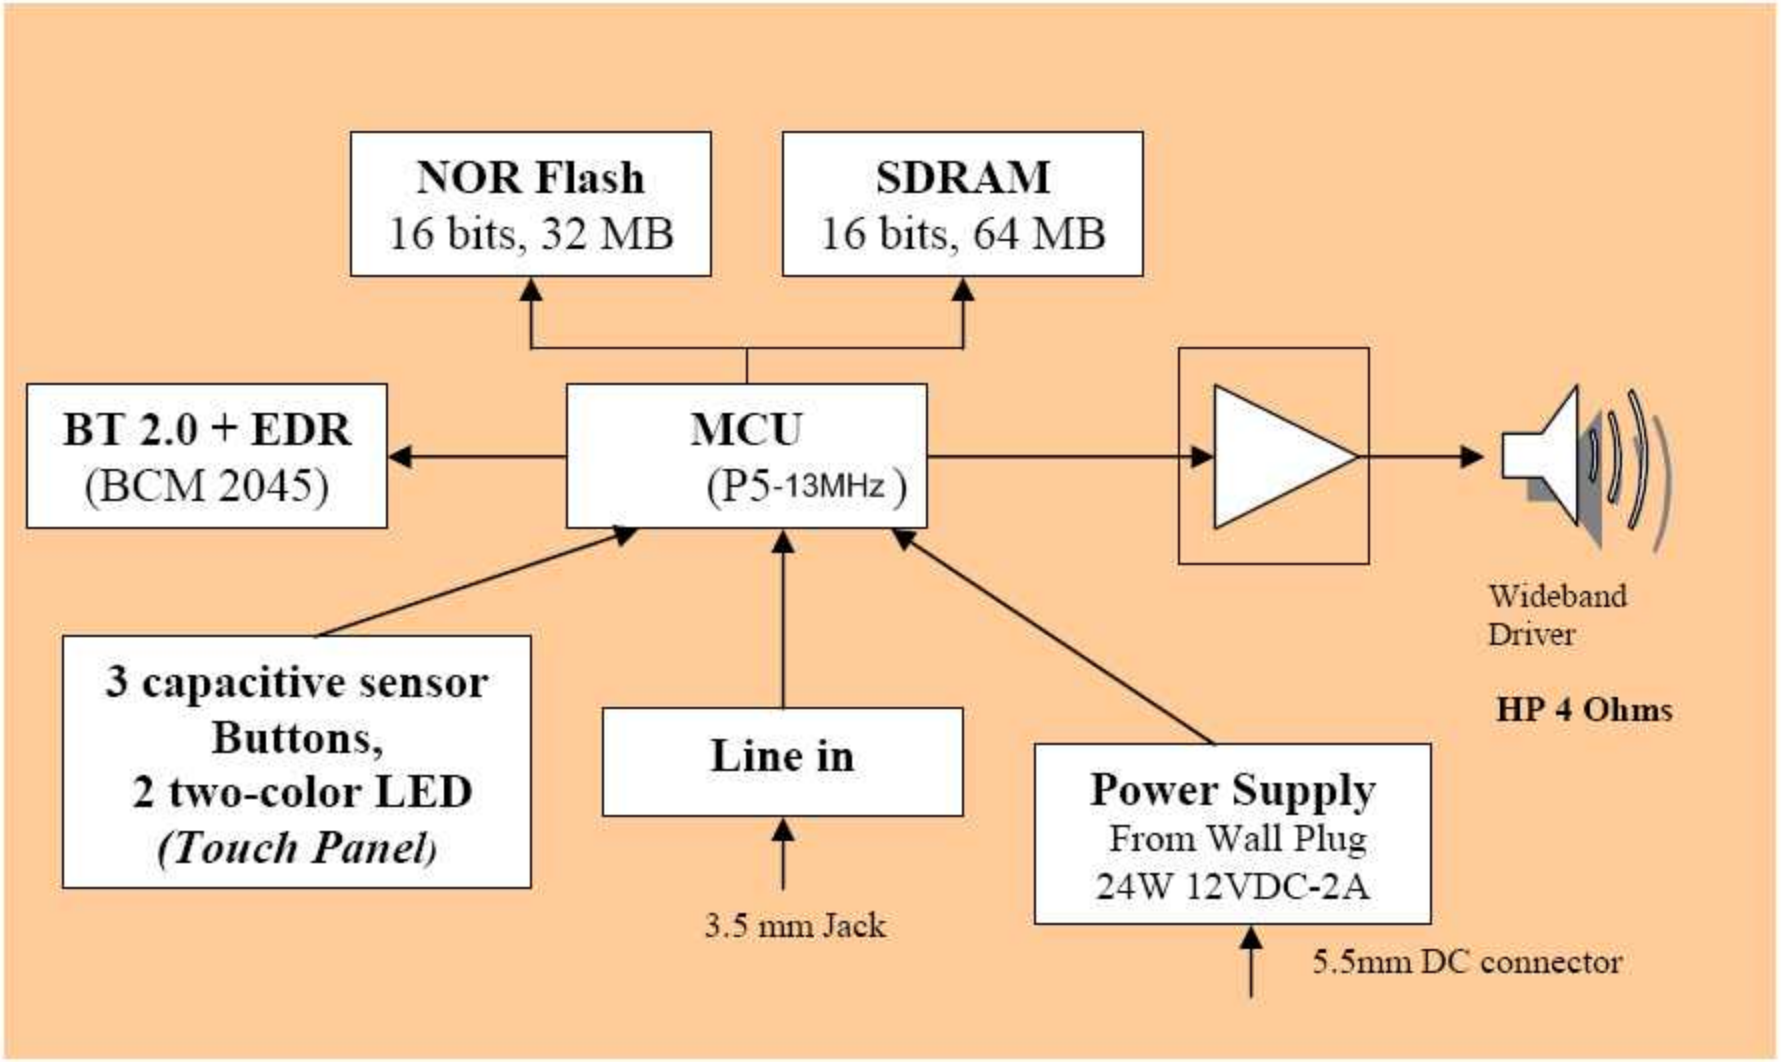
NOR Flash
16 bits, 32 MB
SDRAM
16 bits, 64 MB
BT 2.0 + EDR
(BCM 2045)
MCU
(P5-13MHz )
Wideband
Driver
HP 4 Ohms
3 capacitive sensor
Buttons,
2 two-color LED
(Touch Panel)
Line in
3.5 mm Jack
Power Supply
From Wall Plug
24W 12VDC-2A
5.5mm DC connector