

FCC PART 15 Subpart C
EMI MEASUREMENT AND TEST REPORT
For
COBY MANUFACTURING CO., LTD

Unit C-E, 8.F., Po Shau Centre, 115 How Ming Street, Kwun Tong
Kowloon, Hongkong

FCC ID: RMVCT-P6200

2004-3-12

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: 900MHz Cordless Phone
Test Engineer: <u>Benjamin Jin</u>	
Report No.: <u>R0402206</u>	
Test Date: <u>2004-3-8</u>	
Reviewed By: <u>Ling Zhang</u>	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel (408) 732-9162 Fax (408) 732-9164	

Note: This test report is specially limited to the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
CONFIGURATION OF TEST SYSTEM	5
TEST SETUP BLOCK DIAGRAM	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLING LIST AND DETAILS	7
SUMMARY OF TEST RESULTS	8
§ 15.207 - CONDUCTED EMISSIONS TEST DATA	9
MEASUREMENT UNCERTAINTY	9
EUT SETUP	9
SPECTRUM ANALYZER SETUP	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE	9
ENVIRONMENTAL CONDITIONS	10
SUMMARY OF TEST RESULTS	10
CONDUCTED EMISSIONS TEST DATA	10
PLOT OF CONDUCTED EMISSIONS TEST DATA	10
§15.209(A), §15.205 & §15.249 - RADIATED EMISSION DATA	13
MEASUREMENT UNCERTAINTY	13
EUT SETUP	13
SPECTRUM ANALYZER SETUP	13
TEST EQUIPMENT LIST AND DETAILS.....	13
ENVIRONMENTAL CONDITIONS	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
SUMMARY OF TEST RESULTS	14
RADIATED EMISSIONS TEST RESULT DATA	15
§15.249(C) – BAND-EDGE TESTING	19
STANDARD APPLICABLE	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
ENVIRONMENTAL CONDITIONS	19
TEST RESULTS	19

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *COBY MANUFACTURING CO., LTD*'s product, model name: CT-P6200 / CT-P5200 or the "EUT" as referred to in this report is a 900MHz Cordless Phone. The EUT was composed of two parts, one is a Handset which measures approximately 7.0" L x 1.95" W x 1.3" H, and the other is a Base which measures approximately 5.1" L x 4.5" W x 1.95" H.

The EUT utilized Coby power adapter, M/N: U090030D12.

** The test data gathered are from production sample, serial number: CB011, provided by the manufacturer.*

Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2001.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.205, 15.207, 15.249, 15.203 and 15.209 rules.

Related Submittal(s)/Grant(s)

No Related Submittals

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2001, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2001.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22:1997 and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to ANSI C63.4-2001.

Handset being tested: The Handset unit was placed on the wooden table and tested in three orthogonal axis. The handset was connected to the headset via its headset port. The Low, middle, and high channels were tested. The handset was transmitting to and receiving from the Base unit. The EUT was investigated for emissions while off hook. The radiated data was taken in this mode of operation. All initial and final investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the section of configuration of test system.


Base being tested: The Base unit was placed on the wooden table. The Low, middle, and high channels were tested. The base was connected to the line simulator and an AC adapter via its Tel Line and power ports, respectively. The base was transmitting and receiving from the Handset. The conducted as well as radiated data was taken in this mode of operation. All initial and final investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the section of configuration of test system.

Equipment Modifications

No modifications were made to the EUT.

Configuration of Test System


Radiated Setup for Base

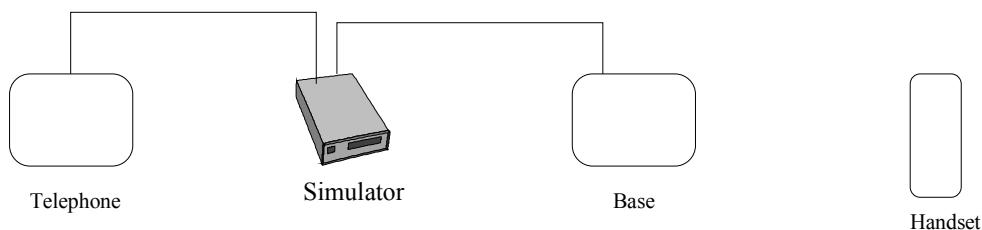


Radiated Setup for Handset

Test Setup Block Diagram

Radiated Setup for Base

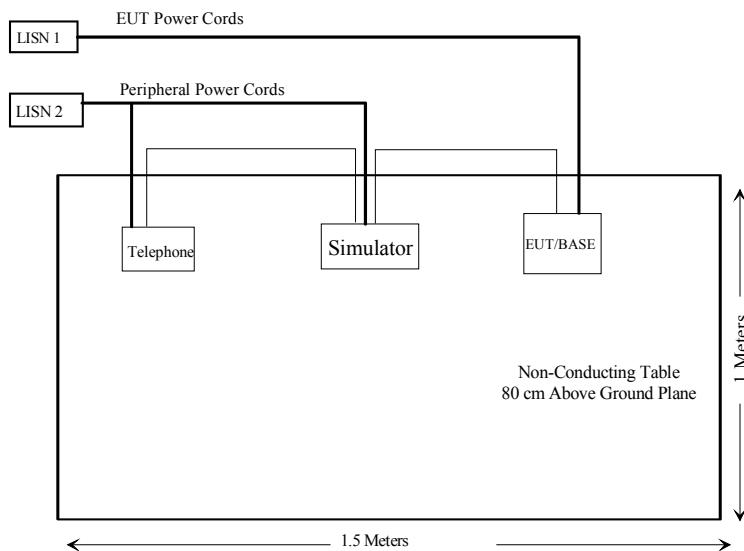

Radiated Setup for Handset

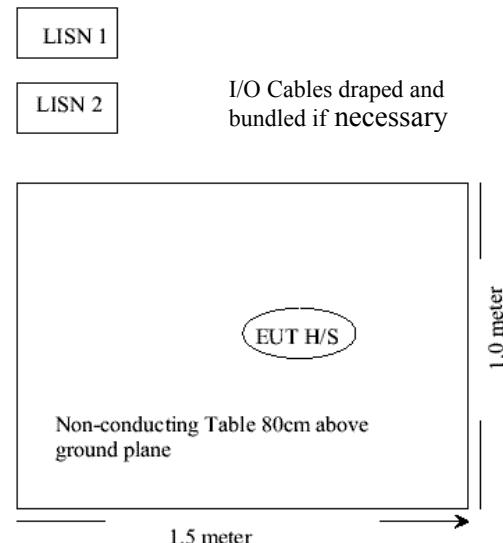

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Teltone	Line Simulator	TLS-3B-01	80071	N/A
PANASONIC	Telephone	KX-T3175	6IBTB142741	ACJMLA-75986-MT-E

External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
Phone Line	1.0	Line 1 Port / Line Simulator	Phone
Phone Line	1.0	Line 2 Port / Line Simulator	EUT

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.207 (a)	Conducted Emission	Compliant
§15.249 (a)	Radiated Emission	Compliant
§15.249 (c)	Band Edge Testing	Compliant
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.214	Cordless Telephone	Compliant

§ 15.207 - CONDUCTED EMISSIONS TEST DATA

Measurement Uncertainty

All measurements involve certain levels of uncertainties. These uncertainties are attributed to: Spectrum analyzer, Cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the estimated uncertainty of any conducted emission measurement at BACL is ± 2.4 dB.

EUT Setup

The measurement was performed in the shielded room, using the same setup per ANSI C63.4-2001 measurement procedure. The specification used was FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle as required.

The Power Adapter system was connected with 120Vac/60Hz power source.

Spectrum Analyzer Setup

The spectrum analyzer was set to investigate the spectrum from 150 kHz to 30Mhz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	Artificial LISN	ESH2-Z5	871884/039	2003-03-28
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2003-05-06

* **Statement of Traceability:** **BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with an "QP". Average readings are distinguished with an "Ave".

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	38%
ATM Pressure:	1032 mbar

Summary of Test Results

According to the recorded data in following table, the EUT complies with the FCC Conducted limit for a Class B device, with the *worst* margin reading of:

-32.6 dB μ V at 18.30 MHz in the Line mode

Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency MHz	Amplitude dB μ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB μ V	Margin dB
18.30	17.4	AVG	Line	50	-32.6
18.30	17.1	AVG	Neutral	50	-32.9
4.80	4.6	AVG	Neutral	46	-41.4
18.30	17.5	QP	Line	60	-42.5
18.30	17.2	QP	Neutral	60	-42.8
4.80	4.6	AVG	Line	50	-45.4
0.16	4.5	AVG	Line	53	-48.5
0.17	3.9	AVG	Neutral	53	-49.1
0.17	12.8	QP	Neutral	63	-50.2
4.80	4.7	QP	Neutral	56	-51.3
0.16	11.7	QP	Line	63	-51.3
4.80	4.7	QP	Line	60	-55.3

Plot of Conducted Emissions Test Data


Plot of Conducted Emissions test data was presented hereinafter as reference.

Bay Area Compliance Laboratory Corp
Class B

08. Mar 04 16:21

EUT: CT-P6200
Manuf: Coby
Op Cond: Normal
Operator: Ming
Comment: L

Scan Settings (3 Ranges)
Frequencies | | Receiver Settings
Start Stop Step IF BW Detector M-Time Atten Preamp
150k 1M 5k 9k QP+AV 20ms 15dBBLN OFF
1M 5M 10k 9k QP+AV 1ms 15dBBLN OFF
5M 30M 100k 9k QP+AV 1ms 15dBBLN OFF
Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 25
Acc Margin: 6dB

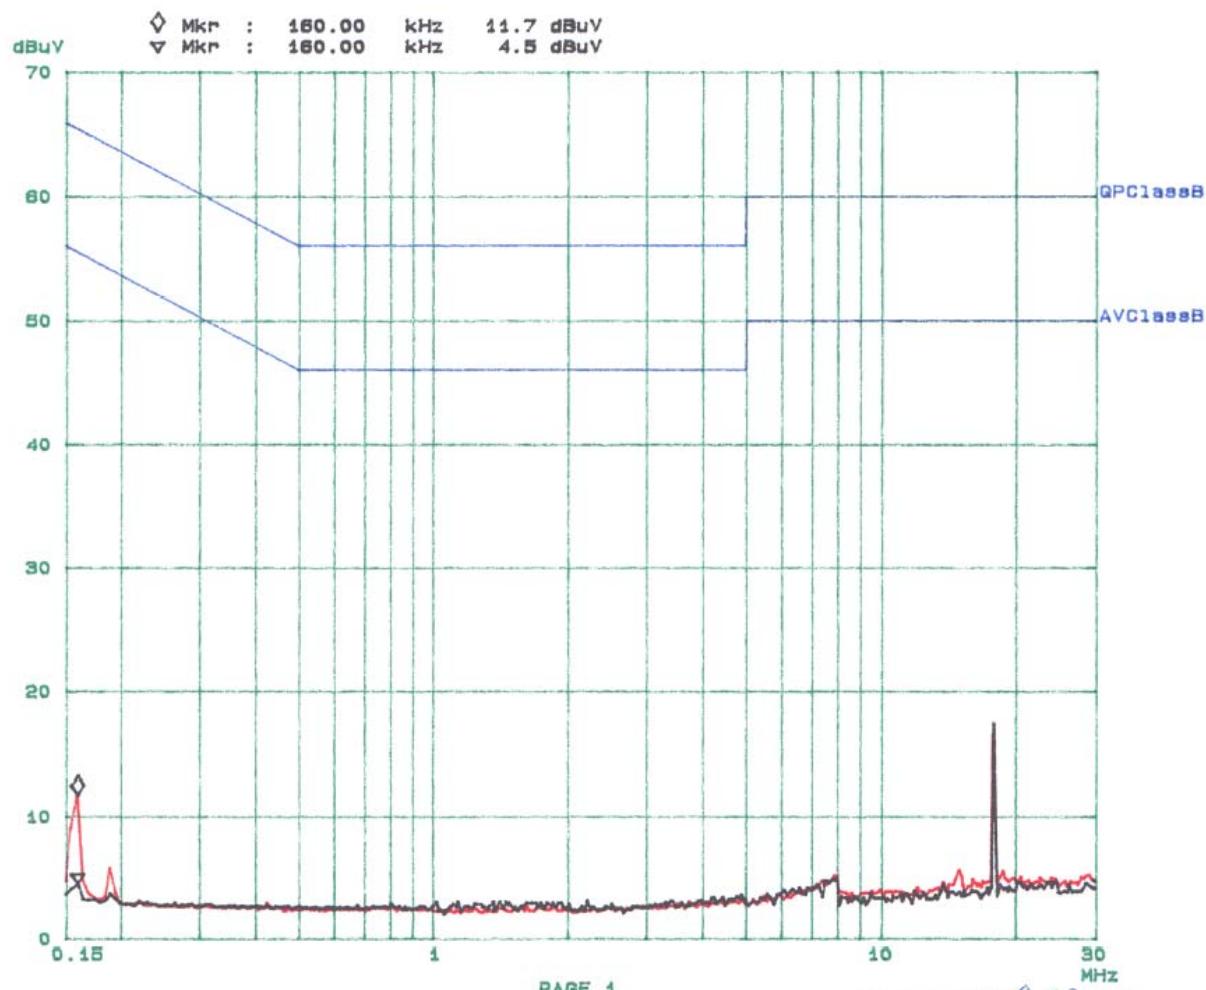

Bay Area Compliance Laboratory Corp
Class B


08. Mar 04 18:18

EUT: CT-P6200
Manuf: Coby
Op Cond: Normal
Operator: Ming
Comment: N

Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	15dBBLN	OFF
1M	5M	10k	9k	QP+AV	1ms	15dBBLN	OFF
5M	30M	100k	9k	QP+AV	1ms	15dBBLN	OFF

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 25
Acc Margin: 6dB

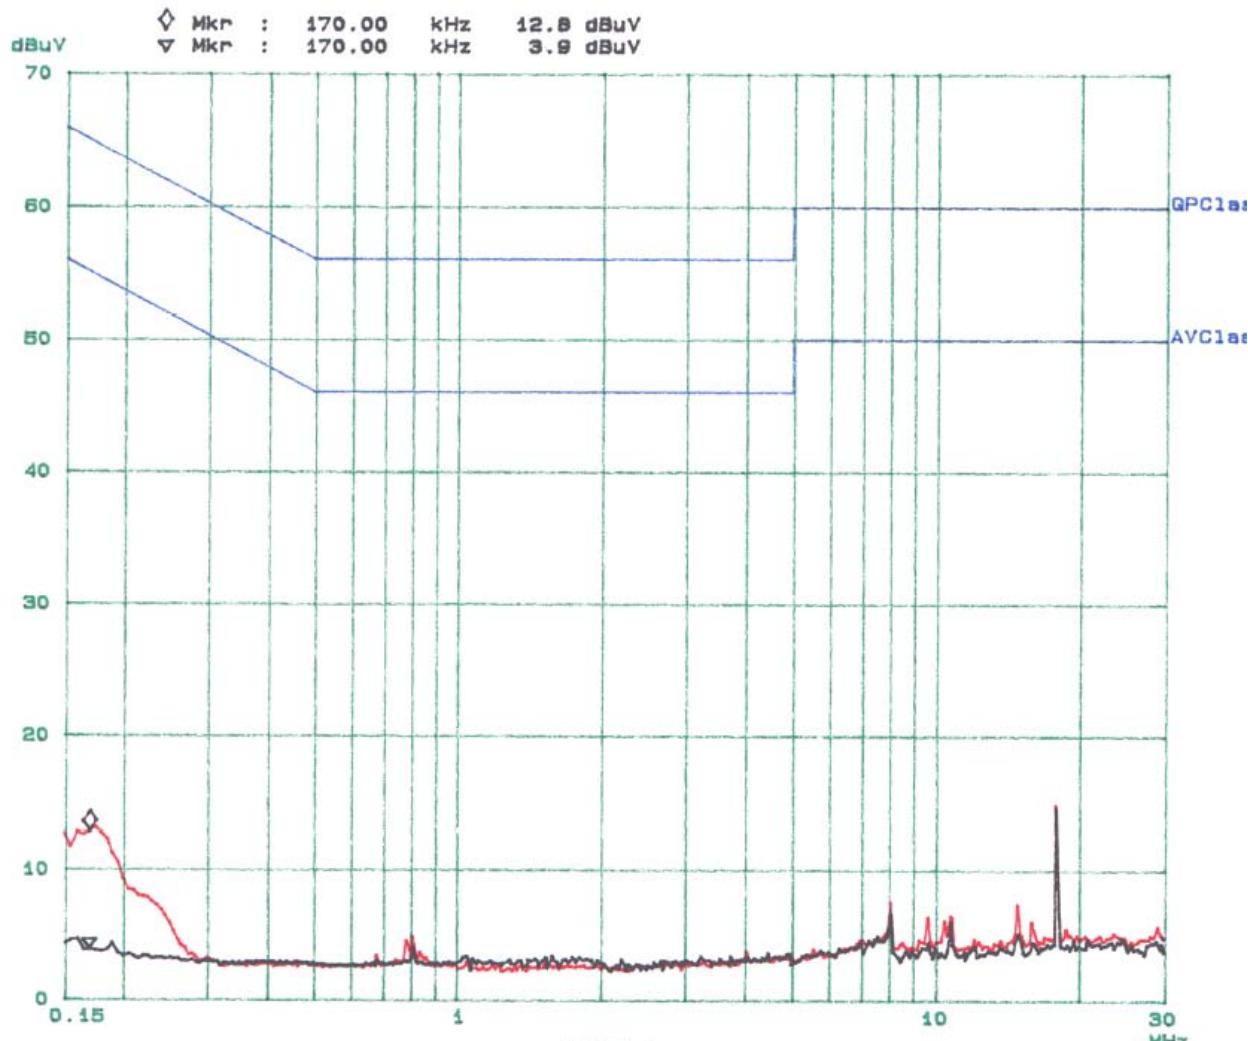

§15.209(a), §15.205 & §15.249 - RADIATED EMISSION DATA

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with ANSI C63.4-2001. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle as required.

The host PC system was connected with 120Vac/60Hz power source.

Spectrum Analyzer Setup

According to FCC Rules, 47 CFR 15.33 (a) (1), the system was tested to 10GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<u>Frequency Range</u>	<u>RBW</u>	<u>Video B/W</u>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
HP	Spectrum Analyzer	8568B	2601A02165	2003-07-07
HP	Spectrum Analyzer Display	85662A	3026A20081	2003-06-13
HP	Quasi-Peak Adapter	85650A	3019A05393	2003-06-13
Agilent	Amplifier	8447D	2944A10187	2003-09-23
Electro-Metrics	Biconical Antenna	EM-6912	585	2003-04-17
Electro-Metrics	Logperiodic Antenna	EM-6950	788	2003-04-15
HP	Spectrum Analyzer	8565EC	3946A00131	2003-06-30

* **Statement of Traceability:** **BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	38%
ATM Pressure:	1032 mbar

Test Procedure

For the radiated emissions test, the power cord of the host system and all support equipment were connected to the AC floor outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for applicable limits. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Applicable Limit}$$

Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209, and 15.249 after tested to 10th harmonics as required by FCC and had the worst margin of:

Handset, 30MHz - 10GHz, 3 Meters

- 5.4 dB at 925.50MHz in the Vertical polarization at Low Frequency
- 6.0 dB at 926.50 MHz in the Vertical polarization at Mid Frequency
- 4.6 dB at 927.45MHz in the Vertical polarization at High Frequency
- 11.6dB at 670.20MHz in the Horizontal polarization at Unintentional Emission

Base, 30MHz - 10GHz, 3 Meters

- 3.0 dB at 902.10MHz in the Horizontal polarization at Low Frequency
- 3.8 dB at 903.10 MHz in the Horizontal polarization at Mid Frequency
- 4.9 dB at 904.50 MHz in the Horizontal polarization at High Frequency
- 4.4 dB at 896.20 MHz in the Vertical polarization at Unintentional Emission

Radiated Emissions Test Result Data**Handset Unit, 30 MHz to 10GHz, 3 meters**

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dB μ V/m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
Low Channel											
925.50	87.9	Fund/Peak	90	1.5	v	23.4	4.0	26.7	88.6	94	-5.4
925.50	85.6	Fund/Qp	90	1.5	v	23.4	4.0	26.7	86.3	94	-7.7
925.50	79.7	Fund/Peak	310	1.8	h	23.4	4.0	26.7	80.4	94	-13.6
925.50	77.3	Fund/Qp	310	1.8	h	23.4	4.0	26.7	78.0	94	-16.0
1851.00	36.9	Ave	45	1.5	v	25.3	2.6	28.1	36.7	54	-17.3
1851.00	35.4	Ave	30	1.6	h	25.3	2.6	28.1	35.2	54	-18.8
2776.50	34.2	Ave	0	1.2	v	29.0	3.7	35.3	31.6	54	-22.4
2776.50	32.7	Ave	210	1.5	h	29.0	3.7	35.3	30.1	54	-23.9
1851.00	45.5	Peak	45	1.5	v	25.3	2.6	28.1	45.3	74	-28.7
1851.00	44.1	Peak	30	1.6	h	25.3	2.6	28.1	43.9	74	-30.1
2776.50	42.8	Peak	0	1.2	v	29.0	3.7	35.3	40.2	74	-33.8
2776.50	41.3	Peak	210	1.5	h	29.0	3.7	35.3	38.7	74	-35.3
Mid Channel											
926.500	87.3	Fund/Peak	310	1.5	v	23.4	4.0	26.7	88.0	94	-6.0
926.500	85.2	Fund/Qp	310	1.5	v	23.4	4.0	26.7	85.9	94	-8.1
926.500	79.5	Fund/Peak	290	1.8	h	23.4	4.0	26.7	80.2	94	-13.8
926.500	77.4	Fund/Qp	290	1.8	h	23.4	4.0	26.7	78.1	94	-15.9
1853.000	36.6	Ave	0	1.8	v	25.3	2.6	28.1	36.4	54	-17.6
1853.000	35.1	Ave	60	1.6	h	25.3	2.6	28.1	34.9	54	-19.1
2779.500	33.7	Ave	30	1.5	v	29.0	3.7	35.3	31.1	54	-22.9
2779.500	32.1	Ave	150	1.2	h	29.0	3.7	35.3	29.5	54	-24.5
1853.000	45.3	Peak	0	1.8	v	25.3	2.6	28.1	45.1	74	-28.9
1853.000	43.7	Peak	60	1.6	h	25.3	2.6	28.1	43.5	74	-30.5
2779.500	42.5	Peak	30	1.5	v	29.0	3.7	35.3	39.9	74	-34.1
2779.500	41.1	Peak	150	1.2	h	29.0	3.7	35.3	38.5	74	-35.5

High Channel											
927.45	88.7	Fund/Peak	30	1.5	v	23.4	4.0	26.7	89.4	94	-4.6
927.45	86.5	Fund/Qp	30	1.5	v	23.4	4.0	26.7	87.2	94	-6.8
927.45	79.9	Fund/Peak	210	1.8	h	23.4	4.0	26.7	80.6	94	-13.4
927.45	77.6	Fund/Qp	210	1.8	h	23.4	4.0	26.7	78.3	94	-15.7
1854.90	37.4	Ave	0	1.5	v	25.3	2.6	28.1	37.2	54	-16.8
1854.90	35.8	Ave	45	2.0	h	25.3	2.6	28.1	35.6	54	-18.4
2782.35	34.5	Ave	60	1.5	v	29.0	3.7	35.3	31.9	54	-22.1
2782.35	33.2	Ave	0	1.2	h	29.0	3.7	35.3	30.6	54	-23.4
1854.90	45.9	Peak	0	1.5	v	25.3	2.6	28.1	45.7	74	-28.3
1854.90	44.7	Peak	45	2.0	h	25.3	2.6	28.1	44.5	74	-29.5
2782.35	43.2	Peak	60	1.5	v	29.0	3.7	35.3	40.6	74	-33.4
2782.35	41.6	Peak	0	1.2	h	29.0	3.7	35.3	39.0	74	-35.0
Unintentional Emission, 30MHz to 1000MHz											
670.20	36.8	/	110	1.3	h	21.2	3.2	26.8	34.4	46	-11.6
919.49	32.9	/	60	1.5	v	23.2	3.9	26.7	33.3	46	-12.7
31.10	31.7	/	120	1.5	h	14.9	0.8	25.7	21.7	40	-18.3
52.30	34.6	/	290	1.5	v	10.2	1.0	25.7	20.1	40	-19.9
265.70	35.1	/	90	2.0	v	13.4	2.2	25.9	24.8	46	-21.2
255.08	33.4	/	15	1.6	h	13.3	2.2	25.9	23.0	46	-23.0

Base Unit, 30 MHz to 10GHz, 3 meters

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dB μ V/m	Comments	Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB	Amp. dB	Corr. Ampl. dB μ V/m	Limit dB μ V/m	Margin dB
Low Channel											
902.100	90.3	Fund/Peak	180	1.2	h	23.6	3.8	26.7	91.0	94	-3.0
902.100	88.1	Fund/Qp	180	1.2	h	23.6	3.8	26.7	88.8	94	-5.2
902.100	85.7	Fund/Peak	210	1.5	v	23.6	3.8	26.7	86.4	94	-7.6
902.100	83.9	Fund/Qp	210	1.5	v	23.6	3.8	26.7	84.6	94	-9.4
1804.200	43.1	Ave	60	1.6	h	25.3	2.6	28.1	42.9	54	-11.1
1804.200	40.6	Ave	250	1.2	v	25.3	2.6	28.1	40.4	54	-13.6
2706.300	42.0	Ave	100	1.8	h	29.0	3.7	35.3	39.4	54	-14.6
2706.300	40.3	Ave	90	1.0	v	29.0	3.7	35.3	37.7	54	-16.3
1804.200	49.8	Peak	60	1.6	h	25.3	2.6	28.1	49.6	74	-24.4
1804.200	47.7	Peak	250	1.2	v	25.3	2.6	28.1	47.5	74	-26.5
2706.300	48.8	Peak	100	1.8	h	29.0	3.7	35.3	46.2	74	-27.8
2706.300	46.7	Peak	90	1.0	v	29.0	3.7	35.3	44.1	74	-29.9
Mid Channel											
903.100	89.5	Fund/Peak	310	1.8	h	23.6	3.8	26.7	90.2	94	-3.8
903.100	87.6	Fund/Qp	310	1.8	h	23.6	3.8	26.7	88.3	94	-5.7
903.100	83.2	Fund/Peak	30	1.5	v	23.6	3.8	26.7	83.9	94	-10.1
1806.200	42.7	Ave	0	1.2	h	25.3	2.6	28.1	42.5	54	-11.5
903.100	81.1	Fund/Qp	30	1.5	v	23.6	3.8	26.7	81.8	94	-12.2
1806.200	40.3	Ave	90	1.5	v	25.3	2.6	28.1	40.1	54	-13.9
2709.300	41.7	Ave	45	1.6	h	29.0	3.7	35.3	39.1	54	-14.9
2709.300	39.8	Ave	30	1.5	v	29.0	3.7	35.3	37.2	54	-16.8
1806.200	49.6	Peak	0	1.2	h	25.3	2.6	28.1	49.4	74	-24.6
1806.200	47.5	Peak	90	1.5	v	25.3	2.6	28.1	47.3	74	-26.7
2709.300	48.5	Peak	45	1.6	h	29.0	3.7	35.3	45.9	74	-28.1
2709.300	46.4	Peak	30	1.5	v	29.0	3.7	35.3	43.8	74	-30.2

High Channel											
904.500	88.4	Fund/Peak	310	1.8	h	23.6	3.8	26.7	89.1	94	-4.9
904.500	86.2	Fund/Qp	310	1.8	h	23.6	3.8	26.7	86.9	94	-7.1
904.500	82.3	Fund/Peak	110	1.5	v	23.6	3.8	26.7	83.0	94	-11.0
1809.000	42.1	Ave	90	1.4	h	25.3	2.6	28.1	41.9	54	-12.1
904.500	80.5	Fund/Qp	110	1.5	v	23.6	3.8	26.7	81.2	94	-12.8
1809.000	39.8	Ave	0	1.2	v	25.3	2.6	28.1	39.6	54	-14.4
2713.500	41.2	Ave	90	1.8	h	29.0	3.7	35.3	38.6	54	-15.4
2713.500	39.4	Ave	150	1.4	v	29.0	3.7	35.3	36.8	54	-17.2
1809.000	49.2	Peak	90	1.4	h	25.3	2.6	28.1	49.0	74	-25.0
1809.000	47.1	Peak	0	1.2	v	25.3	2.6	28.1	46.9	74	-27.1
2713.500	48.1	Peak	90	1.8	h	29.0	3.7	35.3	45.5	74	-28.5
2713.500	45.9	Peak	150	1.4	v	29.0	3.7	35.3	43.3	74	-30.7
Unintentional Emission, 30MHz to 1000MHz											
896.20	40.8	/	230	1.2	v	23.7	3.8	26.7	41.6	46	-4.4
670.20	40.2	/	270	1.8	h	21.2	3.2	26.8	37.8	46	-8.2
38.73	37.8	/	30	1.5	v	13.4	1.0	25.7	26.5	40	-13.5
48.43	39.4	/	290	1.5	v	11.1	1.1	25.7	25.9	40	-14.2
318.09	36.4	/	80	1.6	h	15.1	2.3	26.1	27.7	46	-18.3
261.80	34.5	/	15	1.8	v	13.4	2.2	25.9	24.2	46	-21.8

Ave.: Average

Fund: Fundamental

Note: This test was performed by placing the handset on 3 orthogonal axis.

§15.249(c) – BAND-EDGE TESTING

Standard Applicable

Requirements: FCC 15.249 (c), the emission power at the START and STOP frequencies shall be at least 50 dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209, whichever is the lesser attenuation.

Test Procedure

With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
HP	Spectrum Analyzer	8565EC	3946A00131	2003-06-30

* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.



Environmental Conditions



Temperature:	25 °C
Relative Humidity:	38%
ATM Pressure:	1032 mbar

Test Results

Refer to the attached plots.

Handset:

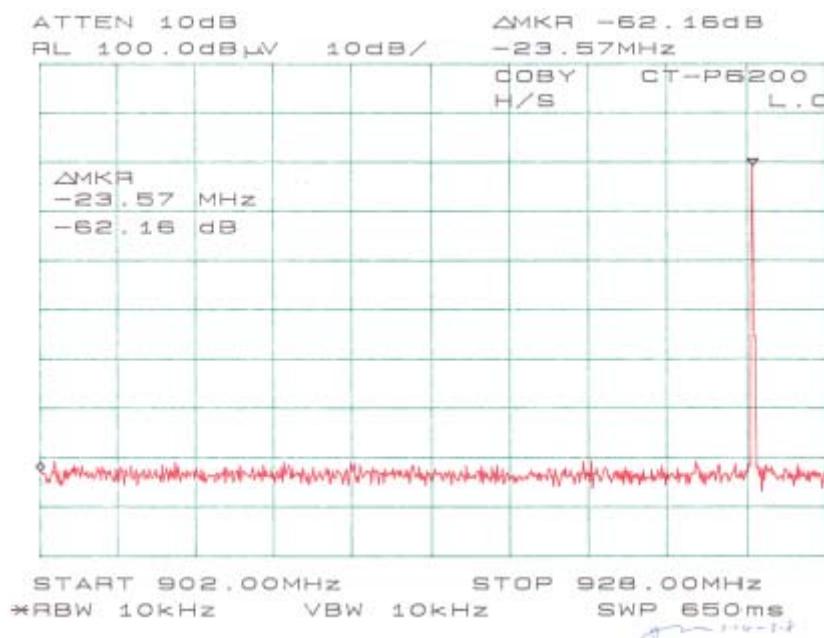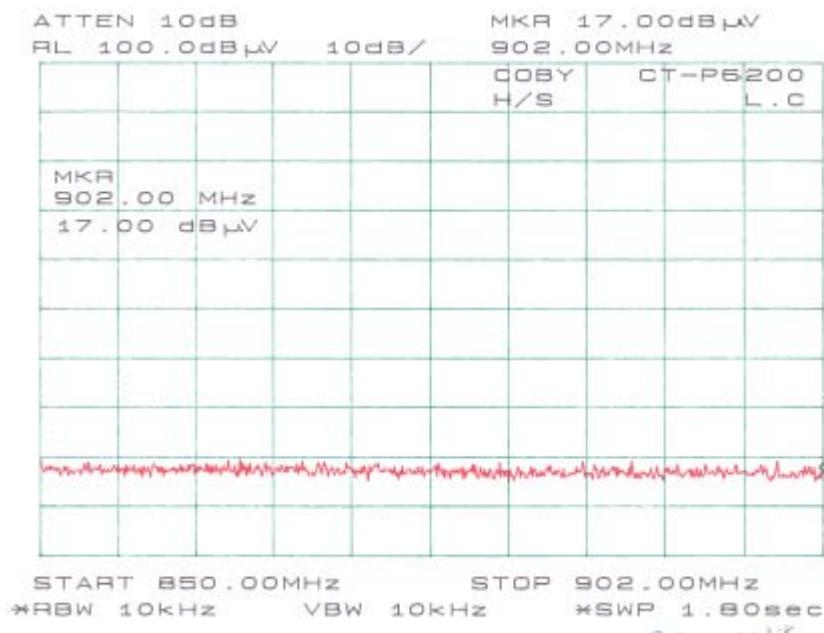

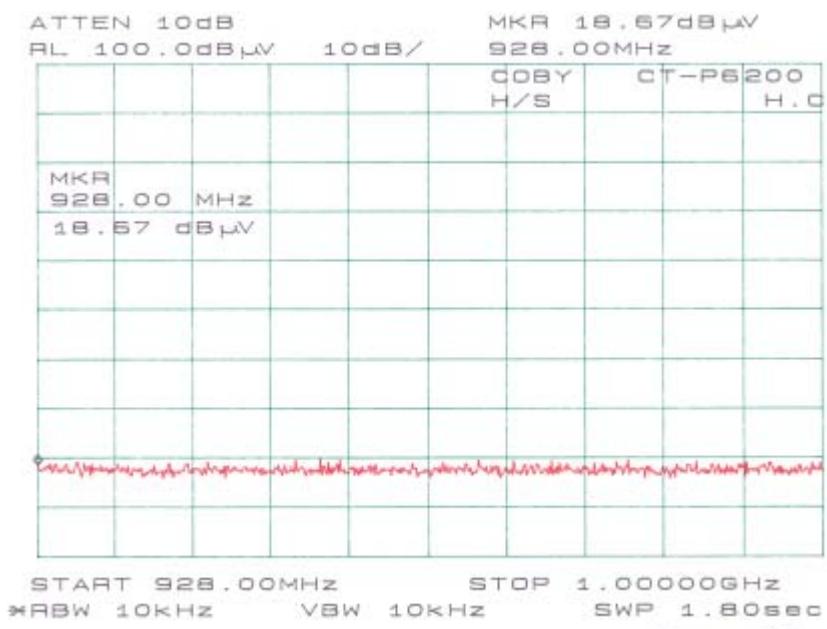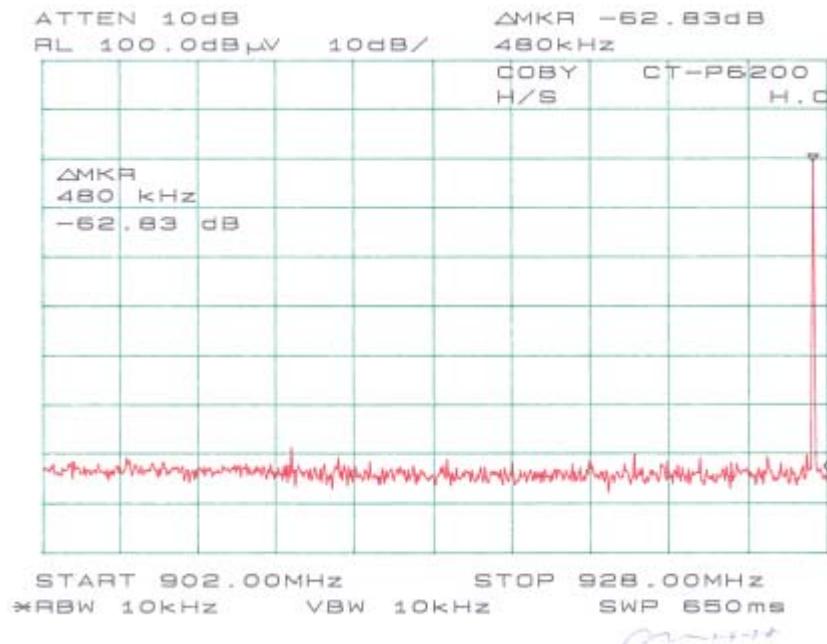

Base:

