




## Appendix B

Fundamental Field Strength

**Field Strength under normal conditions**

**according to FCC PART 15/SUBPART C :§15.249**


EUT: 2.4 GHz Cordless Phone Handset  
MODEL N O.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: according to §15.249  
Comment: Dist.: 3m, Ant.: HL 025

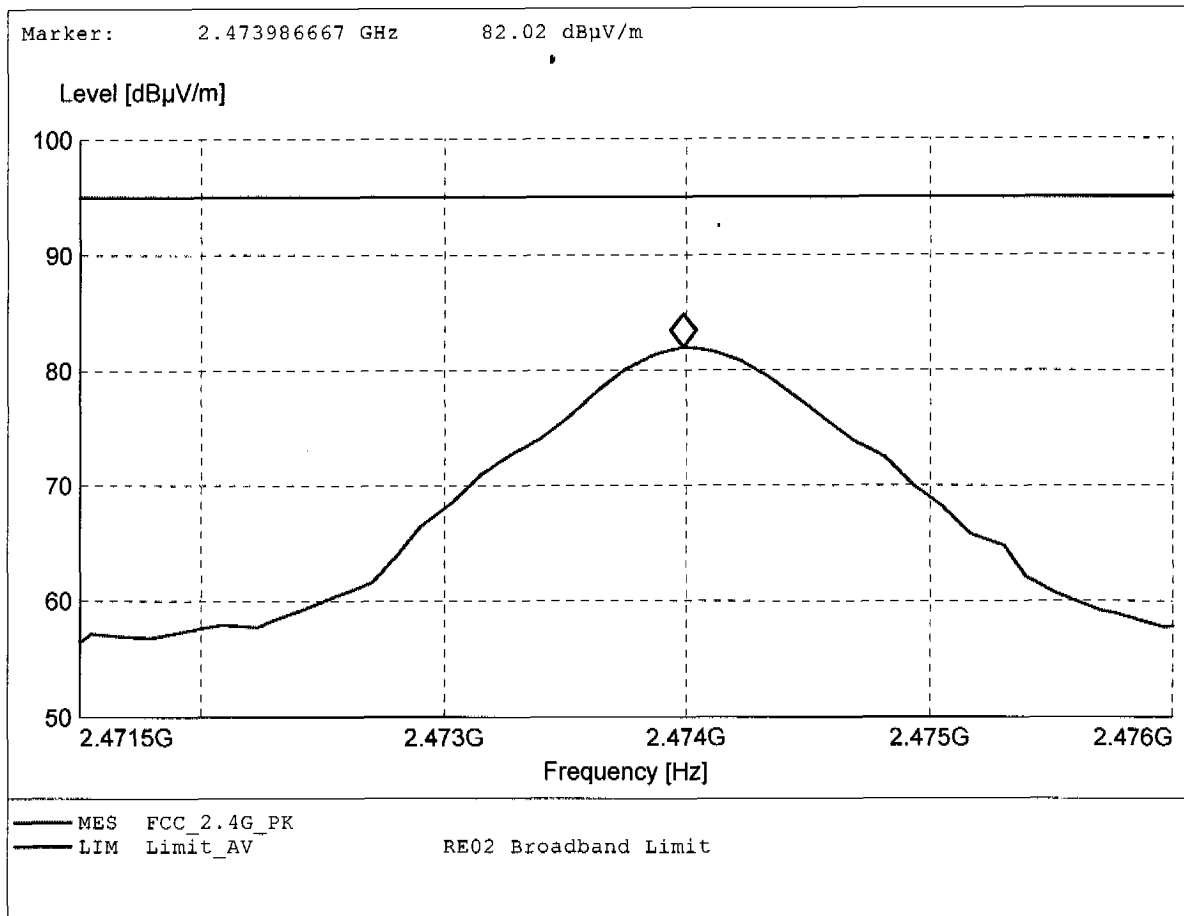

**Field Strength under normal conditions**

**according to FCC PART 15/SUBPART C :§15.249**


EUT: 2.4 GHz Cordless Phone Handset  
MODEL N O.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: according to §15.249  
Comment: Dist.: 3m, Ant.: HL 025

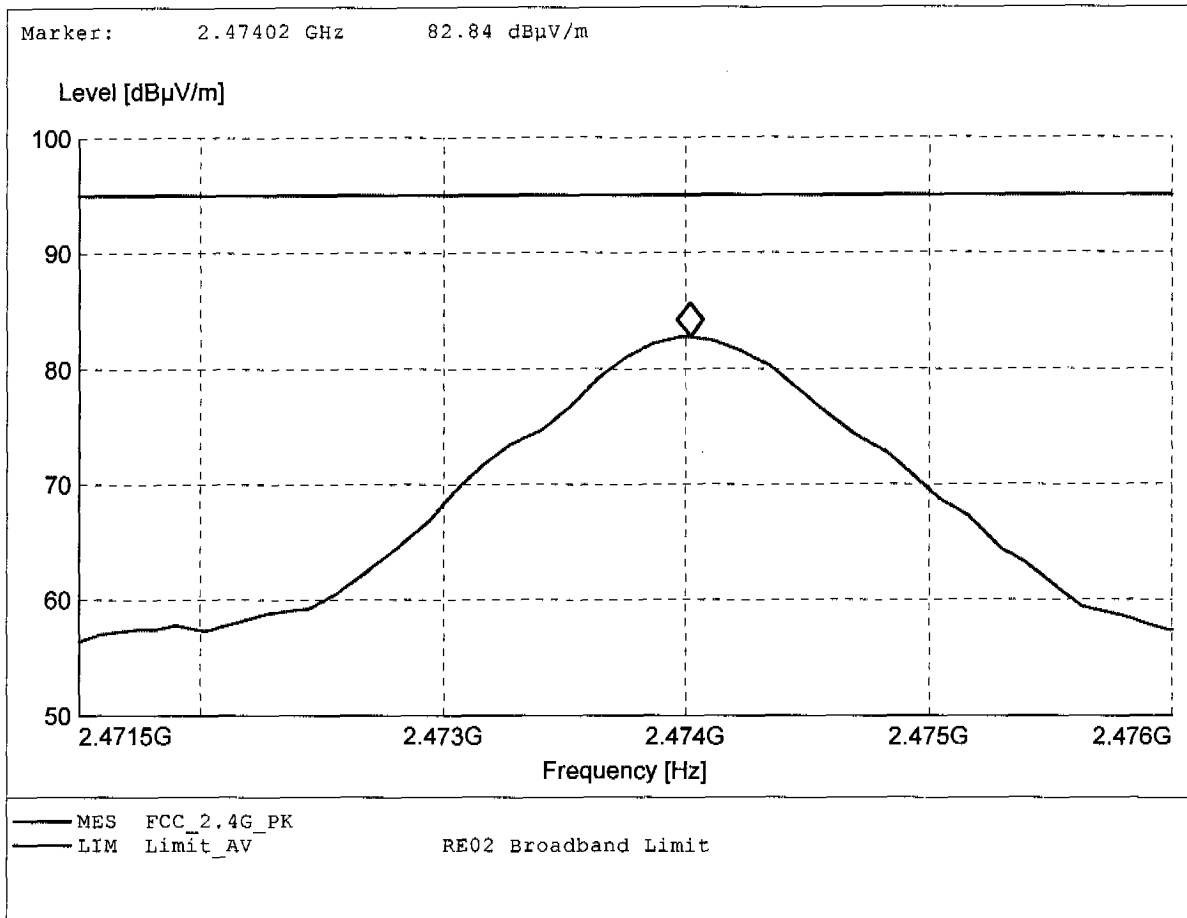

**Field Strength under normal conditions**

**according to FCC PART 15/SUBPART C :§15.249**


EUT: 2.4 GHz Cordless Phone Handset  
MODEL N O.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: according to §15.249  
Comment: Dist.: 3m, Ant.: HL 025

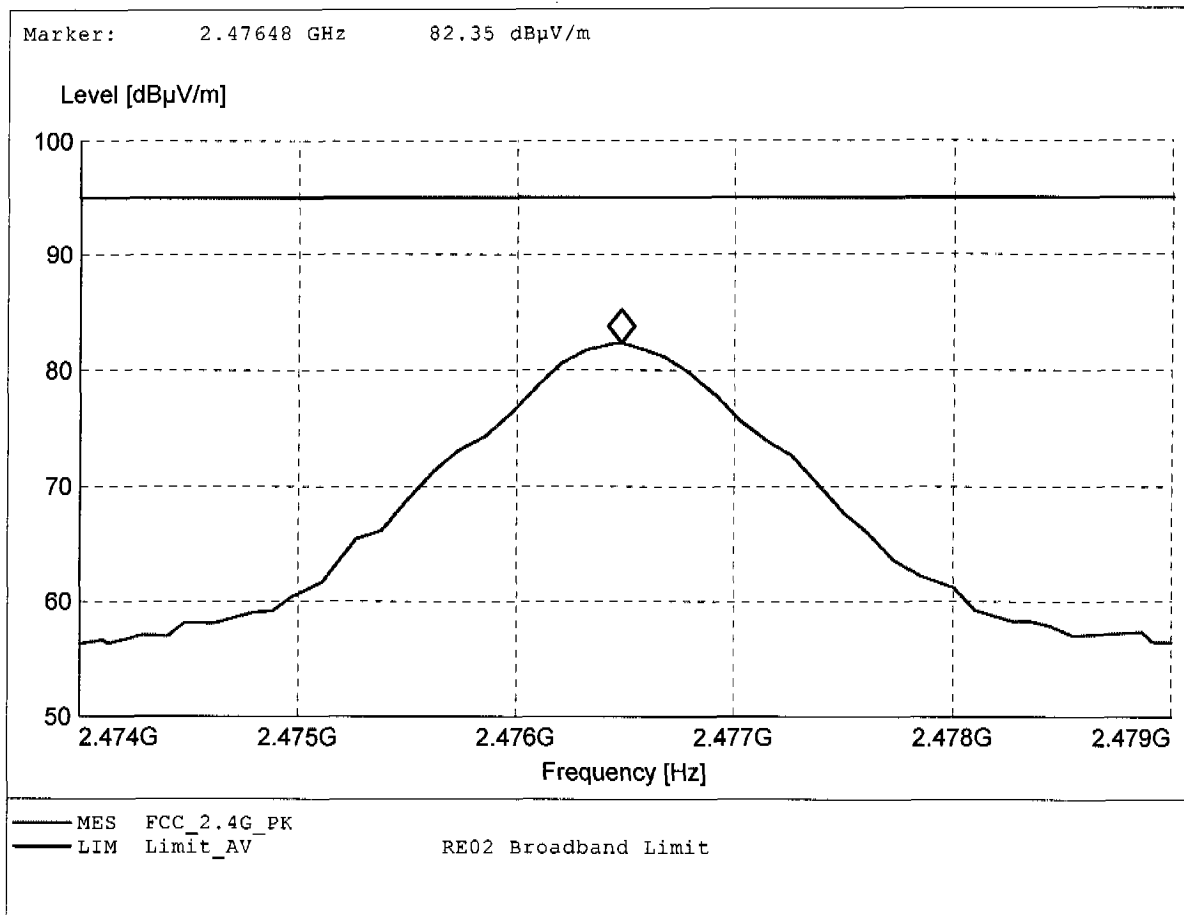

**Field Strength under normal conditions**

**according to FCC PART 15/SUBPART C :§15.249**


EUT: 2.4 GHz Cordless Phone Handset  
MODEL N O.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: according to §15.249  
Comment: Dist.: 3m, Ant.: HL 025

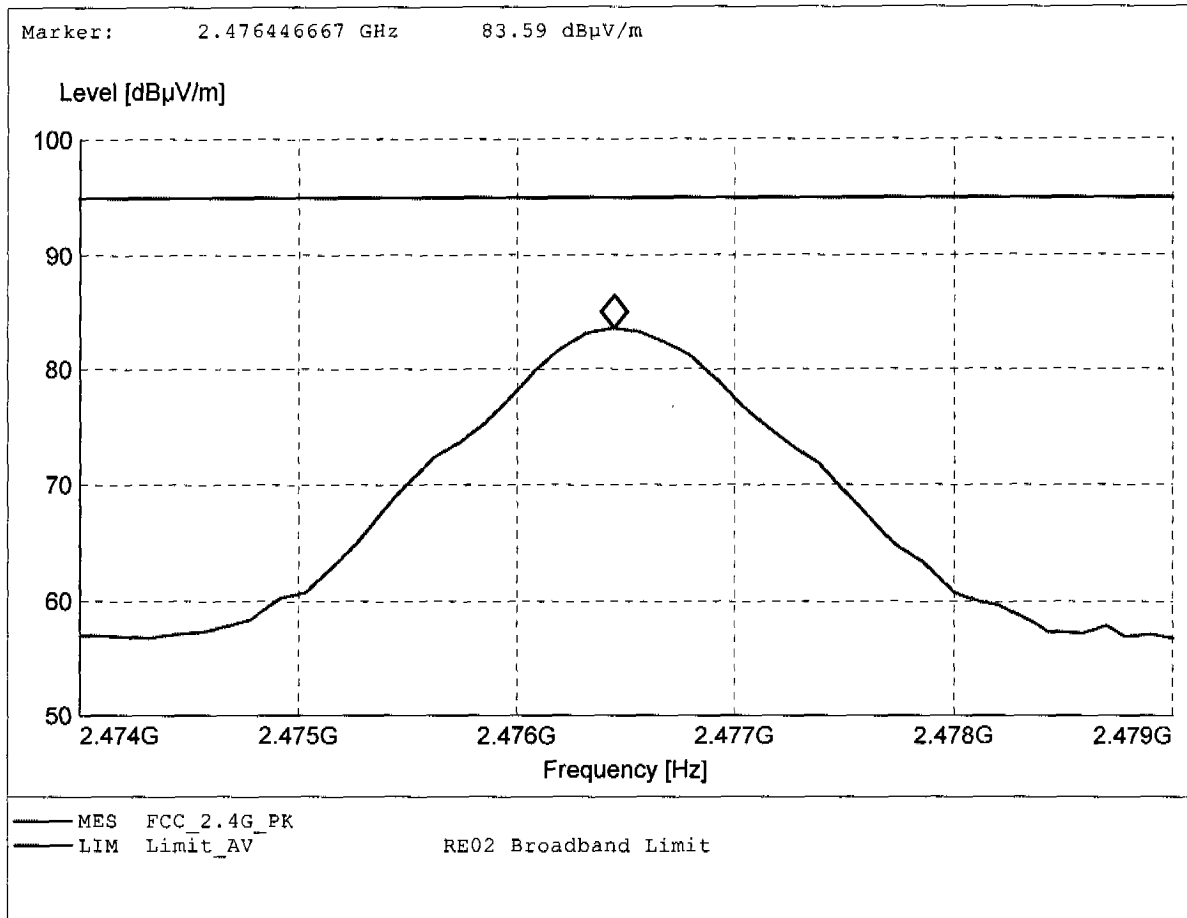

**Field Strength under normal conditions**

**according to FCC PART 15/SUBPART C :§15.249**


EUT: 2.4 GHz Cordless Phone Base  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: according to §15.249  
Comment: Dist.: 3m, Ant.: HL025

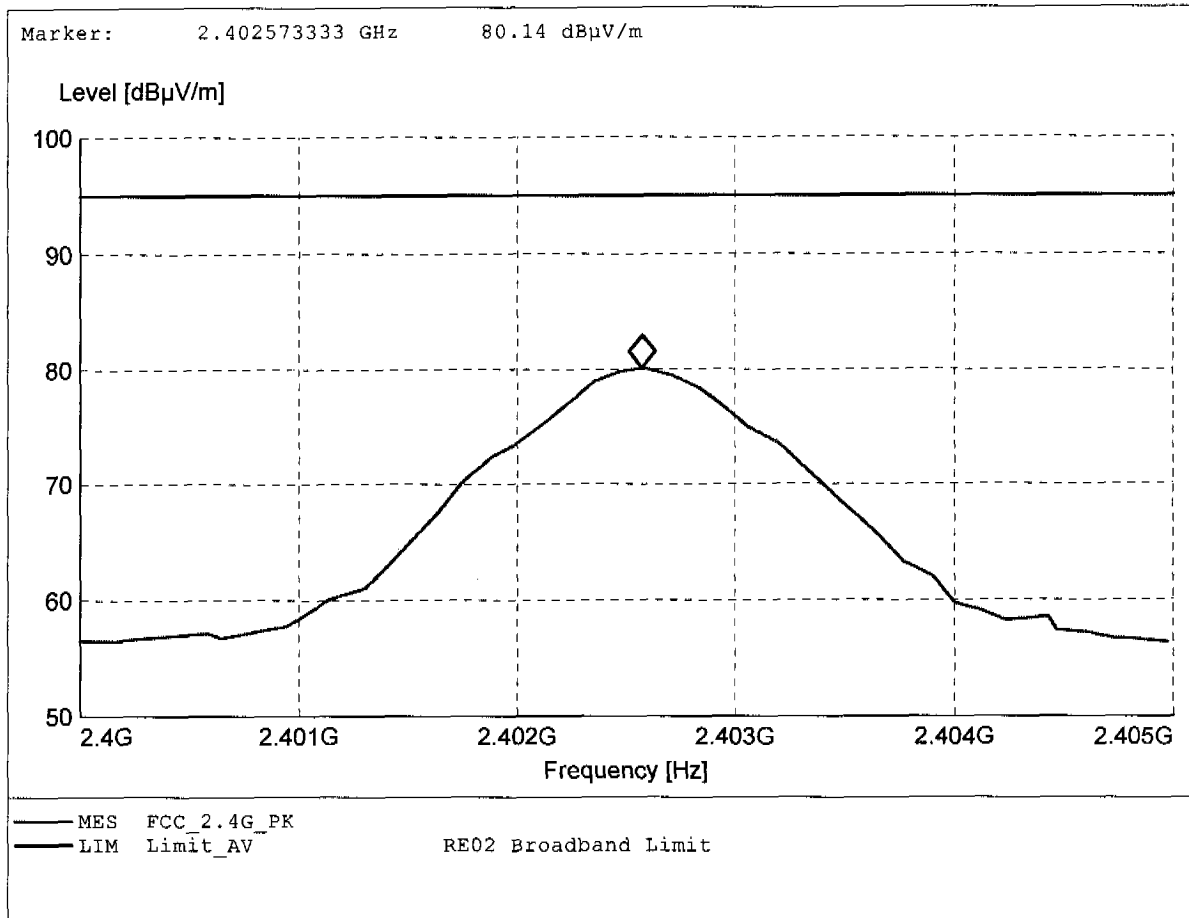

**Field Strength under normal conditions**

**according to FCC PART 15/SUBPART C :§15.249**


EUT: 2.4 GHz Cordless Phone Base  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: according to §15.249  
Comment: Dist.: 3m, Ant.: HL025

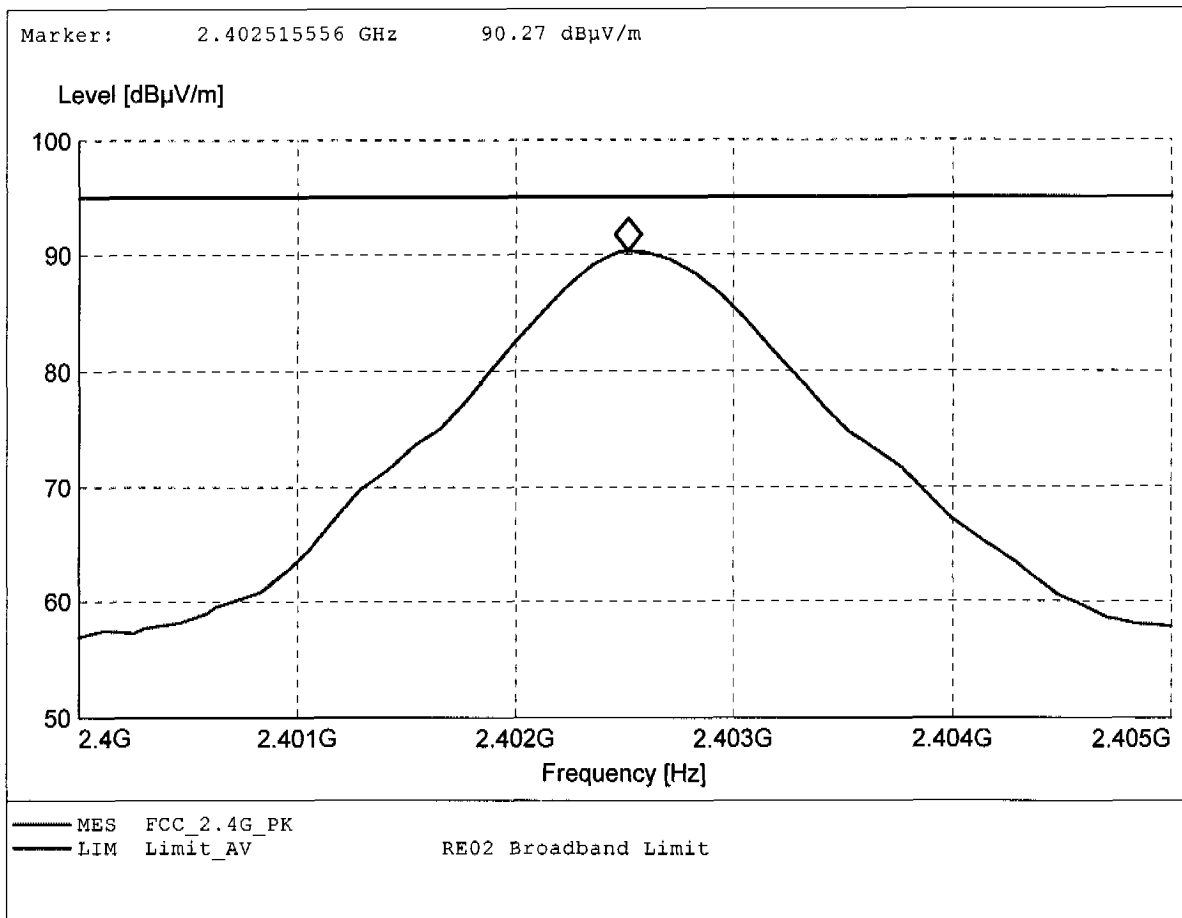

**Field Strength under normal conditions**

**according to FCC PART 15/SUBPART C :§15.249**

EUT: 2.4 GHz Cordless Phone Base  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: according to §15.249  
Comment: Dist.: 3m, Ant.: HL025

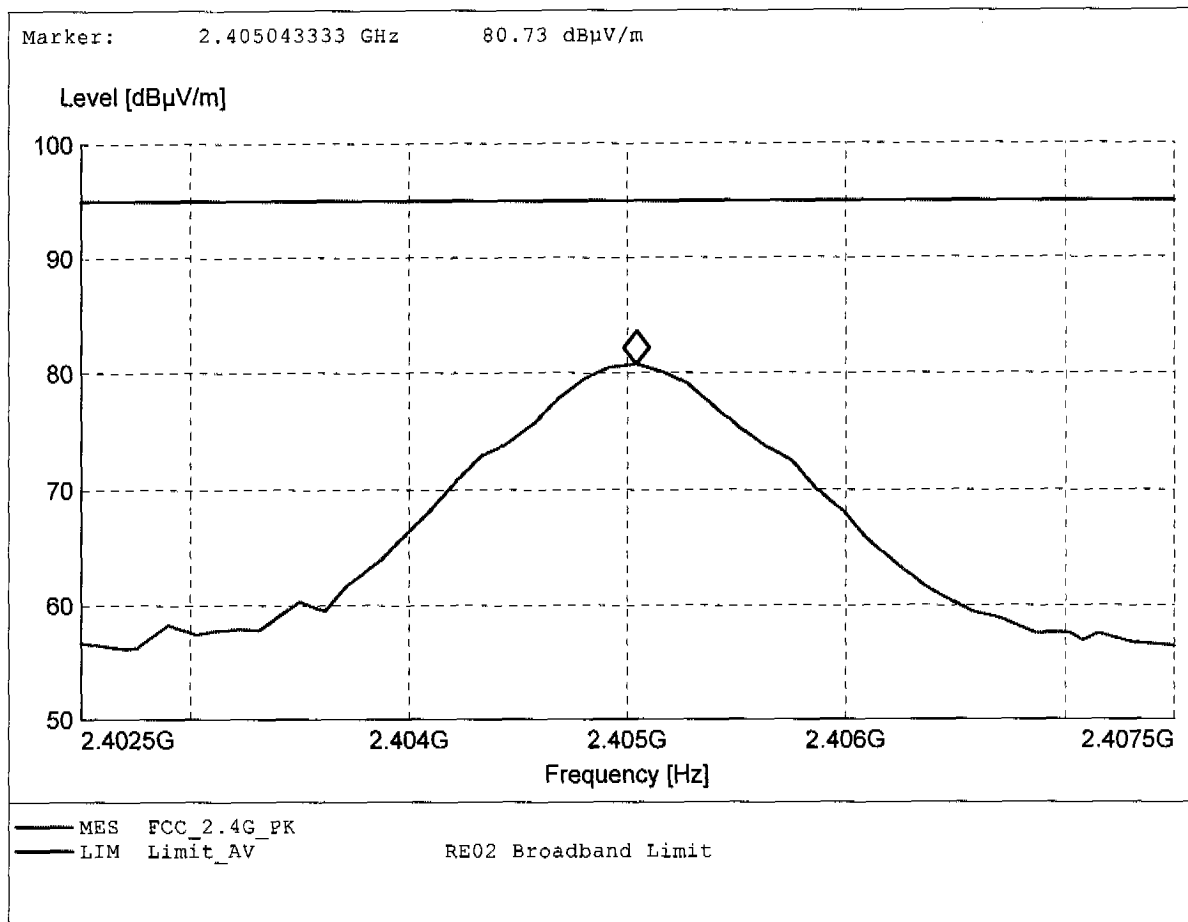




**Field Strength under normal conditions**

**according to FCC PART 15/SUBPART C :§15.249**

EUT: 2.4 GHz Cordless Phone Base  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: according to §15.249  
Comment: Dist.: 3m, Ant.: HL025

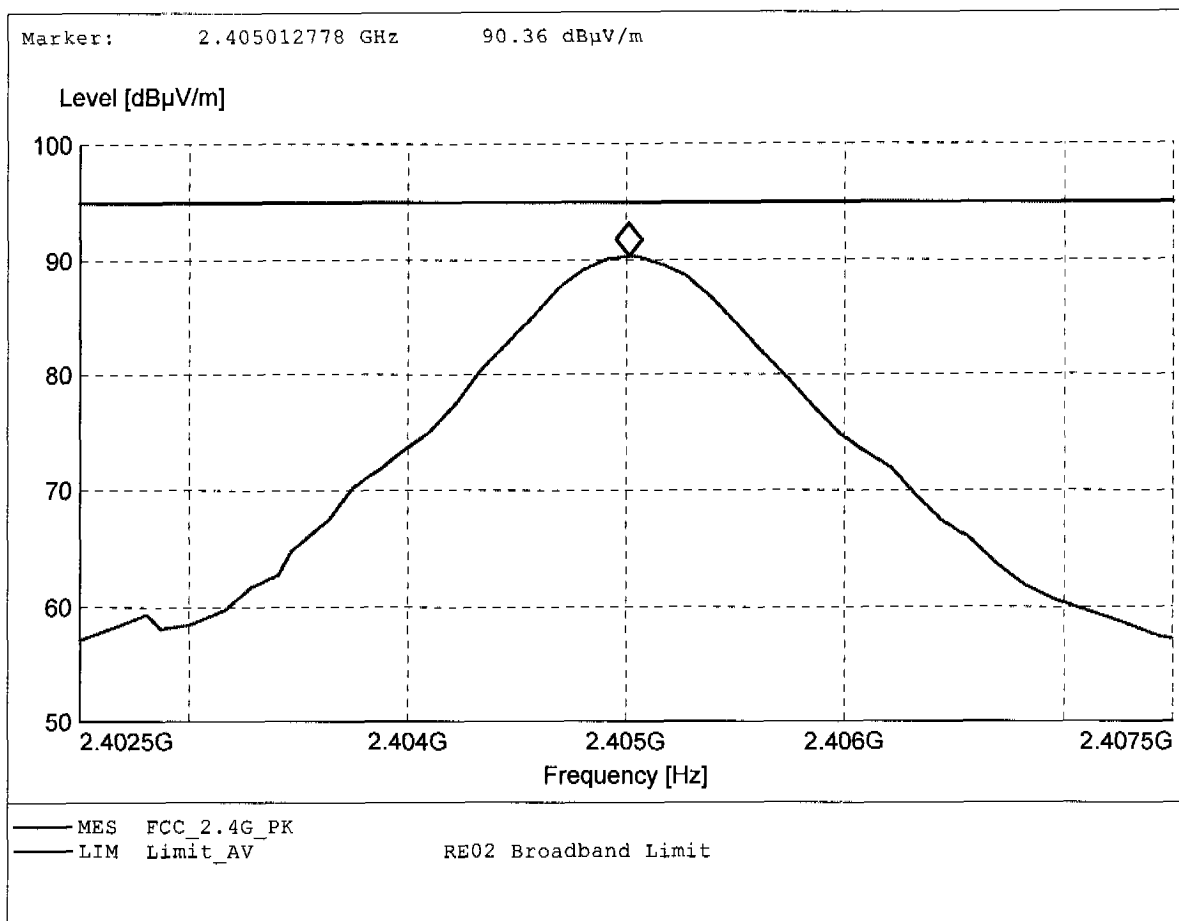


## Appendix C

Spurious Emissions radiated - Transmitter operating

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 181.603MHz, Emax: 34.14dBµV/m, RBW: 100kHz

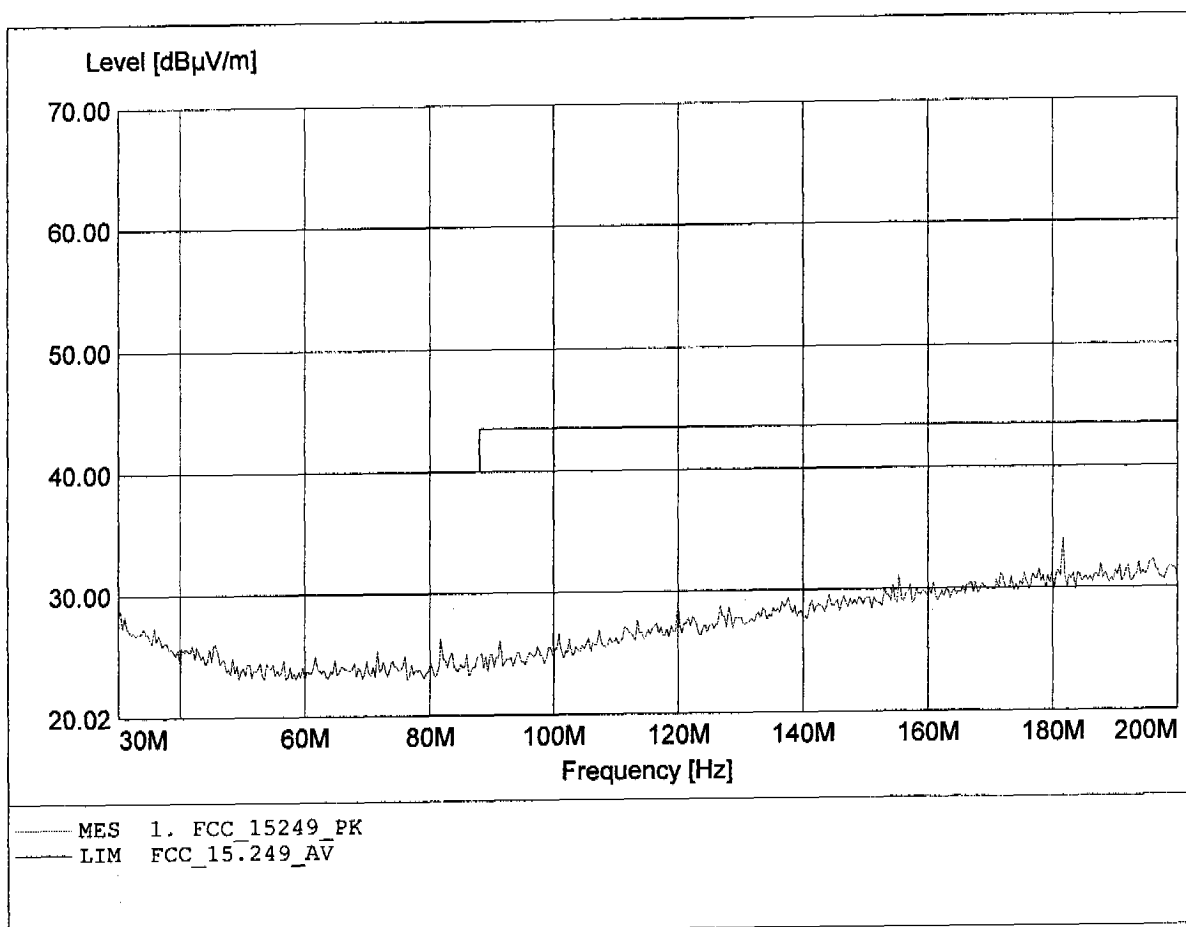

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 146.172MHz, Emax: 32.32dB $\mu$ V/m, RBW: 100kHz

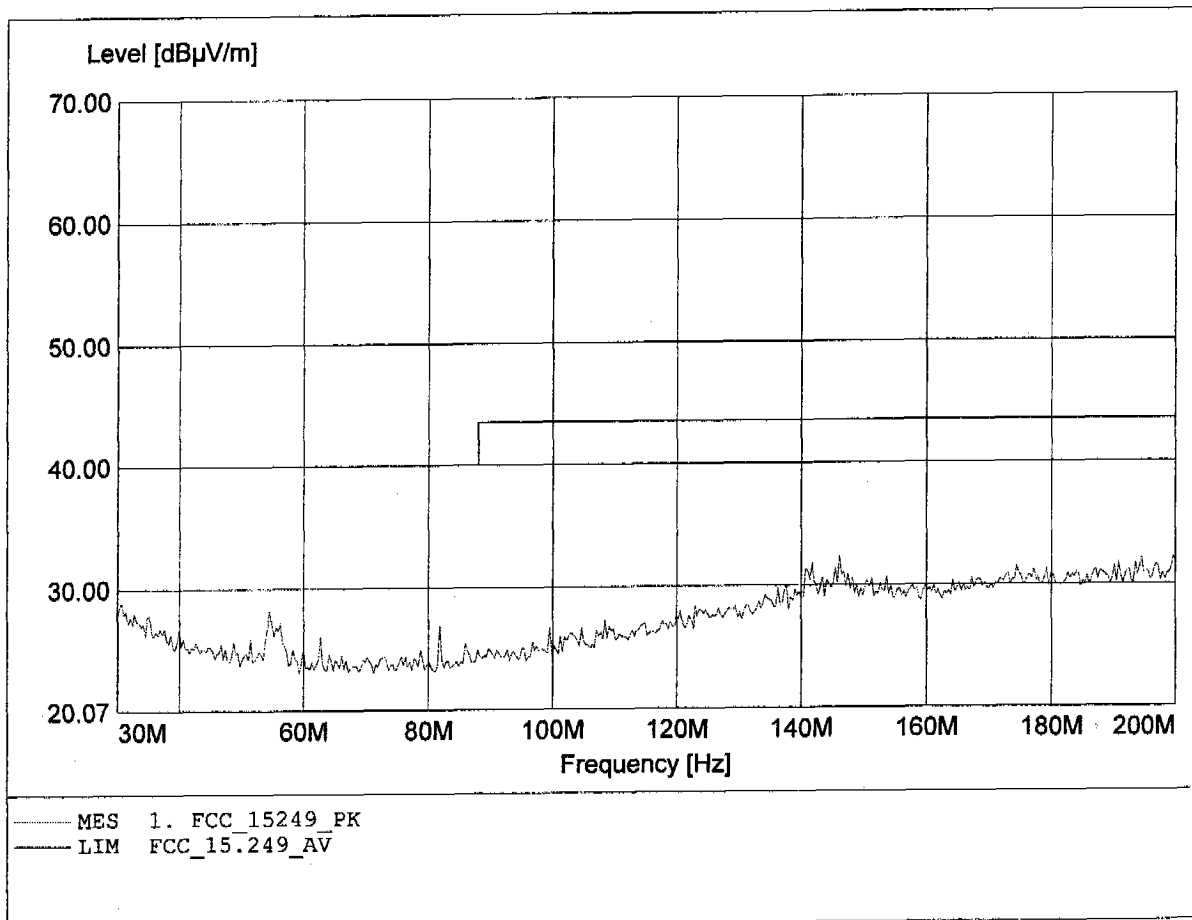

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 801.202MHz, Emax: 32.92dBµV/m, RBW: 100kHz

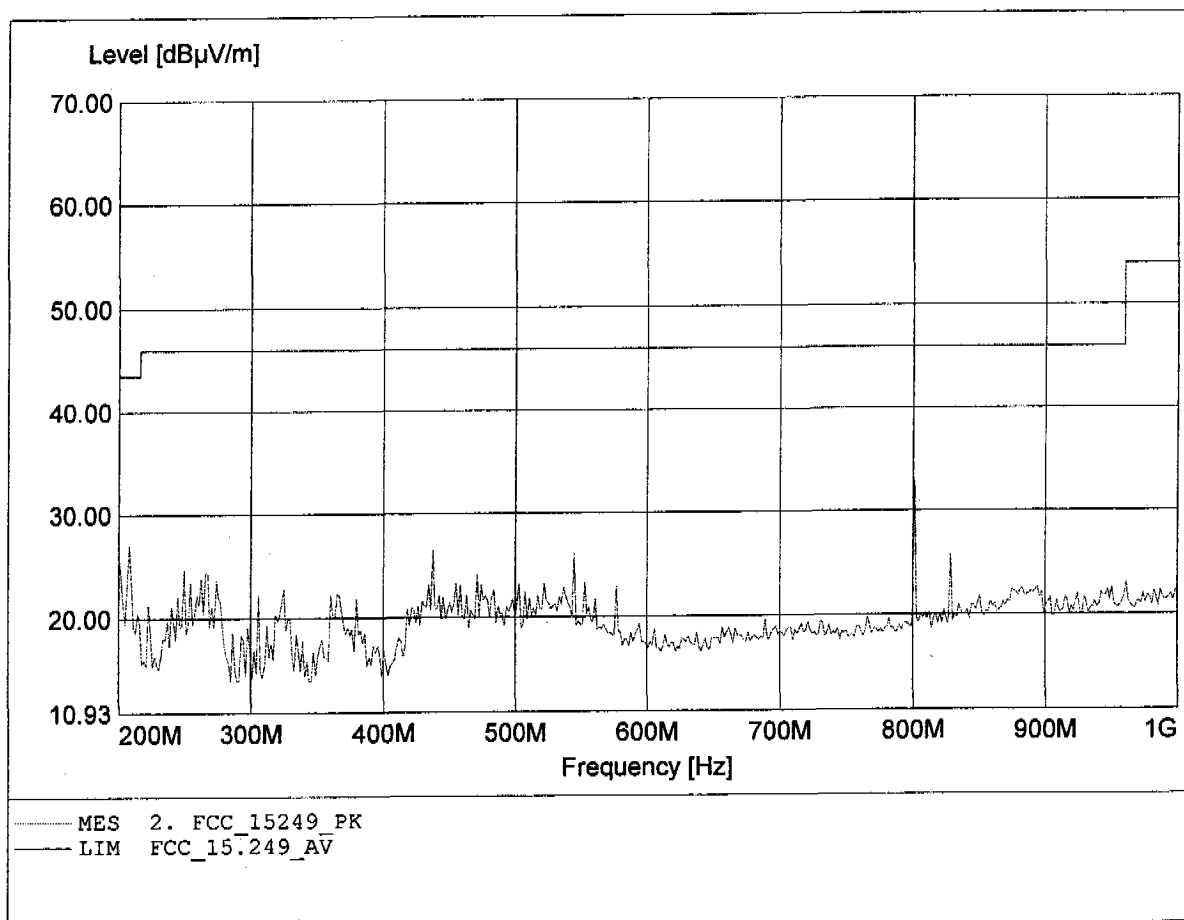

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 801.202MHz, Emax: 34.77dBµV/m, RBW: 100kHz

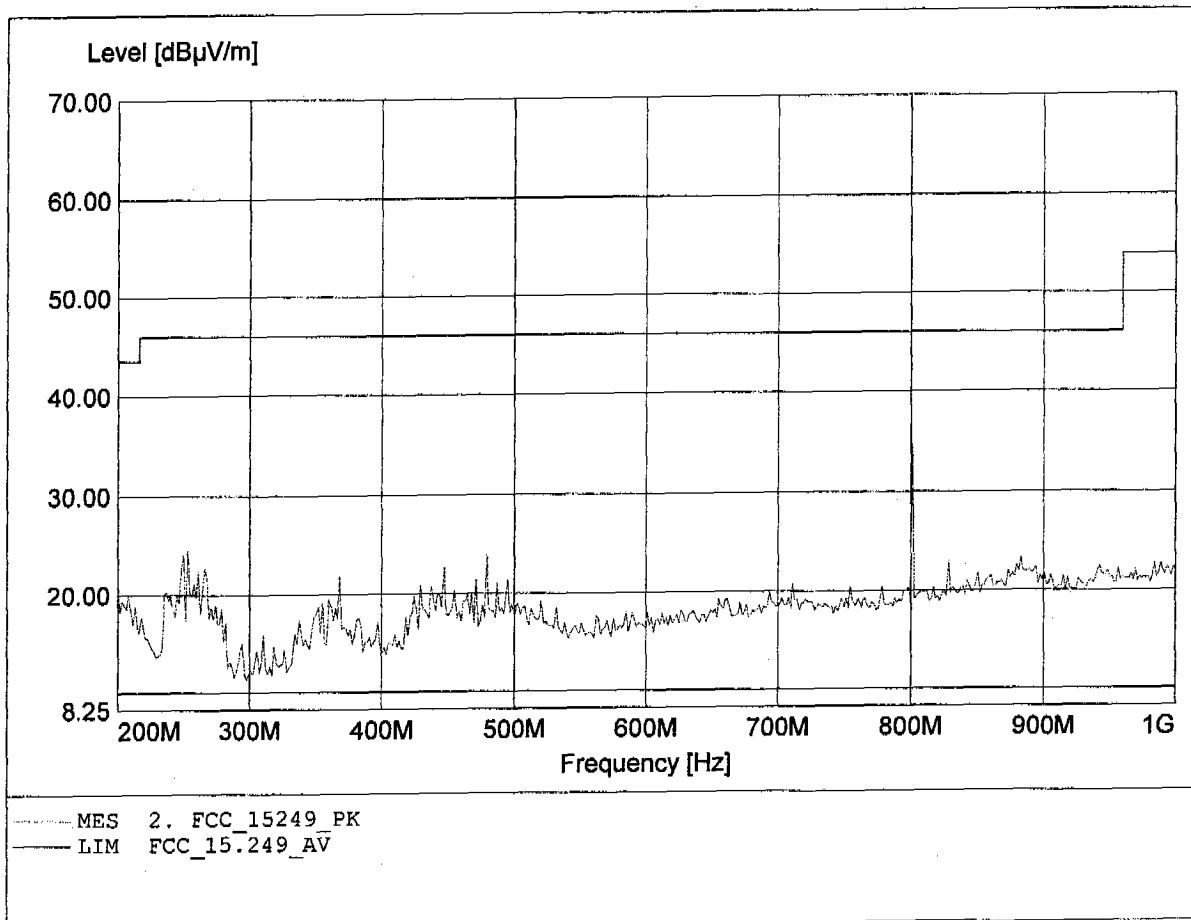

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC ( AC/DC adaptor))  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.401GHz, Emax: 78.80dBµV/m, RBW: 1MHz

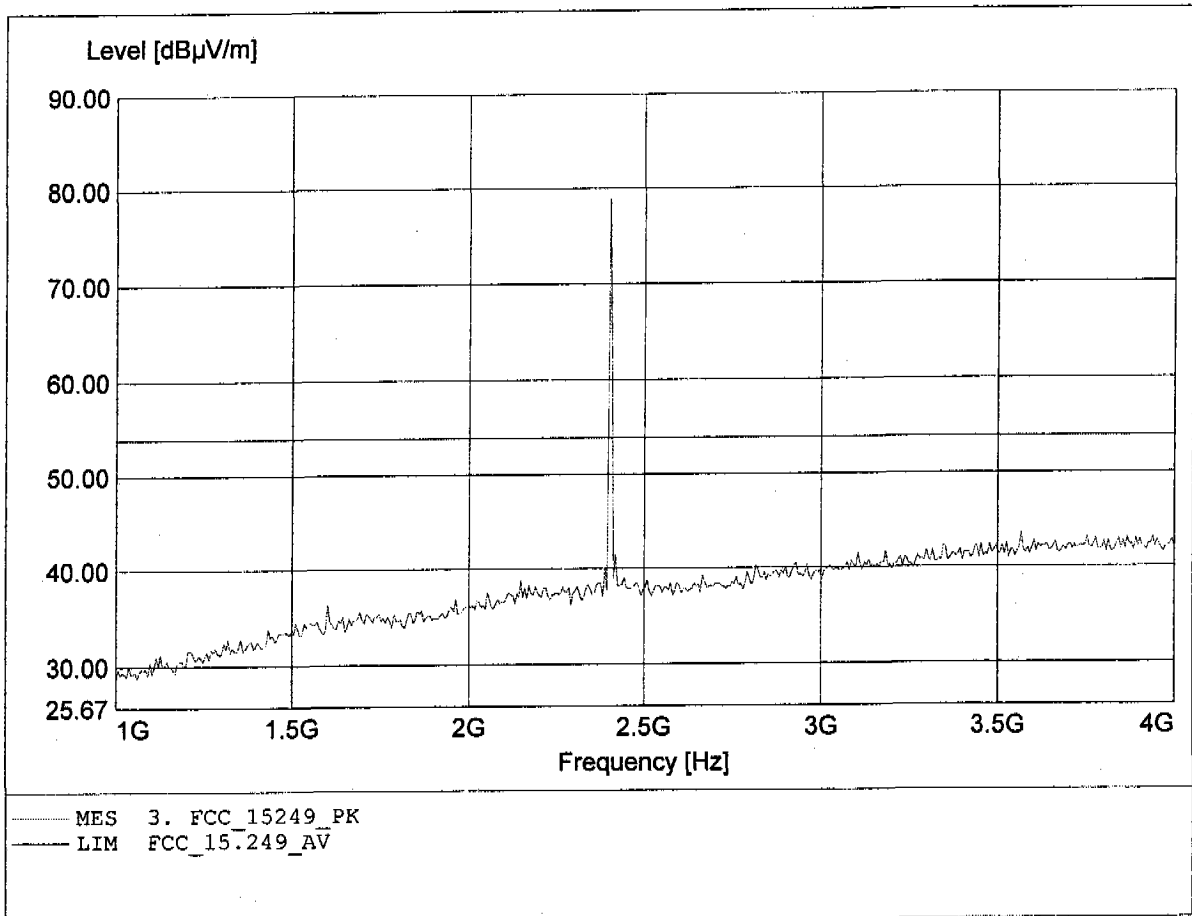

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC ( AC/DC adaptor )  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.401GHz, Emax: 87.41dBµV/m, RBW: 1MHz

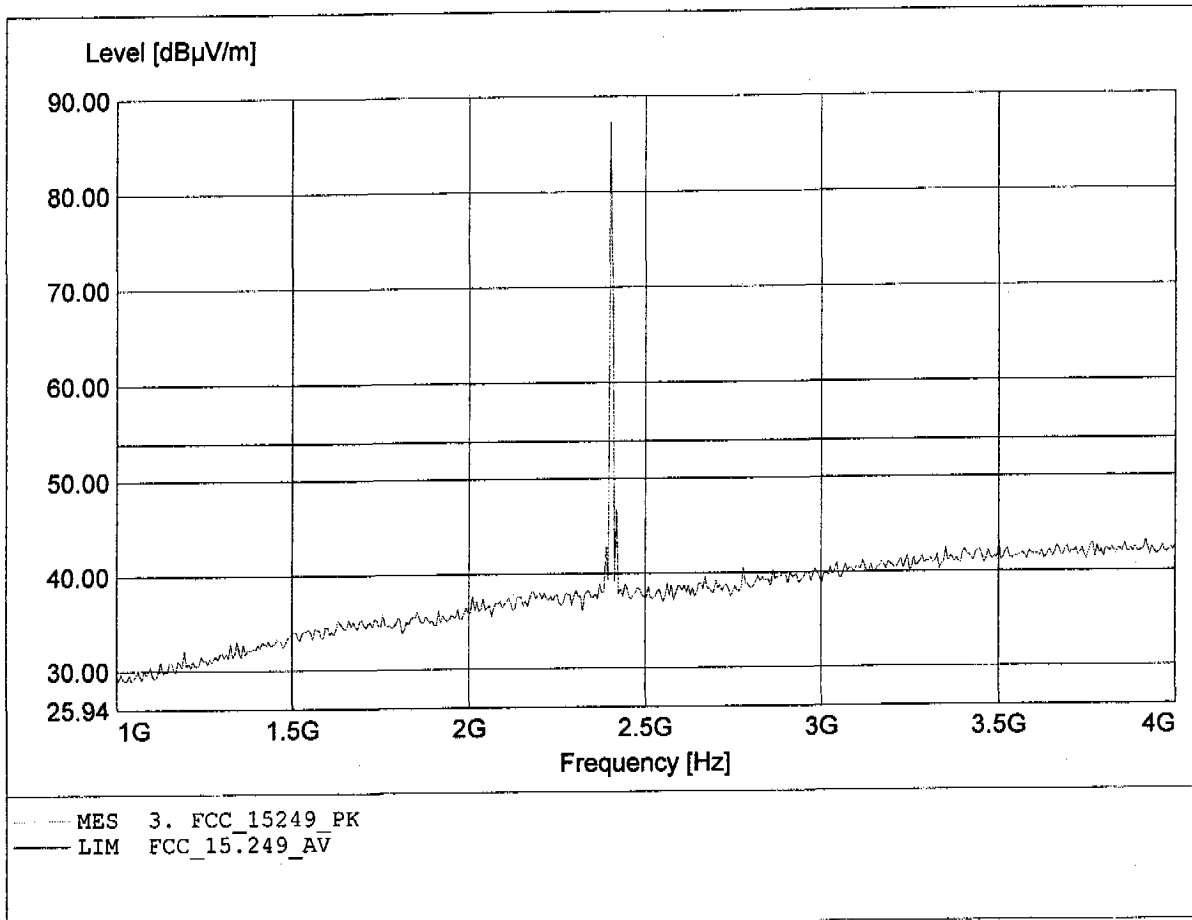




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.535GHz, Emax: 51.83dBµV/m, RBW: 1MHz

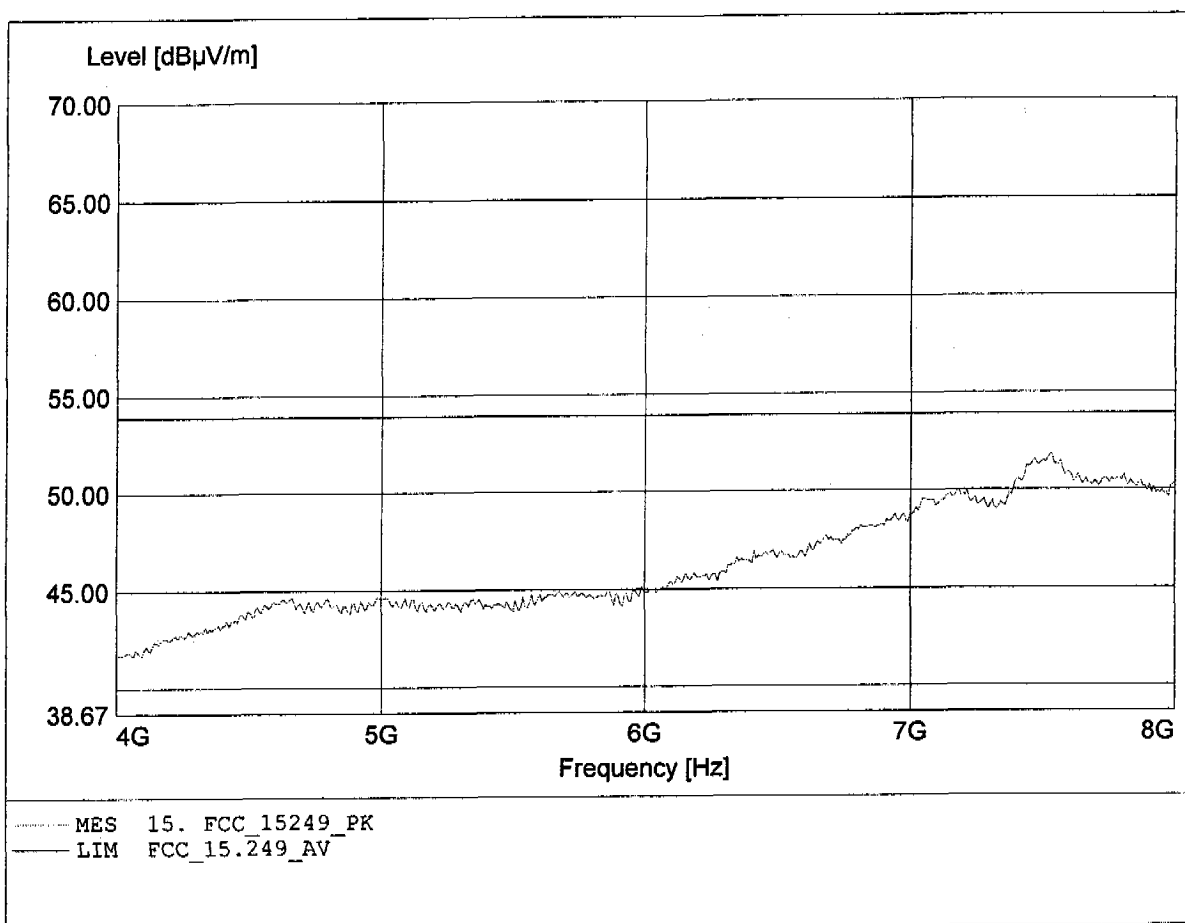

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.535GHz, Emax: 51.76dBµV/m, RBW: 1MHz

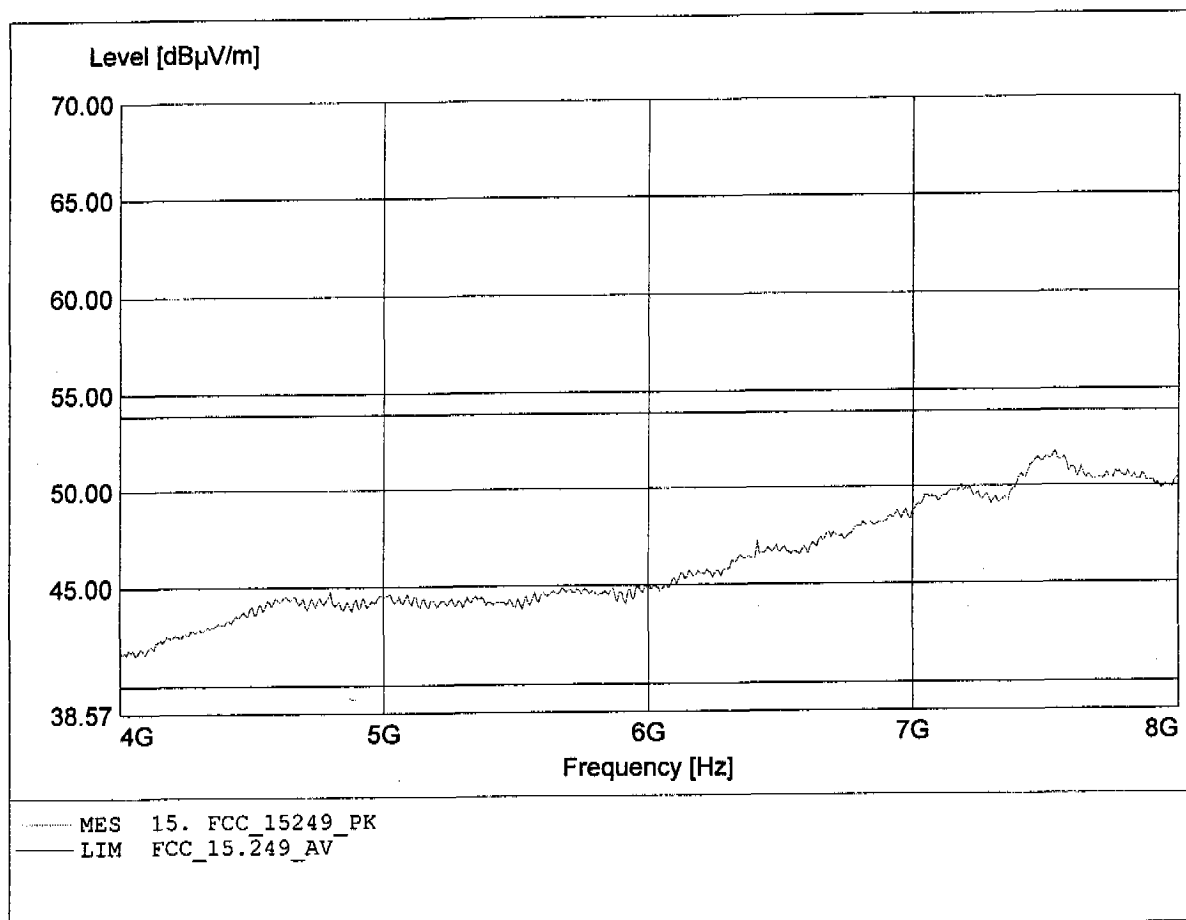

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.655GHz, Emax: 46.35dBµV/m, RBW: 1MHz

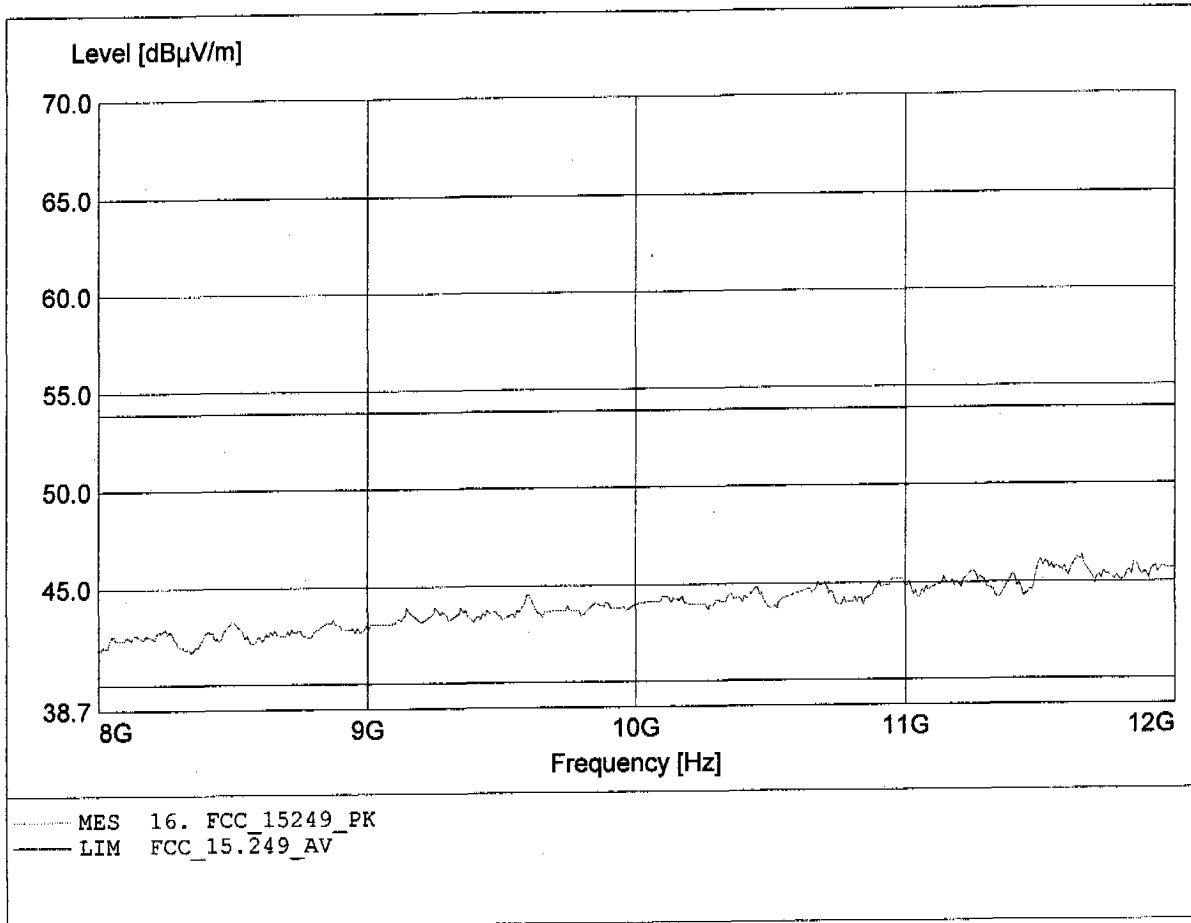

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.647GHz, Emax: 47.43dBµV/m, RBW: 1MHz

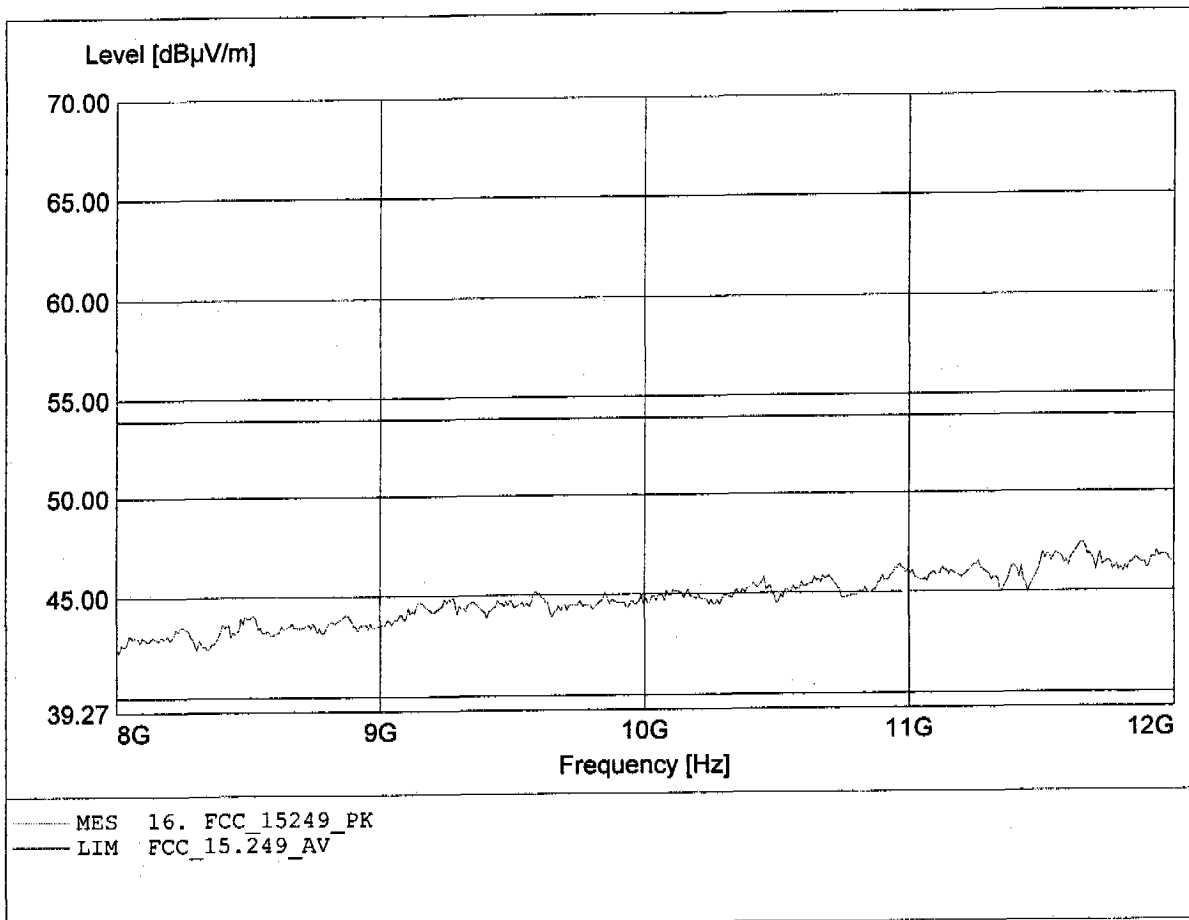

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to S15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 51.08dB $\mu$ V/m, RBW: 1MHz

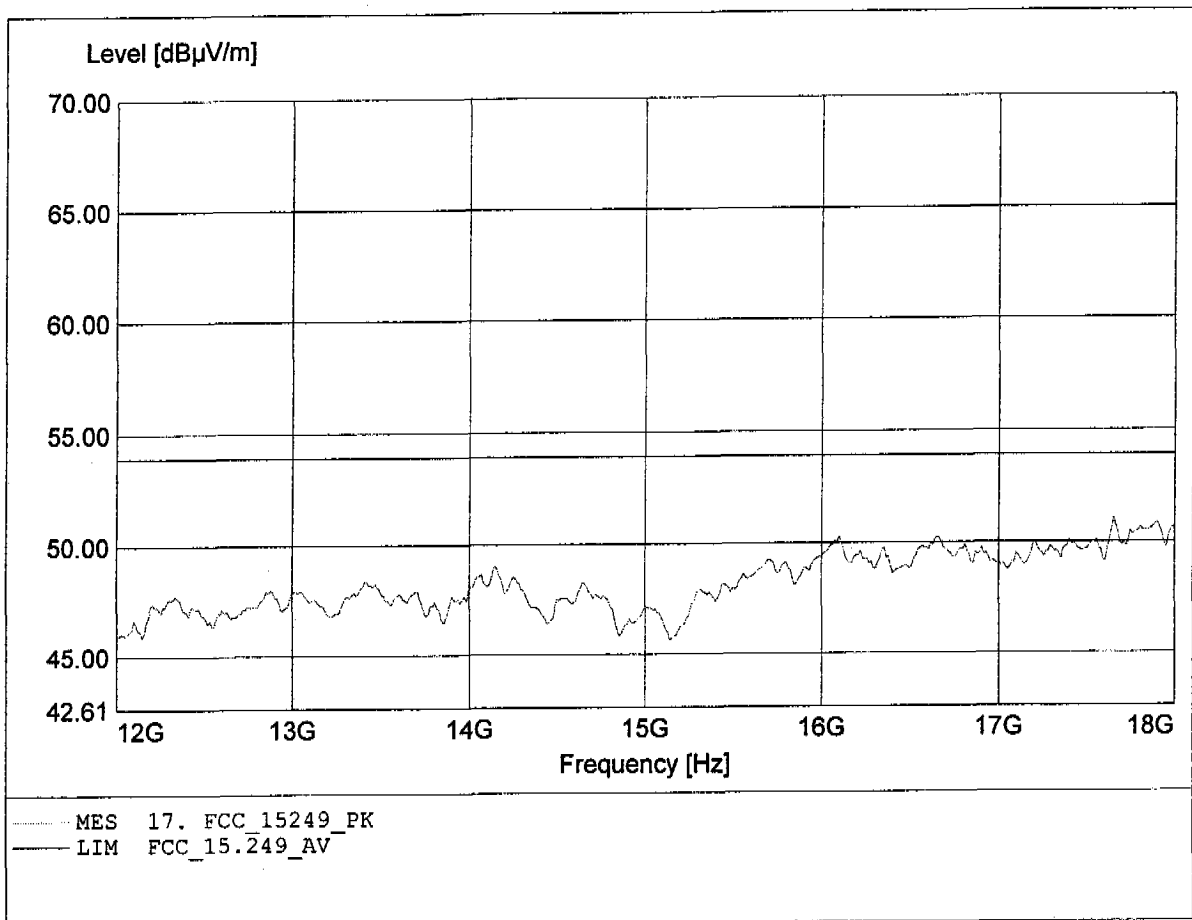

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 51.65dBµV/m, RBW: 1MHz

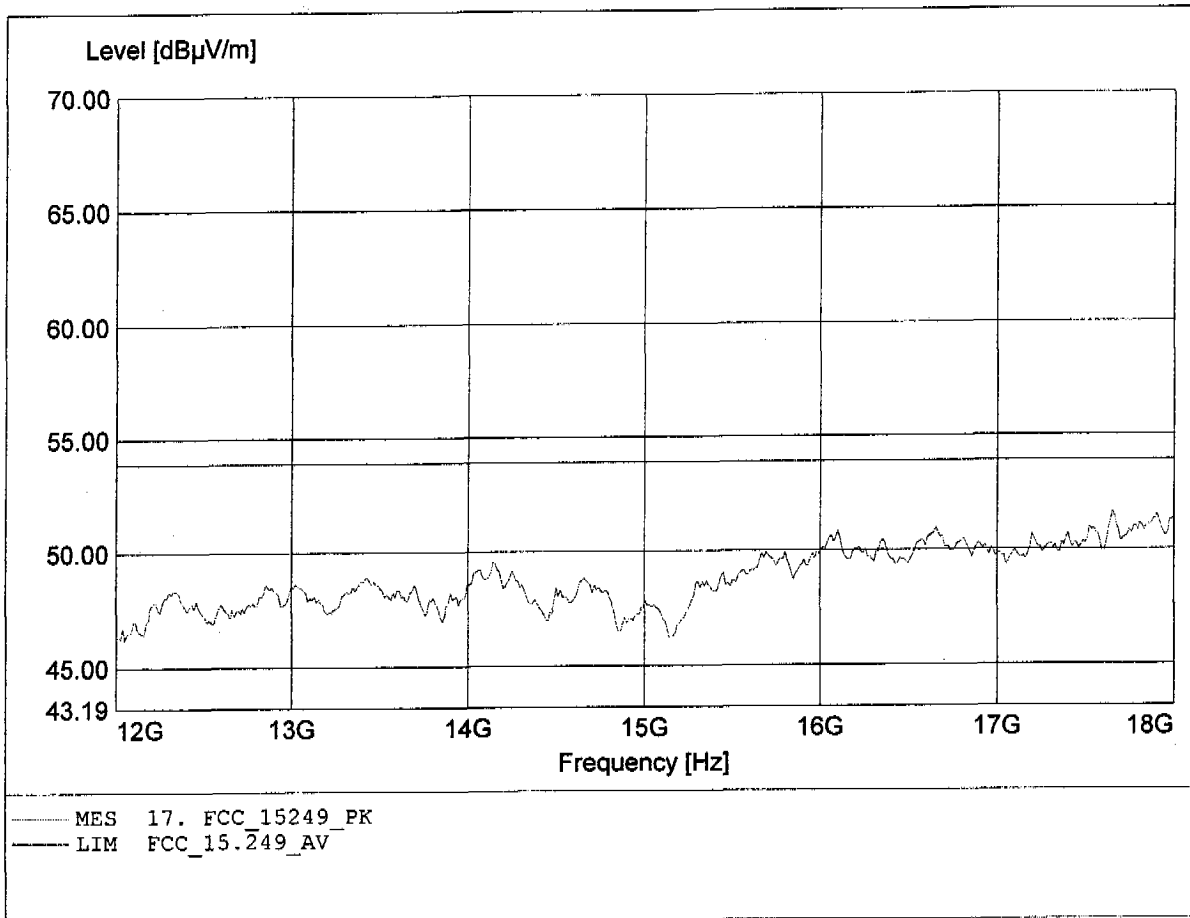

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.193GHz, Emax: 44.88dBµV/m, RBW: 1MHz

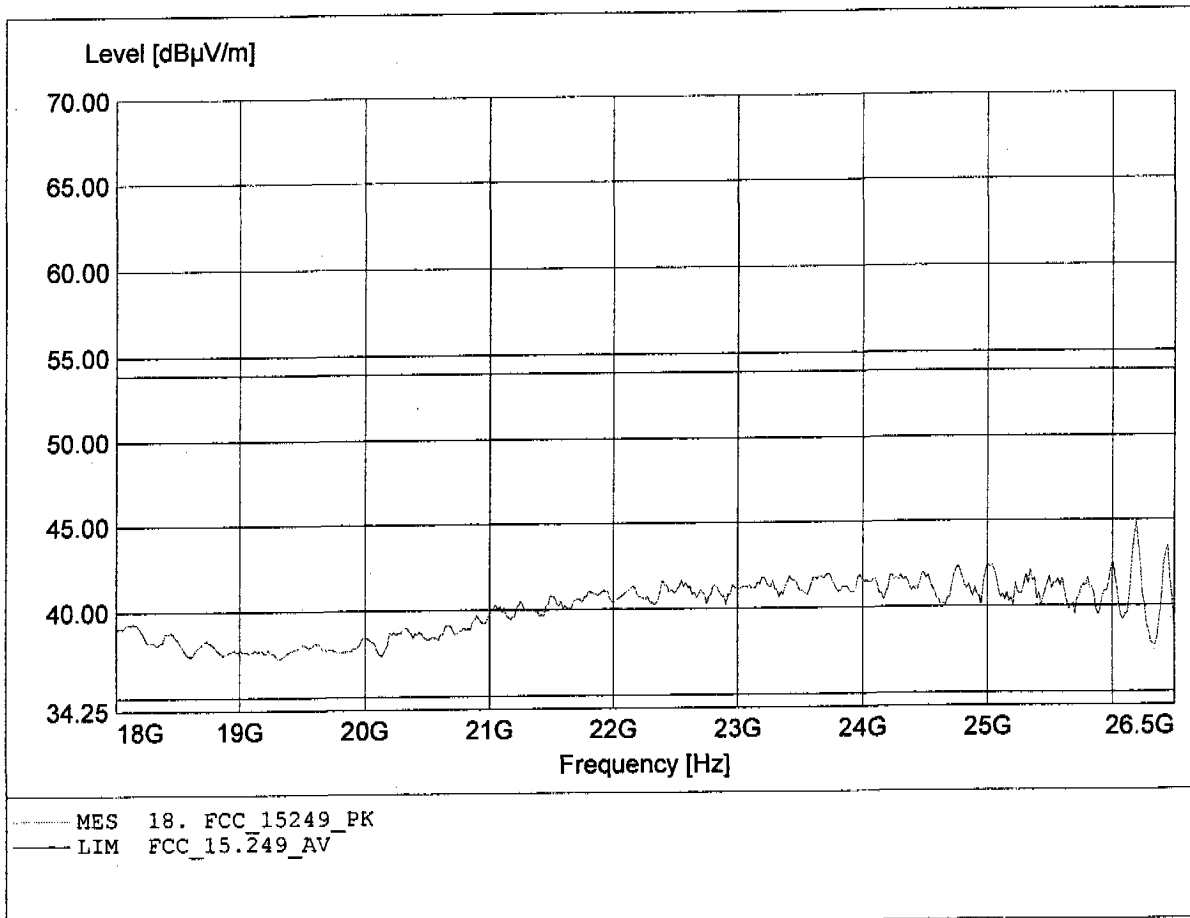

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.193GHz, Emax: 44.87dBµV/m, RBW: 1MHz

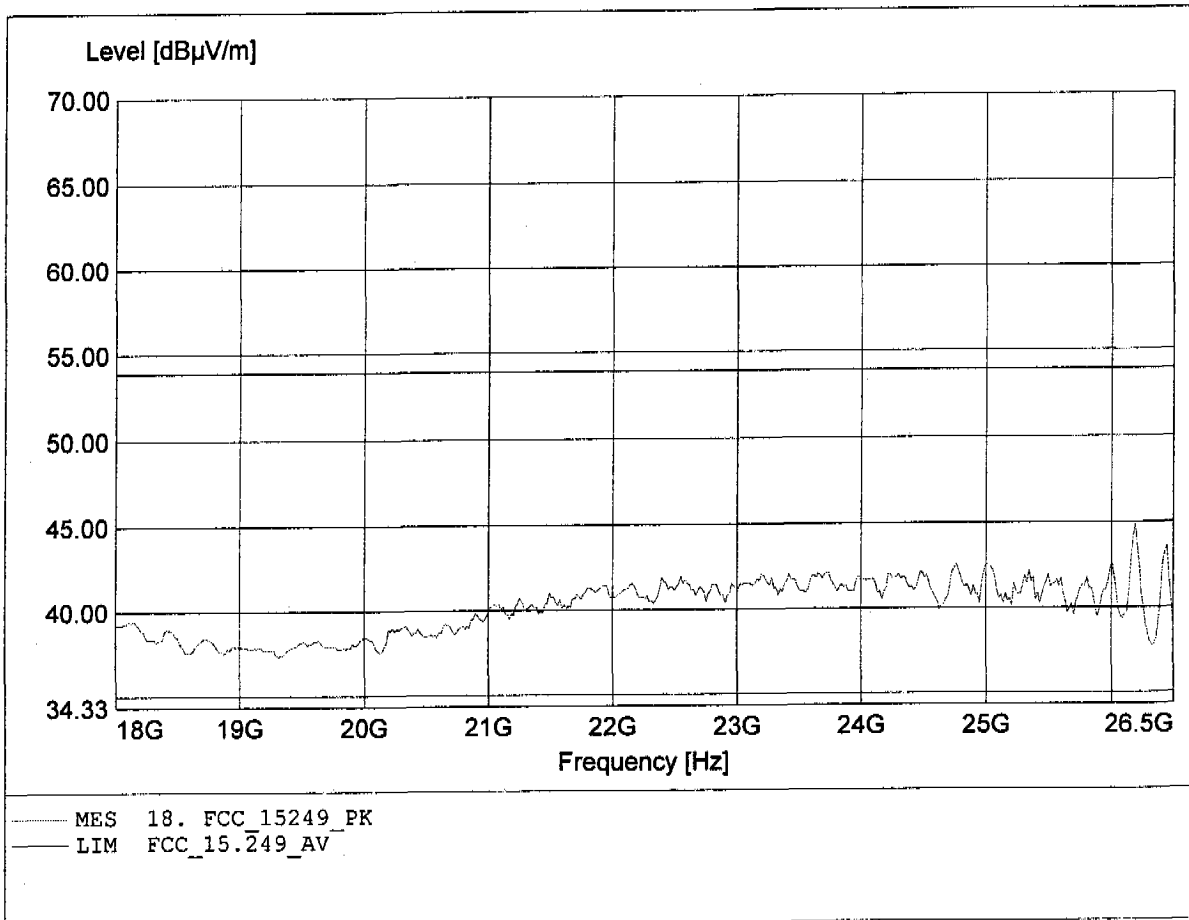




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 194.549MHz, Emax: 32.05dBµV/m, RBW: 100kHz

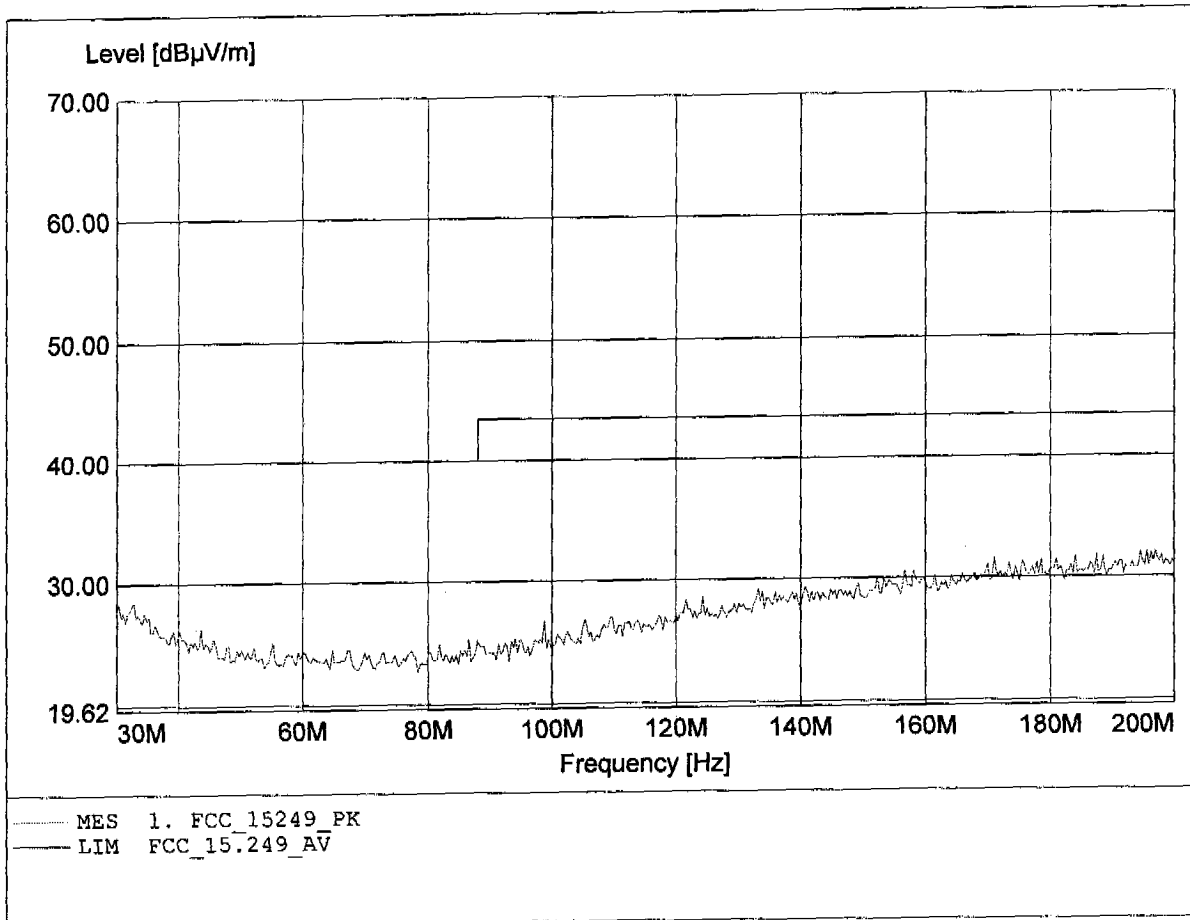

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 143.447MHz, Emax: 33.21dBµV/m, RBW: 100kHz

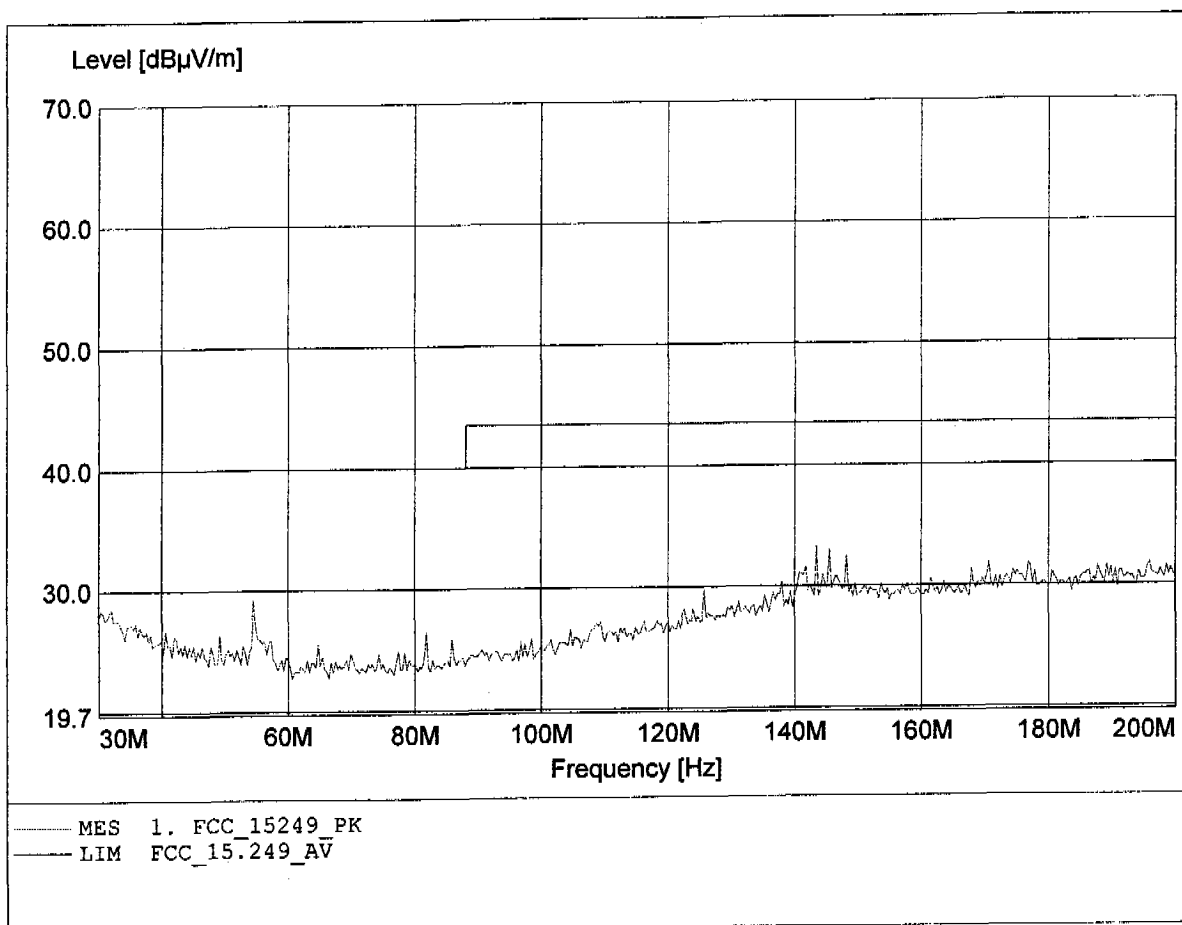

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 802.806MHz, Emax: 32.97dBµV/m, RBW: 100kHz

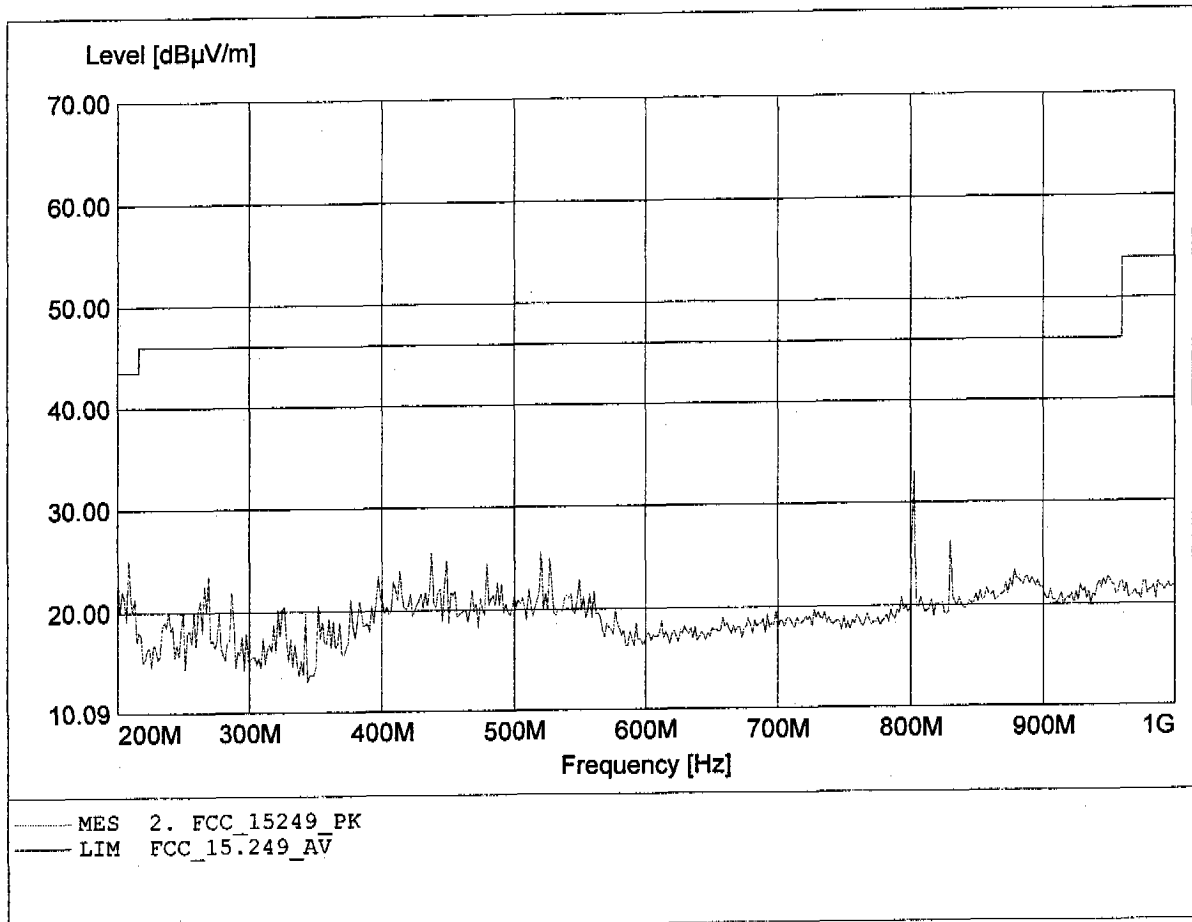

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 802.806MHz, Emax: 35.02dBµV/m, RBW: 100kHz

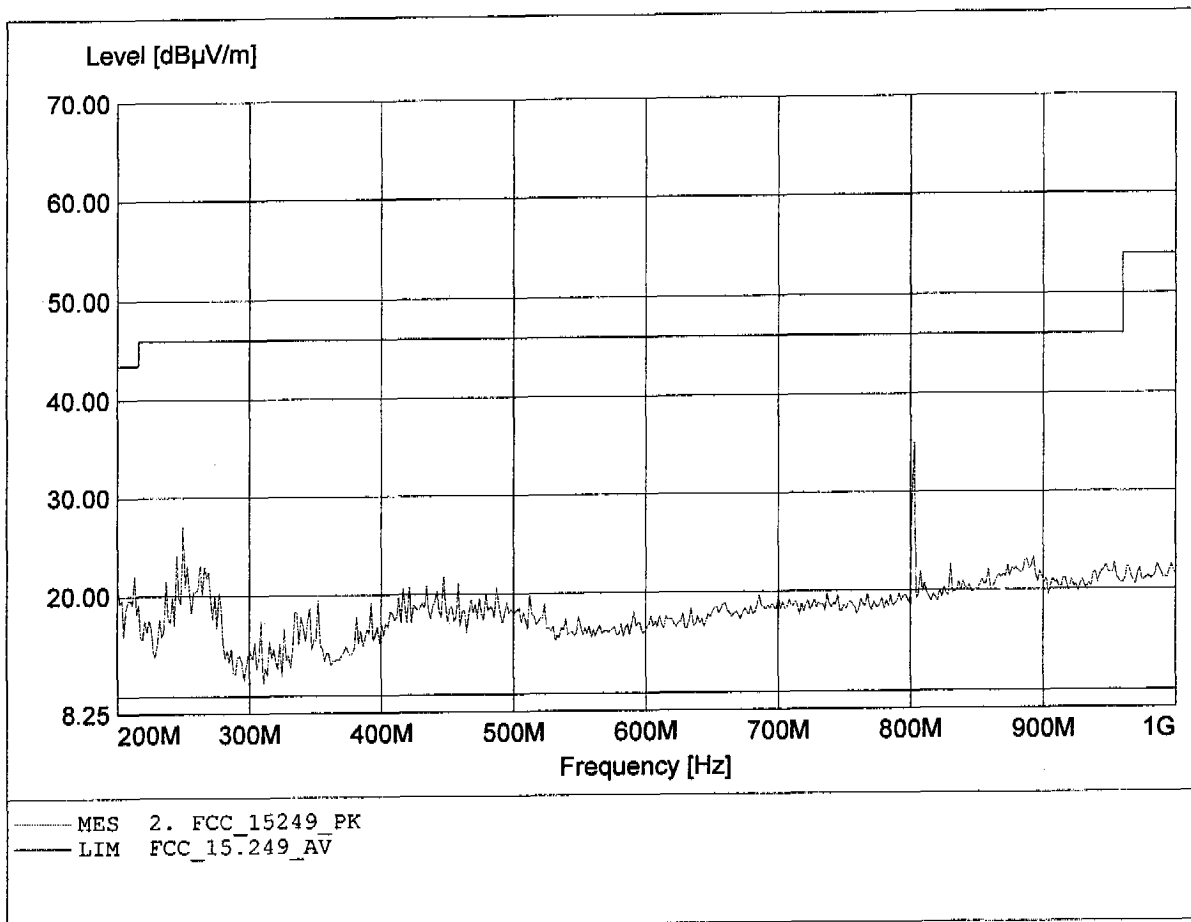

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC ( AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.407GHz, Emax: 78.21dBµV/m, RBW: 1MHz

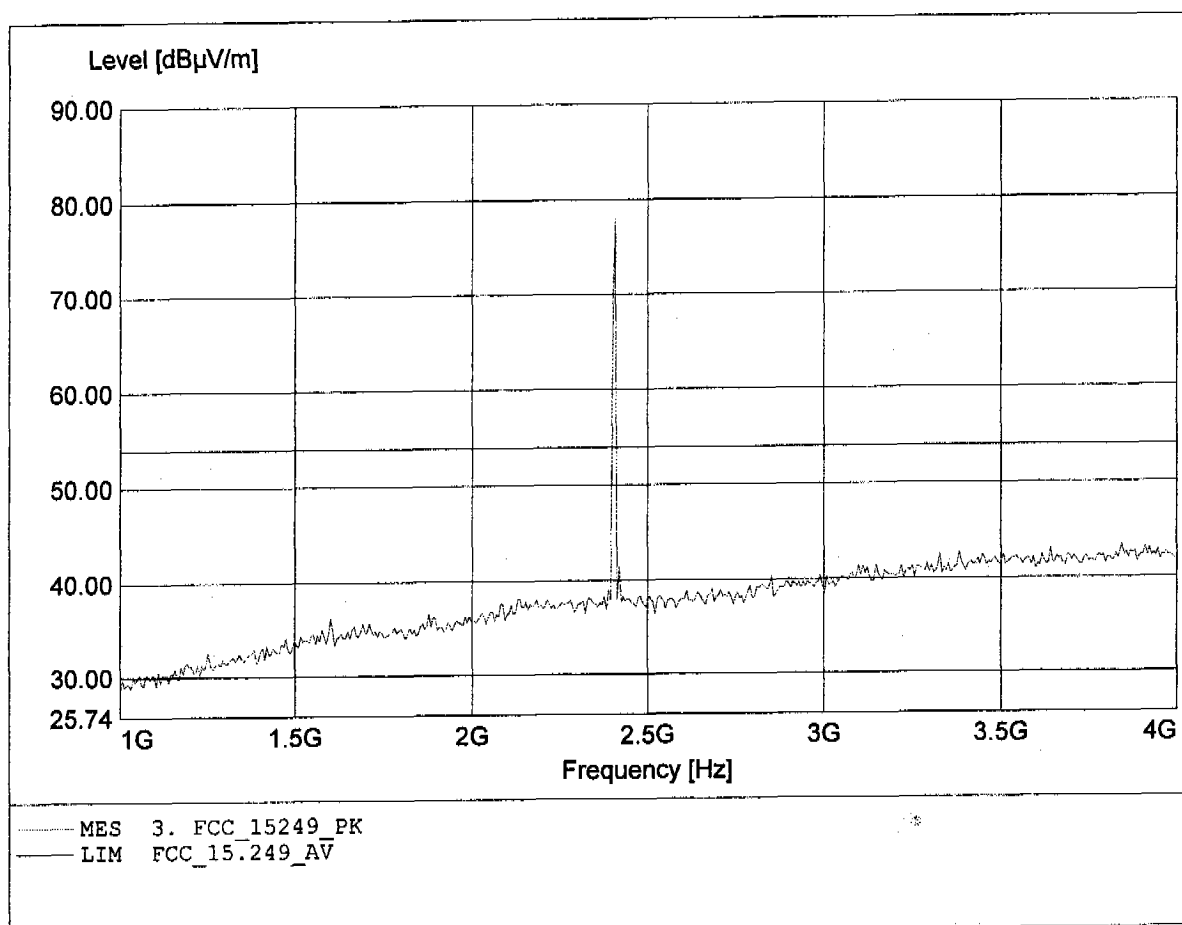

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC( AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.407GHz, Emax: 88.07dB $\mu$ V/m, RBW: 1MHz

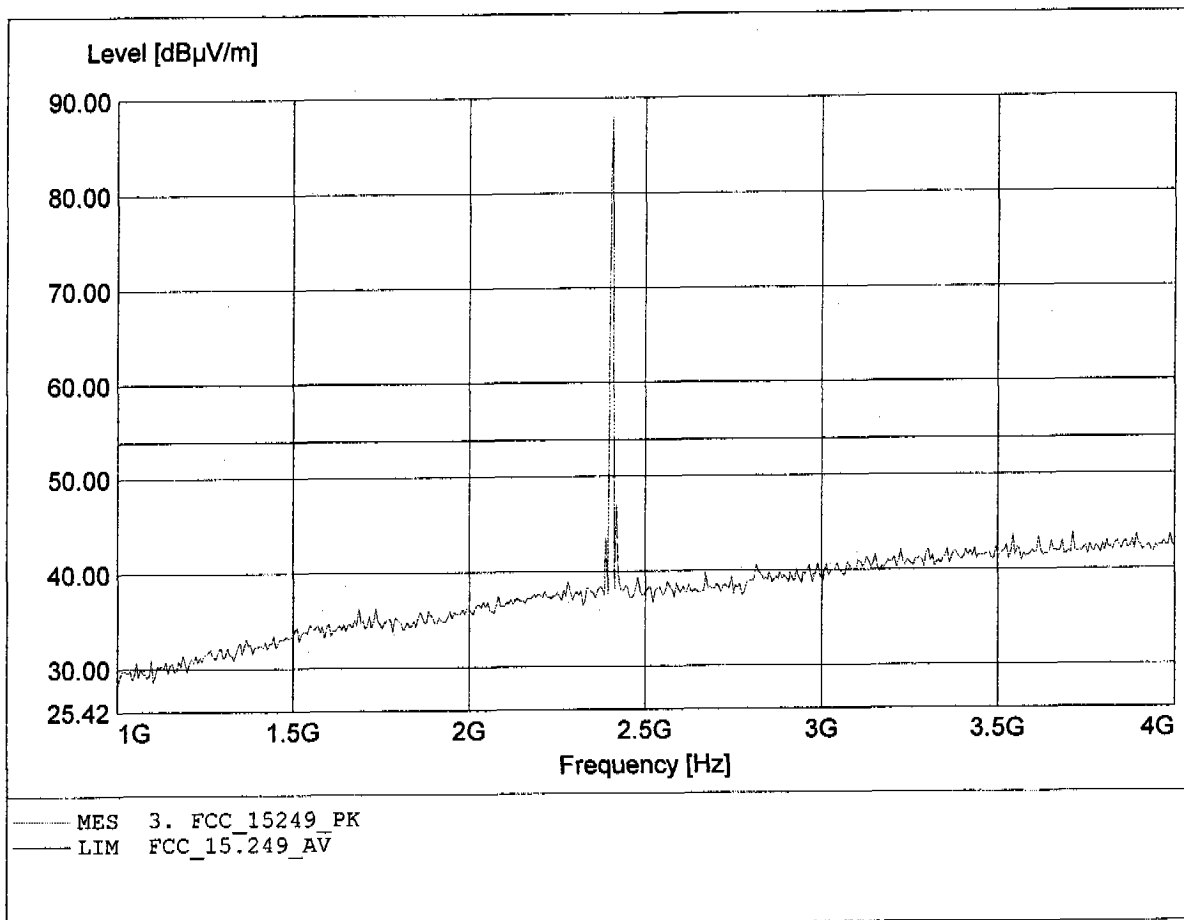

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.527GHz, Emax: 51.84dBµV/m, RBW: 1MHz

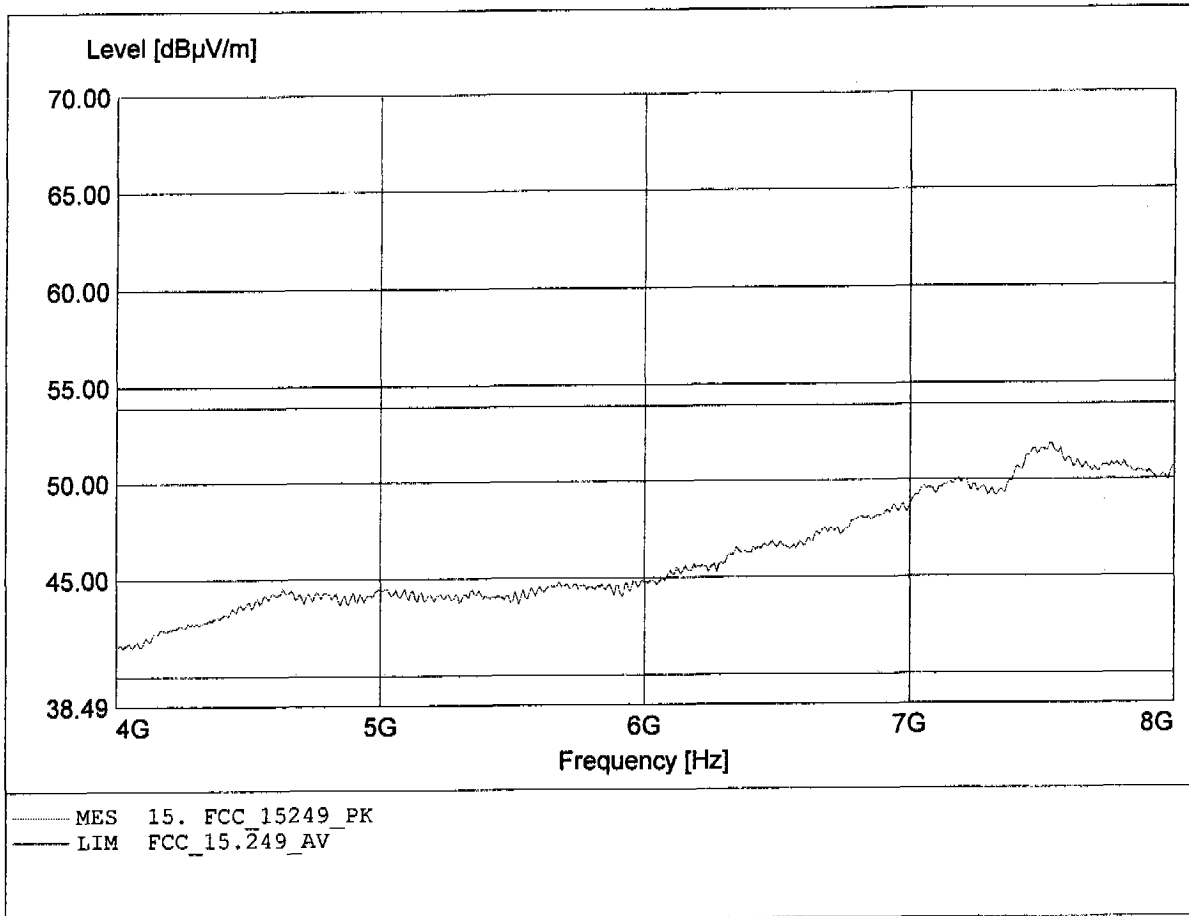

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.535GHz, Emax: 51.86dBµV/m, RBW: 1MHz

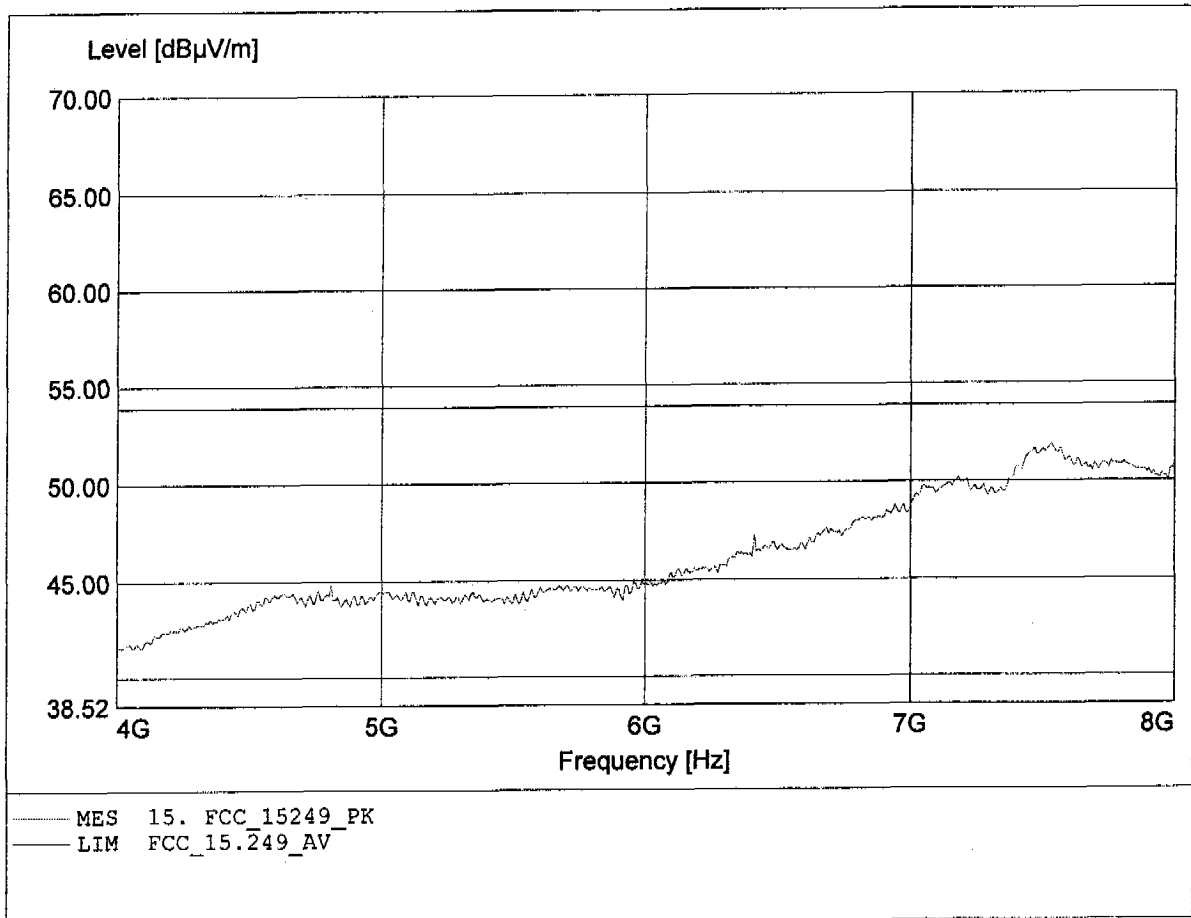




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.655GHz, Emax: 46.62dBµV/m, RBW: 1MHz

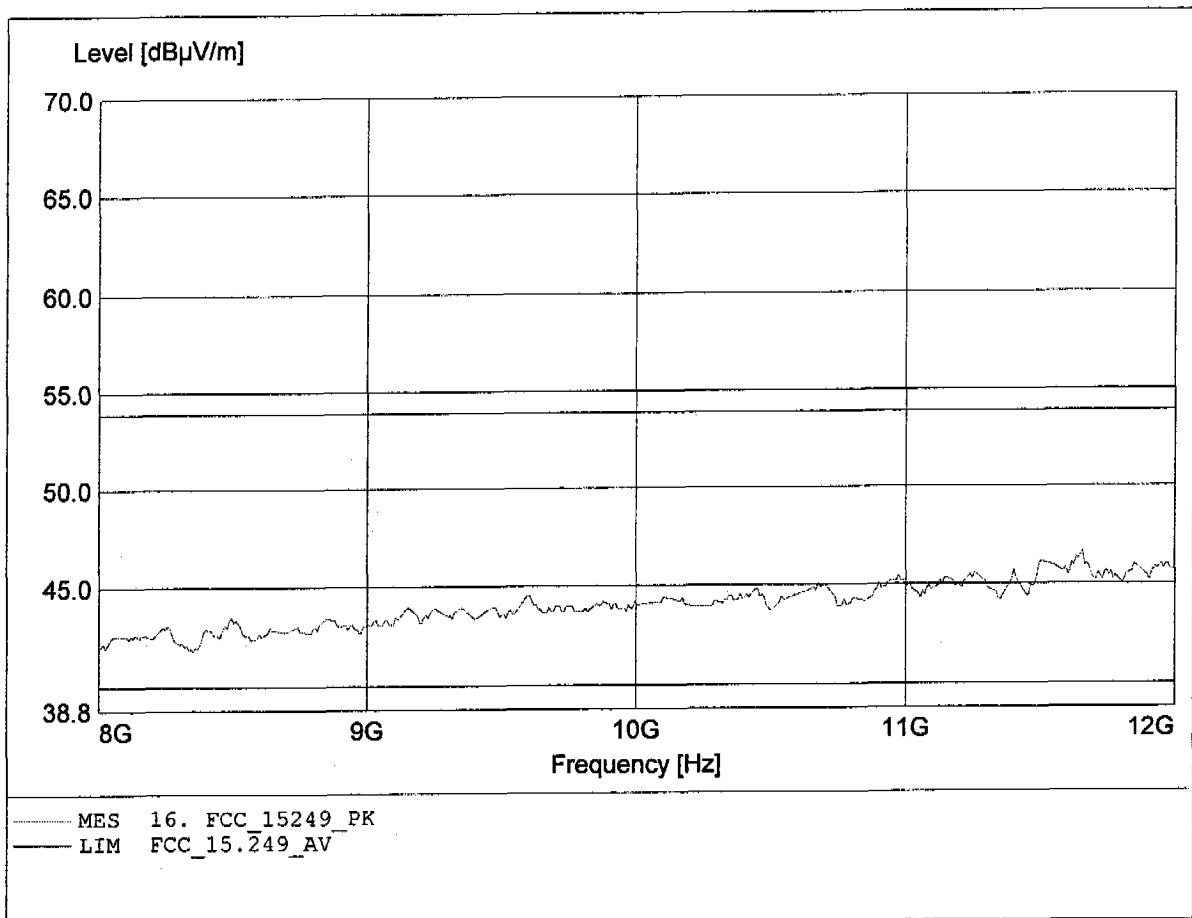

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.655GHz, Emax: 46.62dBuV/m, RBW: 1MHz

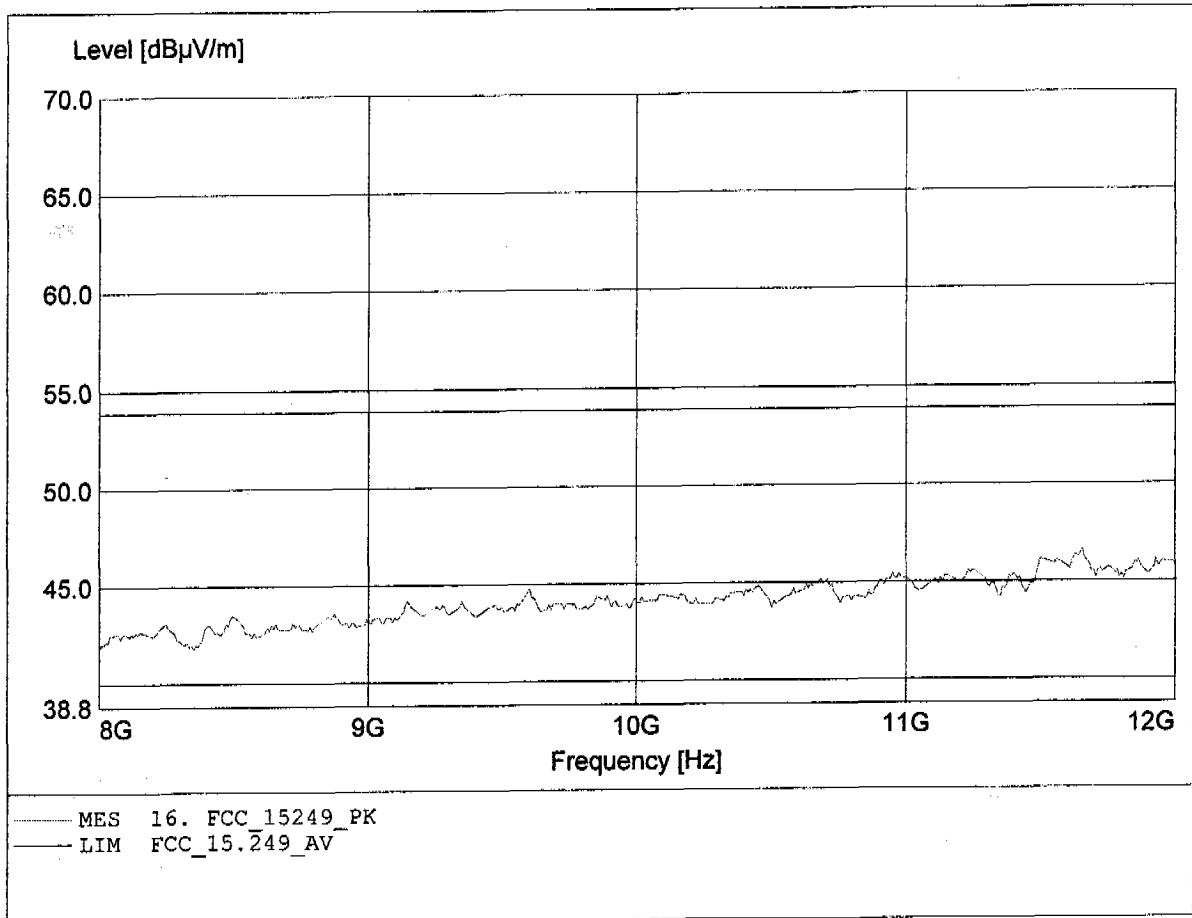

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 51.16dBµV/m, RBW: 1MHz

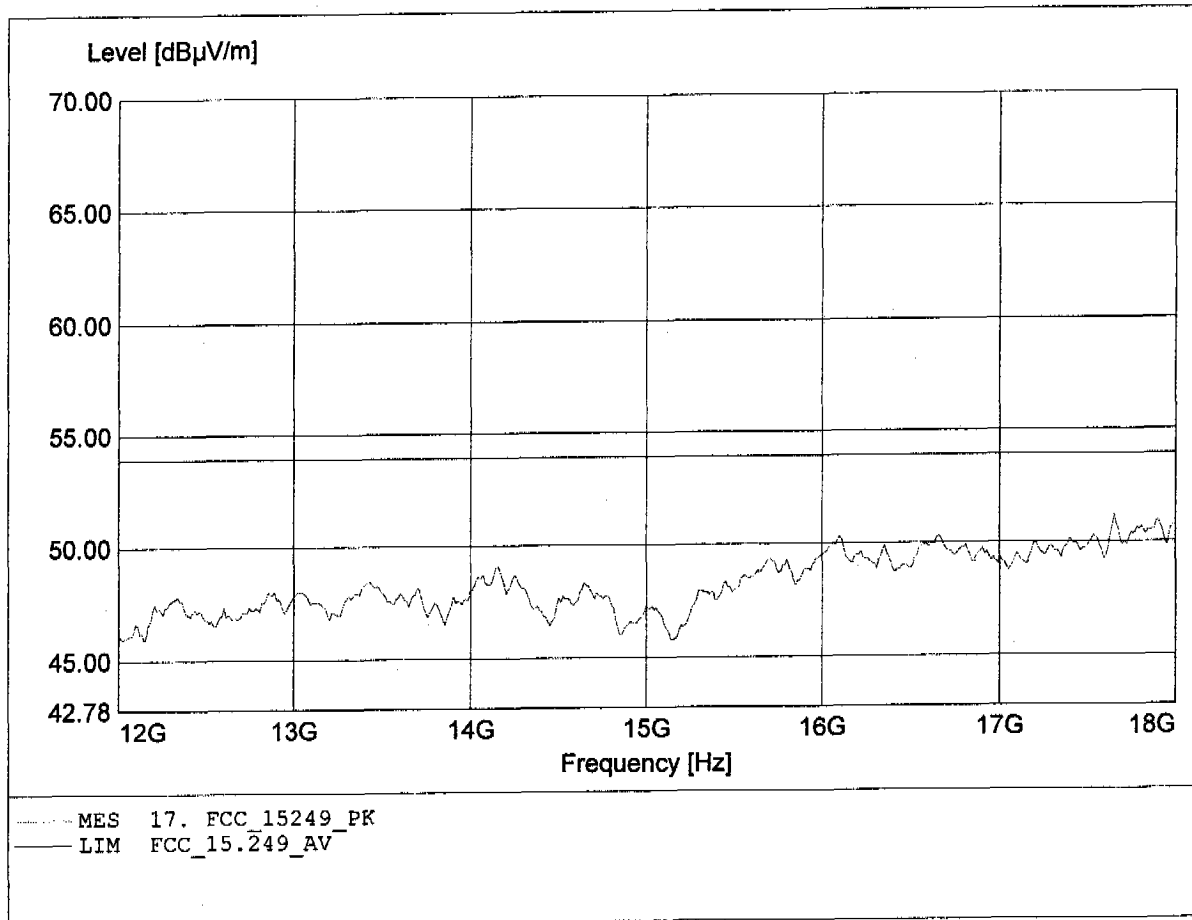

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 51.25dBµV/m, RBW: 1MHz

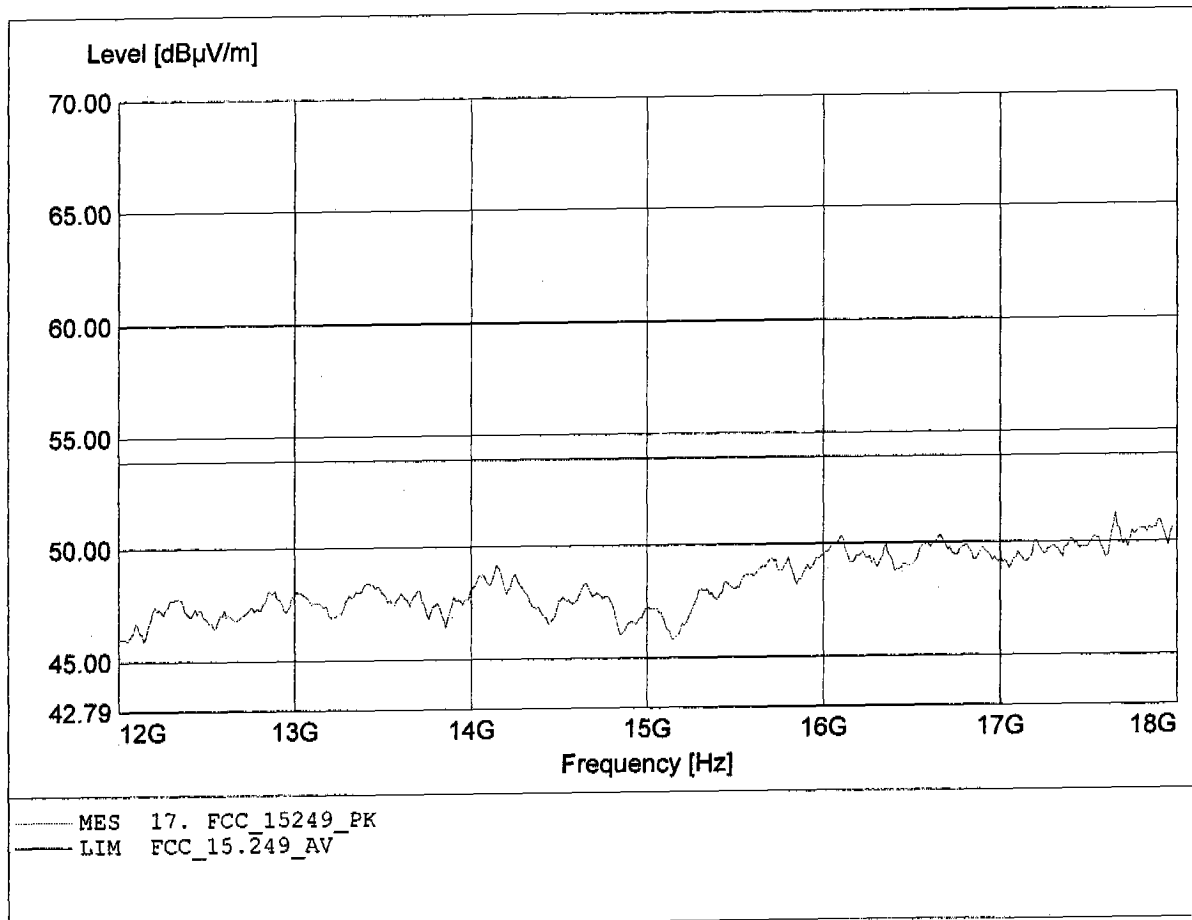

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.193GHz, Emax: 44.51dBµV/m, RBW: 1MHz

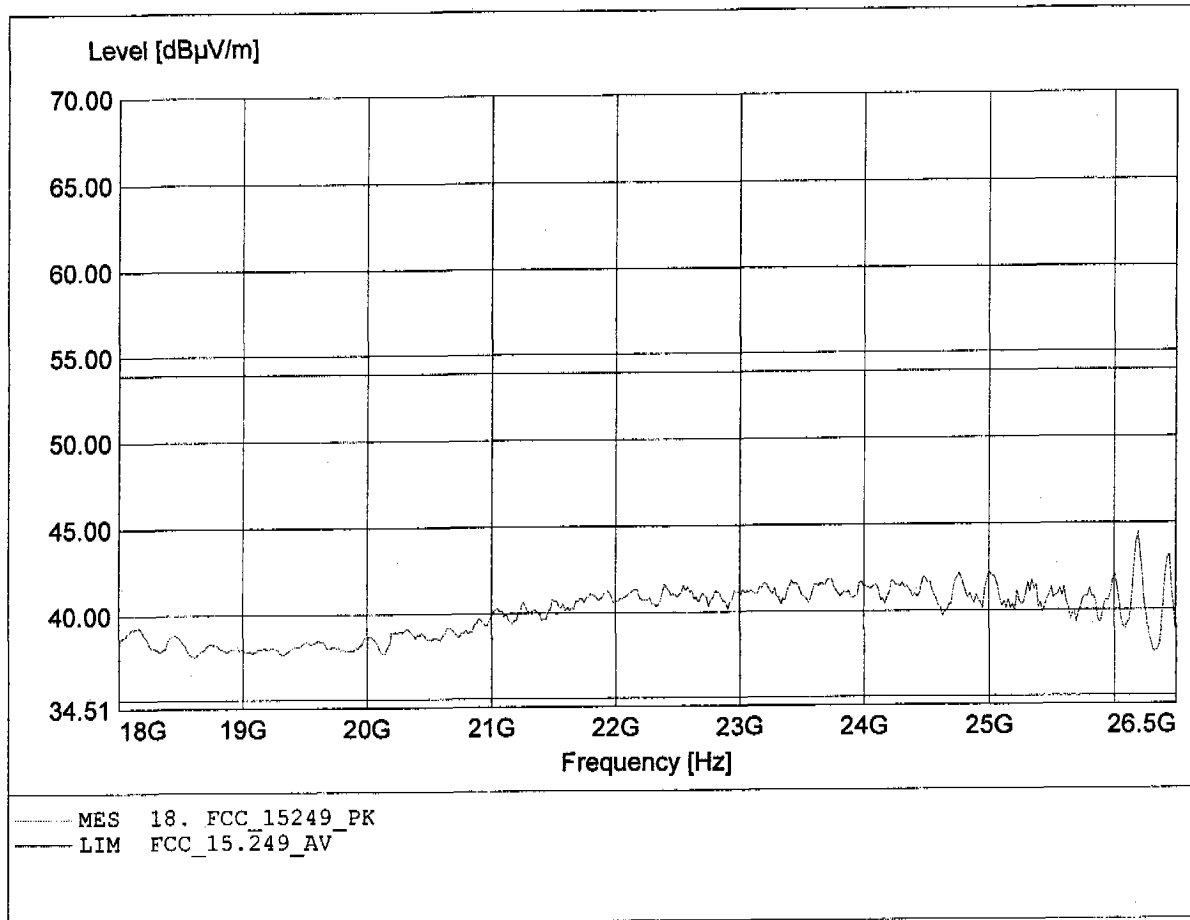

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:120 VAC (AC/DC adaptor)  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.193GHz, Emax: 44.63dBµV/m, RBW: 1MHz

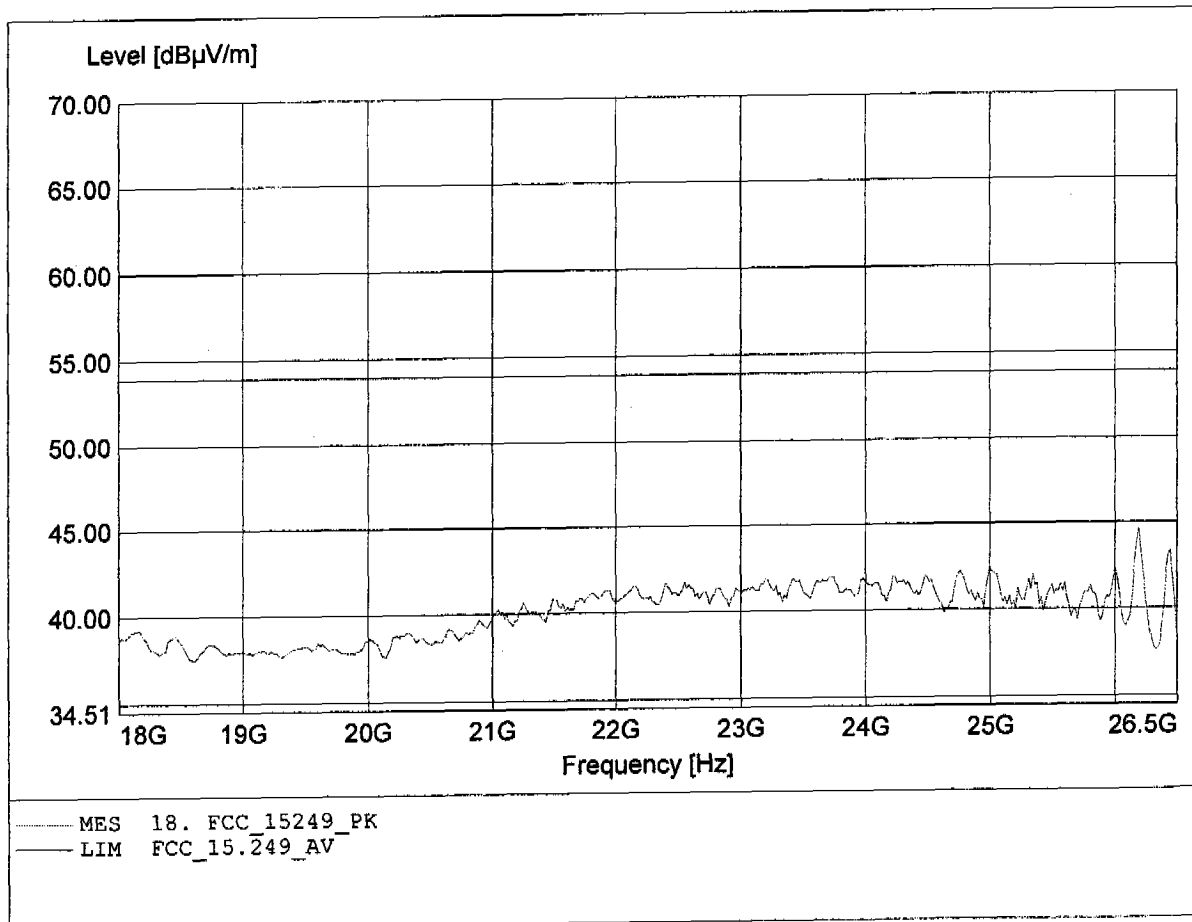

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 189.439MHz, Emax: 31.71dB $\mu$ V/m, RBW: 100kHz

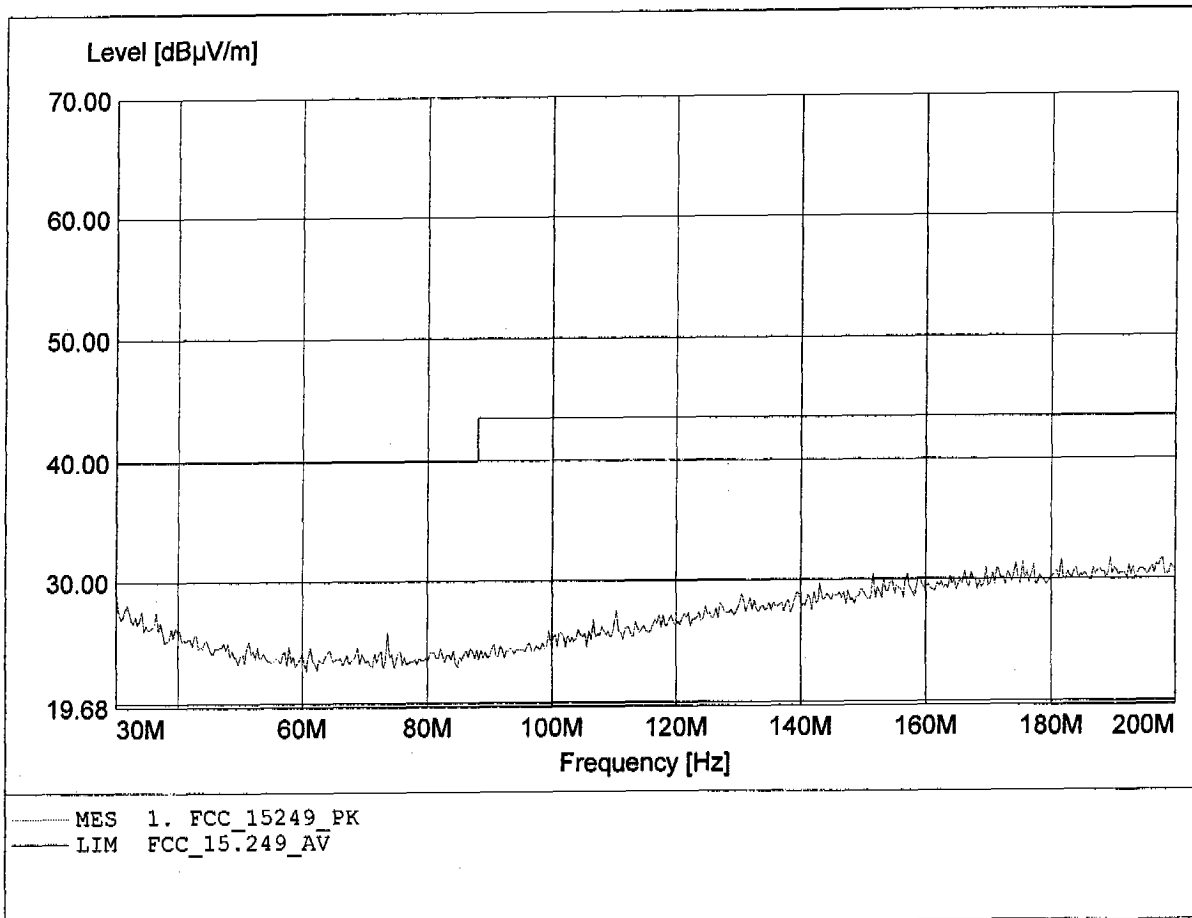

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 180.581MHz, Emax: 31.94dBµV/m, RBW: 100kHz

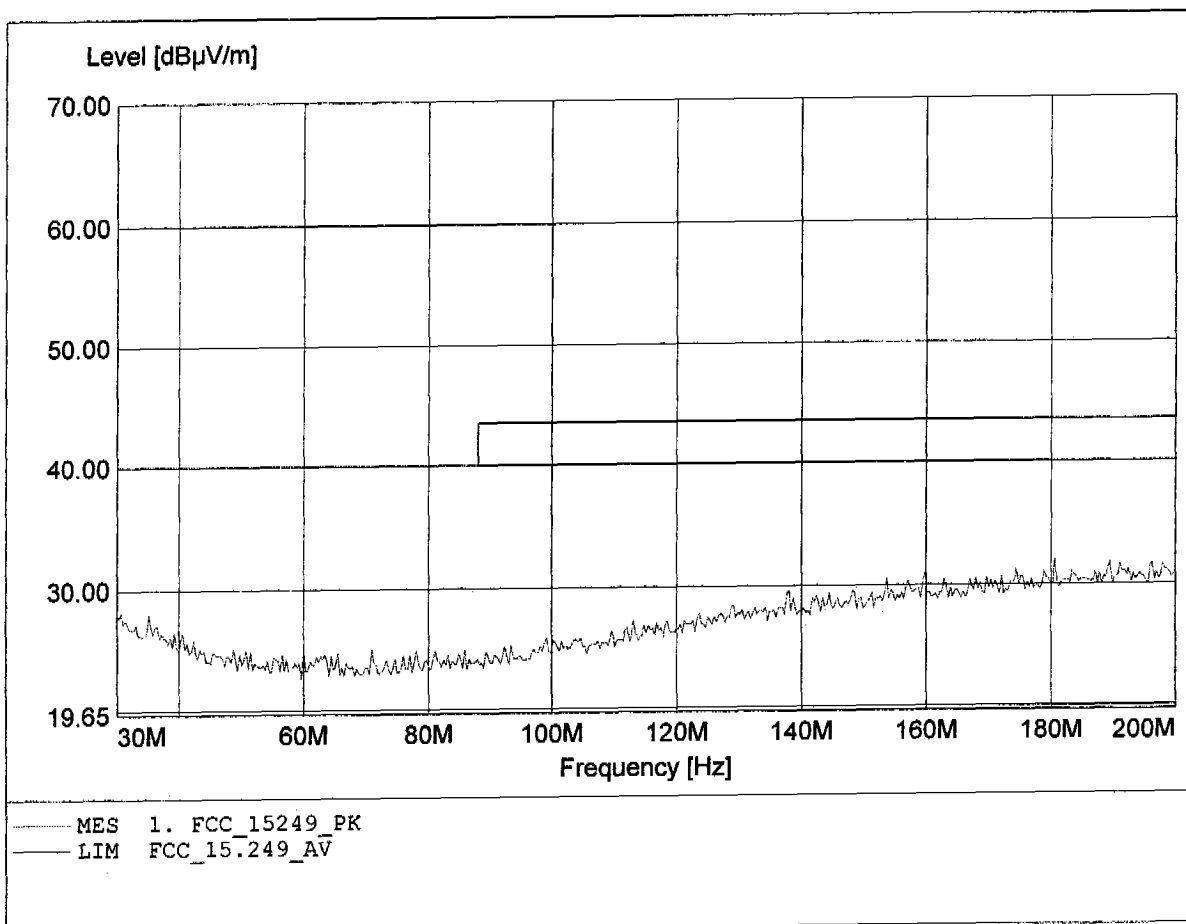




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHZ Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 825.251MHz, Emax: 27.76dBµV/m, RBW: 100kHz

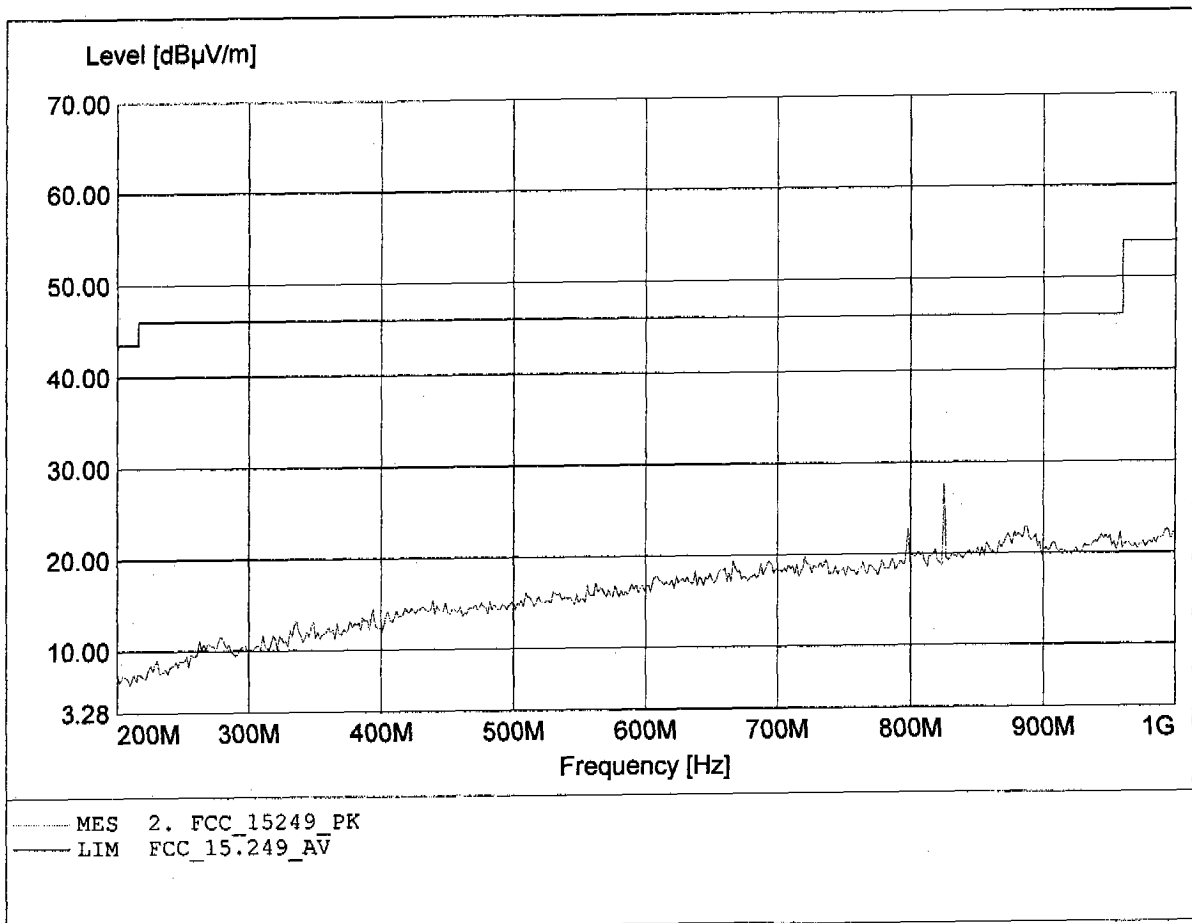

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F. Schulz  
Temperature/Voltage: Temp. 25°C / Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 825.251MHz, Emax: 26.24dBµV/m, RBW: 100kHz

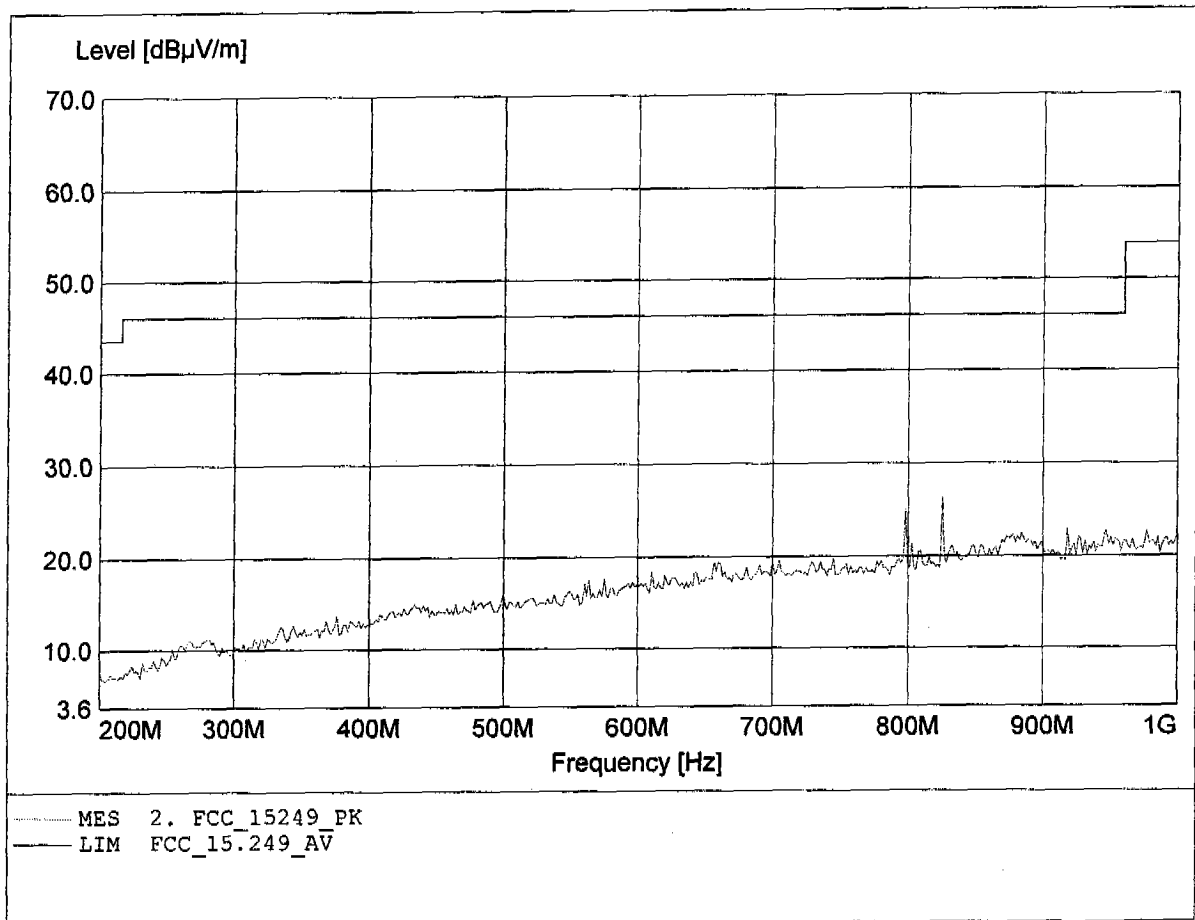

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:3.6 VDC bb attery  
Test Specification: according to S15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.473GHz, Emax: 82.23dBµV/m, RBW: 1MHz

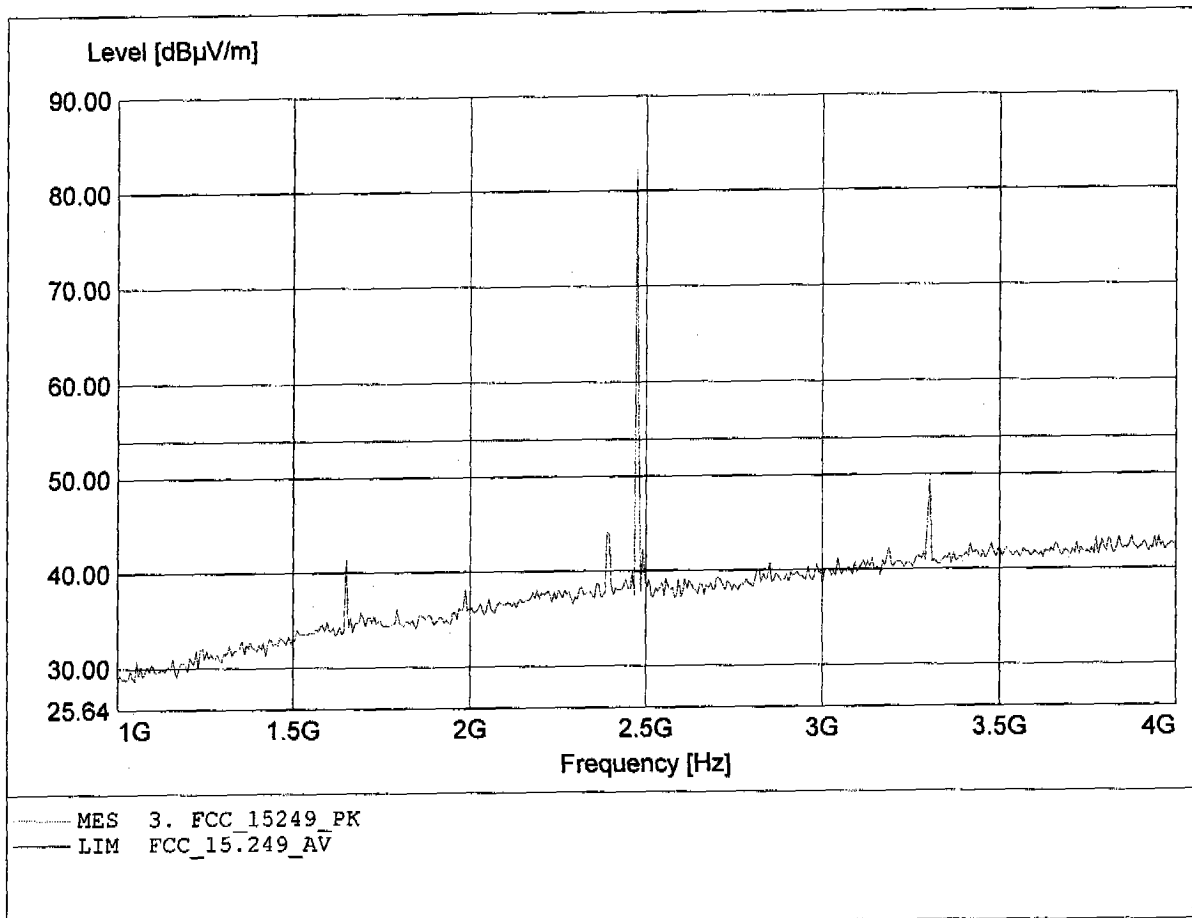

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:3.6 VDC b attery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.473GHz, Emax: 82.54dBµV/m, RBW: 1MHz

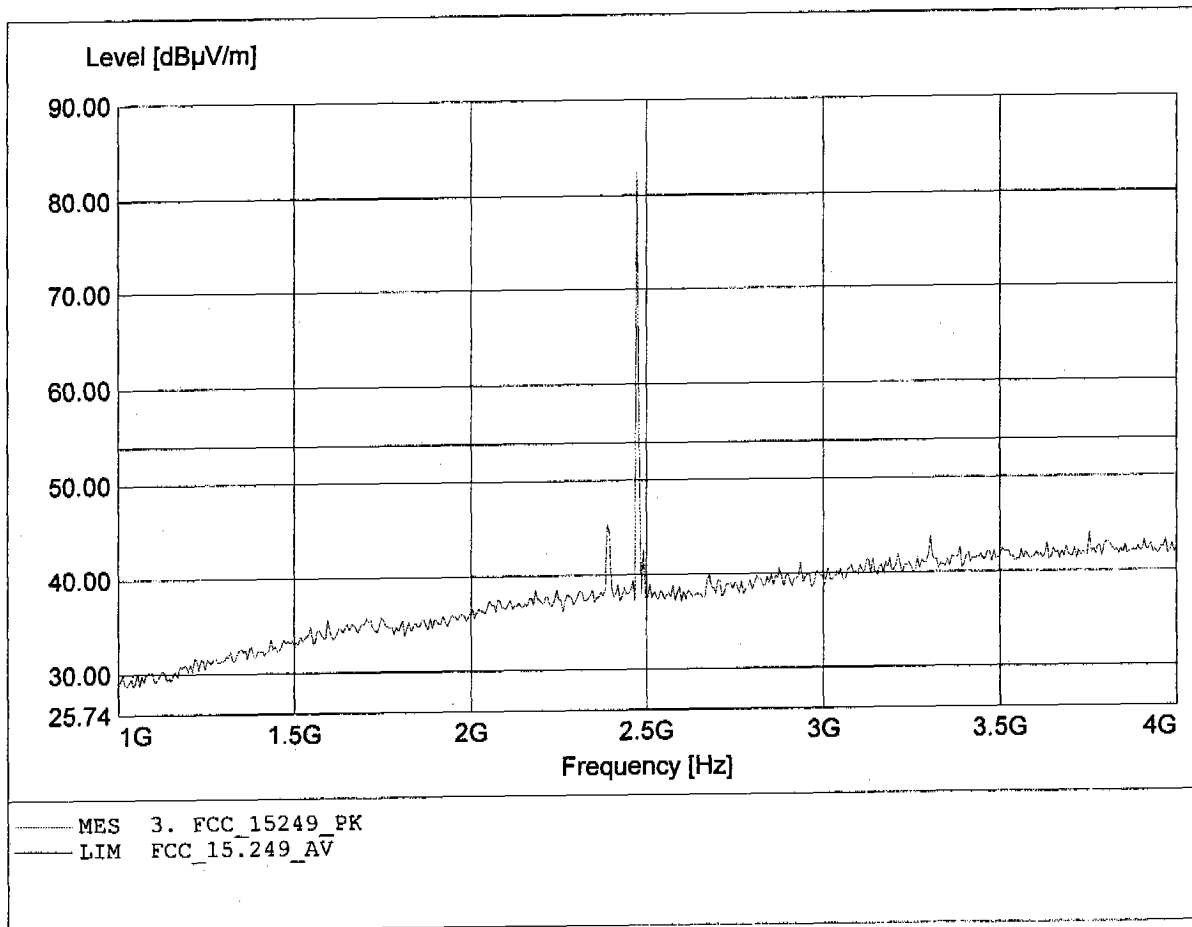

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.527GHz, Emax: 52.22dBµV/m, RBW: 1MHz

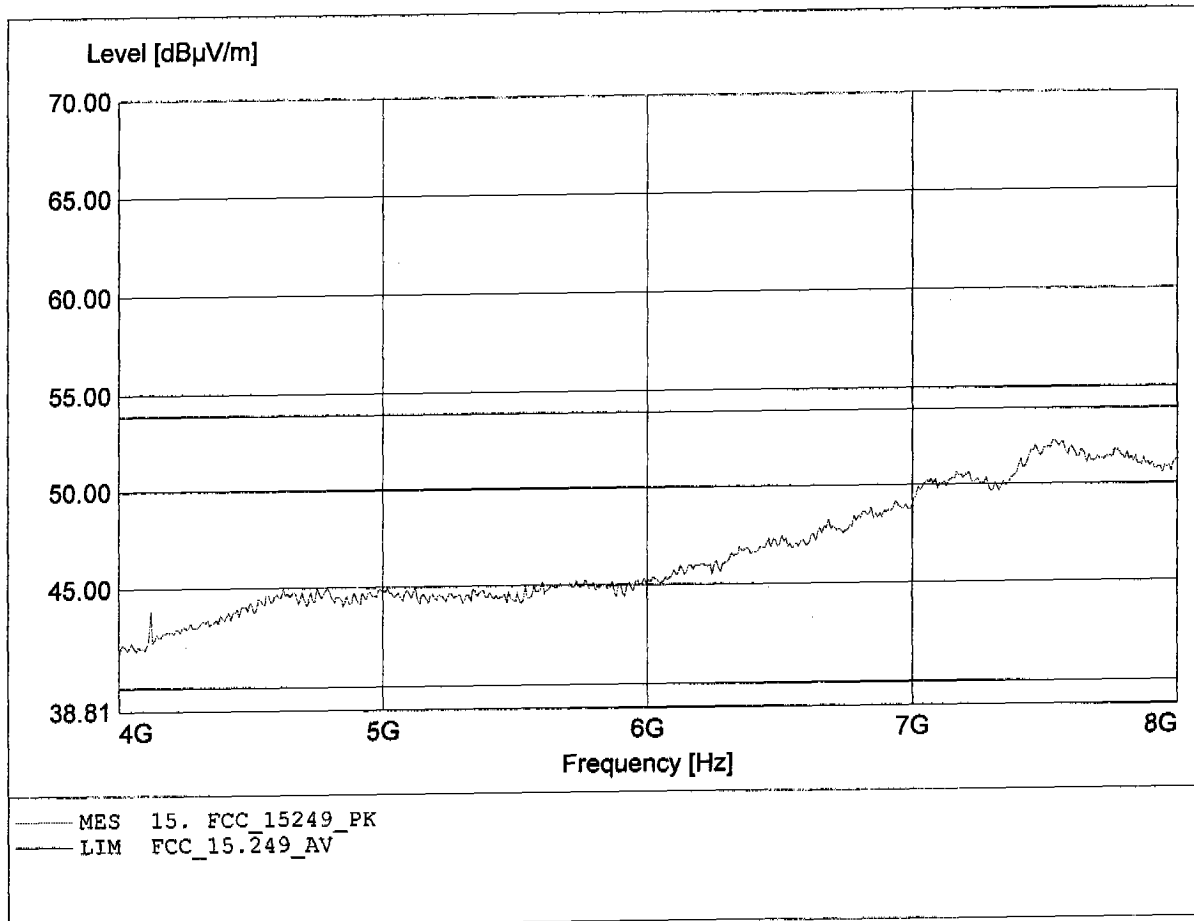

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.535GHz, Emax: 52.29dBµV/m, RBW: 1MHz

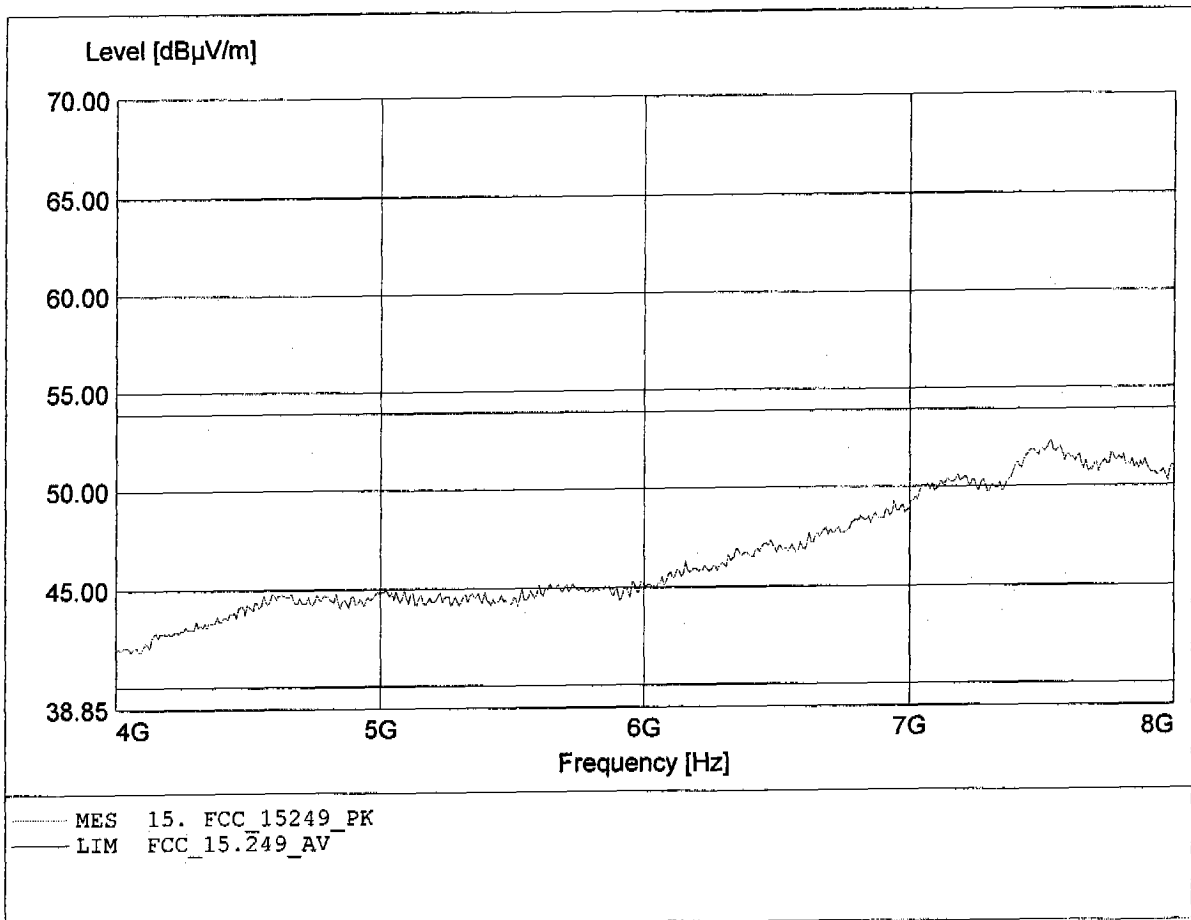

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to S15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.655GHz, Emax: 47.38dBµV/m, RBW: 1MHz

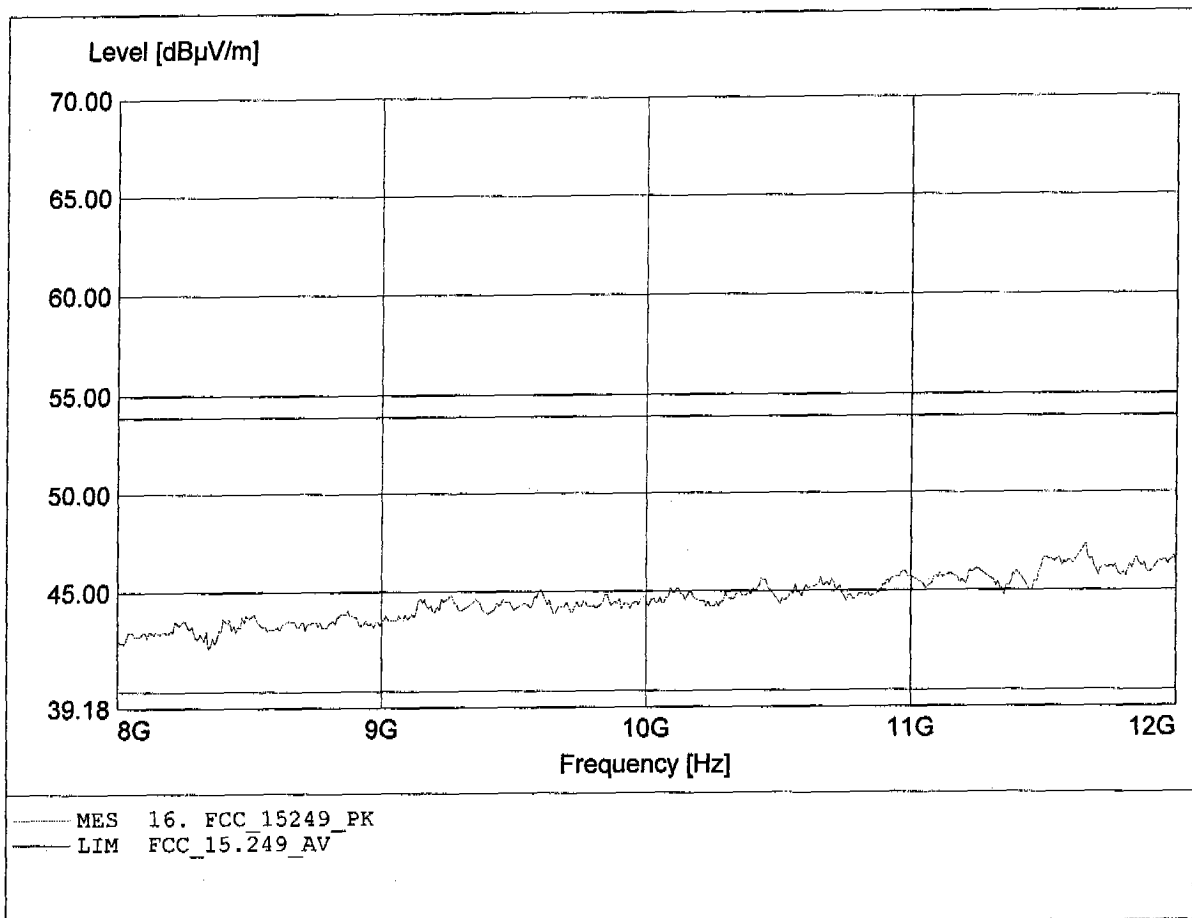

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.655GHz, Emax: 47.13dBµV/m, RBW: 1MHz

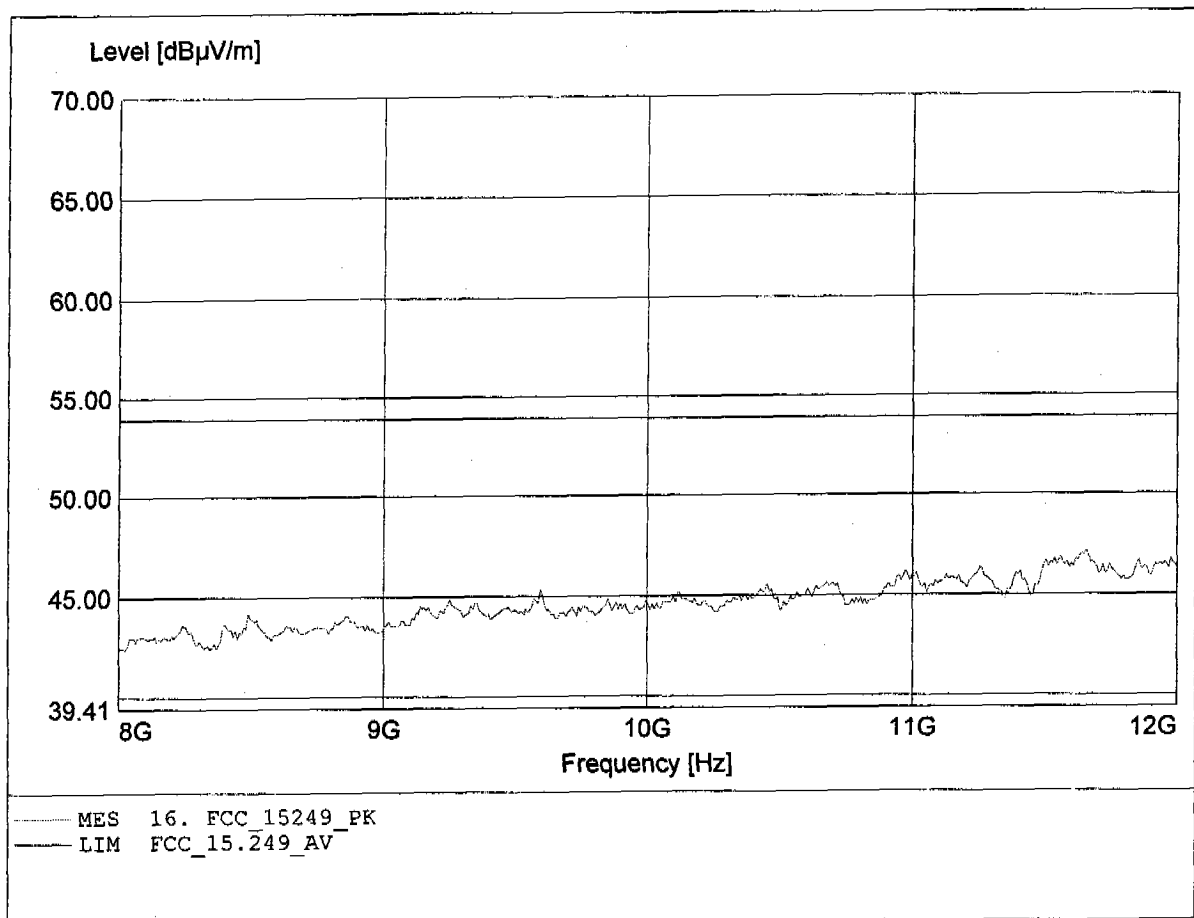




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 51.73dBµV/m, RBW: 1MHz

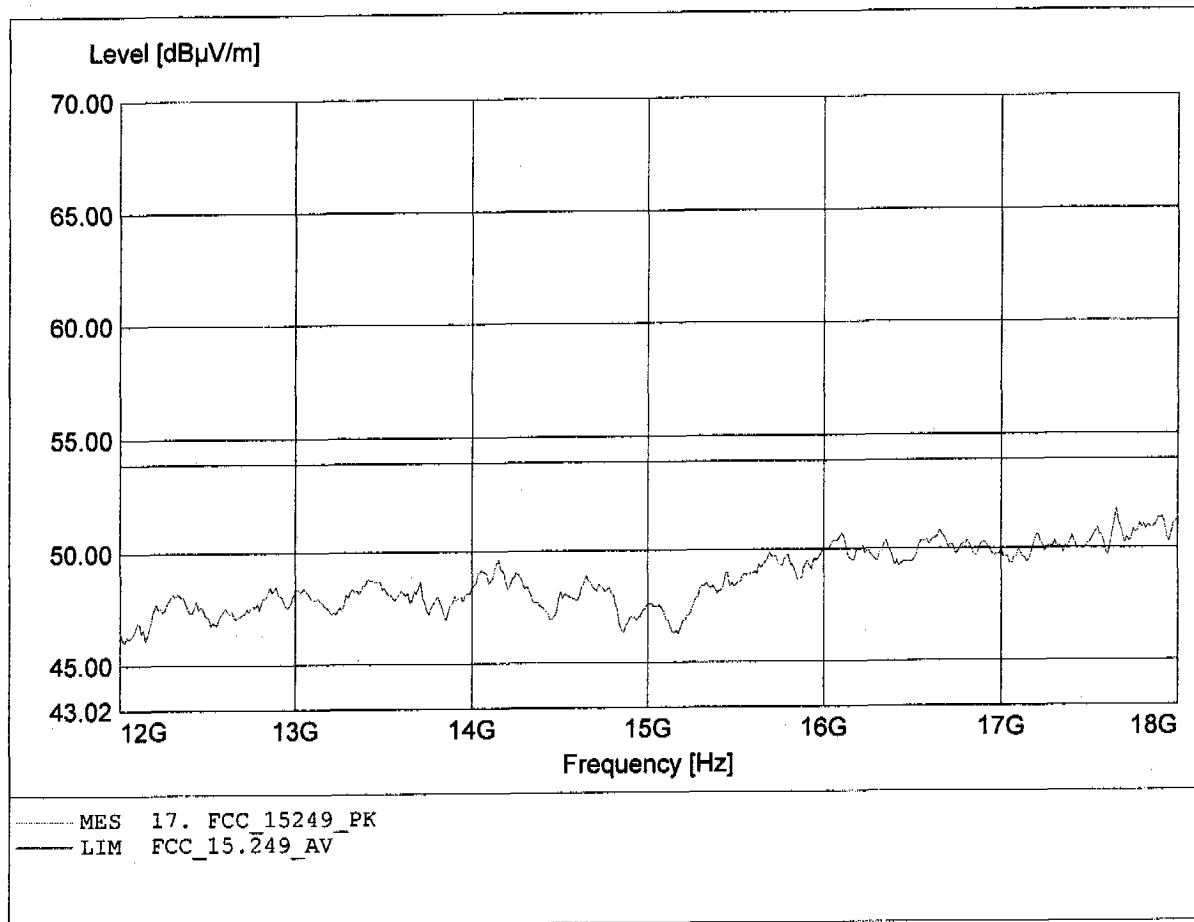

**Spurious emissions Field Strength**

**FCC RULES PART 15, SUBPART C**


EUT: 2.4 GHZ Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:3.6 VDC battery  
Test Specification: according to S15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 18.000GHz, Emax: 51.59dB $\mu$ V/m, RBW: 1MHz

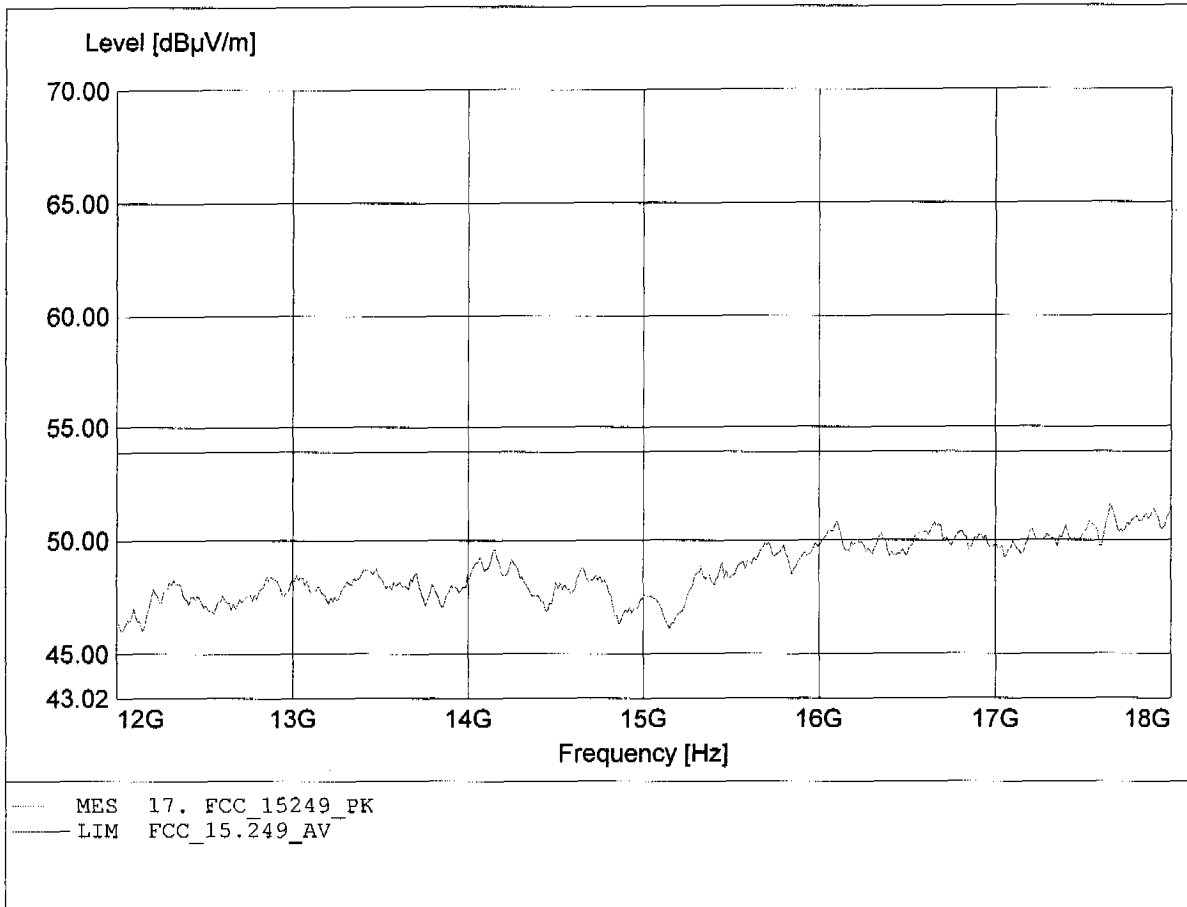

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.193GHz, Emax: 44.49dBµV/m, RBW: 1MHz

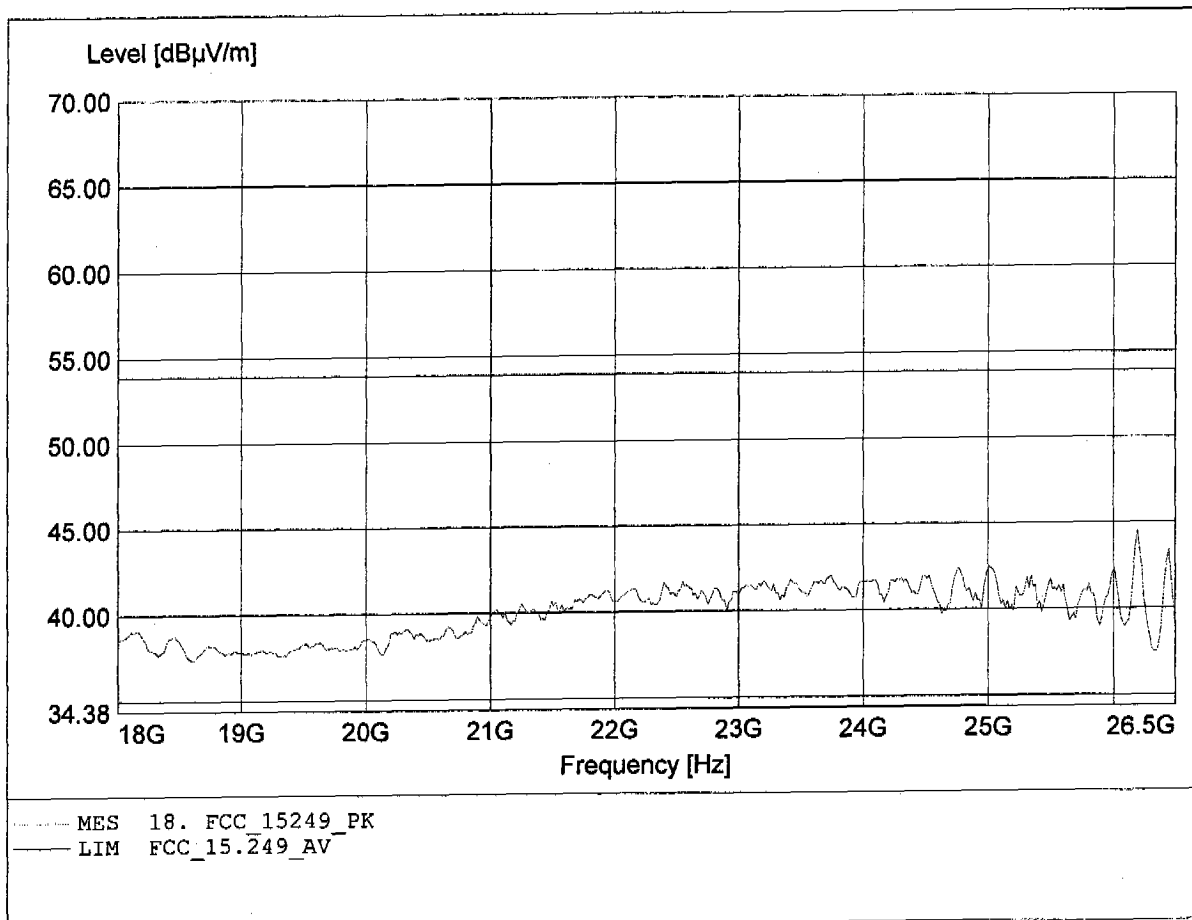

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH1  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.193GHz, Emax: 44.10dBµV/m, RBW: 1MHz

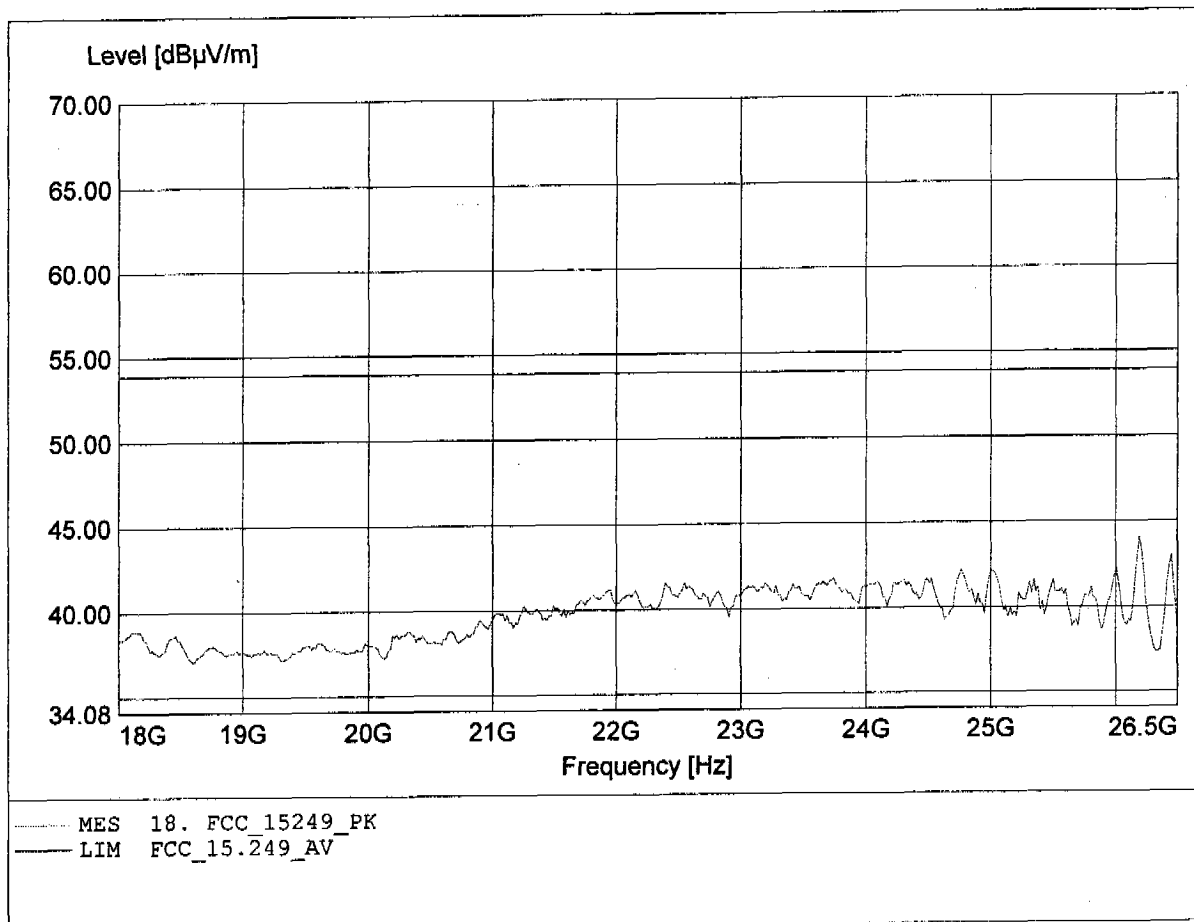

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 198.637MHz, Emax: 32.57dB $\mu$ V/m, RBW: 100kHz

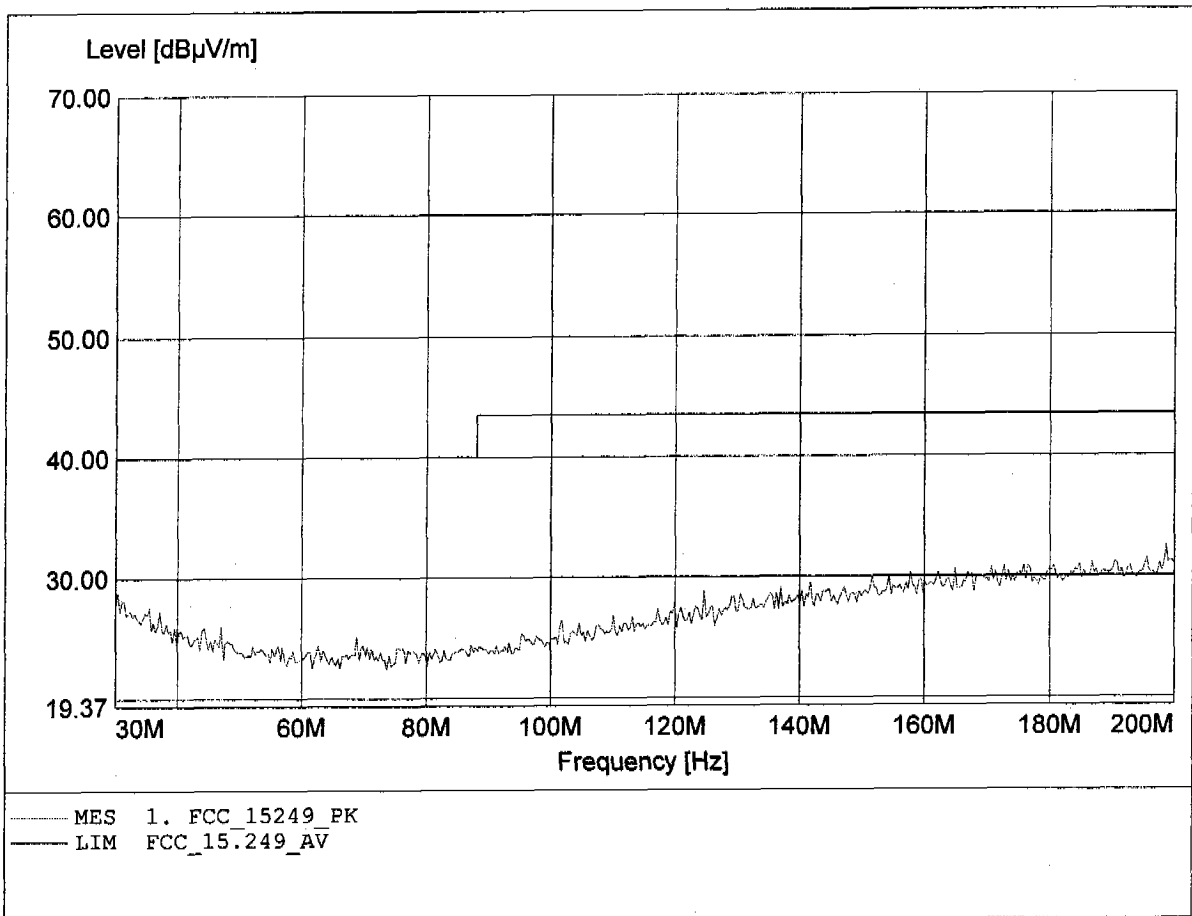

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 190.802MHz, Emax: 31.90dBµV/m, RBW: 100kHz

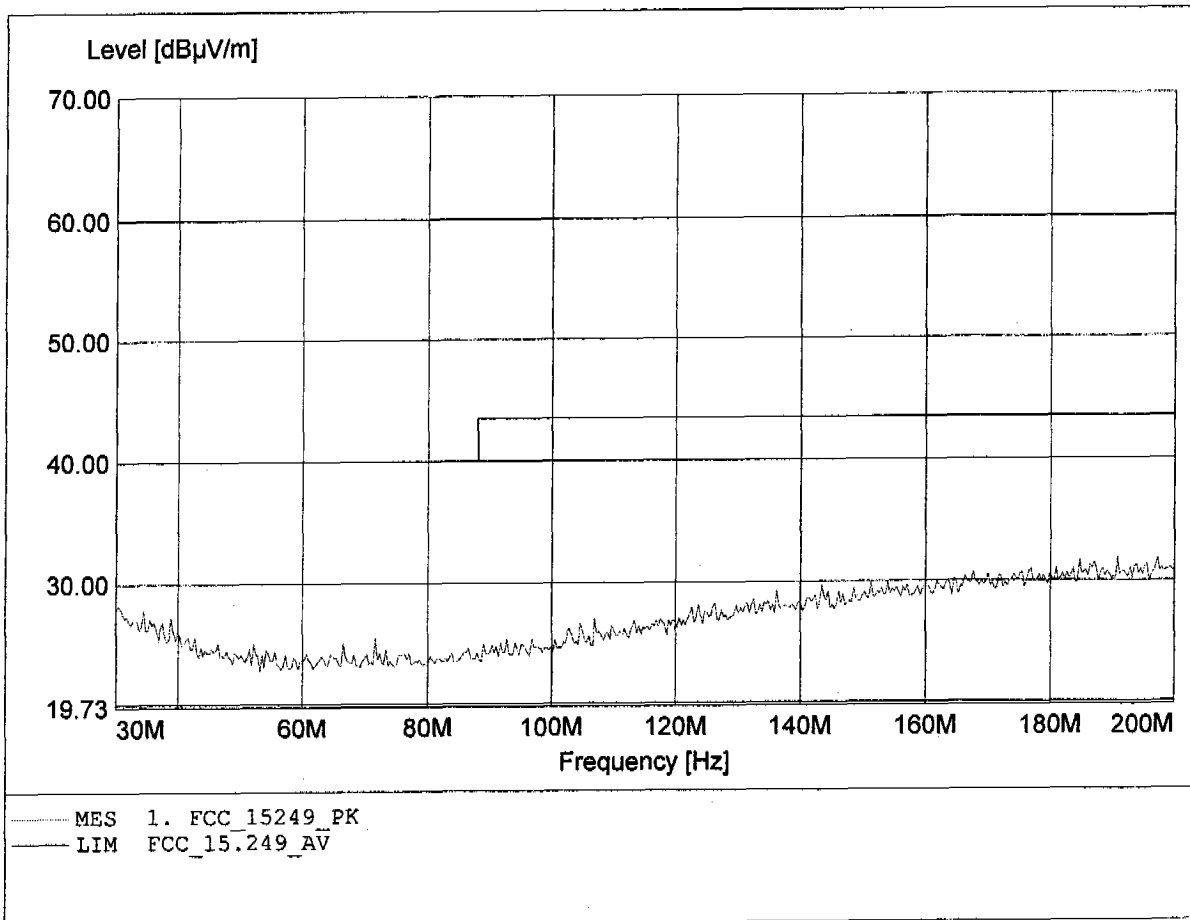

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 825.251MHz, Emax: 27.22dBµV/m, RBW: 100kHz

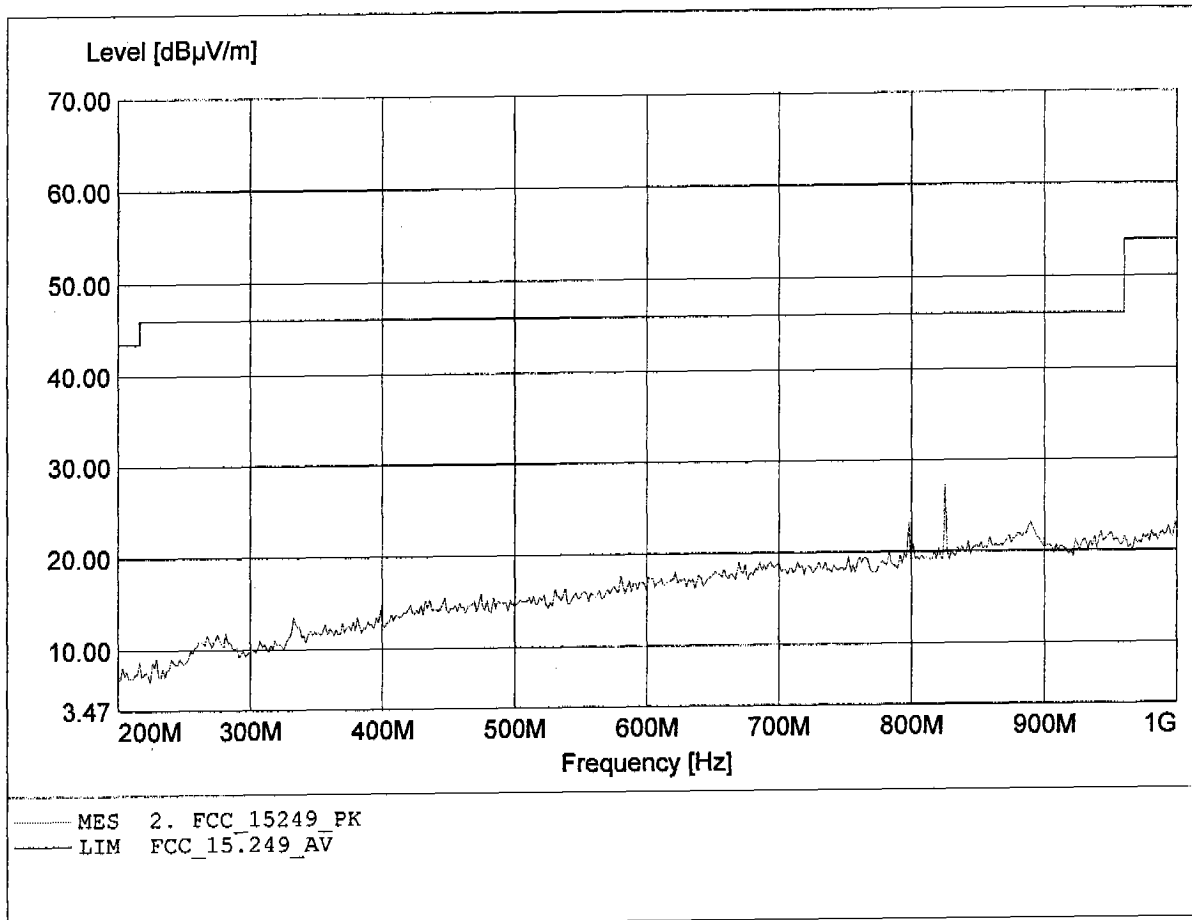

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 825.251MHz, Emax: 25.69dBµV/m, RBW: 100kHz

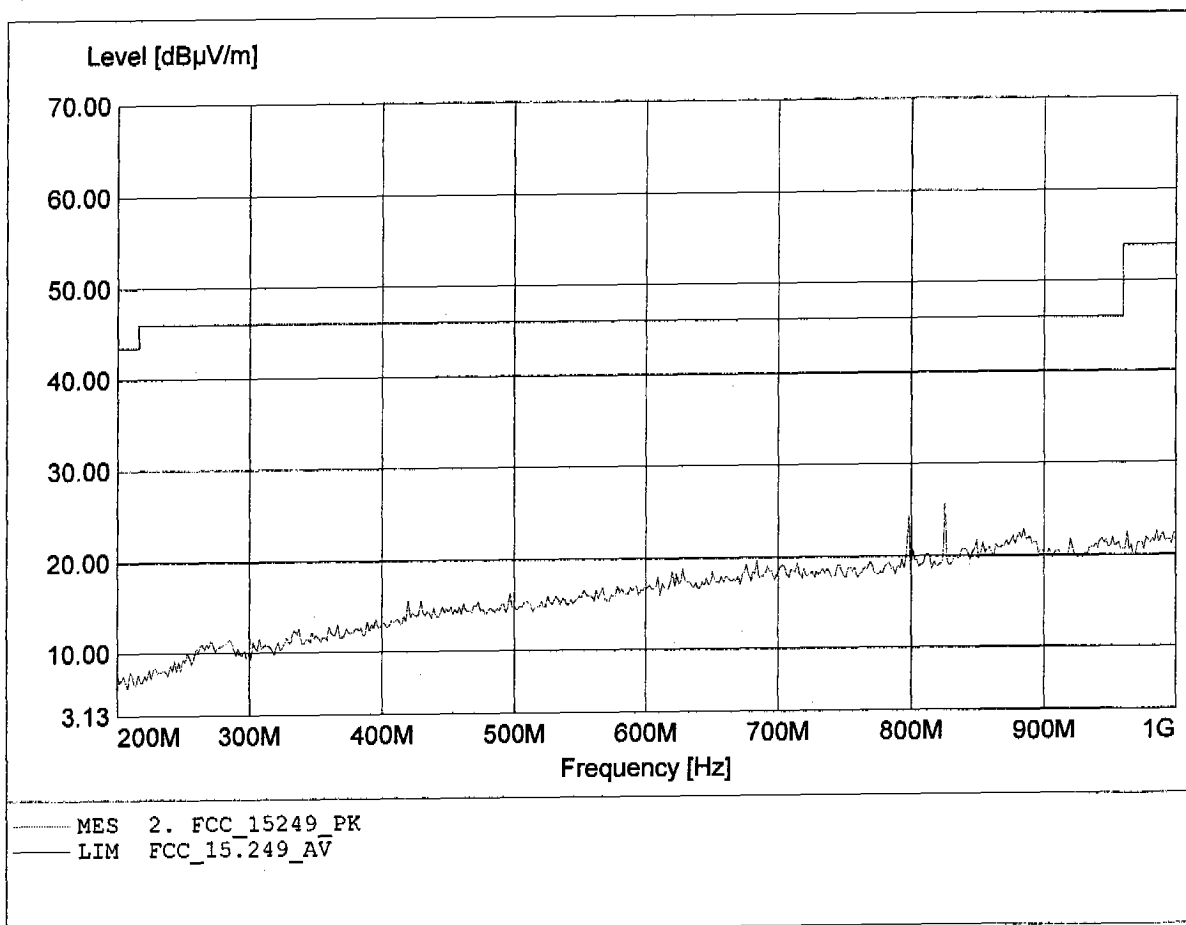




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co.,Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.:3.6 VDC b attery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.479GHz, Emax: 82.50dBµV/m, RBW: 1MHz

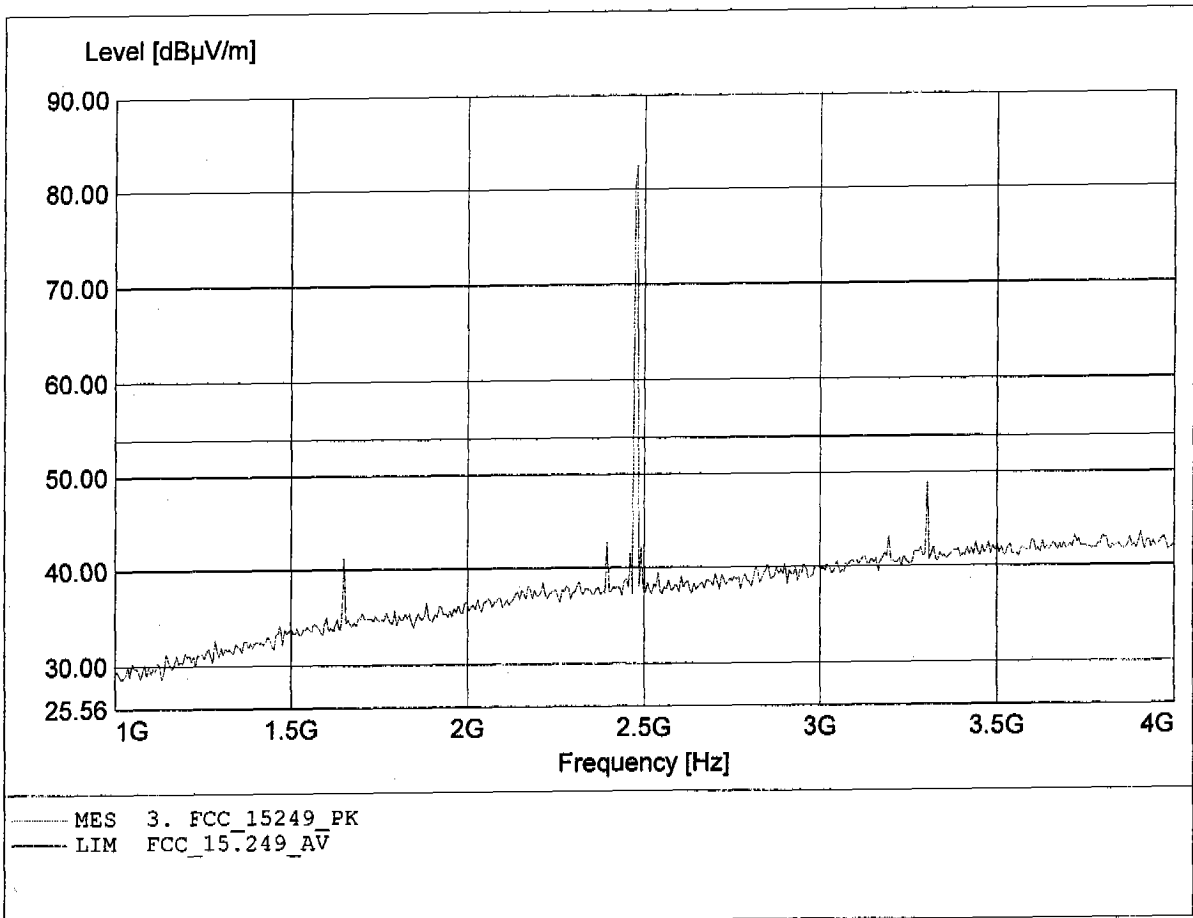

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Cob y Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC bb attery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 2.479GHz, Emax: 83.40dBµV/m, RBW: 1MHz

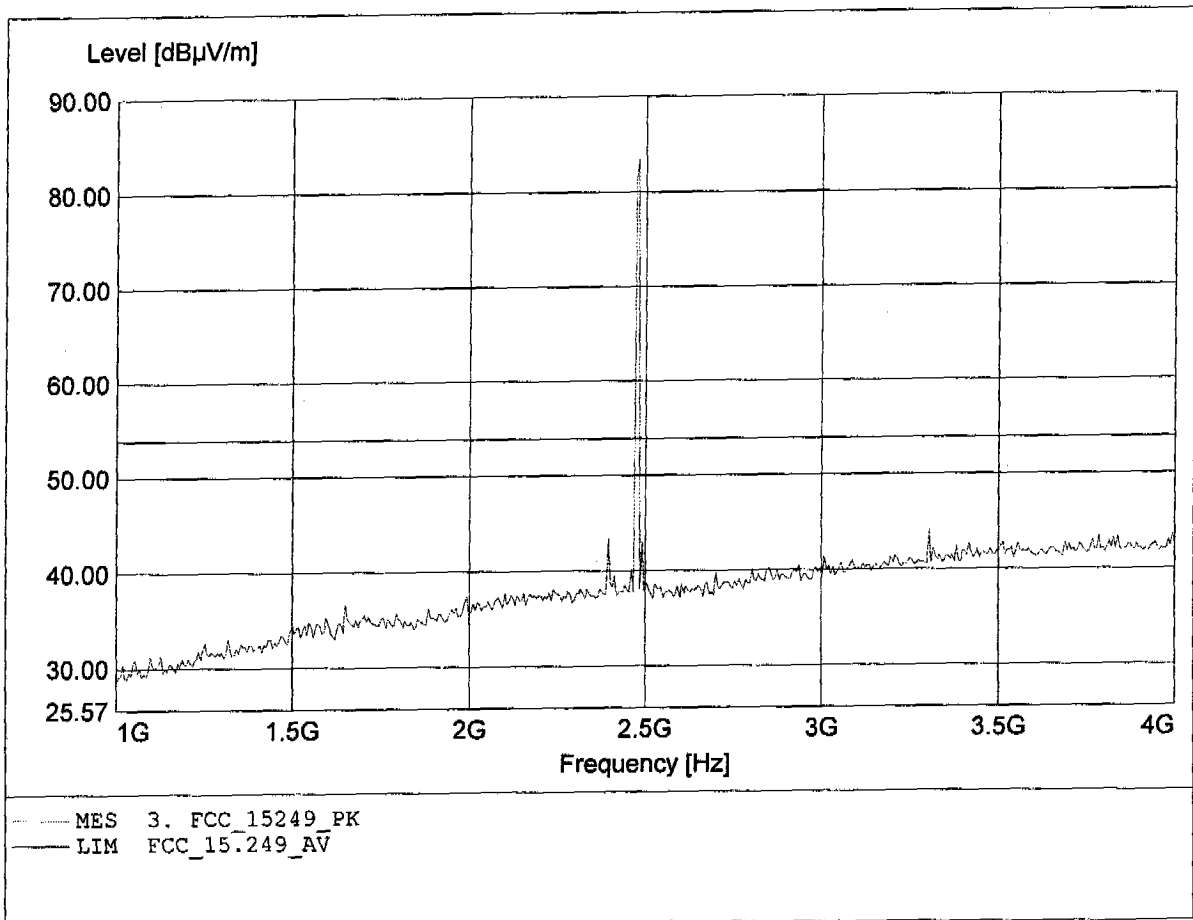

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.527GHz, Emax: 52.26dBµV/m, RBW: 1MHz

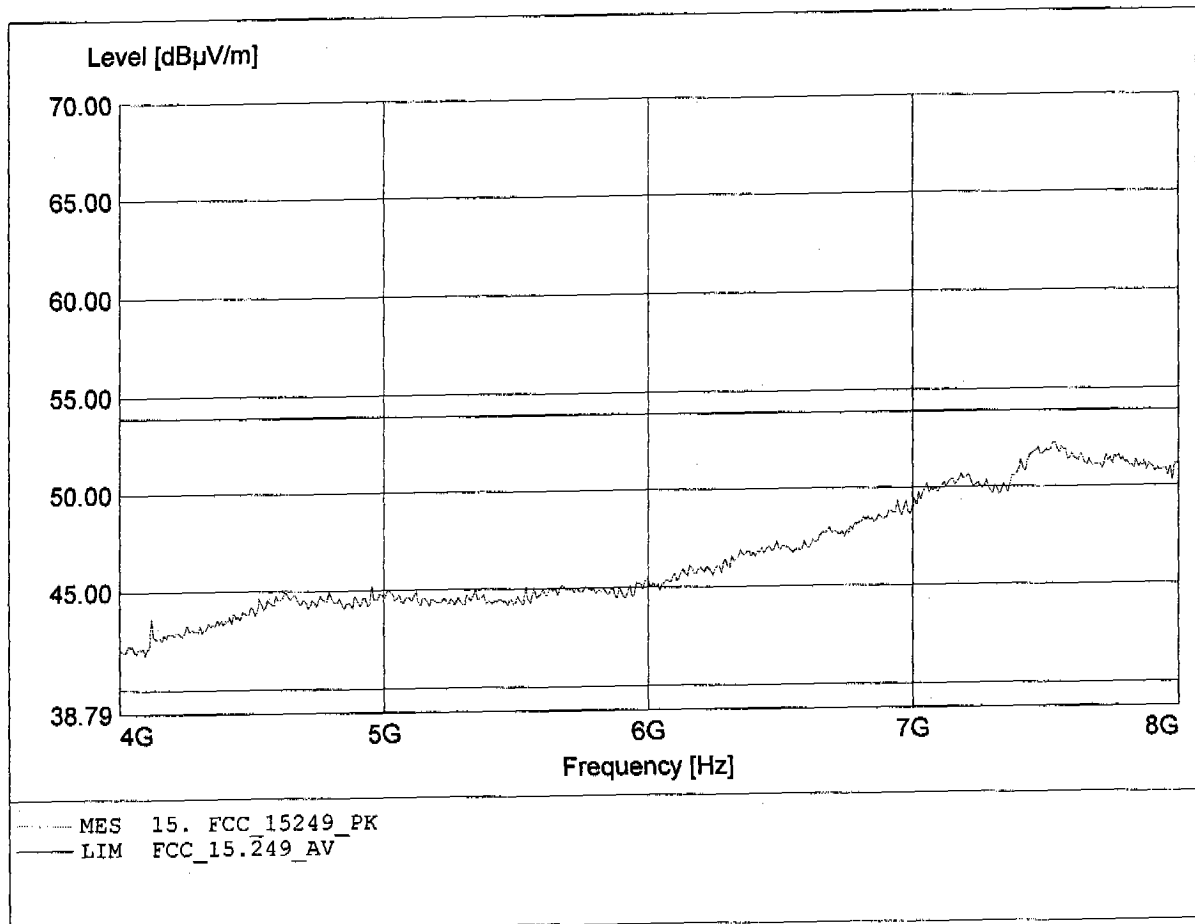

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.535GHz, Emax: 51.77dBμV/m, RBW: 1MHz

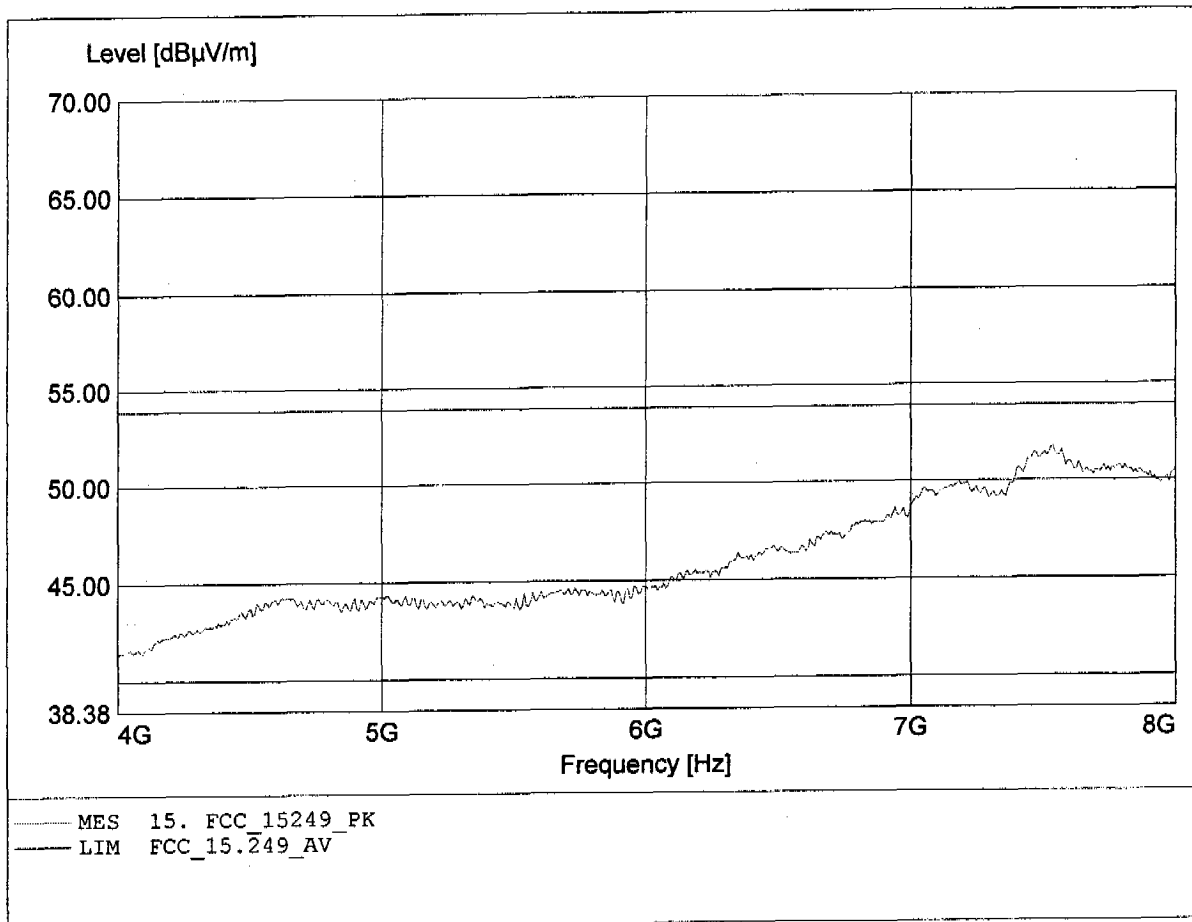

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.655GHz, Emax: 47.13dB $\mu$ V/m, RBW: 1MHz

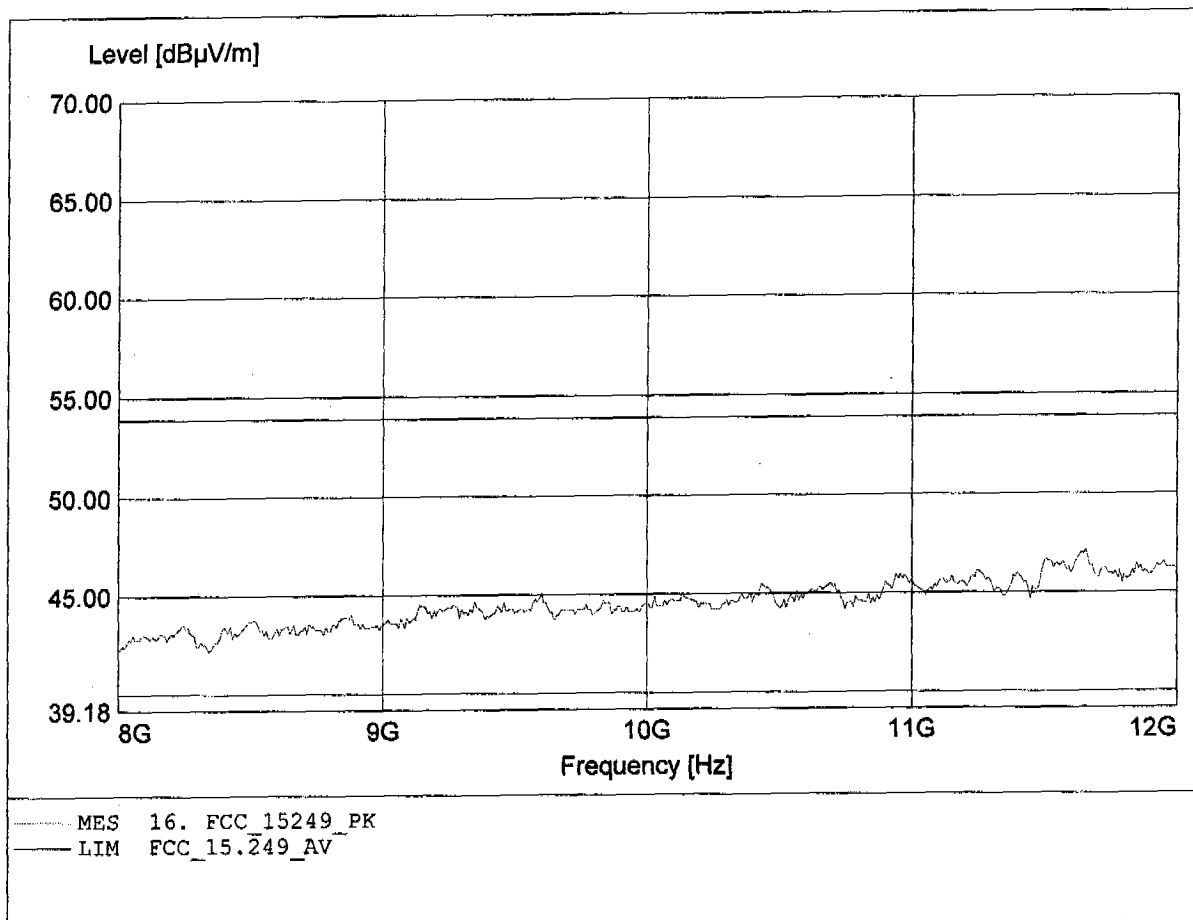

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.655GHz, Emax: 47.13dBµV/m, RBW: 1MHz

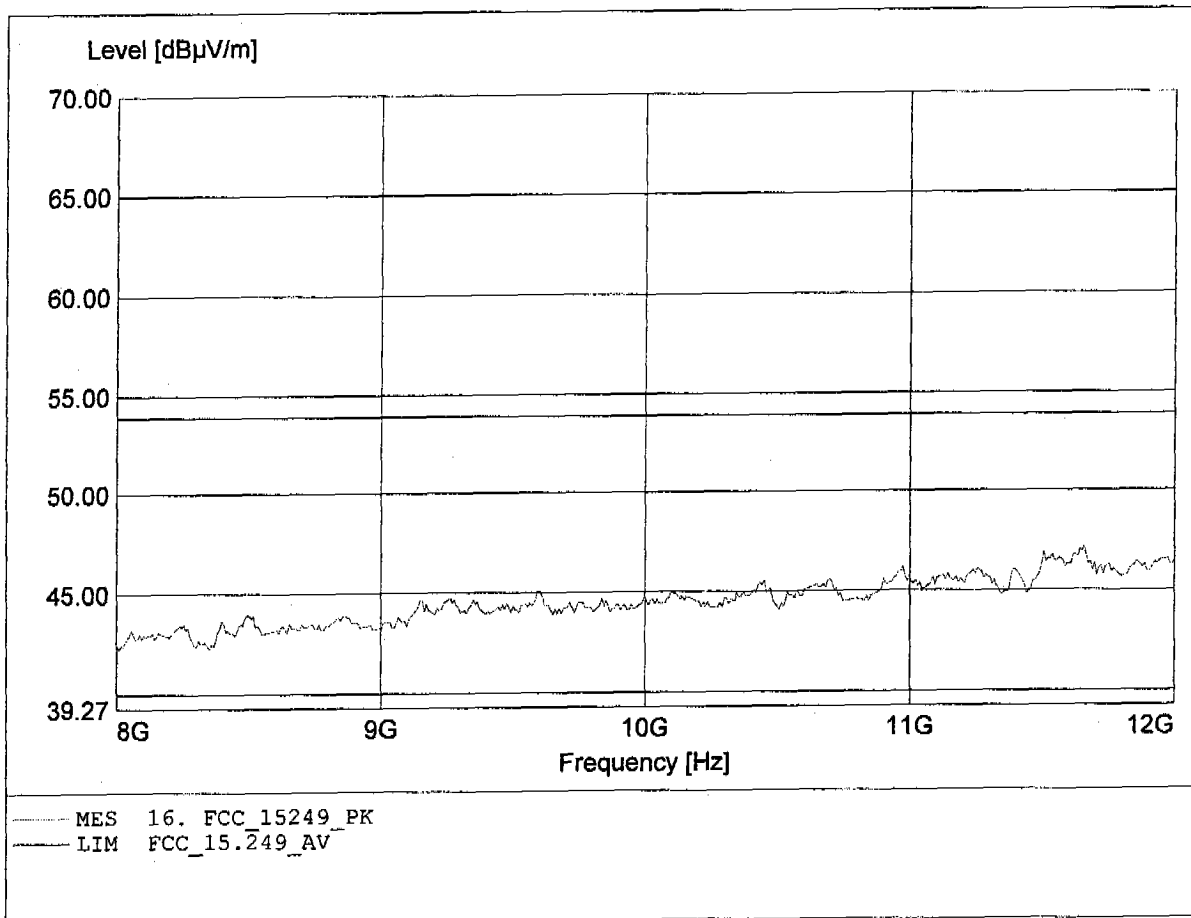

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 51.41dBµV/m, RBW: 1MHz

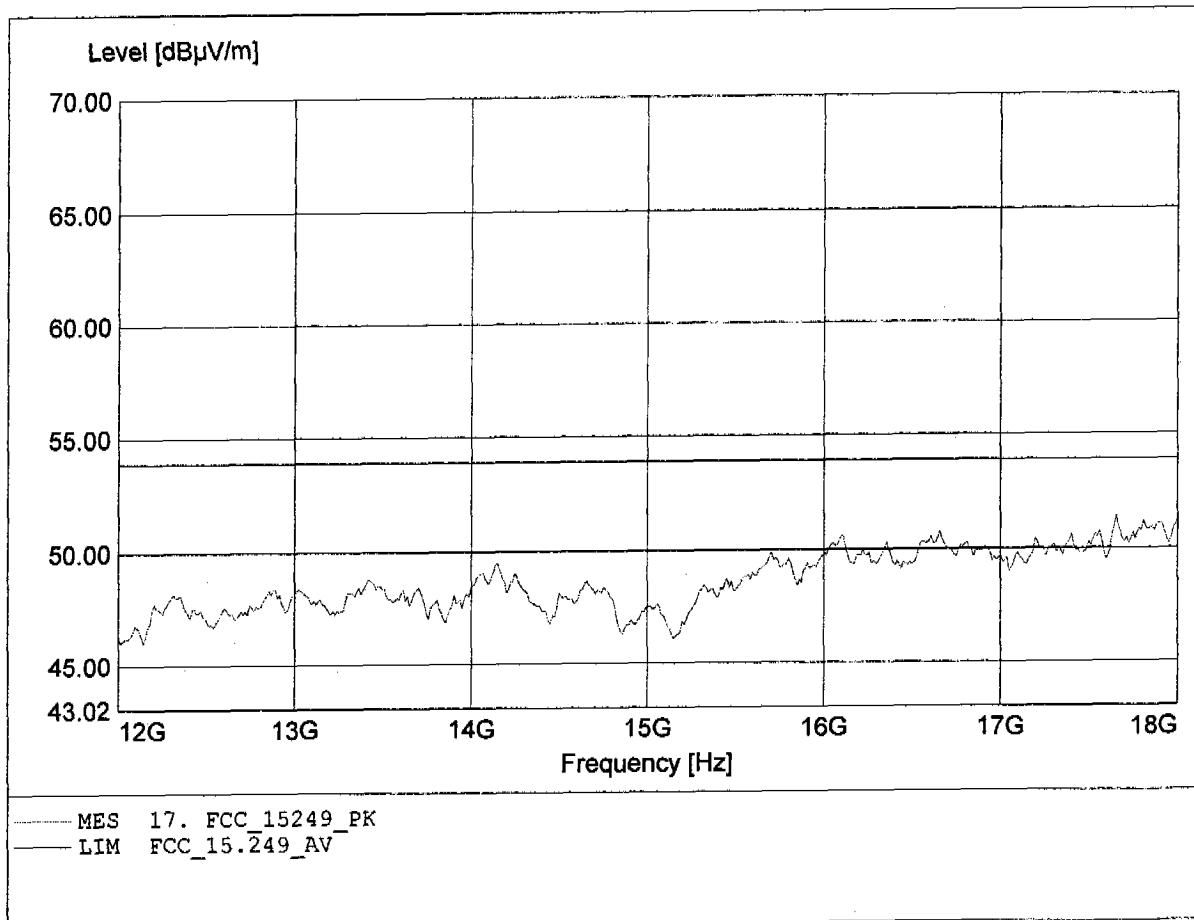

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 51.57dBµV/m, RBW: 1MHz

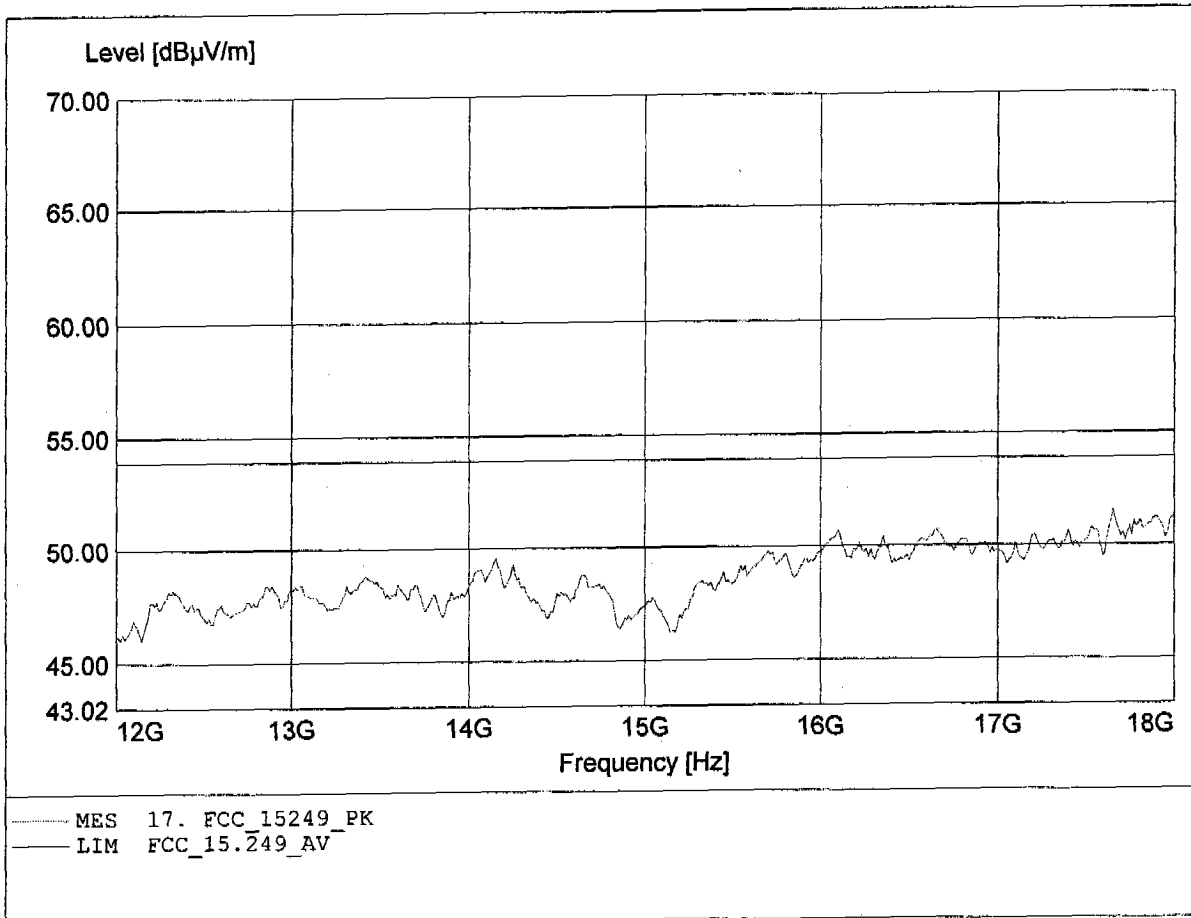




# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C


EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.193GHz, Emax: 44.49dBµV/m, RBW: 1MHz

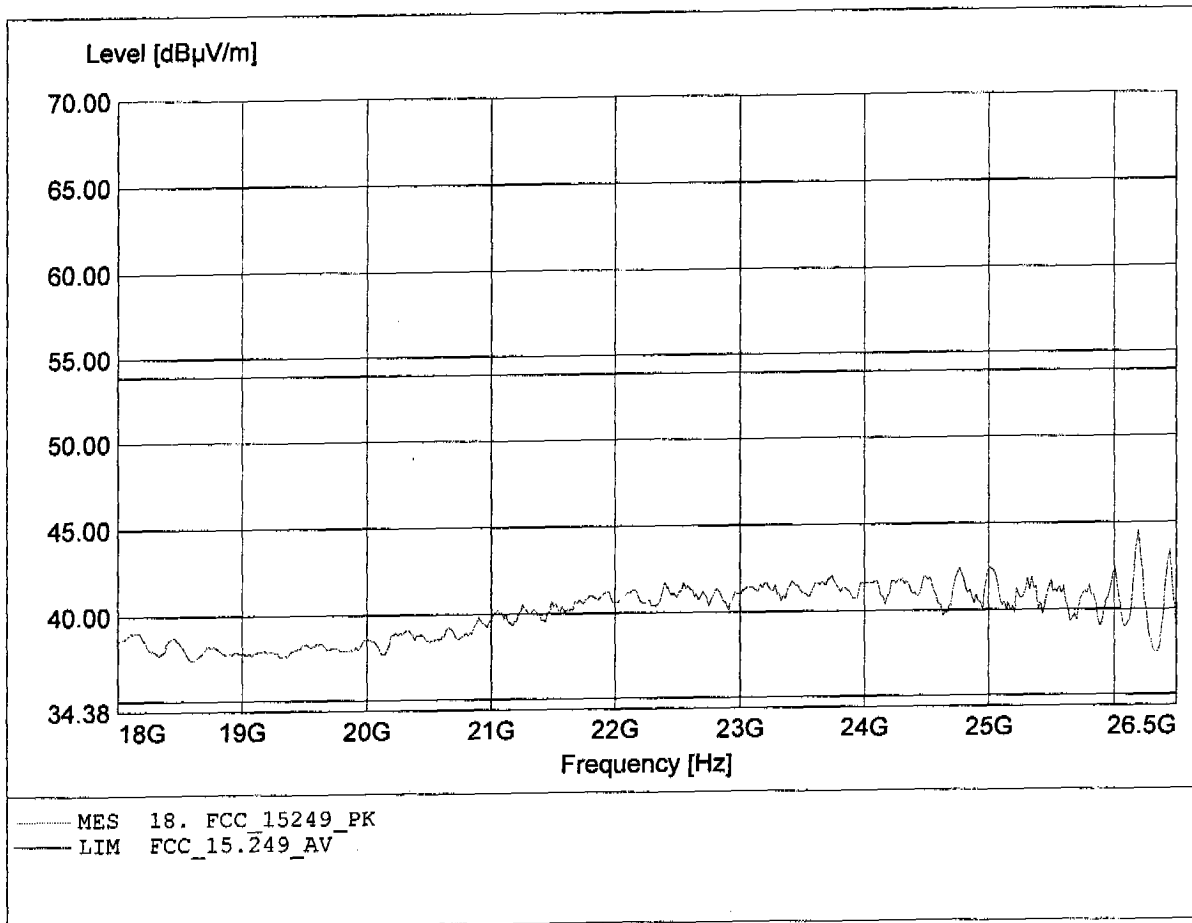

# Spurious emissions Field Strength

## FCC RULES PART 15, SUBPART C

EUT: 2.4 GHz Cordless Phone  
MODEL NO.: CT-P8800 CH50  
Approval Holder: Coby Manufacturing Co., Ltd.  
Test Site / Operator: ETS / MR. F.Schulz  
Temperature/Voltage: Temp. 25°C/ Unom.: 3.6 VDC battery  
Test Specification: according to §15.249  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.193GHz, Emax: 44.10dBµV/m, RBW: 1MHz

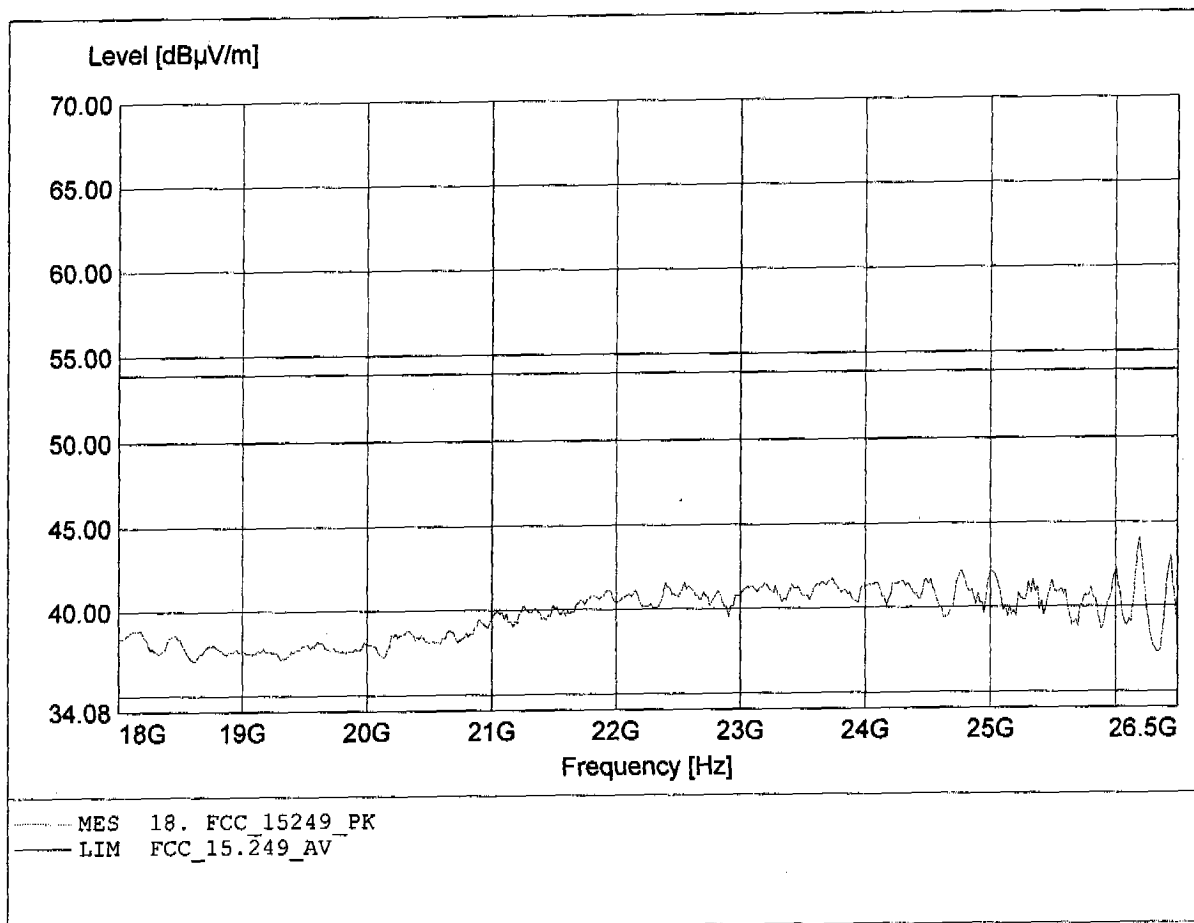



## Appendix D

Spurious Emissions conducted - Transmitter operating




## Appendix E

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: 2.4GHz Cordless Phone CH1  
Approval holder: Coby Manufacturing Co.,Ltd.  
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: V-network: ESH3-Z5 L1  
Comment: model: CT-P8800

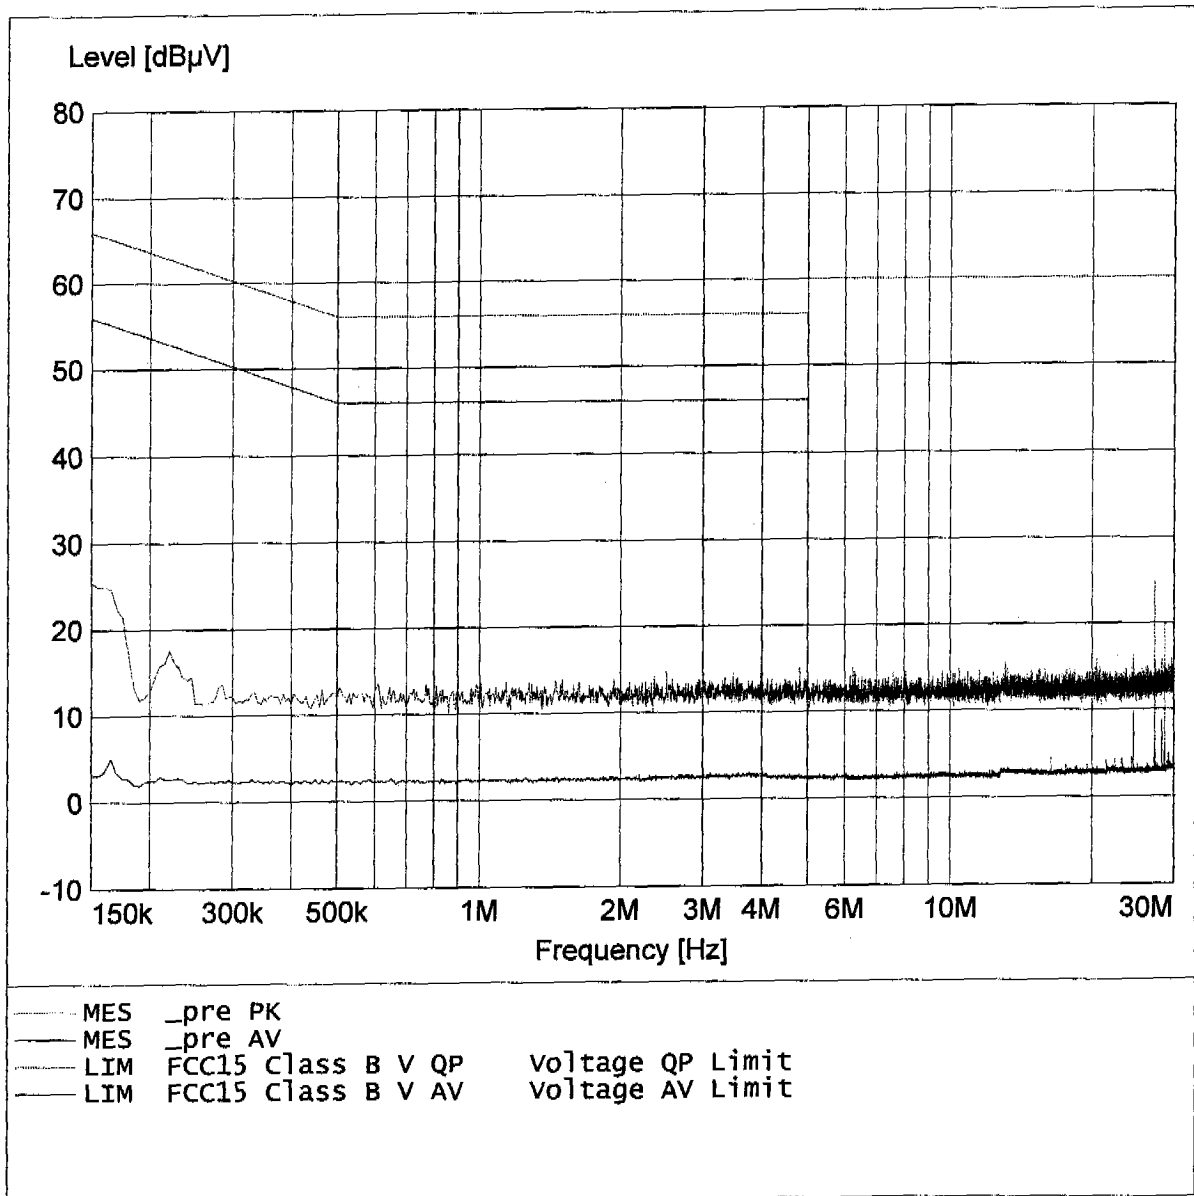

**EMI voltage test in the ac-mains according to FCC Part 15**

**Class B**


EUT: 2.4GHZ Cordless Phone CH1  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: V-network: ESH3-Z5 N  
Comment: model: CT-P8800

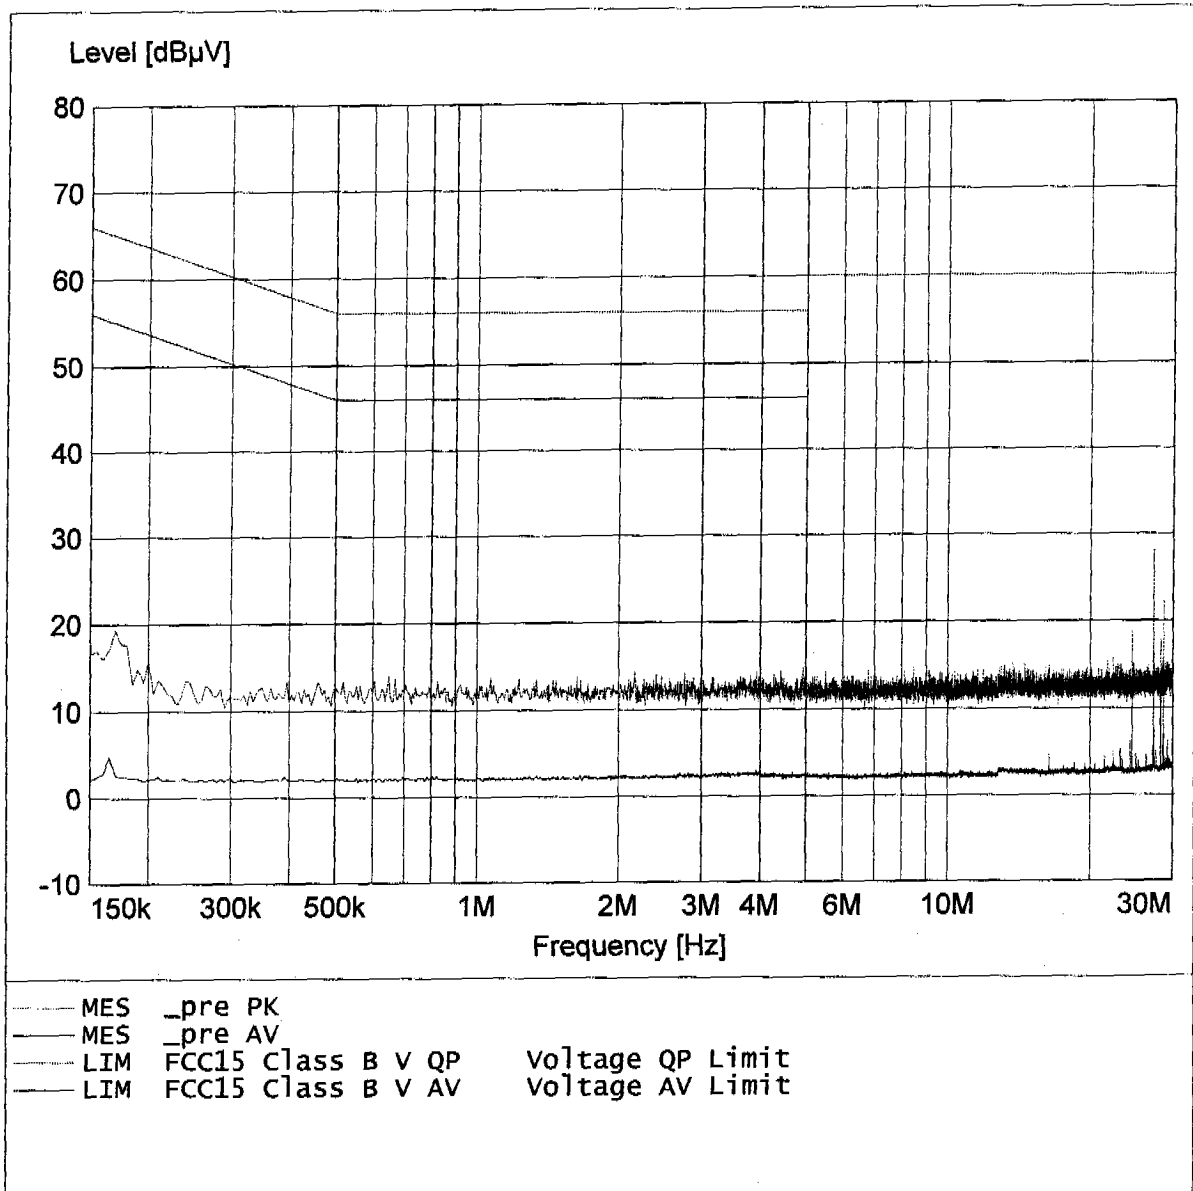

EMI voltage test in the ac-mains according to FCC Part 15

Class B


EUT: 2.4GHz Cordless Phone CH50  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: V-network: ESH3-Z5 L1  
Comment: model: CT-P8800

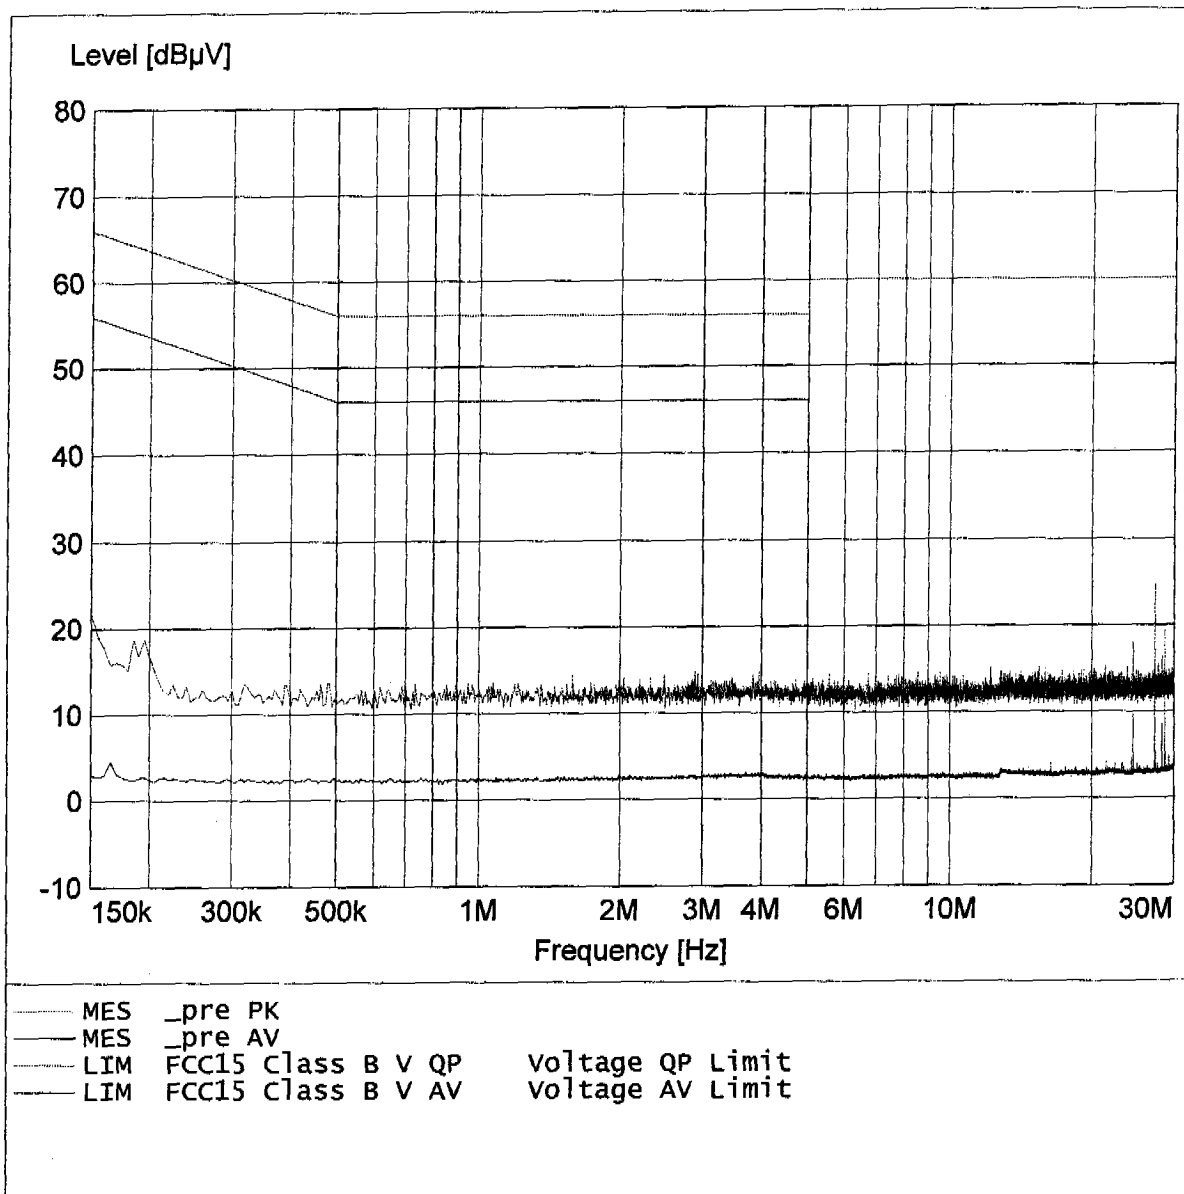

EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: 2.4GHz Cordless Phone CH50  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: V-network: ESH3-Z5 N  
Comment: model: CT-P8800

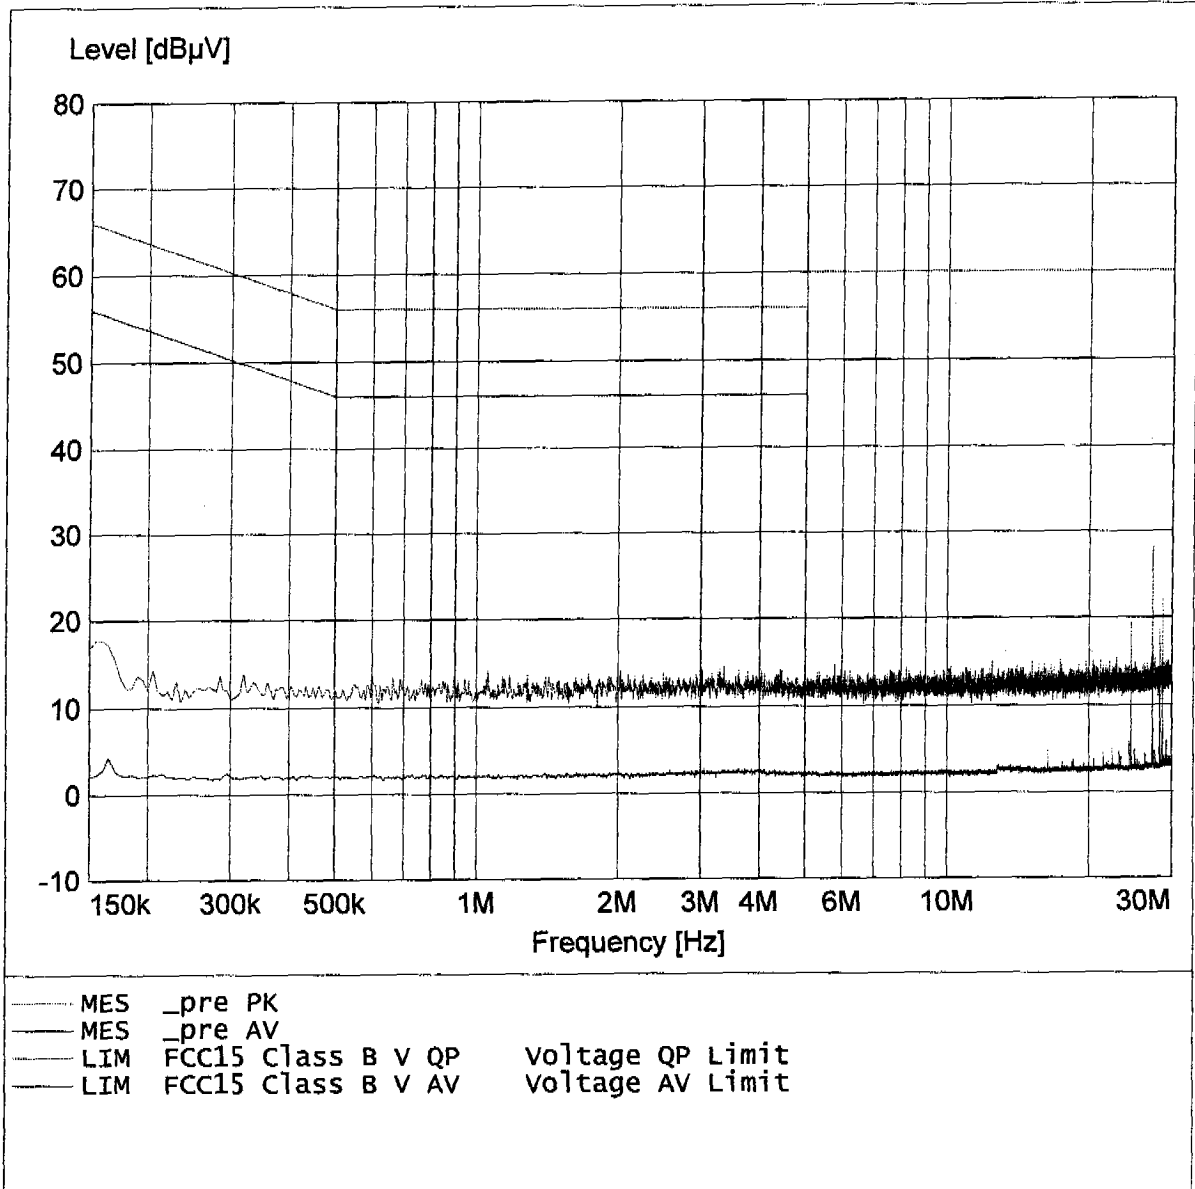




EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: 2.4GHz Cordless Phone Charge  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: V-network: ESH3-Z5 L1  
Comment: model: CT-P8800

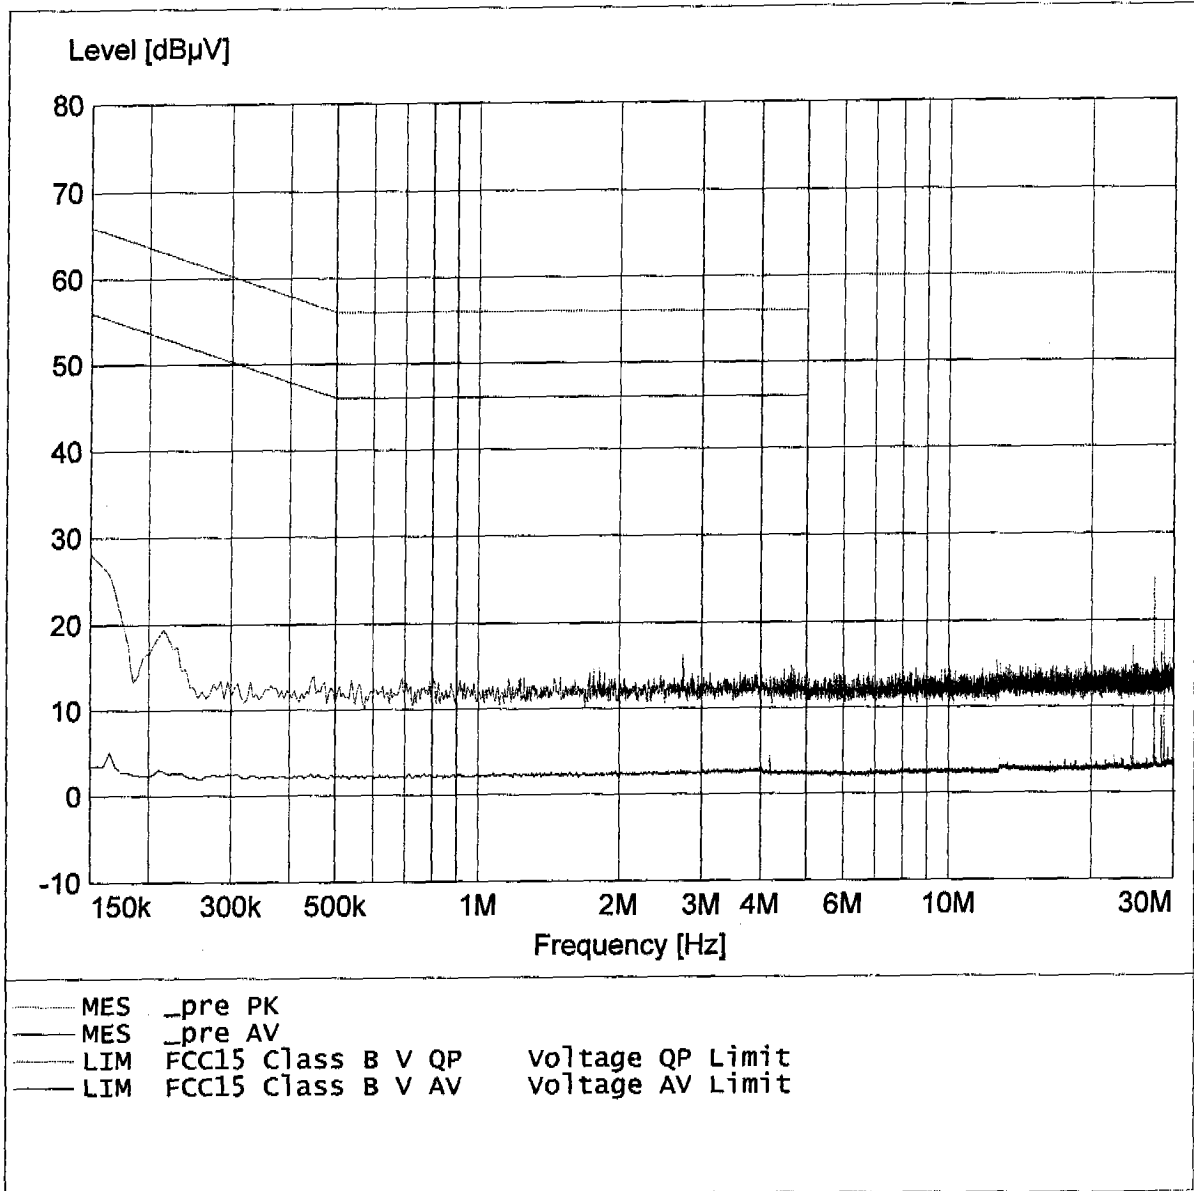

EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: 2.4GHz Cordless Phone Charge  
Approval Holder: Coby Manufacturing Co.,Ltd.  
Operating Condition: Unom: 120VAC (AC/DC adaptor), Tnom: 25°C  
Test Site: ETS  
Operator: Catey Lee  
Test Specification: V-network: ESH3-Z5 N  
Comment: model: CT-P8800

