



FCC Part 74 FM STL & LPAS

Test Report

APPLICANT	NiCOM USA, INC
	1690 CACTUS ROAD SAN DIEGO CA. 92154 USA
FCC ID	RMYTSL910
MODEL NUMBER	Tsl910
PRODUCT DESCRIPTION	STL TRANSMITTER
DATE SAMPLE RECEIVED	12/27/2018
DATE TESTED	12/28/2018
TESTED BY	Tim Royer
APPROVED BY	Franklin Rose
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Report Version	Description	Issue Date
2249UT18_PT74 STL TestReport_	Rev1	Initial Issue	01/30/2019
	Rev2	To Correct Issue Date of report	03/12/2020

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE
WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS	2
GENERAL INFORMATION	3
FREQUENCY OF OPERATION	4
TEST FREQUENCIES	5
RESULTS SUMMARY	6
RF POWER OUTPUT	7
FCC PART 2.1033(C)(8).....	8
TEST DATA: POWER IN THE FINAL STAGE	8
MODULATION CHARACTERISTICS	9
AUDIO FREQUENCY RESPONSE.....	10
TEST DATA: AUDIO FREQUENCY RESPONSE PLOT	10
AUDIO INPUT VS MODULATION	11
TEST DATA: MODULATION LIMITING: N/A	11
OCCUPIED BANDWIDTH	12
TEST DATA: OCCUPIED BANDWIDTH TABLE	13
20DB OCCUPIED BANDWIDTH PLOT LOW END OF BAND	13
20DB OCCUPIED BANDWIDTH PLOT MIDDLE OF BAND	14
20DB OCCUPIED BANDWIDTH PLOT HIGH END OF BAND	15
EMISSION MASK	16
EMISSION MASK PLOT LOW END OF BAND, STL MASK.....	17
EMISSION MASK PLOT MIDDLE OF BAND, STL MASK.....	18
EMISSION MASK PLOT HIGH END OF BAND, STL MASK.....	19
SPURIOUS EMISSIONS AT ANTENNA TERMINAL	20
TEST DATA: LOW FREQUENCY.....	21
TEST DATA: MIDDLE FREQUENCY.....	21
TEST DATA: HIGH FREQUENCY.....	21
RADIATED FIELD STRENGTH OF SPURIOUS EMISSIONS	22
TEST DATA: LOW FREQUENCY.....	24
TEST DATA: MIDDLE FREQUENCY.....	24
TEST DATA: HIGH FREQUENCY.....	25
FREQUENCY STABILITY	26
TEST DATA: FREQUENCY STABILITY TABLE	27
TEST DATA: FREQUENCY STABILITY PLOT	28
STATEMENT OF MEASUREMENT UNCERTAINTY	29
EQUIPMENT LIST.....	30

GENERAL REMARKS

Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
Designation #: US1070

Tested by:



Name and Title	Tim Royer, Project Manager / EMC Testing Engineer
Date	01/30/2019

Reviewed and Approved by:



Name and Title	Franklin Rose, Project Manager / EMC Specialist
Date	02/05/2019

GENERAL INFORMATION

EUT Description	STL TRANSMITTER
FCC ID	RMYTSL910
Model Number	Tsl910
EUT Power Source	<input checked="" type="checkbox"/> 110–120Vac/50– 60Hz
	<input type="checkbox"/> DC Power
	<input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed
	<input type="checkbox"/> Mobile
	<input type="checkbox"/> Portable
Antenna Connector	N Type
Test Conditions	The temperature was 26°C Relative humidity of 50%.
Modification to the EUT	No Modification to EUT.
Test Exercise	The EUT was placed in continuous transmit and was operated in "Test Mode" for digital emissions tests.
Applicable Standards	FCC CFR 47 Part 2, & 74, ANSI/TIA 603-D:2010, ANSI C63.4 2014, ETSI EN 300-422-1 V1.4.2
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070

FREQUENCY OF OPERATION

STL STATION OPERATION: 74.501, 74.502

§74.501 Classes of aural broadcast auxiliary stations.

(a) *Aural broadcast STL station.* A fixed station for the transmission of aural program material between the studio and the transmitter of a broadcasting station other than an international broadcasting station.

(b) *Aural broadcast intercity relay (ICR) station.* A fixed station for the transmission of aural program material between radio broadcast stations, other than international broadcast stations, between FM radio broadcast stations and their co-owned FM booster stations, between noncommercial educational FM radio stations and their co-owned noncommercial educational FM translator stations assigned to reserved channels (Channels 201 to 220), between FM radio stations and FM translator stations operating within the coverage contour of their primary stations, or for such other purposes as authorized in §74.531.

(c) *Aural broadcast microwave booster station.* A fixed station in the broadcast auxiliary service that receives and amplifies signals of an aural broadcast STL or intercity relay station and retransmits them on the same frequency.

§74.502 Frequency assignment.

(b) The frequency band 944-952 MHz is available for assignment to aural STL and ICR stations. One or more of the following 25 kHz segments may be stacked to form a channel which may be assigned with a maximum authorized bandwidth of 300 kHz except as noted in the following Table. The channel will be assigned by its center frequency, channel bandwidth, and emission designator. The following frequencies are the centers of individual segments. When stacking an even number of segments, the center frequency specified will deviate from the following frequencies in that it should correspond to the actual center of stacked channels. When stacking an odd number of channels, the center frequency specified will correspond to one of the following frequencies.

Operating Frequency	Band 2: 944 – 952 MHz (STL Transmitter, PT 74E)
----------------------------	---

FREQUENCY OF OPERATION

LOW POWER AUXILIARY OPERATION: 74.801, 74.802

§74.801 Definitions.

Low power auxiliary station. An auxiliary station authorized and operated pursuant to the provisions set forth in this subpart. Devices authorized as low power auxiliary stations are intended to transmit over distances of approximately 100 meters for uses such as wireless microphones, cue and control communications, and synchronization of TV camera signals.

§74.802 Frequency assignment.

(a)(1) Frequencies within the following bands may be assigned for use by low power auxiliary stations:

941.500-944.000 MHz
 944.000-952.000 MHz
 952.850-956.250 MHz
 956.45-959.85 MHz

Operating Frequency	Band 1: 941.5 – 944 MHz (LPAS, PT 74H) Band 2: 944 – 952 MHz (LPAS, PT 74H) Band 3: 952.85 – 956.25 MHz (LPAS, PT 74H) Band 4: 956.45 – 959.85 MHz (LPAS, PT 74H)
----------------------------	--

TEST FREQUENCIES

OVERALL OPERATION:

Operating Frequency	Band 1: 941.5 – 944 MHz (LPAS, PT 74H) Band 2: 944 – 952 MHz (LPAS, PT 74H) Band 2: 944 – 952 MHz (STL Transmitter, PT 74E) Band 3: 952.85 – 956.25 MHz (LPAS, PT 74H) Band 4: 956.45 – 959.85 MHz (LPAS, PT 74H)
----------------------------	---

Testing Frequency	Low: 941.6 MHz Mid: 950.4 MHz High: 959.2 MHz
--------------------------	---

RESULTS SUMMARY

FCC Rule Part	Requirement	Result
2.1046(a), 74.534(a) - (c), 74.861(a), (d)(1)	Conducted Power	PASS
2.1047(a) - (d)	Modulation Characteristics	PASS
2.1049(e)(3) - (5)	Occupied Bandwidth	PASS
74.535(a)(1)(i)-(ii)	Emission Mask	PASS
2.1051(a), 74.535(a)(iii), 74.861(d)(3)	Spurious Emissions at Antenna Terminal	PASS
2.1053, 74.535(a)(iii), 74.861(d)(3)	Radiated Field Strength of Spurious Emissions	PASS
2.1055(a)(3), 74.561, 74.861(c)	Frequency Stability	PASS

RF POWER OUTPUT

Rule Part No.: 2.1046(a), 74.534(b), 74.861(a), (d)(1)

Requirement:

§74.534 Power limitations.

(a) *Transmitter output power.* (1) Transmitter output power shall be limited to that necessary to accomplish the function of the system.

(2) In the 17,700 to 19,700 MHz band, transmitter output power shall not exceed 10 watts.

(b) In no event shall the average equivalent isotropically radiated power (EIRP), as referenced to an isotropic radiator, exceed the values specified in the following table. In cases of harmful interference, the Commission may, after notice and opportunity for hearing, order a change in the equivalent isotropically radiated power of this station.

Frequency band (MHz)	Maximum Allowable ¹ EIRP (dBW)
944 to 952	+ 40
17,700 to 18,600	+ 55
18,600 to 19,700	+ 35

§74.861 Technical requirements.


(a) Except as specified in paragraph (e) of this section, transmitter power is the power at the transmitter output terminals and delivered to the antenna, antenna transmission line, or any other impedance-matched, radio frequency load. For the purpose of this subpart, the transmitter power is the carrier power.

(d) For low power auxiliary stations operating in the bands other than those allocated for TV broadcasting, the following technical requirements are imposed.

(1) For all bands except the 1435-1525 MHz band, the maximum transmitter power which will be authorized is 1 watt. In the 1435-1525 MHz band, the maximum transmitter power which will be authorized is 250 milliwatts. Licensees may accept the manufacturer's power rating; however, it is the licensee's responsibility to observe specified power limits.

Method of Measurement: ANSI C63.26

Test Setup Diagram:

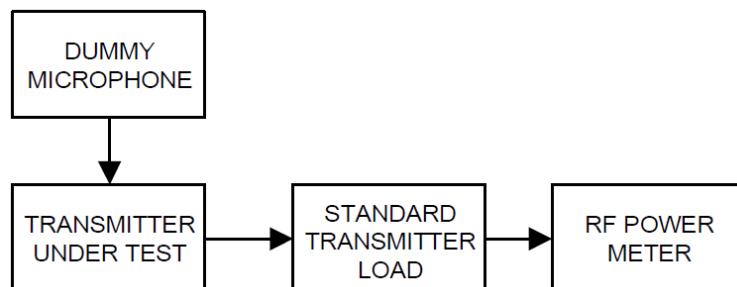

RF POWER OUTPUT

Test Data: Mean Output Power Measurement Table

Power	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Power Limit (W)	Margin (W)
High	941.60	42.67	18.49	n/a	n/a
High	950.40	42.80	19.06	10,000	9980.94
High	959.20	42.54	17.95	n/a	n/a
Low	941.60	29.97	0.99	1.0	0.01
Low	950.40	30.01	1.00	1.0	0.00
Low	959.20	29.92	0.98	1.0	0.02

Rated Output Power = 0 - 20 W

Measured Output Power, High = 19.06 W

Calculated Tolerance (W) = +/- 2.05

Calculated Tolerance (dBm) = +/- 0.46

Measured Output Power, Low = 1.0 W

Calculated Tolerance (W) = +/- 0.02

Calculated Tolerance (dBm) = +/- 0.08

FCC Part 2.1033(C)(8)

(8) The dc voltages applied to and dc currents into the several elements of the final radio frequency amplifying device for normal operation over the power range.

Test Data: Power In the Final Stage

Power at Final Stage: (115 VAC) (1.40 A) = **161 Watts**

MODULATION CHARACTERISTICS

Rule Part No.: Part 2.202(g)(III)(3) "Sound Broadcasting"

Test Requirements: Part 2.202(g)(III)(3)

Description of emission	Necessary bandwidth		Designation of emission
Formula	Sample calculation		
III-A. FREQUENCY MODULATION			
3. Sound Broadcasting			
Sound broadcasting	$B_n = 2M + 2DK$, $K = 1$ (typically)	Monaural, $D = 75,000$ Hz, $M = 15,000$, Bandwidth: $18,000$ Hz = 180 kHz	180KF3E

Type of Emission: **180KF3E**

$$B_n = 2M + 2DK$$

$$B_n = 2(15K) + 2(75K) (1) = 180K$$

Where:

$M = 15$ (Modulation Frequency, kHz)

$D = 75$ (Peak Deviation, kHz)

$K = 1$ (constant value)

AUDIO FREQUENCY RESPONSE

Rule Part No.: FCC Part 2.1047(a), (b)

Test Requirements: FCC Part 2.1047(a)

§2.1047 Measurements required: Modulation characteristics.

(a) *Voice modulated communication equipment.* A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Method of Measurement: ANSI C63.26 s. 5.3.3

Test Setup Diagram:


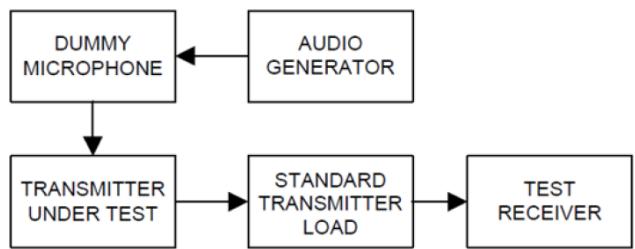


Figure 3—Equipment set-up audio frequency response (constant input)

Test Data: Audio Frequency Response Plot

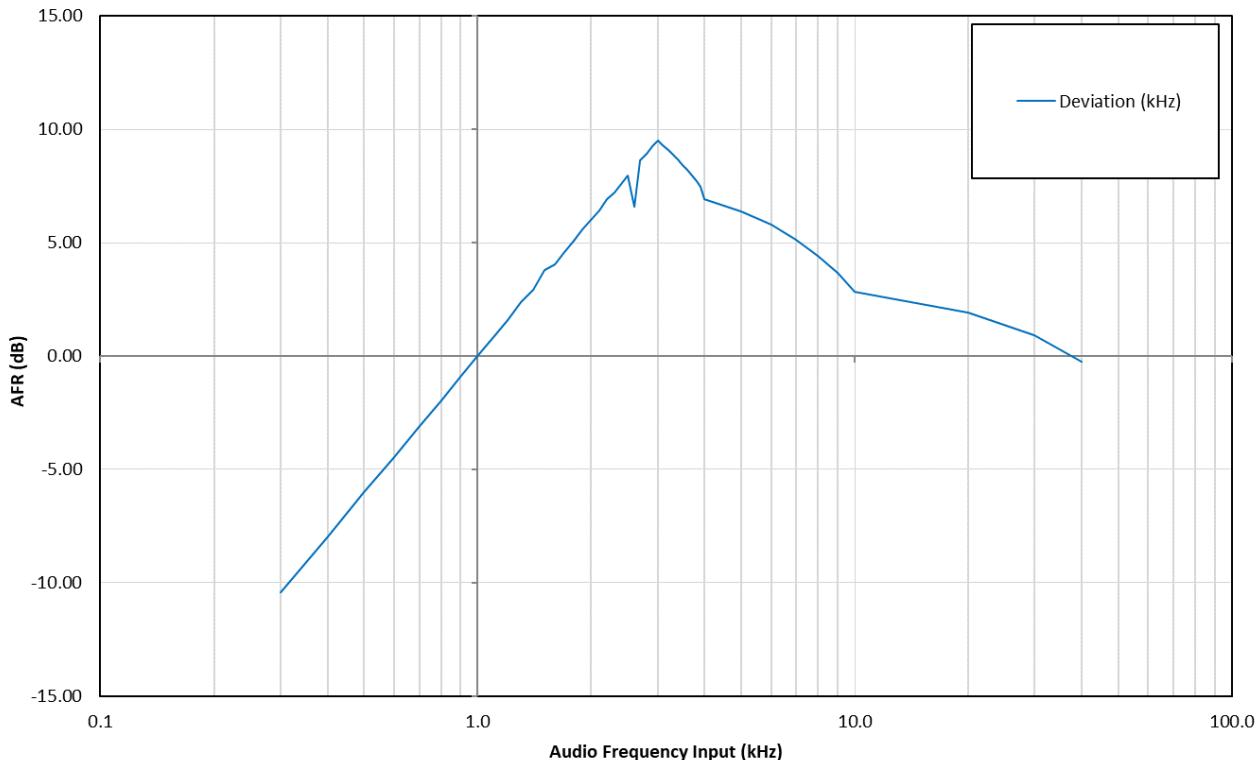

Applicant: NiCOM USA, INC

FCC ID: RMYTSL910

Report: 2249UT18_PT74 STL TestReport_Rev1

AUDIO INPUT VS MODULATION

Rule Part No.: FCC Part 2.1047(b)

Test Requirements: FCC Part 2.1047(b)

(b) *Equipment which employs modulation limiting.* A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

Method of Measurement: ANSI C63.26 s. 5.3.2

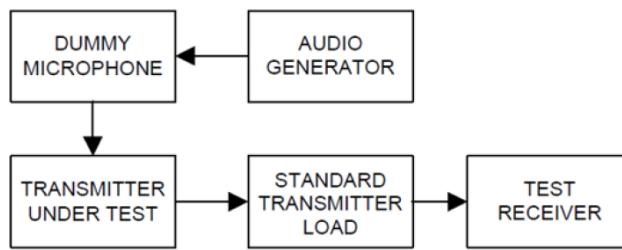


Figure 3—Equipment set-up audio frequency response (constant input)

Test data: Modulation Limiting: n/a

This equipment is not equipped with a modulation limiting circuit.

OCCUPIED BANDWIDTH

Rule Part No.: FCC Part 2.1049(e)(3) – (5)

Requirement: 2.1049(e)(3)-(5)

§2.1049 Measurements required: Occupied bandwidth.

(e) Transmitters for use in the Radio Broadcast Services:


(3) FM broadcast transmitter not used for multiplex operation—when modulated 85 percent by a 15 kHz input signal.

(4) FM broadcast transmitters for multiplex operation under Subsidiary Communication Authorization (SCA)—when carrier is modulated 70 percent by a 15 kHz main channel input signal, and modulated an additional 15 percent simultaneously by a 67 kHz subcarrier (unmodulated).

(5) FM broadcast transmitter for stereophonic operation—when modulated by a 15 kHz input signal to the main channel, a 15 kHz input signal to the stereophonic subchannel, and the pilot subcarrier simultaneously. The input signals to the main channel and stereophonic subchannel each shall produce 38 percent modulation of the carrier. The pilot subcarrier should produce 9 percent modulation of the carrier.

Method of Measurement: ANSI C63.26 s. 5.4.4

Test Setup Diagram:




OCCUPIED BANDWIDTH & EMISSION MASK

Test Data: Occupied Bandwidth Table

Frequency (MHz)	99% OBW (kHz)
941.60	86.62
950.40	92.80
959.20	86.62


99% OCCUPIED BANDWIDTH PLOT Low End of band

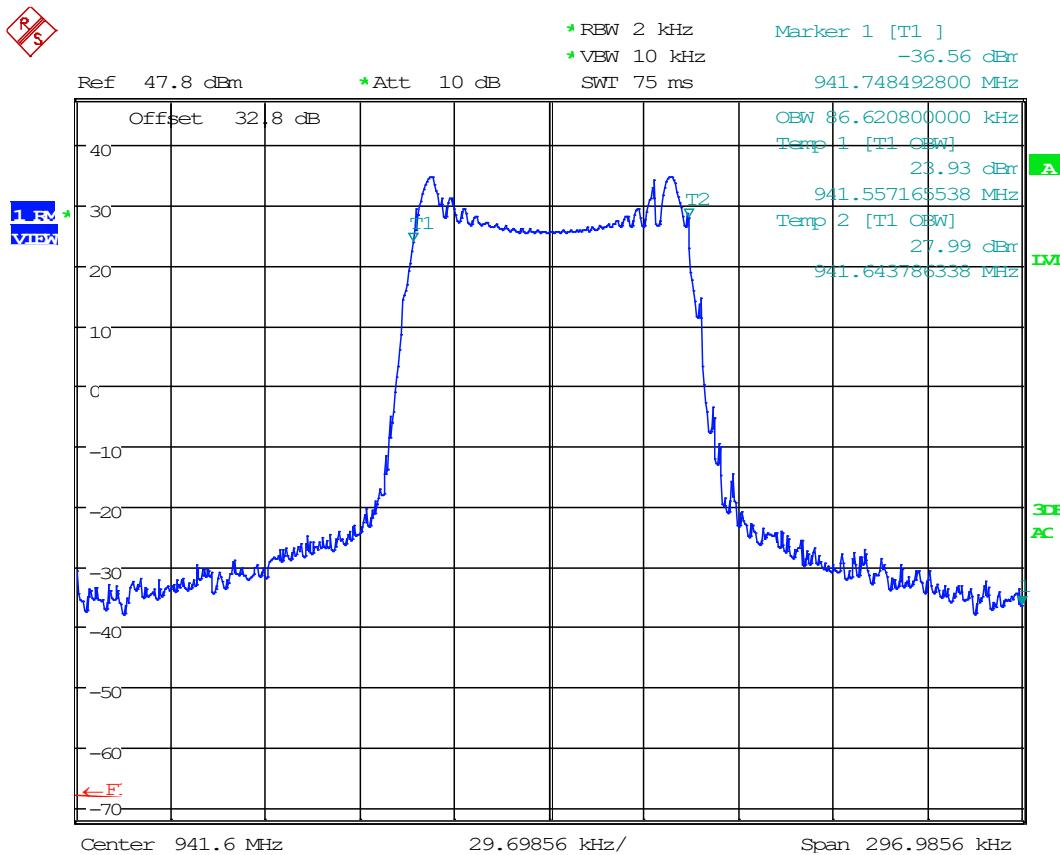

Date: 17.JAN.2019 17:00:14

OCCUPIED BANDWIDTH & EMISSION MASK


99% OCCUPIED BANDWIDTH PLOT Middle of band

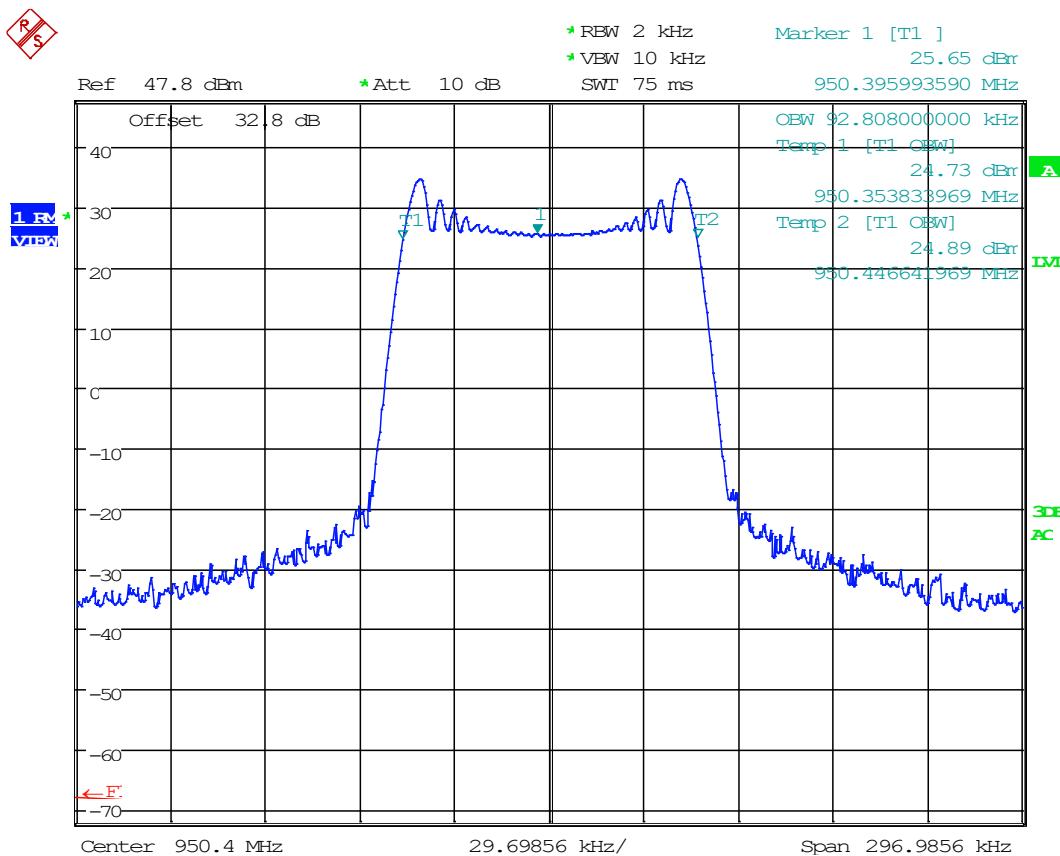

Date: 17.JAN.2019 16:58:30

OCCUPIED BANDWIDTH & EMISSION MASK

99% OCCUPIED BANDWIDTH PLOT High End of band

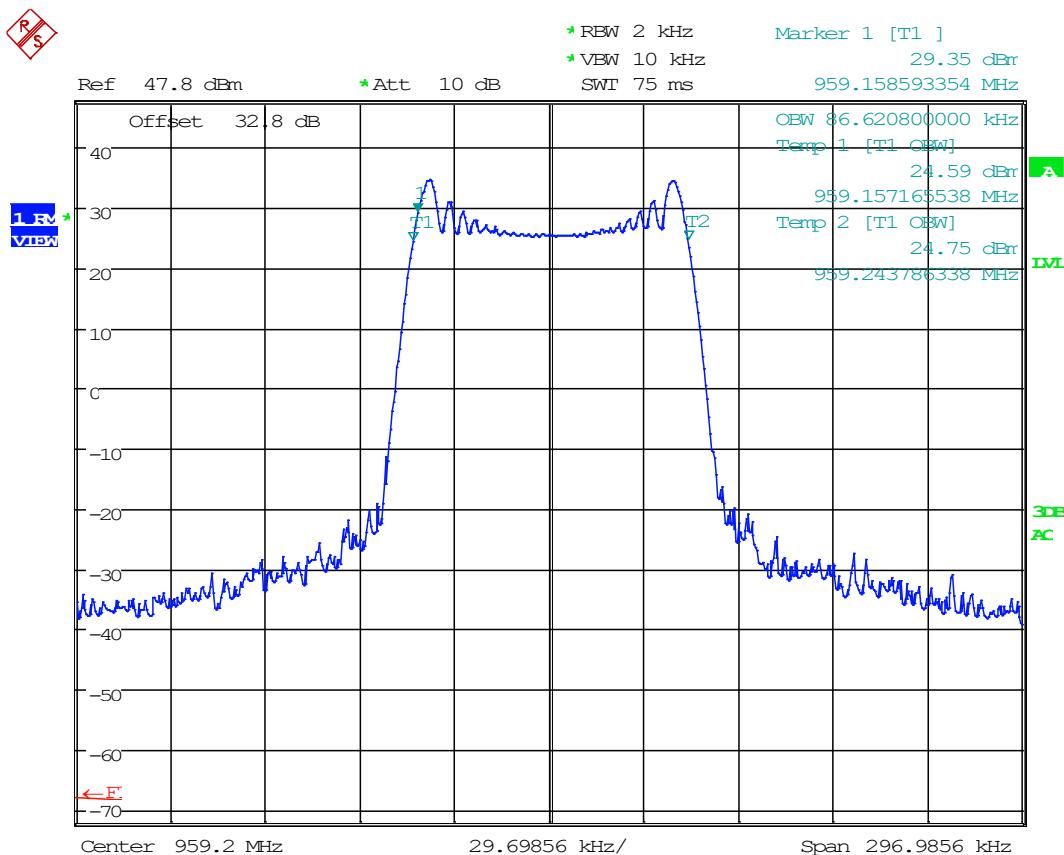

Date: 17.JAN.2019 17:03:03

EMISSION MASK

Rule Part No.: FCC Part 74.535(a)(1)(i)-(ii)

Requirement: 74.535(a)(1)(i)-(ii)

§74.535 Emission and bandwidth.

(1) When using frequency modulation:


(i) On any frequency removed from the assigned (center) frequency by more than 50% up to and including 100% of the authorized bandwidth: At least 25 dB in any 100 kHz reference bandwidth (B_{REF});

(ii) On any frequency removed from the assigned (center) frequency by more than 100% up to and including 250% of the authorized bandwidth: At least 35 dB in any 100 kHz reference bandwidth;

(iii) On any frequency removed from the assigned (center) frequency by more than 250% of the authorized bandwidth: At least $43 + 10 \log_{10} (P_{MEAN} \text{ in watts})$ dB, or 80 dB, whichever is the lesser attenuation, in any 100 kHz reference bandwidth.


Method of Measurement: ANSI C63.26 s. 5.4.4

Test Setup Diagram:



EMISSION MASK


EMISSION MASK PLOT Low End of band, STL Mask

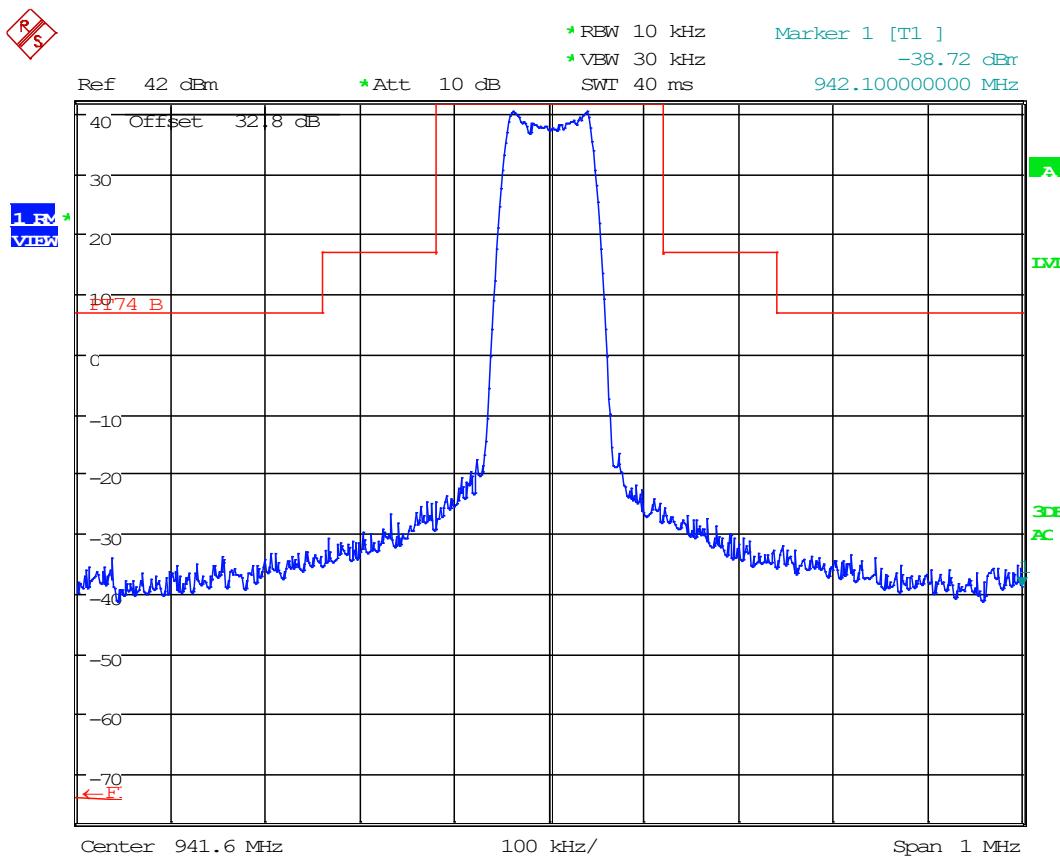

Date: 18.JAN.2019 15:56:20

EMISSION MASK


EMISSION MASK PLOT Middle of band, STL Mask

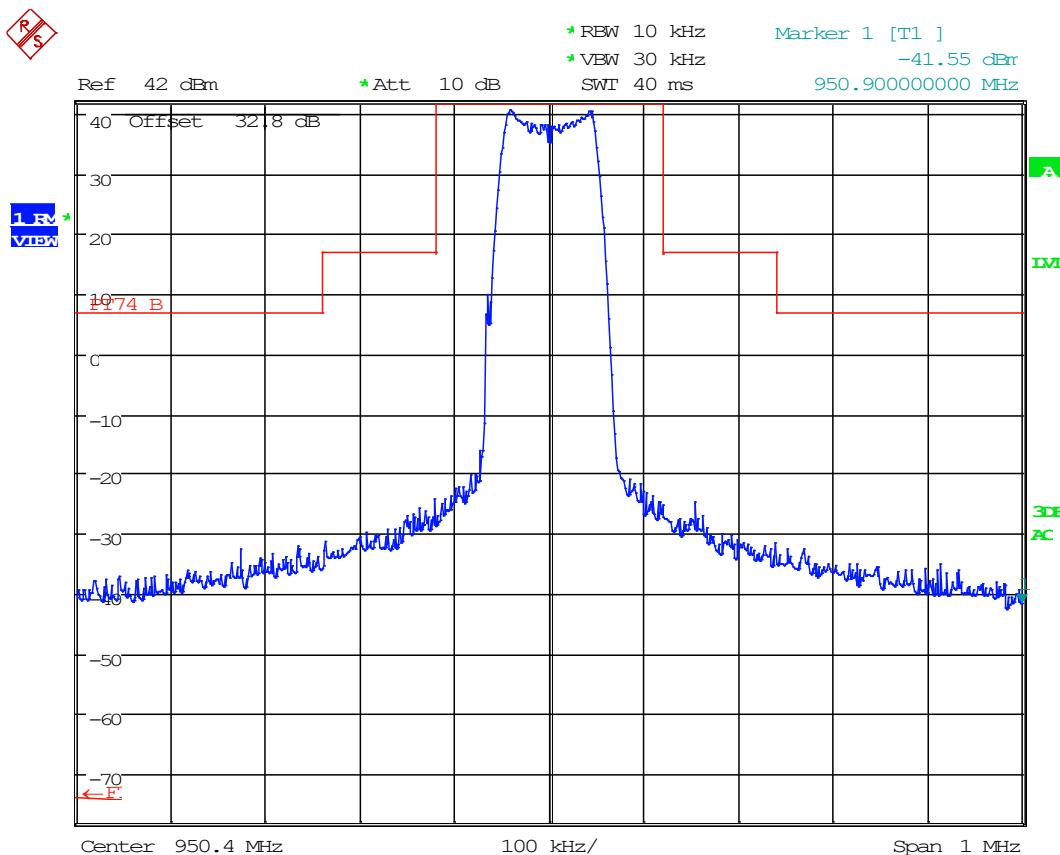

Date: 18.JAN.2019 15:54:53

EMISSION MASK

EMISSION MASK PLOT High End of band, STL Mask

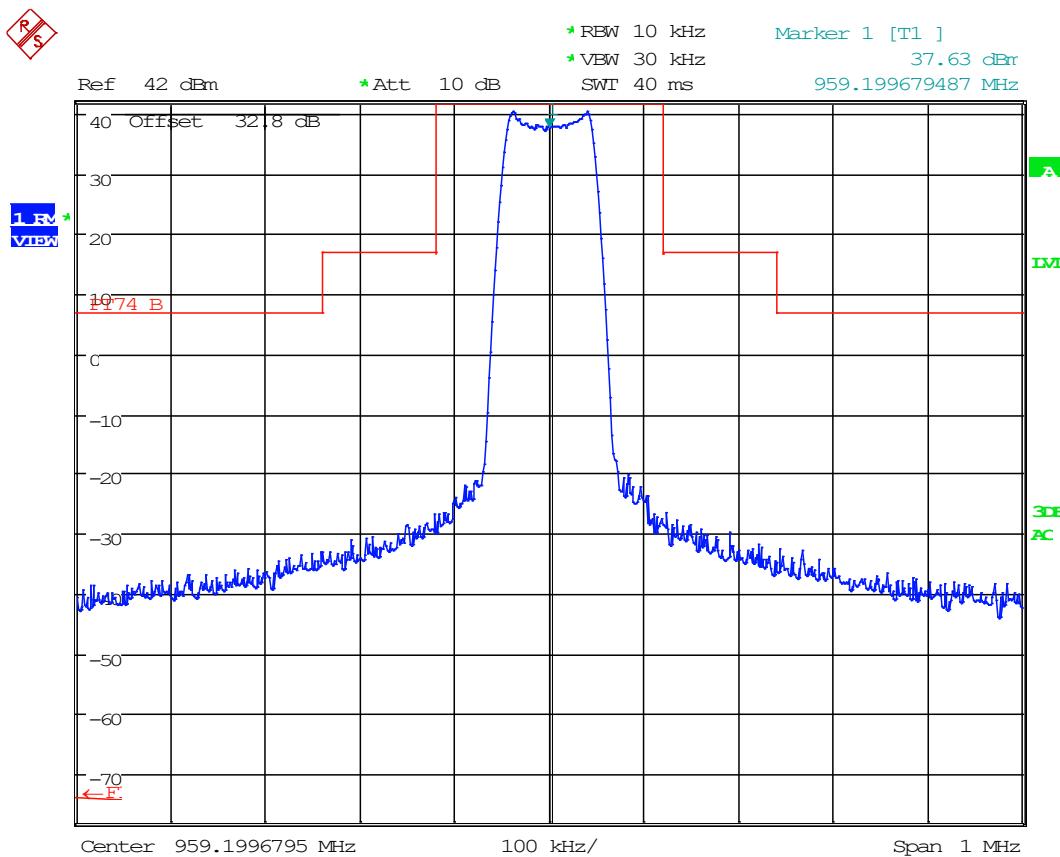

Date: 18.JAN.2019 15:53:23

SPURIOUS EMISSIONS AT ANTENNA TERMINAL

Rule Part No.: Part 2.1051, 74.535(a)(iii), 74.861(d)(3)

Test Requirements: 74.535(a)(iii), 74.861(d)(3)

§74.535 Emission and bandwidth.

(1) When using frequency modulation:

(i) On any frequency removed from the assigned (center) frequency by more than 50% up to and including 100% of the authorized bandwidth: At least 25 dB in any 100 kHz reference bandwidth (B_{REF});

(ii) On any frequency removed from the assigned (center) frequency by more than 100% up to and including 250% of the authorized bandwidth: At least 35 dB in any 100 kHz reference bandwidth;

(iii) On any frequency removed from the assigned (center) frequency by more than 250% of the authorized bandwidth: At least $43 + 10 \log_{10} (P_{MEAN} \text{ in watts})$ dB, or 80 dB, whichever is the lesser attenuation, in any 100 kHz reference bandwidth.


§74.861 Technical requirements.

(3) For the 26.1-26.480 MHz, 161.625-161.775 MHz, 450-451 MHz, and 455-456 MHz bands, the occupied bandwidth shall not be greater than that necessary for satisfactory transmission and, in any event, an emission appearing on any discrete frequency outside the authorized band shall be attenuated, at least, $43+10 \log^{10}$ (mean output power, in watts) dB below the mean output power of the transmitting unit. The requirements of this paragraph shall also apply to the applications for certification of equipment for the 944-952 MHz band until January 13, 2018.

Method of Measurement: ANSI C63.26 s. 5.7.3, 5.7.4

Note: A notch filter was used to attenuate the fundamental emission of the EUT during testing.

Test Setup Diagram:



SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Test Data: Low Frequency

Harmonic	Harmonic (MHz)	Loss at Harmonic (dB)	Analyzer offset (dB)	Measured Level (dBm)	Correction (dB)	Level (dBm)	Limit (dBc)	Limit (dBm)	Margin (dB)
2	1883.20	42.00	0.00	3.83	42.00	-38.17	56.01	-13.00	25.17
3	2824.80	42.00	0.00	-4.08	42.00	-46.08	56.01	-13.00	33.08
4	3766.40	42.00	0.00	-30.15	42.00	-72.15	56.01	-13.00	59.15

Test Data: Middle Frequency

Harmonic	Harmonic (MHz)	Loss at Harmonic (dB)	Analyzer offset (dB)	Measured Level (dBm)	Correction (dB)	Level (dBm)	Limit (dBc)	Limit (dBm)	Margin (dB)
2	1900.80	42.00	0.00	5.70	42.00	-36.30	56.01	-13.00	23.30
3	2851.20	42.00	0.00	-2.93	42.00	-44.93	56.01	-13.00	31.93
4	3801.60	42.00	0.00	-27.18	42.00	-69.18	56.01	-13.00	56.18

Test Data: High Frequency

Harmonic	Harmonic (MHz)	Loss at Harmonic (dB)	Analyzer offset (dB)	Measured Level (dBm)	Correction (dB)	Level (dBm)	Limit (dBc)	Limit (dBm)	Margin (dB)
2	1918.40	42.00	0.00	5.93	42.00	-36.07	56.01	-13.00	23.07
3	2877.60	42.00	0.00	-3.15	42.00	-45.15	56.01	-13.00	32.15
4	3836.80	42.00	0.00	-25.01	42.00	-67.01	56.01	-13.00	54.01

RADIATED FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Part No.: Part 2.1053(a), 74.535(a)(iii), 74.861(d)(3)

Test Requirements: 74.535(a)(iii), 74.861(d)(3)

§74.535 Emission and bandwidth.

(1) When using frequency modulation:

(i) On any frequency removed from the assigned (center) frequency by more than 50% up to and including 100% of the authorized bandwidth: At least 25 dB in any 100 kHz reference bandwidth (B_{REF});

(ii) On any frequency removed from the assigned (center) frequency by more than 100% up to and including 250% of the authorized bandwidth: At least 35 dB in any 100 kHz reference bandwidth;


(iii) On any frequency removed from the assigned (center) frequency by more than 250% of the authorized bandwidth: At least $43 + 10 \log_{10} (P_{MEAN} \text{ in watts})$ dB, or 80 dB, whichever is the lesser attenuation, in any 100 kHz reference bandwidth.

§74.861 Technical requirements.


(3) For the 26.1-26.480 MHz, 161.625-161.775 MHz, 450-451 MHz, and 455-456 MHz bands, the occupied bandwidth shall not be greater than that necessary for satisfactory transmission and, in any event, an emission appearing on any discrete frequency outside the authorized band shall be attenuated, at least, $43+10 \log^{10}$ (mean output power, in watts) dB below the mean output power of the transmitting unit. The requirements of this paragraph shall also apply to the applications for certification of equipment for the 944-952 MHz band until January 13, 2018.

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Site Setup:

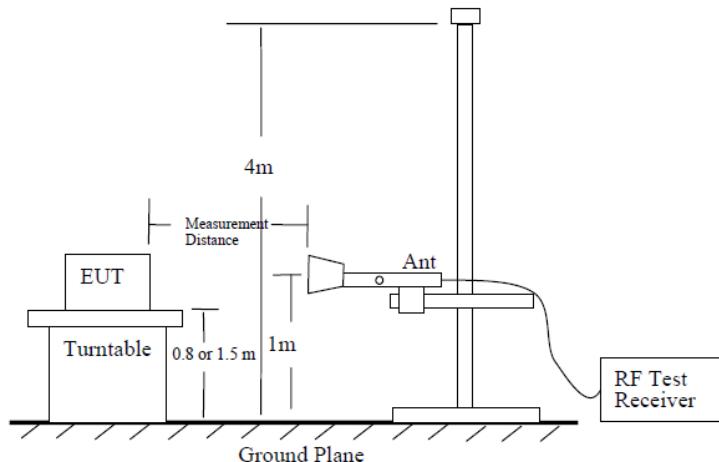

EUT Orientation(s):

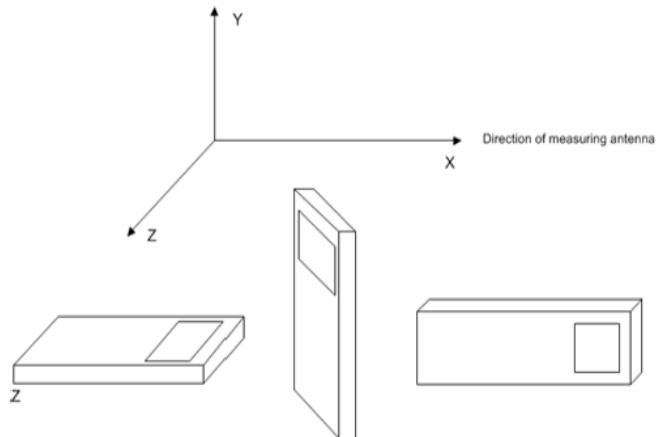

Note: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from the lowest frequency generated internally to at least the tenth harmonic of the fundamental. This test was conducted in accordance with the standard listed above using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669. The measurements below represent the worst case of all the frequencies tested.

Note: Six (6) or more of the highest emissions of each worst-case operational mode of the EUT are represented below. Emissions 20 dB below the limit were not required to be reported.

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: Low Frequency

Tuned Frequency (MHz)	Emission Frequency (MHz)	Meter Reading (dB μ V)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Distance (m)	Field Strength (dB μ V/m)	ERP (dBm)	Limit	Margin (dB)
941.6	30.6	21.0	V	0.6	13.3	3.0	34.9	-62.5	-13.0	49.5
941.6	106.9	14.4	V	1.2	10.6	3.0	26.2	-71.2	-13.0	58.2
941.6	187.7	14.1	V	1.6	13.7	3.0	29.4	-68.0	-13.0	55.0
941.6	187.7	11.1	H	1.6	13.7	3.0	26.4	-71.0	-13.0	58.0
941.6	1882.0	26.8	V	5.1	31.9	3.0	63.8	-33.6	-13.0	20.6
941.6	1882.0	26.8	H	5.1	31.9	3.0	63.8	-33.5	-13.0	20.5
941.6	2823.0	14.3	H	6.3	32.2	3.0	52.9	-44.5	-13.0	31.5
941.6	2823.0	18.8	V	6.3	32.2	3.0	57.4	-40.0	-13.0	27.0
941.6	3764.0	17.9	V	7.3	33.6	3.0	58.8	-38.6	-13.0	25.6
941.6	3764.0	14.6	H	7.3	33.6	3.0	55.5	-41.9	-13.0	28.9
941.6	4705.0	14.0	H	8.2	34.0	3.0	56.2	-41.2	-13.0	28.2
941.6	4705.0	15.7	V	8.2	34.0	3.0	58.0	-39.4	-13.0	26.4
941.6	5646.0	18.5	V	9.0	34.7	3.0	62.2	-35.1	-13.0	22.1
941.6	5646.0	19.0	H	9.0	34.7	3.0	62.7	-34.7	-13.0	21.7
941.6	6587.0	17.5	H	9.8	35.8	3.0	63.0	-34.3	-13.0	21.3
941.6	6587.0	18.8	V	9.8	35.8	3.0	64.4	-33.0	-13.0	20.0
941.6	7528.0	31.3	V	10.4	35.8	3.0	77.4	-20.0	-13.0	7.0
941.6	7528.0	30.5	H	10.4	35.8	3.0	76.7	-20.7	-13.0	7.7
941.6	8469.0	30.4	H	11.0	35.8	3.0	77.2	-20.2	-13.0	7.2
941.6	8469.0	27.3	V	11.0	35.8	3.0	74.1	-23.3	-13.0	10.3
941.6	9410.0	25.4	V	11.6	36.5	3.0	73.4	-24.0	-13.0	11.0
941.6	9410.0	29.3	H	11.6	36.5	3.0	77.4	-20.0	-13.0	7.0

Test Data: Middle Frequency

Tuned Frequency (MHz)	Emission Frequency (MHz)	Meter Reading (dB μ V)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Distance (m)	Field Strength (dB μ V/m)	ERP (dBm)	Limit	Margin (dB)
950.4	106.9	13.6	V	1.2	10.6	3.0	25.4	-72.0	-13.0	59.0
950.4	106.9	13.6	H	1.2	10.6	3.0	25.4	-71.9	-13.0	58.9
950.4	187.7	9.5	H	1.6	13.7	3.0	24.8	-72.6	-13.0	59.6
950.4	187.7	9.9	V	1.6	13.7	3.0	25.1	-72.2	-13.0	59.2
950.4	1900.0	28.0	V	5.1	32.0	3.0	65.2	-32.2	-13.0	19.2
950.4	1900.0	20.0	H	5.1	32.0	3.0	57.2	-40.2	-13.0	27.2
950.4	2850.0	16.6	H	6.4	32.2	3.0	55.1	-42.3	-13.0	29.3
950.4	2850.0	14.5	V	6.4	32.2	3.0	53.0	-44.3	-13.0	31.3
950.4	3800.0	17.8	V	7.3	33.5	3.0	58.6	-38.8	-13.0	25.8
950.4	3800.0	15.7	H	7.3	33.5	3.0	56.5	-40.9	-13.0	27.9
950.4	4750.0	17.5	H	8.2	34.0	3.0	59.8	-37.6	-13.0	24.6
950.4	4750.0	15.8	V	8.2	34.0	3.0	58.1	-39.3	-13.0	26.3
950.4	5700.0	17.1	V	9.0	34.8	3.0	60.9	-36.4	-13.0	23.4
950.4	5700.0	17.7	H	9.0	34.8	3.0	61.5	-35.9	-13.0	22.9
950.4	6650.0	18.9	H	9.8	35.8	3.0	64.5	-32.9	-13.0	19.9
950.4	6650.0	19.7	V	9.8	35.8	3.0	65.3	-32.1	-13.0	19.1
950.4	7600.0	28.6	V	10.4	35.8	3.0	74.8	-22.5	-13.0	9.5
950.4	7600.0	30.1	H	10.4	35.8	3.0	76.3	-21.1	-13.0	8.1
950.4	8550.0	26.3	H	11.1	35.8	3.0	73.1	-24.2	-13.0	11.2
950.4	8550.0	26.8	V	11.1	35.8	3.0	73.7	-23.7	-13.0	10.7
950.4	9500.0	28.0	V	11.6	36.7	3.0	76.3	-21.1	-13.0	8.1
950.4	9500.0	25.9	H	11.6	36.7	3.0	74.2	-23.2	-13.0	10.2

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: High Frequency

Tuned Frequency (MHz)	Emission Frequency (MHz)	Meter Reading (dB μ V)	Antenna Polarity	Coax Loss (dB)	Correction Factor (dB/m)	Distance (m)	Field Strength (dB μ V/m)	ERP (dBm)	Limit (dBm)	Margin (dB)
959.2	106.9	11.2	H	1.2	10.6	3.0	23.0	-74.4	-13.0	61.4
959.2	106.9	13.5	V	1.2	10.6	3.0	25.3	-72.1	-13.0	59.1
959.2	187.7	11.0	V	1.6	13.7	3.0	26.2	-71.2	-13.0	58.2
959.2	1918.0	28.9	H	5.2	32.1	3.0	66.2	-31.2	-13.0	18.2
959.2	1918.0	31.3	V	5.2	32.1	3.0	68.6	-28.8	-13.0	15.8
959.2	2877.0	14.2	H	6.4	32.5	3.0	53.1	-44.3	-13.0	31.3
959.2	2877.0	19.7	V	6.4	32.5	3.0	58.6	-38.8	-13.0	25.8
959.2	3836.0	17.1	H	7.4	33.5	3.0	58.0	-39.4	-13.0	26.4
959.2	3836.0	18.2	V	7.4	33.5	3.0	59.1	-38.2	-13.0	25.2
959.2	4795.0	17.9	H	8.3	34.1	3.0	60.2	-37.2	-13.0	24.2
959.2	4795.0	18.5	V	8.3	34.1	3.0	60.9	-36.5	-13.0	23.5
959.2	5754.0	16.8	H	9.1	34.8	3.0	60.6	-36.7	-13.0	23.7
959.2	5754.0	20.1	V	9.1	34.8	3.0	64.0	-33.4	-13.0	20.4
959.2	6713.0	20.8	H	9.9	35.7	3.0	66.4	-31.0	-13.0	18.0
959.2	6713.0	19.7	V	9.9	35.7	3.0	65.3	-32.1	-13.0	19.1
959.2	7672.0	27.9	H	10.5	35.8	3.0	74.1	-23.2	-13.0	10.2
959.2	7672.0	29.0	V	10.5	35.8	3.0	75.3	-22.1	-13.0	9.1
959.2	8631.0	27.0	H	11.1	35.7	3.0	73.9	-23.5	-13.0	10.5
959.2	8631.0	30.3	V	11.1	35.7	3.0	77.2	-20.2	-13.0	7.2
959.2	9590.0	30.8	H	11.6	36.9	3.0	79.3	-18.1	-13.0	5.1
959.2	9590.0	27.5	V	11.6	36.9	3.0	76.0	-21.4	-13.0	8.4

Applicant: NiCOM USA, INC

FCC ID: RMYTSL910

Report: 2249UT18_PT74 STL TestReport_Rev1

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055(a)(3), 74.561, 74.861(c)

Test Requirements: Part 2.1055(a)(3)

§2.1055 Measurements required: Frequency stability.

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(3) From 0° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

Test Requirements: Part 74.561, 73.1545(b)

§74.561 Frequency tolerance.

In the bands above 944 MHz, the operating frequency of the transmitter shall be maintained in accordance with the following table:

Frequency band (MHz)	Tolerance as percentage of assigned frequency
944 to 952	0.005

$$944 \text{ MHz} * 0.005 = 4720 \text{ kHz}$$

§74.861 Technical requirements.

(c) Low power auxiliary transmitters not required to operate on specific carrier frequencies shall operate sufficiently within the authorized frequency band edges to insure the emission bandwidth falls entirely within the authorized band.

Method of Measurements: ANSI C63.26 5.6


FREQUENCY STABILITY

Test Data: Frequency Stability Table

Minimum of FCC PT 74 & BETS-6 Limit	1	+/- kHz	
Lower Limit	958.999920	MHz	
Upper Limit	959.001920	MHz	
Rated Supply Voltage	115.0	<input checked="" type="radio"/> AC <input type="radio"/> DC	
Temperature / Voltage Variation			
Temperature (°C)	Supplied Voltage (V)	Frequency (MHz)	Deviation (kHz)
0	115.0	959.00097	-0.050
+5	97.8	959.00092	0.000
+5	115.0	959.00092	0.000
+5	132.3	959.00091	0.010
+10	115.0	959.00095	-0.030
+20 (reference)	115	959.00092	0.000
+30	115.0	959.00088	0.040
+45	97.8	959.00077	0.150
+45	115.0	959.00076	0.160
+45	132.3	959.00077	0.150
+50	115.0	959.00070	0.220

FREQUENCY STABILITY

Test Data: Frequency Stability Plot

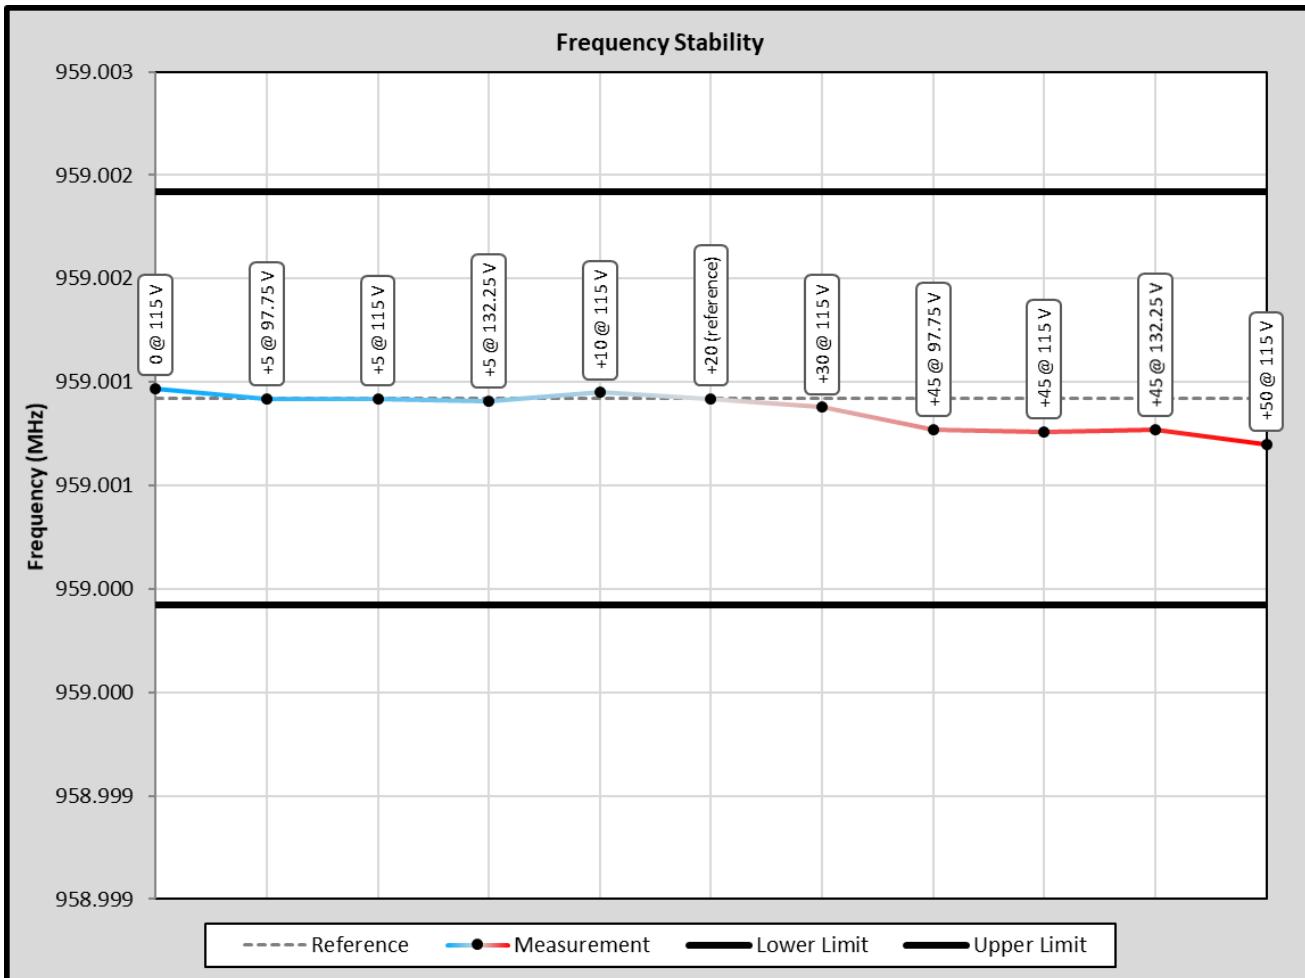

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods - Part 4: "Uncertainty in EMC Measurements" and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	± 49.5 Hz	(1)
RF Conducted Power	± 0.93 dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	± 1.86 dB	
Occupied Bandwidth	± 2.65 %	
Audio Frequency Response	± 1.86 dB	
Modulation limiting	± 1.88 %	
Radiated RF Power	± 1.4 dB	
Maximum frequency deviation:		
Within 300 Hz and 6 kHz of audio freq.	± 1.88 %	
Within 6 kHz and 25 kHz of audio freq.	± 2.04 %	
Rad Emissions Sub Meth up to 26.5GHz	± 2.14 dB	
Rad Emissions Sub Meth up to 18-40 GHz	± 2.04 %	
Adjacent channel power	± 1.47 dB	(1)
Intermodulation - Tx	± 2.07 dB	
Noise Figure	± 1.00 dB	
Transient Frequency Response	± 1.88 %	
Temperature	± 1.0 °C	(1)
Humidity	± 5.0 %	
Radiated Emissions to 6.0GHz	± 4.4 dB	
Power line conducted emissions	± 3.9 dB	

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
CHAMBER	Panashield	3M	N/A	12/31/17	12/31/19
Antenna: Active Loop	ETS-Lindgren	6502	00062529	12/11/17	12/11/19
Antenna: Biconical 1057	Eaton	94455-1	1057	12/13/17	12/13/19
Antenna: Log-Periodic 1243	Eaton	96005	1243	04/20/18	04/20/21
Antenna: Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	01/30/17	01/30/20
Coaxial Cable - Chamber 3 cable set (backup)	Micro-Coax	Chamber 3 cable set (backup)	KMKM-0244-02 KMKM-0670-01 KFKF-0197-00	02/27/17	02/27/19
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
EMI Test Receiver R & S ESU 40	Rohde & Schwarz	ESU 40	100320	08/28/18	08/28/20
Comb Generator	Com-Power Corp	CGO-515	291728	NA	NA
Function Generator	Standford	DS340	25200	02/21/18	02/21/20
Modulation Analyzer	HP	8901A	3050A05856	04/13/17	04/13/20
Audio Analyzer	HP	8903B	3011A13084	02/20/18	02/20/20
Audio Load	Heathkit	ID-5252	00714	NA	NA
Temperature Chamber LARGE	Tenney Engineering	TTRC	11717-7	NA	NA
Type K J Thermometer	Martel	303	080504494	11/06/17	11/06/19
Frequency Counter Small Chamber	HP	5385A	3242A07460	08/22/17	08/22/19
High Power Attenuator NNFN 30dB 2000W DC-1G	Bird	8329-300	4980	12/27/18	12/27/20
Attenuator N 30dB 500W DC-2.5G	Bird	8325	1761	12/27/18	12/27/20
Attenuator N 30dB 100W DC-6G	Pasternack	PE7214-30	#110	12/27/18	12/27/20
Attenuator N 20dB 20W DC-4G	Narda	766-20	0605	12/27/18	12/27/20
Attenuator N 10dB 20W DC-4G	Narda	766-10	0010	12/27/18	12/27/20
Tunable Notch Filter 54-210 MHz	Eagle	210BFBF	54-210 MHz (#42)	12/27/18	12/27/20
Coaxial Cable - BMBM-0061-01 RG400	Pasternack	PE3582LF-24	BMBM-0061-01	12/27/18	12/27/20
Coaxial Cable - BMBM-0184-01 Silver	TEK		BMBM-0184-01	12/27/18	12/27/20
Coaxial Cable - BMBM-0183-01 RG400	Pasternack	PE3582LF-72	BMBM-0183-01	12/27/18	12/27/20
XLR Breakout Cable (input)	Timco	n/a	n/a	n/a	n/a

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF REPORT