



Report No: FCC 1709112 File reference No: 2017-07-11

Applicant: Richen Industrial Co., Ltd.

Product: True Wireless Bluetooth Earphone

Model No: A1

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: July 11, 2017

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1709112 Page 2 of 83

Date: 2017-07-15



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

Page 3 of 83

Report No.: FCC1709112

Date: 2017-07-15



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure	12
6.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	22
8.0	Maximum Output Power	34
9.0	Carrier Frequency Separation.	37
10.0	Number of Hopping Channel	41
11.0	Time of Occupancy (Dwell Time).	45
12.0	Out of Band Measurement.	58
13.0	Antenna Requirement.	71
14.0	FCC ID Label	72
15.0	Photo of Test Setup and EUT View.	73

Report No.: FCC1709112 Page 4 of 83

Date: 2017-07-15



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian

District, Shenzhen, Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Richen Industrial Co., Ltd.

Address: Rm.1203, Building 4 East, Saige Technopark, Huaqiang North Road, Futian District,

Shenzhen, China

Telephone: 0755-82797551 Fax: 0755-82798175

1.3 Description of EUT

Product: True Wireless Bluetooth Earphone

Manufacturer: Richen Industrial Co., Ltd.

Address: Rm.1203, Building 4 East, Saige Technopark, Huaqiang North Road,

Futian District, Shenzhen, China

Brand Name: N/A
Model Number: A1
Additional Model Number: N/A

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: Integral Antenna and the maximum Gain of this antenna is -1.0dBi;

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1709112 Page 5 of 83

Date: 2017-07-15



1.5 Test Duration 2017-07-05 to 2017-07-11

1.6 Test Uncertainty Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Terry Tang

Page 6 of 83

Report No.: FCC1709112

Date: 2017-07-15



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2016-08-22	2017-08-21
TWO	R&S	EZH3-Z5	100294	2016-08-22	2017-08-21
Line-V-NETW		EZH3-Z3	100294	2010-08-22	2017-08-21
TWO	R&S	EZH3-Z5	100253	2016-08-22	2017-08-21
Line-V-NETW		EZ113-Z3	100233	2010-06-22	2017-08-21
	R&S				
Ultra Broadband		HL562	100157	2016-08-23	2017-08-22
ANT					
	R&S	ESDV	100008	2016-08-22	2017-08-21
ESDV Test Receiver					
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2016-08-22	2017-08-21
System Controller	СТ	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2016-08-23	2017-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2016-08-22	2017-08-21
3m OATS			N/A	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2016-08-24	2017-08-23
Power meter	Anritsu	ML2487A	6K00003613	2016-08-22	2017-08-21
Power sensor	Anritsu	MA2491A	32263	2016-08-22	2017-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2016-08-23	2017-08-21
LISN	AFJ	LS16C	10010947251	2016-08-22	2017-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2016-08-23	2017-08-22
9*6*6 Anechoic			N/A	2016-08-24	2017-08-23
EMI Test Receiver	RS	ESCS30	100139	2016-08-22	2017-08-21
DE C-1-1-	SCHWARZBEC			2016 00 22	2017 00 22
RF Cable	K			2016-08-23	2017-08-22
Pre-Amplifier	HP	8447D	2727A05017	2016-08-05	2017-08-04
Pre-Amplifier	EM	EM30265		2016-08-05	2017-08-04

Page 7 of 83

Report No.: FCC1709112

Date: 2017-07-15



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 83


Report No.: FCC1709112

Date: 2017-07-15



5. Power Line Conducted Emission Test

5.1 Schematics of the test

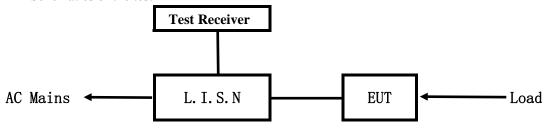


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

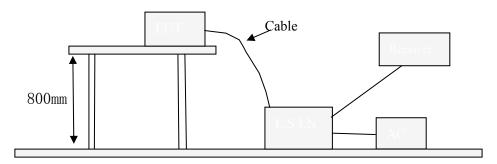

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Page 9 of 83

Report No.: FCC1709112

Date: 2017-07-15



A. **EUT**

Device	Manufacturer	Model	FCC ID
True Wireless Bluetooth Earphone	Richen Industrial Co., Ltd.	A1	RMZ-A1

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	АоНаі	A68-50200	Input: 100-240~, 50/60Hz, 0.35A;
		Output:DC5V, 2A	

5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.10-2013.

- Α Setup the EUT and simulators as shown on follow
- В Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1709112 Page 10 of 83

Date: 2017-07-15



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa


EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

80.0 dBuV

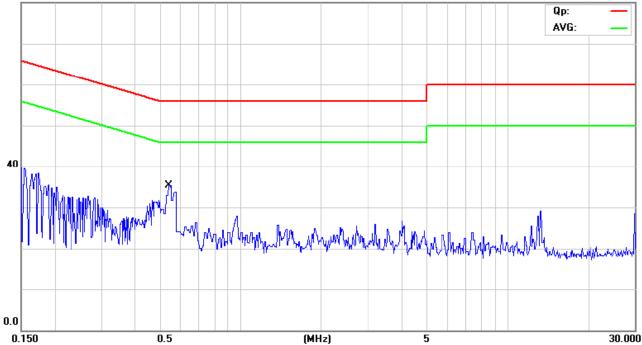

No. Mk.	Freq.	_		Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.5413	16.20	10.33	26.53	56.00	-29.47	QP	
2	0.5413	-6.60	10.33	3.73	46.00	-42.27	AVG	

Report No.: FCC1709112 Page 11 of 83

Date: 2017-07-15



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

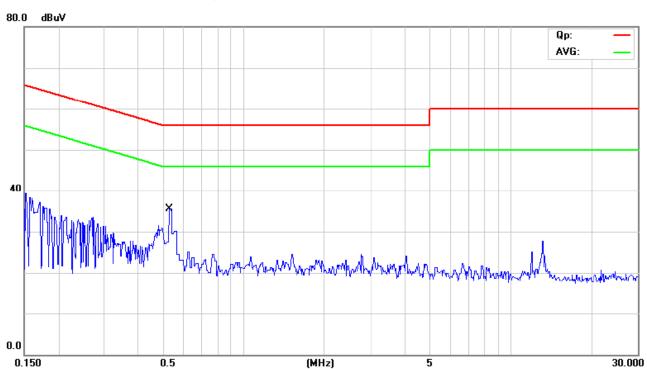

No. Mk	Freq.	Reading Level		Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBu∀	dB	Detector	Comment
1 *	0.5293	12.70	10.31	23.01	56.00	-32.99	QP	
2	0.5293	-8.80	10.31	1.51	46.00	-44.49	AVG	

Report No.: FCC1709112 Page 12 of 83


Date: 2017-07-15



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 8999988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

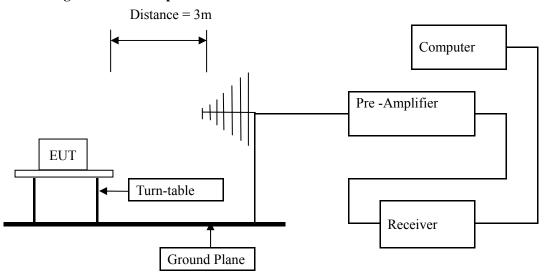

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1709112 Page 13 of 83

Date: 2017-07-15



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

	-	e 1
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. $\Pi/4DQPSK$ was the worst case because it has highest output power

Page 14 of 83

Report No.: FCC1709112 Date: 2017-07-15



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
146.800	36.67	Н	43.50
967.000	39.54	Н	54.00
298.440	31.08	Н	46.00
31.040	31.82	V	40.00
999.800	40.16	V	54.00
145.080	34.04	V	43.50

Report No.: FCC1709112 Page 15 of 83

Date: 2017-07-15



Test Figure:

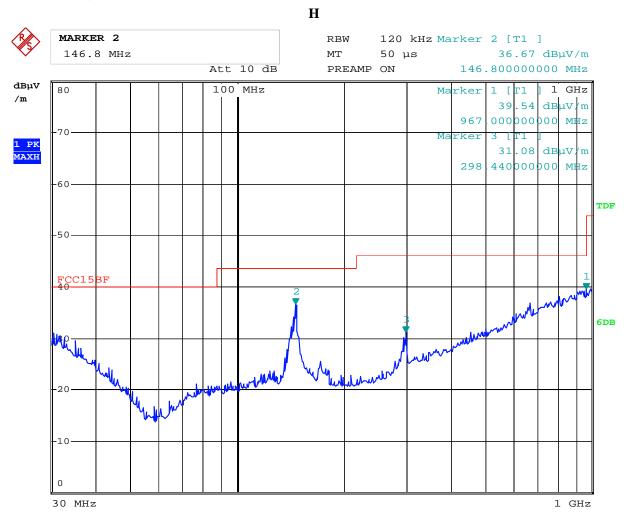


Report No.: FCC1709112 Page 16 of 83

Date: 2017-07-15



Test Figure:

V

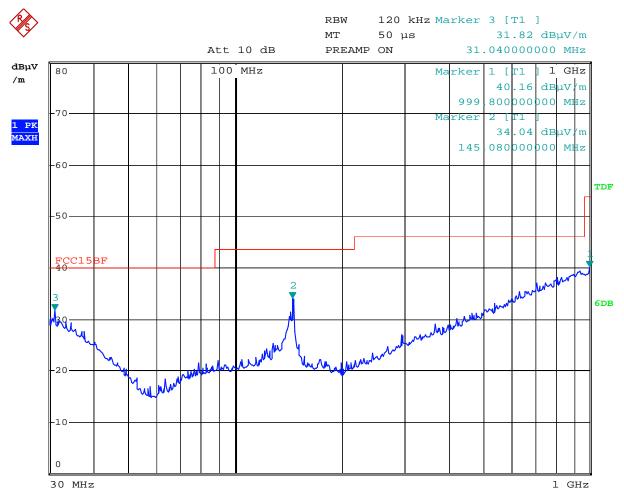

Report No.: FCC1709112 Page 17 of 83

Date: 2017-07-15



Operation Mode: Transmitting under Low Channel (2402MHz)

	0	, ,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4882	-	Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323	1	H/V	74(Peak)/ 54(AV)
9764	-	H/V	74(Peak)/ 54(AV)
12205	-	H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087	1	H/V	74(Peak)/ 54(AV)
19528	-	H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC1709112 Page 18 of 83

Date: 2017-07-15



Operation Mode: Transmitting under High Channel (2480MHz)

_			
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

Report No.: FCC1709112


Date: 2017-07-15



Please refer to the following test plots for details:


Low Channel: Horizontal

107.0 dBuV/m

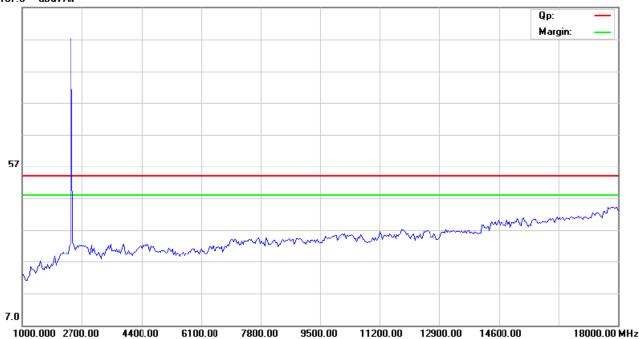

Low Channel: Vertical

107.0 dBuV/m

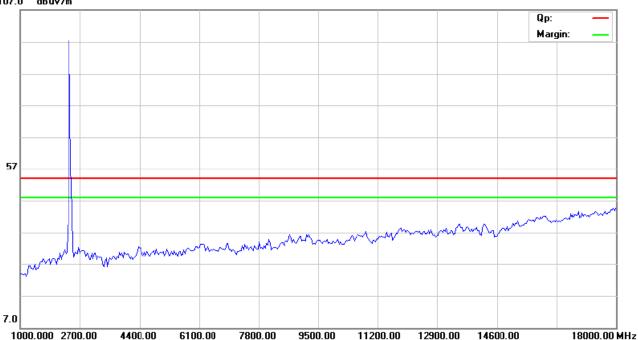

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 20 of 83

Report No.: FCC1709112

Date: 2017-07-15




Middle Channel: Horizontal

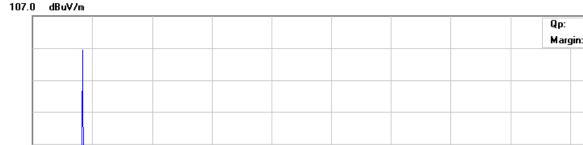



Middle Channel: Vertical

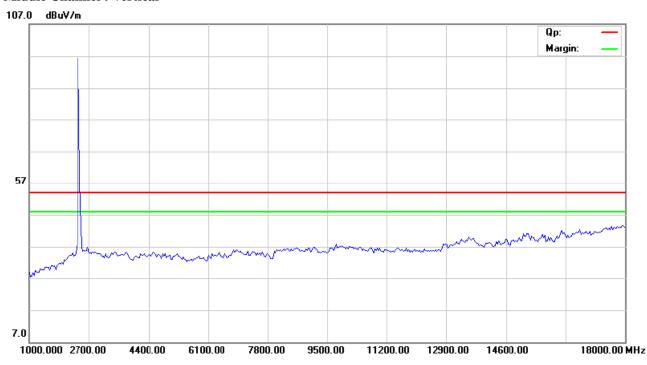

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 21 of 83

Report No.: FCC1709112

Date: 2017-07-15



High Channel: Horizontal



High Channel: Vertical


4400.00

6100.00

7800.00

1000.000 2700.00

7.0

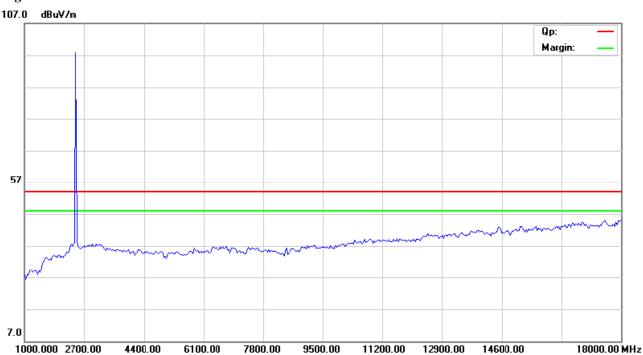

9500.00

11200.00

12900.00

14600.00

18000.00 MHz

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: FCC1709112

Date: 2017-07-15



Page 22 of 83

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

Type of Middle and Of Silv							
EUT	True Wirel	True Wireless Bluetooth Earphone		A1			
Mode	le Keep Transmitting		Input Voltage	DC3.7V			
Temperat	mperature 24 deg. C, Humidity		Humidity	56% RH			
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail			
Low	2402	788		Pass			
Middle	2441	794		Pass			
High	2480	788		Pass			

Page 23 of 83


Report No.: FCC1709112

Date: 2017-07-15



Test Figure:

1. Condition: Low Channel

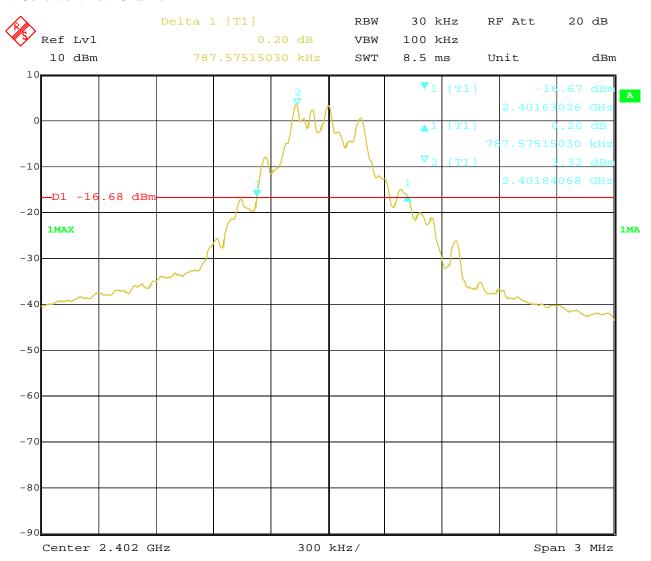


Date: 11.JUL.2017 11:44:44 Report No.: FCC1709112 Page 24 of 83

Date: 2017-07-15



2. Condition: Middle Channel

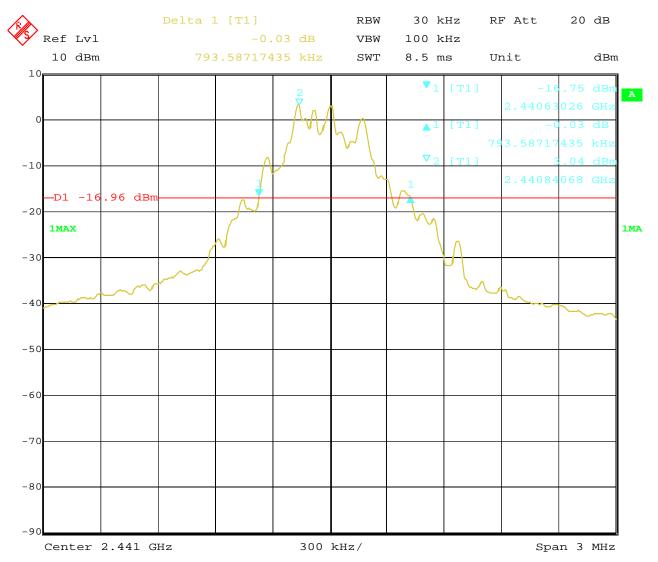


11.JUL.2017 11:42:06 Date:

Report No.: FCC1709112 Page 25 of 83

Date: 2017-07-15



3. High Channel

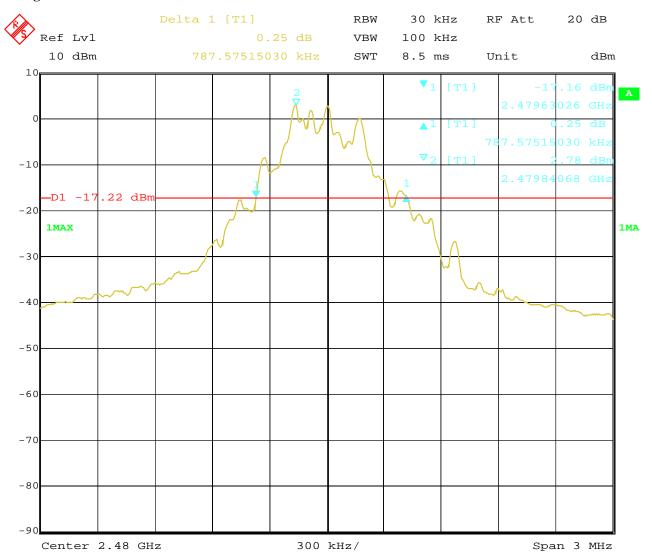

Date: 11.JUL.2017 11:39:31

Page 26 of 83 Report No.: FCC1709112

Date: 2017-07-15



Test Result

Type of Modulation: JI/4DQPSK

EUT	True Wire	True Wireless Bluetooth Earphone		A1
Mode	Keep Transmitting In		Input Voltage	DC3.7V
Temperat	rature 24 deg. C,		Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1136		Pass
Middle	2441 1130			Pass
High	2480 1130			Pass

Page 27 of 83


Report No.: FCC1709112

Date: 2017-07-15



Test Figure:

1. Condition: Low Channel

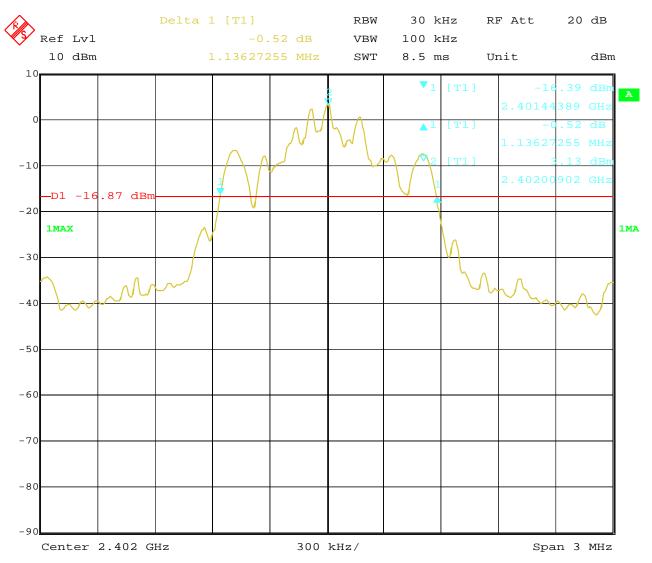


Date: 11.JUL.2017 11:21:16 Report No.: FCC1709112 Page 28 of 83

Date: 2017-07-15



2. Condition: Middle Channel

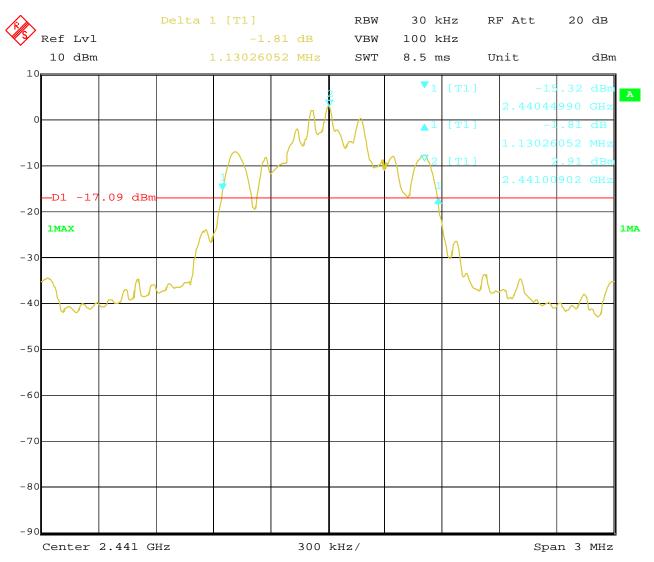


Date: 11.JUL.2017 11:18:28 Report No.: FCC1709112 Page 29 of 83

Date: 2017-07-15



3. High Channel

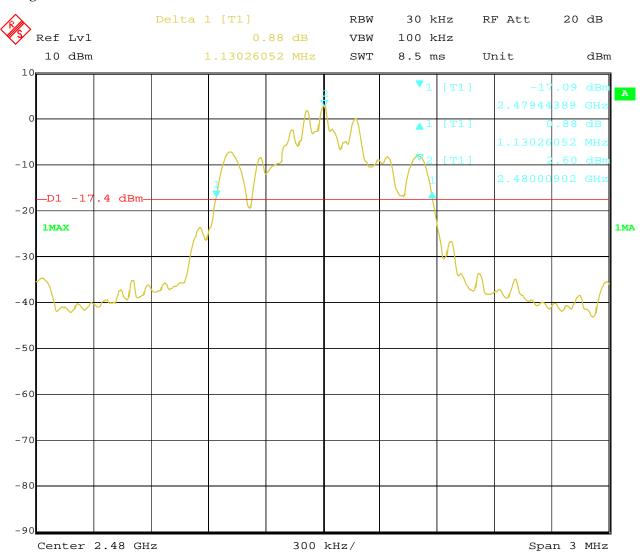

Date: 11.JUL.2017 11:16:49

Page 30 of 83 Report No.: FCC1709112

Date: 2017-07-15



Test Result

Type of Modulation: 8DPSK

EUT	True Wire	True Wireless Bluetooth Earphone		True Wireless Bluetooth Earphone Model		A1
Mode	K	Keep Transmitting		Keep Transmitting In		DC3.7V
Temperat	perature 24 deg. C,		Humidity	56% RH		
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail		
Low	2402	1154		Pass		
Middle	2441	1154		Pass		
High	2480	1154		Pass		

Page 31 of 83


Report No.: FCC1709112

Date: 2017-07-15



Test Figure:

1. Condition: Low Channel

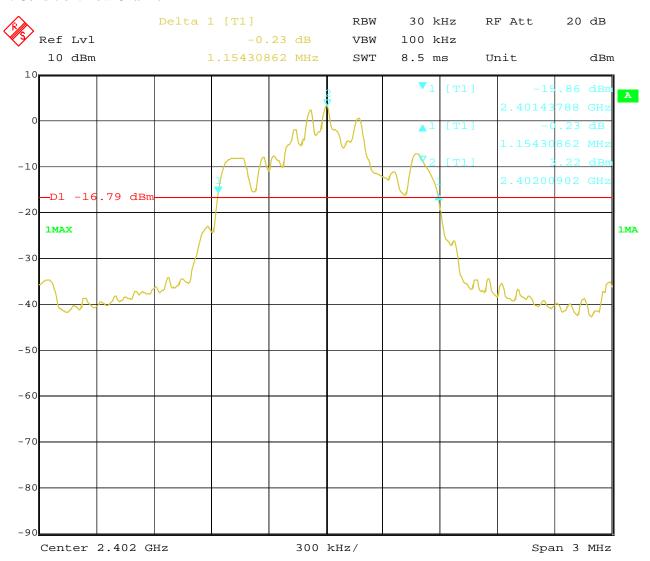


Date: 11.JUL.2017 11:23:33 Report No.: FCC1709112 Page 32 of 83

Date: 2017-07-15



2. Condition: Middle Channel

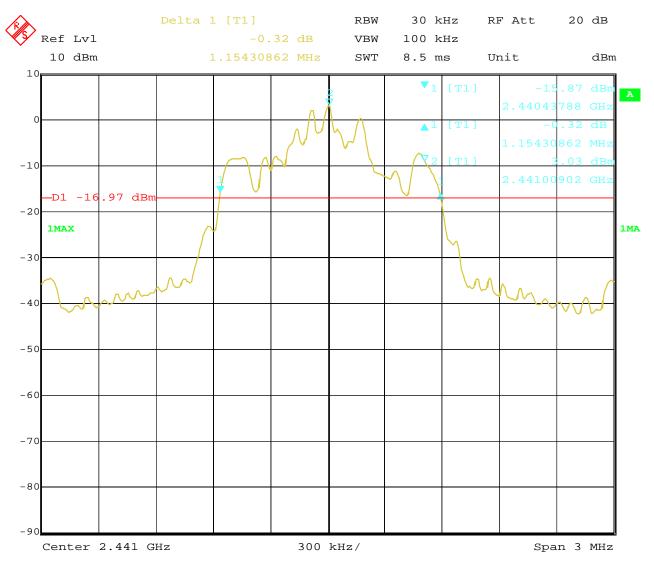


Date: 11.JUL.2017 11:31:10 Report No.: FCC1709112 Page 33 of 83

Date: 2017-07-15



3. High Channel

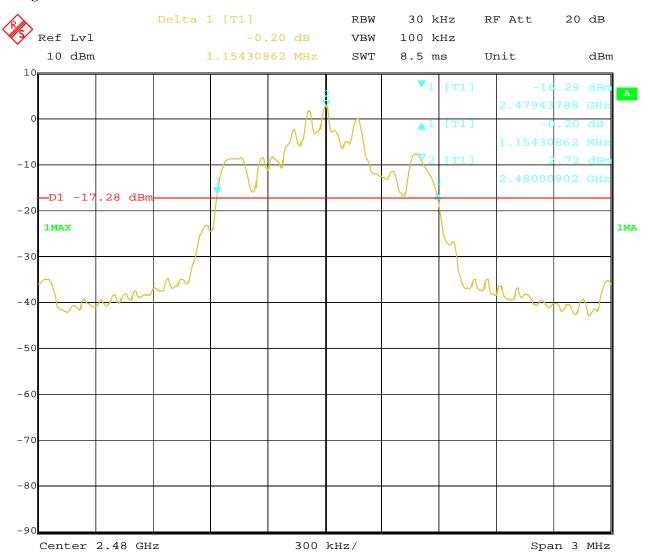

Date: 11.JUL.2017 11:36:02 Report No.: FCC1709112

Date: 2017-07-15



Page 34 of 83

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW =

RBW=3MHz; Sweep = 60s; Detector function = PK; Trace = max hold

- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 35 of 83

Report No.: FCC1709112

Date: 2017-07-15



8.4Test Results

Type of Modulation: GFSK

EUT	True Wirel	True Wireless Bluetooth Earphone		Model	A1
Mode	Keep Transmitting Input Volta		ıt Voltage	DC3.7V	
Temperature	e	24 deg. C,	Humidity		56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm	Max. Power Output (dBm) Peak		Pass/ Fail
Low	2402	4.00		30	Pass
Middle	2441	3.72		30	Pass
High	2480	3.42		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Type of Modulation: Л/4DQPSK

EUT		True Wireless Bluetooth Earphone Mod		Model		A1	
Mode	Keep Transmitting Input Voltage		Input Voltage		Input Voltage DC3.7V		DC3.7V
Temperature	e		24 deg. C,	Humidity		56% RH	
Channel	Channel Frequency (MHz)		Max. Power Output (dBm	Power		Pass/ Fail	
			Peak		Limit (dBm)		
Low		2402	6.29		30	Pass	
Middle		2441	6.00		30	Pass	
High		2480	5.72		30	Pass	

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 36 of 83 Report No.: FCC1709112

Date: 2017-07-15



Type of Modulation: 8DPSK

EUT		True Wireless Bluetooth Earphone Model		el	A1		
Mode		Ke	eep Transmitting Input Vol		p Transmitting Input Voltage DC3.7		DC3.7V
Temperature	e		24 deg. C,		idity	56% RH	
Channel	Cł	nannel Frequency (MHz)	Max. Power Output (dBm) Peak		Peak Power Limit (dBm)	Pass/ Fail	
Low		2402	6.15		30	Pass	
Middle		2441	6.00		30	Pass	
High		2480	5.72		30	Pass	

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Report No.: FCC1709112

Date: 2017-07-15



Page 37 of 83

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 83

Report No.: FCC1709112

Date: 2017-07-15




9.4Test Result

Type of Modulation: GFSK

EUT	True Wireless Bluetooth Earphone		Model		A1
Mode	Hopping On		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3 of the 20 dB bandwidth		dwidth	Pass

Test Plots

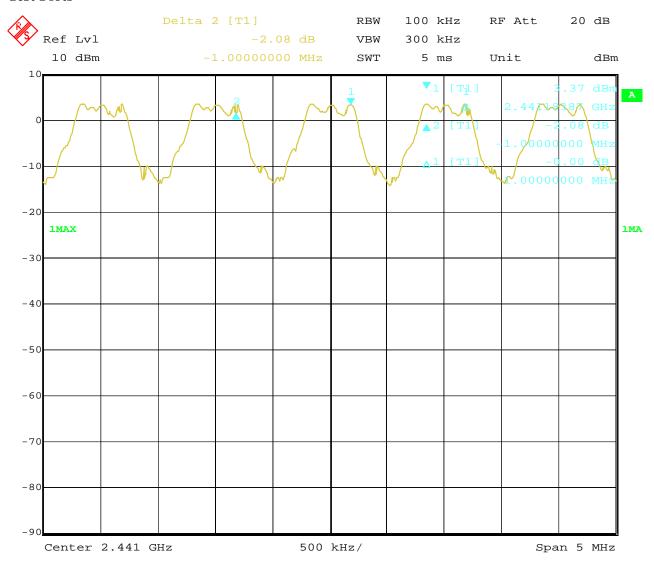

9.JUL.2017 16:51:32 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1709112 Page 39 of 83


Date: 2017-07-15



Type of Modulation: Л/4DQPSK

EUT	True Wireless Bluetooth Earphone		Model		A1
Mode	Hopping On		Input Voltage		DC3.7V
Temperature	24 deg. C,	24 deg. C,		56% RH	
Carrier Frequency Separation			Limit		Pass/ Fail
1.000MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth			Pass

Test Plots

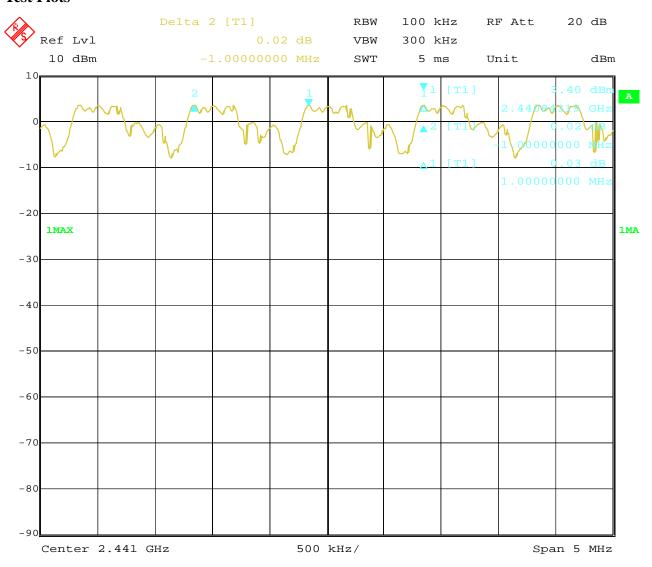

10.JUL.2017 16:01:28 Report No.: FCC1709112 Page 40 of 83


Date: 2017-07-15



Type of Modulation: 8DPSK

EUT	True Wireless Bluetooth Earphone		Model		A1
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation			Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3 of 20 dB bandwidth			Pass

Test Plots

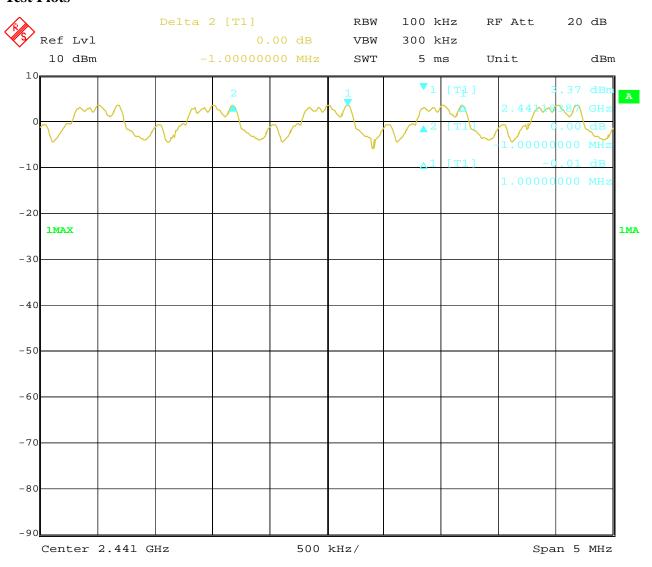

10.JUL.2017 14:50:04 Date:

Report No.: FCC1709112

Date: 2017-07-15



Page 41 of 83

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 42 of 83

Report No.: FCC1709112

Date: 2017-07-15




10.4Test Result

Type of Modulation: GFSK

EUT	True Wireless Bluetooth Earphone		Model		A1
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature		24 deg. C,		56% RH	
Operating Frequency Number of hopping		g channels	Limit	Pass/ Fail	
2402-2480MHz	2402-2480MHz 79			≥ 15	Pass

Test Plot

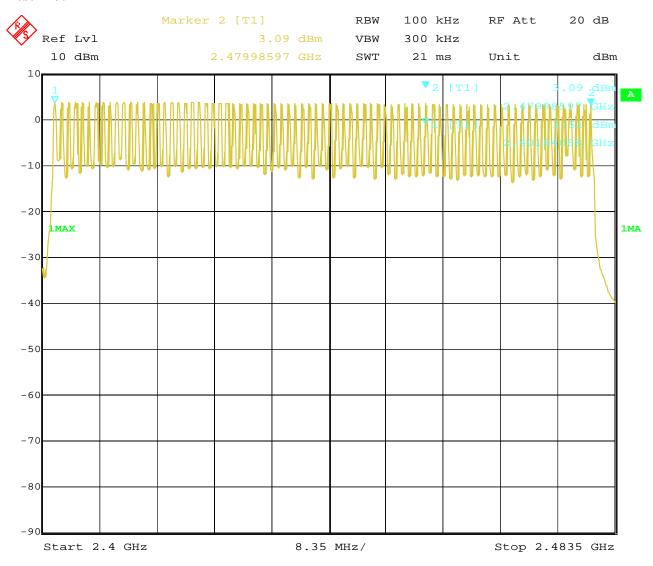

Date: 9.JUL.2017 15:52:10

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC1709112 Page 43 of 83


Date: 2017-07-15



Type of Modulation: $\sqrt{J/4DQPSK}$

EUT	True Wireless Bluetooth Earphone		Model			A1
Mode	Hopping On		Input Voltage DC3.7V		DC3.7V	
Temperature		24 deg. C,		Humidity		56% RH
Operating Frequency Number of hopping cha		nnels	Lin	nit	Pass/ Fail	
2402-2480MHz	2402-2480MHz 79			≥ 1	.5	Pass

Test Plot

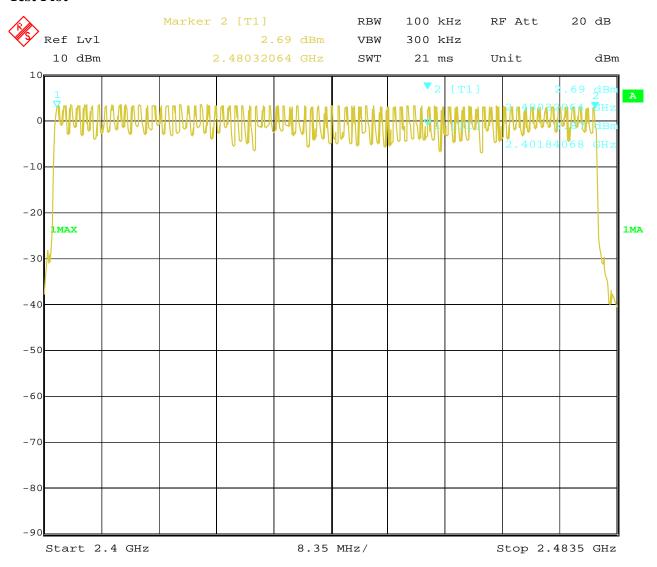

10.JUL.2017 11:06:05 Date:

Report No.: FCC1709112 Page 44 of 83


Date: 2017-07-15



Type of Modulation: 8DPSK

EUT	True Wireless Bluetooth Earphone		Model			A1
Mode	Hopping On		Input V	nt Voltage DC3.7V		DC3.7V
Temperature	24 deg. C,		Humid	Iumidity		56% RH
Operating Frequency		Number of hopping cha	innels	Lin	nit	Pass/ Fail
2402-2480MHz		79		≥ 1	.5	Pass

Test Plot

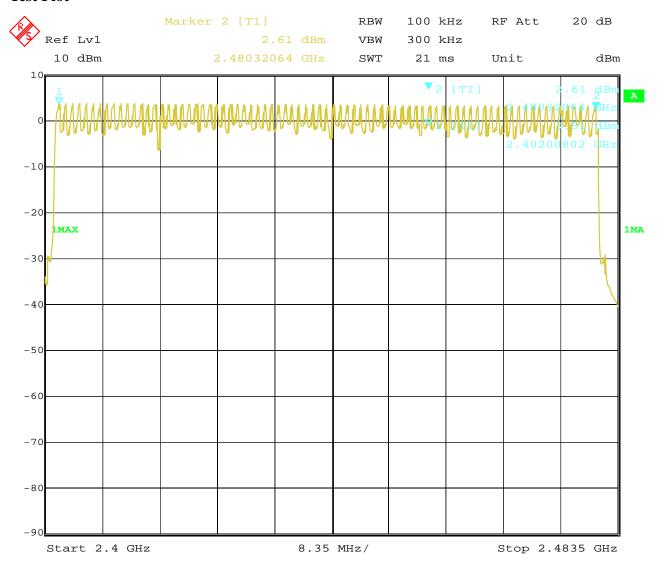

10.JUL.2017 15:12:01 Date:

Report No.: FCC1709112

Date: 2017-07-15



Page 45 of 83

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC1709112 Page 46 of 83

Date: 2017-07-15



11.4 Test Result

Type of Modulation: GFSK

EUT	True Wireless B	luetooth Earphone	Model		A1			
Mode	Keep Tr	ansmitting	Input Voltage	DC3.7V				
Temperatur	re 24 d	leg. C,	Humidity	56% RH				
Channel	Reading	Hoping	g Rate	Actual	Limit			
	DH5							
High	3.05ms	266.667	7 hop/s	0.325s	0.4s			
			DH5					
Middle	3.01ms	266.667	7 hop/s	0.321s	0.4s			
DH5								
Low	3.01ms	266.667	7 hop/s	0.321s	0.4s			

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.


Page 47 of 83

Report No.: FCC1709112

Date: 2017-07-15



Test Plots: High Channel:

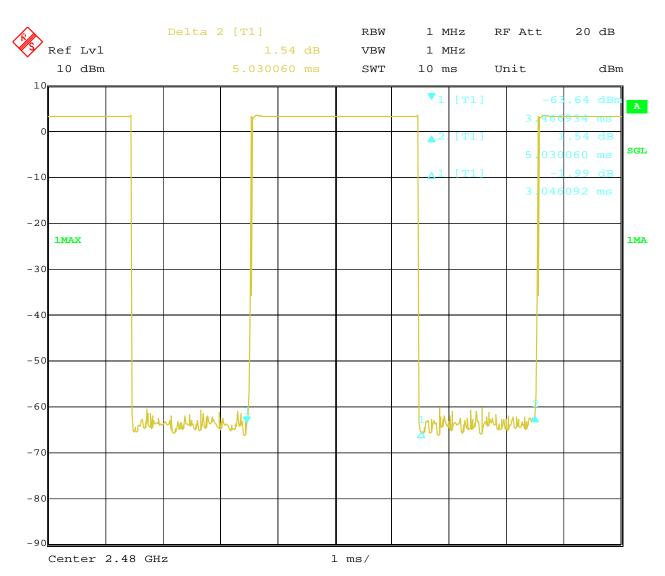


11.JUL.2017 12:35:08 Date:

Report No.: FCC1709112 Page 48 of 83

Date: 2017-07-15



Middle Channel

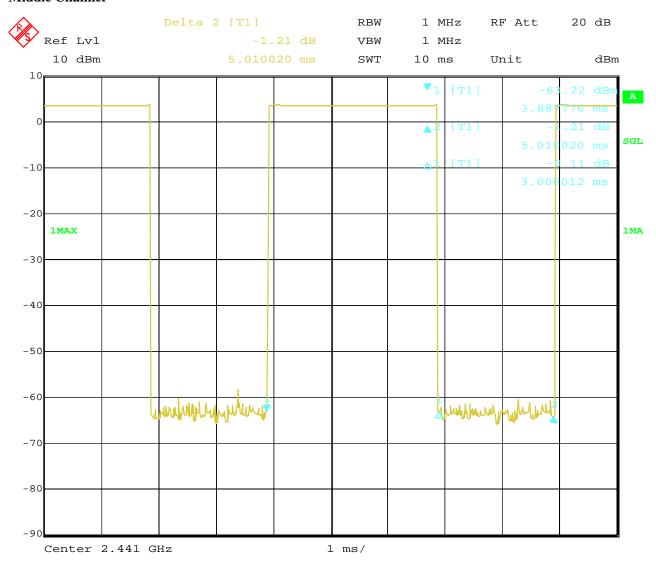


11.JUL.2017 Date: 12:35:45 Report No.: FCC1709112 Page 49 of 83

Date: 2017-07-15



Low Channel

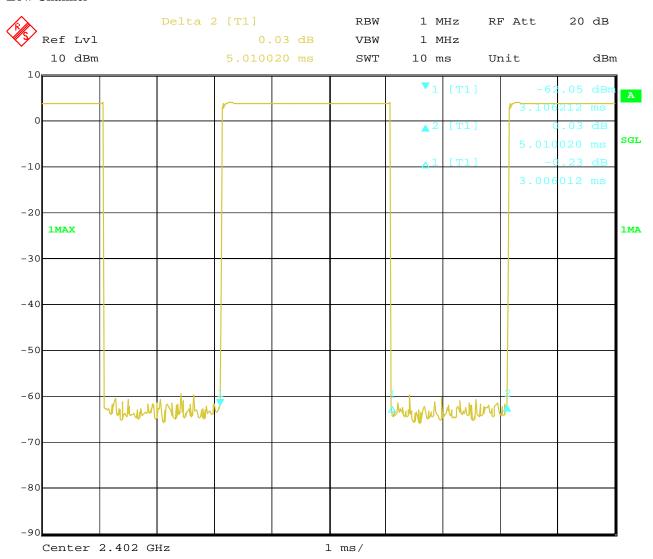

11.JUL.2017 Date: 12:37:39 Report No.: FCC1709112

Date: 2017-07-15



Page 50 of 83

Test Result

EUT	True Wireless B	True Wireless Bluetooth Earphone			A1			
Mode	Keep Tr	ansmitting	Input Voltage	DC3.7V				
Temperatur	e 24 d	leg. C,	Humidity	56	5% RH			
Channel	Reading	Hoping	g Rate	Actual	Limit			
	2DH5							
High	3.01ms	266.667	7 hop/s	0.321s	0.4s			
			2DH5					
Middle	3.01ms	266.667 hop/s		0.321s	0.4s			
2DH5								
Low	3.01ms	266.667	7 hop/s	0.321s	0.4s			

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.

Page 51 of 83


Report No.: FCC1709112

Date: 2017-07-15



Test Plots:

High Channel

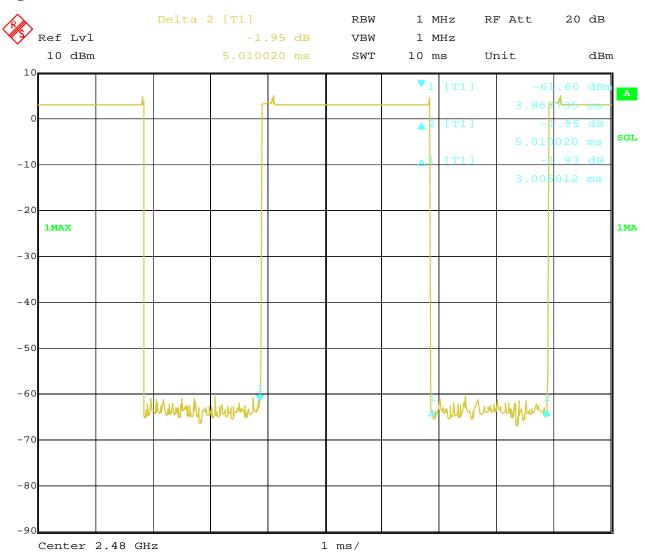


Date: 11.JUL.2017 12:31:30 Report No.: FCC1709112 Page 52 of 83

Date: 2017-07-15



Middle Channel

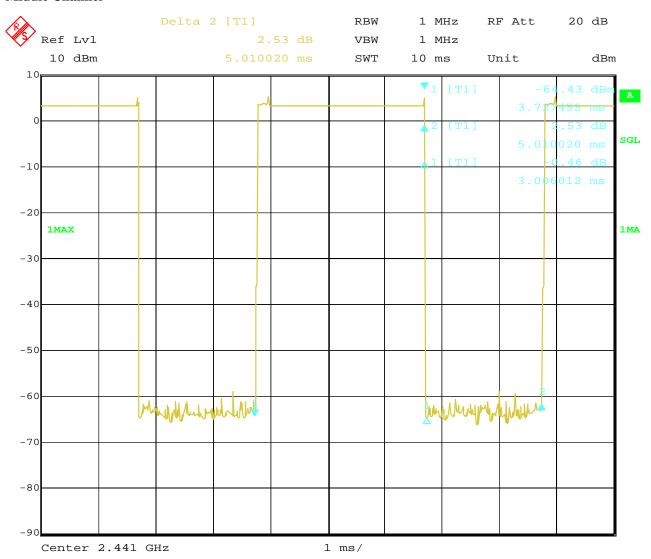


11.JUL.2017 Date: 12:29:44 Report No.: FCC1709112 Page 53 of 83

Date: 2017-07-15



Low Channel

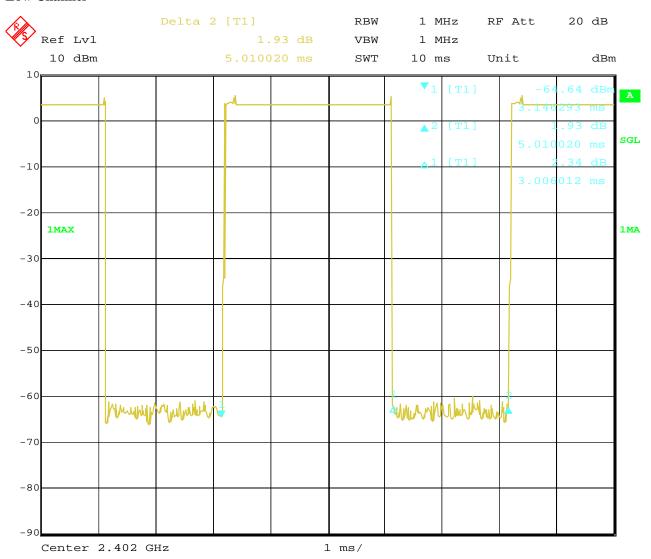

11.JUL.2017 Date: 12:28:47 Report No.: FCC1709112 Page 54 of 83

Date: 2017-07-15



Type of Modulation: 8DPSK

EUT	True Wireless B	rue Wireless Bluetooth Earphone			A1		
Mode	Keep Ti	Keep Transmitting		Input Voltage DC3.7V			
Temperature	24 (deg. C,	Humidity	56% RH			
Channel	Reading	Hoping	Hoping Rate		Limit		
3DH5							
High	3.05ms	266.667	7 hop/s	0.325s	0.4s		
			3DH5				
Middle	3.03ms	266.667	7 hop/s	0.323s	0.4s		
3DH5							
Low	3.03ms	266.667	7 hop/s	0.323s	0.4s		

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 55 of 83


Report No.: FCC1709112

Date: 2017-07-15



Test Plots:

High Channel

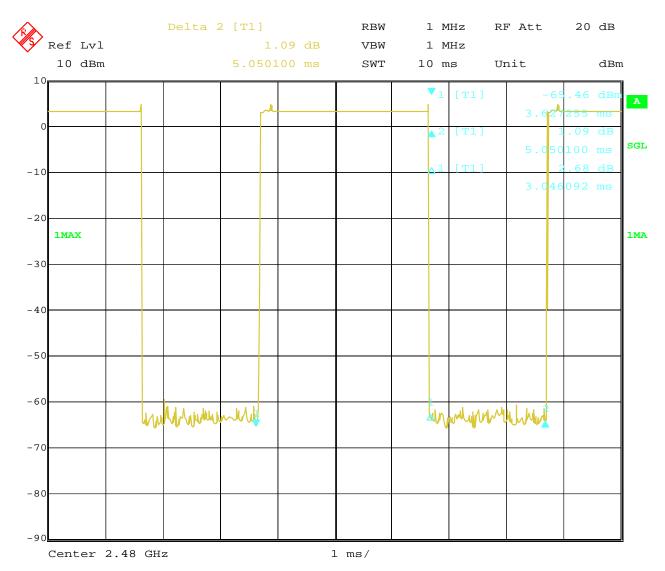


Date: 11.JUL.2017 12:24:14 Report No.: FCC1709112 Page 56 of 83

Date: 2017-07-15



Middle Channel

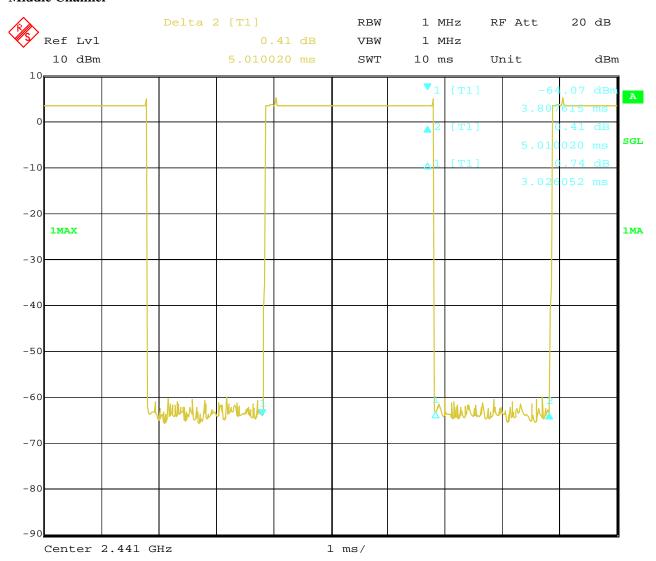


11.JUL.2017 Date: 12:25:47 Report No.: FCC1709112 Page 57 of 83

Date: 2017-07-15



Low Channel

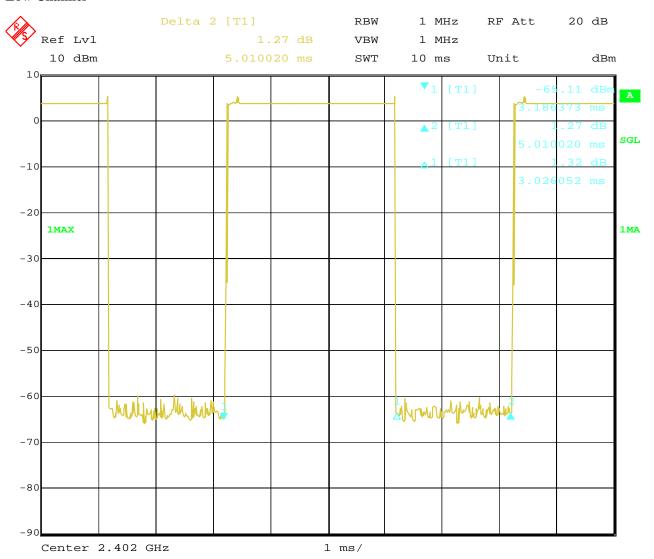

11.JUL.2017 Date: 12:27:15 Report No.: FCC1709112


Date: 2017-07-15



Page 58 of 83

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 59 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: GFSK

Out of Band Test Result 12.4

Product:	True Wireless Bluetooth Earphone		Test Mode:	Low Channel
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C	Humidity	56% RH
Test Result:		Pass		PK
The Max. FS in	PK (dBµV/m)	46.9		$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$		Limit	54(dBµV/m)
2390MHz				

Test Figure:

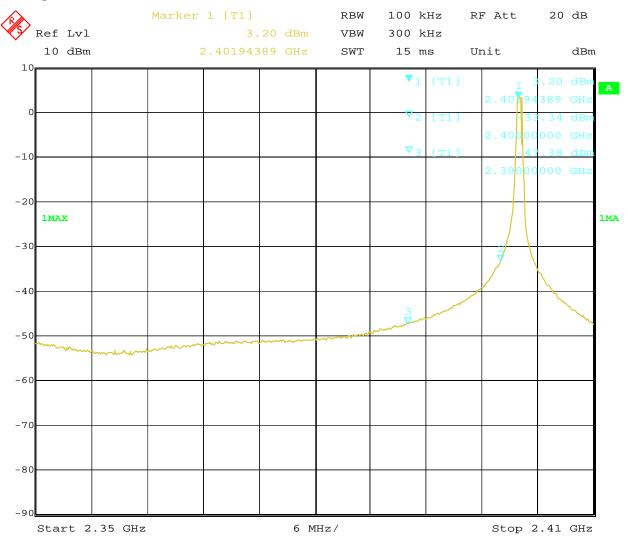

11.JUL.2017 10:58:13 Date:

Page 60 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	True Wireless Bluetooth Earphone		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBμV/m)	49.9		$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

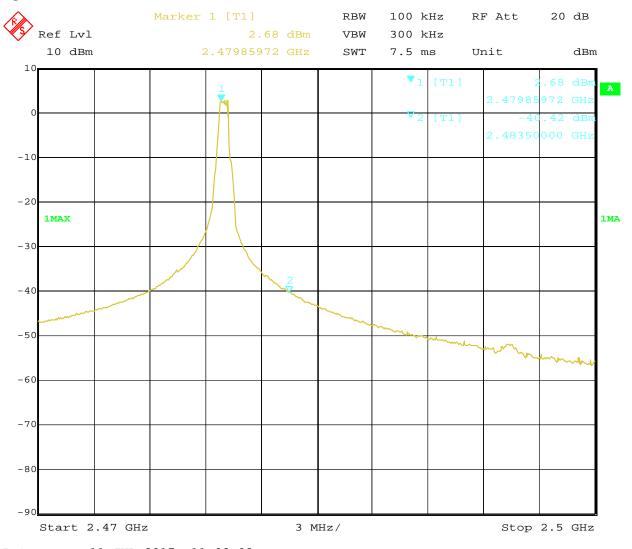

11.JUL.2017 11:02:03 Date:

Page 61 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: GFSK

Out of Band Test Result

Product:	True Wireless Bluetooth Earphone		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass		PK
The Max. FS in	PK (dBμV/m)	46.1		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

Test Figure:

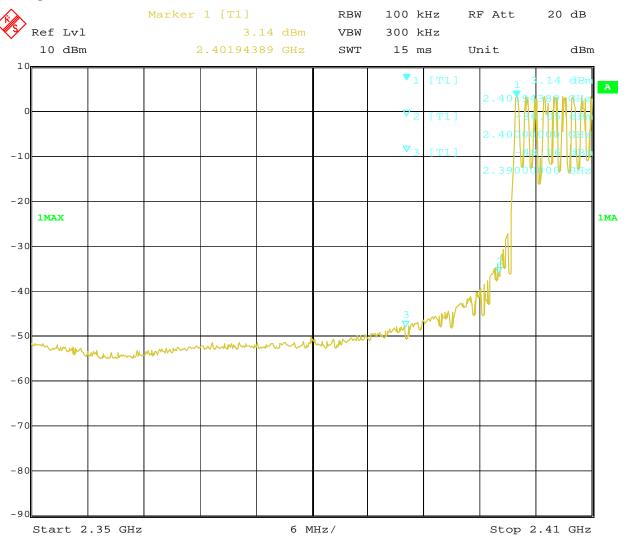

11.JUL.2017 10:30:55 Date:

Page 62 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: GFSK

Out of Band Test Result

Product:	True Wirel	ess Bluetooth Earphone	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 46.7			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

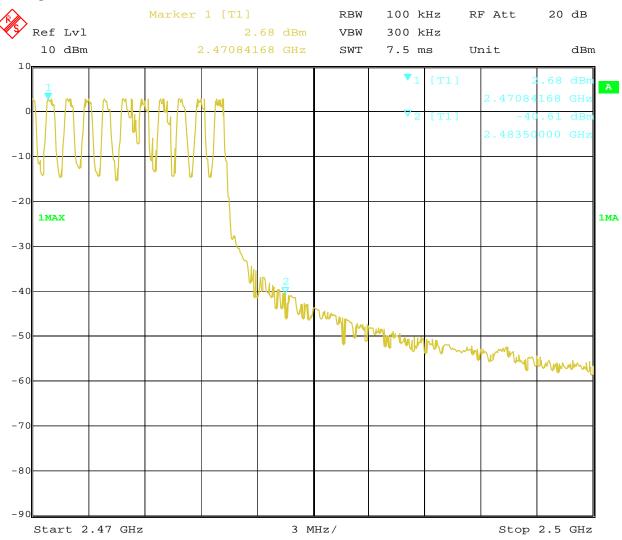

11.JUL.2017 Date: 10:49:58

Page 63 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: $\sqrt{1/4}$ DQPSK

12.4 Out of Band Test Result

Product:	True Wirel	less Bluetooth Earphone	Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 47.3			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

Test Figure:

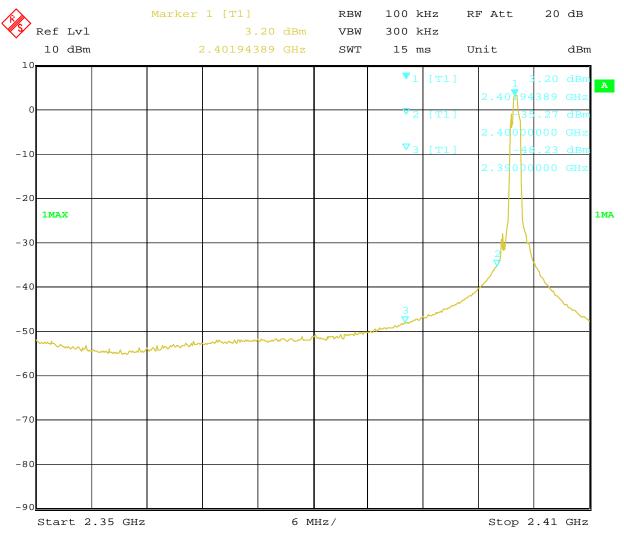

Date: 11.JUL.2017 11:07:05

Page 64 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: Л/4DQPSK

Out of Band Test Result 12.4

Product:	True Wirel	ess Bluetooth Earphone	Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 50.6			74(dBμV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:

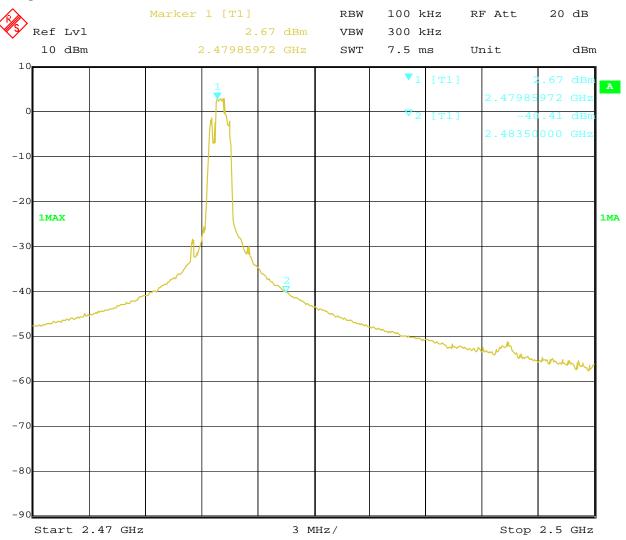

11.JUL.2017 11:04:45 Date:

Page 65 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:	True Wirel	less Bluetooth Earphone	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 47.1			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

Test Figure:

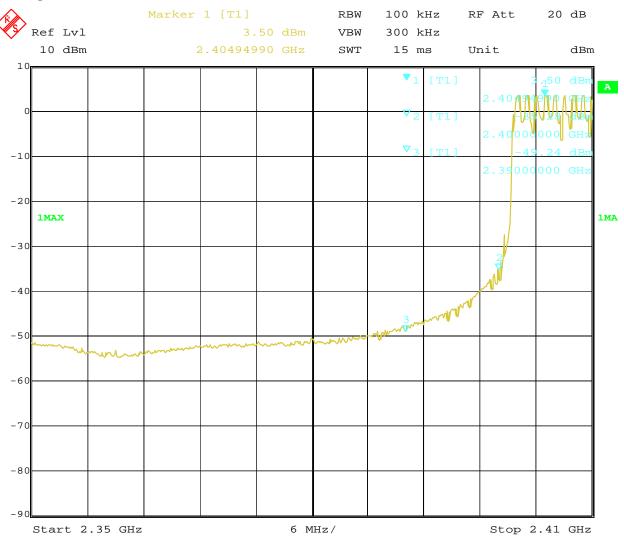

10.JUL.2017 16:50:44 Date:

Page 66 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: $\pi/4DQPSK$

12.4 Out of Band Test Result

Product:	True Wirel	ess Bluetooth Earphone	Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	47.3		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

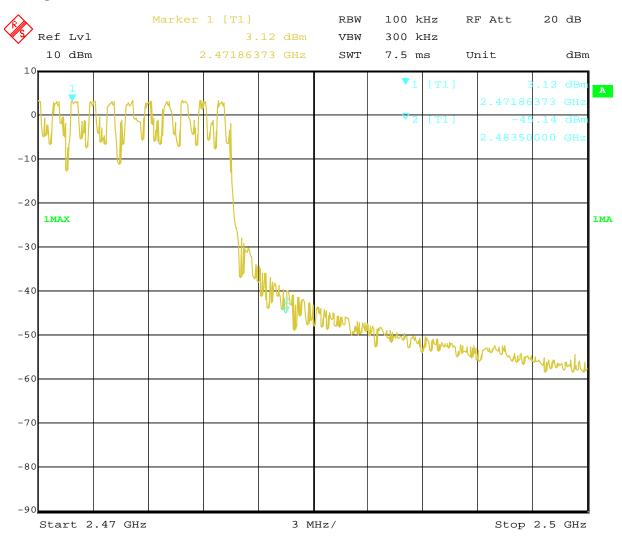

Date: 10.JUL.2017 17:05:01

Page 67 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	True Wirel	less Bluetooth Earphone	Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 46.8			74(dBµV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

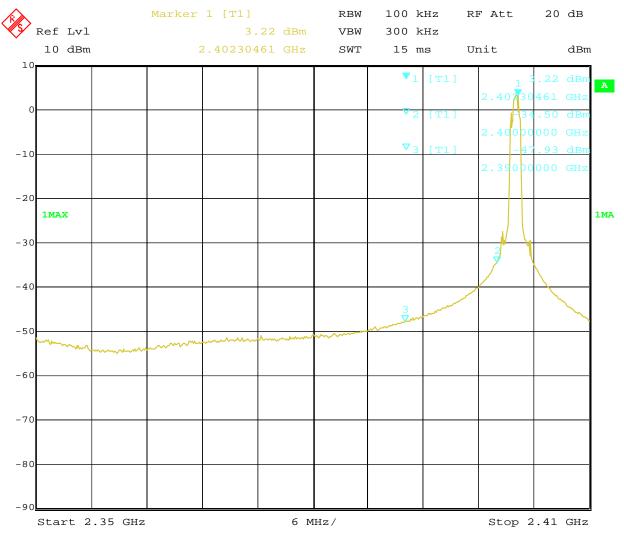

Date: 11.JUL.2017 11:10:21

Page 68 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	True Wireless Bluetooth Earphone		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 50.3			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

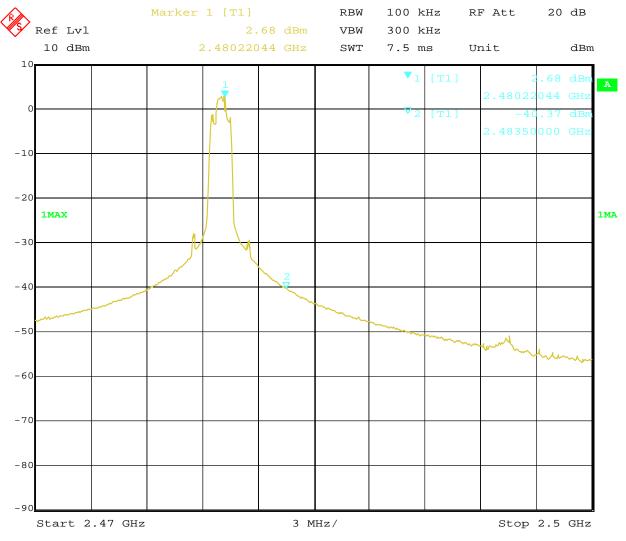

11.JUL.2017 11:13:21 Date:

Page 69 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: 8DPSK

Out of Band Test Result

Product:	True Wirel	ess Bluetooth Earphone	Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 48.0			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

Test Figure:

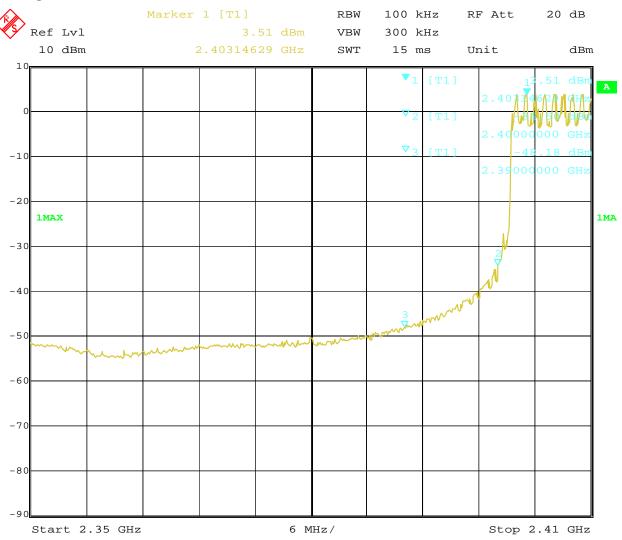

10.JUL.2017 16:31:39 Date:

Page 70 of 83

Report No.: FCC1709112

Date: 2017-07-15




Type of Modulation: 8DPSK

Out of Band Test Result

Product:	True Wireless Bluetooth Earphone		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 49.5			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

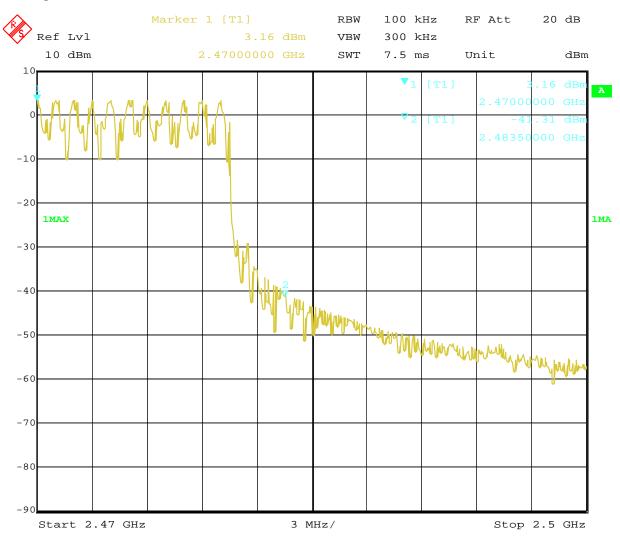

Date: 10.JUL.2017 16:13:49 Report No.: FCC1709112

Date: 2017-07-15



Page 71 of 83

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Integral antenna used. The maximum Gain of the antennas is -1.0dBi.

Report No.: FCC1709112 Page 72 of 83

Date: 2017-07-15




14.0 FCC ID Label

FCC ID: RMZ-A1

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

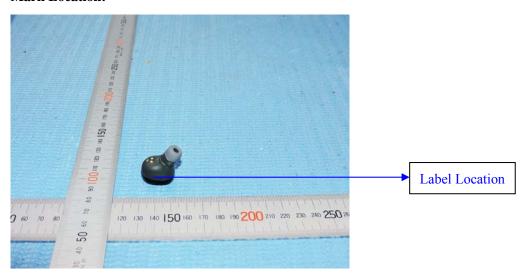

Page 73 of 83 Report No.: FCC1709112

Date: 2017-07-15



15.0 Photo of testing

Conducted Emission Test Setup:



Report No.: FCC1709112

Date: 2017-07-15



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1709112

Date: 2017-07-15



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 76 of 83

Report No.: FCC1709112

Date: 2017-07-15



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 77 of 83

Report No.: FCC1709112

Date: 2017-07-15



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 78 of 83

Report No.: FCC1709112

Date: 2017-07-15



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 79 of 83

Report No.: FCC1709112

Date: 2017-07-15



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1709112 Page 80 of 83

Date: 2017-07-15



Outside view



Page 81 of 83


Report No.: FCC1709112

Date: 2017-07-15



Inside view



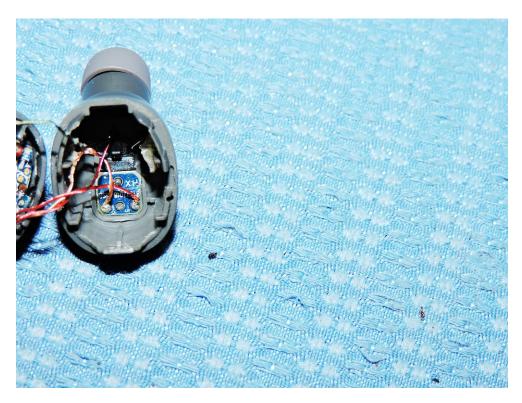

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 82 of 83

Report No.: FCC1709112

Date: 2017-07-15



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 83 of 83 Report No.: FCC1709112

Date: 2017-07-15



Inside view

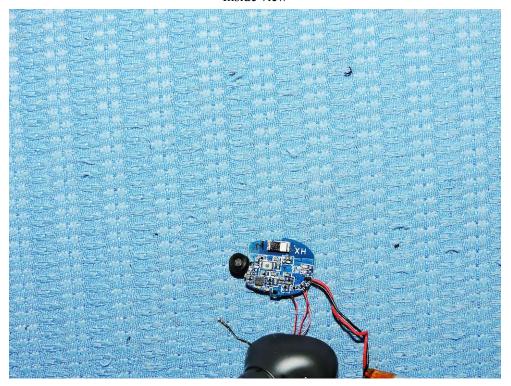

End of the report