

FCC Test Report

Product Name	WiFi AP
Model No	Bitlomat 100 Panel CPE
FCC ID	RNF-BTLM100

Applicant	Bitlomat, LLC.
Address	1850 SECOND ST STE 201 HIGHLAND PARK, IL 60035, USA

Date of Receipt	Dec. 27, 2012
Issued Date	May 06, 2013
Report No.	132239R-RFUSP32V01
Report Version	V1.0



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date: May 06, 2013

Report No.: 132239R-RFUSP32V01




Product Name	WiFi AP
Applicant	Bitlomat, LLC.
Address	1850 SECOND ST STE 201 HIGHLAND PARK, IL 60035, USA
Manufacturer	Bitlomat, LLC.
Model No.	Bitlomat 100 Panel CPE
FCC ID.	RNF-BTLM100
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	Bitlomat
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E: 2012 ANSI C63.4: 2003, ANSI C63.10 2009, FCC KDB-789033
Test Result	Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

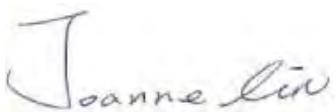Documented By : 
 (Adm. Specialist / Joanne Lin)

Tested By : 
 (Engineer / Jack Hsu)

Approved By : 
 (Manager / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description	7
1.3. Tested System Details.....	8
1.4. Configuration of tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits	11
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission.....	12
3. Maximun conducted output power	16
3.1. Test Equipment.....	16
3.2. Test Setup	16
3.3. Limits	17
3.4. Test Procedur.....	17
3.5. Uncertainty	17
3.6. Test Result of Maximum conducted output power.....	18
4. Peak Power Spectral Density.....	26
4.1. Test Equipment.....	26
4.2. Test Setup	26
4.3. Limits	26
4.4. Test Procedure	27
4.5. Uncertainty	27
4.6. Test Result of Peak Power Spectral Density	28
5. Peak Excursion	35
5.1. Test Equipment.....	35
5.2. Test Setup	35
5.3. Limits	35
5.4. Test Procedure	35
5.5. Uncertainty	35
5.6. Test Result of Peak Excursion.....	36
6. Radiated Emission.....	44
6.1. Test Equipment.....	44
6.2. Test Setup	44
6.3. Limits	45
6.4. Test Procedure	46
6.5. Uncertainty	46
6.6. Test Result of Radiated Emission.....	47
7. Band Edge	56

7.1.	Test Equipment.....	56
7.2.	Test Setup	57
7.3.	Limits	58
7.4.	Test Procedure	58
7.5.	Uncertainty	58
7.6.	Test Result of Band Edge	59
8.	Frequency Stability.....	67
8.1.	Test Equipment.....	67
8.2.	Test Setup	67
8.3.	Limits	67
8.4.	Test Procedure	67
8.5.	Uncertainty	67
8.6.	Test Result of Frequency Stability.....	68
9.	EMI Reduction Method During Compliance Testing	70
Attachment 1:	EUT Test Photographs	
Attachment 2:	EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	WiFi AP
Trade Name	Bitlomat
FCC ID.	RNF-BTLM100
Model No.	Bitlomat 100 Panel CPE
Frequency Range	802.11n-20MHz: 5180-5240MHz, 802.11n-40MHz: 5190-5230MHz
Number of Channels	802.11n-20MHz: 4; 802.11n-40MHz: 2
Data Rate	802.11n: up to 300Mbps
Channel Control	Auto
Type of Modulation	802.11n:OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna Type	Cross-Polarized Antenna
Antenna Gain	Refer to the table "Antenna List"
Power Adapter	MFR: Bitlomat, M/N: GFP121DA-240050HB Input: AC 100-240V, 50-60Hz, 0.3A Output: DC 24V, 0.5A Power Cord: Non-Shielded, 0.6m

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	LYNwave	ALO120-093150	Cross-Polarized Antenna	11.71dBi For 5.15~5.25GHz

Note: The antenna of EUT is conform to FCC 15.203

802.11n-20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 36:	5180 MHz	Channel 40:	5200 MHz	Channel 44:	5220 MHz	Channel 48:	5240 MHz

802.11n-40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency
Channel 38:	5190 MHz	Channel 46:	5230 MHz

Note:

1. This device is a WiFi AP with a built-in 5GHz WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. At result of pretests, module supports dual-channel transmission, only the worst case is shown in the report. (802.11n is chain A+ chain B)
4. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11n(20M-BW) is 14.4Mbps and 802.11n(40M-BW) is 30Mbps).
5. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart E for Unlicensed National Information Infrastructure devices.
6. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit (802.11n-20BW 14.4Mbps) Mode 2: Transmit (802.11n-40BW 30Mbps)
-----------	--

1.2. Operational Description

The EUT is an WiFi AP with a built-in 5GHz WLAN transceiver. The device provided of eight kinds of transmitting speed 14.4,28.9,43.3,57.8,86.7,115.6,130 and 144.4Mbps in 802.11n(20M-BW) mode and 30,60,90,120,180,240,270 and 300 Mbps (40M-BW) the device of RF carrier is BPSK, QPSK, 16QAM and 64QAM (IEEE 802.11n), the IEEE 802.11n is Multiple In, Multiple Out” (MIMO) technology.

The device adapts direct sequence spread spectrum modulation. The antenna provides diversity function to improve the receiving function and the antennas to support 2(Transmit) × 2(Receive) MIMO technology.

This WiFi AP, compliant with IEEE 802.11n, is a high-efficiency Wireless LAN adapter. It allows your computer to connect to a wireless network and to share resources, such as files or printers without being bound to the network wires. Orthogonal Frequency Division Multiplexing (OFDM) radio transmission, The WiFi AP Wired Equivalent Protection (WEP) algorithm is used. In addition, its standard compliance ensures that it can communicate with any IEEE 802.11n network.

The Device no radar detection and no ad-hoc operation in the DFS band, another information please refer to users manual.


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
(1) PoE Adapter	FLUIDMESH	GFP121DA-240050HB	N/A	Non-Shielded, 0.6m
(2) Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m

Signal Cable Type	Signal cable Description
A LAN Cable	Non-Shielded, 3.0m
B LAN Cable	Non-Shielded, 3.0m
C LAN Cable	Non-Shielded, 1.7m

1.4. Configuration of tested System

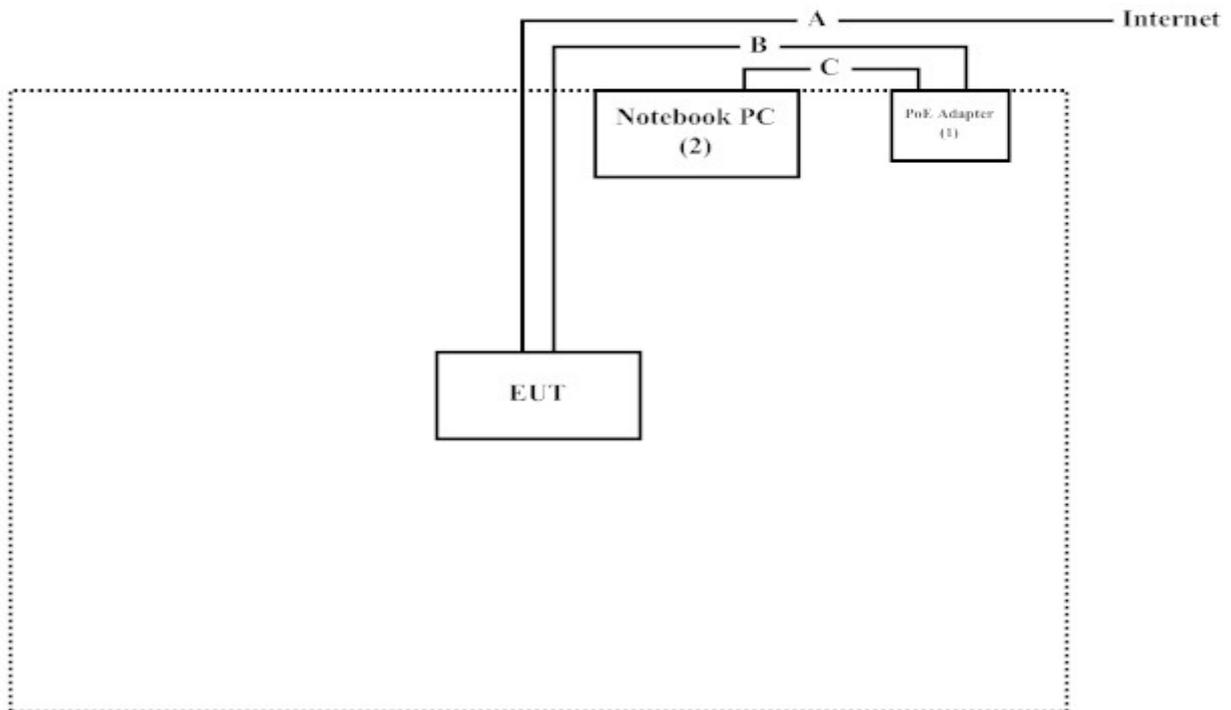

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Execute Test program (ART.exe v0.9) on the Notebook
- (3) Configure the test mode, the test channel to start the continuous transmit
- (4) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Registration Number: 92195

Accreditation on NVLAP
 NVLAP Lab Code: 200533-0

Site Name: Quietek Corporation
 Site Address: No.5-22, Ruishukeng Linkou Dist., New Taipei City
 24451, Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2012	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2013	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2013	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2013	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2013	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

2.2. Test Setup

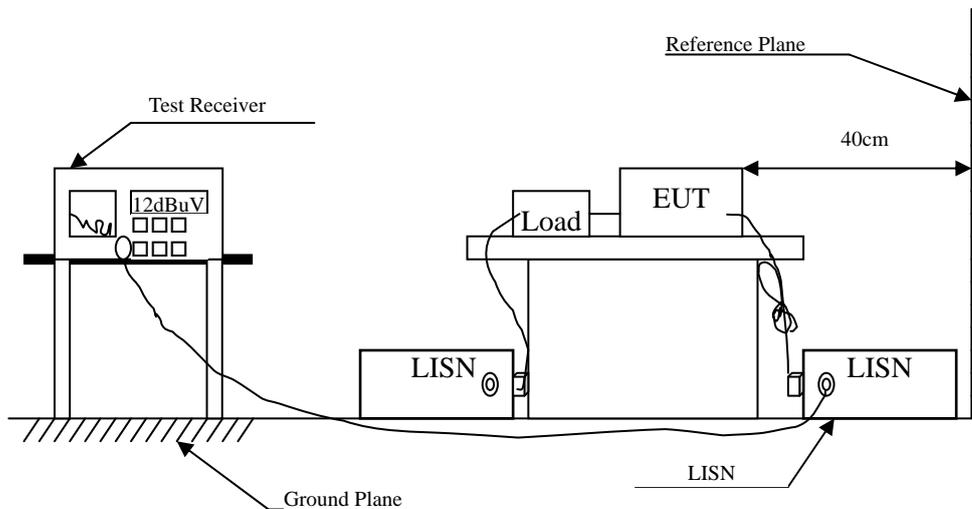

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : WiFi AP
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) (5190MHz),
 (Adapter:GFP121DA-240050HB)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
LINE 1					
Quasi-Peak					
0.181	9.830	35.400	45.230	-19.884	65.114
0.241	9.830	32.020	41.850	-21.550	63.400
0.353	9.830	34.500	44.330	-15.870	60.200
0.630	9.830	28.900	38.730	-17.270	56.000
1.162	9.830	24.610	34.440	-21.560	56.000
5.373	9.883	23.120	33.003	-26.997	60.000
Average					
0.181	9.830	28.430	38.260	-16.854	55.114
0.241	9.830	22.690	32.520	-20.880	53.400
0.353	9.830	16.510	26.340	-23.860	50.200
0.630	9.830	19.060	28.890	-17.110	46.000
1.162	9.830	15.980	25.810	-20.190	46.000
5.373	9.883	14.750	24.633	-25.367	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : WiFi AP
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) (5190MHz),
 (Adapter:GFP121DA-240050HB)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
LINE 2					
Quasi-Peak					
0.177	9.834	34.850	44.684	-20.545	65.229
0.240	9.830	31.630	41.460	-21.969	63.429
0.287	9.832	31.280	41.112	-20.974	62.086
0.359	9.840	41.270	51.110	-8.919	60.029
0.603	9.840	35.390	45.230	-10.770	56.000
1.560	9.860	32.070	41.930	-14.070	56.000
Average					
0.177	9.834	28.010	37.844	-17.385	55.229
0.240	9.830	23.890	33.720	-19.709	53.429
0.287	9.832	14.780	24.612	-27.474	52.086
0.359	9.840	31.680	41.520	-8.509	50.029
0.603	9.840	24.280	34.120	-11.880	46.000
1.560	9.860	25.320	35.180	-10.820	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : WiFi AP
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) (5190MHz),
 (Adapter:GFP241DA-240100HB)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
LINE 1					
Quasi-Peak					
0.158	9.790	33.470	43.260	-22.511	65.771
0.181	9.790	29.730	39.520	-25.594	65.114
0.298	9.790	29.990	39.780	-21.991	61.771
0.365	9.790	32.760	42.550	-17.307	59.857
9.814	9.978	21.780	31.758	-28.242	60.000
14.947	10.082	15.970	26.052	-33.948	60.000
Average					
0.158	9.790	23.370	33.160	-22.611	55.771
0.181	9.790	18.220	28.010	-27.104	55.114
0.298	9.790	24.210	34.000	-17.771	51.771
0.365	9.790	24.010	33.800	-16.057	49.857
9.814	9.978	8.410	18.388	-31.612	50.000
14.947	10.082	4.490	14.572	-35.428	50.000

Note:

4. All Reading Levels are Quasi-Peak and average value.
5. “ ” means the worst emission level.
6. Measurement Level = Reading Level + Correct Factor

Product : WiFi AP
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) (5190MHz),
 (Adapter:GFP241DA-240100HB)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
LINE 2					
Quasi-Peak					
0.170	9.770	28.280	38.050	-27.379	65.429
0.295	9.770	28.750	38.520	-23.337	61.857
0.349	9.770	31.610	41.380	-18.934	60.314
0.662	9.770	35.690	45.460	-10.540	56.000
0.865	9.780	22.420	32.200	-23.800	56.000
11.615	10.041	14.740	24.781	-35.219	60.000
Average					
0.170	9.770	16.570	26.340	-29.089	55.429
0.295	9.770	22.140	31.910	-19.947	51.857
0.349	9.770	25.480	35.250	-15.064	50.314
0.662	9.770	25.260	35.030	-10.970	46.000
0.865	9.780	14.810	24.590	-21.410	46.000
11.615	10.041	5.790	15.831	-34.169	50.000

Note:

4. All Reading Levels are Quasi-Peak and average value.
5. "■" means the worst emission level.
6. Measurement Level = Reading Level + Correct Factor

3. Maximun conducted output power

3.1. Test Equipment


	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2013
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2012
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:


1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

3.2. Test Setup

26dBc Occupied Bandwidth

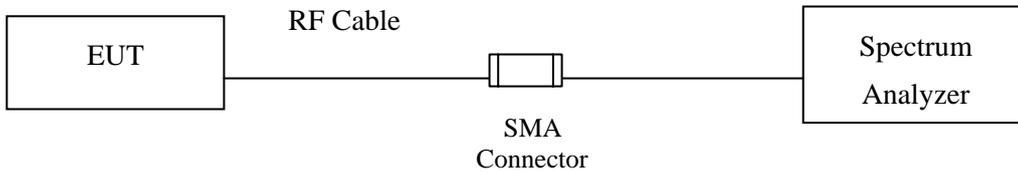

Conduction Power Measurement

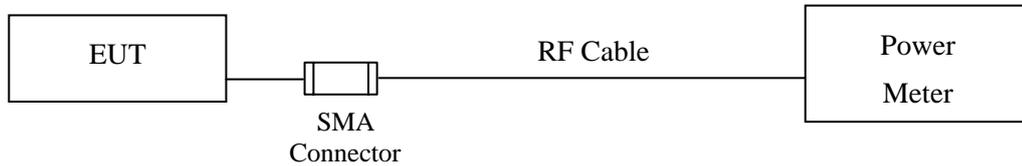

3.3. Limits

- (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
- (2) For the band 5.25-5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
- (3) For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1W or $17 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antenna of directional gain greater than 6 dBi are used, the Maximum conducted output power shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

3.4. Test Procedur

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was measured with an average power meter employing a video bandwidth greater than 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.

3.5. Uncertainty

$\pm 1.27 \text{ dB}$

3.6. Test Result of Maximum conducted output power

Product : WiFi AP
 Test Item : Maximum conducted output power
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps)

CHAIN A

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
36	5180	6.46	--	--	--	--	--	--	--	<11.29dBm
44	5220	6.12	6.1	6.04	5.96	5.93	5.87	5.81	5.76	<11.29dBm
48	5240	5.54	--	--	--	--	--	--	--	<11.29dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

CHAIN B

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
36	5180	8.84	--	--	--	--	--	--	--	<11.29dBm
44	5220	8.75	8.71	8.67	8.62	8.58	8.53	8.49	8.41	<11.29dBm
48	5240	8.54	--	--	--	--	--	--	--	<11.29dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:


CHAIN A+B

Channel Number	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
36	5180	24.100	6.46	8.84	10.82	11.29	12.11
44	5220	24.050	6.12	8.75	10.64	11.29	12.10
48	5240	23.750	5.54	8.54	10.30	11.29	12.05


Note:

1. Power Output Value =Reading value on average power meter + cable loss
2. Output Power (dBm) = 10*LOG (Chain A Power (mW)+ Chain B Power (mW))
3. 26 dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

**26dBc Occupied Bandwidth:
Channel 36 -Chain A**

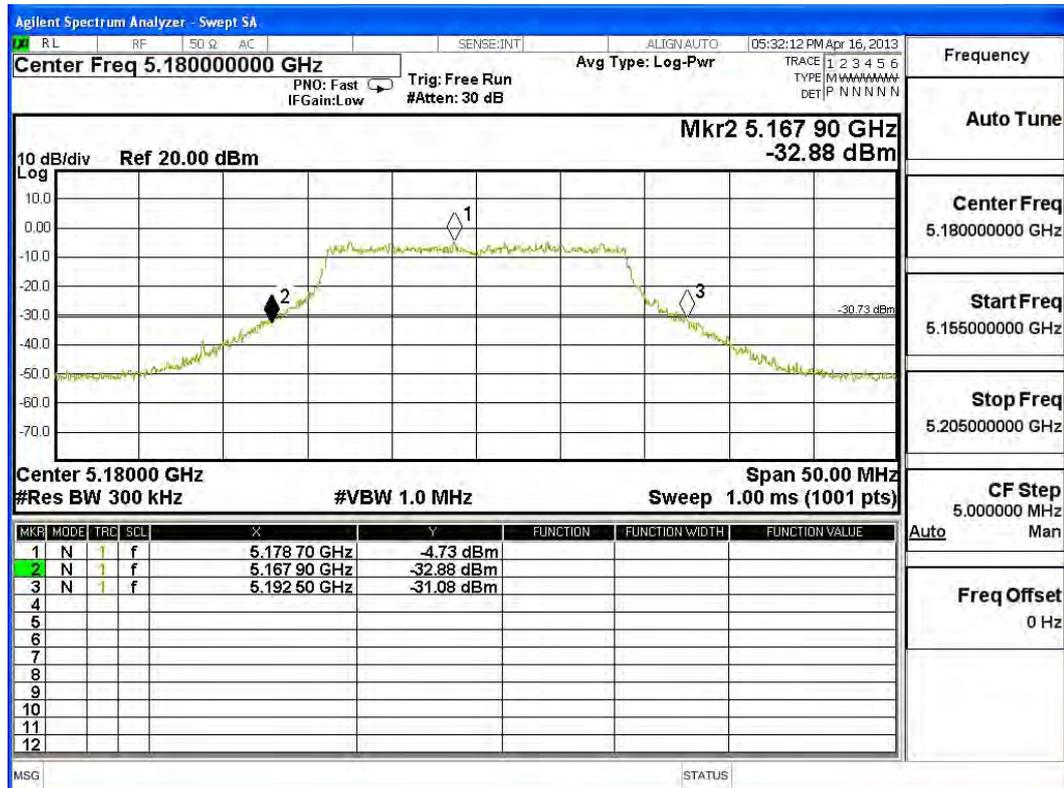

Channel 44 -Chain A

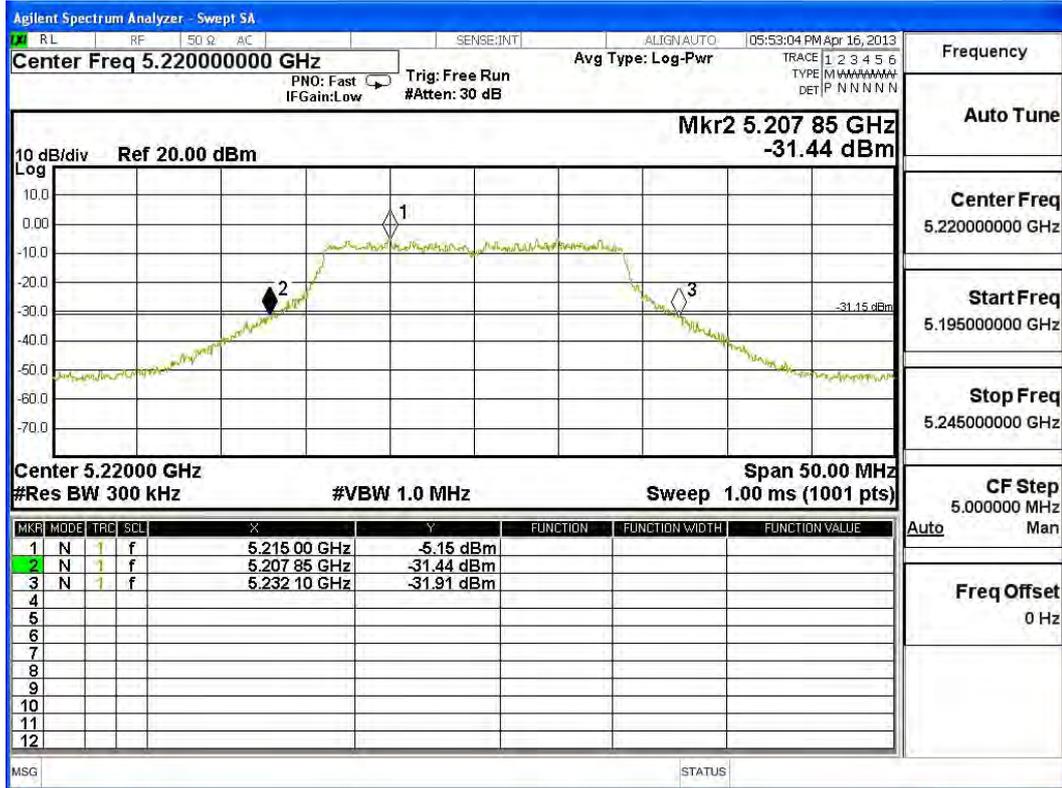

Frequency	
Auto Tune	
Center Freq	5.22000000 GHz
Start Freq	5.195000000 GHz
Stop Freq	5.245000000 GHz
CF Step	5.000000 MHz
Auto	Man
Freq Offset	0 Hz

Channel 48 -Chain A



Frequency	
Auto Tune	
Center Freq	5.240000000 GHz
Start Freq	5.215000000 GHz
Stop Freq	5.265000000 GHz
CF Step	5.000000 MHz
Auto	Man
Freq Offset	0 Hz


Channel 36 -Chain B



Channel 44 -Chain B



Channel 48 -Chain B

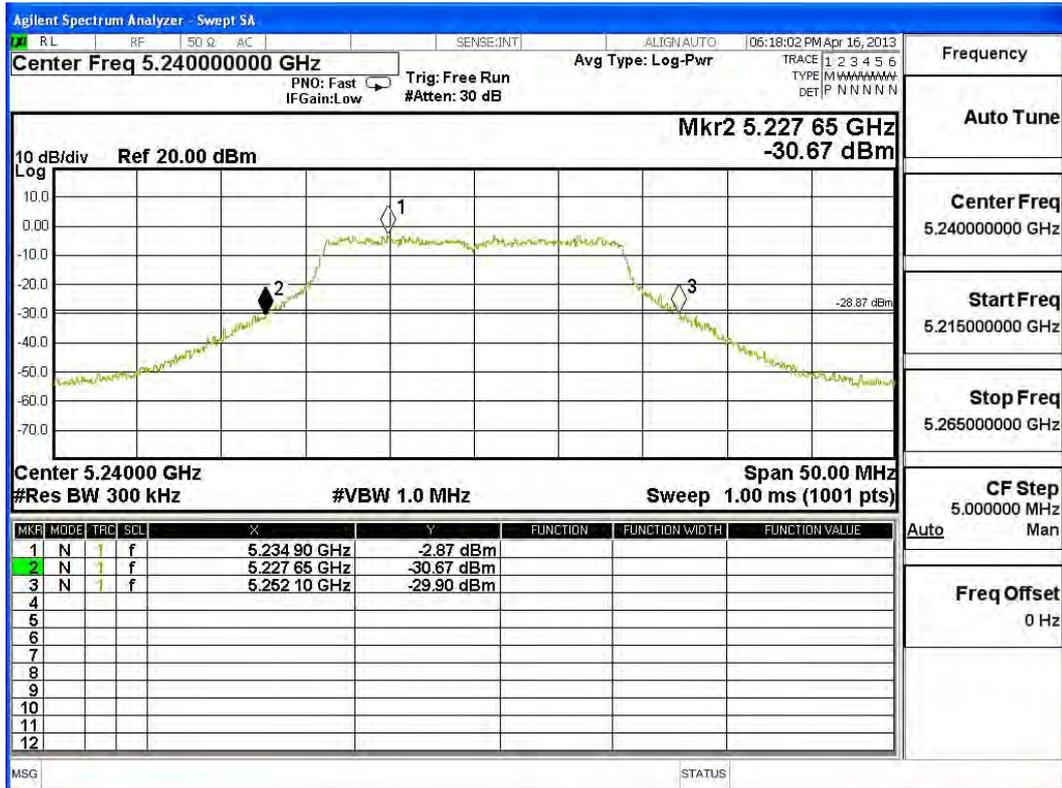

Product : WiFi AP
 Test Item : Maximum conducted output power
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps)

CHAIN A

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
38	5190	5.41	--	--	--	--	--	--	--	<11.29dBm
46	5230	6.31	6.27	6.24	6.19	6.15	6.12	6.06	6.02	<11.29dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

CHAIN B

Cable loss=1dB		Maximum conducted output power								
Channel No.	Frequency (MHz)	Data Rate (Mbps)								Required Limit
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
38	5190	8.1	--	--	--	--	--	--	--	<11.29dBm
46	5230	8.77	8.72	8.69	8.63	8.57	8.51	8.49	8.44	<11.29dBm

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss


Maximum conducted output power Measurement:
CHAIN A+B

Channel Number	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit	
						(dBm)	dBm+10log(BW)
38	5190	44.000	5.41	8.10	9.97	11.29	14.72
46	5230	44.700	6.31	8.77	10.72	11.29	14.79


Note:

1. Power Output Value =Reading value on average power meter + cable loss
2. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
3. 26 dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


26dBc Occupied Bandwidth: Channel 38 – Chain A

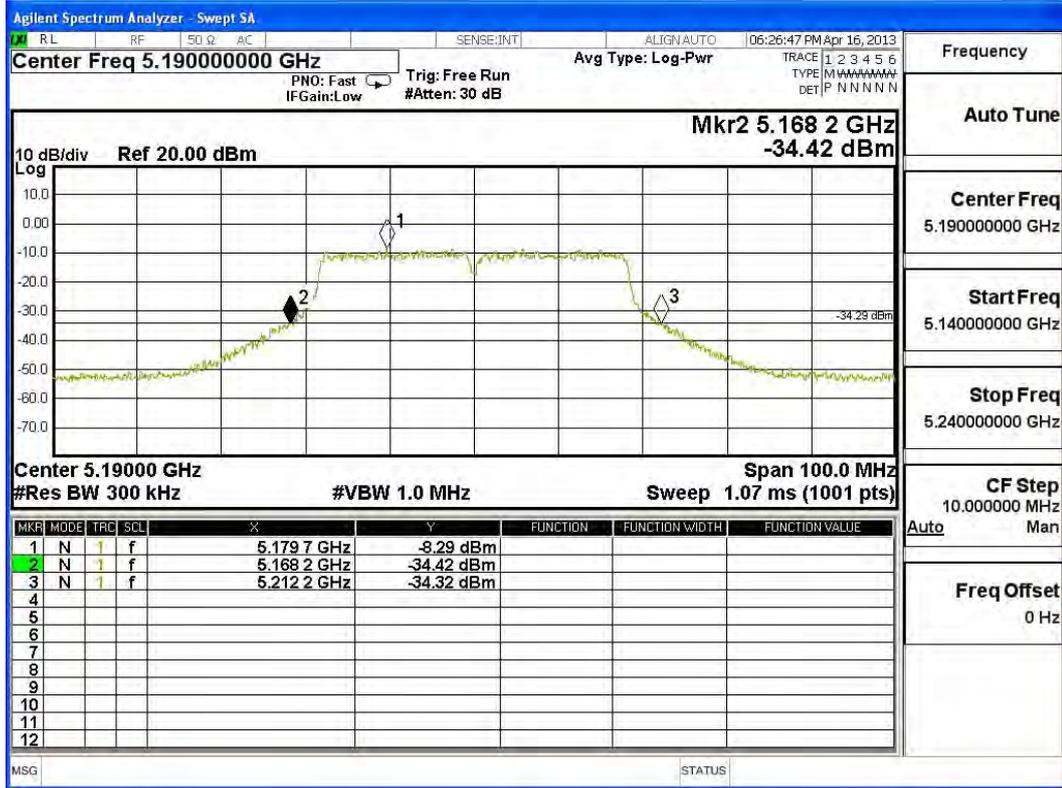


Channel 46 – Chain A

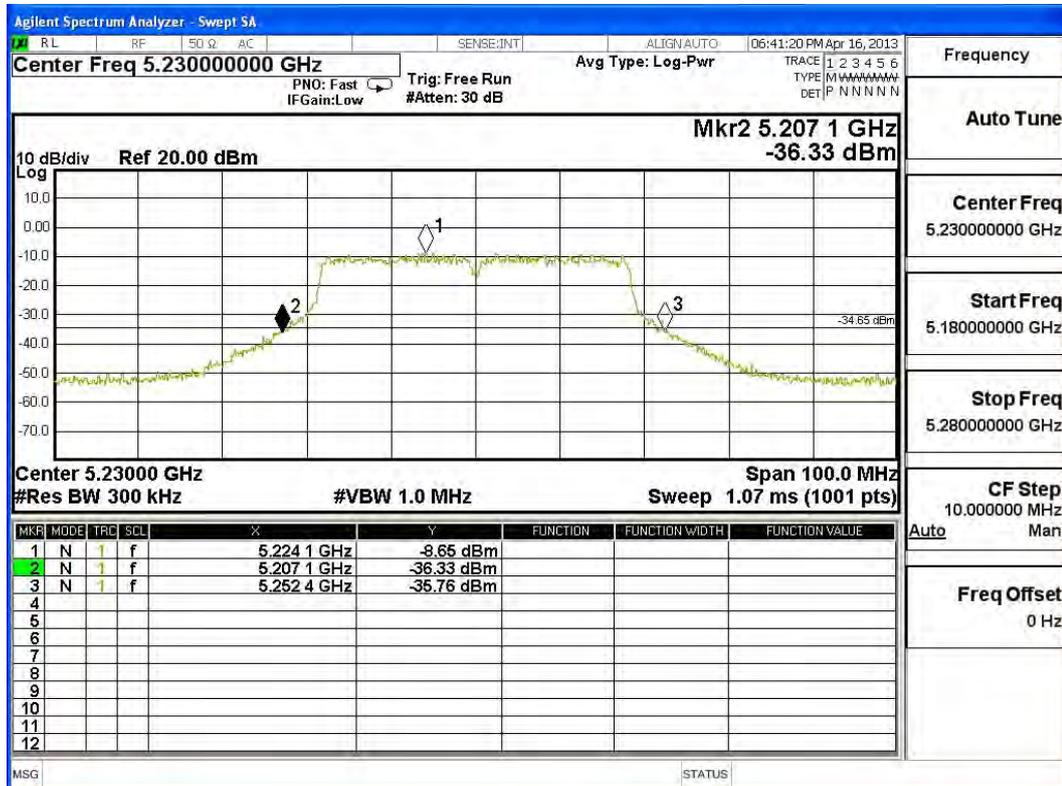

Channel 38 – Chain B

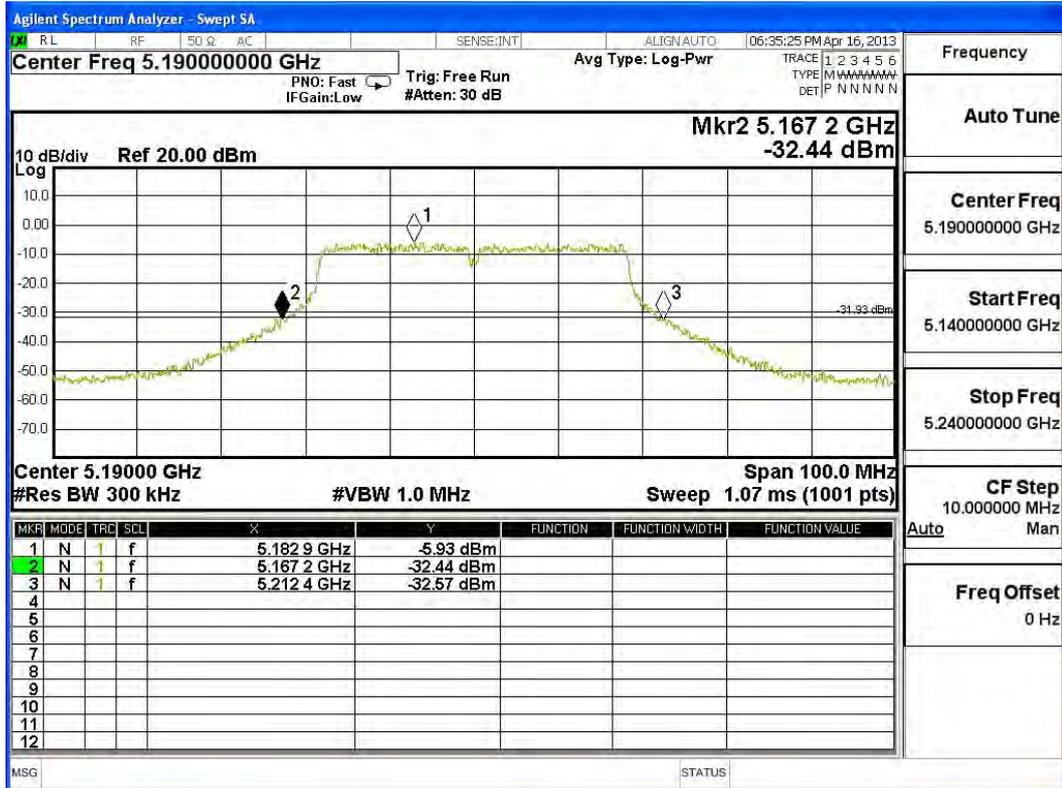

Channel 46 – Chain B

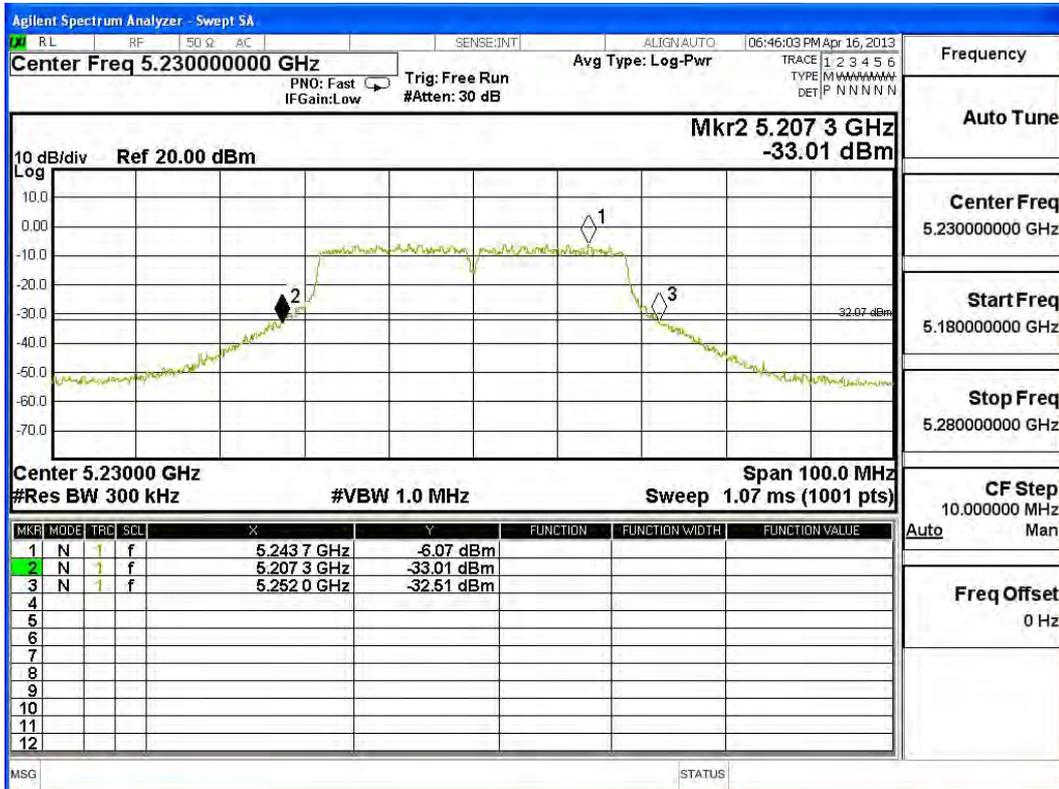

4. Peak Power Spectral Density


4.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr, 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

4.2. Test Setup

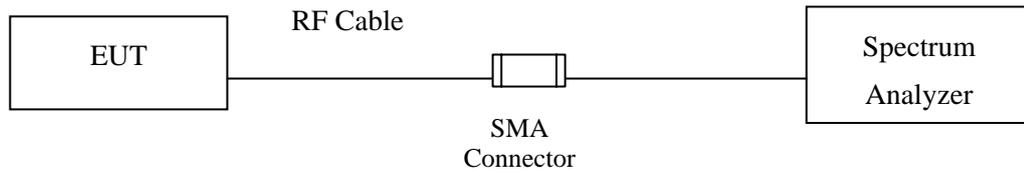

4.3. Limits

- (4) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
- (5) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.
- (6) For the band 5.725-5.825 GHz, the peak power spectral density shall not exceed 17 dBm in any 1-MHz band. If transmitting antenna of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6 dBi.

4.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

4.5. Uncertainty

± 1.27 dB


4.6. Test Result of Peak Power Spectral Density

Product : WiFi AP
 Test Item : Peak Power Spectral Density
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps)


Channel Number	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Required Limit (dBm)	Result
36	5180	-8.250	-5.790	-3.838	<-1.71	Pass
44	5220	-8.240	-6.000	-3.967	<-1.71	Pass
48	5240	-8.040	-6.100	-3.952	<-1.71	Pass

Note: Measurement Level (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))


Channel 36 – Chain A

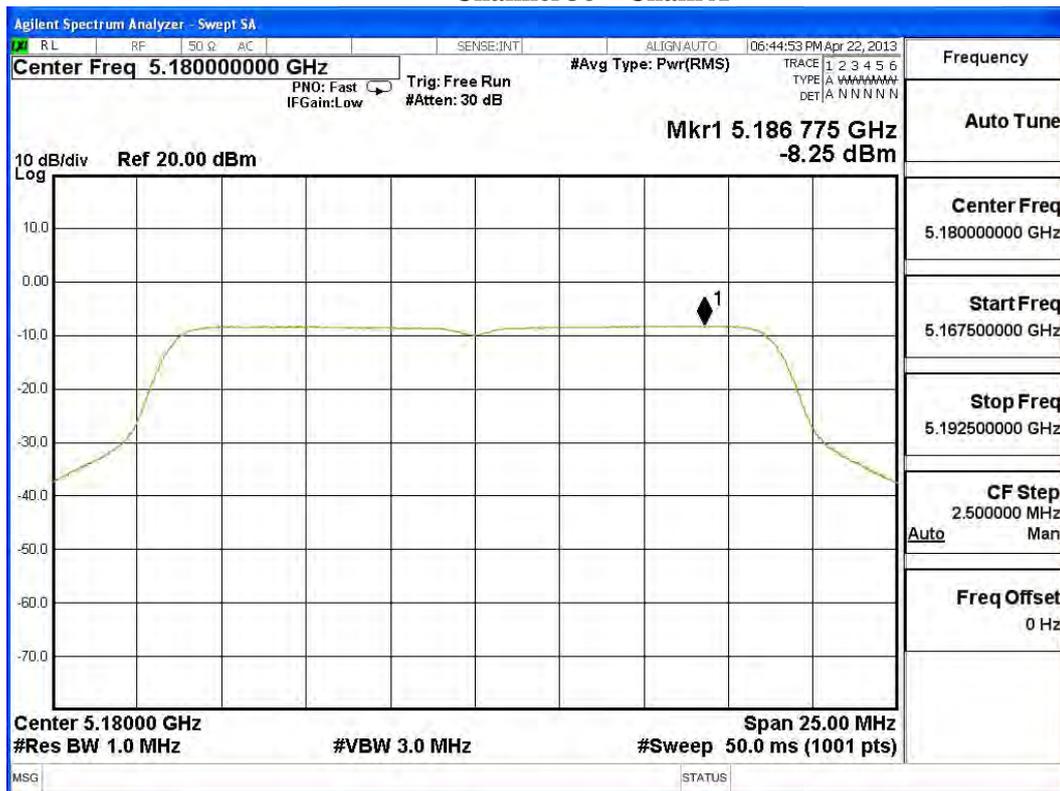


Channel 44 – Chain A

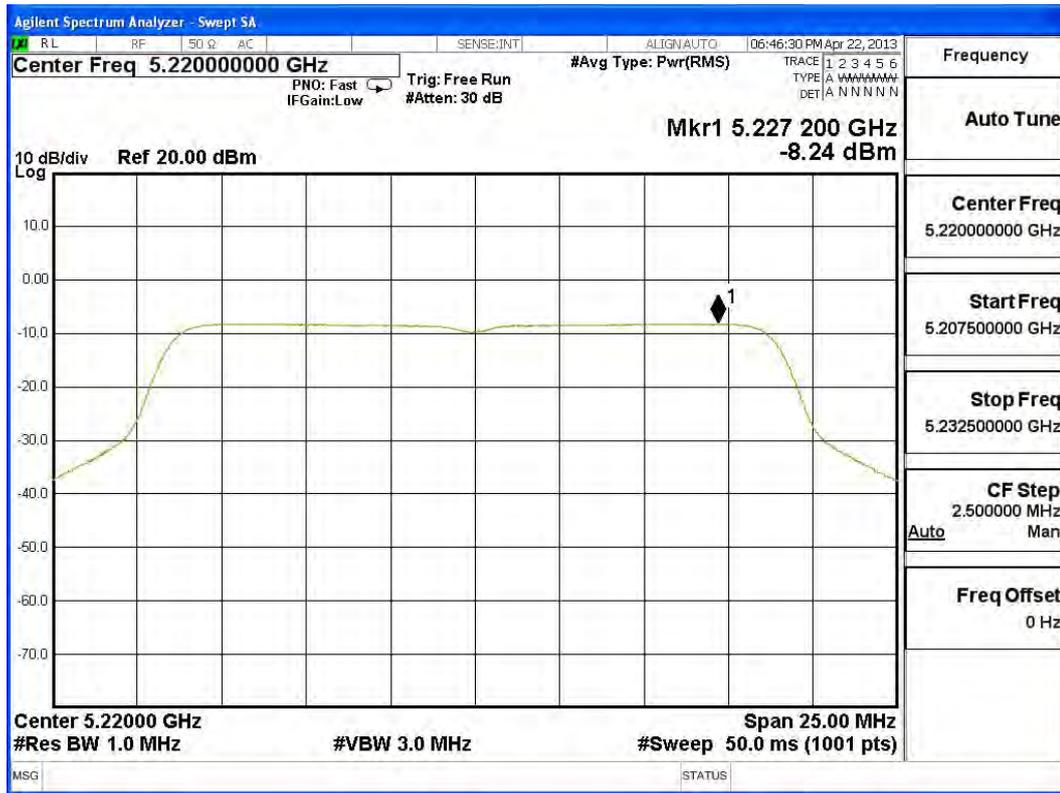


Channel 48 – Chain A

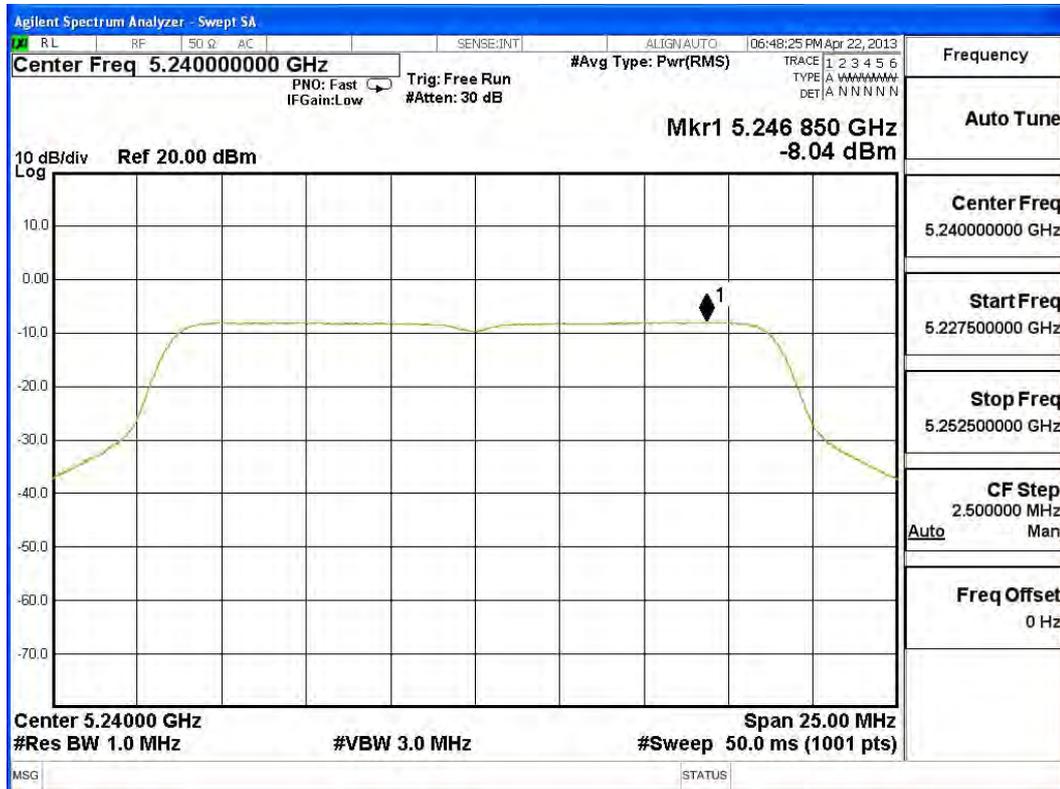


Channel 36 – Chain B

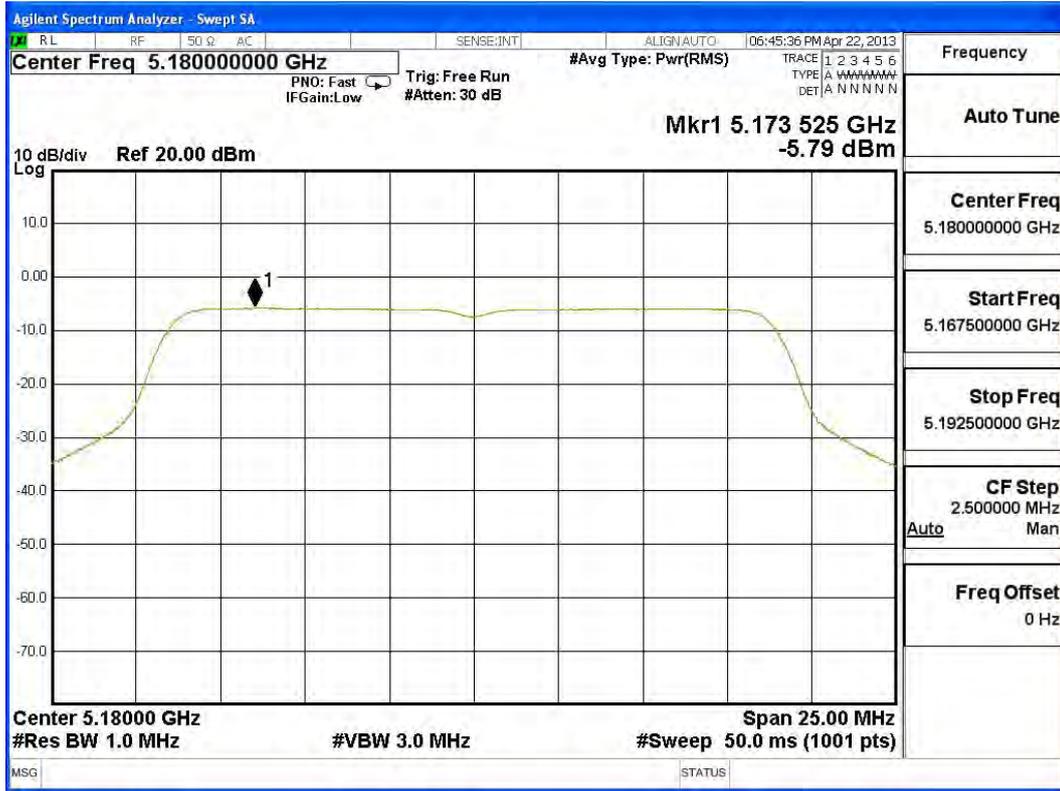

Channel 44 – Chain B

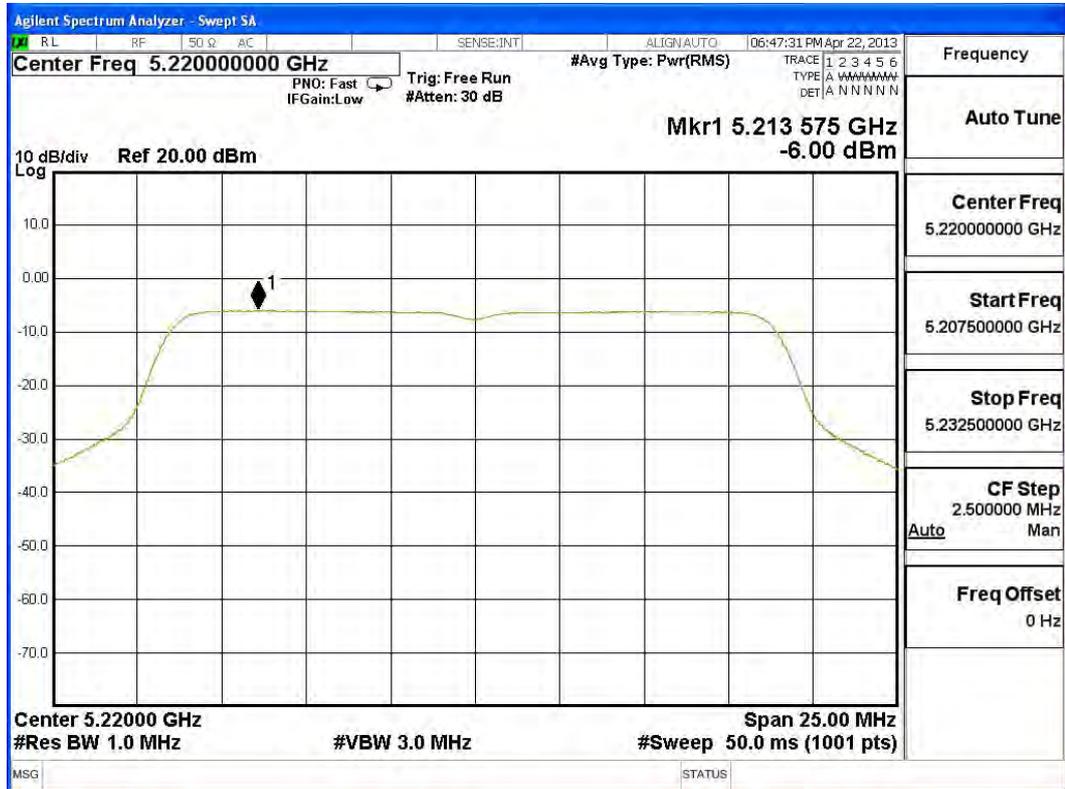

Channel 48 – Chain B

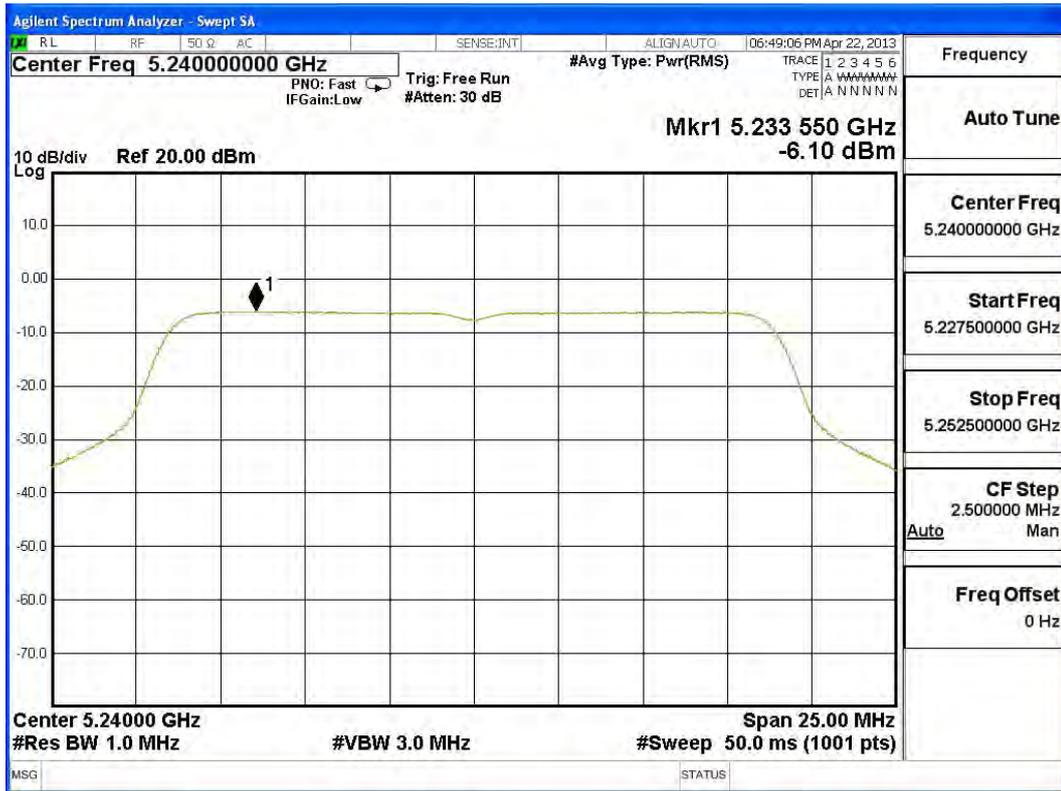


Product : WiFi AP
 Test Item : Peak Power Spectral Density
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps)


Channel Number	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Required Limit (dBm)	Result
38	5190	-11.840	-9.820	-7.703	<-1.71	Pass
46	5230	-10.730	-8.800	-6.648	<-1.71	Pass

Note: Measurement Level (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))


Channel 38 – Chain A

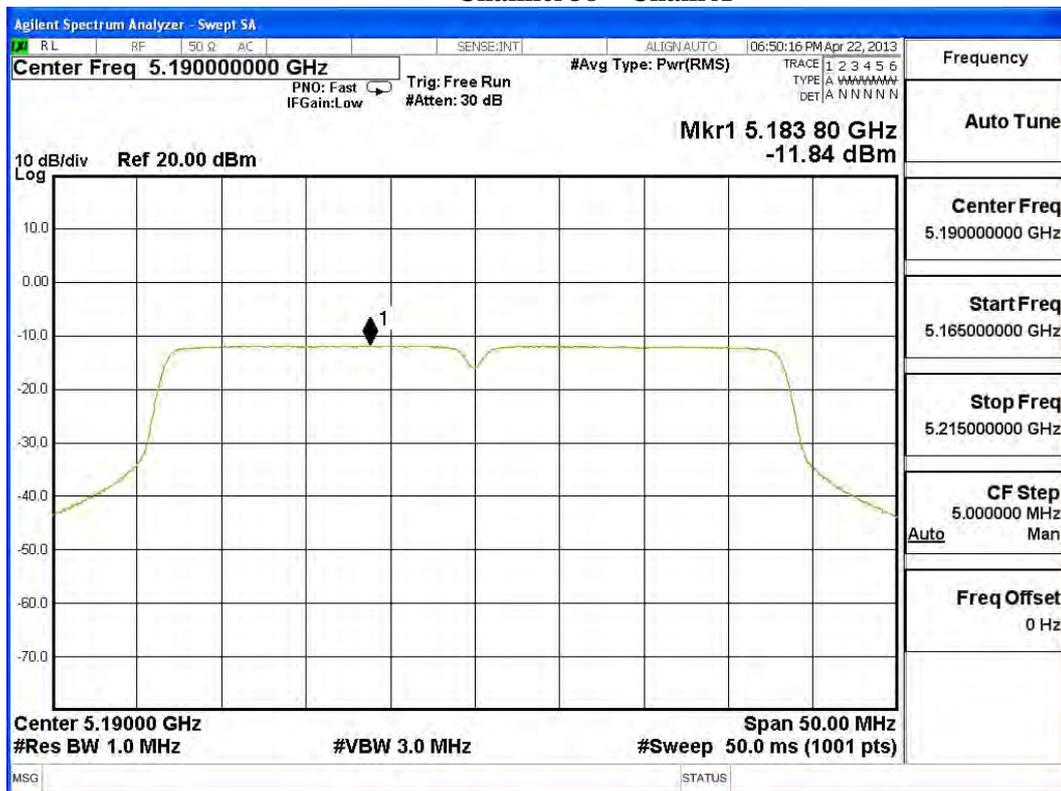


Channel 46 – Chain A

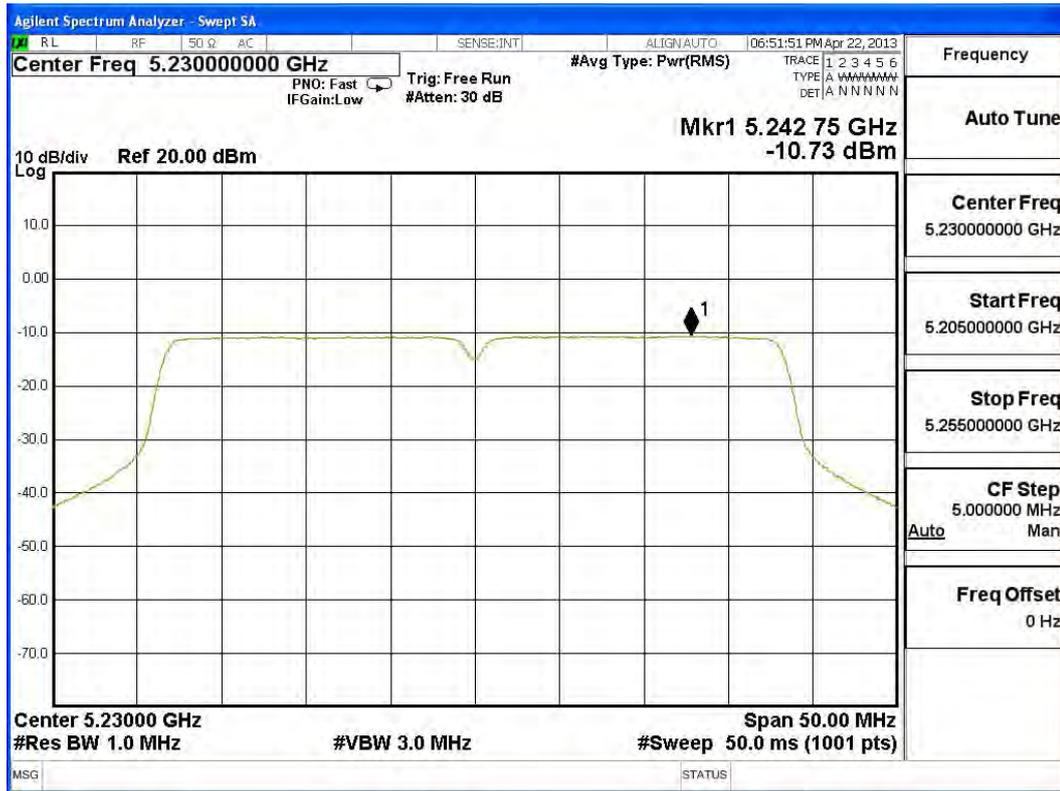

Channel 38 – Chain B

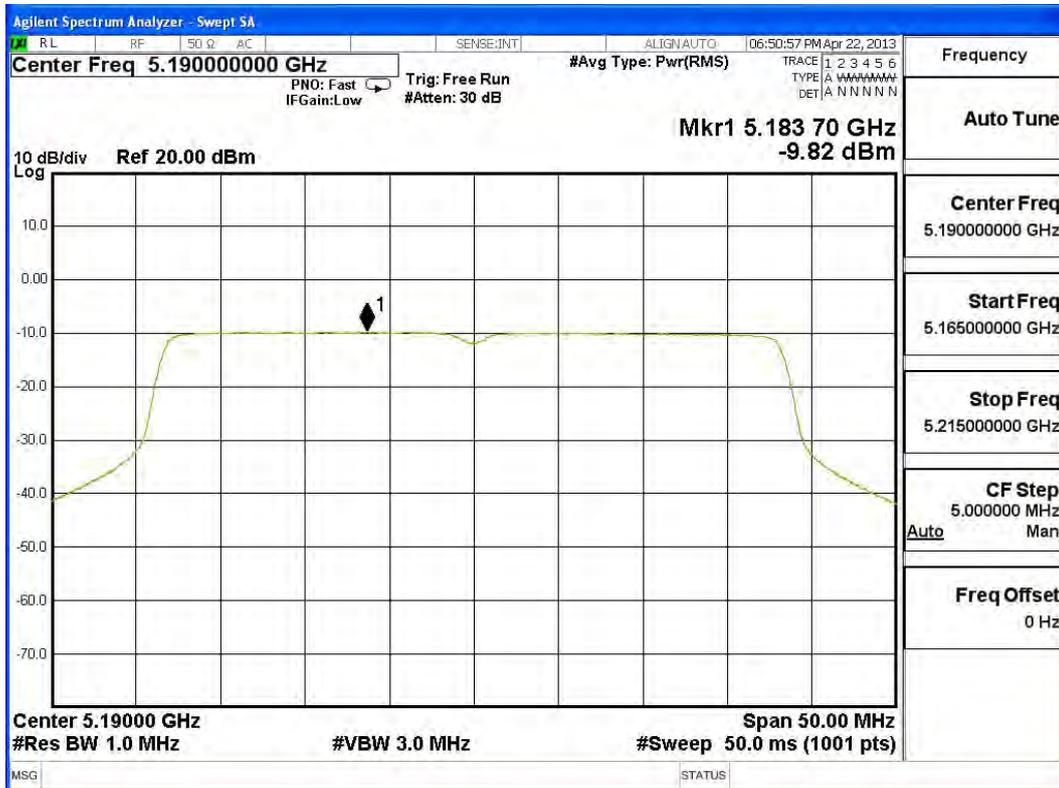

Channel 46 – Chain B

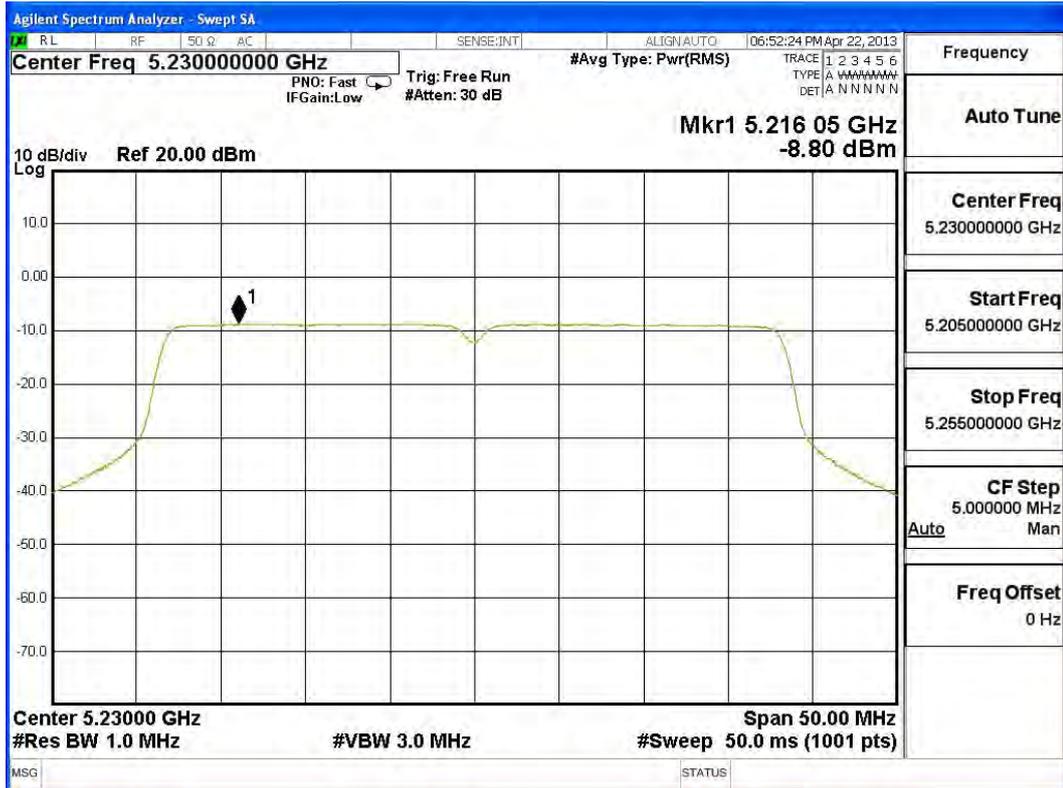

5. Peak Excursion

5.1. Test Equipment


	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

5.2. Test Setup

Conduction Power Measurement

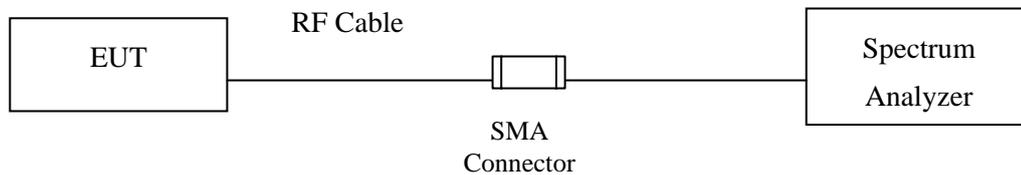

5.3. Limits

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

5.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

5.5. Uncertainty

± 1.27 dB


5.6. Test Result of Peak Excursion

Product : WiFi AP
 Test Item : Peak Excursion
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps)


Chain A

Channel No.	Frequency (MHz)	Measurement Level (dB)	Required Limit (dB)	Result
36	5180	8.070	<13	Pass
44	5220	10.850	<13	Pass
48	5240	9.980	<13	Pass


Channel 36:

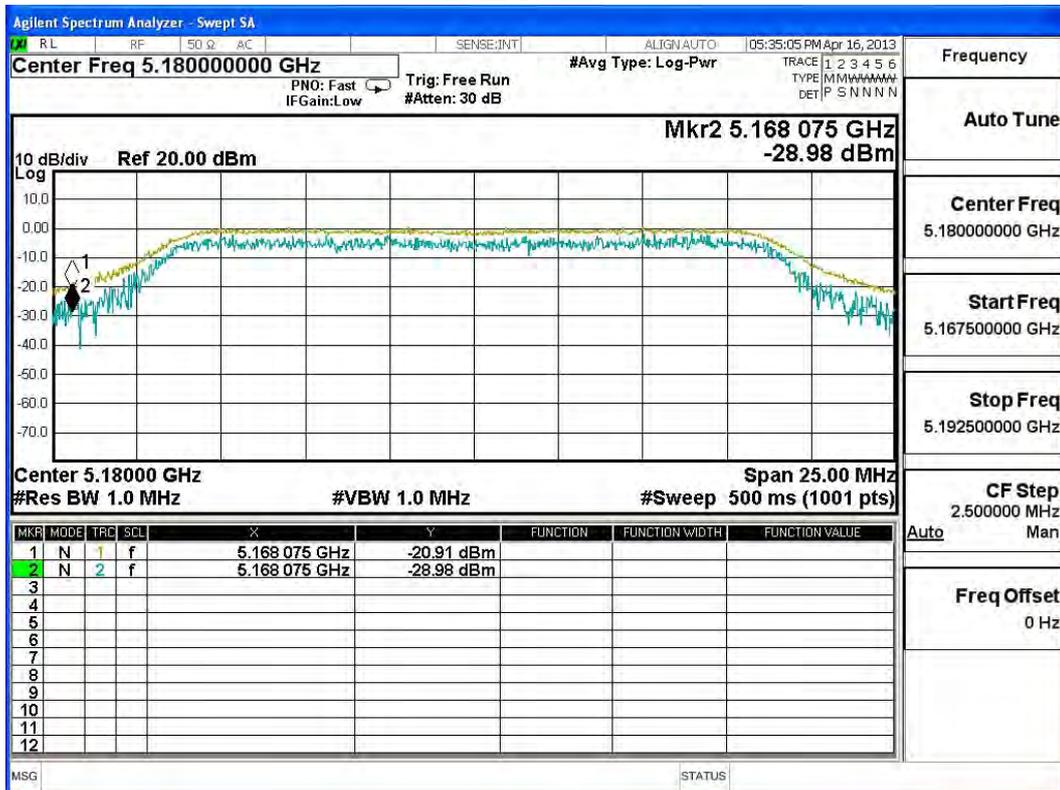

Channel 44:

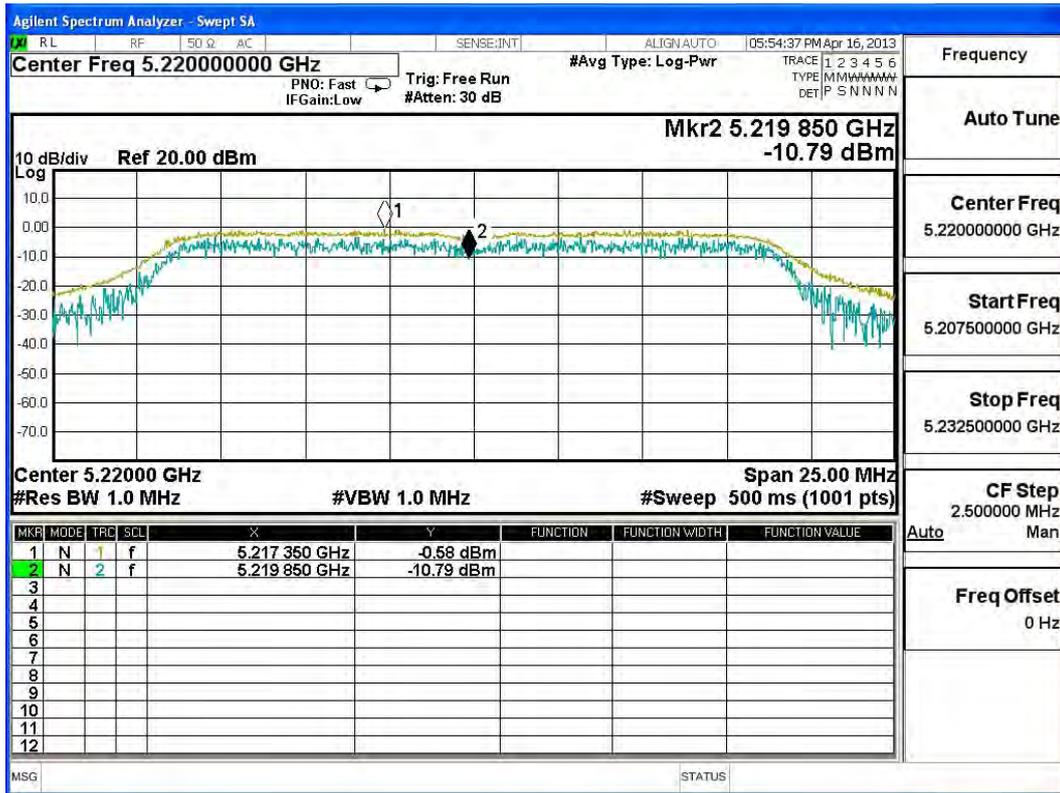


Channel 48:

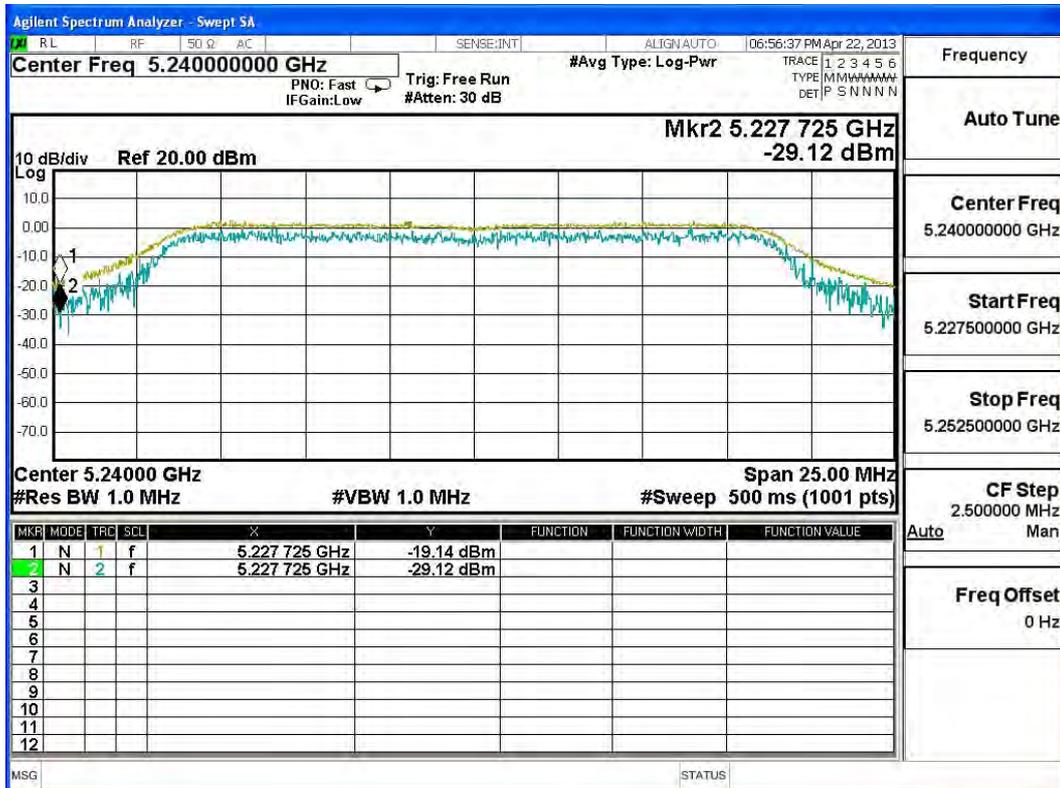


Chain B

Channel No.	Frequency (MHz)	Measurement Level (dB)	Required Limit (dB)	Result
36	5180	8.120	<13	Pass
44	5220	7.390	<13	Pass
48	5240	7.450	<13	Pass


Channel 36:

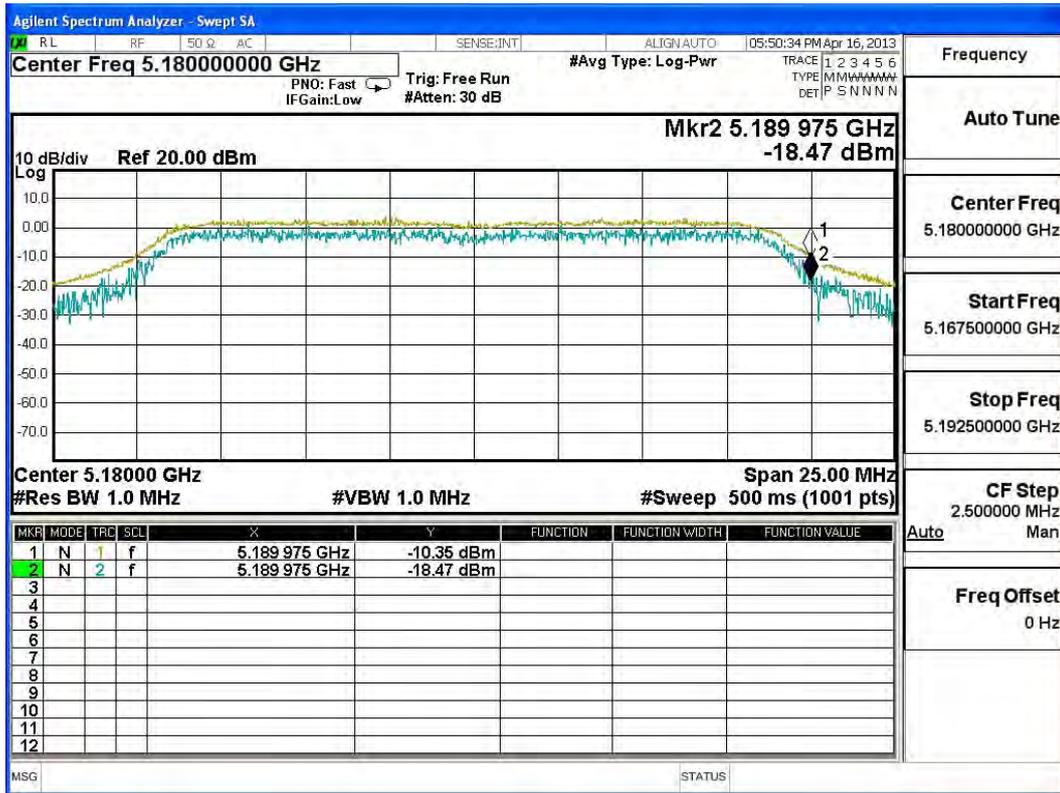

Channel 44:

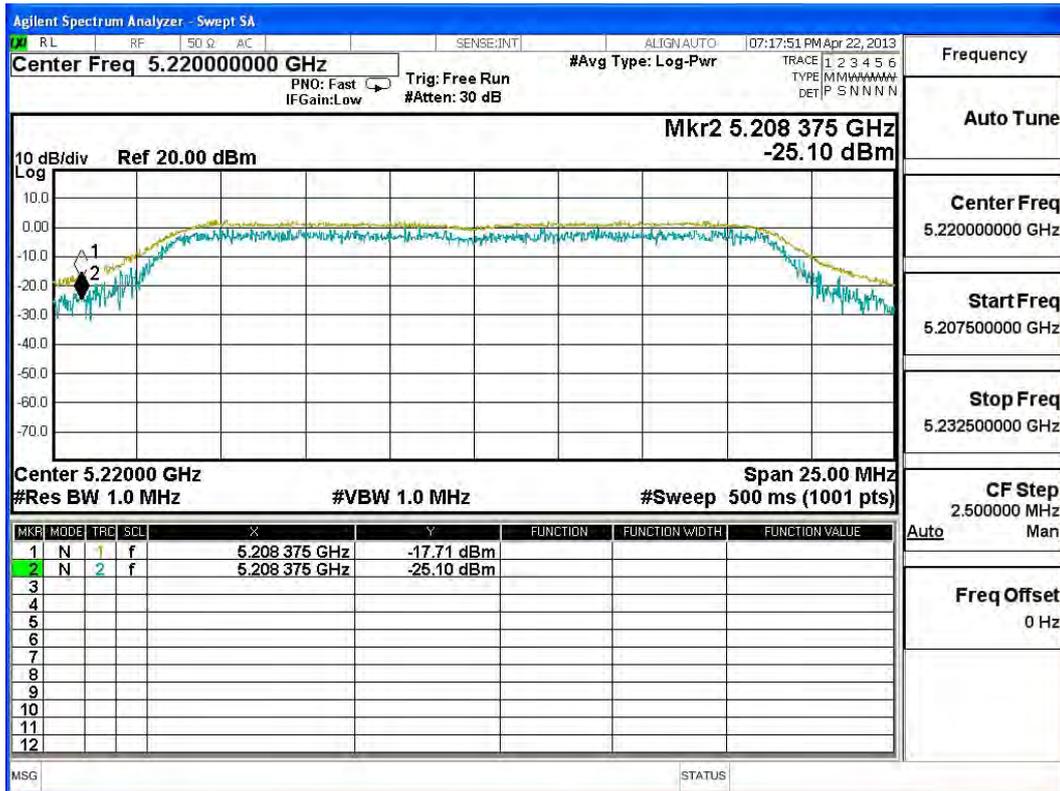

Channel 48:

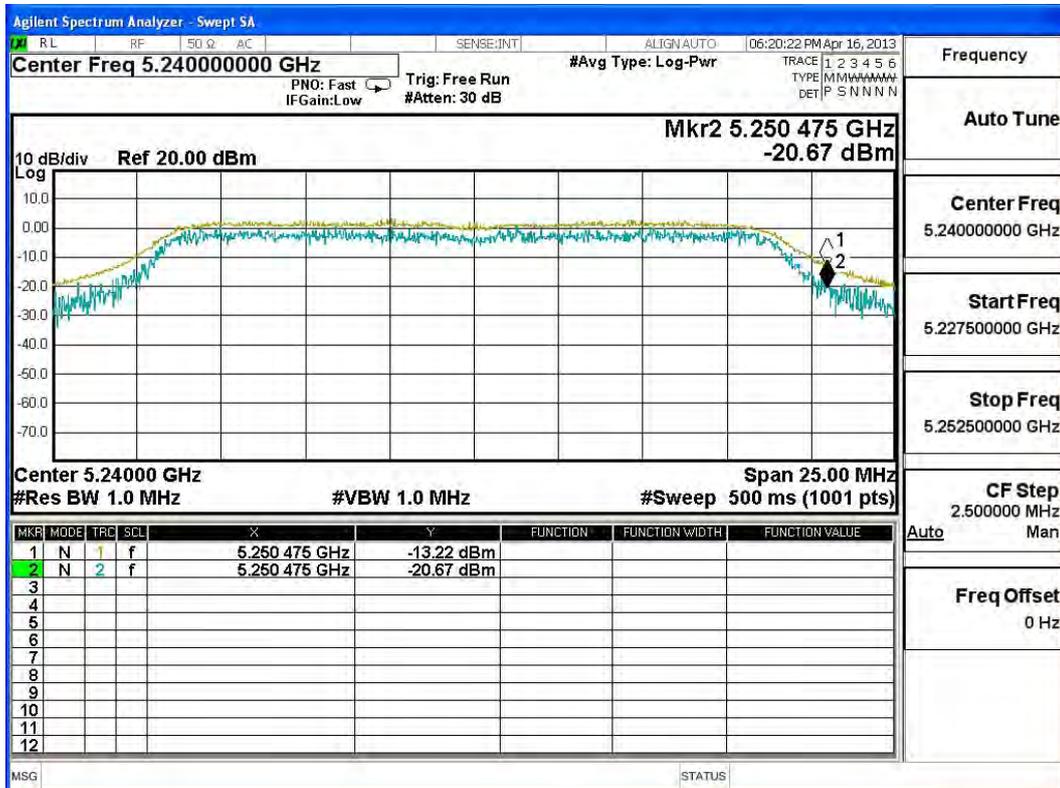


Product : WiFi AP
 Test Item : Peak Excursion
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps)


Chain A

Channel No.	Frequency (MHz)	Measurement Level (dB)	Required Limit (dB)	Result
38	5190	12.490	<13	Pass
46	5230	5.350	<13	Pass

Channel 38:

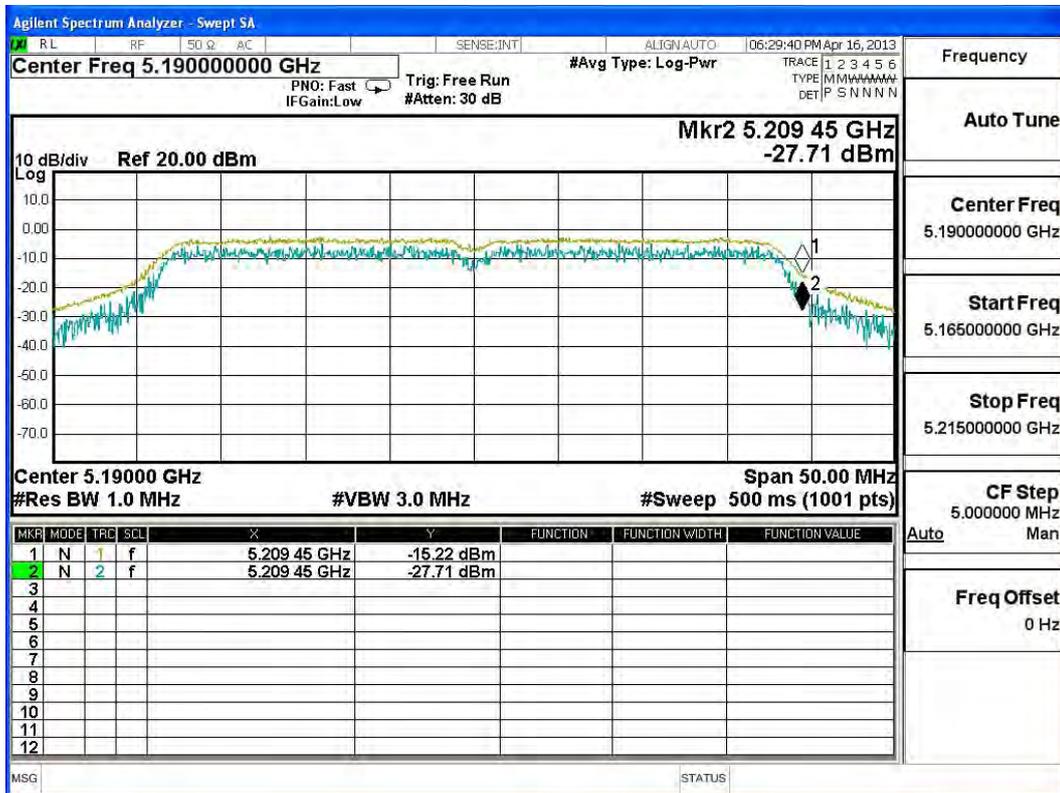

Channel 46:

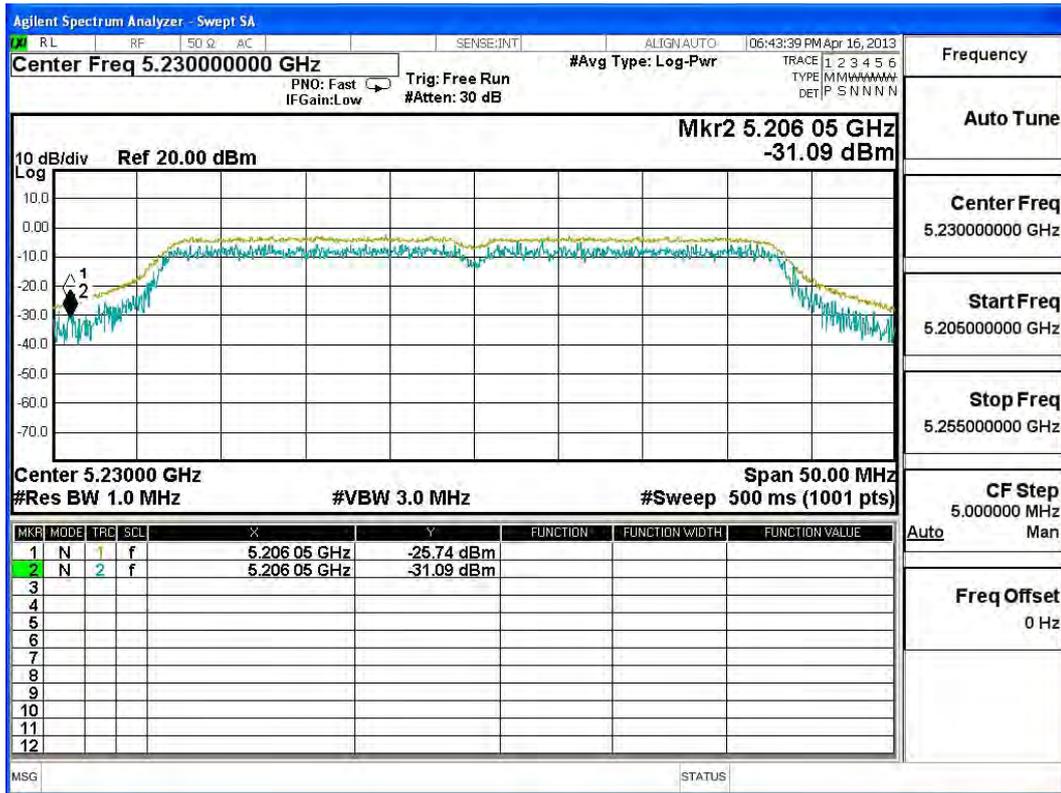


Frequency
Auto Tune
Center Freq 5.230000000 GHz
Start Freq 5.205000000 GHz
Stop Freq 5.255000000 GHz
CF Step 5.000000 MHz
Auto Man
Freq Offset 0 Hz


Chain B

Channel No.	Frequency (MHz)	Measurement Level (dB)	Required Limit (dB)	Result
38	5190	9.750	<13	Pass
46	5230	4.440	<13	Pass

Channel 38:

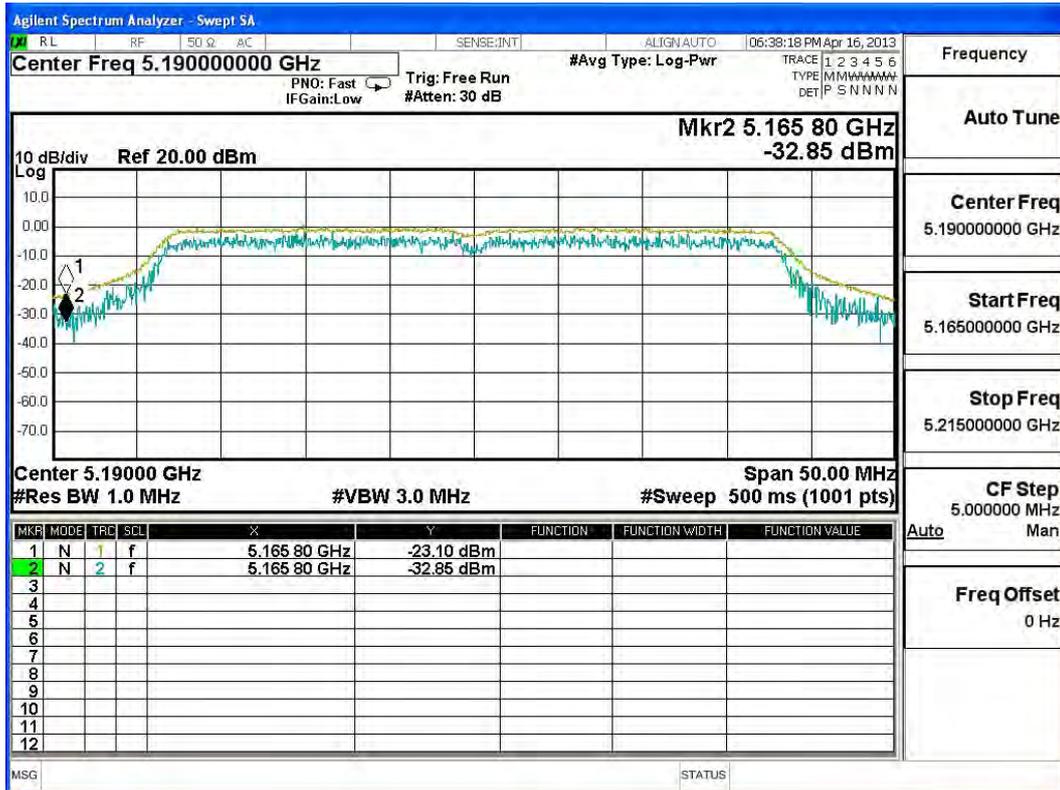

Channel 46:

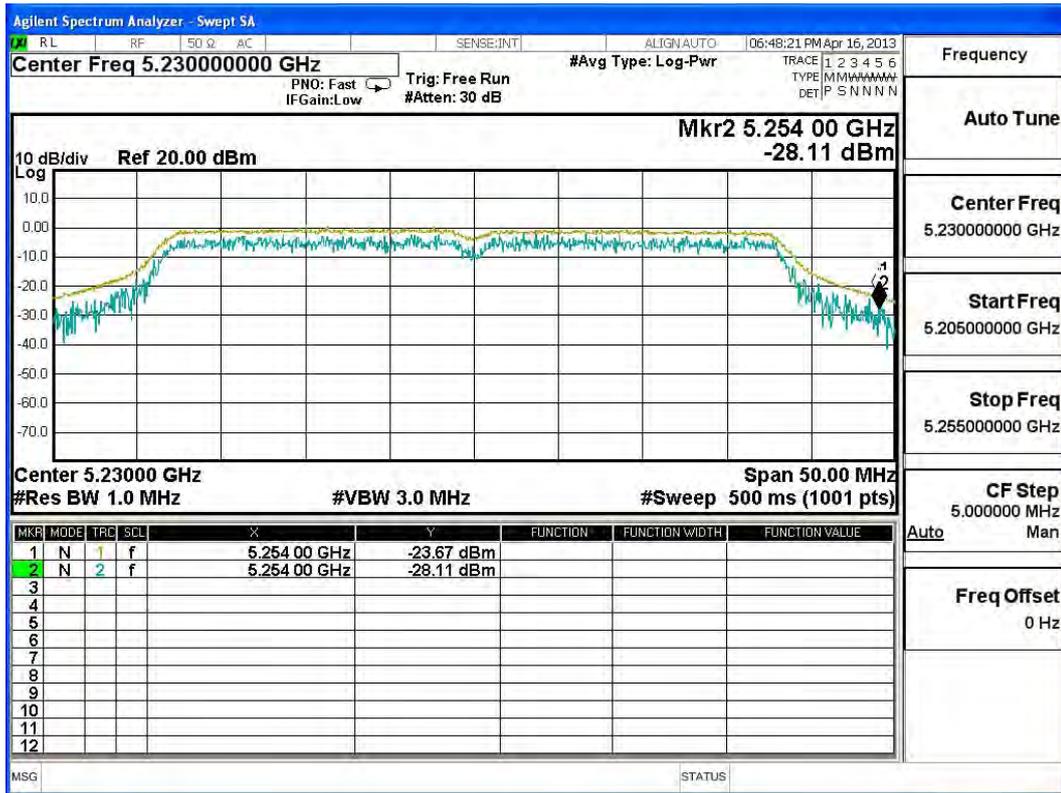

6. Radiated Emission

6.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 3	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2012
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2012
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2012
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2013
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2012
	X	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2013
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2012
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2013
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

6.2. Test Setup

Radiated Emission Below 1GHz

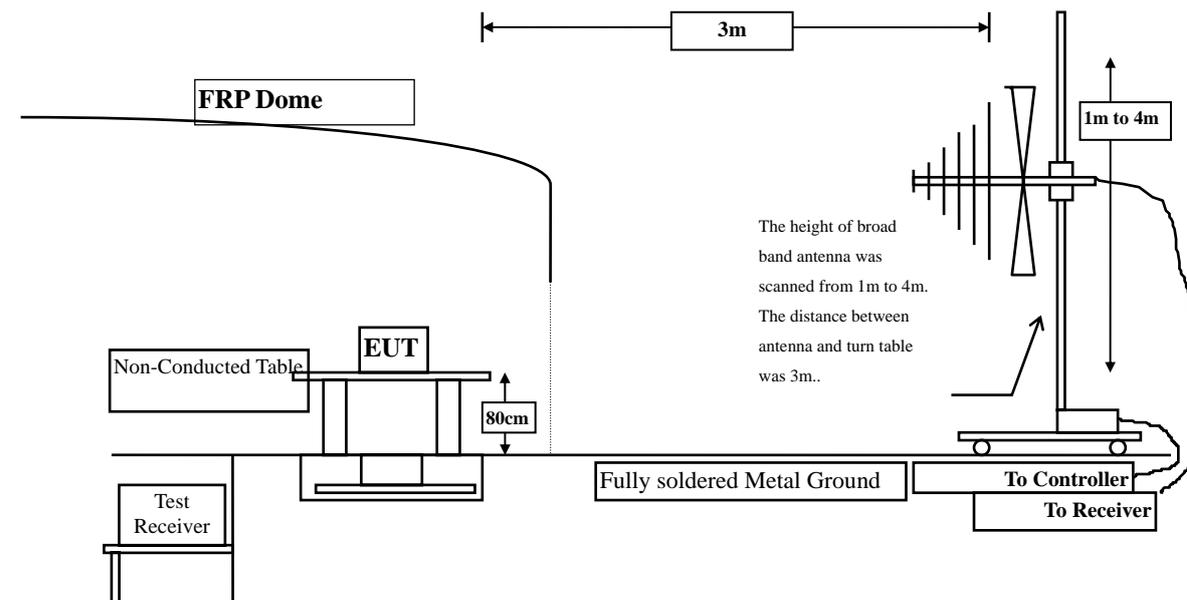

Radiated Emission Above 1GHz

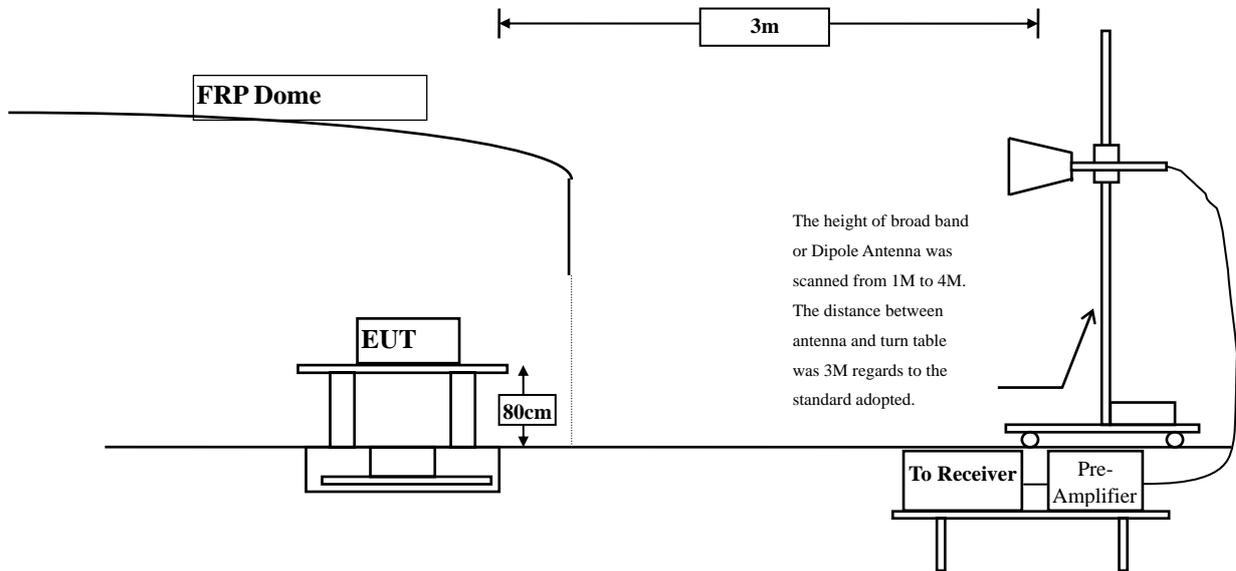

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

6.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15.407 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10, 2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range form 30MHz - 10th Harmonic of fundamental was investigated.

6.5. Uncertainty

± 3.8 dB below 1GHz

± 3.9 dB above 1GHz

6.6. Test Result of Radiated Emission

Product : WiFi AP
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps) (5180MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10360.000	12.930	37.370	50.300	-23.700	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
10360.000	13.724	37.520	51.244	-22.756	74.000
15540.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
Average Detector:					
--					

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
- Measurement Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WiFi AP
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps) (5220MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10440.000	13.322	38.210	51.532	-22.468	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
10440.000	14.245	37.490	51.735	-22.265	74.000
15660.000	*	*	*	*	74.000
20880.000	*	*	*	*	74.000
26100.000	*	*	*	*	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WiFi AP
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps) (5240MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10480.000	13.693	36.900	50.594	-23.406	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
10480.000	14.620	37.050	51.671	-22.329	74.000
15720.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WiFi AP
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) (5190MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10380.000	12.939	37.520	50.459	-23.541	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
10380.000	13.796	37.710	51.506	-22.494	74.000
15570.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WiFi AP
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) (5230MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
10460.000	13.508	37.520	51.028	-22.972	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
--					
Vertical					
Peak Detector:					
10460.000	14.433	37.370	51.803	-22.197	74.000
15690.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
Average Detector:					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WiFi AP
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps) (5220MHz),
 (Adapter:GFP121DA-240050HB)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
132.820	-10.230	48.686	38.456	-5.044	43.500
359.800	-1.680	38.431	36.751	-9.249	46.000
505.300	0.308	33.163	33.471	-12.529	46.000
600.360	3.977	31.587	35.564	-10.436	46.000
666.320	2.031	34.282	36.314	-9.686	46.000
800.180	5.141	30.177	35.318	-10.682	46.000
Vertical					
Peak Detector					
198.780	-8.221	42.128	33.907	-9.593	43.500
445.160	-7.992	42.958	34.966	-11.034	46.000
485.900	-3.204	36.591	33.387	-12.613	46.000
666.320	-1.809	34.870	33.062	-12.938	46.000
800.180	2.801	32.133	34.934	-11.066	46.000
924.340	5.550	31.443	36.993	-9.007	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WiFi AP
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) (5190MHz),
 (Adapter:GFP121DA-240050HB)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
111.480	-7.914	43.912	35.998	-7.502	43.500
311.300	-4.026	41.066	37.040	-8.960	46.000
363.680	-1.433	41.343	39.910	-6.090	46.000
398.600	-2.268	38.444	36.176	-9.824	46.000
800.180	5.141	28.501	33.642	-12.358	46.000
932.100	6.922	26.059	32.981	-13.019	46.000
Vertical					
Peak Detector					
111.480	-0.954	41.439	40.485	-3.015	43.500
132.820	-4.440	44.755	40.315	-3.185	43.500
396.660	-4.356	42.195	37.839	-8.161	46.000
664.380	-1.918	35.551	33.633	-12.367	46.000
800.180	2.801	32.553	35.354	-10.646	46.000
967.020	8.071	29.734	37.805	-16.195	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WiFi AP
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps) (5220MHz),
 (Adapter:GFP241DA-240100HB)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
105.660	-7.676	38.360	30.683	-12.817	43.500
245.340	-6.478	42.059	35.581	-10.419	46.000
388.900	1.034	36.584	37.618	-8.382	46.000
608.120	3.925	31.236	35.161	-10.839	46.000
786.600	5.824	26.709	32.534	-13.466	46.000
953.440	6.735	28.265	35.000	-11.000	46.000
Vertical					
Peak Detector					
121.180	-3.559	38.544	34.985	-8.515	43.500
237.580	-6.537	40.494	33.957	-12.043	46.000
410.240	-4.492	37.702	33.211	-12.789	46.000
608.120	2.175	31.657	33.832	-12.168	46.000
780.780	2.769	27.683	30.452	-15.548	46.000
930.160	3.830	28.924	32.754	-13.246	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WiFi AP
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) (5190MHz),
 (Adapter:GFP241DA-240100HB)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector					
138.640	-7.519	39.384	31.865	-11.635	43.500
243.400	-6.546	43.655	37.109	-8.891	46.000
388.900	1.034	36.756	37.790	-8.210	46.000
547.980	4.028	29.520	33.548	-12.452	46.000
666.320	1.879	33.755	35.634	-10.366	46.000
809.880	6.266	27.028	33.294	-12.706	46.000
Vertical					
Peak Detector					
212.360	-5.752	42.773	37.021	-6.479	43.500
311.300	-4.071	42.999	38.928	-7.072	46.000
416.060	-6.381	38.708	32.327	-13.673	46.000
608.120	2.175	32.484	34.659	-11.341	46.000
749.740	2.023	29.327	31.350	-14.650	46.000
918.520	1.958	32.917	34.875	-11.125	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

7. Band Edge

7.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.	
☒ Site # 3		Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2012
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2012
		Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2012
		Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2013
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2012
		Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2013
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
		Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2012
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2013
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

7.2. Test Setup

RF Conducted Measurement

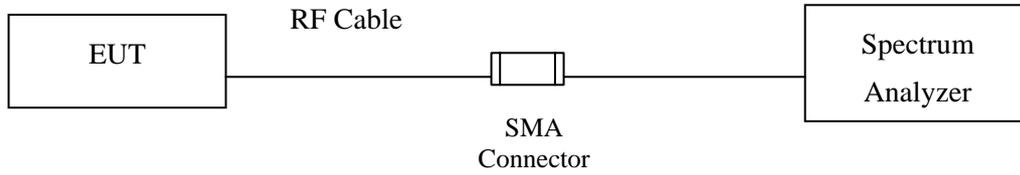

RF Radiated Measurement:

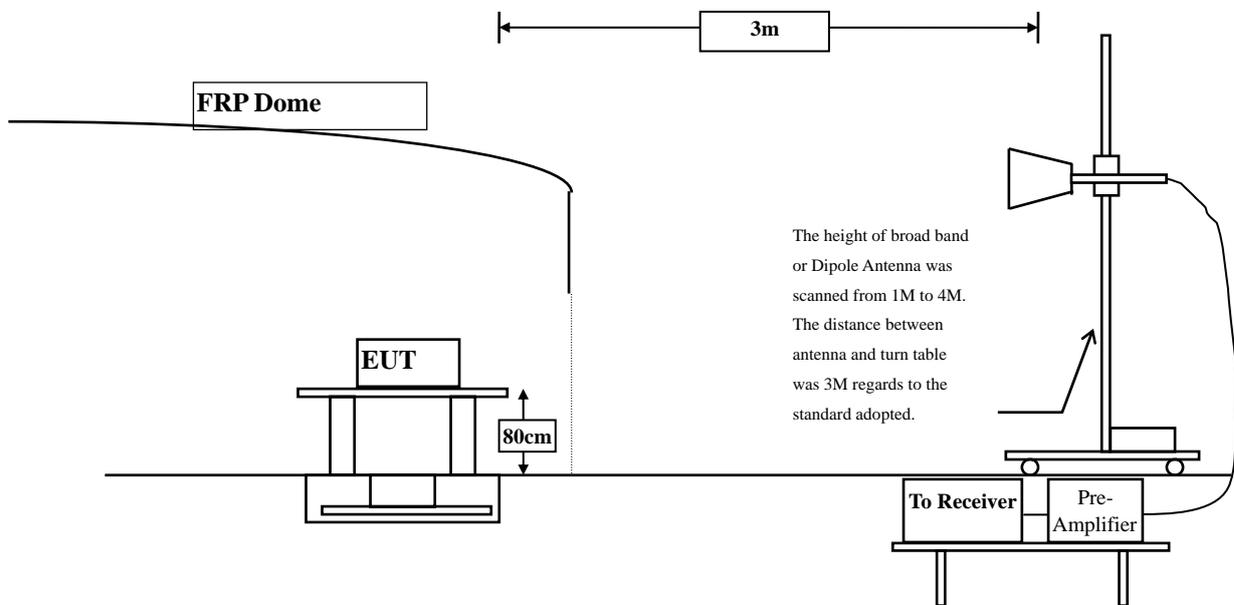

7.3. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10, 2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

7.5. Uncertainty

- ± 3.8 dB below 1GHz
- ± 3.9 dB above 1GHz

7.6. Test Result of Band Edge

Product : WiFi AP
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps) -Channel 36

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5148.200	3.347	58.099	61.446	74.00	54.00	Pass
36 (Peak)	5150.000	3.340	55.398	58.738	74.00	54.00	Pass
36 (Peak)	5178.800	3.238	105.387	108.625	--	--	--
36 (Average)	5148.200	3.347	44.776	48.123	74.00	54.00	Pass
36 (Average)	5150.000	3.340	44.675	48.015	74.00	54.00	Pass
36 (Average)	5176.000	3.249	93.095	96.344	--	--	--

Figure Channel 36: Horizontal (Peak)


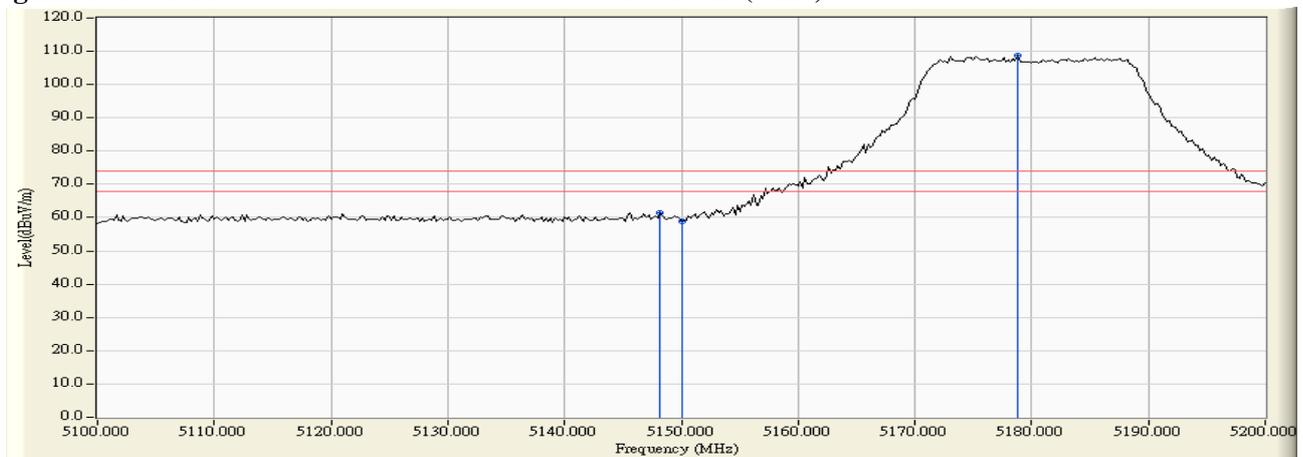


Figure Channel 36: Horizontal (Average)

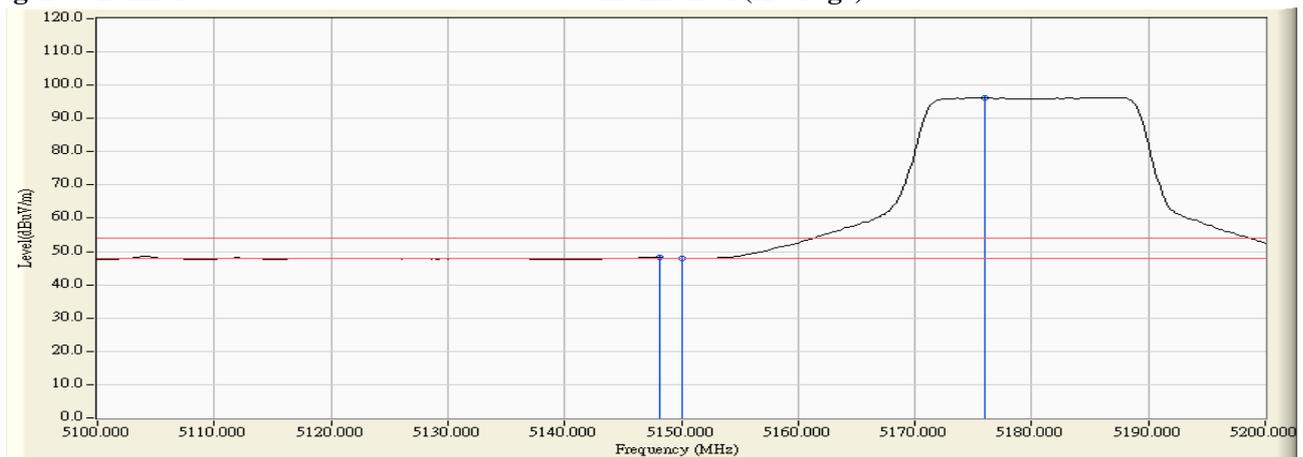

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WiFi AP
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps) -Channel 36

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
36 (Peak)	5147.400	5.253	57.249	62.502	74.00	54.00	Pass
36 (Peak)	5150.000	5.260	56.153	61.413	74.00	54.00	Pass
36 (Peak)	5186.600	5.360	106.432	111.792	--	--	--
36 (Average)	5147.400	5.253	43.234	48.487	74.00	54.00	Pass
36 (Average)	5150.000	5.260	43.206	48.466	74.00	54.00	Pass
36 (Average)	5173.600	5.325	94.118	99.443	--	--	--

Figure Channel 36: Vertical (Peak)


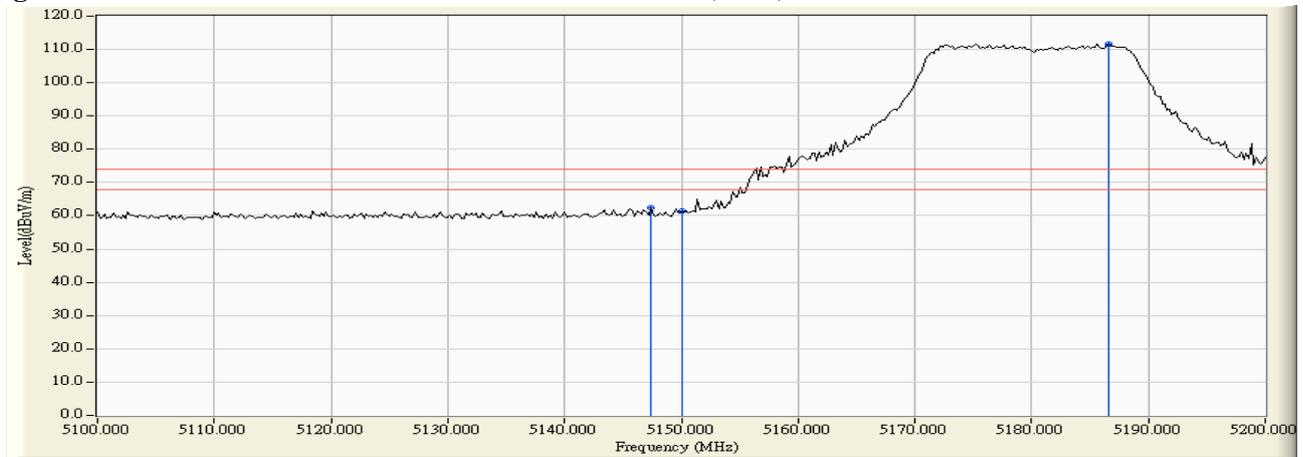


Figure Channel 36: Vertical (Average)

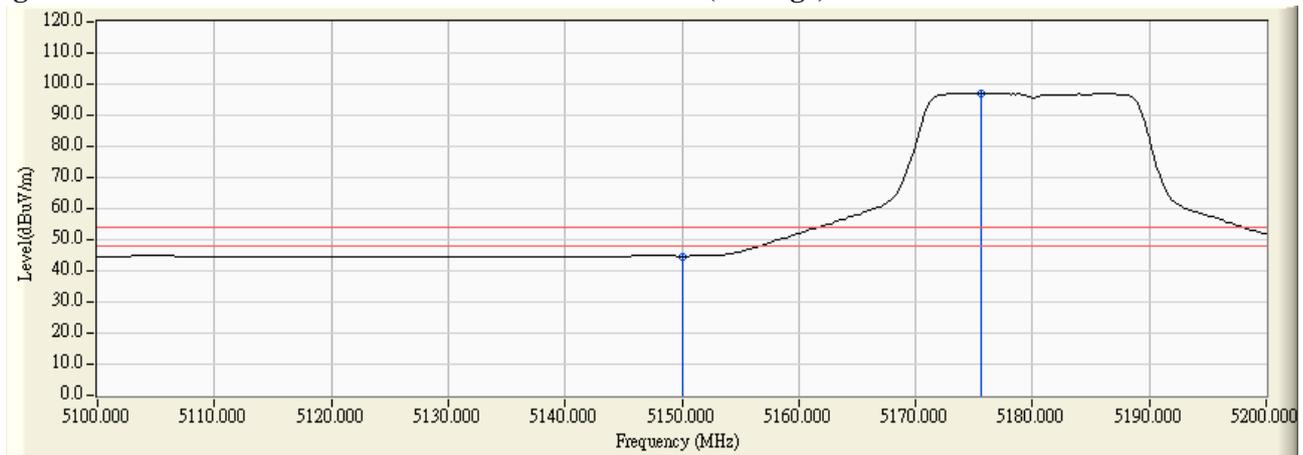

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WiFi AP
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps) -Channel 48

(Chain A)

Test Frequency (MHz)	Measurement Level (20dB BW) (MHz)	Limit (MHz)	Result
5240	5249.45	<5250	PASS

NOTE: Accordance with 15.215 requirement.

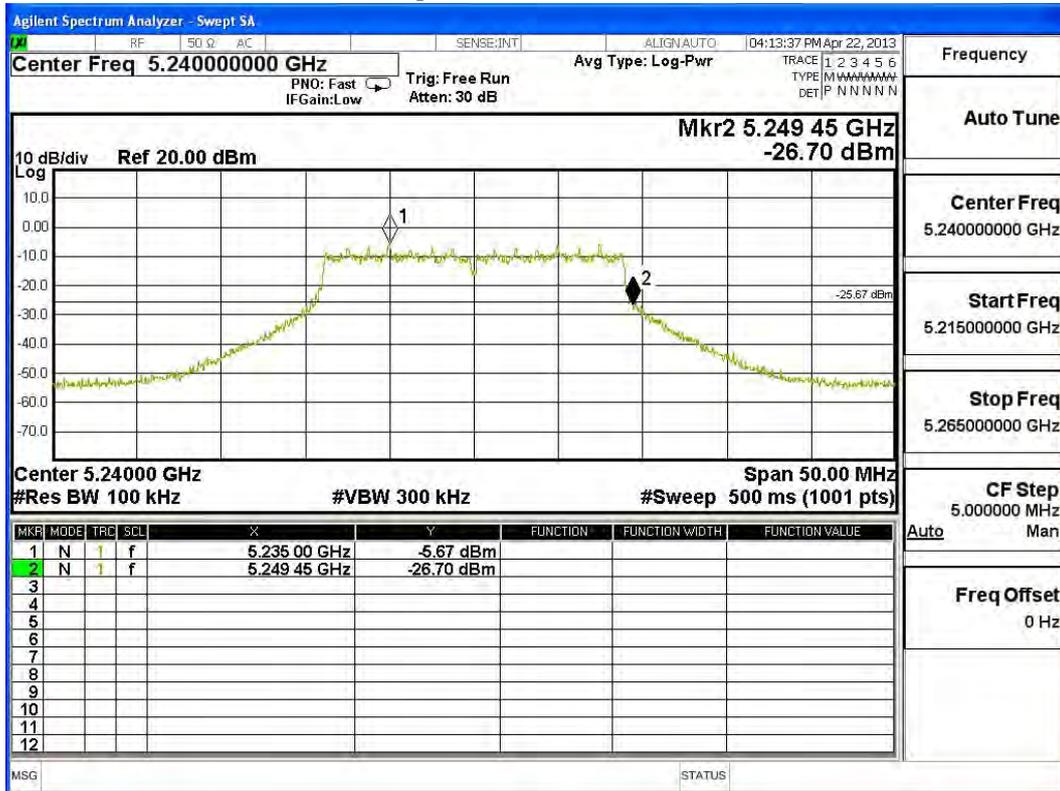


Product : WiFi AP
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps) -Channel 48

(Chain B)

Test Frequency (MHz)	Measurement Level (20dB BW) (MHz)	Limit (MHz)	Result
5240	5249.7	<5250	PASS

NOTE: Accordance with 15.215 requirement.

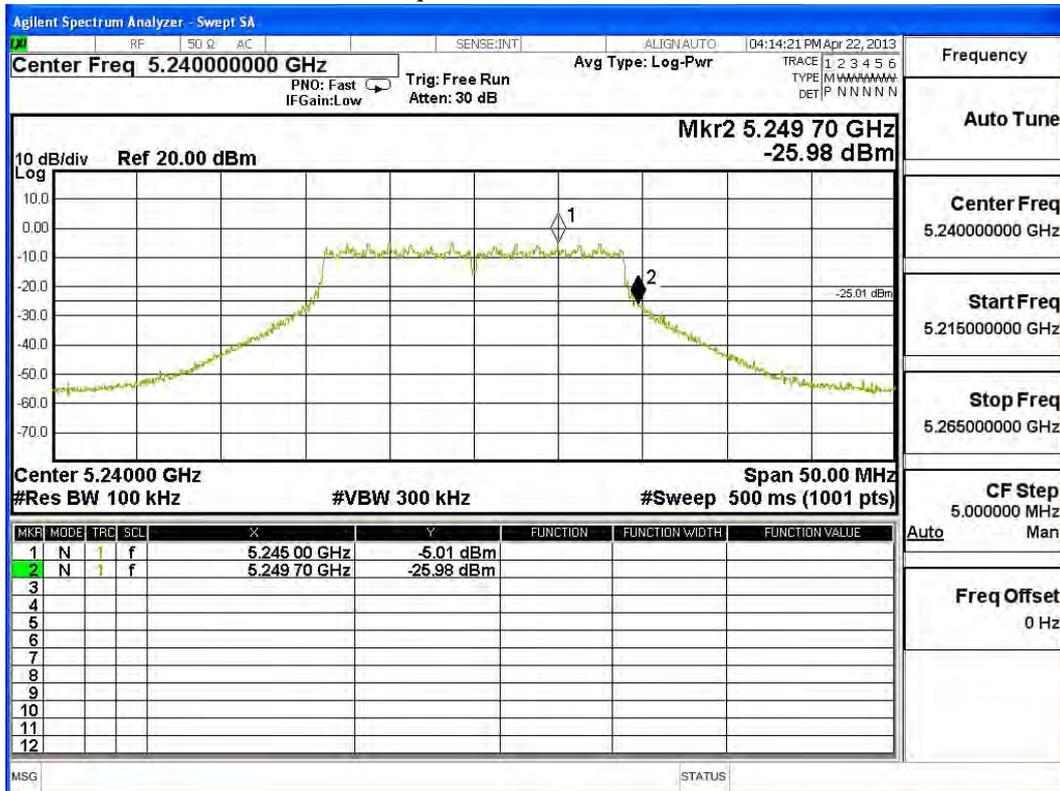

Product : WiFi AP
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) -Channel 38

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38 (Peak)	5150.000	3.340	59.702	63.042	74.00	54.00	Pass
38 (Peak)	5178.800	3.238	100.873	104.111	--	--	--
38 (Average)	5150.000	3.340	43.932	47.272	74.00	54.00	Pass
38 (Average)	5198.800	3.157	87.847	91.004	--	--	--

Figure Channel 38: Horizontal (Peak)


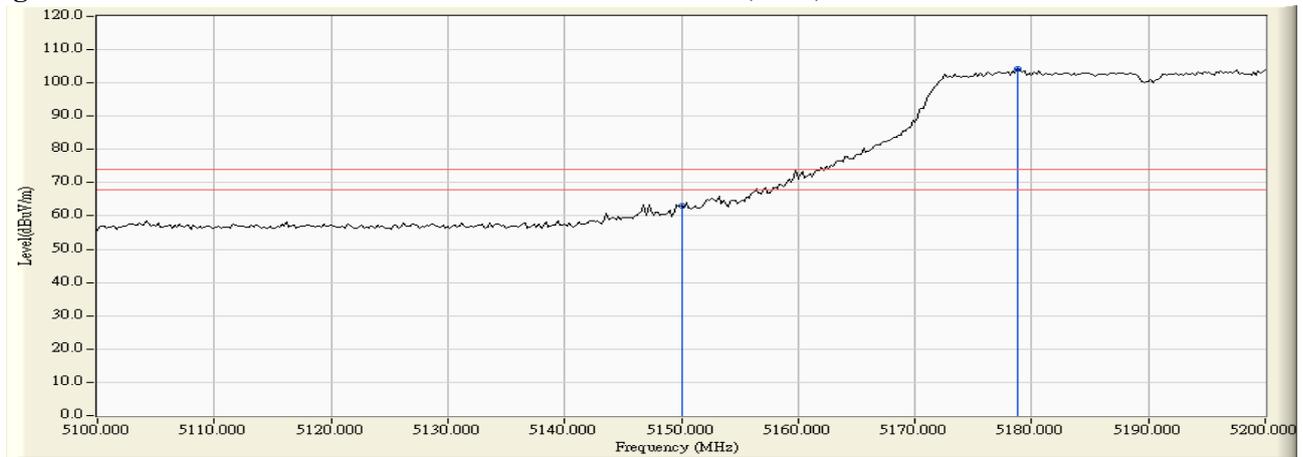


Figure Channel 38: Horizontal (Average)

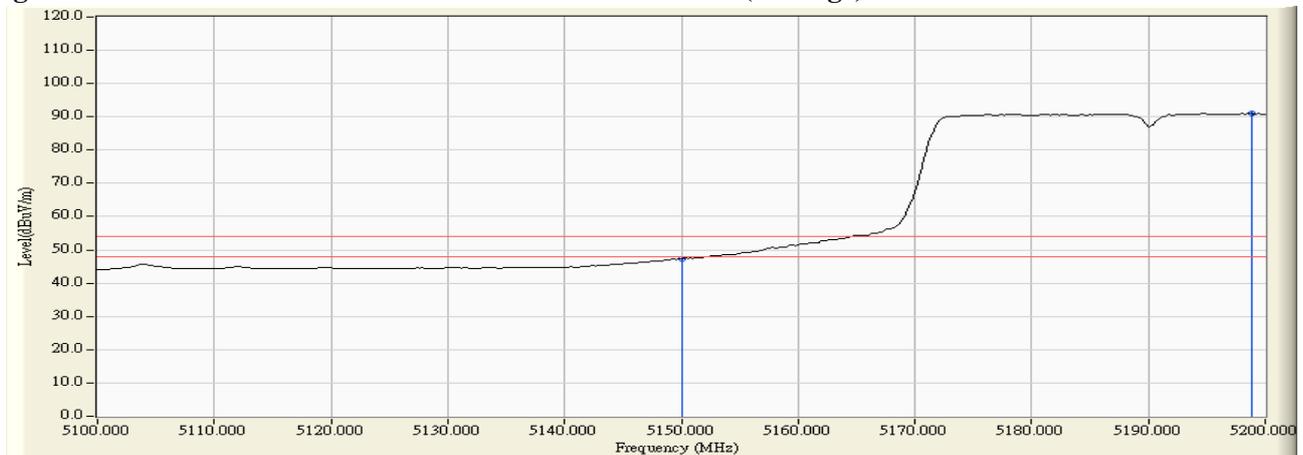

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WiFi AP
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-40BW 30Mbps) -Channel 38

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
38 (Peak)	5150.000	5.260	66.126	71.386	74.00	54.00	Pass
38 (Peak)	5188.000	5.363	102.612	107.975	--	--	--
38 (Average)	5150.000	5.260	46.317	51.577	74.00	54.00	Pass
38 (Average)	5187.400	5.362	89.435	94.797	--	--	--

Figure Channel 38: Vertical (Peak)


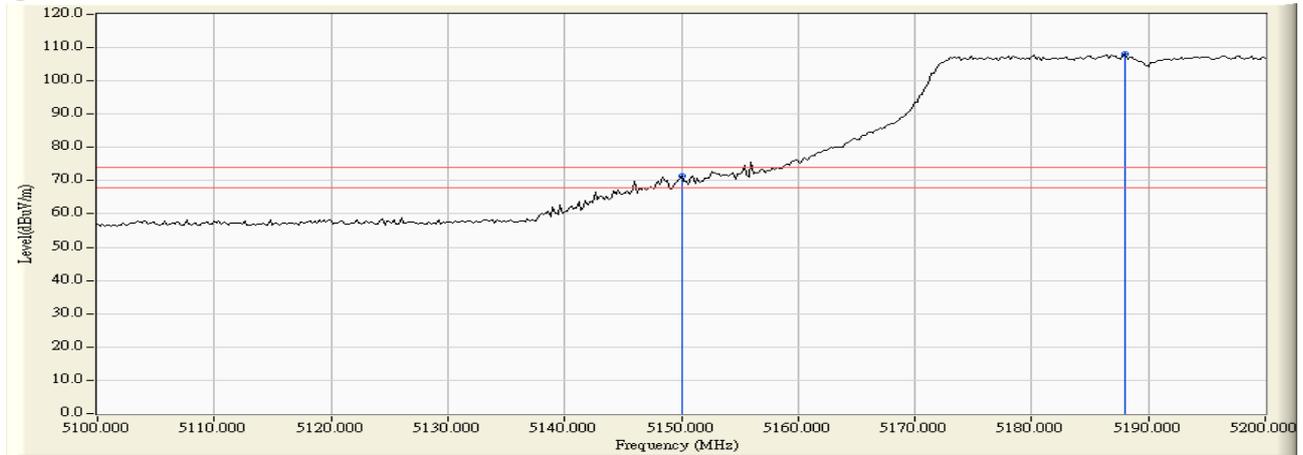


Figure Channel 38: Vertical (Average)

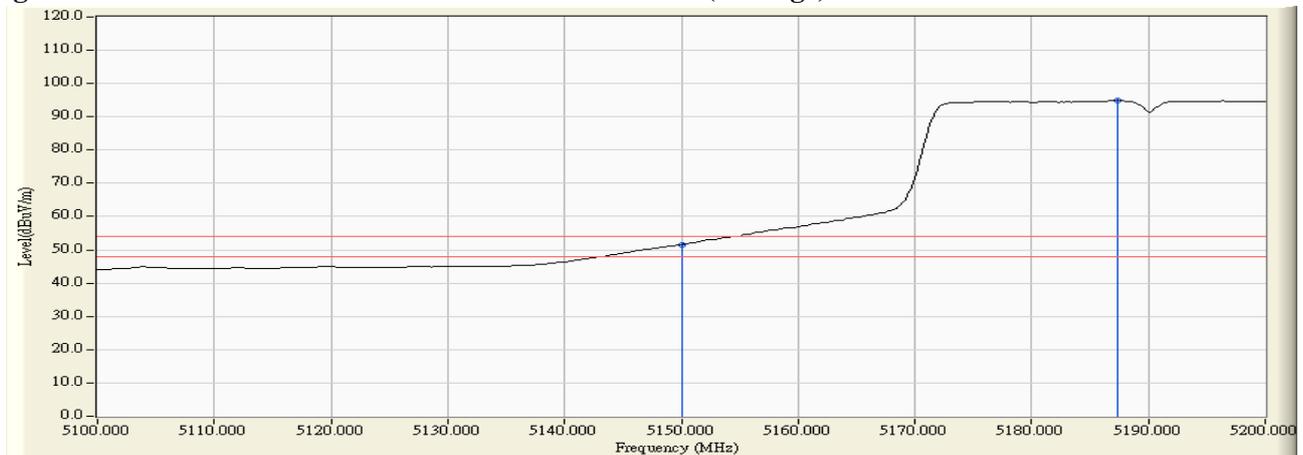

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WiFi AP
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps)-Channel 48

(Chain A)

Test Frequency (MHz)	Measurement Level (20dB BW) (MHz)	Limit (MHz)	Result
5230	5249.7	<5250	PASS

NOTE: Accordance with 15.215 requirement.

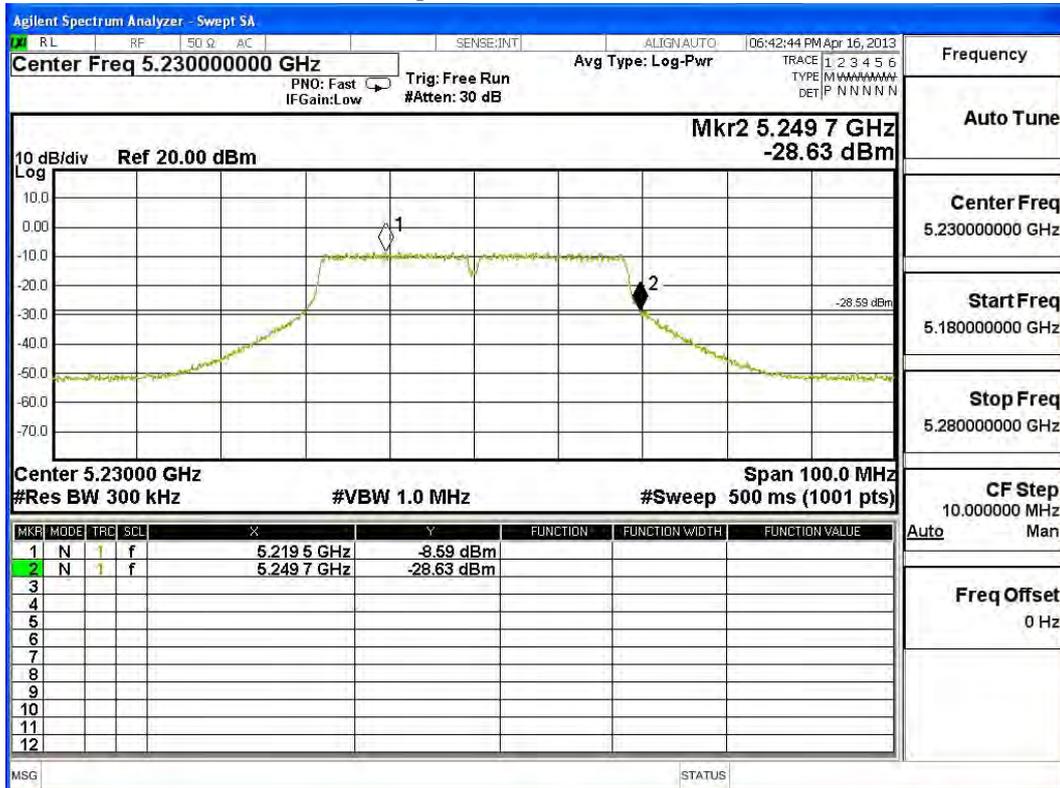


Product : WiFi AP
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11n-20BW 14.4Mbps)-Channel 48

(Chain B)

Test Frequency (MHz)	Measurement Level (20dB BW) (MHz)	Limit (MHz)	Result
5230	5249.9	<5250	PASS

NOTE: Accordance with 15.215 requirement.

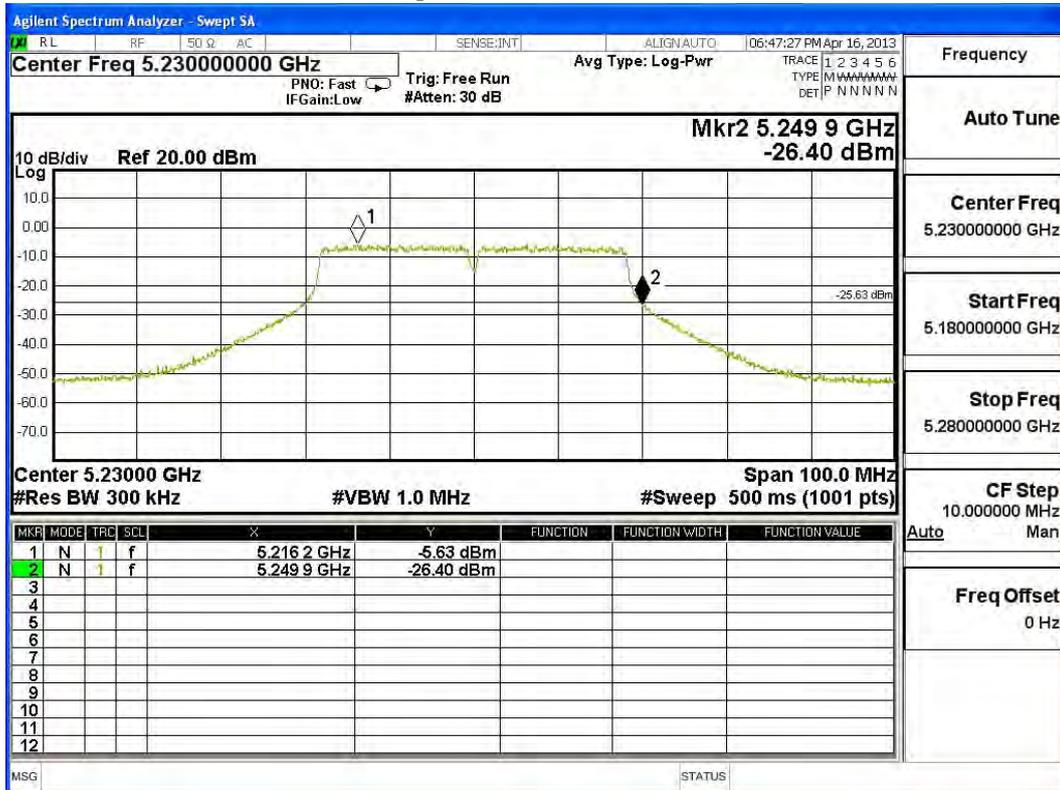

8. Frequency Stability


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2012
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2012
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

8.2. Test Setup

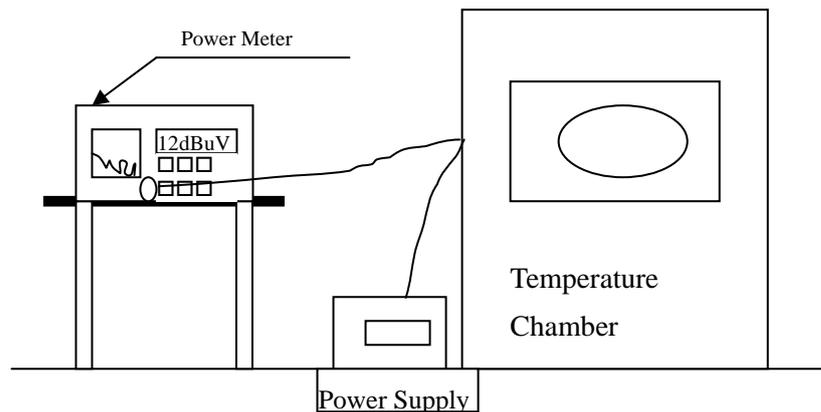

8.3. Limits

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified

8.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

8.5. Uncertainty

± 150 Hz

8.6. Test Result of Frequency Stability

Product : WiFi AP
 Test Item : Frequency Stability
 Test Site : Temperature Chamber
 Test Mode : Carrier Wave

Chain A

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) °C	Vnom (120)V	36	5180.0000	5180.0063	-0.0063
		38	5190.0000	5190.0088	-0.0088
		44	5220.0000	5220.0092	-0.0092
		46	5230.0000	5230.0081	-0.0081
		48	5240.0000	5240.0097	-0.0097
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50) °C	Vmax (138)V	36	5180.0000	5180.0053	-0.0053
		38	5190.0000	5190.0098	-0.0098
		44	5220.0000	5220.0091	-0.0091
		46	5230.0000	5230.0084	-0.0084
		48	5240.0000	5240.0099	-0.0099
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50) °C	Vmin (102)V	36	5180.0000	5180.0057	-0.0057
		38	5190.0000	5190.0100	-0.0100
		44	5220.0000	5220.0096	-0.0096
		46	5230.0000	5230.0083	-0.0083
		48	5240.0000	5240.0096	-0.0096
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmin (0) °C	Vmin (138)V	36	5180.0000	5180.0099	-0.0099
		38	5190.0000	5190.0084	-0.0084
		44	5220.0000	5220.0082	-0.0082
		46	5230.0000	5230.0102	-0.0102
		48	5240.0000	5240.0081	-0.0081
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmin (0) °C	Vmin (102)V	36	5180.0000	5180.0099	-0.0099
		38	5190.0000	5190.0084	-0.0084
		44	5220.0000	5220.0082	-0.0082
		46	5230.0000	5230.0102	-0.0102
		48	5240.0000	5240.0081	-0.0081

Chain B

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) °C	Vnom (120)V	36	5180.0000	5180.0067	-0.0067
		38	5190.0000	5190.0092	-0.0092
		44	5220.0000	5220.0096	-0.0096
		46	5230.0000	5230.0082	-0.0082
		48	5240.0000	5240.0102	-0.0102
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50) °C	Vmax (138)V	36	5180.0000	5180.0059	-0.0059
		38	5190.0000	5190.0101	-0.0101
		44	5220.0000	5220.0099	-0.0099
		46	5230.0000	5230.0089	-0.0089
		48	5240.0000	5240.0102	-0.0102
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmax (50) °C	Vmin (102)V	36	5180.0000	5180.0060	-0.0060
		38	5190.0000	5190.0105	-0.0105
		44	5220.0000	5220.0100	-0.0100
		46	5230.0000	5230.0085	-0.0085
		48	5240.0000	5240.0103	-0.0103
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmin (0) °C	Vmin (138)V	36	5180.0000	5180.0102	-0.0102
		38	5190.0000	5190.0088	-0.0088
		44	5220.0000	5220.0088	-0.0088
		46	5230.0000	5230.0106	-0.0106
		48	5240.0000	5240.0086	-0.0086
Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tmin (0) °C	Vmin (102)V	36	5180.0000	5180.0111	-0.0111
		38	5190.0000	5190.0098	-0.0098
		44	5220.0000	5220.0102	-0.0102
		46	5230.0000	5230.0099	-0.0099
		48	5240.0000	5240.0099	-0.0099

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.