
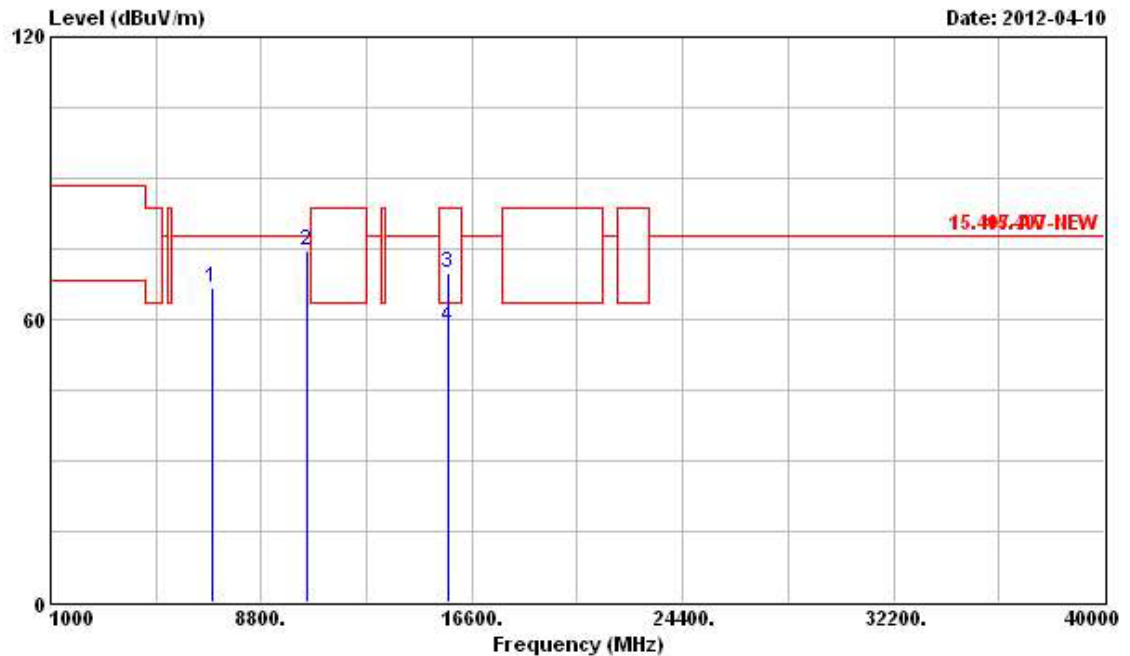


Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11a Ch. 48

Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6984.000	66.71	-11.13	77.84	60.25	35.89	5.59	35.02	Peak	---	---
2	10480.000	74.59	-3.25	77.84	64.60	38.29	6.82	35.12	Peak	---	---
3	15720.000	69.98	-13.56	83.54	55.83	40.89	8.46	35.20	Peak	---	---
4	15720.000	58.49	-5.05	63.54	44.34	40.89	8.46	35.20	Average	---	---

Vertical

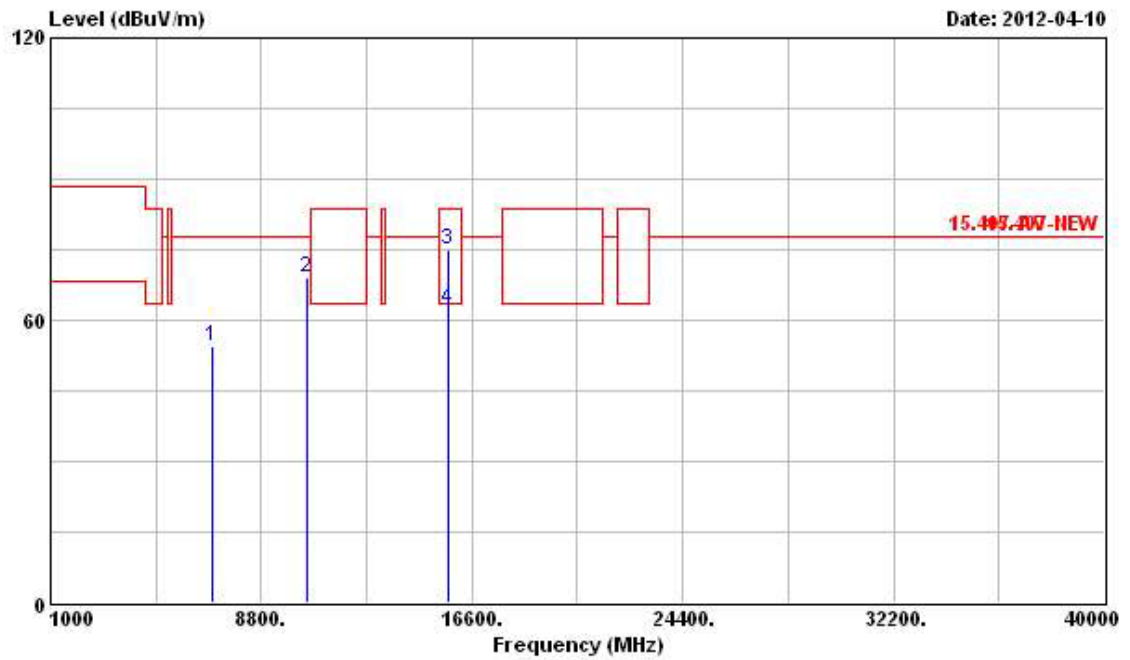

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6984.000	54.53	-23.31	77.84	48.07	35.89	5.59	35.02	Peak	---	---
2	10480.000	69.25	-8.59	77.84	59.26	38.29	6.82	35.12	Peak	---	---
3	15720.000	75.07	-8.47	83.54	60.92	40.89	8.46	35.20	Peak	---	---
4	15720.000	62.47	-1.07	63.54	48.32	40.89	8.46	35.20	Average	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11a Ch. 52

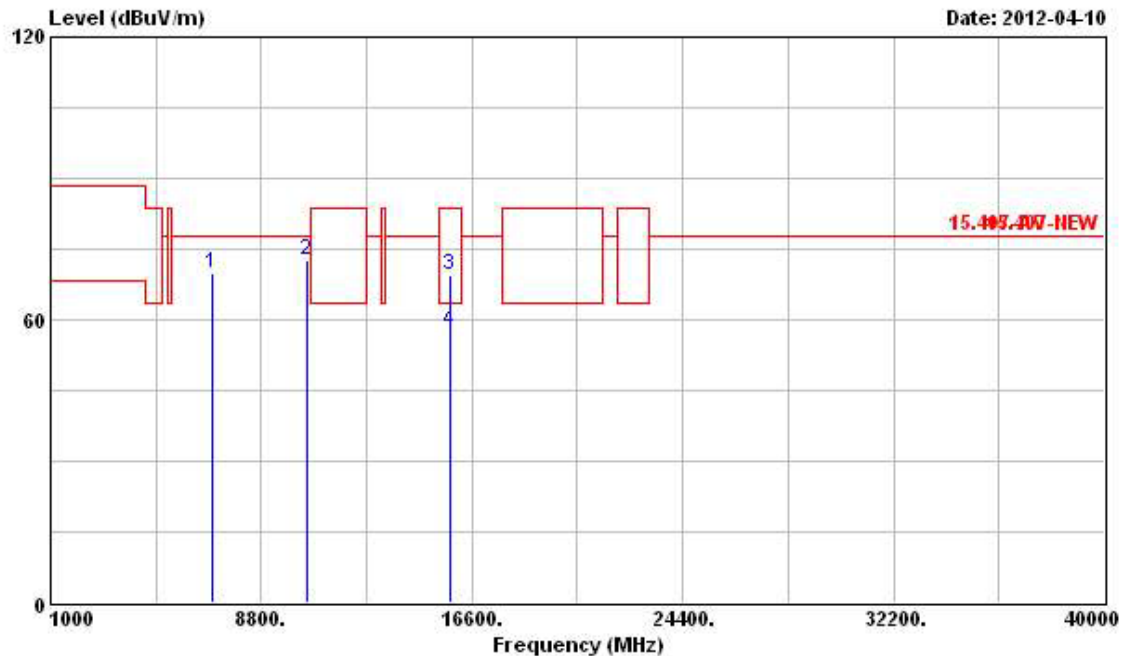Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6996.000	69.83	-8.01	77.84	63.35	35.90	5.60	35.02	Peak	---	---
2	10520.000	72.74	-5.10	77.84	62.68	38.31	6.85	35.10	Peak	---	---
3	15780.000	69.54	-14.00	83.54	55.45	40.91	8.46	35.28	Peak	---	---
4	15780.000	57.81	-5.73	63.54	43.72	40.91	8.46	35.28	Average	---	---

Vertical

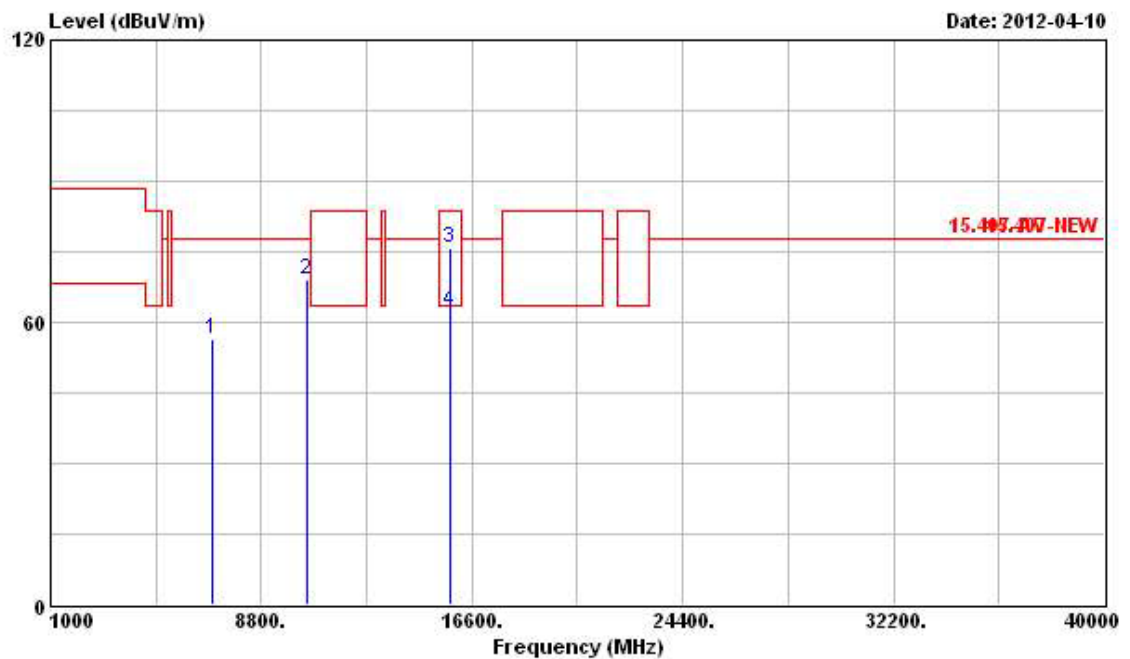
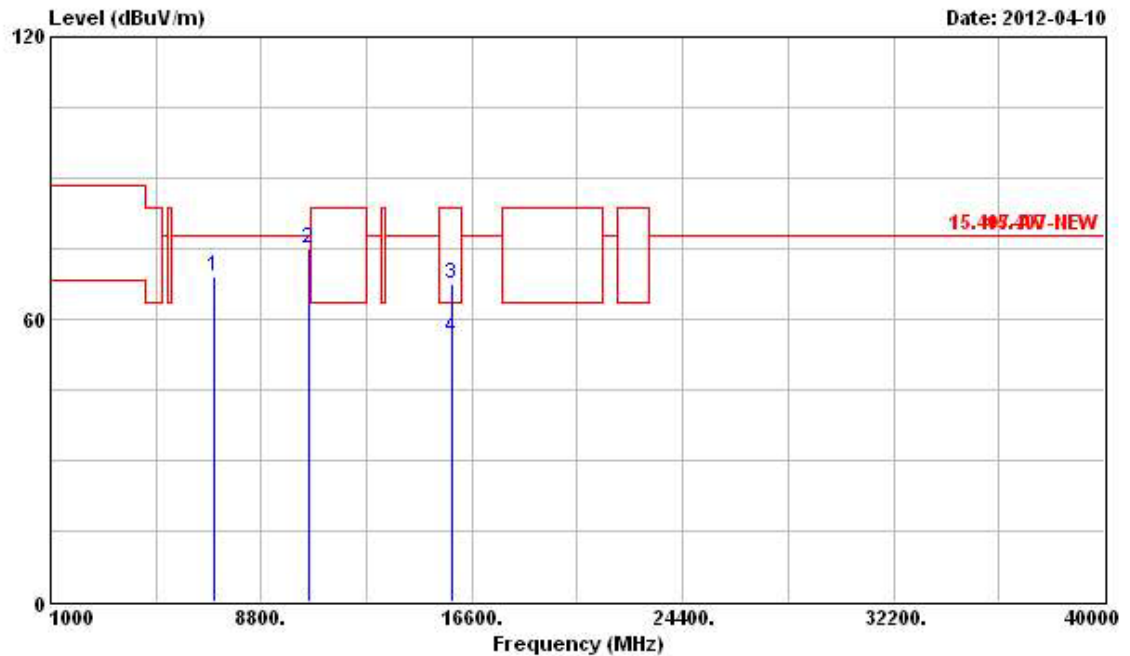


TABLE 24


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6996.000	56.43	-21.41	77.84	49.95	35.90	5.60	35.02	Peak	---	---
2	10520.000	69.04	-8.80	77.84	58.98	38.31	6.85	35.10	Peak	---	---
3	15780.000	75.70	-7.84	83.54	61.61	40.91	8.46	35.28	Peak	---	---
4	15780.000	62.40	-1.14	63.54	48.31	40.91	8.46	35.28	Average	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11a Ch. 56

Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7032.000	69.24	-8.60	77.84	62.78	35.89	5.60	35.03	Peak	---	---
2	10560.000	74.83	-3.01	77.84	64.68	38.33	6.88	35.06	Peak	---	---
3	15840.000	67.41	-16.13	83.54	53.34	40.94	8.46	35.33	Peak	---	---
4	15840.000	56.21	-7.33	63.54	42.14	40.94	8.46	35.33	Average	---	---

Vertical

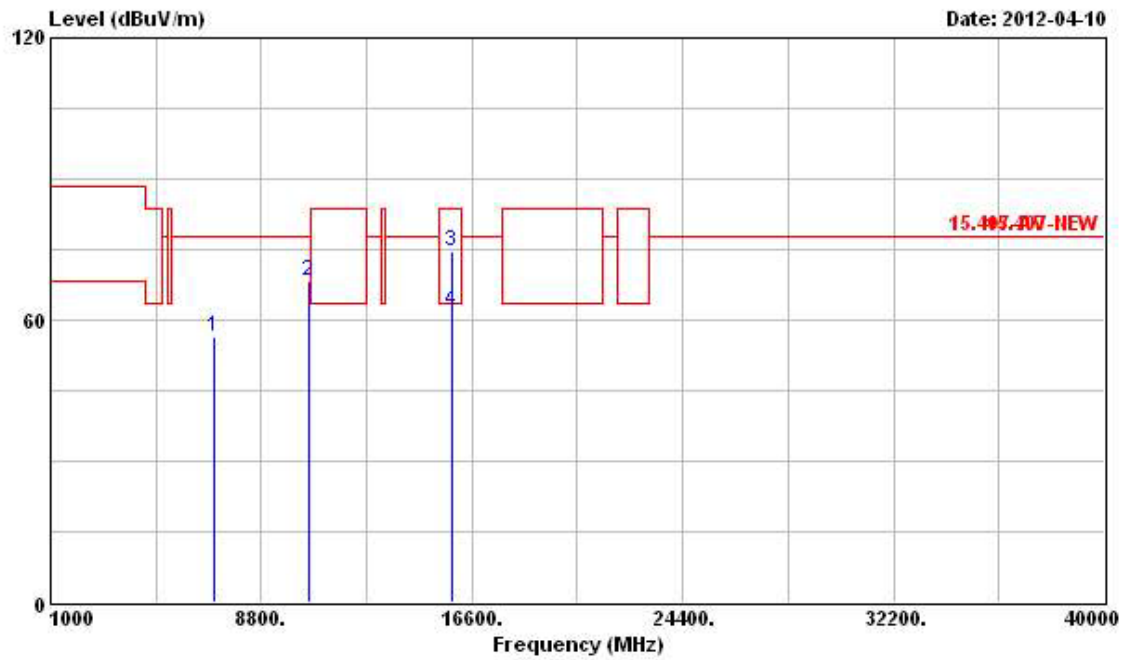


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7032.000	56.60	-21.24	77.84	50.14	35.89	5.60	35.03	Peak	---	---
2	10560.000	68.11	-9.73	77.84	57.96	38.33	6.88	35.06	Peak	---	---
3	15840.000	74.77	-8.77	83.54	60.70	40.94	8.46	35.33	Peak	---	---
4	15840.000	62.10	-1.44	63.54	48.03	40.94	8.46	35.33	Average	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11a Ch. 64

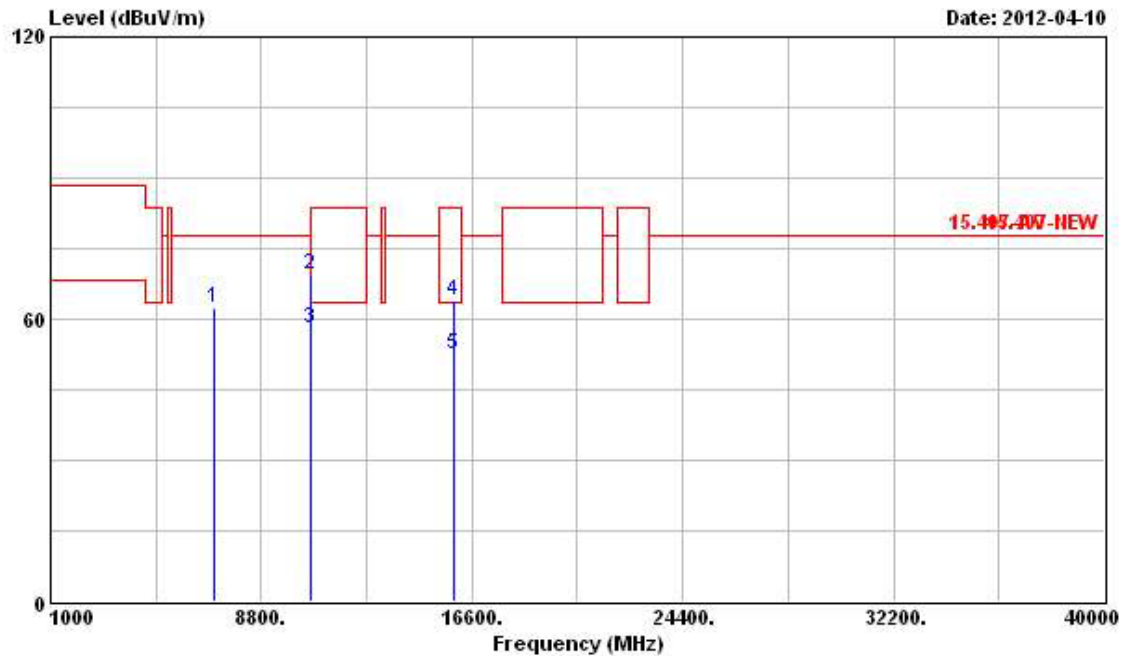Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7080.000	62.32	-15.52	77.84	55.87	35.88	5.61	35.04	Peak	---	---
2	10640.000	69.48	-14.06	83.54	59.17	38.38	6.93	35.00	Peak	---	---
3	10640.000	58.10	-5.44	63.54	47.79	38.38	6.93	35.00	Average	---	---
4	15960.000	64.04	-19.50	83.54	50.03	40.99	8.47	35.45	Peak	---	---
5	15960.000	52.32	-11.22	63.54	38.31	40.99	8.47	35.45	Average	---	---


Vertical

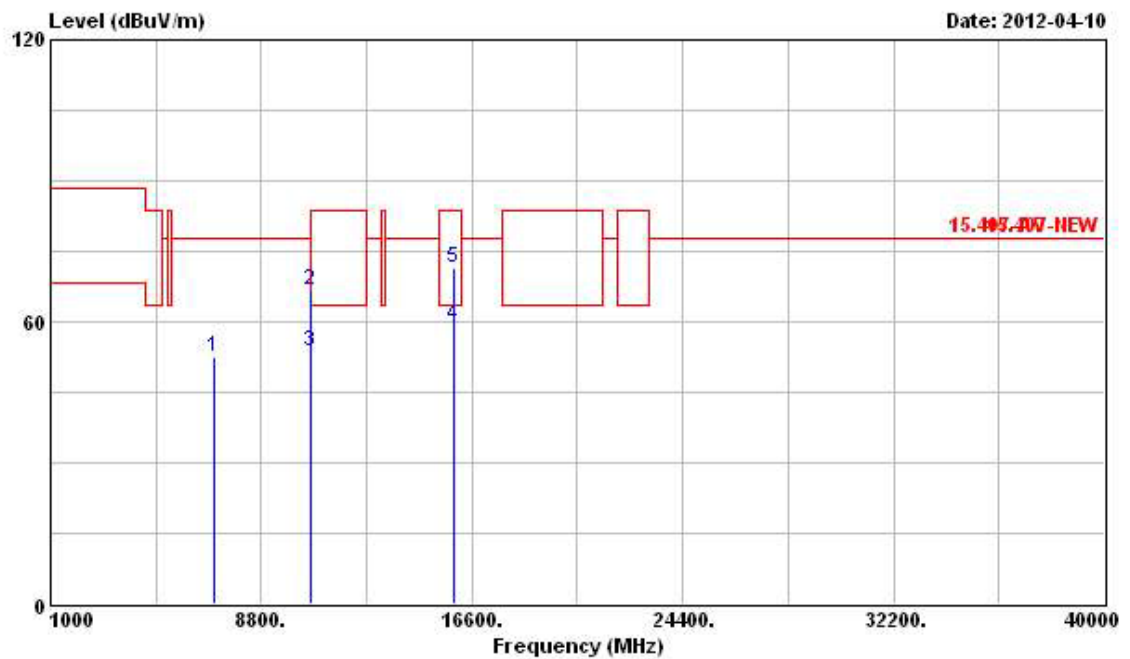

REMARK : 20


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7080.000	52.65	-25.19	77.84	46.20	35.88	5.61	35.04	Peak	---	---
2	10640.000	66.65	-16.89	83.54	56.34	38.38	6.93	35.00	Peak	---	---
3	10640.000	53.80	-9.74	63.54	43.49	38.38	6.93	35.00	Average	---	---
4	15960.000	59.25	-4.29	63.54	45.24	40.99	8.47	35.45	Average	---	---
5	15960.000	71.30	-12.24	83.54	57.29	40.99	8.47	35.45	Peak	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11a Ch. 100

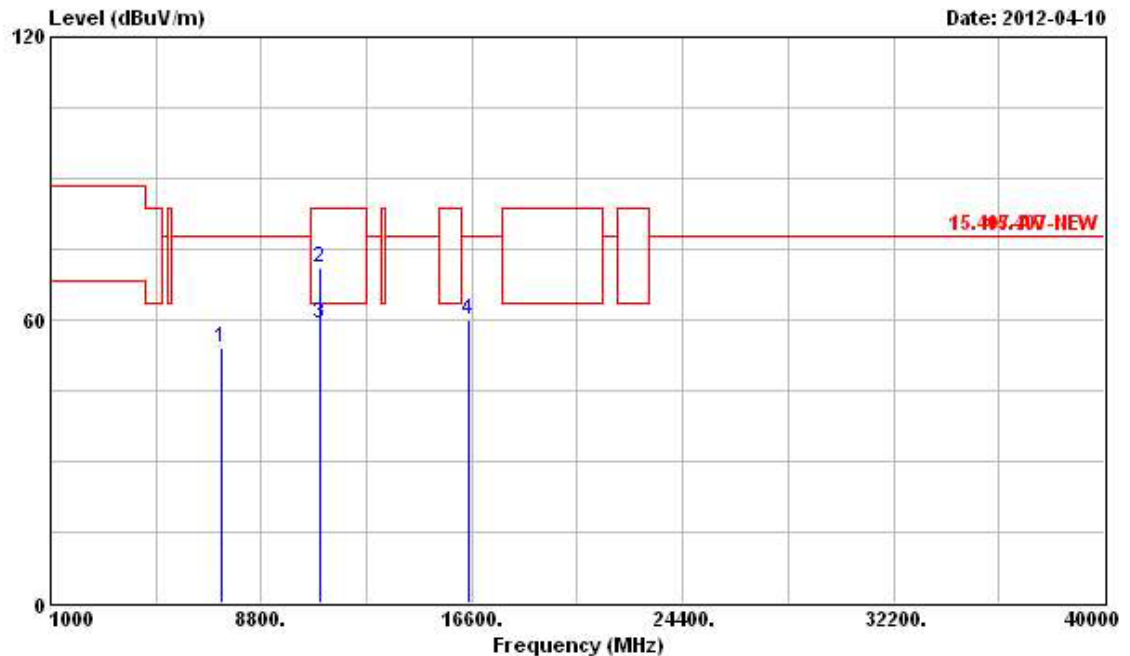Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7320.000	54.14	-23.70	77.84	47.77	35.83	5.64	35.10	PK	---	---
2	11000.000	71.07	-12.47	83.54	60.02	38.60	7.17	34.72	Peak	---	---
3	11000.000	59.29	-4.25	63.54	48.24	38.60	7.17	34.72	Average	---	---
4	16500.000	59.84	-18.00	77.84	44.59	42.00	8.24	34.99	Peak	---	---

Vertical

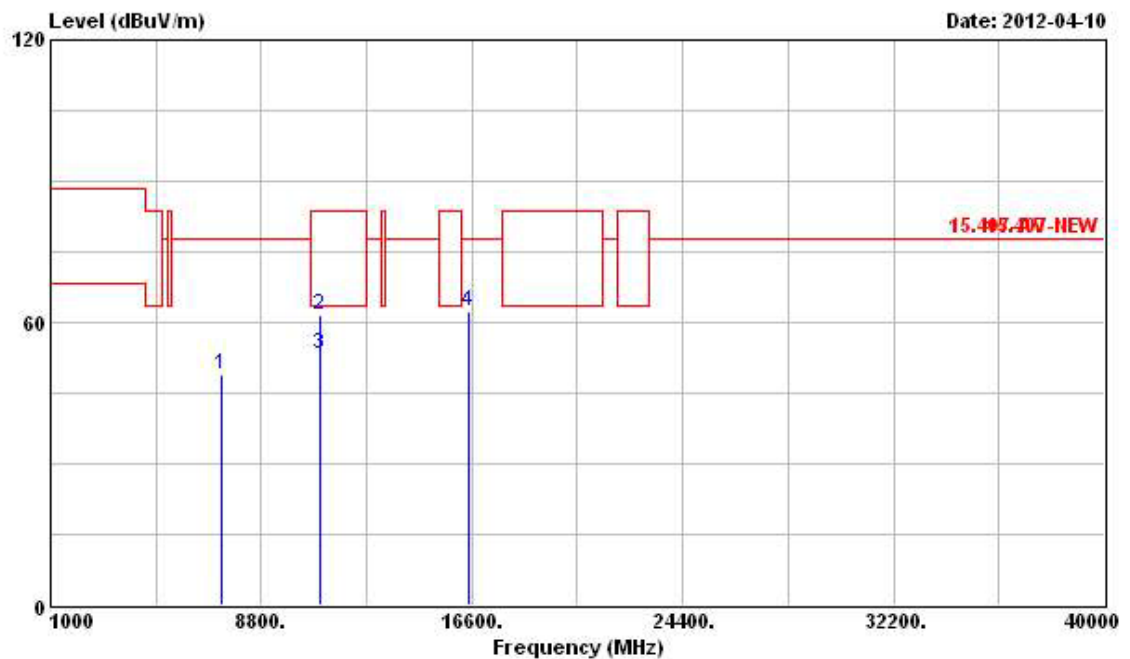


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7320.000	48.99	-28.85	77.84	42.62	35.83	5.64	35.10	PK	---	---
2	11000.000	61.66	-21.88	83.54	50.61	38.60	7.17	34.72	Peak	---	---
3	11000.000	53.12	-10.42	63.54	42.07	38.60	7.17	34.72	Average	---	---
4	16500.000	62.24	-15.60	77.84	46.99	42.00	8.24	34.99	Peak	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11a Ch. 116

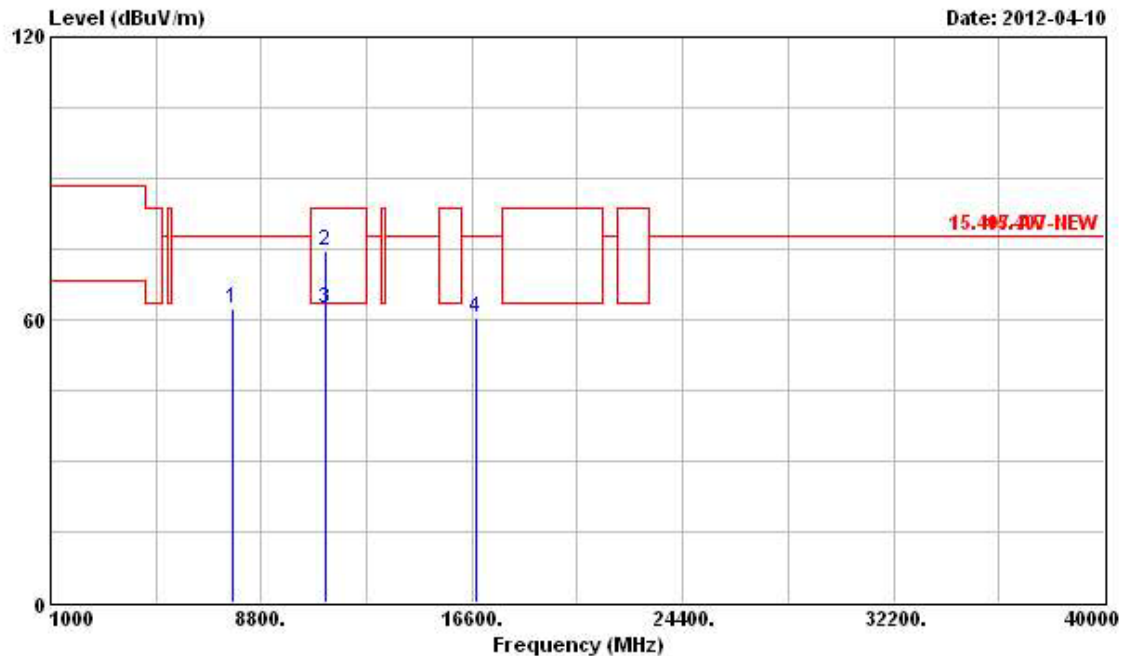Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7761.000	62.28	-15.56	77.84	55.91	35.85	5.73	35.21	Peak	---	---
2	11160.000	74.69	-8.85	83.54	63.75	38.70	6.96	34.72	Peak	---	---
3	11160.000	62.53	-1.01	63.54	51.59	38.70	6.96	34.72	Average	---	---
4	16740.000	60.24	-17.60	77.84	44.42	41.86	8.47	34.51	Peak	---	---

Vertical

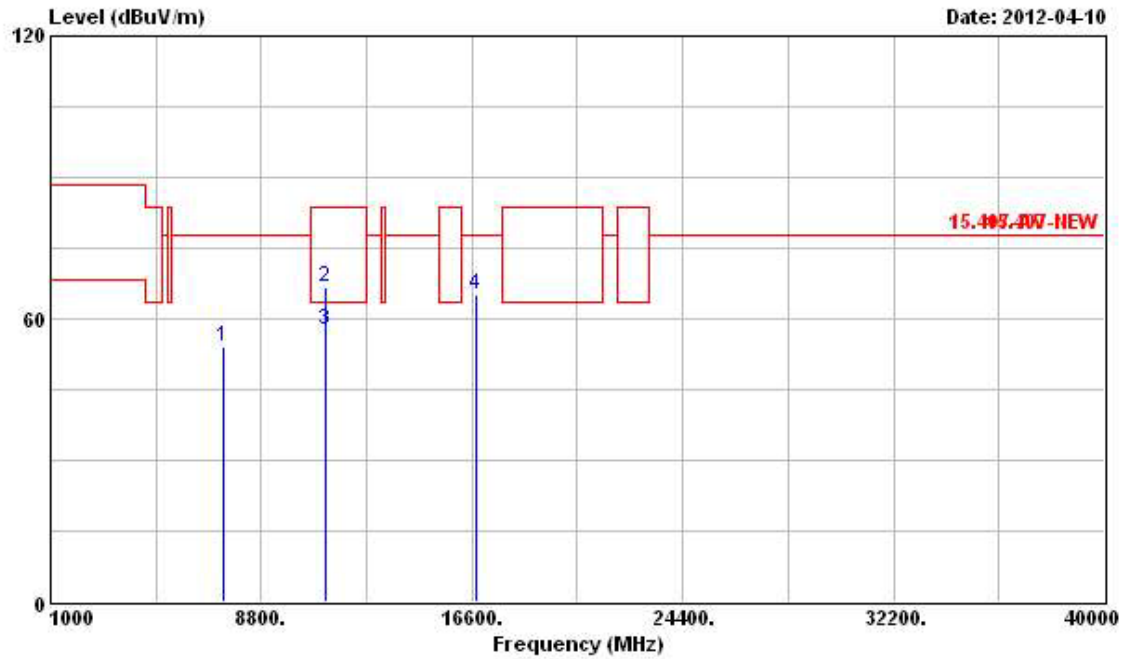


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7428.000	54.11	-23.73	77.84	47.78	35.81	5.65	35.13	PK	---	---
2	11160.000	66.65	-16.89	83.54	55.71	38.70	6.96	34.72	Peak	---	---
3	11160.000	57.50	-6.04	63.54	46.56	38.70	6.96	34.72	Average	---	---
4	16740.000	65.28	-12.56	77.84	49.46	41.86	8.47	34.51	Peak	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11a Ch. 140

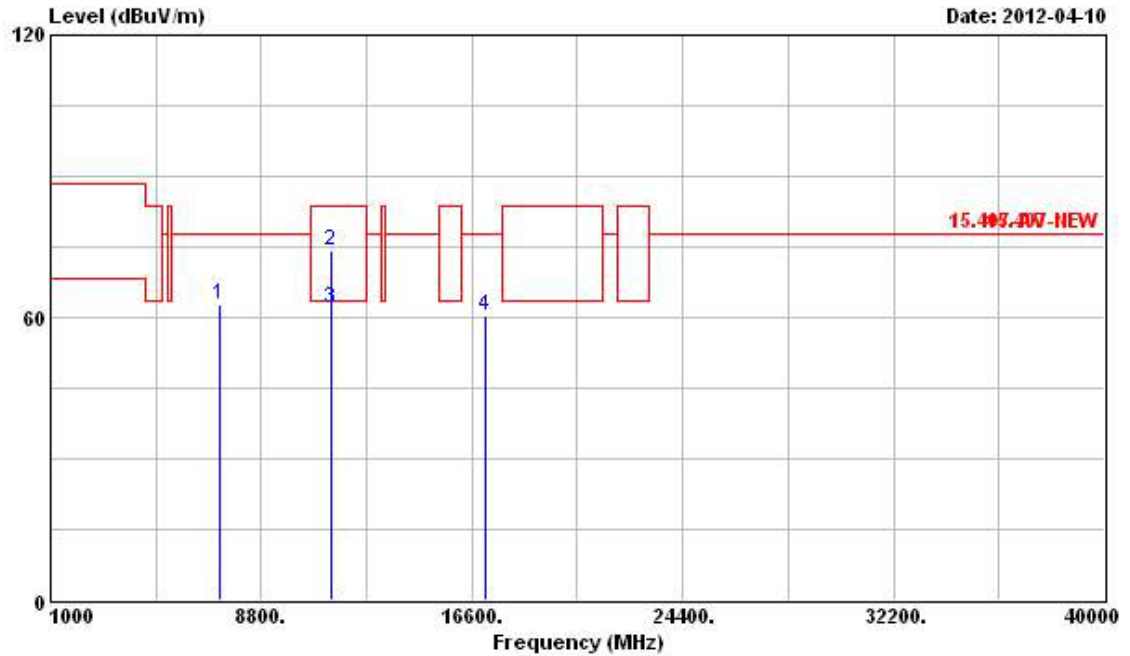Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7249.000	62.66	-15.18	77.84	56.26	35.85	5.63	35.08	Peak	---	---
2	11400.000	74.03	-9.51	83.54	63.20	38.84	6.71	34.72	Peak	---	---
3	11400.000	61.92	-1.62	63.54	51.09	38.84	6.71	34.72	Average	---	---
4	17100.000	60.42	-17.42	77.84	44.13	41.66	8.61	33.98	Peak	---	---

Vertical

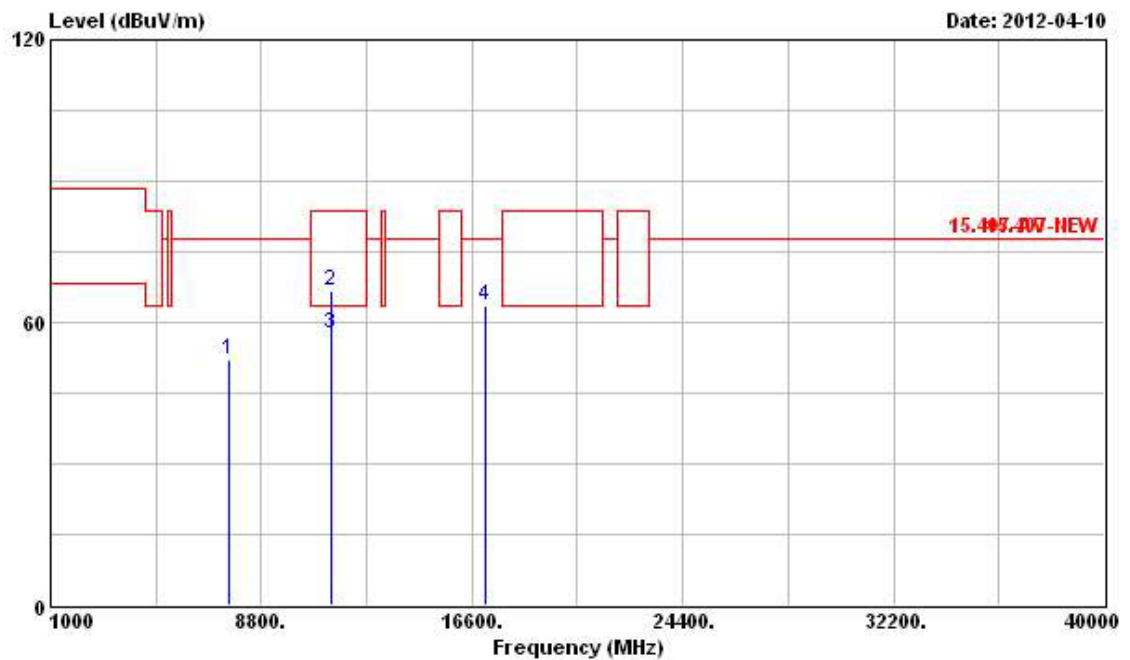


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7572.000	52.14	-25.70	77.84	45.81	35.82	5.68	35.17	PK	---	---
2	11400.000	66.86	-16.68	83.54	56.03	38.84	6.71	34.72	Peak	---	---
3	11400.000	57.82	-5.72	63.54	46.99	38.84	6.71	34.72	Average	---	---
4	17100.000	63.58	-14.26	77.84	47.29	41.66	8.61	33.98	Peak	---	---

For Two Chains:


Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11n Ch. 36 (20MHz)

Horizontal

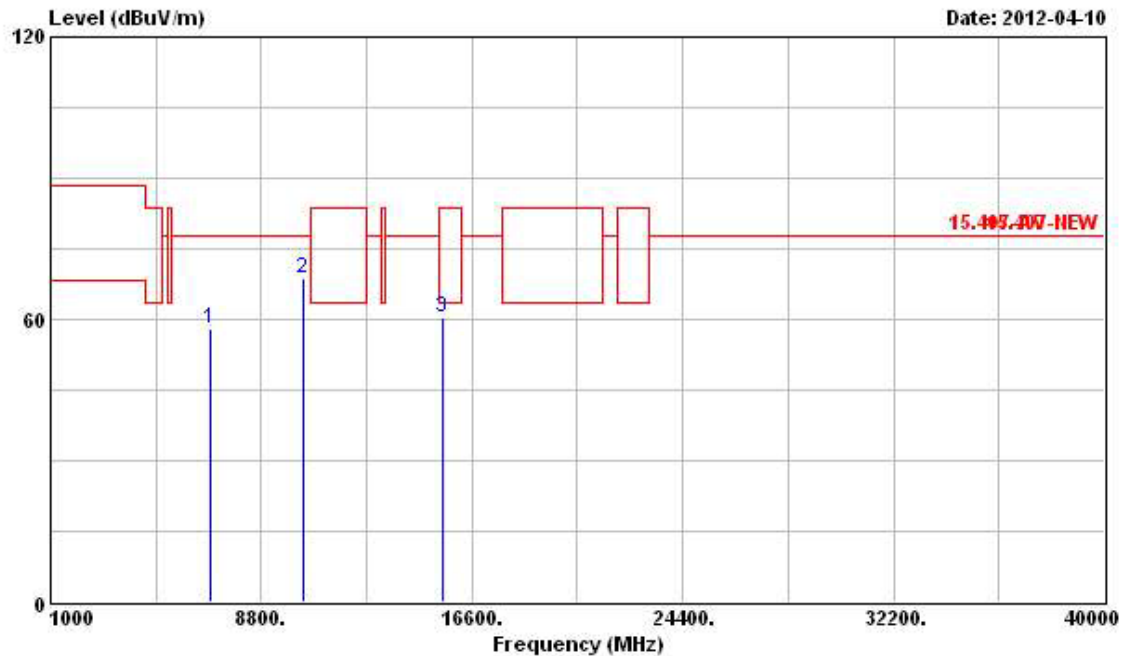


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6888.000	58.16	-19.68	77.84	51.73	35.85	5.57	34.99	Peak	---	---
2	10360.000	68.70	-9.14	77.84	58.99	38.22	6.71	35.22	Peak	---	---
3	15540.000	60.52	-3.02	63.54	46.29	40.81	8.45	35.03	PK	---	---

Vertical

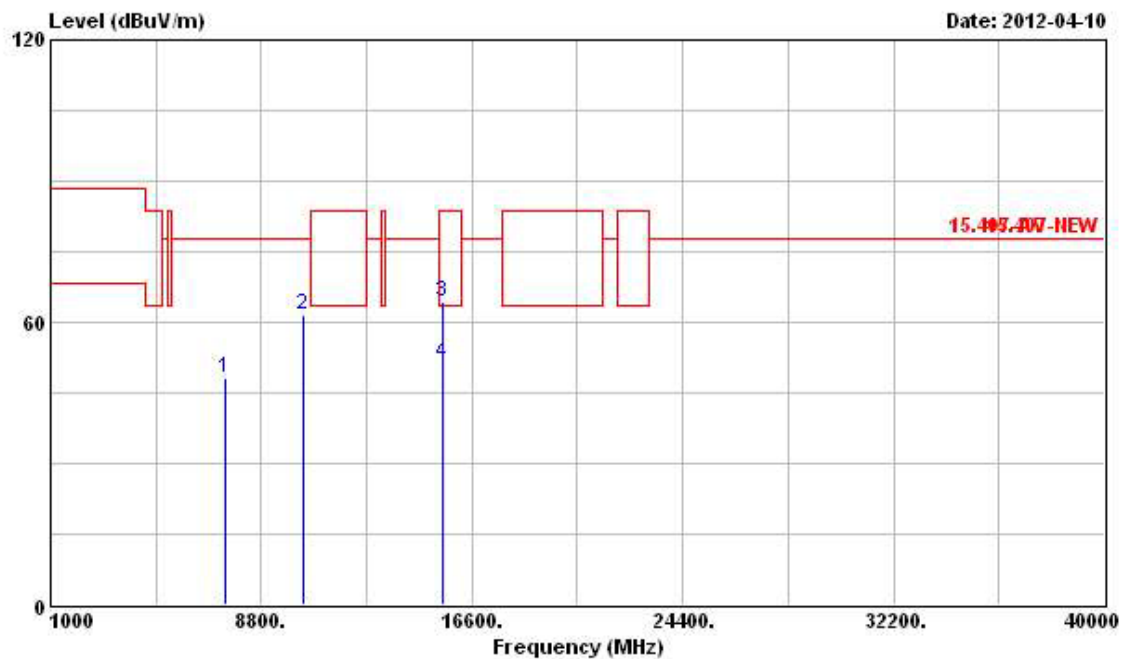


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7476.000	48.10	-29.74	77.84	41.78	35.80	5.66	35.14	PK	---	---
2	10360.000	61.49	-16.35	77.84	51.78	38.22	6.71	35.22	Peak	---	---
3	15540.000	64.40	-19.14	83.54	50.17	40.81	8.45	35.03	Peak	---	---
4	15540.000	51.32	-12.22	63.54	37.09	40.81	8.45	35.03	Average	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11n Ch. 40 (20 MHz)

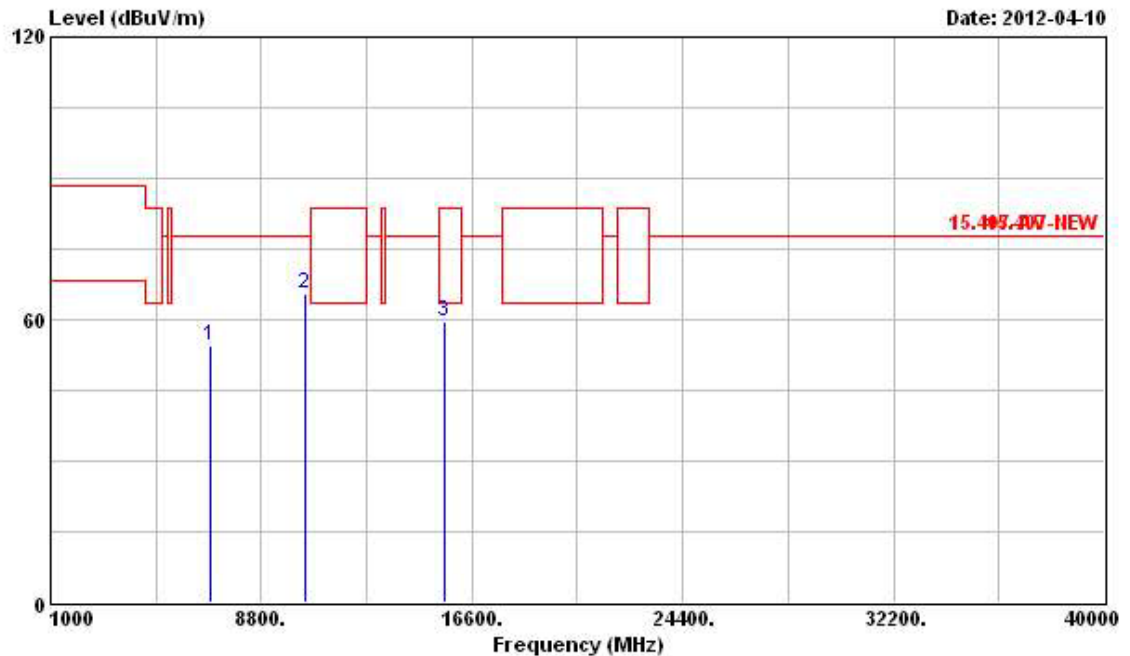Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6900.000	54.64	-23.20	77.84	48.20	35.86	5.57	34.99	Peak	---	---
2	10400.000	65.58	-12.26	77.84	55.77	38.24	6.75	35.18	Peak	---	---
3	15600.000	59.63	-3.91	63.54	45.44	40.84	8.45	35.10	PK	---	---

Vertical

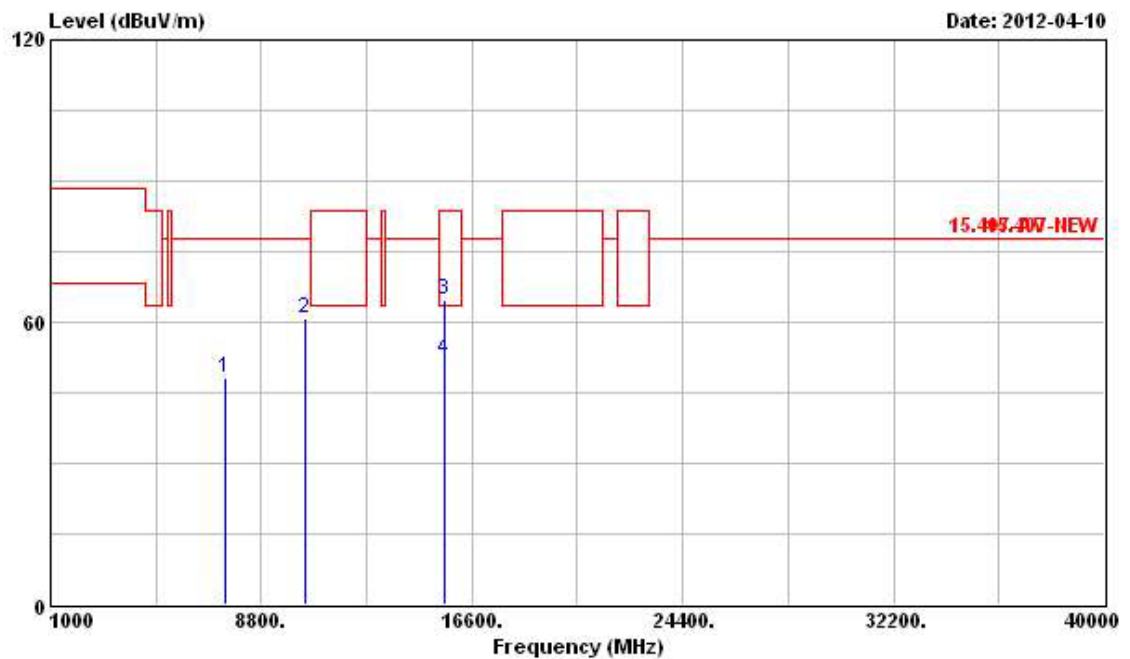


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7464.000	48.16	-29.68	77.84	41.83	35.81	5.66	35.14	PK	---	---
2	10400.000	60.89	-16.95	77.84	51.08	38.24	6.75	35.18	Peak	---	---
3	15600.000	64.64	-18.90	83.54	50.45	40.84	8.45	35.10	Peak	---	---
4	15600.000	52.15	-11.39	63.54	37.96	40.84	8.45	35.10	Average	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11n Ch. 48 (20 MHz)

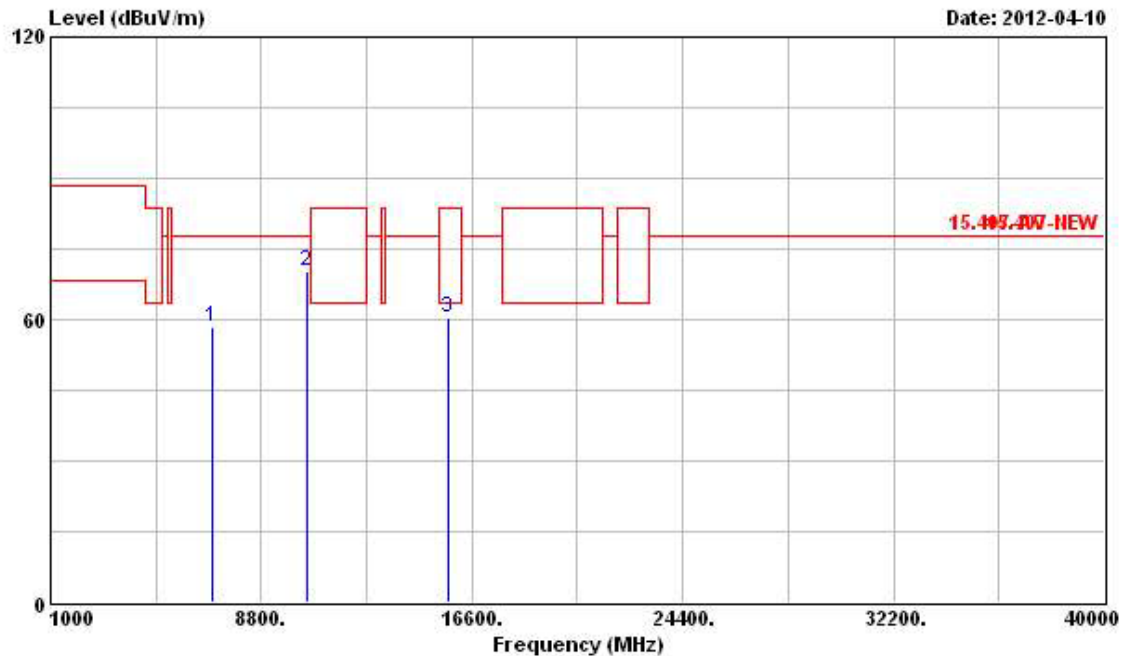Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6984.000	58.24	-19.60	77.84	51.78	35.89	5.59	35.02	Peak	---	---
2	10480.000	70.10	-7.74	77.84	60.11	38.29	6.82	35.12	Peak	---	---
3	15720.000	60.41	-3.13	63.54	46.26	40.89	8.46	35.20	PK	---	---

Vertical

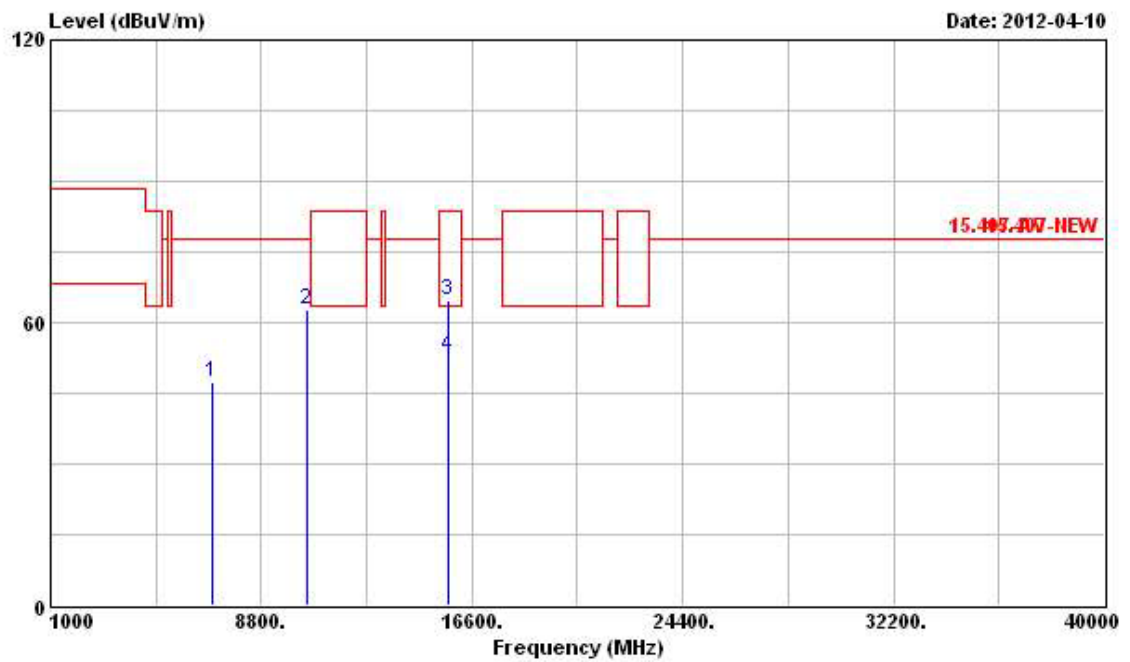


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6984.000	47.34	-30.50	77.84	40.88	35.89	5.59	35.02	Peak	---	---
2	10480.000	62.61	-15.23	77.84	52.62	38.29	6.82	35.12	Peak	---	---
3	15720.000	64.54	-19.00	83.54	50.39	40.89	8.46	35.20	Peak	---	---
4	15720.000	52.87	-10.67	63.54	38.72	40.89	8.46	35.20	Average	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11n Ch. 52 (20MHz)

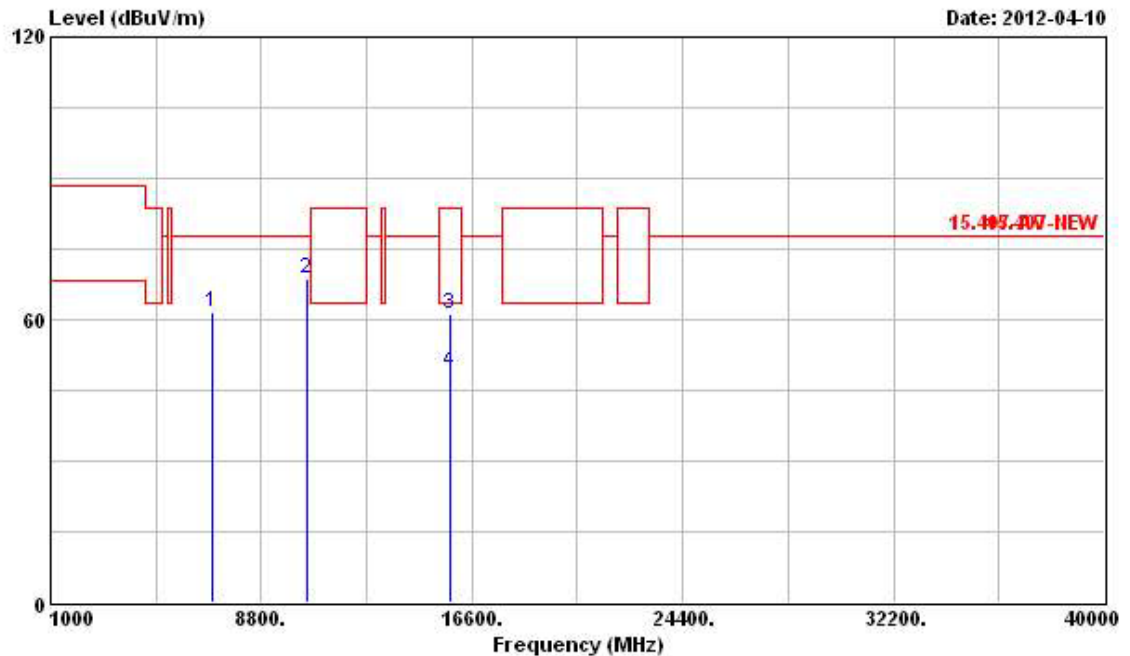Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6996.000	61.73	-16.11	77.84	55.25	35.90	5.60	35.02	Peak	---	---
2	10520.000	68.77	-9.07	77.84	58.71	38.31	6.85	35.10	Peak	---	---
3	15780.000	61.12	-22.42	83.54	47.03	40.91	8.46	35.28	Peak	---	---
4	15780.000	48.80	-14.74	63.54	34.71	40.91	8.46	35.28	Average	---	---

Vertical

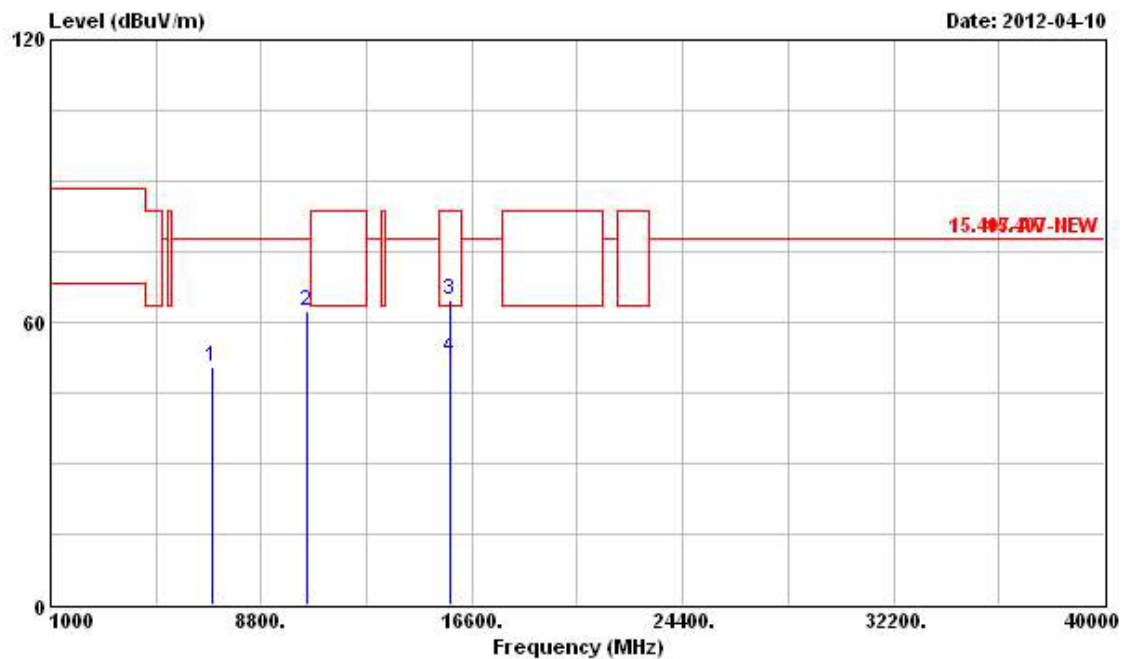


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	6996.000	50.49	-27.35	77.84	44.01	35.90	5.60	35.02	Peak	---	---
2	10520.000	62.18	-15.66	77.84	52.12	38.31	6.85	35.10	Peak	---	---
3	15780.000	64.58	-18.96	83.54	50.49	40.91	8.46	35.28	Peak	---	---
4	15780.000	52.51	-11.03	63.54	38.42	40.91	8.46	35.28	Average	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11n Ch. 56 (20 MHz)

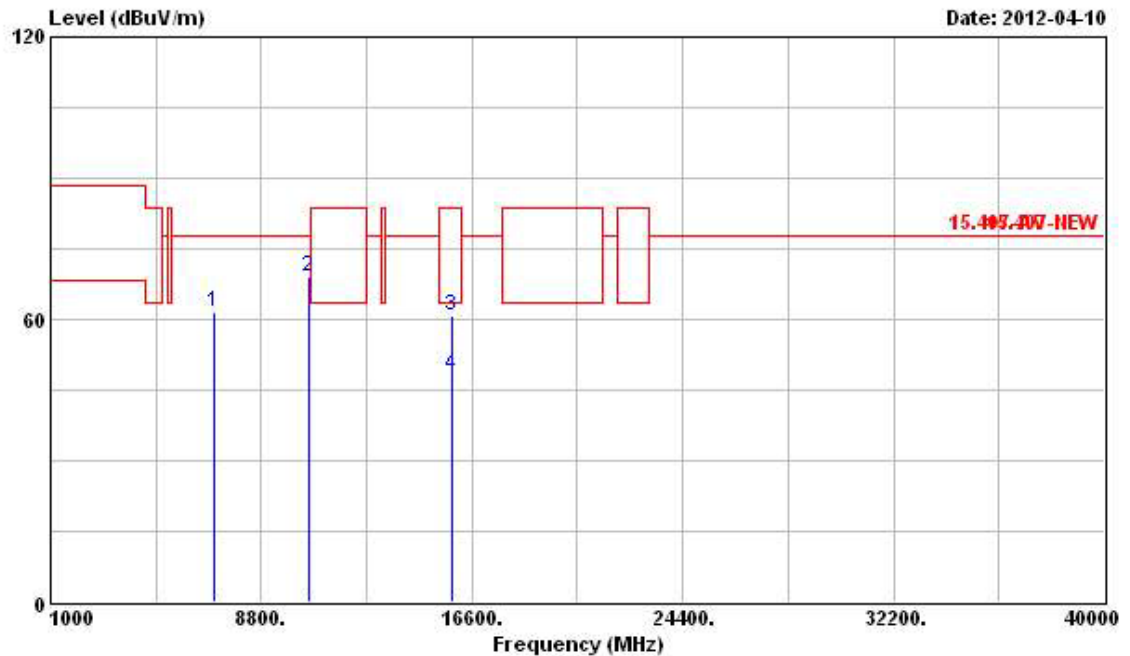Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7032.000	61.47	-16.37	77.84	55.01	35.89	5.60	35.03	Peak	---	---
2	10560.000	69.18	-8.66	77.84	59.03	38.33	6.88	35.06	Peak	---	---
3	15840.000	60.89	-22.65	83.54	46.82	40.94	8.46	35.33	Peak	---	---
4	15840.000	48.14	-15.40	63.54	34.07	40.94	8.46	35.33	Average	---	---

Vertical

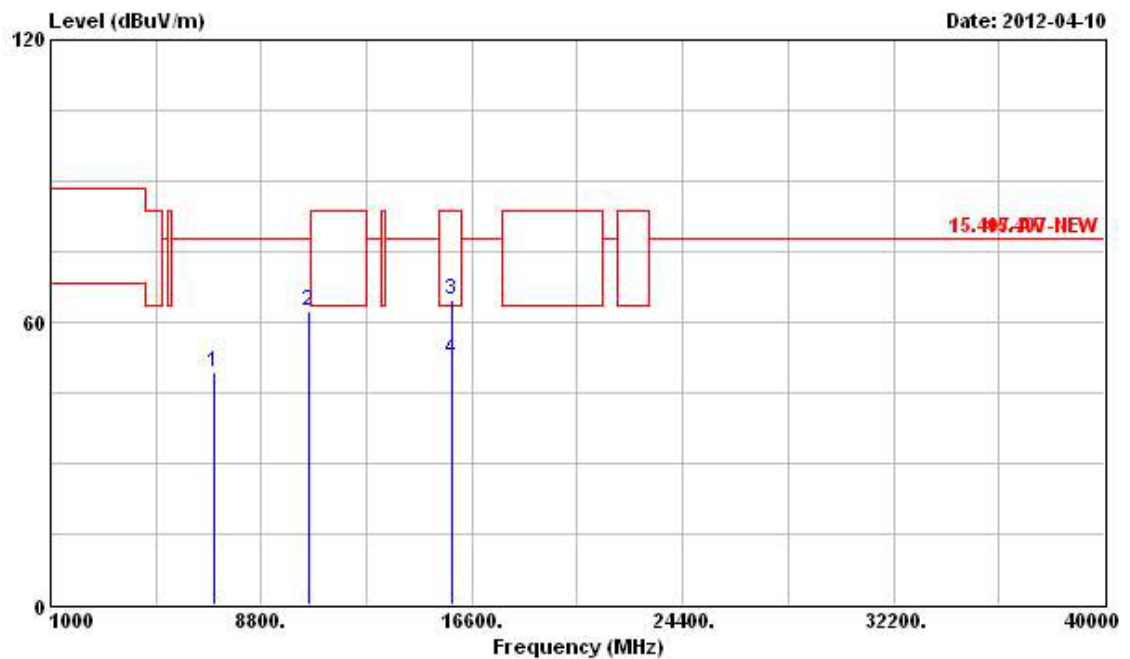


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7032.000	49.46	-28.38	77.84	43.00	35.89	5.60	35.03	Peak	---	---
2	10560.000	62.20	-15.64	77.84	52.05	38.33	6.88	35.06	Peak	---	---
3	15840.000	64.88	-18.66	83.54	50.81	40.94	8.46	35.33	Peak	---	---
4	15840.000	52.24	-11.30	63.54	38.17	40.94	8.46	35.33	Average	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11n Ch. 64 (20 MHz)

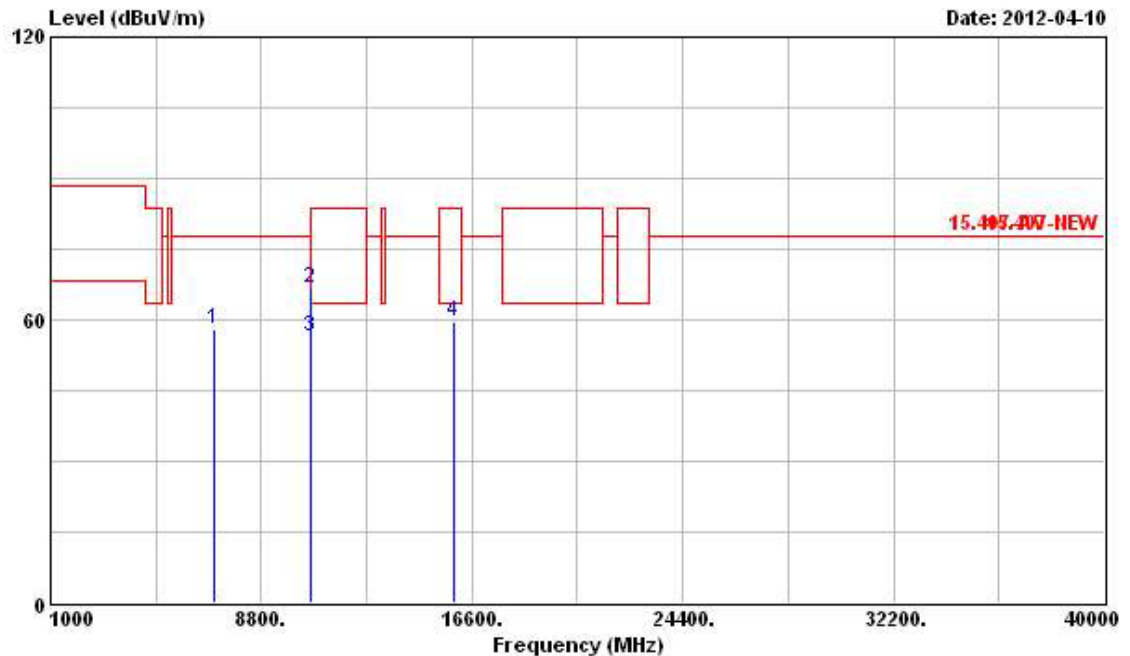Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7080.000	58.19	-19.65	77.84	51.74	35.88	5.61	35.04	Peak	---	---
2	10640.000	66.52	-17.02	83.54	56.21	38.38	6.93	35.00	Peak	---	---
3	10640.000	56.49	-7.05	63.54	46.18	38.38	6.93	35.00	Average	---	---
4	15960.000	59.42	-4.12	63.54	45.41	40.99	8.47	35.45	PK	---	---

Vertical

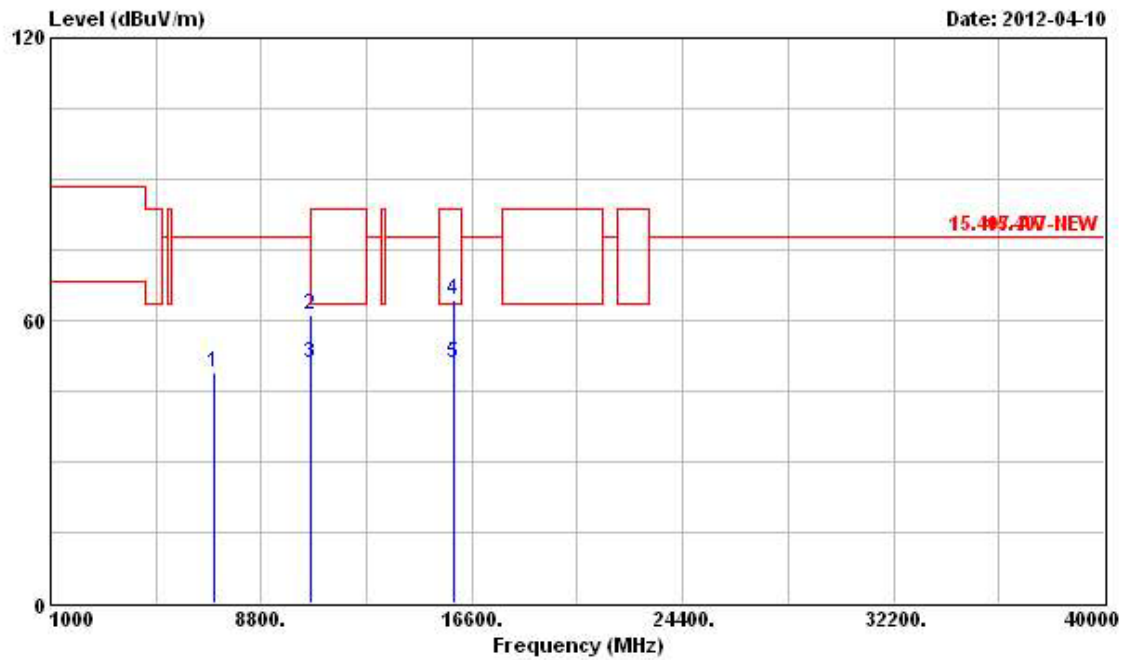


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7080.000	48.82	-29.02	77.84	42.37	35.88	5.61	35.04	Peak	---	---
2	10640.000	61.15	-22.39	83.54	50.84	38.38	6.93	35.00	Peak	---	---
3	10640.000	50.73	-12.81	63.54	40.42	38.38	6.93	35.00	Average	---	---
4	15960.000	64.16	-19.38	83.54	50.15	40.99	8.47	35.45	Peak	---	---
5	15960.000	50.98	-12.56	63.54	36.97	40.99	8.47	35.45	Average	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11n Ch. 100 (20MHz)

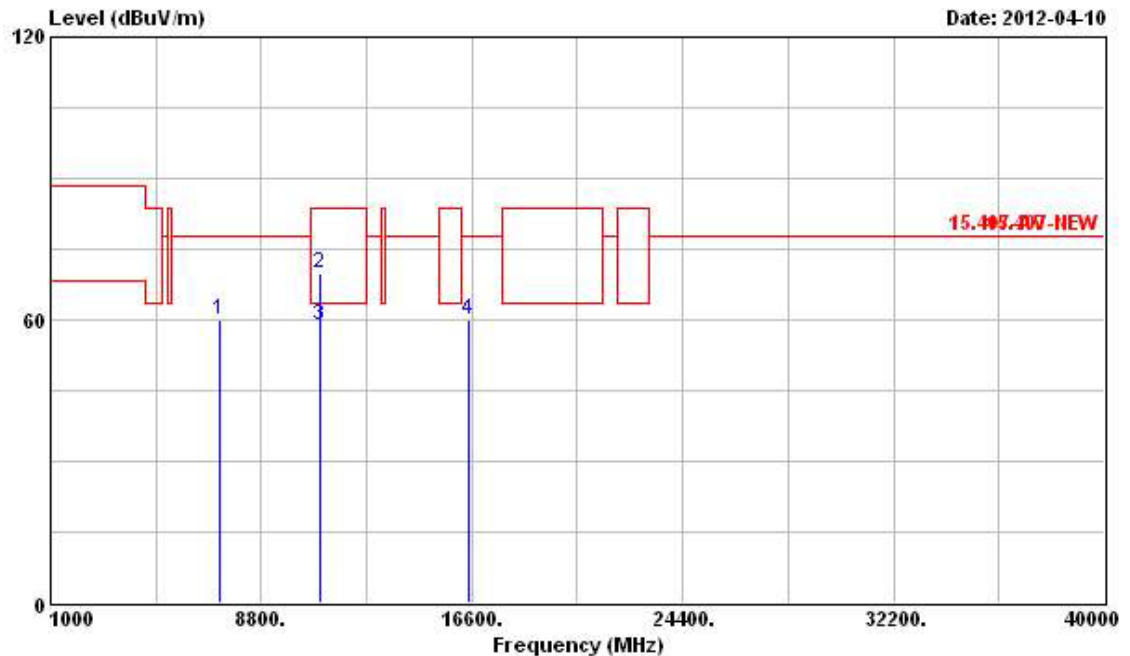Horizontal


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7244.000	60.03	-17.81	77.84	53.63	35.85	5.63	35.08	Peak	---	---
2	11000.000	70.06	-13.48	83.54	59.01	38.60	7.17	34.72	Peak	---	---
3	11000.000	58.82	-4.72	63.54	47.77	38.60	7.17	34.72	Average	---	---
4	16500.000	60.08	-17.76	77.84	44.83	42.00	8.24	34.99	Peak	---	---

Vertical

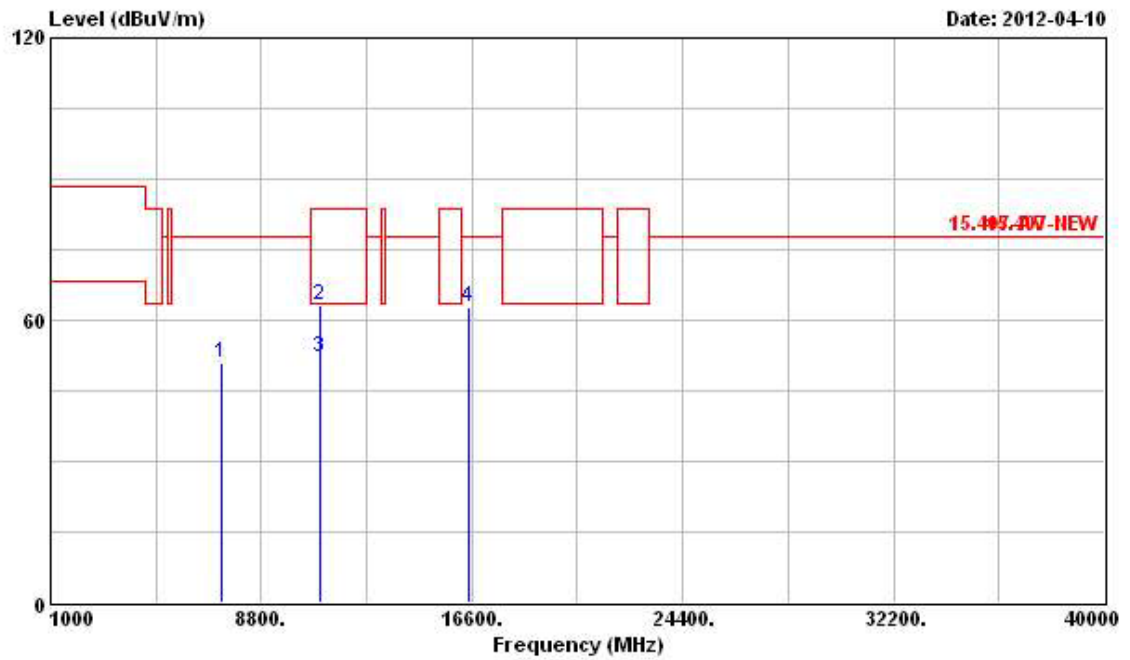


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7320.000	50.80	-27.04	77.84	44.43	35.83	5.64	35.10	PK	---	---
2	11000.000	63.31	-20.23	83.54	52.26	38.60	7.17	34.72	Peak	---	---
3	11000.000	52.29	-11.25	63.54	41.24	38.60	7.17	34.72	Average	---	---
4	16500.000	62.63	-15.21	77.84	47.38	42.00	8.24	34.99	Peak	---	---

Final Test Date	Apr. 10, 2012	Test Site No.	03CH02-HY
Temperature	23.9°C	Humidity	63%
Test Engineer	Streak	Configuration	802.11n Ch. 116 (20 MHz)

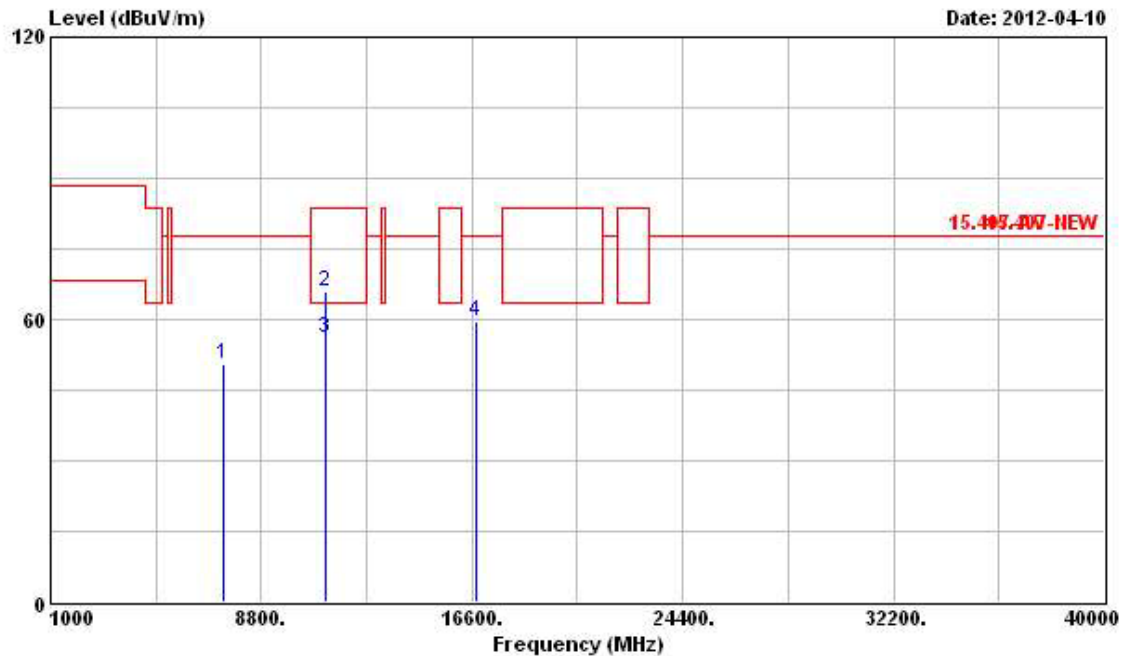Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7428.000	50.55	-27.29	77.84	44.22	35.81	5.65	35.13	PK	---	---
2	11160.000	65.88	-17.66	83.54	54.94	38.70	6.96	34.72	Peak	---	---
3	11160.000	56.24	-7.30	63.54	45.30	38.70	6.96	34.72	Average	---	---
4	16740.000	59.66	-18.18	77.84	43.84	41.86	8.47	34.51	Peak	---	---

Vertical

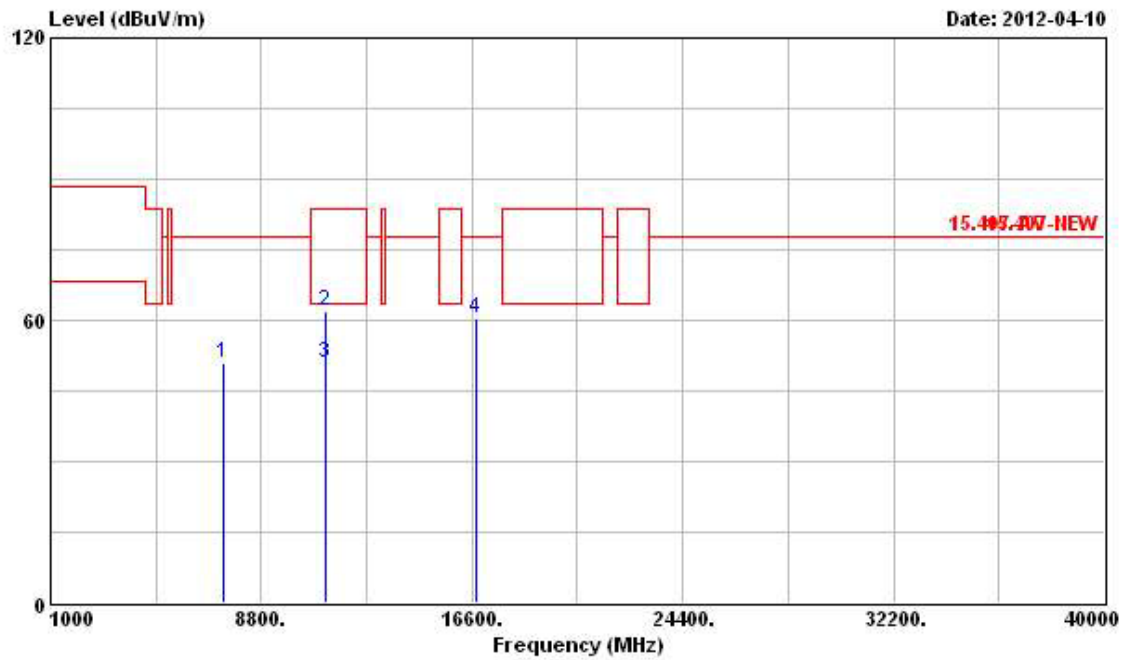

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	7428.000	50.78	-27.06	77.84	44.45	35.81	5.65	35.13	PK	---	---
2	11160.000	62.10	-21.44	83.54	51.16	38.70	6.96	34.72	Peak	---	---
3	11160.000	50.85	-12.69	63.54	39.91	38.70	6.96	34.72	Average	---	---
4	16740.000	60.24	-17.60	77.84	44.42	41.86	8.47	34.51	Peak	---	---