


ry
 PCS new AA alkaline batteries
 the mouse upper cover and pull the
 (Please see the reference picture)
 es correctly according to the polarity
 oves.
 rs forward, when you hear "crack"
 s the battery cover is locked

or, please use the USB to PS/2 adaptor
 nector before your computer start-up.
 nect the receiver directly with the USB

ere is a little far between the case and
 suggest you use an extended USB
 ease and the receiver, so you can place
 orking surface conveniently.

ID Setup

1. Please move the mouse near to the receiver
2. Press the ID button of the receiver by your hand, the receiver light begin to flash
3. Press the ID button of the mouse bottom with some hard and acuate object within 10 seconds, the receiver light will flash very fast, a few seconds later it will be on which shows it is successfully to finish the digital transmission between the mouse and the receiver. You may start to use it.
4. Working distance: within 1-2 meters.

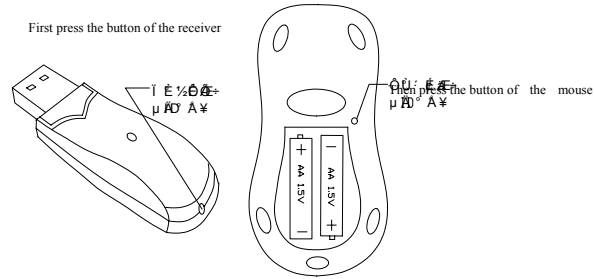

Attention Please

1. Please don't make the mouse far away from the receiver in order to work more smoothly.
2. You'd better use the mouse on the white desk, in this way the batteries can be used longer time. Please remove the batteries if the mouse will not be used for a long time.
3. This mouse with save power sleeping functions, please press any

- key or scroll the wheel to wak
4. If you want to take off the m
 the ID switch of the mouse l
 take on the power,please clic
5. The optical mouse will not v
 any reflecting surface, 3D m
6. No need to check the digital
 change the batteries, if mor
 above way to re-operate.

Caution

Any changes or modificatio
 party responsible for complian
 operate the equipment.

Note

Note: This equipment has bee
 the limits for a Class B digital
 FCC Rules. These limits are d
 protection against harmful int
 This equipment generates, use
 energy and, if not installed an
 instructions, may cause harmf
 communications. However, th
 will not occur in a particular i