



Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: Funk- Temperatur-/ Luftfeuchtesensor
Model: BA 1010 (receiver)
Approval Holder: ELV Elektronik
Operating Condition: Tnom: 23°C / Unom: 4.5 V DC (3x1.5 V battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15109
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:193.527MHz Emax:30.92dBµV/m RBW: 100 kHz

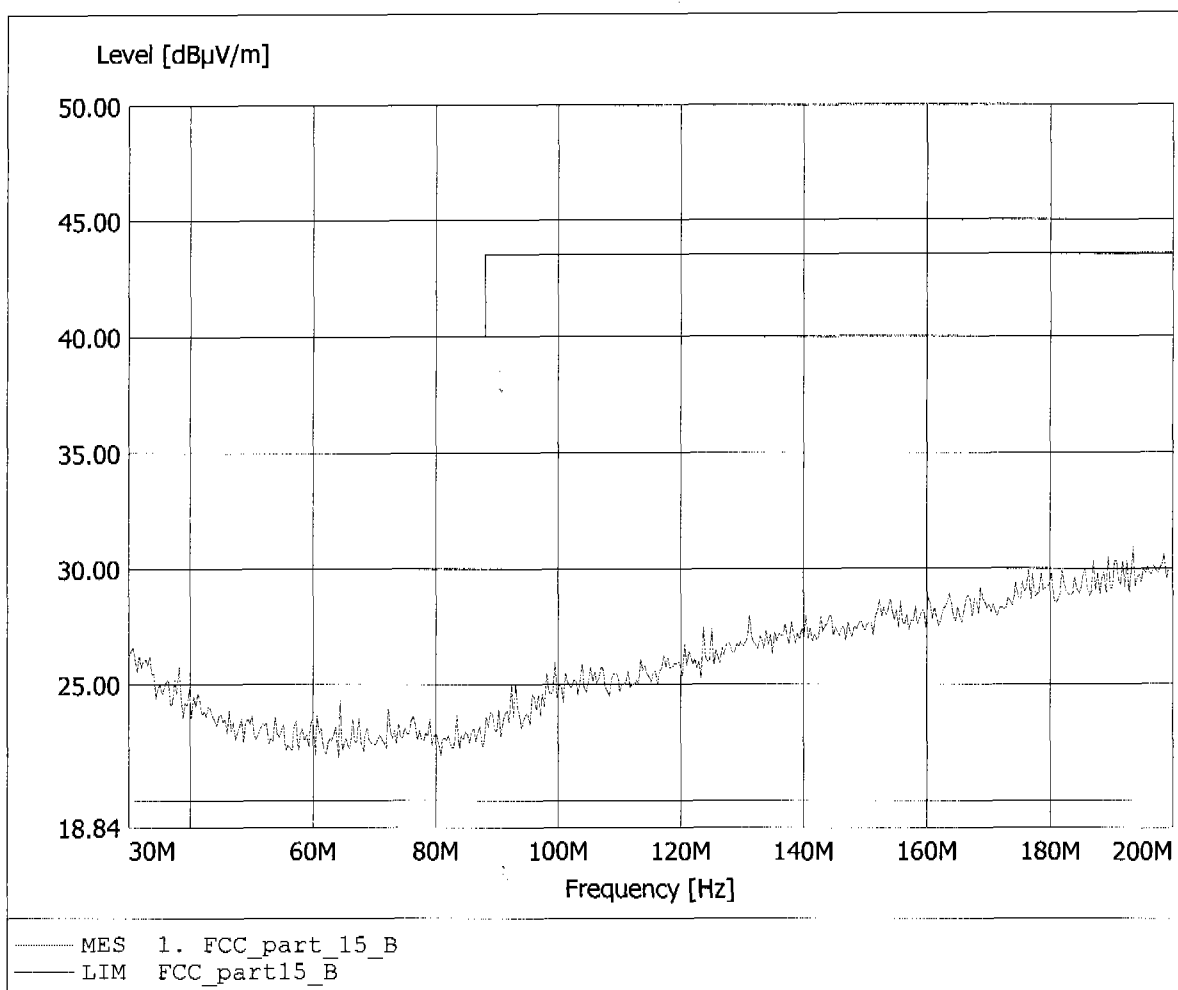


Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: Funk- Temperatur-/ Luftfeuchtesensor
Model: BA 1010 (receiver)
Approval Holder: ELV Elektronik
Operating Condition: Tnom: 23°C / Unom: 4.5 V DC (3x1.5 V battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to S15109
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:198.297MHz Emax:30.20dBµV/m RBW: 100 kHz

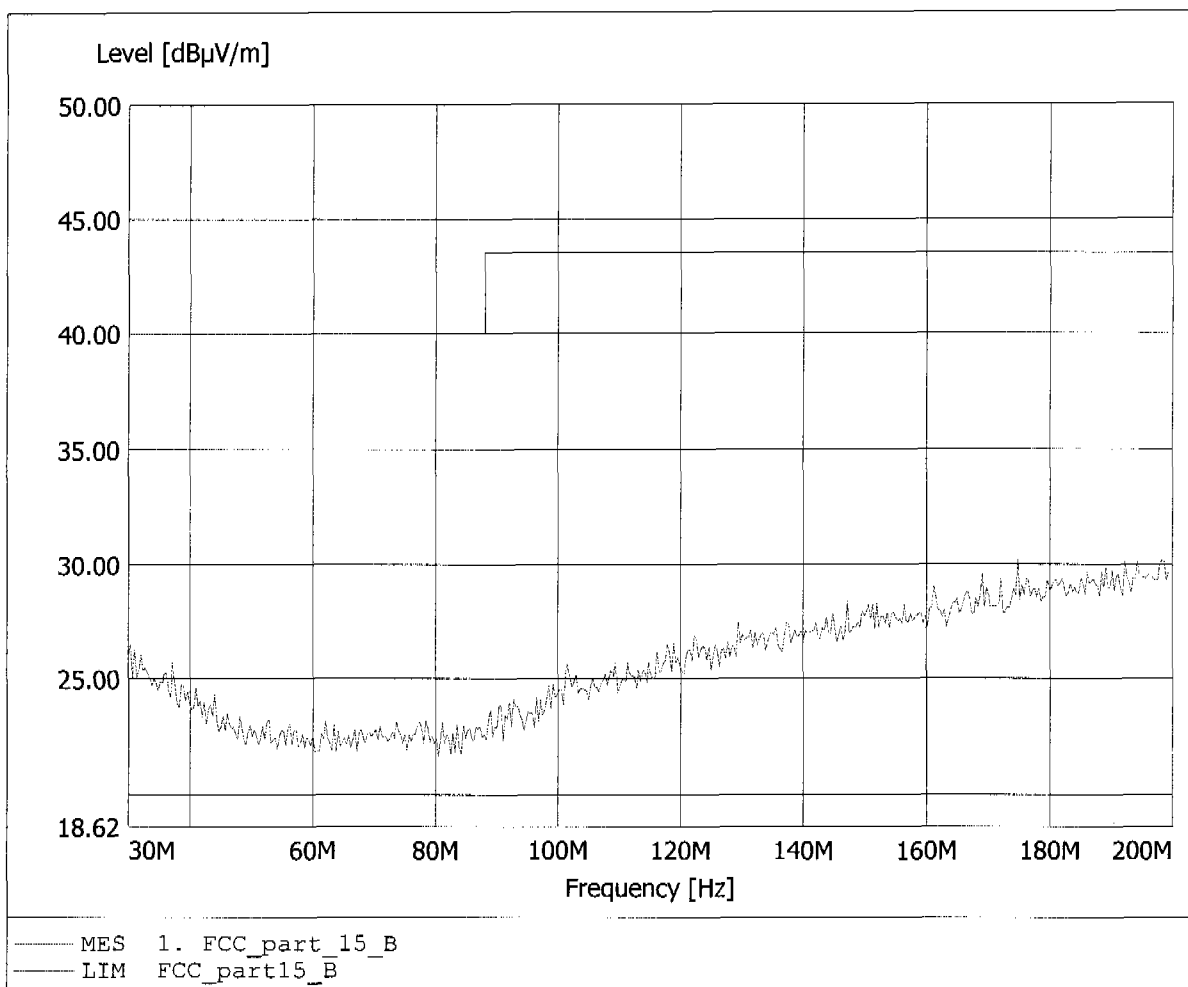


Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: Funk- Temperatur-/ Luftfeuchtesensor
Model: BA 1010 (receiver)
Approval Holder: ELV Elektronik
Operating Condition: Tnom: 23°C / Unom: 4.5 V DC (3x1.5 V battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15109
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:434.068MHz Emax:30.42dBµV/m RBW: 100 kHz

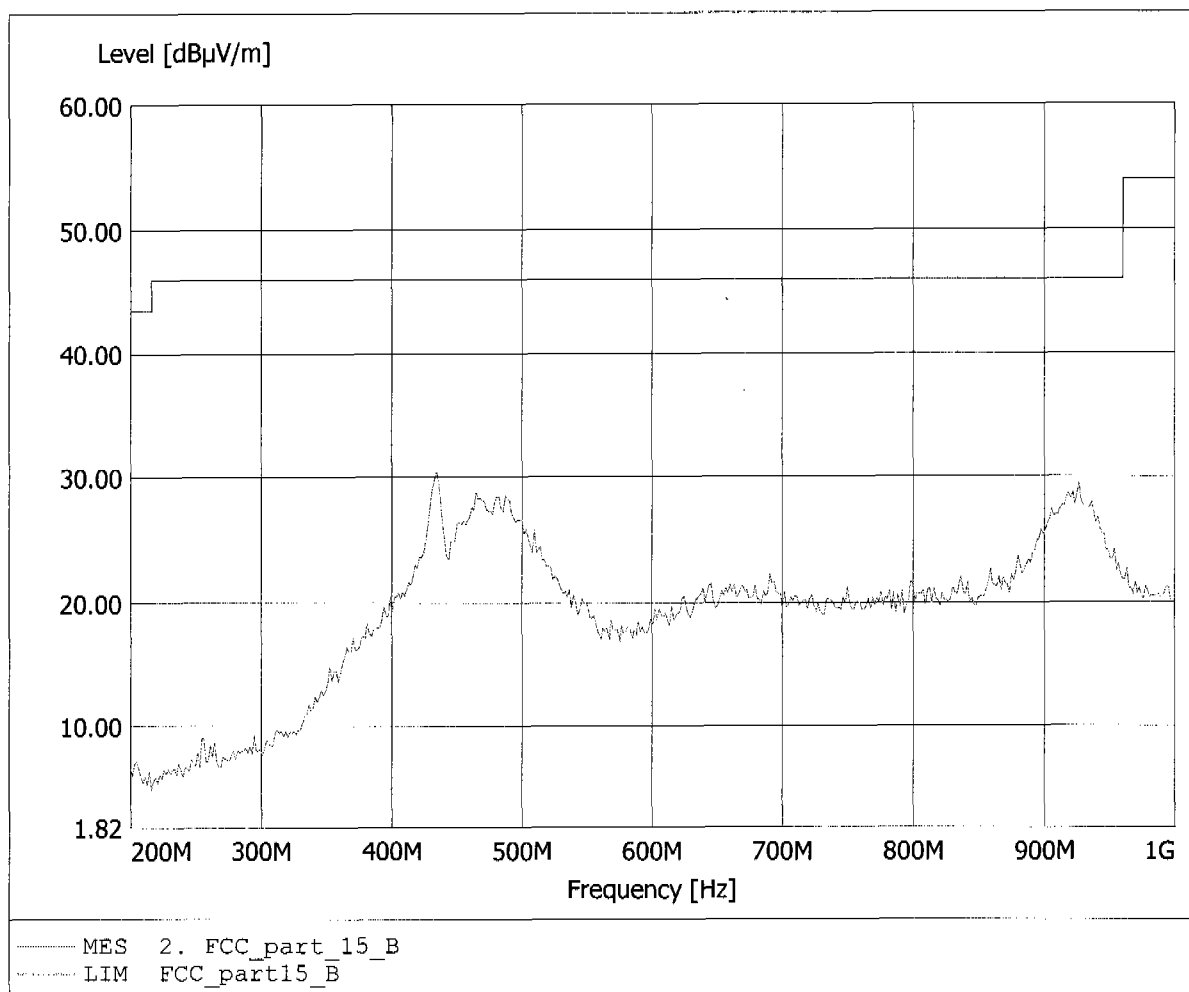


Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: Funk- Temperatur-/ Luftfeuchtesensor
Model: BA 1010 (receiver)
Approval Holder: ELV Elektronik
Operating Condition: Tnom: 23°C / Unom: 4.5 V DC (3x1.5 V battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15109
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:434.068MHz Emax:37.74dBµV/m RBW: 100 kHz

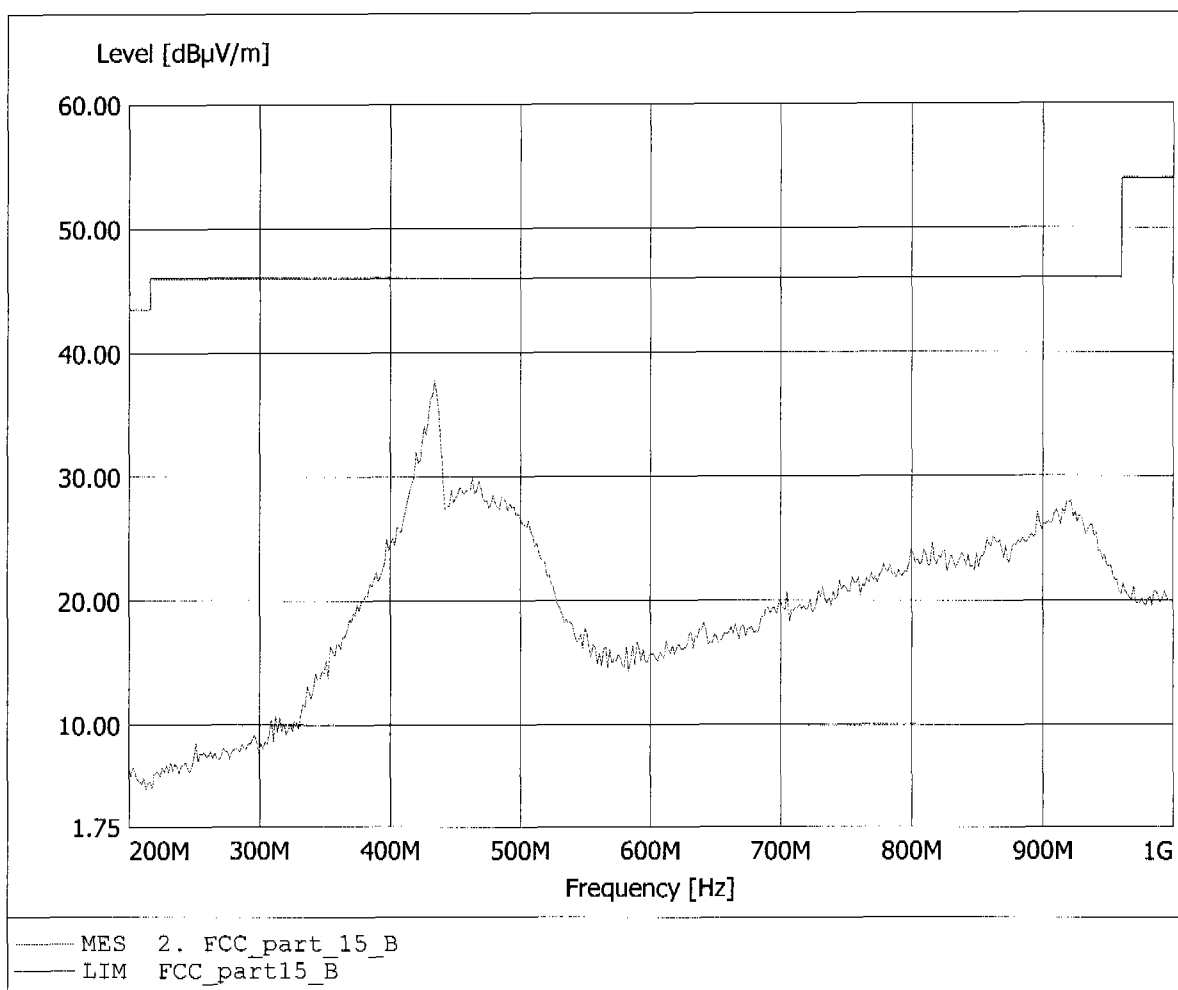


Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: Funk- Temperatur-/ Luftfeuchtesensor
Model: BA 1010 (receiver)
Approval Holder: ELV Elektronik
Operating Condition: Tnom: 23°C / Unom: 4.5 V DC (3x1.5 V battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15109, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:1.349GHz Emax:42.56dBµV/m RBW: 1 MHz

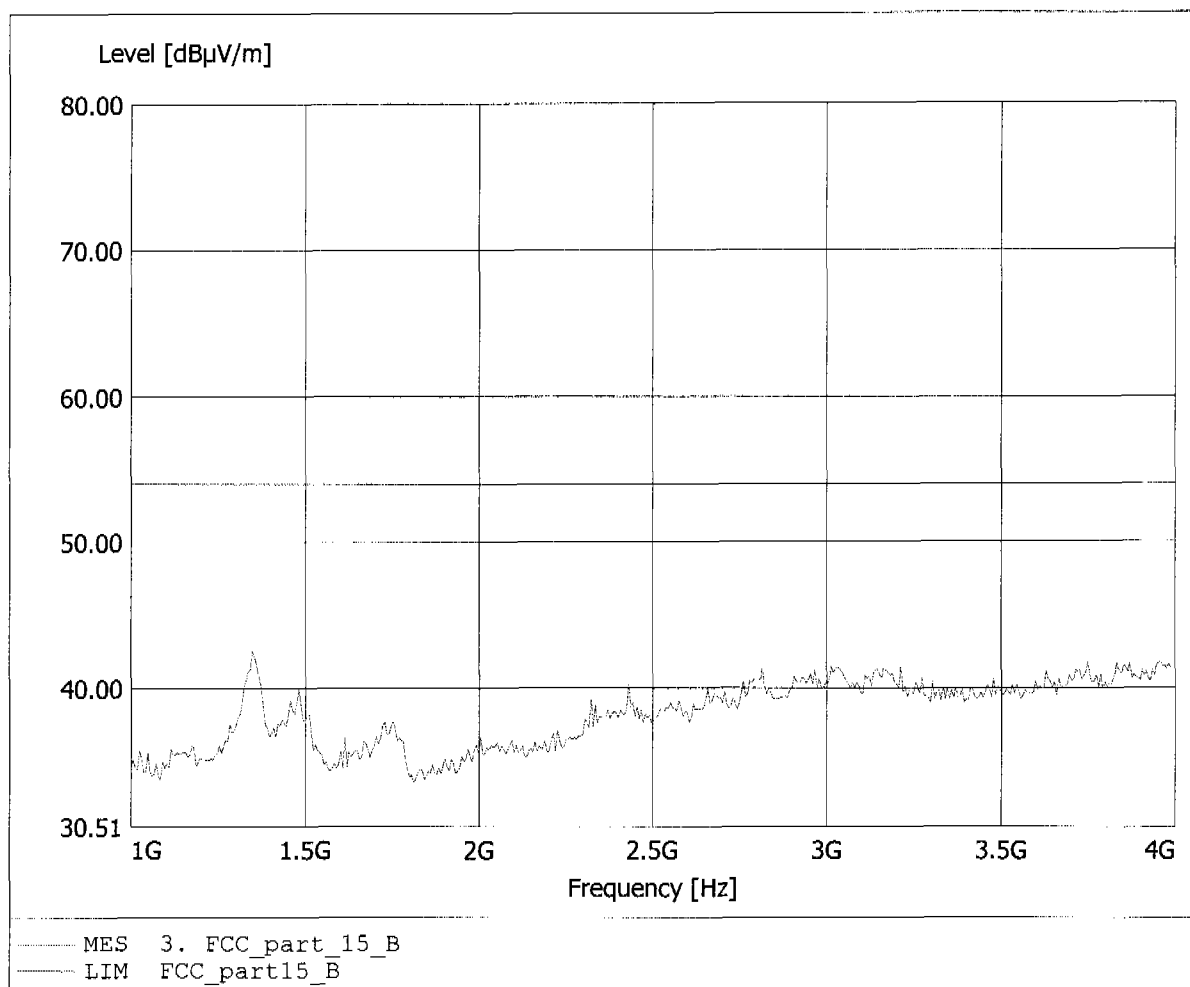


Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: Funk- Temperatur-/ Luftfeuchtesensor
Model: BA 1010 (receiver)
Approval Holder: ELV Elektronik
Operating Condition: Tnom: 23°C / Unom: 4.5 V DC (3x1.5 V battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15109, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:3.014GHz Emax:46.05dBµV/m RBW: 1 MHz

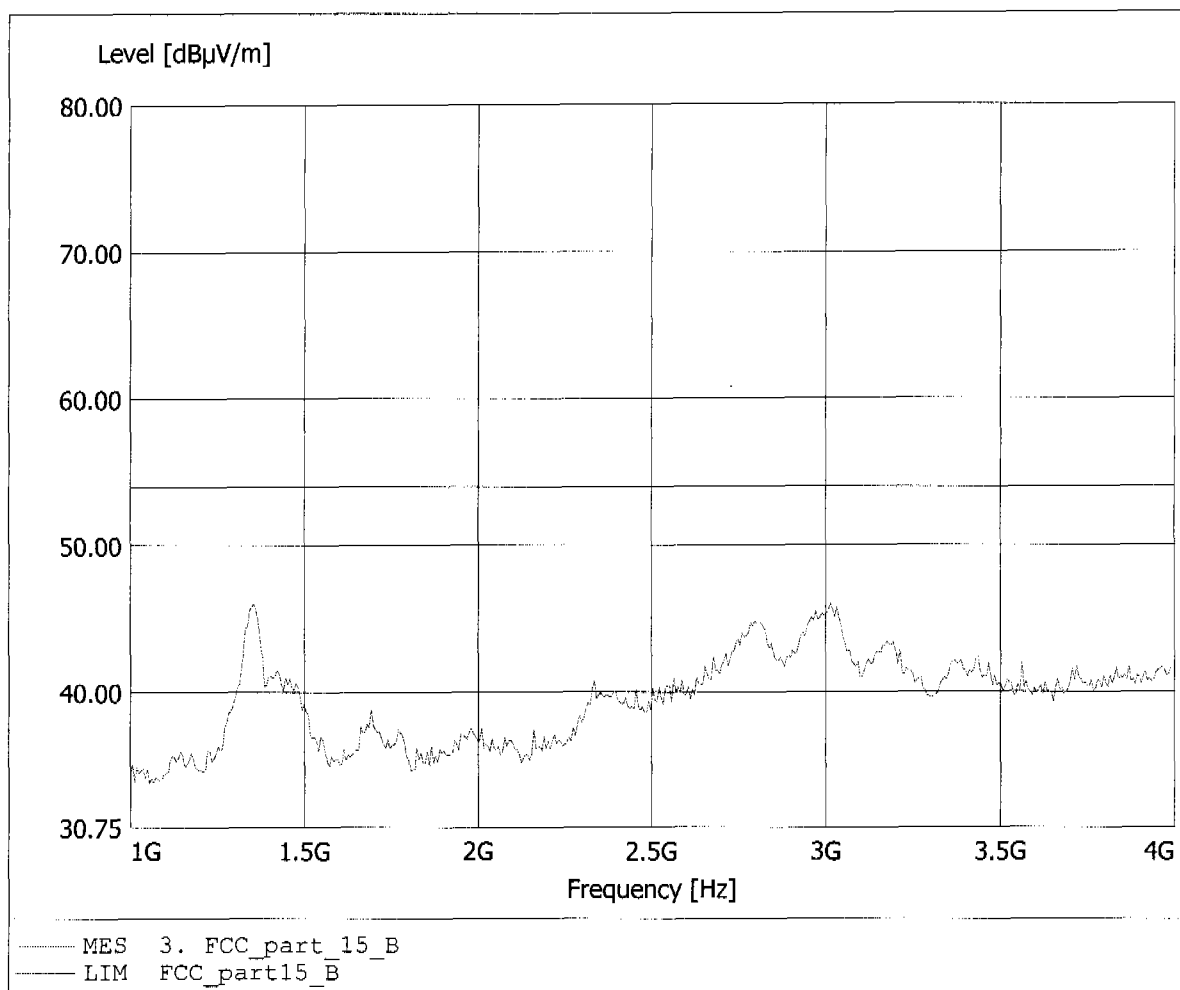

Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: Funk- Temperatur-/ Luftfeuchtesensor
Model: BA 1010 (receiver)
Approval Holder: ELV Elektronik
Operating Condition: Tnom: 23°C / Unom: 4.5 V DC (3x1.5 V battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15109, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq: 7.631GHz Emax: 37.49dBµV/m RBW: 1 MHz

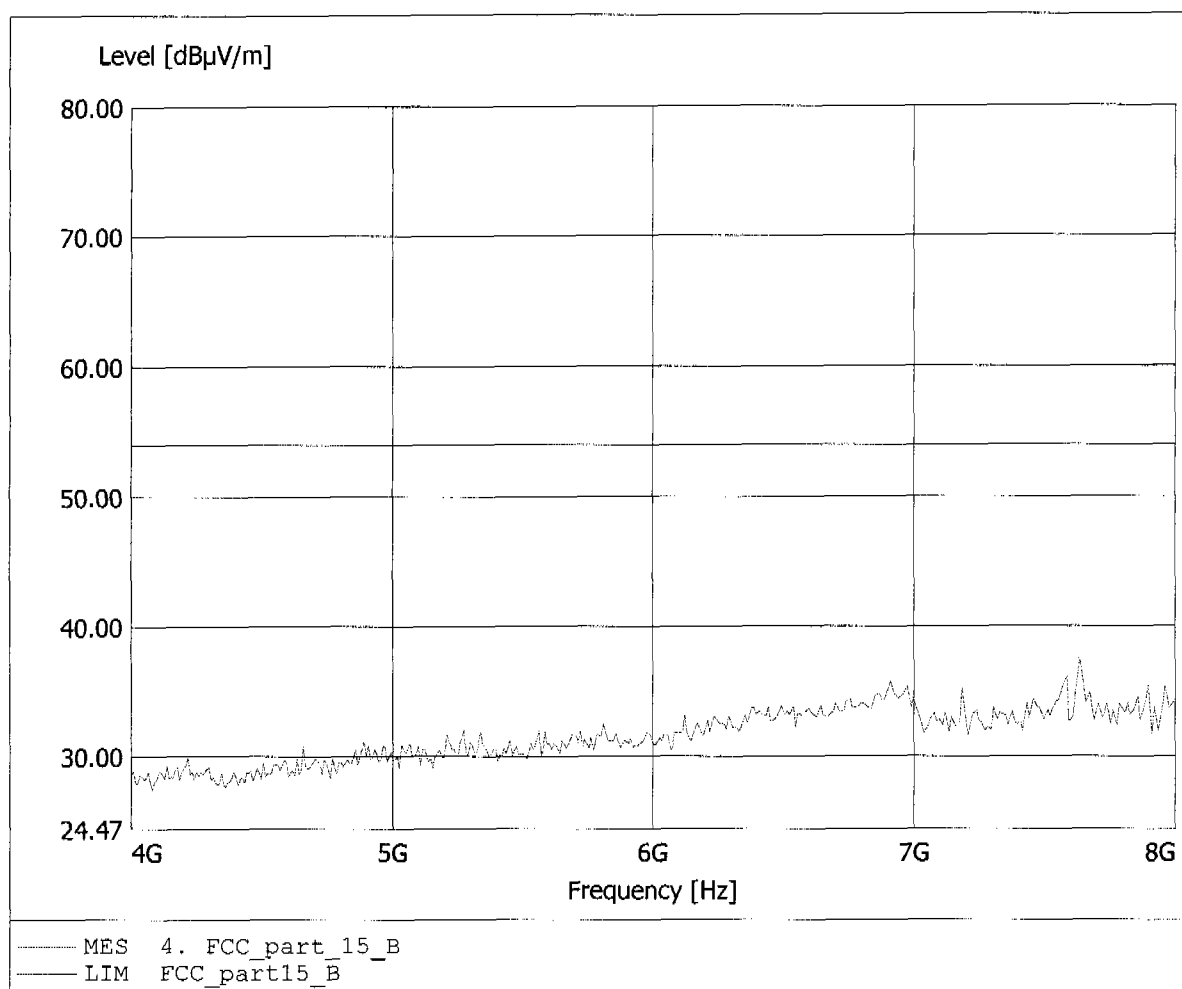

Field Strength under normal conditions
FCC RULES PART 15, SUBPART B

EUT: Funk- Temperatur-/ Luftfeuchtesensor
Model: BA 1010 (receiver)
Approval Holder: ELV Elektronik
Operating Condition: Tnom: 23°C / Unom: 4.5 V DC (3x1.5 V battery)
Test Site / Operator: ETS / Mr. Treffke
Test Specification: according to §15109, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:6.998GHz Emax:35.60dBuV/m RBW: 1 MHz

