

Cedarburg, WI 53012 262-375-4400 Fax: 262-375-4248

COMPLIANCE TESTING OF:

AquaLogic RF Base Station

PREPARED FOR:

Goldline Controls, Incorporated Attn.: Mr. Charles Savoie 42 Ladd Street East Greenwich, RI 02818

TEST REPORT NUMBER:

303459-TX Rev. 1

TEST DATE(S):

November 18th, 2003

All results of this report relate only to the items that were tested. This report is not to be reproduced, except in full, without written approval of L. S. Compliance, Inc.

Table of Contents

Section	Description	Page
Index		2
1	L. S. Compliance in Review	3
2	A2LA Certificate of Accreditation	4
3	A2LA Scope of Accreditation	5
4	Validation Letter-U.S. Competent Body for EMC Directive 89/336/EEC	6
5	Signature Page	7
6	Product and General Information	8
7	Product Description	8
8	Test Requirements	9
9	Declaration of Conformity	9
10	Introduction	9
11	Purpose	9
12	Radiated Emissions Test	10-16
13	Conducted Emissions Test (AC Power Line)	17-21
14	Band-Edge Measurements	22
15	Frequency and Power Stability versus Voltage	23
Appendix		
Α	Test Equipment List	24

L.S. Compliance, Inc. Page 2 of 24

L.S. Compliance, Inc.
Test Report Number: 303459-TX Rev. 1
Prepared For: Goldline Controls

1. L. S. Compliance In Review

Brief Review of L.S. Compliance Accreditations and Listing's

As an EMC Testing Laboratory, our Accreditation and Assessments are recognized through the following:

A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025: 1999 with Electrical (EMC) Scope of Accreditation A2LA Certificate Number: 1255.01

Federal Communications Commission (FCC) - USA

Listing of 3 Meter Semi-Anechoic Chamber based on Title 47 CFR – Part 2.948

FCC Registration Number: 90756

Listing of 3 and 10 meter OATS based on Title 47CFR – Part 2.948

FCC Registration Number: 90757

Industry Canada

On file, 3 Meter Semi-Anechoic Chamber based on RSS-212 – Issue 1

File Number: IC 3088-A

On file, 3 and 10 Meter OATS based on RSS-212 - Issue 1

File Number: IC 3088

U. S. Conformity Assessment Body (CAB) Validation

Validated by the European Commission as a **U. S. Competent Body** operating under the U. S. /EU, Mutual Recognition Agreement (MRA) operating under the European Union Electromagnetic Compatibility –Council Directive 89/336/EEC, Article 10.2.

Date of Validation: **January 16, 2001**

Validated by the European Commission as a **U.S. Notified Body** operating under the U.S./EU, Mutual Recognition Agreement (MRA) operating under the European Union Telecommunication Equipment – Council Directive 99/5/EC, Annex V.

Date of Validation: **November 20, 2002**Notified Body Identification Number: **1243**

L.S. Compliance, Inc. Page 3 of 24



THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION

ACCREDITED LABORATORY

A2LA has accredited

L.S. COMPLIANCE, INC. Cedarburg, WI

for technical competence in the field of

Electrical Testing

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing. Testing and calibration laboratories that comply with this International Standard also operate in accordance with ISO 9001 or ISO 9002 (1994).

Presented this 26th day of March 2003.

President

President

For the Accreditation Council Certificate Number 1255.01 Valid to January 31, 2005

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

L.S. Compliance, Inc.

3. A2LA Scope of Accreditation



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999

L.S. COMPLIANCE, INC. W66 N220 Commerce Court Cedarburg, WI 53012 James Blaha Phone: 262 375 4400

ELECTRICAL (EMC)

Valid to: January 31, 2005

Certificate Number: 1255-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following tests:

Test Emissions Test Method(s)

Conducted

Continuous/Discontinuous

Code of Federal Regulations (CFR) 47, FCC Method Parts 15, 18 using ANSI C63.4; EN: 55011, 55022, 50081-1, 50081-2;

CISPR: 11, 12, 14-1, 22;

CNS 13438

Radiated

Code of Federal Regulations (CFR) 47, FCC Method Parts 15, 18 using ANSI C63.4; EN: 55011, 55022, 50081-1, 50081-2;

CISPR: 11, 12, 14-1, 22;

CNS 13438

Current Harmonics

IEC 61000-3-2; EN 61000-3-2

Voltage Fluctuations & Flicker

IEC 61000-3-3; EN 61000-3-3

Immunity

EN: 50082-1, 50082-2 EN 61000-6-2 CISPR: 14-2, 24

Conducted Immunity

Fast Transients/Burst

IEC 61000-4-4;

Surge

EN 61000-4-4 IEC: 61000-4-5; ENV 50142;

EN 61000-4-5

RF Fields

EN 61000-4-5 IEC: 61000-4-6; ENV 50141;

EN 61000-4-6

Voltage Dips/Interruptions

IEC 61000-4-11; EN 61000-4-11

(A2LA Cert. No. 1255-01) 05/13/03

Page 1 of 2

Kasani M. Rabinson


5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974



Page 5 of 24

L.S. Compliance, Inc.
Test Report Number: 303459-TX Rev. 1

4. Validation Letter – U.S. Competent Body for EMC Directive 89/336/EEC

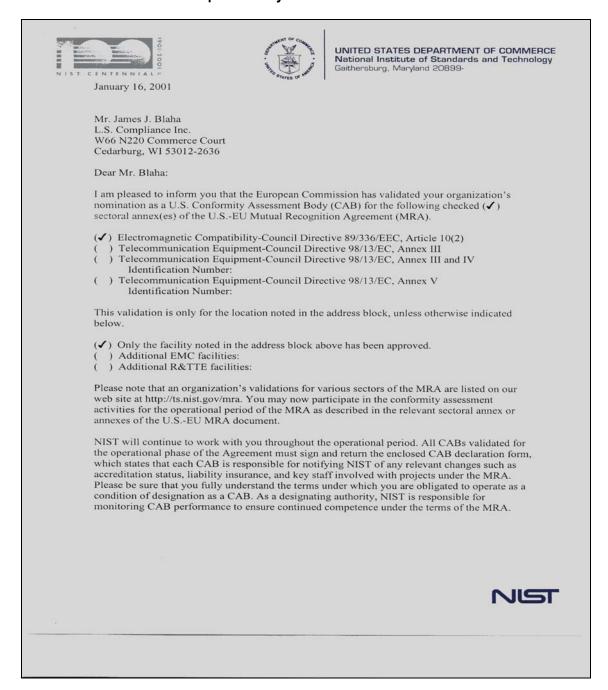

L.S. Compliance, Inc.

Page 6 of 24

5. Signature Page

	Jenesa a White	
Prepared By:		January 23, 2004
	Teresa A. White, Document Coordinator	Date
Tested By:	alt Sute	January 23, 2004
residu by.	Abtin Spantman, EMC Engineer	Date
	Keneth L Boston	

L.S. Compliance, Inc. Page 7 of 24

Kenneth L. Boston, EMC Lab Manager

PE #31926 Licensed Professional Engineer

Registered in the State of Wisconsin, United States

January 23, 2004

Date

Test Report Number: 303459-TX Rev. 1 Prepared For: Goldline Controls

Approved By:

6. Product and General Information

Manufacturer: Goldline Controls, Incorporated

Model No.: Aqua Logic Base

Serial No.: Engineering Unit # 104

Description: Wireless Remote Spa Controller

7. Product Description

The Goldline AquaLogic RF Base Station provides a remote wireless solution for a Spa controller system. The system is composed of a "Base Unit" containing the transceiver and control circuitry for the Spa, and a "Remote Controller Unit" containing a transceiver and keypad.

The base and remote units comprise a remote control system that utilizes a 5 channel scanning scheme to obtain a clear channel. Base receiver will continuously scan 5 channels for a signal from the remote. The remote is normally in sleep mode and wakes up and transmits upon keypad activation. The RF design is based upon the 'Chipcon' CC1020 transceiver IC (half-duplex) for operation in the 902-928 ISM band.

The system uses Manchester-encoded binary data at 9600 bps, frequency modulated with a 19.8 kHz peak to peak deviation. The base unit is powered from an external power supply source providing 10 volts DC, which is then regulated to 3.3 VDC internally.

The system uses a frequency modulation technique, and is capable of utilizing 25 different frequency channels in the 902-928 MHz band. Three channels were selected for testing: Set 1, channel 1 (902.5 MHz), set 3, channel 3 (914.5 MHz), and set 5, channel 5 (926.5 MHz).

The channel and sets are defined as follows:

Channel Set

Channel	Set 1	Set 2	Set 3	Set 4	Set 5
1	902.5	903.5	904.5	905.5	906.5
2	907.5	908.5	909.5	910.5	911.5
3	912.5	913.5	914.5	915.5	916.5
4	917.5	918.5	919.5	920.5	921.5
5	922.5	923.5	924.5	925.5	926.5
	MHz	MHz	MHz	MHz	MHz

L.S. Compliance, Inc. Page 8 of 24

8. Test Requirements

The tests were performed in order to determine the compliance of the Goldline AquaLogic RF Base Station with limits contained in various provisions of Title 47 CFR, FCC Part 15, including 15.109, 15.205, 15.207, and 15.249.

All radiated emissions tests were performed to measure the emissions in the frequency bands described by the above sections, and to determine whether said emissions are below the limits established by the above sections. These tests were performed in accordance with the procedure described in the American National Standard for methods of measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2001). Another document used as reference for the EMI receiver specification was the International Special Committee on Radio Interference CISPR 16-1 (2002). Measurement technique guidelines found in Appendix C to FCC 97-114 were also consulted.

9. <u>DECLARATION OF CONFORMITY</u>

The Goldline Aqua Logic Remote SPA system was found to **MEET** the requirements as described within the specification of Title 47 CFR FCC, Part 15.249, for a frequency modulated transmitter.

10. Introduction

On November 18th, 2003, a series of Radiated and Conducted Emission tests were performed on the Goldline Aqua Logic Remote SPA system "Base Unit", serial number: 'Engineering Unit 104', here forth referred to as the "*Equipment Under Test*" or "*EUT*". These tests were performed using the procedures outlined in ANSI C63.4-2001 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.249 for an intentional radiator. These tests were performed by Abtin Spantman, EMC Engineer at L.S. Compliance, Incorporated.

11. Purpose

All Radiated and Conducted Emission tests upon the EUT were performed to measure the emissions in the frequency bands described in Title 47 CFR, FCC Part 15, including 15.35, 15.207, and 15.249 to determine whether these emissions are below the limits expressed within the standards. These tests were performed in accordance with the procedure described in the American National Standard for methods of measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2001). Another document used as a reference for the EMI Receiver specification was the Comite International Special Des Perturbations Radioelelectriques CISPR 16-1, 2002

Page 9 of 24

L.S. Compliance, Inc.
Test Report Number: 303459-TX Rev. 1

12. Radiated Emissions Test

Test Setup

The test setup was assembled in accordance with Title 47, CRF FCC Part 15 and ANSI C63.4-2001. The EUT was placed on an 80cm high non-conductive pedestal centered on a flush mounted 2-meter diameter turntable inside the 3 Meter Semi-Anechoic, FCC listed Chamber located at L. S. Compliance, Inc., Cedarburg, Wisconsin. The EUT was operated in continuous transmit mode, using power from an external power supply, providing 10.0 VDC, 400 milliamperes. The EUT was exercised with and without an RS-485 source/termination attached to the cables, during the investigations, and was tested without the termination as the worst-case emissions. During a normal transmission cycle, as initiated by pressing any of the buttons, the longest packet would be approximately 45 milliseconds of data transmission, in any 135 millisecond window. The applicable radiated emission limits apply at a 3-meter measurement distance. Measurements above 6 GHz were performed at a 1-meter measurement distance. The calculations to determine the 3-meter limits are detailed in the following pages. Please refer to Appendix A for a list of the test equipment. The test sample was operated on one of three standard channels: set 1, channel 1 (902.5 MHz), set 3, channel 3 (914.5 MHz) and set 5, channel 5 (926.5 MHz) to comply with FCC Part 15.35.

Test Procedure

Radiated Emission measurements were performed on the EUT in the 3 Meter Semi-Anechoic, FCC listed Chamber, located at L. S. Compliance, Inc. in Cedarburg, Wisconsin. The frequency range from 30 MHz to 10,000 MHz was scanned, and levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive table in the 3 Meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters separation from the test object during tests below 6 GHz, and at 1 meter separation during tests above 6 GHz. A Biconical Antenna was used to measure emissions from 30 MHz to 300 MHz, and a Log Periodic Antenna was used to measure emissions from 300 MHz. A Double Ridged Wave-guide Horn Antenna was used from 1 GHz to 10 GHz. The maximum radiated emissions were found by raising and lowering the antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities.

Test Equipment Utilized

A list of the test equipment and antennas utilized for the Radiated Emissions test can be found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. All calibrations of the antennas used were performed at an N.I.S.T. traceable site. In addition, the Connecting Cables were measured for losses using a calibrated Signal Generator and a HP 8546A EMI Receiver. The resulting correction factors and the cable loss factors from these calibrations were entered into the HP 8546A EMI Receiver database. As a result, the data taken from the HP 8546A EMI Receiver accounts for the antenna correction factor as well as cable loss or other corrections, and can therefore be entered into the database as a corrected meter reading. The HP 8546A EMI Receiver was operated with a bandwidth of 120 kHz for measurements below 1 GHz, and a bandwidth of 1 MHz for measurements above 1 GHz. Both the Peak and Quasi-Peak Detector functions were utilized. From 6 GHz to 10 GHz, an Agilent E4407B Spectrum Analyzer was utilized along with the appropriate horn antenna.

Test Results

The EUT was found to MEET the Radiated Emissions requirements of Title 47 CFR, FCC Part 15.249 for a frequency modulated transmitter. The frequencies with significant signals were recorded and plotted as shown in the Data Charts and Graphs.

L.S. Compliance, Inc.

Page 10 of 24
Test Report Number: 303459-TX Rev. 1

CALCULATION OF RADIATED EMISSIONS LIMITS for 15.249 (902-928 MHz)

FIELD STRENGTH OF FUNDAMENTAL FREQUENCIES:

The fundamental emissions for a 916 MHz transmitter, operating under FCC Part 15.249 limits, must have a field strength no greater than 50mV/m at 3 meters, and a harmonic field strength no greater than $500\mu\text{V/m}$ at 3 meters. Spurious emissions outside the 902 MHz – 928 MHz band shall be attenuated by at least 50 dB below the level of the fundamental, or meet the limits expressed in FCC Parts 15.205 and 15.209 under general emission limits *.

FIELD STRENGTH OF FUNDAMENTAL FREQUENCIES:

Limit of 50,000 μ V/m; in dB; 20 log (50,000) = 94 dB μ V/m

FIELD STRENGTH OF HARMONICS AND SPURIOUS FREQUENCIES: BY 15.249(c)

Limit of -50 dBc of the fundamental limit; 94 dB μ V/m – 50 dB = 44 dB μ V/m Except where the 15.209 limits will allow a higher limit to be used*.

Frequency (MHz)	Limit (µV/m @ 3m)	Limit (dBµV/m @ 3m)
902 – 928	50,000	94.0
30 – 88; 88 - 216	159	44.0
216 – 902; 928 – 960	500	46.0 *
960 – 9280	500	54.0 *

For measurements made at 1 meter, a 9.5 dB correction has been invoked.

960 MHz to 25,000 MHz $500~\mu\text{V/m}$ or 54.0 dB $\mu\text{V/m}$ at 3 meters 54.0 + 9.5 = 63.5 dB $\mu\text{V/m}$ at 1 meter

Note: Limits are conservatively rounded to the nearest tenth of a whole number.

Summary of Results and Conclusions

Based on the procedures outlined in this report, and the test results, it can be determined that the EUT does **MEET** the emission requirements of Title 47 CFR, FCC Part 15.249, for a frequency modulated low power transmitter.

The enclosed test results pertain to the samples of the test item listed, and only for the tests performed per the data sheets. Any subsequent modification or changes to the test items could invalidate the data contained herein, and could therefore invalidate the findings of this report.

L.S. Compliance, Inc. Page 11 of 24

Measurement of Electromagnetic Radiated Emissions Within the 3 Meter FCC Listed Chamber

Manufacturer: Goldline Controls, Incorporated

Model No.: Aqua Logic Base
Serial No.: Engineering Unit # 104

Date of Test: November 18th, 2003

Test Requirements: 15.249 and 15.205

Distance: 3 meter (f<6 GHz), 1 meter (F>6 GHz) Frequency Range Inspected: 30 to 10,000 MHz

Configuration: Continuous Transmit

Test Equipment Used:

Receiver: HP 8546A (Below 6 GHz),	Biconical Antenna: EMCO 93110B		
Receiver: Agilent E4407B (Above 6 GHz)	Log Periodic Antenna: EMCO 43146A		
Double-Ridged Wave Guide/Horn Antenna: EMCO 3115	Pyramidal Horn Antenna: EMCO 3160		
Detector(s) Used:	1 GHz) √ Average (f>1 GHz)		

The following table depicts the level of significant radiated emissions measured at 3 meters distance from the EUT.

Frequency (MHz)	Antenna Polarity	Channel #	Antenna Height (m)	Azimuth (0° 360°)	EMI Meter Reading (dBuV/m)	15.249 Limit (dBuV/m)	Margin (dB)
902.5	V	1	1.05	255	91.4	94.0	2.6
914.5	V	3	1.05	265	92.1	94.0	1.9
926.5	V	5	1.05	260	91.9	94.0	2.1

The following table depicts the level of significant radiated emissions measured, at 3 meters if below 6 GHz, and at 1 meter distance from the EUT if above 6 GHz.

Frequency (MHz)	Antenna Polarity	Channel #	Antenna Height (m)	Azimuth (0° 360°)	EMI Meter Reading (dBuV/m)	15.249 Limit (dBuV/m)	Margin (dB)	
1805	V	1	1.20	0	43.3	54.0	10.7	
1829	V	3	1.00	120	33.1	54.0	20.9	
2743	V	3	1.00	30	32.7	54.0	21.3	
7316	Н	3	1.00	280	53.9	63.5	9.6	
7402	Н	5	1.00	150	55.3	63.5	8.2	

Notes:


1) All other emissions seen, other than noise floor, were greater than 20 dB below the limit.

2) All peak emissions seen were greater than 20 dB below the 74 dBµV/m limit, above 1 GHz.

L.S. Compliance, Inc.

Page 12 of 24


Photos Taken During Radiated Emission Testing

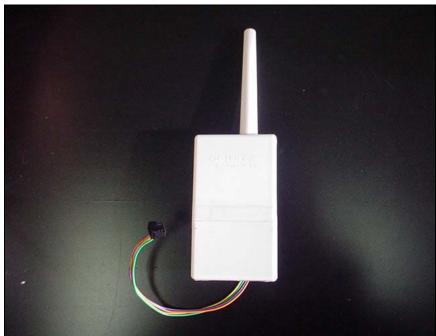

Front view of the EUT



Rear view of the EUT, showing the connection port and the 4-wire cable.

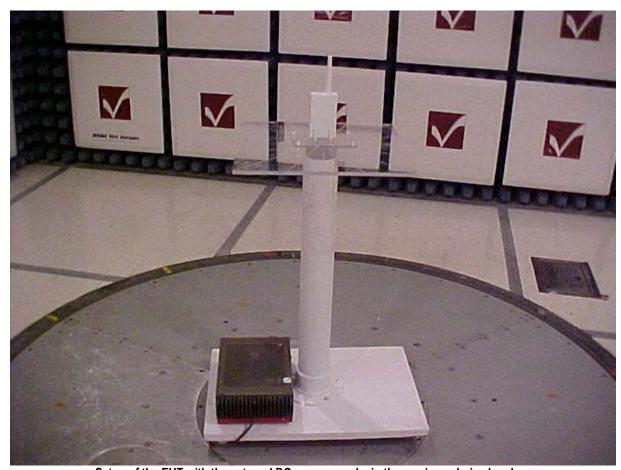


Setup of the EUT with the external DC power supply, in the semi-anechoic chamber, during the radiated emission testing.

Page 14 of 24


Graphs made during Radiated Emission Testing

Highest emissions were observed on the middle channel, set 3, channel 3, which is chosen here for the majority of sample graphs.

Signature Scan of Radiated Emissions, at 3 meter 30Hz - 300 MHz, Vertical Antenna Polarity, Channel 3.

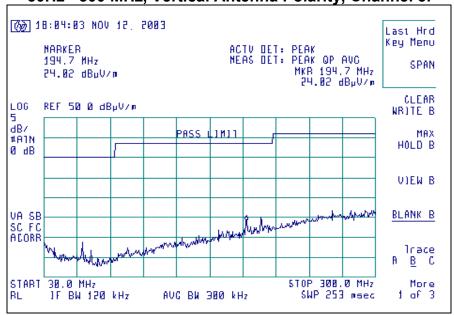


Signature Scan of Radiated Emissions, at 3 meter 300 - 1000 MHz, Vertical Antenna Polarity, Channel 3.

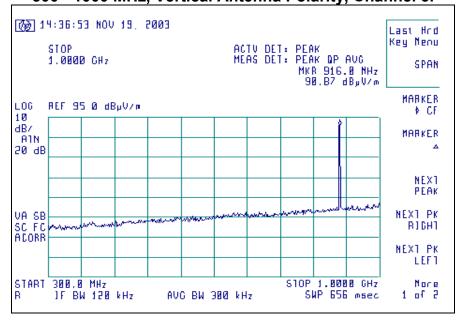


L.S. Compliance, Inc. Page 15 of 24

Signature Scan of Radiated Emissions, at 3 meter 1000 – 6000 MHz, Vertical Antenna Polarity, Channel 3.

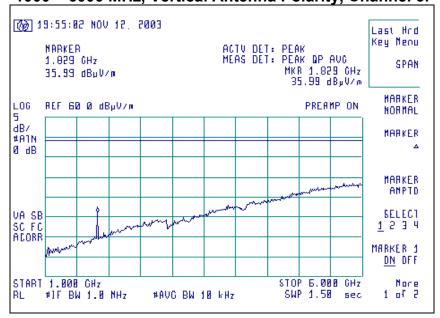

Signature Scan of Radiated Emissions, at 1 meter 6000 - 10,000 MHz, Horizontal Antenna Polarity, Channel 5.

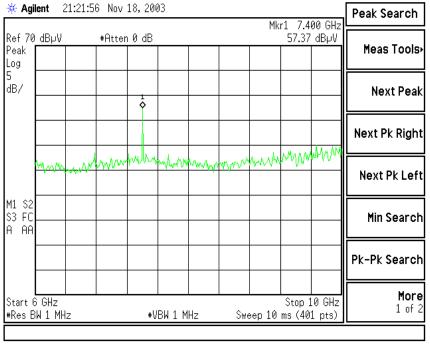

L.S. Compliance, Inc.
Test Report Number: 303459-TX Rev. 1
Prepared For: Goldline Controls

13. Conducted Emissions Test (AC Power Line)

Test Setup

The normal operation of the EUT is defined with a host providing the DC power needed for the EUT. For this series of tests, an external DC power supply was utilized with linear regulation, to test the effects of the EUT on AC mains. The external DC supply was setup to provide 10.0 VDC nominal, at 400 milliamperes to the EUT. The emissions into the mains were measured through that external DC supply.

The Conducted Emissions test was performed within the FCC Listed Shielded Room, located at L.S. Compliance, Inc. in Cedarburg, Wisconsin. The test area and setup are in accordance with ANSI C63.4-2001 and with Title 47 CFR, FCC Part 15, Subpart B (Industry Canada RSS-210). The EUT was placed on a non-conductive pedestal, with a height of 80 cm above the reference ground plane. The EUT's power source was plugged into a 50Ω (ohm), $50/250~\mu$ H Line Impedance Stabilization Network (LISN). The Mains supply of 110 VAC was provided into the Shielded Room through an appropriate broadband EMI Filter, and then to the LISN line input. After the EUT was setup in the FCC Listed Shielded Room and connected to the LISN, the RF Sampling Port of the LISN was cabled to a 10 dB Attenuator-Limiter, and then to the HP 8546A EMI Receiver. The EMCO LISN used has the ability to terminate the unused port with a 50Ω (ohm) load when switched to either L1 (line) or L2 (neutral).

Test Procedure

The appropriate frequency range and bandwidths were entered into the EMI Receiver, and measurements were made. The bandwidth used for these measurements is 9 kHz, as specified in CISPR 16-1 (2002), Section 1, Table 1, for Quasi-Peak and Average detectors in the frequency range of 150 kHz to 30 MHz. Final readings were then taken and recorded.

Test Equipment Utilized

A list of the test equipment and accessories utilized for the Conducted Emissions test is found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. Calibrations of the LISN and Limiter are traceable to N.I.S.T. All cables are calibrated and checked periodically for conformance. The emissions are measured on the HP 8546A EMI Receiver, which has automatic correction for all factors stored in memory and allows direct readings to be taken.

Test Results

The EUT was found to MEET the Conducted Emission requirements of FCC Part 15.207 (Industry Canada RSS-210), Conducted Emissions for an intentional Radiator. See the Data Charts and Graphs for more details of the test results.

L.S. Compliance, Inc. Page 17 of 24

<u>Measurements of Electromagnetic Conducted Emission</u> <u>into the AC Mains</u>

Frequency Range Inspected: 0.15 MHz – 30.0 MHz
Test Requirements: Title 47CFR 15.207

Manufacturer:	Goldline	Controls, Incorpora	ited			
Date(s) of Test:	Novemb	November 18th, 2003				
Model #:	Aqua Lo	gic Base				
Serial #:	Engineer	Engineering Unit # 104				
Voltage:	10 VDC, 400 mA , as provided by an external DC Power Supply					
Detectors Used:		Peak	1	Quasi-Peak		Average

Test Equipment Utilized:

EMI Receiver: HP 8546A

LISN: 3816NM

Transient Limiter: HP 11947A

Emissions measurements into the AC mains. Data presented is from transmitter testing, on Low channel. Middle and high channels presented similar emissions performance.


Frequency (MHz)	Line	EMI Quasi-Peak Reading (dBμV/m)	Quasi-Peak Limit (dBμV/m)	Quasi-Peak Margin (dB)	Average Reading (dBµV/m)	Average Limit (dBµV/m)	Average Margin (dB)
0.16	L1	54.7	65.0	10.3	27.5	55.0	27.5
0.21	L1	53.2	63.2	10.0	25.8	53.2	27.4
0.16	L2	54.9	65.0	10.1	25.8	55.0	29.2
0.20	L2	53.5	63.6	10.1	25.5	53.6	28.1

Notes:

- 1) The emissions listed are characteristic of the power supply used, and did not change by the EUT.
- 2) All other emissions were better than 20 dB below the limits.
- 3) The EUT exhibited similar emissions in transmit and receive modes, and across the Low, Mid, and High channels tested.

L.S. Compliance, Inc. Page 18 of 24

Photo(s) Taken During Conducted Emission Testing

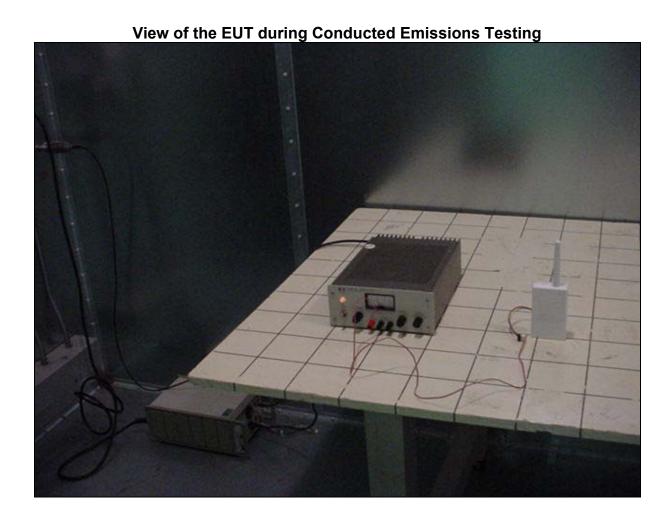

L.S. Compliance, Inc. Page 19 of 24

L.S. Compliance, Inc.
Test Report Number: 303459-TX Rev. 1
Prepared For: Goldline Controls

Calculation of Conducted Emissions Limits

These limits are obtained from Title 47 CFR, Part 15.207(a) for Conducted Emissions.

Frequency (MHz)	Quasi-Peak Limit (dBµV)	Average Limit (dBµV)
0.15 – 0.5	66 – 56 *	56 - 46
0.5 – 5.0	56	46
5.0 – 30.0	60	50

^{*} Decreases with the logarithm of the frequency.

Sample calculation for the limits in the 0.15 to 0.5 MHz:

Limit =
$$-19.12$$
 (Log₁₀ (F[MHz] / 0.15 [MHz])) + 66.0 dB μ V

For a frequency of 200 kHz for example:


$$Limit (F=200kHz) = -19.12 (Log_{10} (0.2[MHz] / 0.15 [MHz])) + 66.0 dB\mu V$$

Limit (F=200kHz) = 63.6 dB μ V


L.S. Compliance, Inc. Page 20 of 24

Graphs made during Conducted Emission Testing



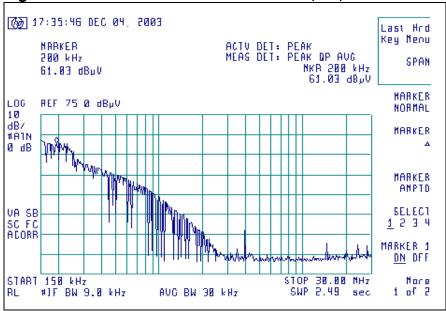

Signature Scan of Conducted Emissions, L2, Low Channel

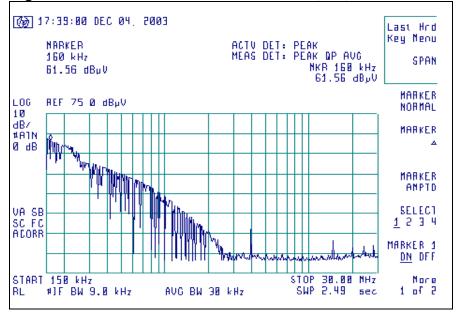


L.S. Compliance, Inc. Test Report Number: 303459-TX Rev. 1


14. Band-Edge Measurements

FCC Part 15.209 (b) requires a measurement of spurious emission levels, in particular at the bandedges where the intentional radiator operates. The following screen captures demonstrate compliance of the intentional radiator at the 902-928 MHz band edges, by operating the EUT at the lowest channel, with a continuous data stream of '1010' as the modulating source, and investigating the lower 902 MHz band-edge, and again by operating the EUT at the highest channel, and investigating the higher 928 MHz band-edge.

Screen Capture demonstrating compliance at the Lower Band-Edge of 902 MHz

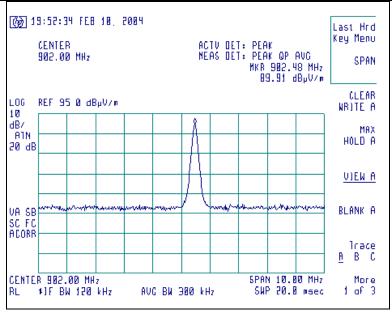

Screen Capture demonstrating compliance at the Higher Band-Edge of 928 MHz

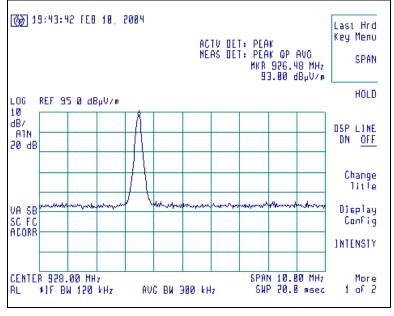

L.S. Compliance, Inc.
Test Report Number: 303459-TX Rev. 1

15. Frequency and Power Stability versus Voltage

The EUT's power output was measured, on channel 3, as the DC voltage provided to the EUT was varied over a +/- 15 % range from a nominal voltage of 10.0 VDC. This test was performed with the EUT in a fixed position with respect to the receiver, with only the DC input voltage changing during the test. The power output was found to vary less than 1 dB, with no frequency change, and no other anomalies or unexpected observable behavior.

Voltage	Measured	Measured
	Power	Frequency
11.5	86.4 dBμV/m	914.5 MHz
10.0	86.3 dBμV/m	914.5 MHz
8.5	86.3 dBμV/m	914.5 MHz

L.S. Compliance, Inc. Page 23 of 24

Appendix A Test Equipment List

Asset #	Manufacturer	Model #	Serial #	Description	Date	Due
AA960008	EMCO	3816/2NM	9701-1057	Line Impedance Stabilization Network	9/03/03	9/03/04
AA960031	HP	119474A	3107A01708	Transient Limiter	8/12/03	8/12/04
AA960063	EMCO	3160-09	9809-1120	18-26 GHz Horn	6/10/03	6/10/04
AA960077	EMCO	93110B	9702-2918	Biconical Antenna	9/02/03	9/02/04
AA960078	EMCO	93146	9701-4855	Log-Periodic Antenna	9/02/03	9/02/04
AA960081	EMCO	3115	6907	Double Ridge Horn Antenna	2/03/04	2/03/04
CC00221C	Agilent	E4407B	US39160256	Spectrum Analyzer	11/04/03	11/04/04
EE960004	EMCO	2090	9607-1164	Device Controller	N/A	N/A
EE960013	HP	8546A	3617A00320	Receiver RF Section	9/04/03	9/04/04
EE960014	HP	85460A	3448A00296	Receiver Pre-Selector	9/04/03	9/04/04
EE960146	Advanced Microwave	WLA622-4	0123001	18-26 GHz Pre-amp	6/10/03	6/10/04
EE960147	Advanced Microwave	WLA612	0123101	5-18 GHz Pre-amp	6/10/03	6/10/04
N/A	LSC	Cable	0011	3 Meter ½" Armored Cable	6/19/03	6/19/04
N/A	LSC	Cable	0038	1 Meter RG 214 Cable	6/19/03	6/19/04
N/A	LSC	Cable	0050	10 Meter RG 214 Cable	6/19/03	6/19/04
N/A	Pasternack	Attenuator	N/A	10 dB Attenuator	6/19/03	6/19/04

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 Meter Chamber, Biconical Antenna	4.24 dB
Radiated Emissions	3 Meter Chamber, Log Periodic Antenna	4.80 dB
Radiated Emissions	10 Meter OATS, Biconical Antenna	4.18 dB
Radiated Emissions	10 Meter OATS, Log Periodic Antenna	3.92 dB
Conducted Emissions	Shielded Room/EMCO LISN	1.60 dB
Radiated Immunity	3 Meter Chamber, 3 Volts/Meter	1.128 Volts/Meter
Conducted Immunity	3 Volt level	1.0 V

L.S. Compliance, Inc. Page 24 of 24

L.S. Compliance, Inc.
Test Report Number: 303459-TX Rev. 1
Prepared For: Goldline Controls