

FCC CERTIFICATION TEST REPORT

For
FCC ID: RO6IZZOHYBRIDA

Report Reference No. : 15FAB08001 11

FCC 2.948 No : 923232

Date of issue : 2016-03-09

Testing Laboratory : ATT Product Service Co., Ltd.

Address : No. 3, ChangLianShan Industrial Park, ChangAn Town,
DongGuan City, GuangDong, China.

Applicant's name : IZZO Golf

Address : 1635 Commons Parkway; Macedon, New York
14502 - 9191.USA

Manufacturer : IZZO Golf

Test specification:


Test item description : IZZO Hybrid

Trade Mark : --

Model/Type reference : IZZO Hybrid


Ratings : I/P: 5Vdc from USB PC input: AC 120V/60Hz;
3.7V for Battery supply;

Tested by

A handwritten signature in black ink, appearing to read 'Lake Hu', written over a horizontal line.

(Lake Hu/Engineer)

Approved by

A handwritten signature in black ink, appearing to read 'King Wang', written over a horizontal line.

(King Wang/EMC Manager)

Table of Contents**Page**

1 . CERTIFICATION	3
2 . SUMMARY OF TEST RESULTS	4
2.1 Description of EUT	4
2.2 MEASUREMENT UNCERTAINTY	4
2.3 DESCRIPTION OF TEST MODES AND ASSISTANT EQUIPMENT FOR TEST	5
2.4 EQUIPMENT USED DURING TESTING:	6
2.5 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	6
3 . EMC EMISSION TEST	7
3.1 CONDUCTED EMISSION MEASUREMENT	7
3.1.1 POWER LINE CONDUCTED EMISSION	7
3.1.2 MEASUREMENT INSTRUMENTS LIST	7
3.1.3 TEST PROCEDURE	8
3.1.4 DEVIATION FROM TEST STANDARD	8
3.1.5 TEST SETUP	8
3.1.6 EUT OPERATING CONDITIONS	8
3.1.7 TEST RESULTS	9
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
3.2.2 MEASUREMENT INSTRUMENTS LIST	15
3.2.3 TEST PROCEDURE	15
3.2.4 DEVIATION FROM TEST STANDARD	15
3.2.5 TEST SETUP	16
3.2.6 EUT OPERATING CONDITIONS	16
3.2.7 TEST RESULTS	17
4 . EUT TEST PHOTO	24
5. EUT Photo	26

1. CERTIFICATION

Testing Laboratory: ATT Product Service Co., Ltd.
Address.....: No. 3, ChangLianShan Industrial Park, ChangAn Town,
DongGuan City, GuangDong, China.

Applicant's name: IZZO Golf
Address.....: 1635 Commons Parkway; Macedon, New York
14502 - 9191.USA
Manufacturer: Same as applicant
Address.....: Same as applicant
Factory.....: Macson Limited
Address.....: No.5,Jun Da Zhong Lu,DongKeng,Dongguan,Guangdong,China

Test specification:

Test item description.....: IZZO Hybrid
Trade Mark: --
Model/Type reference: IZZO Hybrid
Test Sample: IZZO Hybrid
Ratings.....: I/P: 5Vdc from USB PC input: AC 120V/60Hz;
3.7V for Battery supply;

Tested Power: DC 3.7V

Standards: FCC Part 15 Subpart B

The device described above was tested by ATT Product Service Co., Ltd to determine the maximum emission levels emanated from the device and severity levels of the device endure and its performance criterion. The measurement results are contained in this test report and ATT Product Service Co., Ltd assumes full responsibility for the accuracy and completeness of these measurements. This report shows the EUT is technically compliance with the Part 15 Subpart B, ANSI C63.4 official requirements. This report applies to the above sample only and shall not be reproduced in part without written approval of ATT Product Service Co., Ltd.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part 15 B	Conducted Emission	Clause 15.107	PASS	
	Radiated Emission	Clause 15.109	PASS	

Remark: All tests are according to ANSI C63.4-2014.

2.1 Description of EUT

EUT* Name	:	IZZO Hybrid
Model Number	:	IZZO Hybrid
Trade Mark	:	--
EUT function description	:	Please reference user manual of this device
Power supply	:	I/P: 5Vdc from USB PC input: 120V/60Hz; 3.7V for Battery supply
Operation frequency	:	Receive at 1575MHz
module version	:	Module V_B
Antenna Type	:	ceramic antenna

Sample Type	:	Sole production
-------------	---	-----------------

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	2.44	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
R03	ANSI	30MHz ~ 200MHz	V	3.42	
		30MHz ~ 200MHz	H	3.52	
		200MHz ~ 1,000MHz	V	3.52	
		200MHz ~ 1,000MHz	H	3.54	

2.3 DESCRIPTION OF TEST MODES AND ASSISTANT EQUIPMENT FOR TEST

DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	GPS
Mode 1	Data transmission

For Conducted Test	
Final Test Mode	Description
Mode 1	GPS
Mode 1	Data transmission

For Radiated Test	
Final Test Mode	Description
Mode 1	GPS
Mode 1	Data transmission

2.4 EQUIPMENT USED DURING TESTING:

Product Type*	Device	Manufacturer	Model No.	Comments
AE1	PC	Lenovo	M733A	SA13849807
AE2	Mouse	Lenovo	MOEUUO	44F0301
AE3	keyboard	Lenovo	JME7053	2C087729 1.6M shielding
AE4	Monitor	Lenovo	L1961wC	8M04771C2513094
AE5	Printer	Epson	P952B	AXQ0018586

*Note: Use abbreviations:


EUT - Equipment Under Test,

AE - Auxiliary/Associated Equipment, or

SIM - Simulator (Not Subjected to Test)

CABL – Connecting cables

Remark: All support device list above have been approved by FCC DoC.

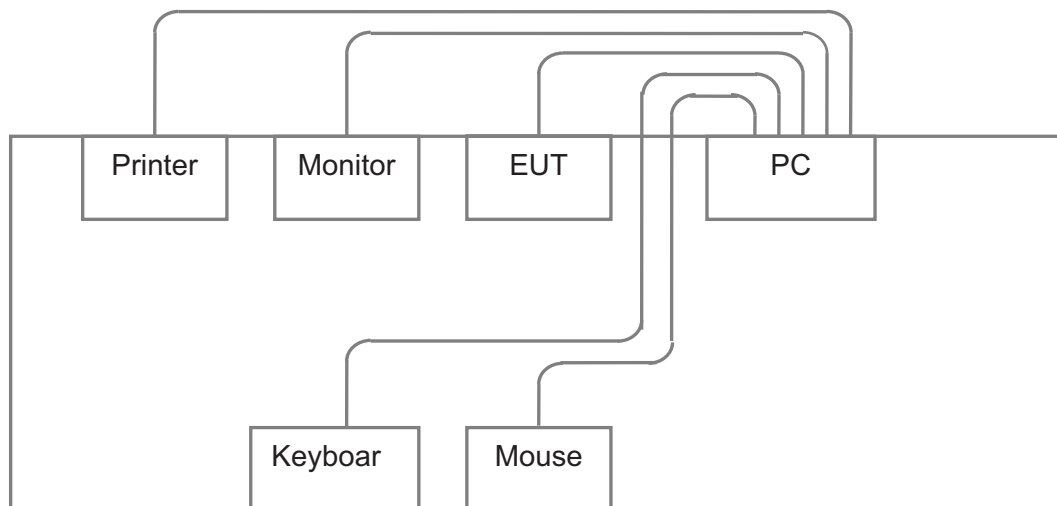2.5 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-0024	12/19/2016
2	EMI Test Receiver	R&S	ESCI	101308	12/19/2016
3	LISN	AFJ	LS16	16011103219	12/19/2016
4	LISN	SCHWARZBECK	NSLK 8127	8127-432	12/19/2016


3.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal reference ground plane and 0.4meters from vertical reference ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation

3.1.5 TEST SETUP

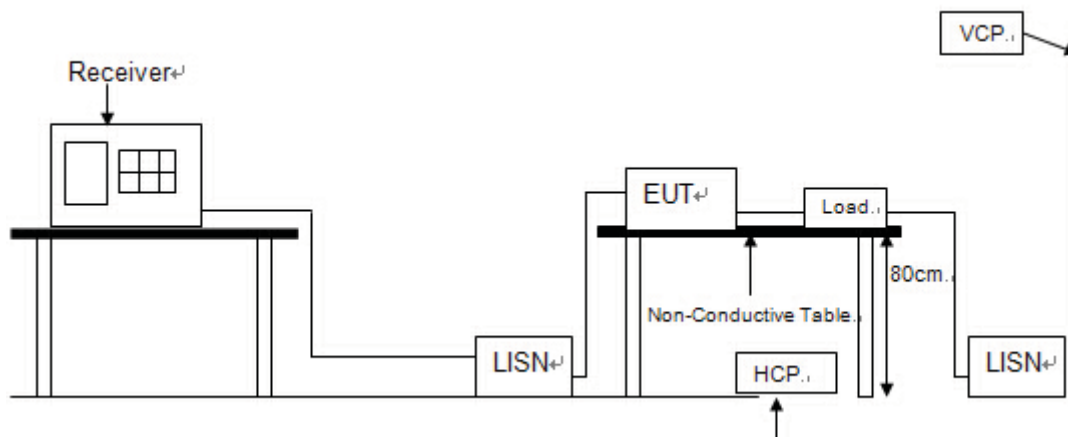

3.1.6 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

3.1.7 TEST RESULTS


EUT :	IZZO Hybrid	Model No. :	IZZO Hybrid
Temperature :	24℃	Relative Humidity :	55%
Pressure :	1008 hPa	Test Power :	120V/60Hz
Test Mode :	GPS/Data transmission		

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz : SPA setting in RBW=10KHz,VBW =10KHz, Sweep. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Sweep. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.
- (4) Measurement result=Reading + Correct.


EUT:	IZZO Hybrid	Model No.:	IZZO Hybrid
Temperature:	24℃	Relative Humidity:	55%
Probe:	L1	Test Power:	120V/60Hz
Standard:	(CE)FCC PART 15 class B_QP	Test Result:	Pass
Test Mode:	GPS	Test By:	Sandy
Note:			

80.0 dBuV

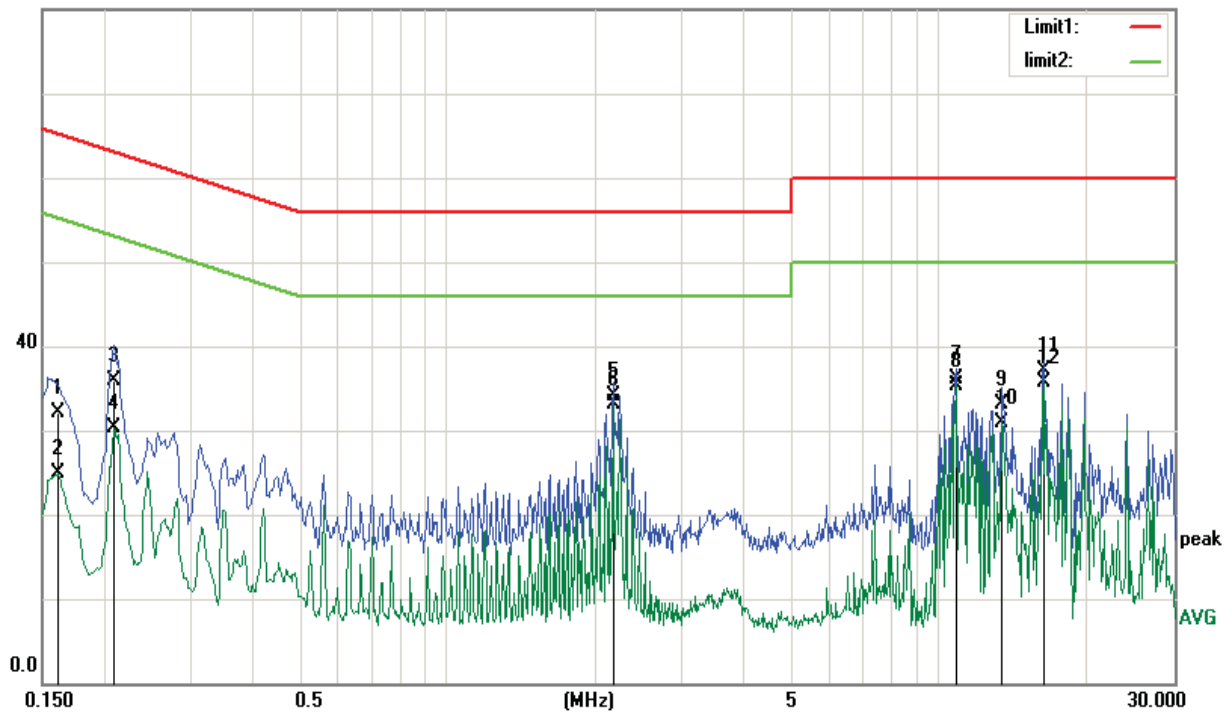

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1620	20.75	11.39	32.14	65.36	-33.22	QP
2	0.1620	13.45	11.39	24.84	55.36	-30.52	AVG
3	0.2099	24.83	11.06	35.89	63.21	-27.32	QP
4	0.2099	19.31	11.06	30.37	53.21	-22.84	AVG
5	2.1739	24.08	10.12	34.20	56.00	-21.80	QP
6	2.1739	23.05	10.12	33.17	46.00	-12.83	AVG
7	10.7939	26.00	10.15	36.15	60.00	-23.85	QP
8	10.7939	25.20	10.15	35.35	50.00	-14.65	AVG
9	13.3579	22.93	10.15	33.08	60.00	-26.92	QP
10	13.3579	20.73	10.15	30.88	50.00	-19.12	AVG
11	16.2299	26.96	10.16	37.12	60.00	-22.88	QP
12	16.2299	25.51	10.16	35.67	50.00	-14.33	AVG


EUT:	IZZO Hybrid	Model No.:	IZZO Hybrid
Temperature:	24°C	Relative Humidity:	55%
Probe:	N	Test Power:	120V/60Hz
Standard:	(CE)FCC PART 15 class B_QP	Test Result:	Pass
Test Mode:	GPS	Test By:	Sandy
Note:			

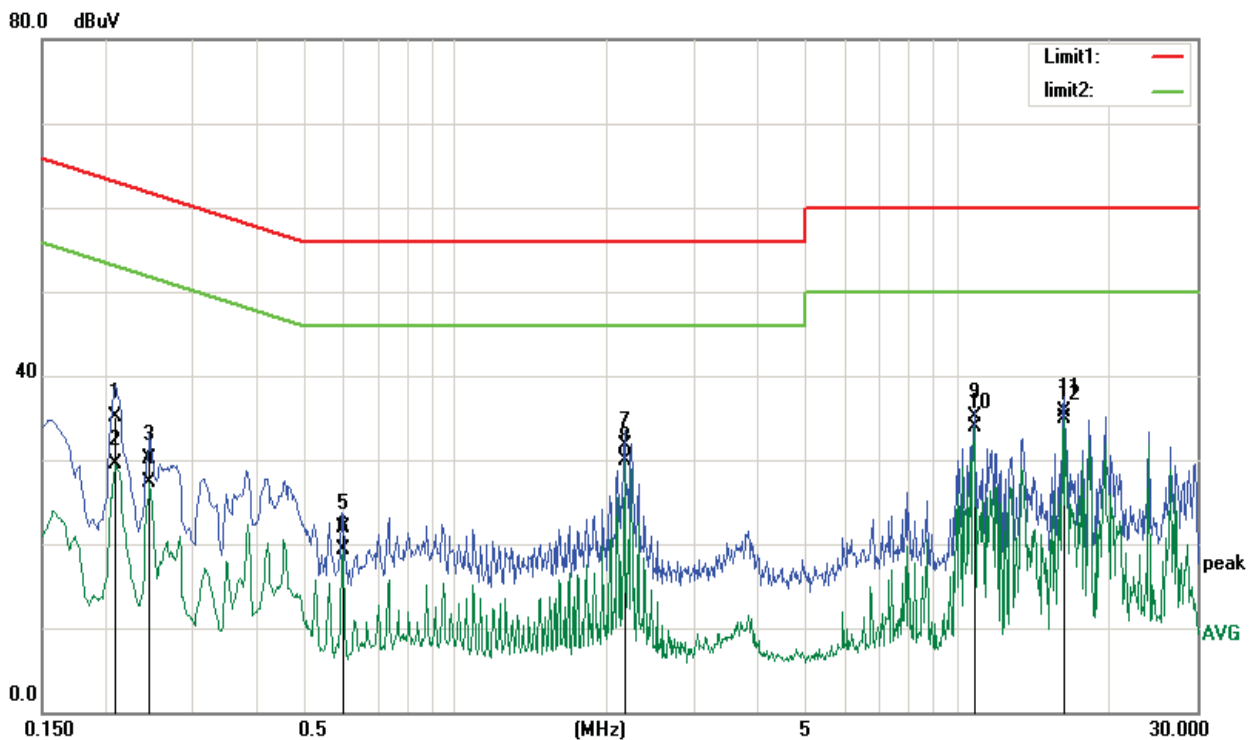

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2099	24.06	11.06	35.12	63.21	-28.09	QP
2	0.2099	18.48	11.06	29.54	53.21	-23.67	AVG
3	0.2459	19.24	10.81	30.05	61.89	-31.84	QP
4	0.2459	16.46	10.81	27.27	51.89	-24.62	AVG
5	0.5978	11.74	10.15	21.89	56.00	-34.11	QP
6	0.5978	9.09	10.15	19.24	46.00	-26.76	AVG
7	2.1699	21.63	10.12	31.75	56.00	-24.25	QP
8	2.1699	19.75	10.12	29.87	46.00	-16.13	AVG
9	10.7939	24.89	10.15	35.04	60.00	-24.96	QP
10	10.7939	23.76	10.15	33.91	50.00	-16.09	AVG
11	16.2299	25.53	10.16	35.69	60.00	-24.31	QP
12	16.2299	24.76	10.16	34.92	50.00	-15.08	AVG


EUT:	IZZO Hybrid	Model No.:	IZZO Hybrid
Temperature:	24°C	Relative Humidity:	55%
Probe:	L1	Test Power:	120V/60Hz
Standard:	(CE)FCC PART 15 class B_QP	Test Result:	Pass
Test Mode:	Data transmission	Test By:	Sandy
Note:			

80.0 dBuV

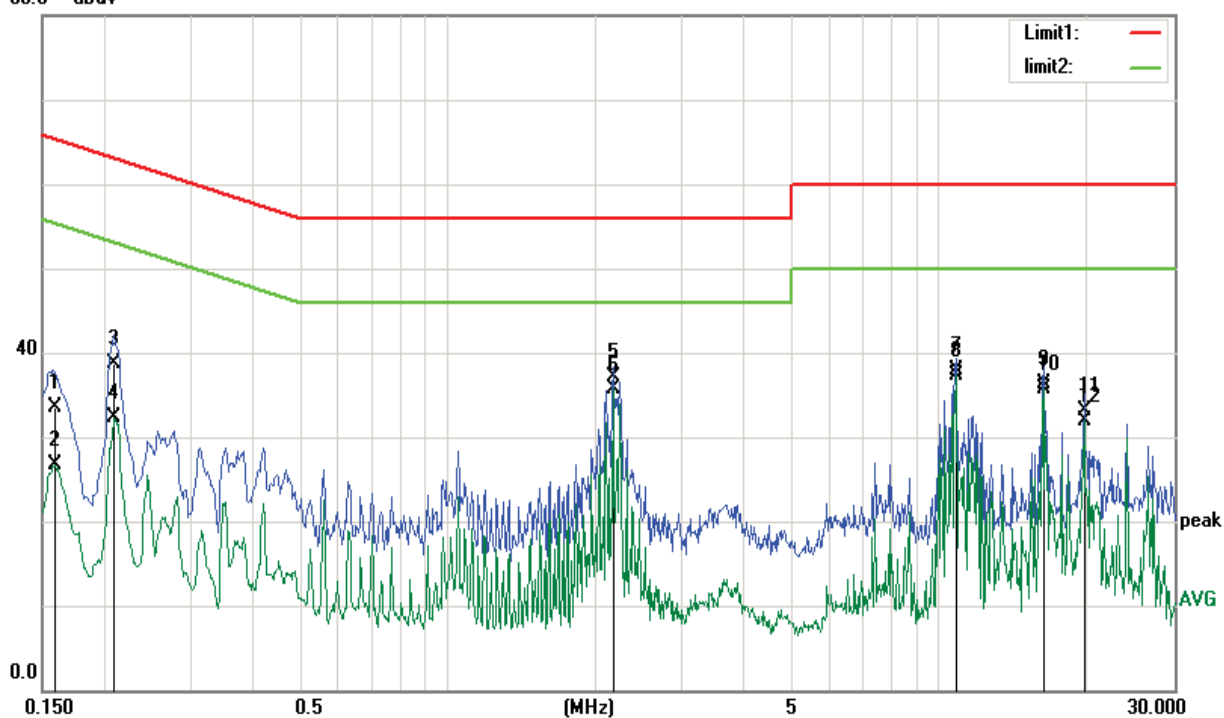

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1590	22.18	11.41	33.59	65.51	-31.92	QP
2	0.1590	15.22	11.41	26.63	55.51	-28.88	AVG
3	0.2099	27.65	11.06	38.71	63.21	-24.50	QP
4	0.2099	21.31	11.06	32.37	53.21	-20.84	AVG
5	2.1739	27.00	10.12	37.12	56.00	-18.88	QP
6	2.1739	25.55	10.12	35.67	46.00	-10.33	AVG
7	10.7939	27.84	10.15	37.99	60.00	-22.01	QP
8	10.7939	27.20	10.15	37.35	50.00	-12.65	AVG
9	16.2299	26.08	10.16	36.24	60.00	-23.76	QP
10	16.2299	25.51	10.16	35.67	50.00	-14.33	AVG
11	19.7099	22.99	10.16	33.15	60.00	-26.85	QP
12	19.7099	21.76	10.16	31.92	50.00	-18.08	AVG

EUT:	IZZO Hybrid	Model No.:	IZZO Hybrid
Temperature:	24°C	Relative Humidity:	55%
Probe:	N	Test Power:	120V/60Hz
Standard:	(CE)FCC PART 15 class B_QP	Test Result:	Pass
Test Mode:	Data transmission	Test By:	Sandy
Note:			

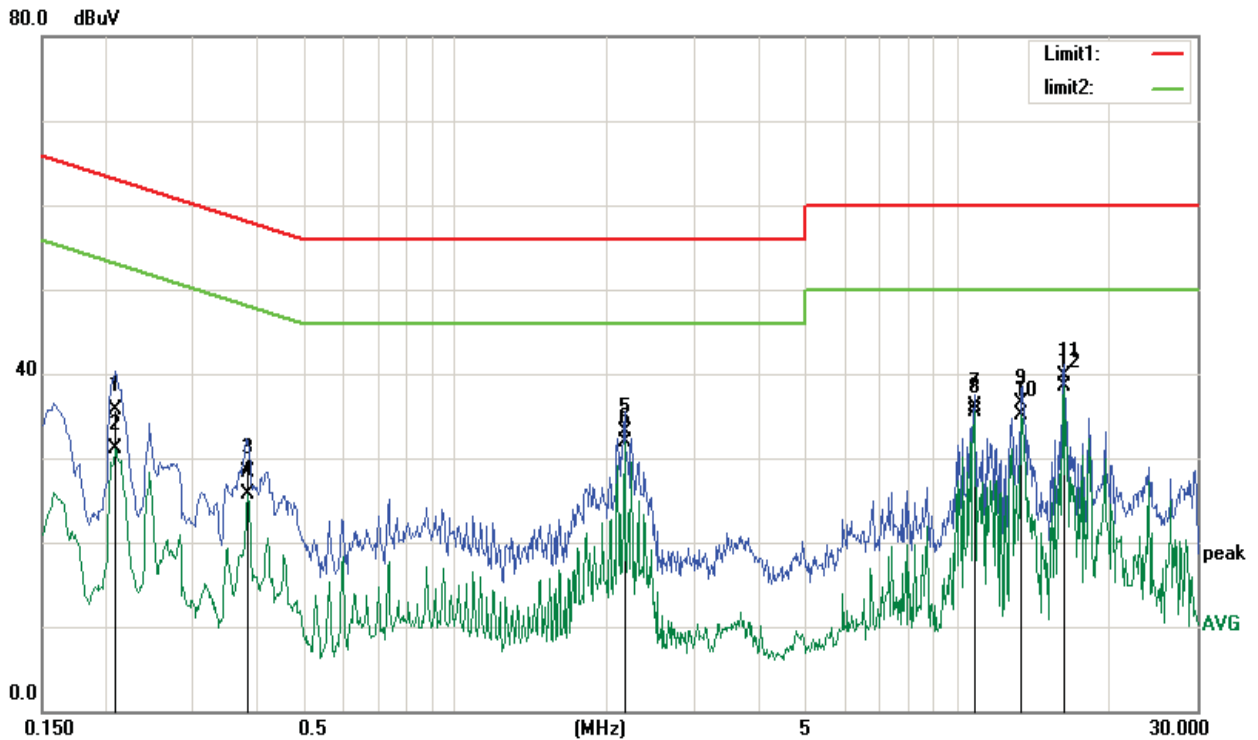

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2099	24.69	11.06	35.75	63.21	-27.46	QP
2	0.2099	19.98	11.06	31.04	53.21	-22.17	AVG
3	0.3860	18.05	10.33	28.38	58.15	-29.77	QP
4	0.3860	15.41	10.33	25.74	48.15	-22.41	AVG
5	2.1699	23.04	10.12	33.16	56.00	-22.84	QP
6	2.1699	21.75	10.12	31.87	46.00	-14.13	AVG
7	10.7939	25.99	10.15	36.14	60.00	-23.86	QP
8	10.7939	25.26	10.15	35.41	50.00	-14.59	AVG
9	13.3579	26.36	10.15	36.51	60.00	-23.49	QP
10	13.3579	24.90	10.15	35.05	50.00	-14.95	AVG
11	16.2299	29.51	10.16	39.67	60.00	-20.33	QP
12	16.2299	28.26	10.16	38.42	50.00	-11.58	AVG

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

FREQUENCY RANGE OF RADIATED MEASUREMENT (For FCC)

☒ FCC Class B Limit at 3m

Frequency	Distance	Field Strength	
MHz	Meter	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0

Frequency range GHz	Average limit $\text{dB}(\mu\text{V/m})$	Peak limit $\text{dB}(\mu\text{V/m})$
Above 1000	54	74

3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	SCHWARZBECK	VULB9168	VULB9168-192	12/19/2016
2	Pre-Amplifier	HP	8447F	3113A05680	12/19/2016
3	EMI Test Receiver	R&S	ESCI	101307	12/19/2016
4	Spectrum Analyzer	Agilent	E4407B	US40240708	07/09/2016
5	Horn Antenna	Schwarzbeck	BBHA 9120D	BBHA 9120D 1065	12/19/2016
6	Pre-Amplifier	CY	EMC011830	980136	12/19/2016
7	Turn Table	UC	UC3000	N/A	N/A
8	Antenna Mast	UC	UC3000	N/A	N/A

Remark: " N/A" denotes No Model No. / Serial No. and No Calibration specified.


3.2.3 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation

3.2.5 TEST SETUP

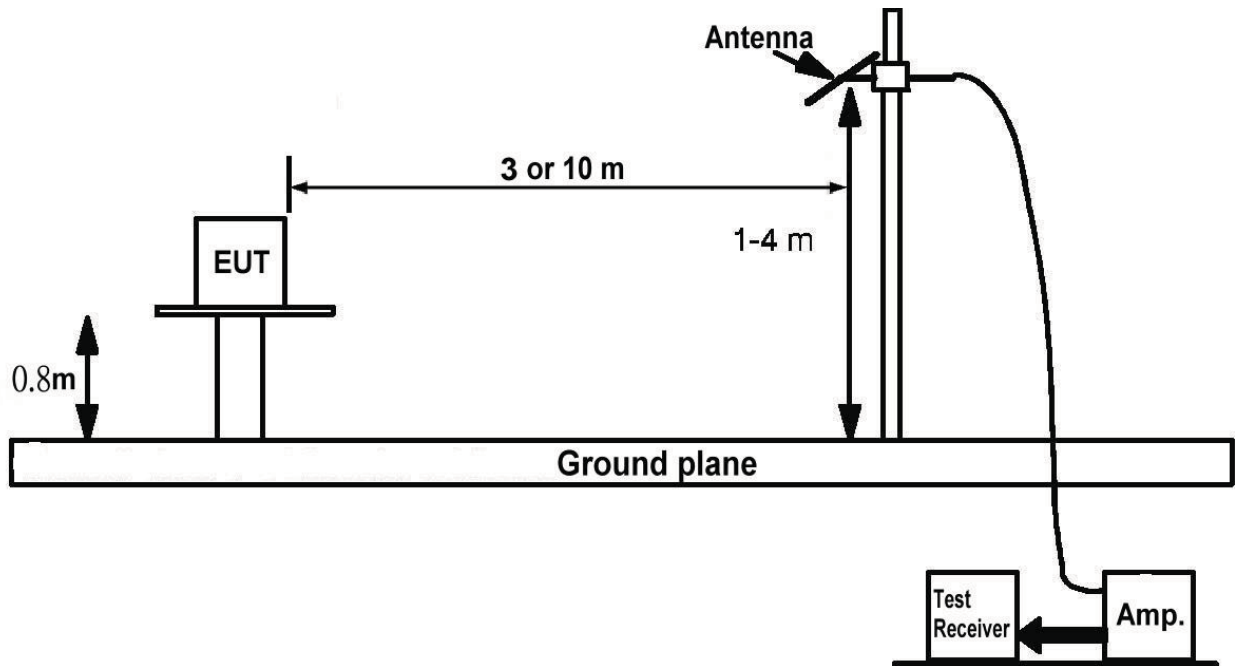

3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.2** Unless otherwise a special operating condition is specified in the follows during the testing.


3.2.7 TEST RESULTS

EUT :	IZZO Hybrid	Model No. :	IZZO Hybrid
Temperature :	24℃	Relative Humidity :	55%
Pressure :	1009 hPa	Test Power :	3.7Vd.c
Test Mode :	GPS/Data transmission		

Remark :


- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Sweep. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note 』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.
- (5) Measurement result=Reading + Correct.

EUT:	IZZO Hybrid	Model No.:	IZZO Hybrid
Temperature:	24℃	Relative Humidity:	55%
Distance:	3m	Test Power:	3.7Vd.c
Polarization:	Horizontal	Test Result:	Pass
Standard:	(RE)FCC PART 15 class B 3m	Test By:	Sandy
Test Mode:	GPS		
Note:			

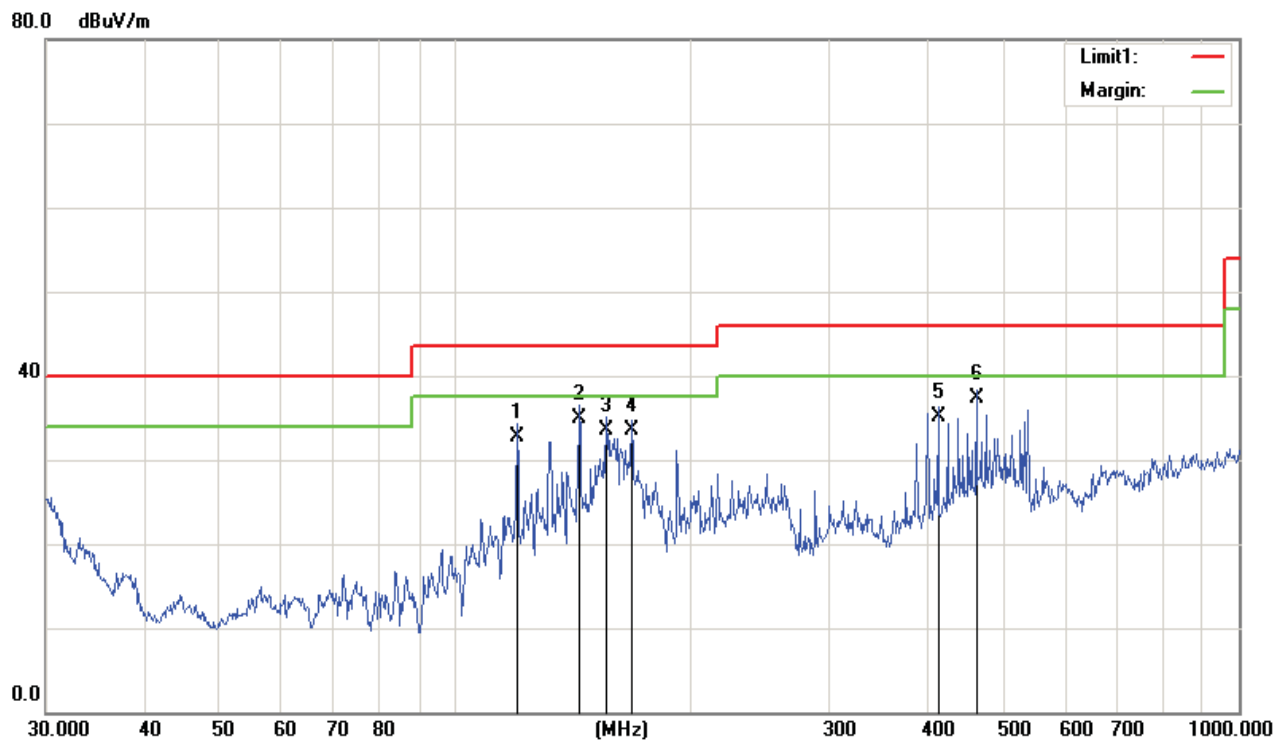

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	119.8555	46.34	-13.70	32.64	43.50	-10.86	QP
2	143.8294	47.18	-12.33	34.85	43.50	-8.65	QP
3	155.9100	44.89	-11.40	33.49	43.50	-10.01	QP
4	167.8242	44.83	-11.26	33.57	43.50	-9.93	QP
5	413.2706	39.98	-4.87	35.11	46.00	-10.89	QP
6	462.3455	39.68	-2.28	37.40	46.00	-8.60	QP


EUT:	IZZO Hybrid	Model No.:	IZZO Hybrid
Temperature:	24℃	Relative Humidity:	55%
Distance:	3m	Test Power:	3.7Vd.c
Polarization:	Vertical	Test Result:	Pass
Standard:	(RE)FCC PART 15 class B 3m	Test By:	Sandy
Test Mode:	GPS		
Note:			

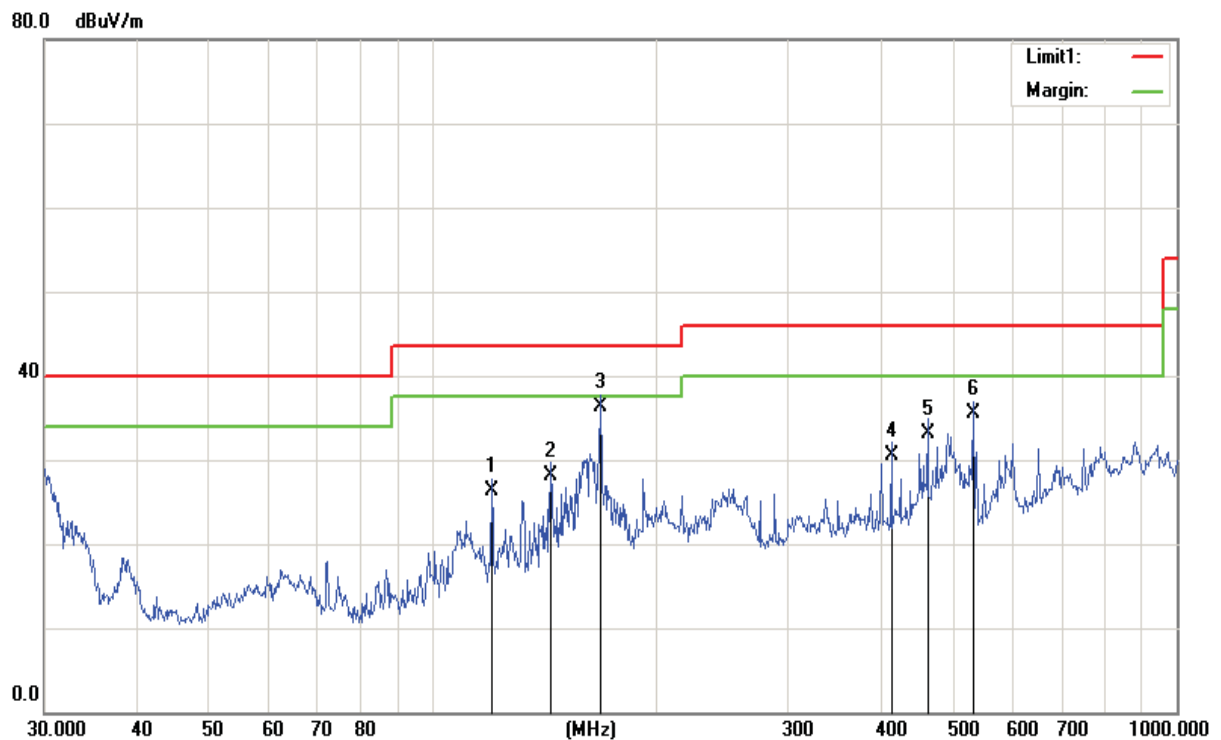

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	119.8555	37.99	-11.64	26.35	43.50	-17.15	QP
2	143.8294	41.24	-13.10	28.14	43.50	-15.36	QP
3	167.8242	44.48	-8.26	36.22	43.50	-7.28	QP
4	413.2706	35.08	-4.57	30.51	46.00	-15.49	QP
5	462.3455	35.84	-2.69	33.15	46.00	-12.85	QP
6	531.9634	35.82	-0.26	35.56	46.00	-10.44	QP

EUT:	IZZO Hybrid	Model No.:	IZZO Hybrid
Temperature:	24°C	Relative Humidity:	55%
Distance:	3m	Test Power:	3.7Vd.c
Polarization:	Horizontal	Test Result:	Pass
Standard:	(RE)FCC PART 15 class B 3m	Test By:	Sandy
Test Mode:	Data transmission		
Note:			


80.0 dBuV/m

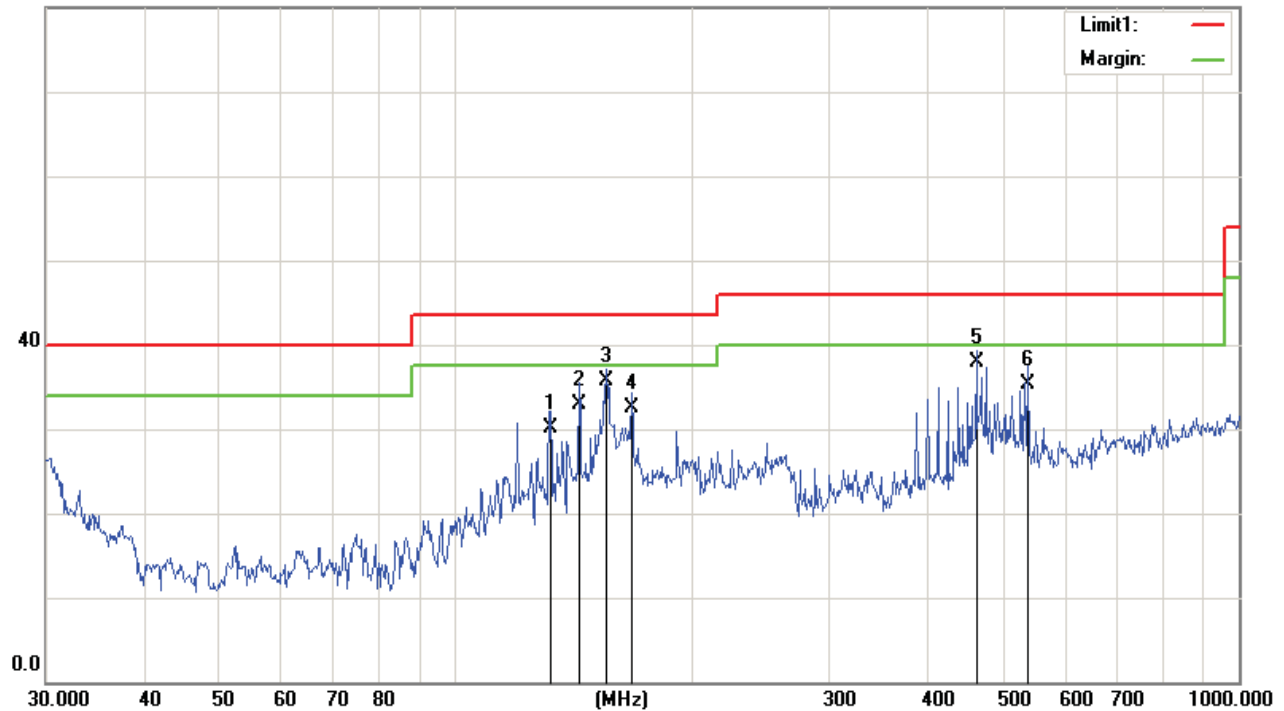

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	132.2204	42.50	-12.39	30.11	43.50	-13.39	QP
2	143.8291	45.20	-12.33	32.87	43.50	-10.63	QP
3	155.9096	47.09	-11.40	35.69	43.50	-7.81	QP
4	167.8240	43.72	-11.26	32.46	43.50	-11.04	QP
5	462.3455	40.13	-2.28	37.85	46.00	-8.15	QP
6	537.5891	35.53	-0.26	35.27	46.00	-10.73	QP

EUT:	IZZ0 Hybrid	Model No.:	IZZ0 Hybrid
Temperature:	24°C	Relative Humidity:	55%
Distance:	3m	Test Power:	3.7Vd.c
Polarization:	Vertical	Test Result:	Pass
Standard:	(RE)FCC PART 15 class B 3m	Test By:	Sandy
Test Mode:	Data transmission		
Note:			


80.0 dBuV/m

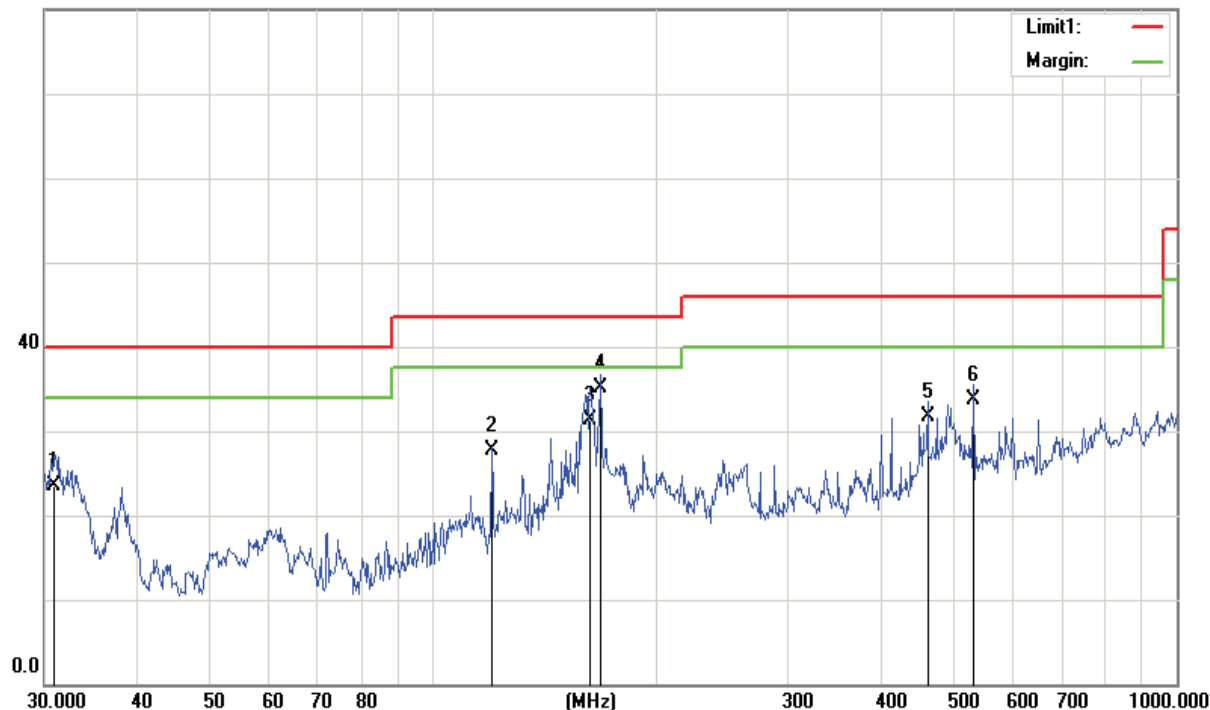

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.8535	32.66	-9.20	23.46	40.00	-16.54	QP
2	119.8555	39.38	-11.64	27.74	43.50	-15.76	QP
3	162.6106	40.72	-9.51	31.21	43.50	-12.29	QP
4	167.8240	43.34	-8.26	35.08	43.50	-8.42	QP
5	462.3455	34.38	-2.69	31.69	46.00	-14.31	QP
6	531.9633	34.01	-0.26	33.75	46.00	-12.25	QP

EUT:	IZZO Hybrid	Model No.:	IZZO Hybrid
Temperature:	24℃	Relative Humidity:	55%
Distance:	3m	Test Power:	3.7Vd.c
Polarization:	Vertical	Test Result:	Pass
Standard:	(RE)FCC PART 15 class B 3m 1-6G PK	Test By:	Sandy
Test Mode:	Data transmission		
Note:			


80.0 dBuV/m

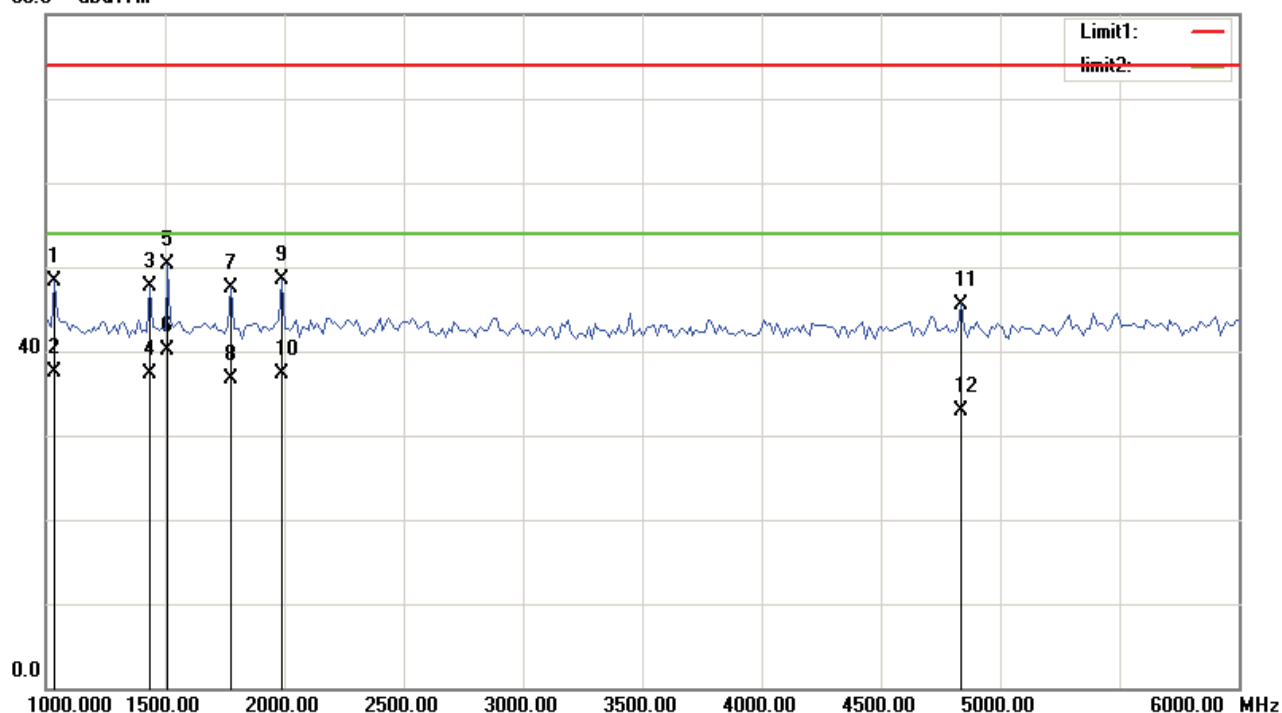

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1037.500	52.93	-4.71	48.22	74.00	-25.78	peak
2	1037.500	42.30	-4.71	37.59	54.00	-16.41	AVG
3	1437.500	51.31	-3.66	47.65	74.00	-26.35	peak
4	1437.500	40.90	-3.66	37.24	54.00	-16.76	AVG
5	1512.500	54.01	-3.76	50.25	74.00	-23.75	peak
6	1512.500	43.91	-3.76	40.15	54.00	-13.85	AVG
7	1775.000	51.06	-3.46	47.60	74.00	-26.40	peak
8	1775.000	40.21	-3.46	36.75	54.00	-17.25	AVG
9	1987.500	50.88	-2.42	48.46	74.00	-25.54	peak
10	1987.500	39.73	-2.42	37.31	54.00	-16.69	AVG
11	4837.500	39.46	6.14	45.60	74.00	-28.40	peak
12	4837.500	26.78	6.14	32.92	54.00	-21.08	AVG

EUT:	IZZO Hybrid	Model No.:	IZZO Hybrid
Temperature:	24°C	Relative Humidity:	55%
Distance:	3m	Test Power:	3.7Vd.c
Polarization:	Horizontal	Test Result:	Pass
Standard:	(RE)FCC PART 15 class B 3m 1-6G PK	Test By:	Sandy
Test Mode:	Data transmission		
Note:			

80.0 dBuV/m

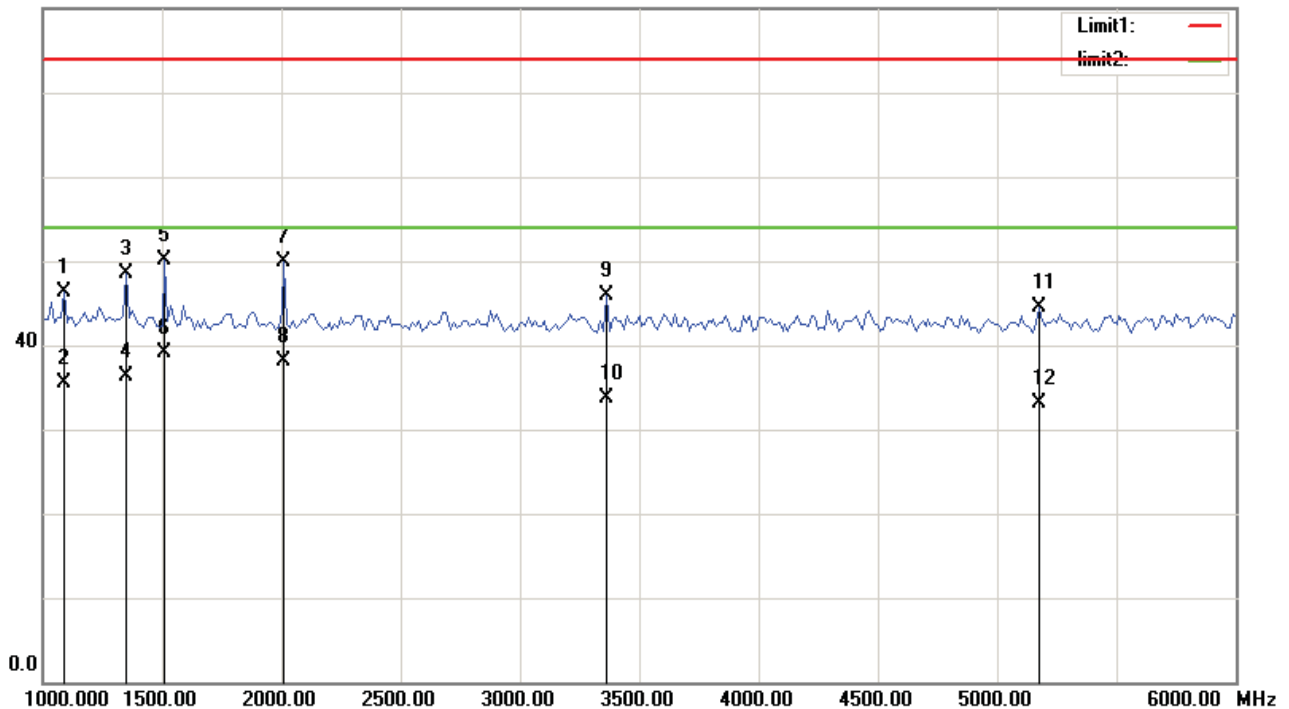


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1087.500	50.85	-4.55	46.30	74.00	-27.70	peak
2	1087.500	40.01	-4.55	35.46	54.00	-18.54	AVG
3	1350.000	52.19	-3.75	48.44	74.00	-25.56	peak
4	1350.000	40.04	-3.75	36.29	54.00	-17.71	AVG
5	1512.500	53.88	-3.76	50.12	74.00	-23.88	peak
6	1512.500	42.90	-3.76	39.14	54.00	-14.86	AVG
7	2012.500	52.15	-2.31	49.84	74.00	-24.16	peak
8	2012.500	40.36	-2.31	38.05	54.00	-15.95	AVG
9	3362.500	43.56	2.39	45.95	74.00	-28.05	peak
10	3362.500	31.25	2.39	33.64	54.00	-20.36	AVG
11	5175.000	37.59	6.90	44.49	74.00	-29.51	peak
12	5175.000	26.22	6.90	33.12	54.00	-20.88	AVG


4. EUT TEST PHOTO

Conducted Measurement Photos







Radiated Measurement Photos


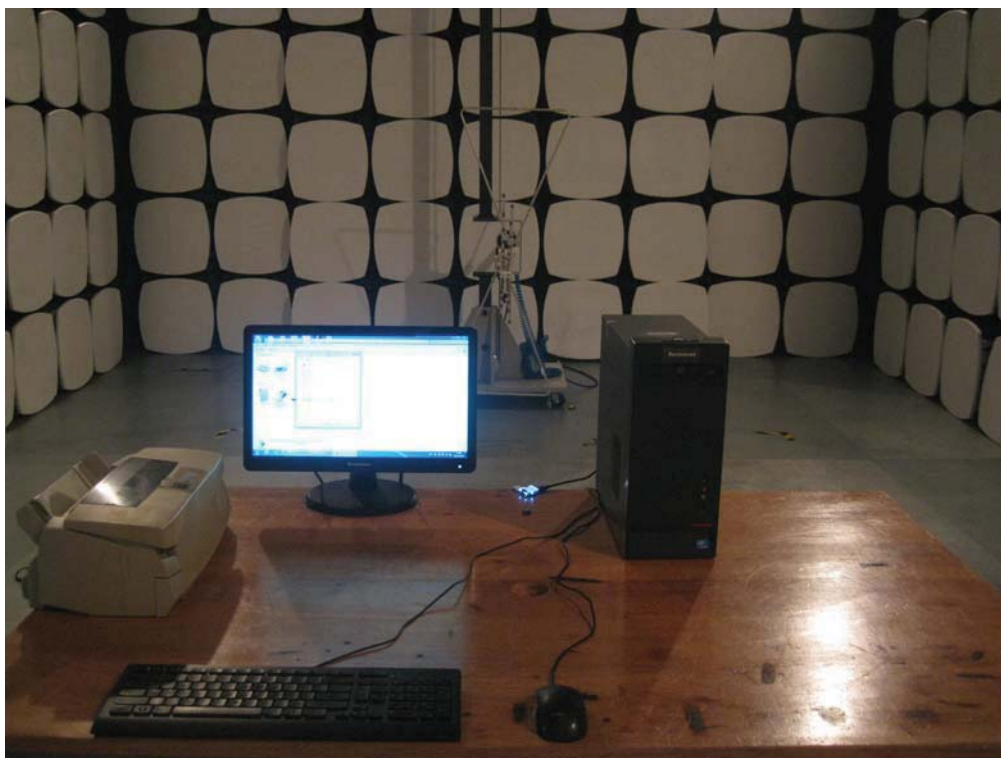



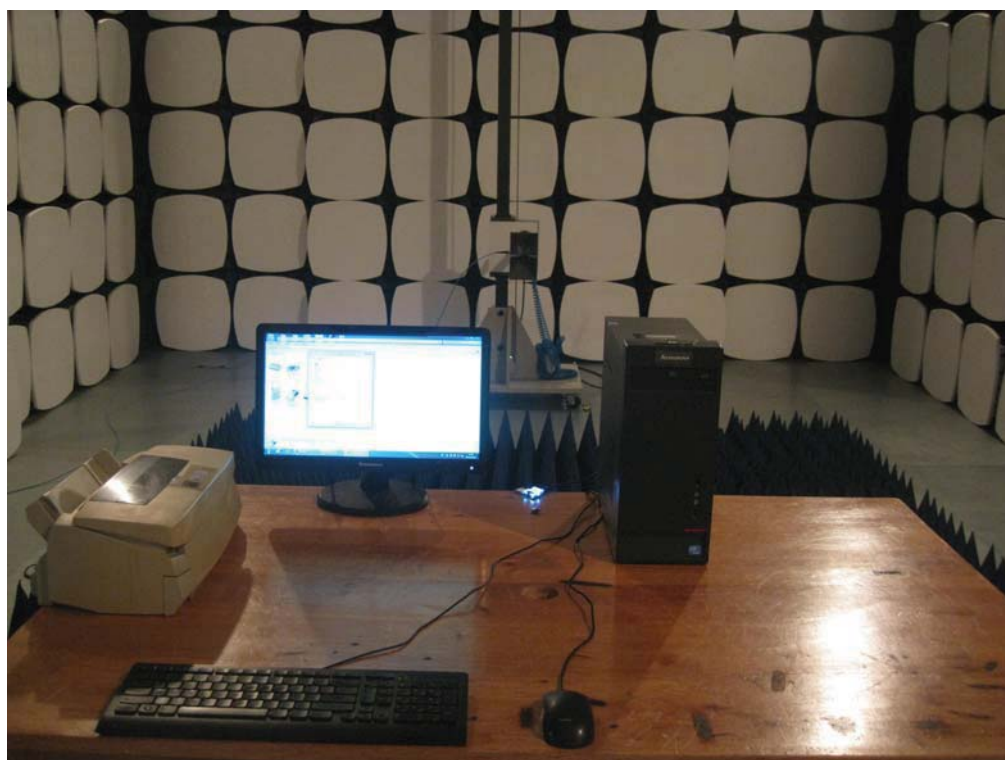




5. EUT Photo

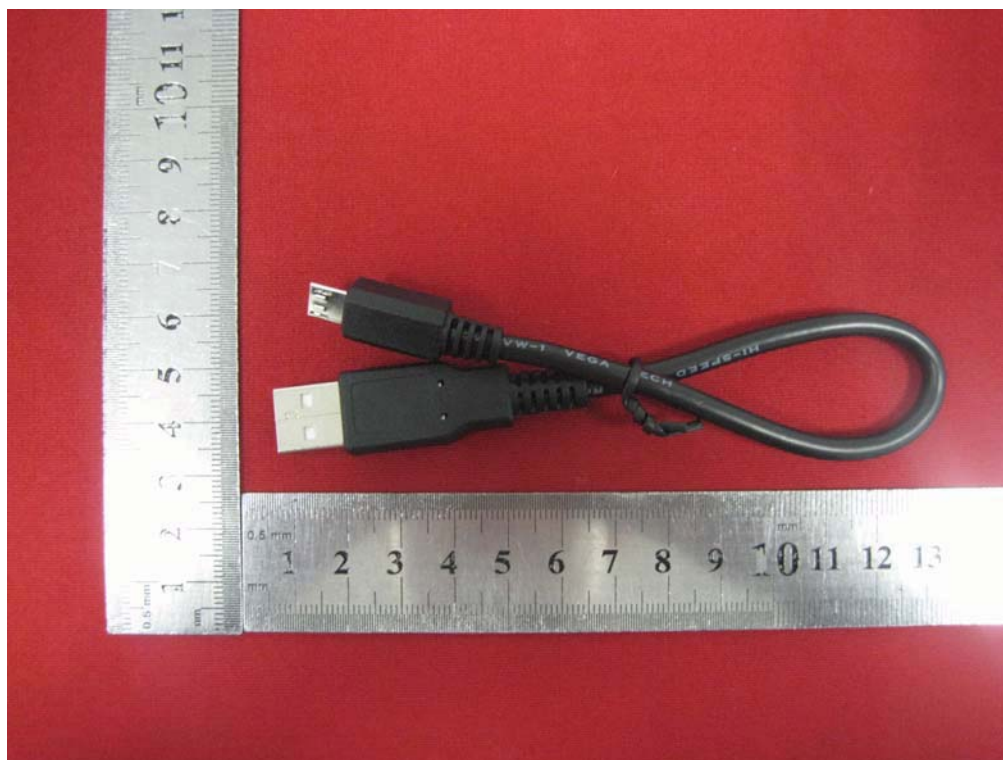
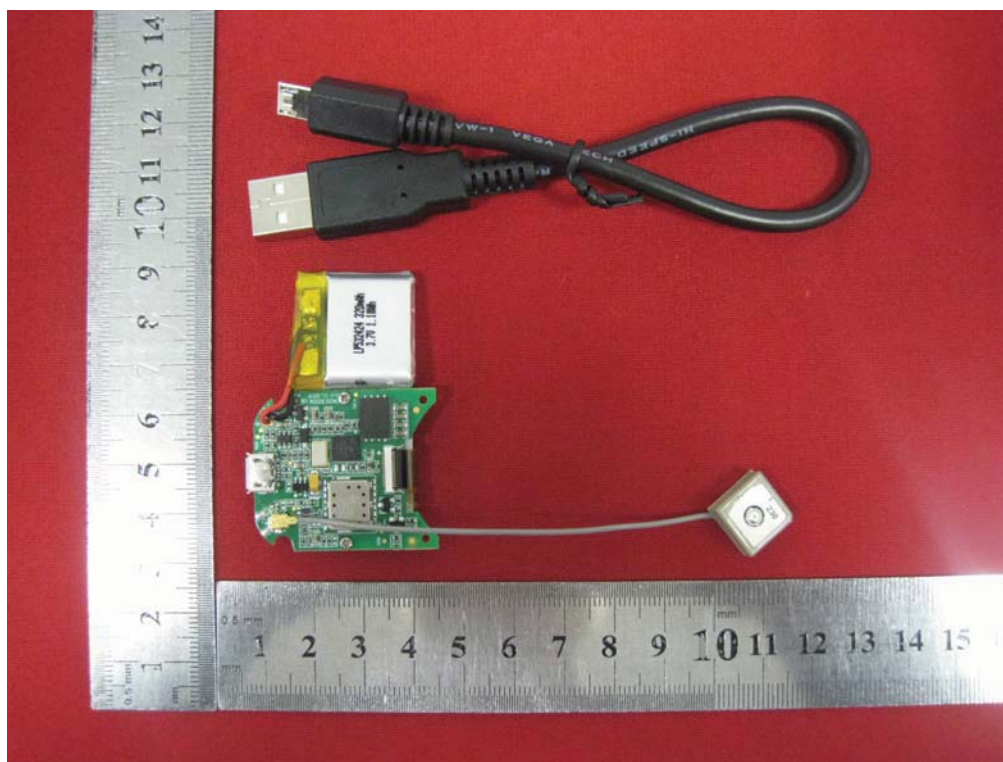


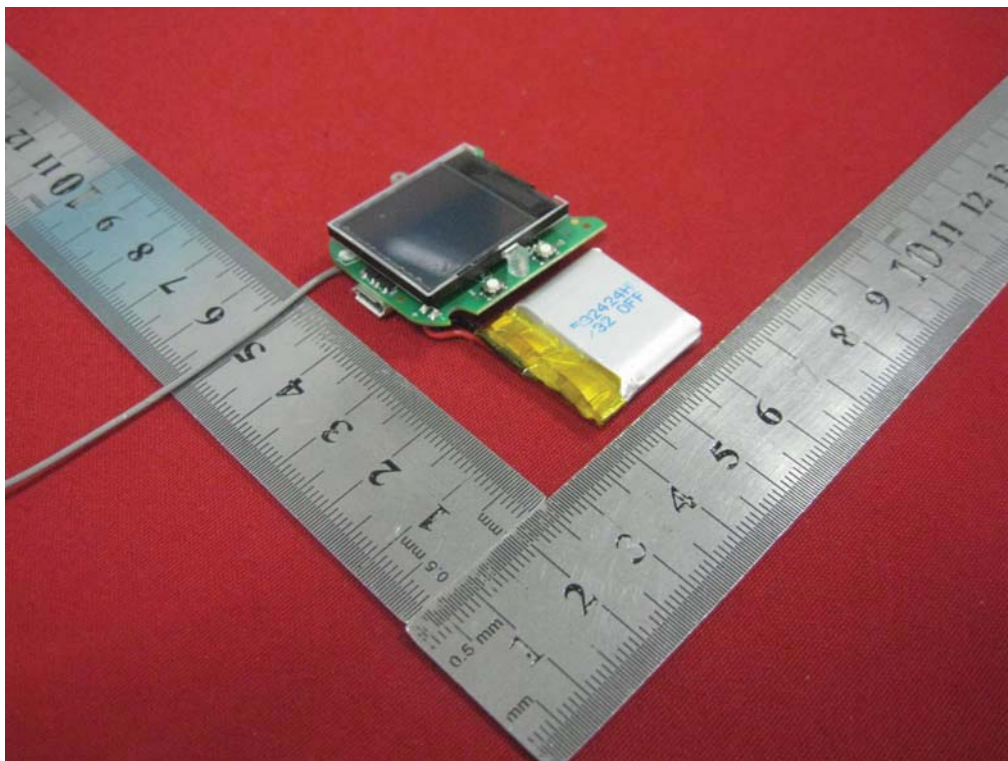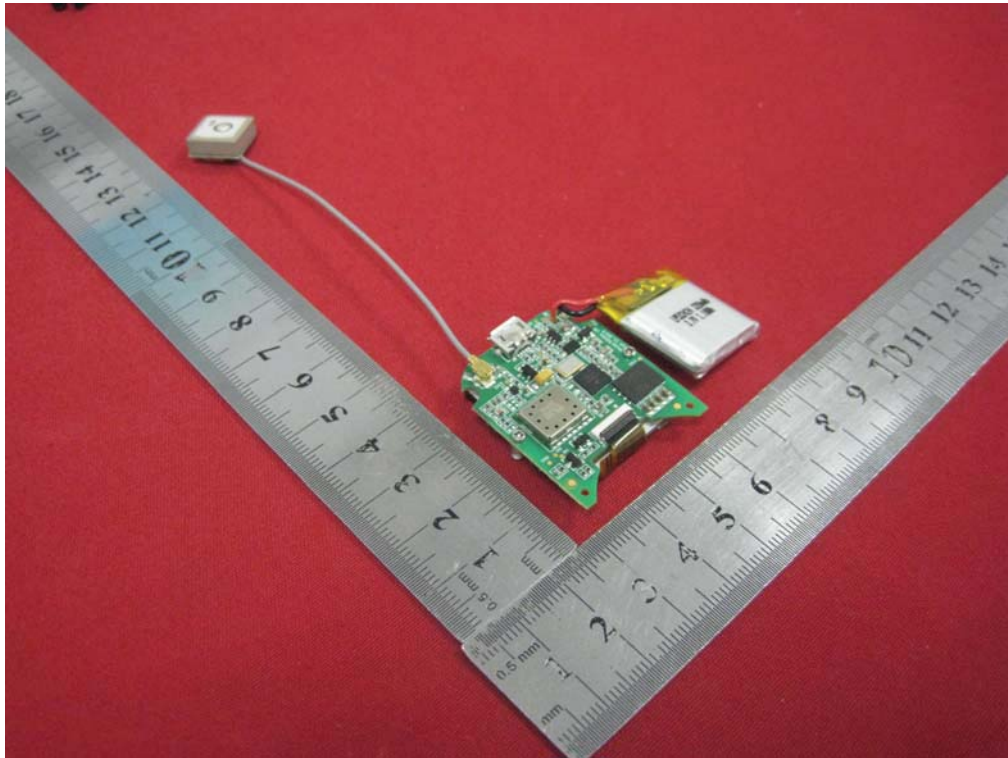


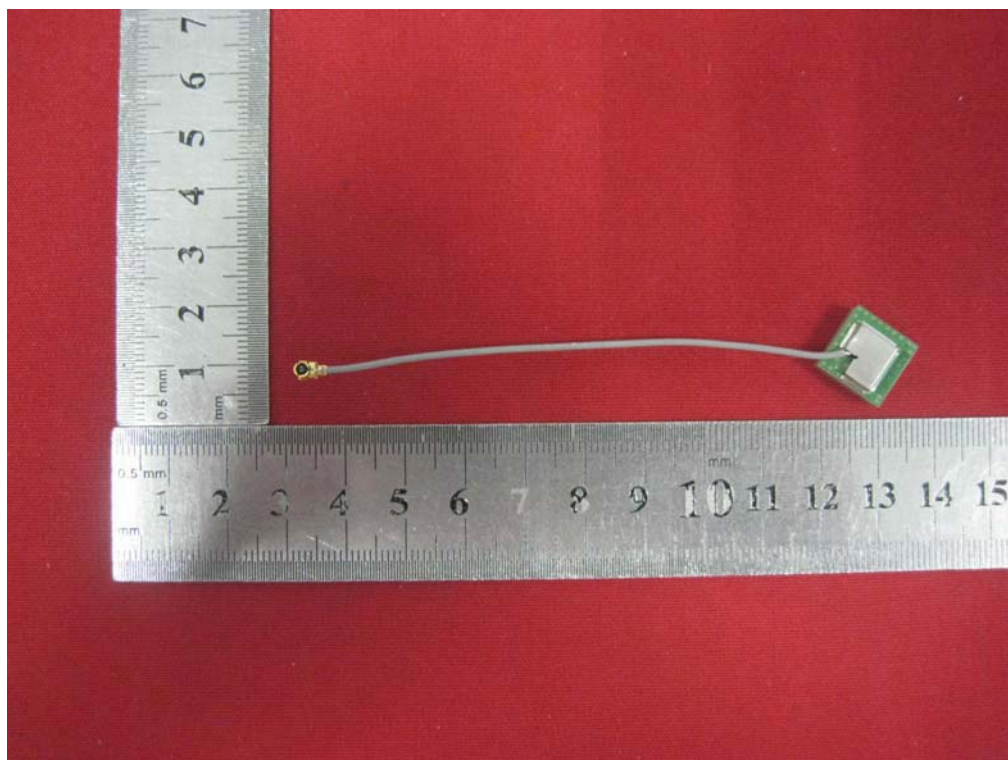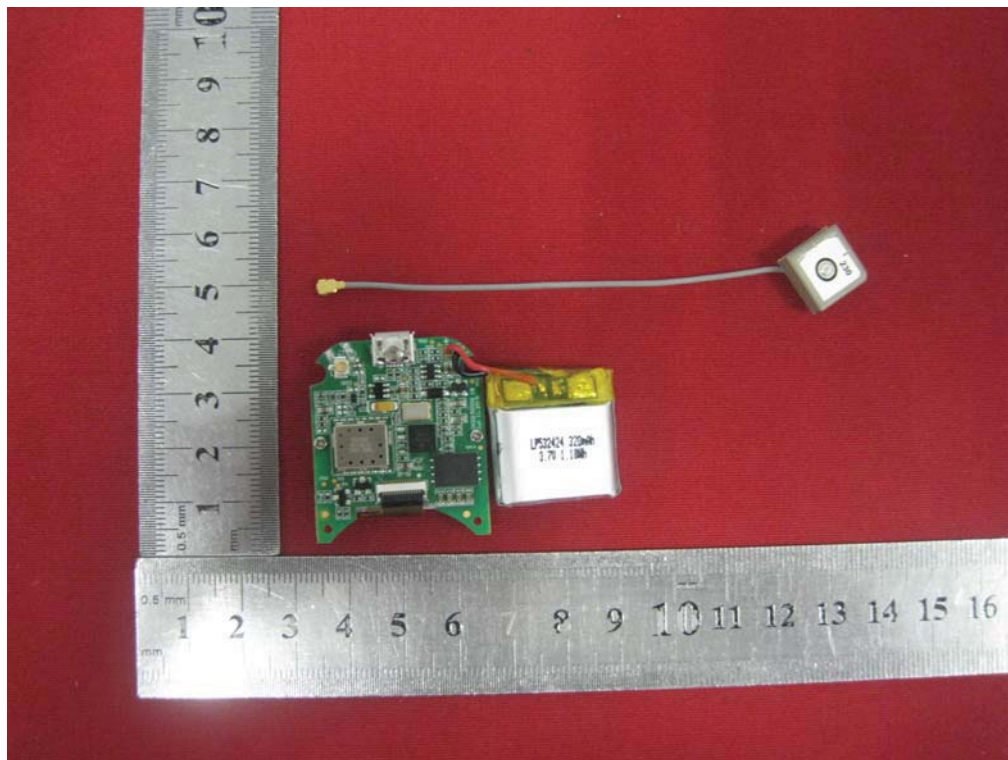

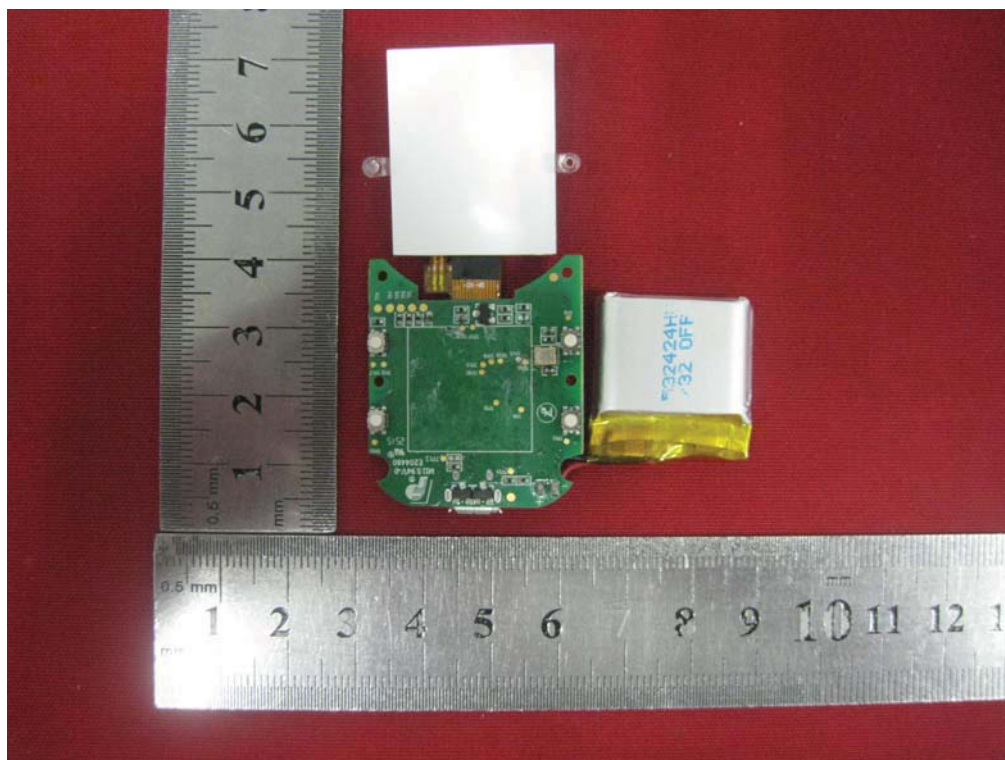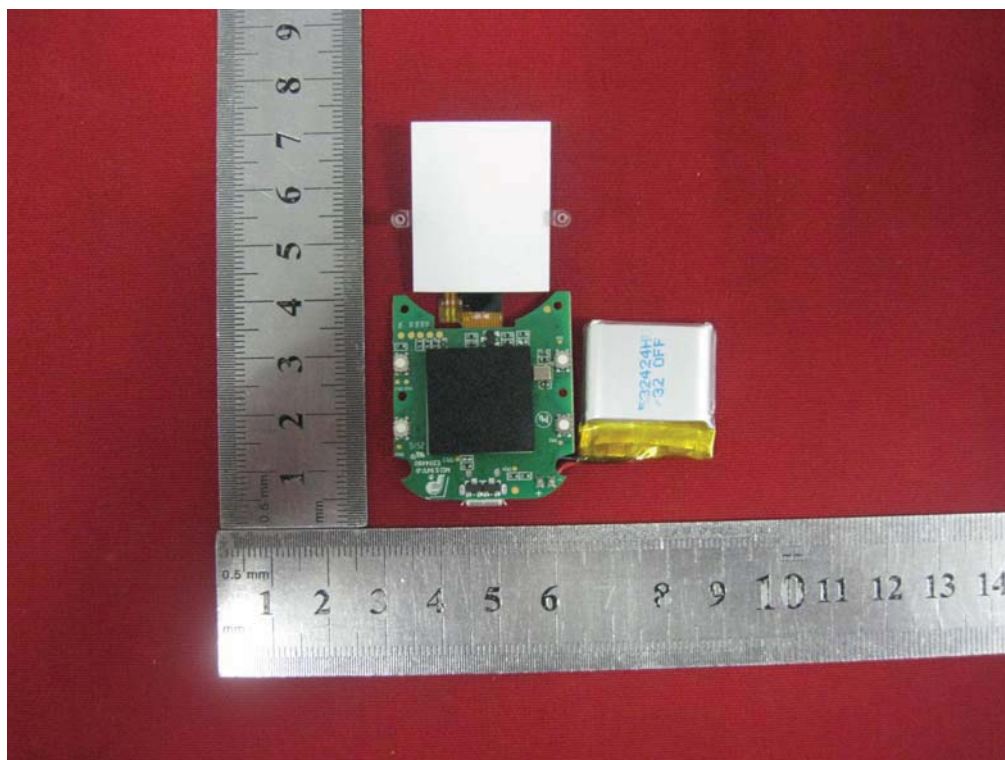

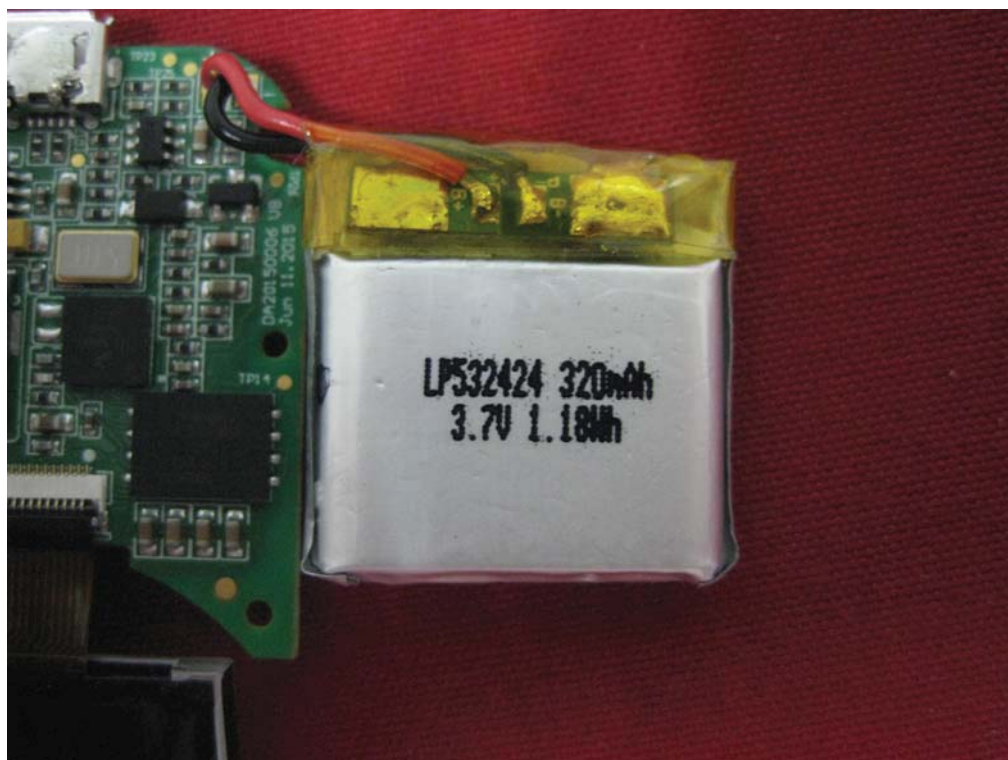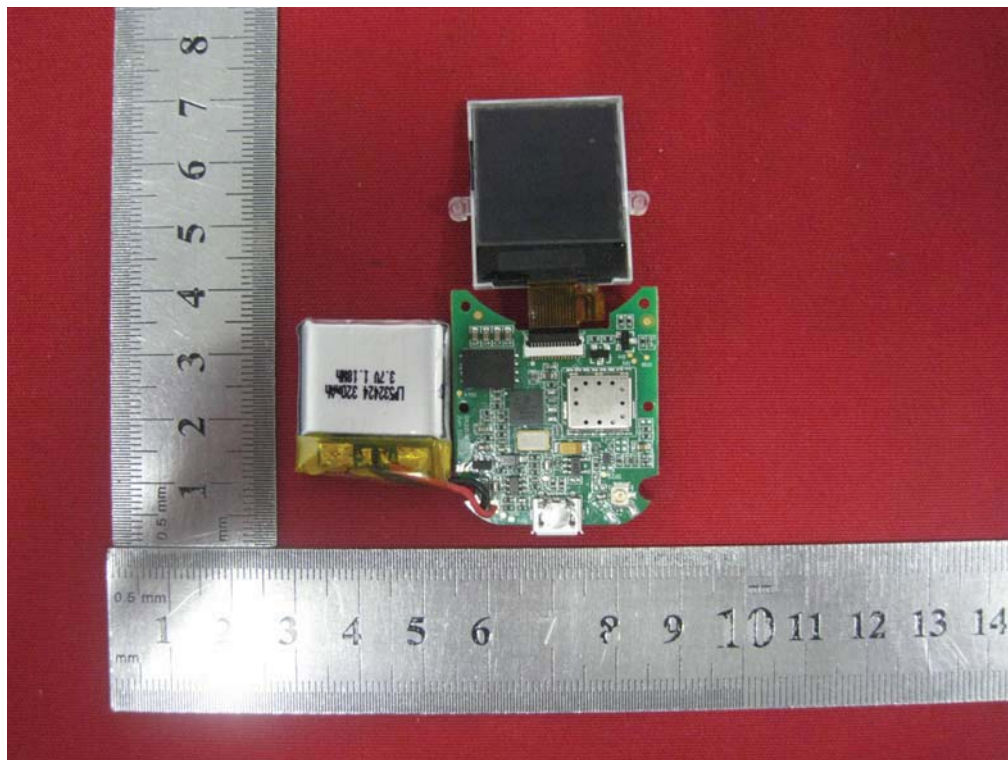

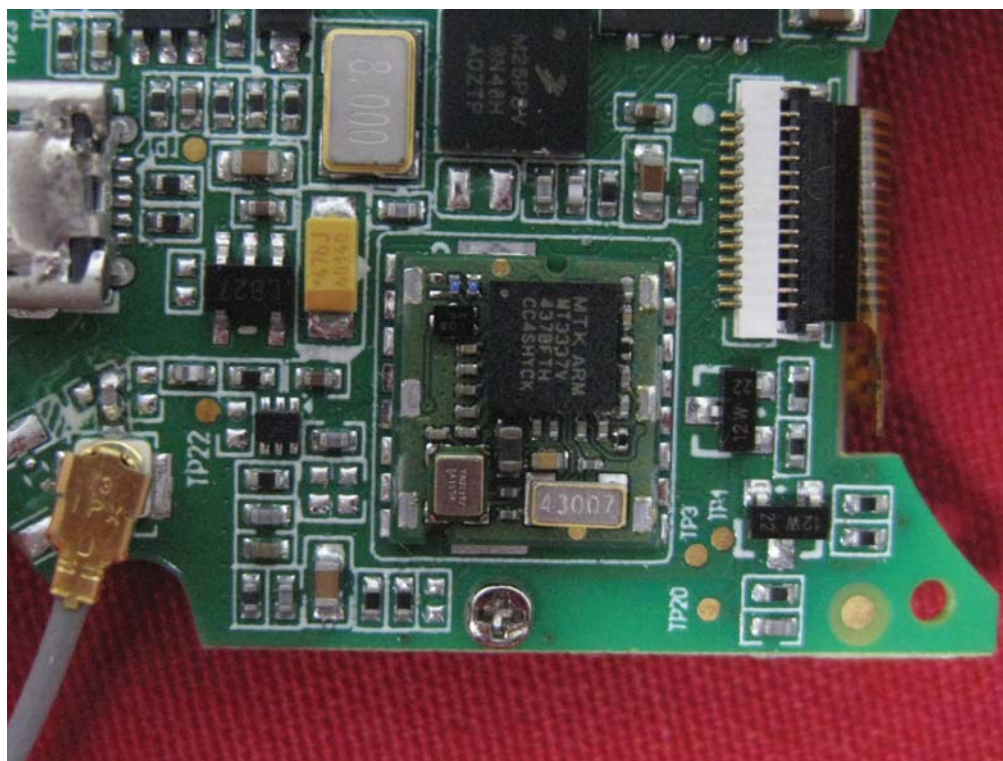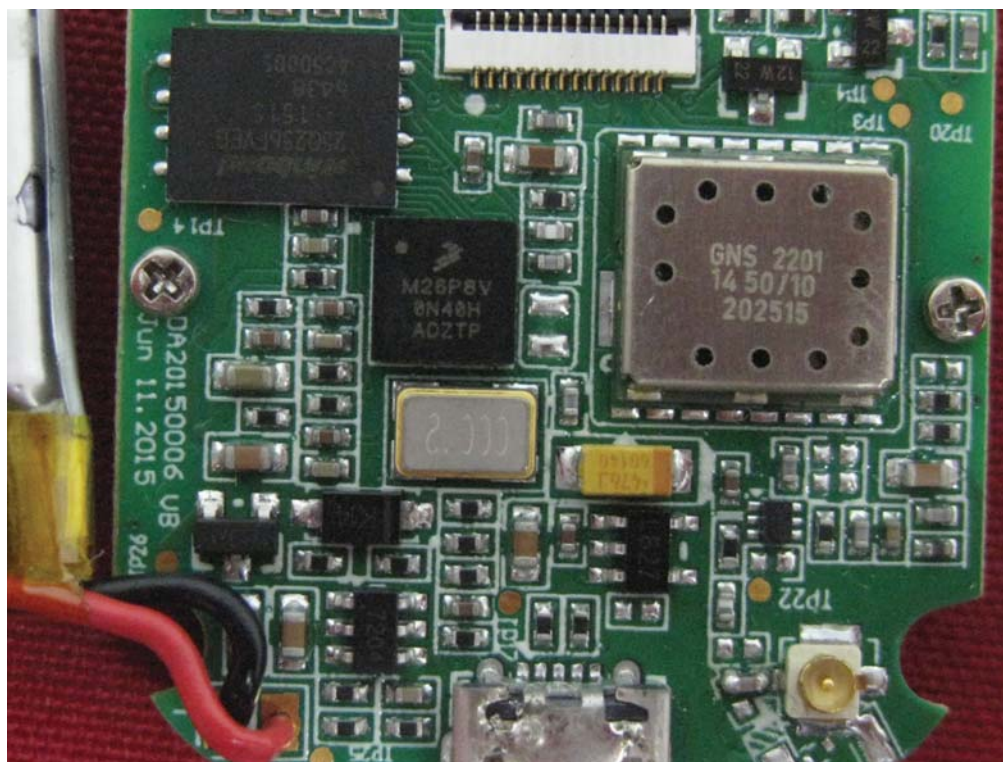

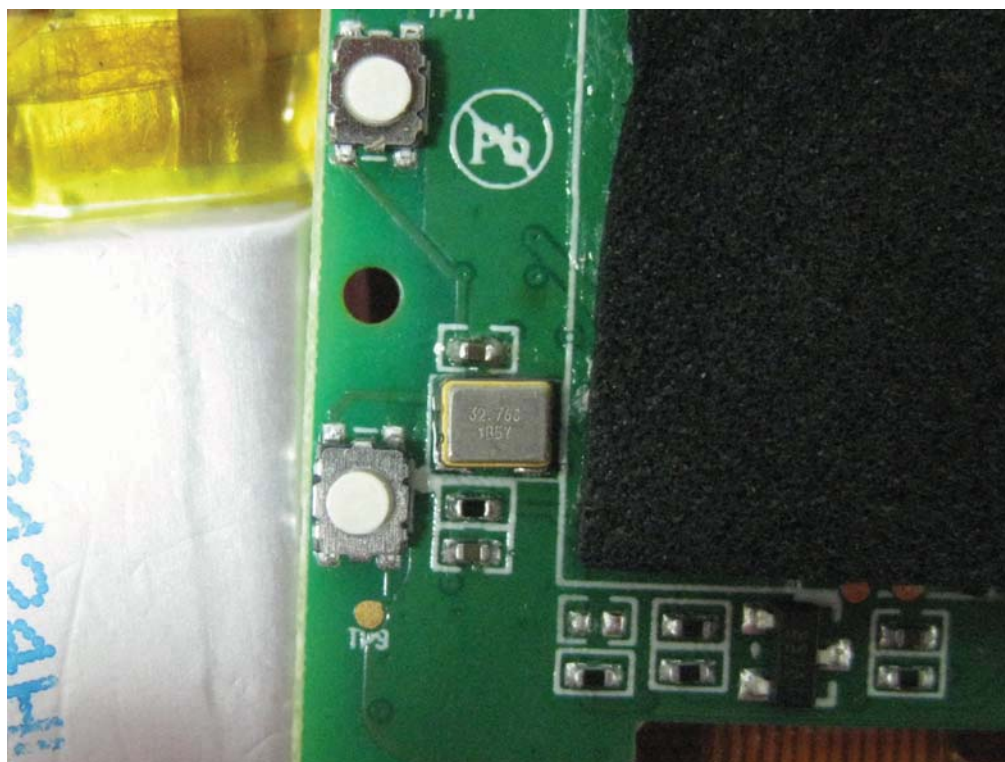

END OF REPORT