	Doc. Type: Iridium; P55; RF Exposure Calculation	Initials: pho	Date: 03-June-2005	
	Concerning: Safety distance to Iridium Antenna	Doc. No. : 04036	Rev. : 1.00	Page: 1 of 1


## Calculations of the safety distance due to the Rf emission from the Iridium antenna of the ECI Iridium products

According to the FCC rules described in “A local Government Official’s Guide to Transmitting antenna Rf Emission safety: Rules, Procedures and Practical Guidance” the limits for General Population/Unprotected Exposure is stated to 1.0 mW/cm<sup>2</sup>

This value is basis for the calculation of the safety distance of the iridium antenna under all conditions.

Technical data.

Maximum output Rf power	7 W
Antenna gain	3 dB equals 2 times
Antenna pattern	Hemispherical
Frequency	1.616 – 1.626 GHz

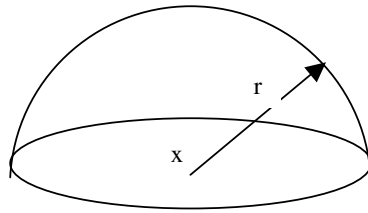

$r$  = safety distance from the antenna placed at  $x$  emitting Rf radiation in an hemispherical pattern

Surface area of the hemisphere  $S = 2 \pi r^2$

The calculation is absolutely worst case situation due to the fact that the output RF power is lower due to the pulsing (TDMA system) transmission. The calculation uses the case if the transmission was a continuous operation.

$$\text{Formula } r = \sqrt{\frac{\text{Power} \times \text{Antenna gain}}{\text{Surface} \times \text{Rf limit}}} = \sqrt{\frac{7000 \times 2}{2 \times \pi \times 1}} = 0.47\text{m}$$

The safety distance is therefore stated as **2 feet** equals 0.61m > 0.47m

The safety distance is stated in the manuals