

Test report

283771-2TRFWL

Date of issue: August 31, 2015

Applicant:

BLiNQ Wireless Inc.

Product:

HUB and RBM

Model:

X1200

FCC ID:

ROR00000003

Specification:

◆ **FCC 47 CFR Part 15 Subpart E, §15.407**

Unlicensed National Information Infrastructure Devices

Test location

| | |
|--------------|---|
| Company name | Nemko Canada Inc. |
| Address | 303 River Road |
| City | Ottawa |
| Province | Ontario |
| Postal code | K1V 1H2 |
| Country | Canada |
| Telephone | +1 613 737 9680 |
| Facsimile | +1 613 737 9691 |
| Toll free | +1 800 563 6336 |
| Website | www.nemko.com |
| Site number | FCC: 176392 (3 m semi anechoic chamber) |

| | |
|--------------------|---|
| Tested by | Andrey Adelberg, Senior Wireless/EMC Specialist |
| Reviewed by | Kevin Rose, Wireless/EMC Specialist |
| Review date | August 31, 2015 |
| Reviewer signature | |

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

| | |
|---|-----------|
| Table of contents | 3 |
| Section 1. Report summary | 4 |
| 1.1 Applicant and manufacturer | 4 |
| 1.2 Test specifications | 4 |
| 1.3 Test methods..... | 4 |
| 1.4 Statement of compliance | 4 |
| 1.5 Exclusions..... | 4 |
| 1.6 Test report revision history | 4 |
| Section 2. Summary of test results | 5 |
| 2.1 FCC Part 15 Subpart C, general requirements test results..... | 5 |
| 2.2 FCC Part 15 Subpart E, test results | 5 |
| Section 3. Equipment under test (EUT) details | 6 |
| 3.1 Sample information..... | 6 |
| 3.2 EUT information | 6 |
| 3.3 Technical information | 6 |
| 3.4 Product description and theory of operation | 7 |
| 3.5 EUT exercise details..... | 7 |
| Section 4. Engineering considerations | 8 |
| 4.1 Modifications incorporated in the EUT..... | 8 |
| 4.2 Technical judgment | 8 |
| 4.3 Deviations from laboratory tests procedures..... | 8 |
| Section 5. Test conditions | 9 |
| 5.1 Atmospheric conditions | 9 |
| 5.2 Power supply range..... | 9 |
| Section 6. Measurement uncertainty | 10 |
| 6.1 Uncertainty of measurement | 10 |
| Section 7. Test equipment | 11 |
| 7.1 Test equipment list..... | 11 |
| Section 8. Testing data | 12 |
| 8.1 FCC 15.407(6) AC power line conducted emissions limits | 12 |
| 8.2 FCC 15.403(i) Emission bandwidth | 16 |
| 8.3 FCC 15.407(a)(3) 5.725–5.85 GHz band output power, EIRP and spectral density limits | 18 |
| 8.4 FCC 15.407(b) Spurious (Undesirable) emissions | 21 |
| 8.5 FCC 15.407(g) Frequency stability | 36 |
| Section 9. Block diagrams of test set-ups | 37 |
| 9.1 Radiated emissions set-up..... | 37 |
| 9.2 Conducted emissions set-up | 37 |

Section 1. Report summary

1.1 Applicant and manufacturer

| | |
|-----------------|--------------------------|
| Company name | BLiNQ Wireless Inc. |
| Address | 400 March Road Suite 240 |
| City | Ottawa |
| Province/State | ON |
| Postal/Zip code | K2K 3H4 |
| Country | Canada |

1.2 Test specifications

| | |
|--|--|
| FCC 47 CFR Part 15, Subpart E, Clause 15.407 | Unlicensed National Information Infrastructure Devices |
|--|--|

1.3 Test methods

| | |
|--|--|
| 789033 D02 General UNII Test Procedures New Rules v01 (June 6, 2014) | Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E |
| 662911 D01 Multiple Transmitter Output v02r01 (October 31, 2013) | Emissions Testing of Transmitters with Multiple Outputs in the Same Band |
| 662911 D02 MIMO with Cross Polarized Antenna v01 (October 25, 2011) | Emissions testing of transmitters with multiple outputs in the same band (MIMO) with Cross Polarized Antenna |
| ANSI C63.10 v2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.5 Exclusions

None

1.6 Test report revision history

| Revision # | Details of changes made to test report |
|------------|--|
| TRF | Original report issued |

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

| Part | Test description | Verdict |
|------------|---------------------------|-------------------|
| §15.207(a) | Conducted limits | Pass |
| §15.31(e) | Variation of power source | Pass ¹ |
| §15.203 | Antenna requirement | Pass ² |

Notes: ¹Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

²The Antennas are located within the enclosure of EUT and not user accessible. EUT is professionally installed.

2.2 FCC Part 15 Subpart E, test results

| Part | Test description | Verdict |
|----------------------------|---|----------------|
| §15.403(i) | Emission bandwidth | Not applicable |
| §15.407(a)(1) | 5.15–5.25 GHz band power and density limits | Not applicable |
| §15.407(a)(2) | 5.25–5.35 GHz and 5.47–5.725 GHz bands power and density limits | Not applicable |
| §15.407(a)(3) | 5.725–5.85 GHz band power and density limits | Pass |
| §15.407(b)(1) | 5.15–5.25 GHz band undesired emission limits | Not applicable |
| §15.407(b)(2) | 5.25–5.35 GHz band undesired emission limits | Not applicable |
| §15.407(b)(3) | 5.47–5.725 GHz band undesired emission limits | Not applicable |
| §15.407(b)(4) | 5.725–5.85 GHz band undesired emission limits | Pass |
| §15.407(b)(6) | Unwanted emissions below 1 GHz | Pass |
| §15.407(b)(7) | Radiated emissions within restricted bands | Pass |
| §15.407(e) | Minimum 6 dB bandwidth for 5.725–5.85 GHz band | Pass |
| §15.407(g) | Frequency stability | Pass |
| §15.407(h)(1) ¹ | Transmit power control (TPC) | Not applicable |
| §15.407(h)(2) ¹ | Dynamic Frequency Selection (DFS) | Not applicable |

Note: ¹Applicable only to U-NII devices operating in the 5.25–5.35 GHz band and the 5.47–5.725 GHz band.

Section 3. Equipment under test (EUT) details

3.1 Sample information

| | |
|------------------------|----------------|
| Receipt date | April 22, 2015 |
| Nemko sample ID number | 1 |

3.2 EUT information

| | |
|---------------|-------------|
| Product name | HUB and RBM |
| Model | X1200 |
| Serial number | BA141008024 |

3.3 Technical information

| | |
|---|--|
| Frequency band | 5725–5850 MHz |
| Frequency Min (MHz) | 5755 MHz (PTP); 5745 MHz (PMP) |
| Frequency Max (MHz) | 5825 MHz (PTP); 5835 MHz (PMP) |
| RF power Min (W), Conducted | 0.13 (20.99 dBm) for PMP application |
| RF power Max (W), Conducted | 0.28 (24.43 dBm) for PTP application |
| Field strength, Units @ distance | N/A |
| Measured BW (MHz) (6 dBc) | 17.33 |
| Calculated BW (kHz), as per TRC-43 | N/A |
| Type of modulation | OFDM |
| Emission classification (F1D, G1D, D1D) | W7D |
| Transmitter spurious, Units @ distance | 48.59 dB μ V/m @ 3 m at 15.54 GHz |
| Power requirements | 120 V _{AC} , 60 Hz |
| Antenna information | Antenna configuration 1: Gain is 16 dBi , cable loss is1 dB Antenna configuration 2: Gain is 15 dBi , cable loss is2 dB The EUT is professionally installed. |

3.4 Product description and theory of operation

The radio modules associated with this limited modular certification are part of BLiNQ Networks' X1200 Dual Carrier, Point-to-Multipoint and Point-to-Point Transceiver Modules. These Transceiver Modules are used to backhaul data from small cell mobile access points. One Hub Module communicates with up to 8 Remote Backhaul Modules (RBM) in a Point-to-Multipoint configuration or 1 Remote Backhaul Module (RBM) in a Point-to-Point configuration.

The radio module has the following characteristics:

- operates in the 5.725 to 5.85 GHz frequency band
- supports QPSK, 16QAM, 64QAM and 256QAM
- supports 2x2 MIMO with 2 uncorrelated data streams
- supports user configurable traffic ratios 50:50 and 70:30
- outputs power in the range of -15 to 23 dBm
- the maximum output power is limited by the antenna configuration which is particular to each module, HM or RBM, and dependent on the Point-to-Point or Point-to-Multipoint scenarios

3.5 EUT exercise details

The EUT was controlled from laptop via Ethernet using Putty telnet session.

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

| | |
|-------------------|---------------|
| Temperature | 15–30 °C |
| Relative humidity | 20–75 % |
| Air pressure | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

| Test name | Measurement uncertainty, dB |
|-----------------------------------|-----------------------------|
| All antenna port measurements | 0.55 |
| Conducted spurious emissions | 1.13 |
| Radiated spurious emissions | 3.78 |
| AC power line conducted emissions | 3.55 |

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

| Equipment | Manufacturer | Model no. | Asset no. | Cal cycle | Next cal. |
|-----------------------------|------------------------|--------------|-----------|-----------|------------|
| 3 m EMI test chamber | TDK | SAC-3 | FA002047 | 1 year | Feb. 25/16 |
| Flush mount turntable | Sunol | FM2022 | FA002082 | — | NCR |
| Controller | Sunol | SC104V | FA002060 | — | NCR |
| Antenna mast | Sunol | TLT2 | FA002061 | — | NCR |
| Power source | California Instruments | 3001i | FA001021 | 1 year | June 27/15 |
| Spectrum analyzer | Rohde & Schwarz | FSU | FA001877 | 1 year | Mar. 27/16 |
| Receiver/spectrum analyzer | Rohde & Schwarz | ESU 26 | FA002043 | 1 year | Jan. 07/16 |
| Bilog antenna (20–3000 MHz) | Sunol | JB3 | FA002108 | 1 year | Apr. 12/16 |
| Horn antenna (1–18 GHz) | EMCO | 3115 | FA000825 | 1 year | Apr. 01/16 |
| Horn antenna (18–26.5 GHz) | Electro-metrics | SH-50/60-1 | FA000479 | — | VOU |
| Pre-amplifier (1–18 GHz) | JCA | JCA118-503 | FA002091 | 1 year | June 23/15 |
| Pre-amplifier (18–26 GHz) | Narda | BBS-1826N612 | FA001550 | — | VOU |
| Horn antenna (26.5–40 GHz) | Electro-metrics | SH-50/60-2 | FA000485 | — | VOU |
| Pre-amplifier (26–40 GHz) | Narda | DBL-2640N610 | FA001556 | — | VOU |
| Temperature chamber | Thermotron | SM-16C | FA001030 | 1 year | NCR |
| LISN | Rohde & Schwarz | ENV216 | FA002023 | 1 year | Jan. 09/16 |
| 50 Ω coax cable | C.C.A. | None | FA002556 | 1 year | June 23/15 |

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 FCC 15.407(6) AC power line conducted emissions limits

8.1.1 Definitions and limits

15.407(6) Any U-NII devices using an AC power line are required to comply with the conducted limits set forth in §15.207.

§15.207 Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Table 8.1-1: Conducted emissions limit

| Frequency of emission (MHz) | Conducted limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average** |
| 0.15–0.5 | 66 to 56* | 56 to 46* |
| 0.5–5 | 56 | 46 |
| 5–30 | 60 | 50 |

Note: * - The level decreases linearly with the logarithm of the frequency.

** - A linear average detector is required.

8.1.2 Test summary

| | | | |
|---------------|-----------------|-------------------|-----------|
| Test date | April 23, 2015 | Temperature | 23 °C |
| Test engineer | Andrey Adelberg | Air pressure | 1005 mbar |
| Verdict | Pass | Relative humidity | 31 % |

8.1.3 Observations, settings and special notes

The EUT was set up as tabletop configuration.

The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.


Receiver settings for preview measurements:

| | |
|----------------------|------------------|
| Resolution bandwidth | 9 kHz |
| Video bandwidth | 30 kHz |
| Detector mode | Peak and Average |
| Trace mode | Max Hold |
| Measurement time | 100 ms |

Receiver settings for final measurements:

| | |
|----------------------|------------------------|
| Resolution bandwidth | 9 kHz |
| Video bandwidth | 30 kHz |
| Detector mode | Quasi-Peak and Average |
| Trace mode | Max Hold |
| Measurement time | 100 ms |

8.1.4 Test data

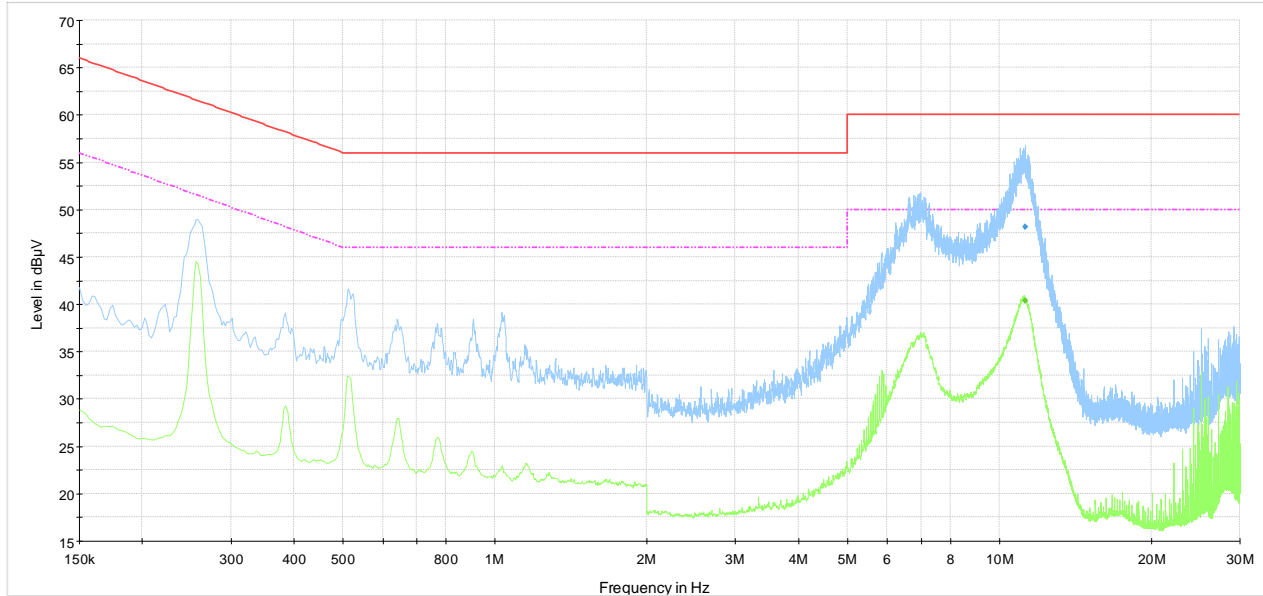

- Conducted emissions on phase line
- CISPR 22 Mains QP Class B
- CISPR 22 Mains AV Class B
- Preview Result 1-PK+
- Preview Result 2-AVG
- ◆ Final Result 1-QPK
- ◆ Final Result 2-AVG

Plot 8.1-1: Conducted emissions on phase line

Table 8.1-2: Quasi-Peak conducted emissions results on phase line

| Frequency, MHz | Q-Peak result, dBµV | Meas. Time, ms | Bandwidth, kHz | Filter | Correction, dB | Margin, dB | Limit, dBµV |
|----------------|---------------------|----------------|----------------|--------|----------------|------------|-------------|
| 11.253250 | 48.1 | 1000.0 | 9.000 | On | L1 | 10.3 | 11.9 |

Note: 43.5 dBµV = 23.2 dBµV (receiver reading) + 10.1 dB (LISN factor IL) + 0.2 dB (cable loss) + 10 dB (attenuator)

Table 8.1-3: Average conducted emissions results on phase line

| Frequency, MHz | Average result, dBµV | Meas. Time, ms | Bandwidth, kHz | Filter | Correction, dB | Margin, dB | Limit, dBµV |
|----------------|----------------------|----------------|----------------|--------|----------------|------------|-------------|
| 11.253250 | 40.3 | 1000.0 | 9.000 | On | L1 | 10.3 | 9.7 |


Sample calculation:

Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)

Result (dBµV) = XX dBµV (reading from receiver) + XX dB (Correction factor)

Example:

43.5 dBµV = 23.2 dBµV (receiver reading) + 10.1 dB (LISN factor IL) + 0.2 dB (cable loss) + 10 dB (attenuator)

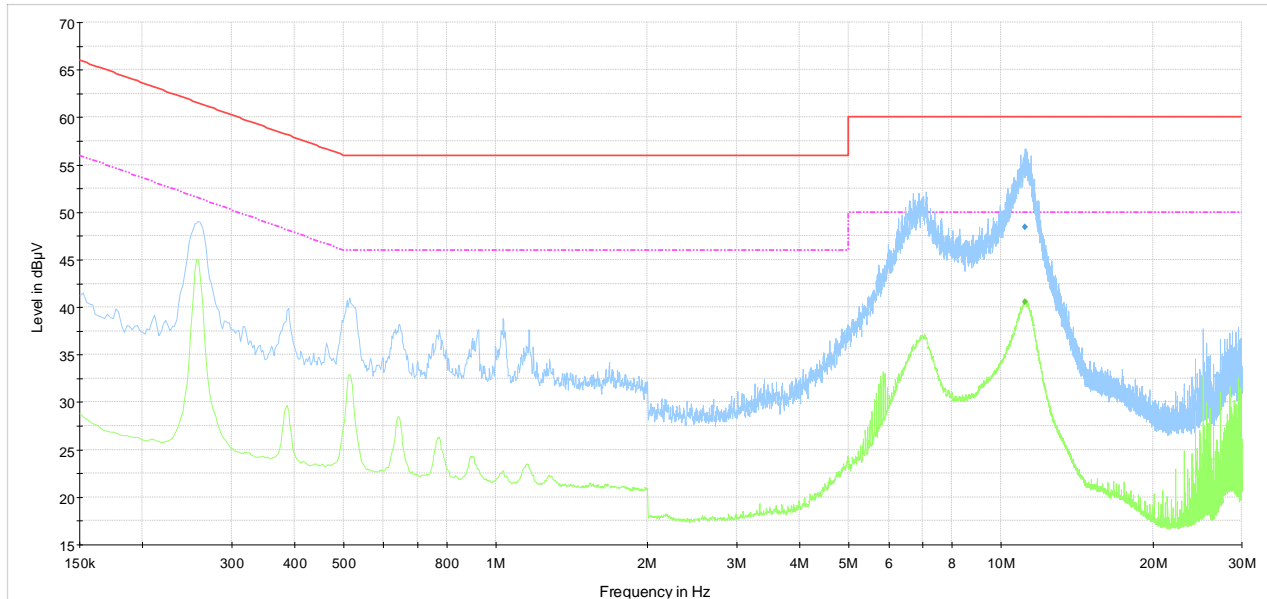

- Conducted emissions on neutral line
- CISPR 22 Mains QP Class B
- CISPR 22 Mains AV Class B
- Preview Result 1-PK+
- Preview Result 2-AVG
- Final Result 1-QPK
- Final Result 2-AVG

Plot 8.1-2: Conducted emissions on neutral line

Table 8.1-4: Quasi-Peak conducted emissions results on neutral line

| Frequency, MHz | Q-Peak result, dBµV | Meas. Time, ms | Bandwidth, kHz | Filter | Correction, dB | Margin, dB | Limit, dBµV |
|----------------|---------------------|----------------|----------------|--------|----------------|------------|-------------|
| 11.185750 | 48.5 | 1000.0 | 9.000 | On | N | 10.4 | 11.5 |

Note: 43.5 dBµV = 23.2 dBµV (receiver reading) + 10.1 dB (LISN factor IL) + 0.2 dB (cable loss) + 10 dB (attenuator)

Table 8.1-5: Average conducted emissions results on neutral line

| Frequency, MHz | Average result, dBµV | Meas. Time, ms | Bandwidth, kHz | Filter | Correction, dB | Margin, dB | Limit, dBµV |
|----------------|----------------------|----------------|----------------|--------|----------------|------------|-------------|
| 11.185750 | 40.6 | 1000.0 | 9.000 | On | N | 10.4 | 9.4 |

Sample calculation:

Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)

Result (dBµV) = XX dBµV (reading from receiver) + XX dB (Correction factor)

Example:

43.5 dBµV = 23.2 dBµV (receiver reading) + 10.1 dB (LISN factor IL) + 0.2 dB (cable loss) + 10 dB (attenuator)

8.2 FCC 15.403(i) Emission bandwidth

8.2.1 Definitions and limits

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

15.407(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

8.2.2 Test summary

| | | | |
|---------------|-----------------|-------------------|-----------|
| Test date | April 22, 2015 | Temperature | 22 °C |
| Test engineer | Andrey Adelberg | Air pressure | 1004 mbar |
| Verdict | Pass | Relative humidity | 32 % |

8.2.3 Observations, settings and special notes

Spectrum analyser settings:

| | |
|----------------------|----------|
| Resolution bandwidth | 200 kHz |
| Video bandwidth | 500 kHz |
| Frequency span | 30 MHz |
| Detector mode | Peak |
| Trace mode | Max Hold |

8.2.4 Test data

Table 8.2-1: 26 dB bandwidth results for PTP

| Antenna chain | Frequency, MHz | 26 dB bandwidth, MHz |
|---------------|----------------|----------------------|
| ch0 | 5755 | 20.00 |
| | 5800 | 20.00 |
| | 5825 | 20.00 |
| ch1 | 5755 | 20.09 |
| | 5800 | 20.09 |
| | 5825 | 20.09 |

Table 8.2-2: 26 dB bandwidth results for PMP


| Antenna chain | Frequency, MHz | 26 dB bandwidth, MHz |
|---------------|----------------|----------------------|
| ch0 | 5745 | 20.04 |
| | 5800 | 20.00 |
| | 5835 | 20.00 |
| ch1 | 5745 | 20.09 |
| | 5800 | 20.09 |
| | 5835 | 20.09 |

Table 8.2-3: 6 dB bandwidth results for PTP

| Antenna chain | Frequency, MHz | 6 dB bandwidth, MHz | Minimum limit, MHz | Margin, MHz |
|---------------|----------------|---------------------|--------------------|-------------|
| ch0 | 5755 | 17.30 | 0.50 | 16.80 |
| | 5800 | 17.30 | 0.50 | 16.80 |
| | 5825 | 17.30 | 0.50 | 16.80 |
| ch1 | 5755 | 17.45 | 0.50 | 16.95 |
| | 5800 | 17.83 | 0.50 | 17.33 |
| | 5825 | 17.88 | 0.50 | 17.38 |


Table 8.2-4: 6 dB bandwidth results for PMP

| Antenna chain | Frequency, MHz | 6 dB bandwidth, MHz | Minimum limit, MHz | Margin, MHz |
|---------------|----------------|---------------------|--------------------|-------------|
| ch0 | 5745 | 17.30 | 0.50 | 16.80 |
| | 5800 | 17.30 | 0.50 | 16.80 |
| | 5835 | 17.30 | 0.50 | 16.80 |
| ch1 | 5745 | 17.45 | 0.50 | 16.95 |
| | 5800 | 17.83 | 0.50 | 17.33 |
| | 5835 | 17.50 | 0.50 | 17.00 |

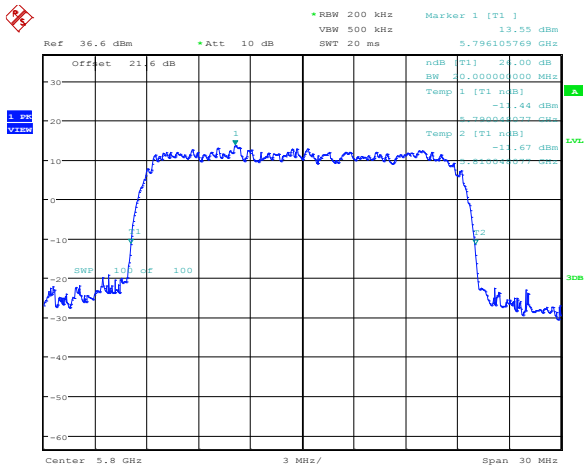

High channel
 Date: 22.APR.2015 13:21:07

Figure 8.2-1: 26 dB bandwidth, sample plot

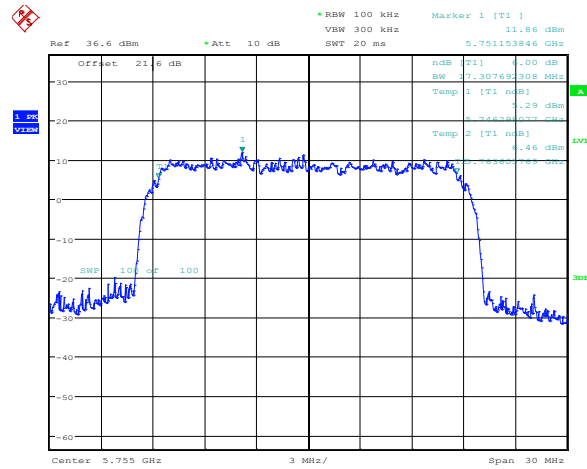

High channel
 Date: 22.APR.2015 13:17:41

Figure 8.2-2: 6 dB bandwidth, sample plot

8.3 FCC 15.407(a)(3) 5.725–5.85 GHz band output power, EIRP and spectral density limits

8.3.1 Definitions and limits

- (3) For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

8.3.2 Test summary

| | | | |
|----------------|-----------------|--------------------|-----------|
| Test date: | April 22, 2015 | Temperature: | 23 °C |
| Test engineer: | Andrey Adelberg | Air pressure: | 1007 mbar |
| Verdict: | Pass | Relative humidity: | 32 % |

8.3.3 Observations, settings and special notes

Combined average output power was calculated as follows: $P_{combined} = 10 \times \log_{10} \left((10^{P_{cho}/10}) + (10^{P_{ch1}/10}) \right)$

EIRP was calculated as follows: $EIRP = P_{combined} + \text{antenna gain}$

Combined PPSD was calculated as follows: $PPSD_{combined} = 10 \times \log_{10} \left((10^{PSD_{cho}/10}) + (10^{PSD_{ch1}/10}) \right)$

Directional gain for cross-polarized MIMO 2 × 2 antenna configuration 1 is 16 dBi – 1 dB (cable loss) = 15 dBi. No summation of gain is needed for cross-polarized antennas as per manufacturer’s definition of the cross-polarized MIMO signal type, which is completely uncorrelated.

Directional gain for cross-polarized MIMO 2 × 2 antenna configuration 2 is 15 dBi – 2 dB (cable loss) = 13 dBi. No summation of gain is needed for cross-polarized antennas as per manufacturer’s definition of the cross-polarized MIMO signal type, which is completely uncorrelated.

Output power limit for PTP mode with antenna configuration 1 and antenna configuration 2 is 30 dBm.

PPSD limit for PTP mode is 30 dBm/500 kHz

Output power limit for PMP mode with antenna configuration 1 was calculated as follows: 30 dBm – (15 – 6) = 21 dBm.

Output power limit for PMP mode with antenna configuration 2 was calculated as follows: 30 dBm – (13 – 6) = 23 dBm.

PPSD limit for PMP mode with Antenna configuration 1 was calculated as follows: 30 dBm/500 kHz – (15 – 6) = 21 dBm/500 kHz.

PPSD limit for PMP mode with Antenna configuration 2 was calculated as follows: 30 dBm/500 kHz – (13 – 6) = 23 dBm/500 kHz.

8.3.4 Test data

Table 8.3-1: Output power measurements results for PTP

| Frequency, MHz | Measured average conducted output power, dBm | | | Combined power, W | Power limit, dBm | Margin, dB |
|----------------|--|--------|----------|-------------------|------------------|------------|
| | On ch0 | On ch1 | Combined | | | |
| 5755 | 21.37 | 21.41 | 24.40 | 0.275 | 30.00 | 5.60 |
| 5800 | 21.35 | 21.45 | 24.41 | 0.276 | 30.00 | 5.59 |
| 5825 | 21.40 | 21.43 | 24.43 | 0.277 | 30.00 | 5.57 |

Table 8.3-2: PPSD measurements results for PTP

| Frequency, MHz | Measured Peak Power Spectral Density (PPSD), dBm/500 kHz | | | PPSD limit, dBm/500 kHz | Margin, dB |
|----------------|--|--------|----------|-------------------------|------------|
| | On ch0 | On ch1 | Combined | | |
| 5755 | 8.29 | 8.35 | 11.33 | 30.00 | 18.67 |
| 5800 | 8.81 | 8.42 | 11.63 | 30.00 | 18.37 |
| 5825 | 8.42 | 8.30 | 11.37 | 30.00 | 18.63 |

Table 8.3-3: Output power measurements results for PMP with antenna configuration 1

| Frequency, MHz | Measured average conducted output power, dBm | | | Combined power, W | Power limit, dBm | Margin, dB |
|----------------|--|--------|----------|-------------------|------------------|------------|
| | On ch0 | On ch1 | Combined | | | |
| 5745 | 17.90 | 17.88 | 20.90 | 0.123 | 21.00 | 0.10 |
| 5800 | 17.96 | 18.00 | 20.99 | 0.126 | 21.00 | 0.01 |
| 5835 | 17.94 | 17.85 | 20.91 | 0.123 | 21.00 | 0.09 |

Table 8.3-4: PPSD measurements results for PMP with antenna configuration 1

| Frequency, MHz | Measured Peak Power Spectral Density (PPSD), dBm/500 kHz | | | PPSD limit, dBm/500 kHz | Margin, dB |
|----------------|--|--------|----------|-------------------------|------------|
| | On ch0 | On ch1 | Combined | | |
| 5745 | 3.99 | 3.63 | 6.82 | 21.00 | 14.18 |
| 5800 | 3.82 | 3.54 | 6.69 | 21.00 | 14.31 |
| 5835 | 3.96 | 3.43 | 6.71 | 21.00 | 14.29 |

Table 8.3-5: Output power measurements results for PMP with antenna configuration 2


| Frequency, MHz | Measured average conducted output power, dBm | | | Combined power, W | Power limit, dBm | Margin, dB |
|----------------|--|--------|----------|-------------------|------------------|------------|
| | On ch0 | On ch1 | Combined | | | |
| 5745 | 20.06 | 19.81 | 22.95 | 0.197 | 23.00 | 0.05 |
| 5800 | 19.77 | 20.00 | 22.90 | 0.195 | 23.00 | 0.10 |
| 5835 | 19.52 | 19.83 | 22.69 | 0.186 | 23.00 | 0.31 |

Table 8.3-6: PPSD measurements results for PMP with antenna configuration 2

| Frequency, MHz | Measured Peak Power Spectral Density (PPSD), dBm/MHz | | | PPSD limit, dBm/MHz | Margin, dB |
|----------------|--|--------|----------|---------------------|------------|
| | On ch0 | On ch1 | Combined | | |
| 5745 | 6.22 | 5.55 | 8.91 | 23.00 | 14.09 |
| 5800 | 5.79 | 5.49 | 8.65 | 23.00 | 14.35 |
| 5835 | 5.50 | 5.38 | 8.45 | 23.00 | 14.55 |


Section 8
Test name
Specification

Testing data
 FCC 15.407(a)(3) 5.725–5.85 GHz band output power, EIRP and spectral density limits
 FCC Part 15 Subpart E

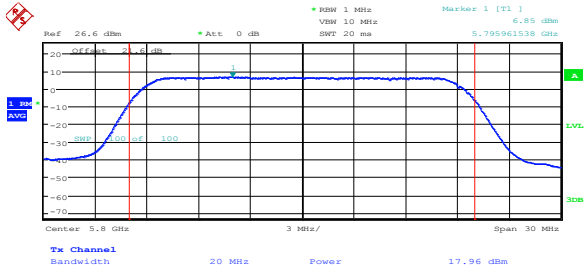

High channel
 Date: 22.APR.2015 13:34:54

Figure 8.3-1: Sample plot for output power measurement

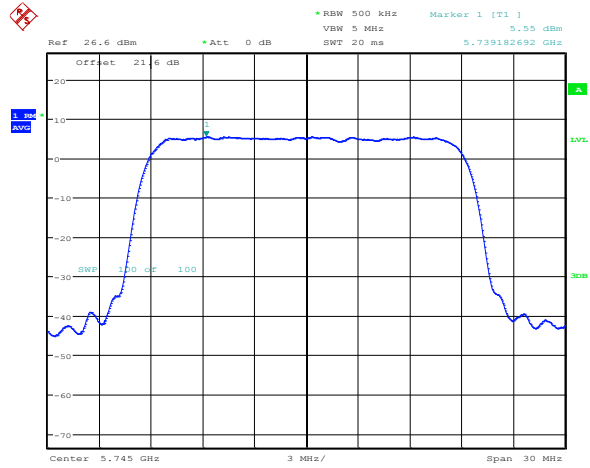

High channel
 Date: 22.APR.2015 15:42:49

Figure 8.3-2: Sample plot for PPSD measurement

8.4 FCC 15.407(b) Spurious (Undesirable) emissions

8.4.1 Definitions and limits

(4) For transmitters operating in the 5.725–5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of –27 dBm/MHz.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

(7) The provisions of § 15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

Table 8.4-1: FCC §15.209 – Radiated emission limits

| Frequency, MHz | Field strength of emissions | | Measurement distance, m |
|-------------------|-----------------------------|-----------------------------------|----------------------------|
| | µV/m | dBµV/m | |
| 0.009–0.490 | 2400/F | 67.6 – 20 × log ₁₀ (F) | 300 |
| 0.490–1.705 | 24000/F | 87.6 – 20 × log ₁₀ (F) | 30 |
| 1.705–30.0 | 30 | 29.5 | 30 |
| 30–88 | 100 | 40.0 | 3 |
| 88–216 | 150 | 43.5 | 3 |
| 216–960 | 200 | 46.0 | 3 |
| above 960 | 500 | 54.0 | 3 |

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.4-2: FCC restricted frequency bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090–0.110 | 16.42–16.423 | 399.9–410 | 4.5–5.15 |
| 0.495–0.505 | 16.69475–16.69525 | 608–614 | 5.35–5.46 |
| 2.1735–2.1905 | 16.80425–16.80475 | 960–1240 | 7.25–7.75 |
| 4.125–4.128 | 25.5–25.67 | 1300–1427 | 8.025–8.5 |
| 4.17725–4.17775 | 37.5–38.25 | 1435–1626.5 | 9.0–9.2 |
| 4.20725–4.20775 | 73–74.6 | 1645.5–1646.5 | 9.3–9.5 |
| 6.215–6.218 | 74.8–75.2 | 1660–1710 | 10.6–12.7 |
| 6.26775–6.26825 | 108–121.94 | 1718.8–1722.2 | 13.25–13.4 |
| 6.31175–6.31225 | 123–138 | 2200–2300 | 14.47–14.5 |
| 8.291–8.294 | 149.9–150.05 | 2310–2390 | 15.35–16.2 |
| 8.362–8.366 | 156.52475–156.52525 | 2483.5–2500 | 17.7–21.4 |
| 8.37625–8.38675 | 156.7–156.9 | 2690–2900 | 22.01–23.12 |
| 8.41425–8.41475 | 162.0125–167.17 | 3260–3267 | 23.6–24.0 |
| 12.29–12.293 | 167.72–173.2 | 3332–3339 | 31.2–31.8 |
| 12.51975–12.52025 | 240–285 | 3345.8–3358 | 36.43–36.5 |
| 12.57675–12.57725 | 322–335.4 | 3600–4400 | Above 38.6 |
| 13.36–13.41 | | | |

8.4.2 Test summary

| | | | |
|----------------|-----------------|--------------------|-----------|
| Test date: | April 22, 2015 | Temperature: | 23 °C |
| Test engineer: | Andrey Adelberg | Air pressure: | 1007 mbar |
| Verdict: | Pass | Relative humidity: | 32 % |

8.4.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to 40 GHz.

EUT was set to transmit with 100 % duty cycle.

Radiated measurements were performed at a distance of 3 m, the EUT was transmitting on both MIMO chains simultaneously. Radiated emissions were performed while both antenna connectors were terminated with 50 Ω load.

Spectrum analyser for peak conducted measurements within restricted bands below 1 GHz:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 300 kHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Limit line was set as follows: 54 dBμV/m – 95.23 dB – 15 dBi – 4.7 dB – 3 dB = –63.93 dBm

Spectrum analyser for peak conducted measurements within restricted bands above 1 GHz:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 3 MHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Average limit line was set as follows: 54 dBμV/m – 95.23 dB – 15 dBi – 3 dB = –59.23 dBm/MHz where 3 dB is a multiple antenna ports compensation: $10 \times \log_{10}(2) = 3$ dB

Spectrum analyser for average conducted measurements within restricted bands above 1 GHz for frequencies where peak results were above the average limit:

| | |
|-----------------------------|---------------|
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 10 MHz |
| Detector mode: | RMS |
| Trace mode: | Power average |
| Number of averaging traces: | 100 |

Peak limit is 20 dB higher than the average limit: –59.23 dBm/MHz + 20 dB = –39.23 dBm/MHz


Spectrum analyser for peak conducted measurements outside restricted bands:

| | |
|-----------------------|----------|
| Resolution bandwidth: | 1 MHz |
| Video bandwidth: | 3 MHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

Conducted emissions measurements outside restricted bands were performed on each individual MIMO chain. The limit was adjusted to include antenna directional gain of 15 dBi and a compensation of two antenna ports: –27 dBm/MHz – $10 \times \log_{10}(2) - 15$ dBi = –45 dBm/MHz. For lower gain antenna, the limit was calculated as follows: –27 dBm/MHz – $10 \times \log_{10}(2) - 13$ dBi = –43 dBm/MHz.


For frequencies within 10 MHz outside the band of operation, the limits were 10 dB higher.

8.4.4 Test data

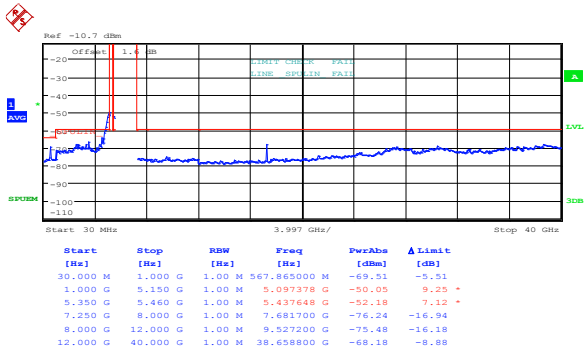


High channel
 Date: 22.APR.2015 14:49:13

Figure 8.4-1: Conducted peak spurious emissions within restricted bands at low channel, cho, PTP

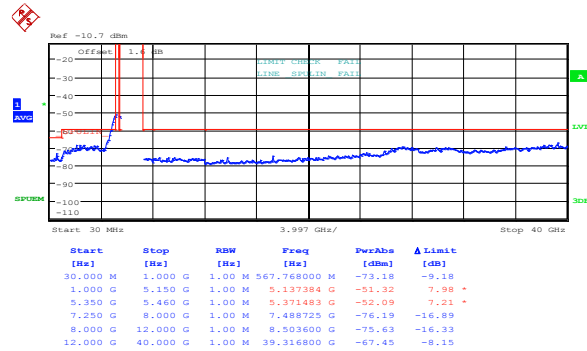


High channel
 Date: 22.APR.2015 14:49:48

Figure 8.4-2: Conducted peak spurious emissions within restricted bands at low channel, ch1, PTP

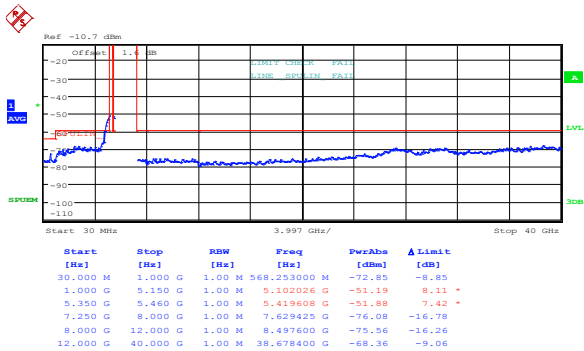

High channel
 Date: 22.APR.2015 14:46:54

Figure 8.4-3: Conducted peak spurious emissions within restricted bands at high channel, cho, PTP

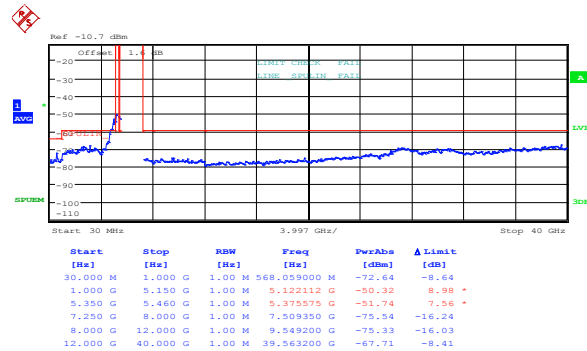


High channel
 Date: 22.APR.2015 14:46:24

Figure 8.4-4: Conducted peak spurious emissions within restricted bands at high channel, ch1, PTP

Note: all measurement results marked in red on the plots above were retested radiated with appropriate antennas connected to the EUT.


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

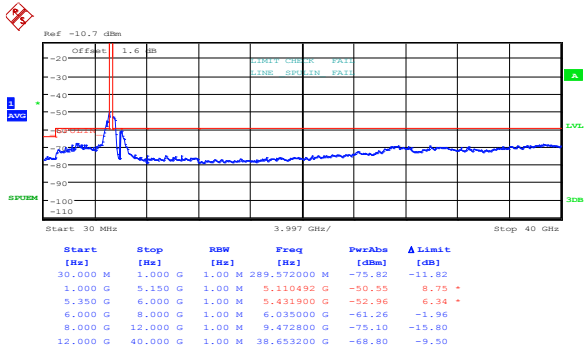


High channel
 Date: 22.APR.2015 16:32:41

Figure 8.4-5: Conducted peak spurious emissions within restricted bands at low channel, cho, PMP with Antenna configuration 1

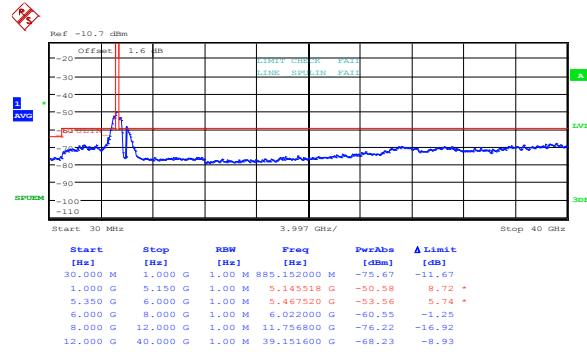


High channel
 Date: 22.APR.2015 16:33:18

Figure 8.4-6: Conducted peak spurious emissions within restricted bands at low channel, ch1, PMP with Antenna configuration 1

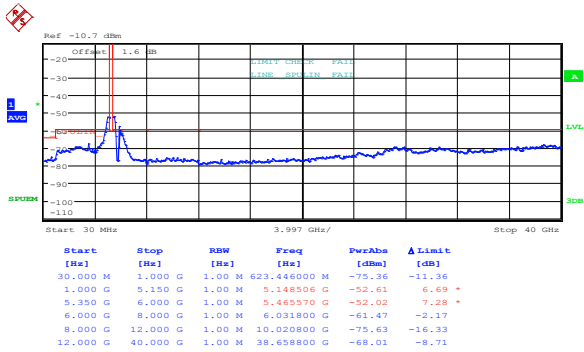

High channel
 Date: 22.APR.2015 16:37:09

Figure 8.4-7: Conducted peak spurious emissions within restricted bands at high channel, cho, PMP with Antenna configuration 1

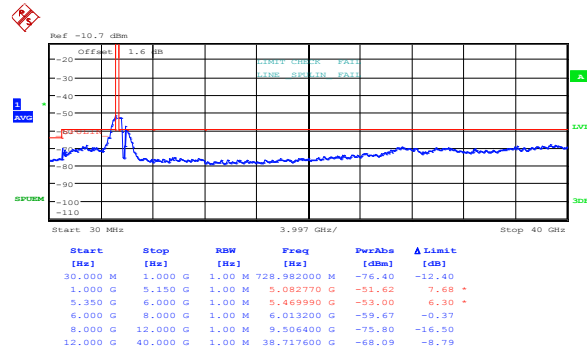


High channel
 Date: 22.APR.2015 16:36:42

Figure 8.4-8: Conducted peak spurious emissions within restricted bands at high channel, ch1, PMP with Antenna configuration 1

Note: all measurement results marked in red on the plots above were retested radiated with appropriate antennas connected to the EUT.


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

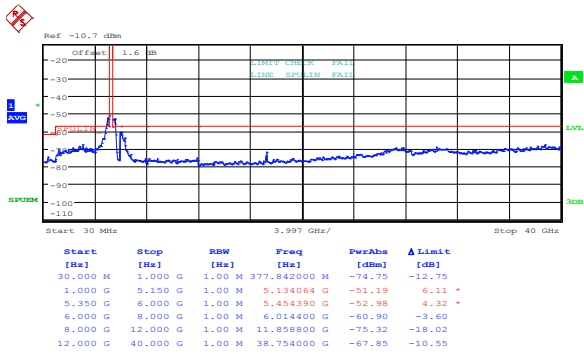


High channel
 Date: 22.APR.2015 16:42:00

Figure 8.4-9: Conducted peak spurious emissions within restricted bands at low channel, cho, PMP with Antenna configuration 2

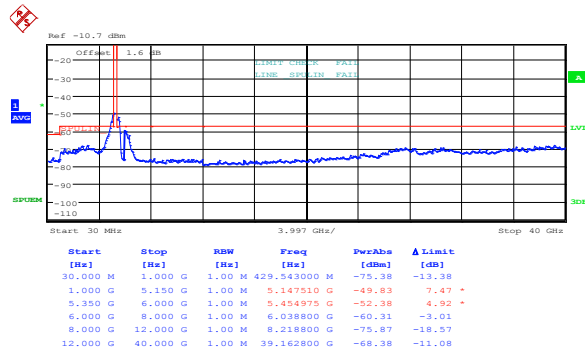


High channel
 Date: 22.APR.2015 16:41:11

Figure 8.4-10: Conducted peak spurious emissions within restricted bands at low channel, ch1, PMP with Antenna configuration 2

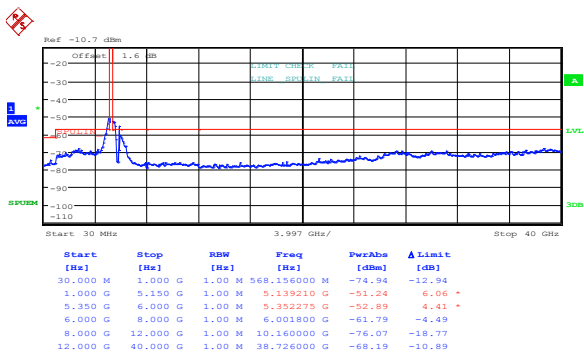

High channel
 Date: 22.APR.2015 16:38:29

Figure 8.4-11: Conducted peak spurious emissions within restricted bands at high channel, cho, PMP with Antenna configuration 2

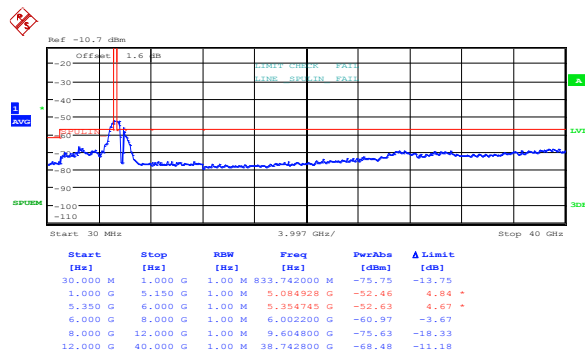


High channel
 Date: 22.APR.2015 16:39:02

Figure 8.4-12: Conducted peak spurious emissions within restricted bands at high channel, ch1, PMP with Antenna configuration 2

Note: all measurement results marked in red on the plots above were retested radiated with appropriate antennas connected to the EUT.


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

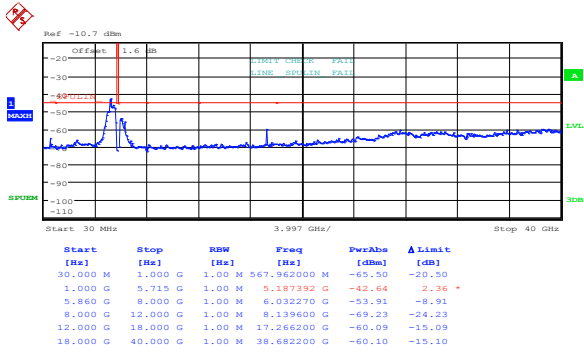


High channel
 Date: 22.APR.2015 14:17:19

Figure 8.4-13: Conducted peak spurious emissions outside restricted bands at low channel, cho, PTP

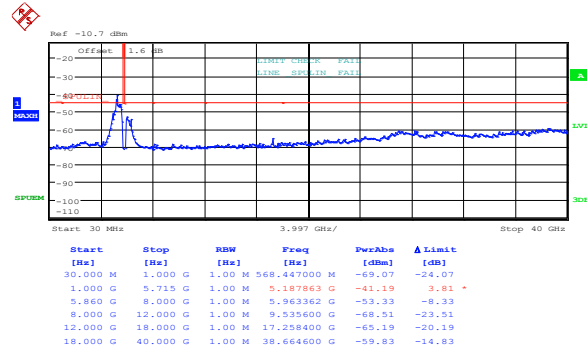


High channel
 Date: 22.APR.2015 14:18:01

Figure 8.4-14: Conducted peak spurious emissions outside restricted bands at low channel, ch1, PTP

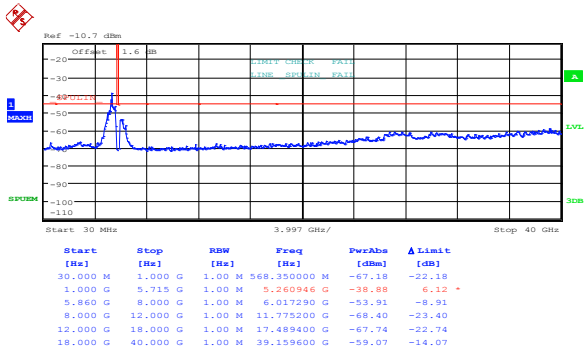

High channel
 Date: 22.APR.2015 14:14:35

Figure 8.4-15: Conducted peak spurious emissions outside restricted bands at high channel, cho, PTP

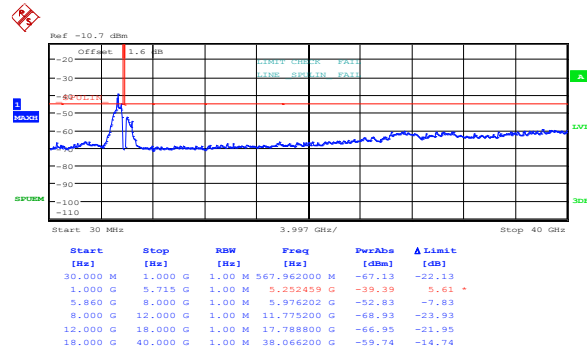


High channel
 Date: 22.APR.2015 14:13:53

Figure 8.4-16: Conducted peak spurious emissions outside restricted bands at high channel, ch1, PTP


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

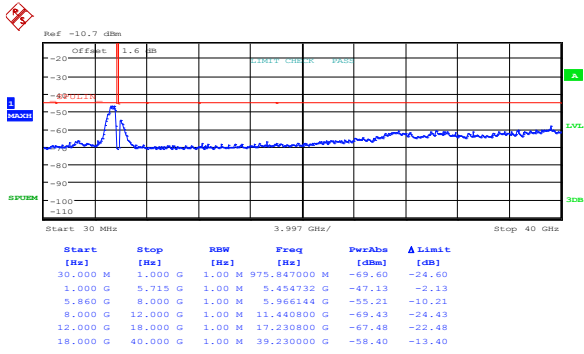


High channel
 Date: 22.APR.2015 16:29:48

Figure 8.4-17: Conducted peak spurious emissions outside restricted bands at low channel, cho, PMP with Antenna configuration 1

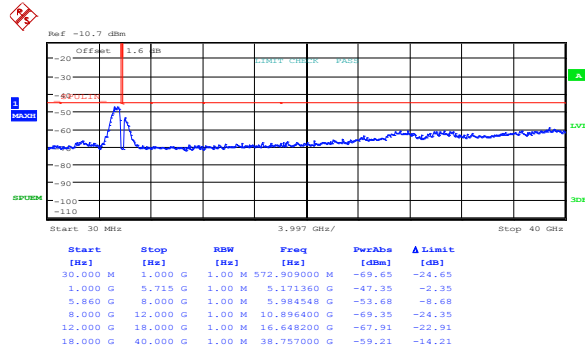


High channel
 Date: 22.APR.2015 16:29:13

Figure 8.4-18: Conducted peak spurious emissions outside restricted bands at low channel, ch1, PMP with Antenna configuration 1

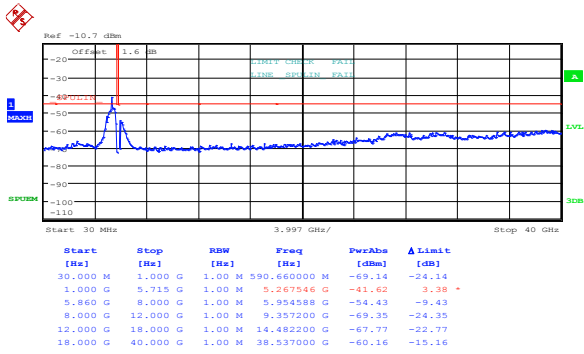

High channel
 Date: 22.APR.2015 16:18:52

Figure 8.4-19: Conducted peak spurious emissions outside restricted bands at high channel, cho, PMP with Antenna configuration 1

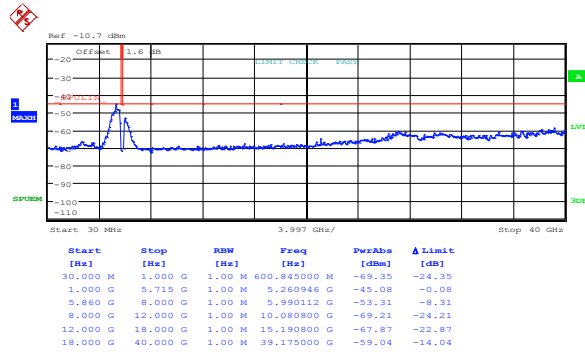


High channel
 Date: 22.APR.2015 16:18:13

Figure 8.4-20: Conducted peak spurious emissions outside restricted bands at high channel, ch1, PMP with Antenna configuration 1


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

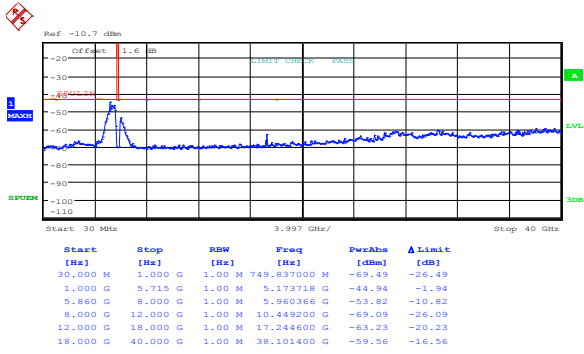


High channel
 Date: 22.APR.2015 16:27:39

Figure 8.4-21: Conducted peak spurious emissions outside restricted bands at low channel, cho, PMP with Antenna configuration 2

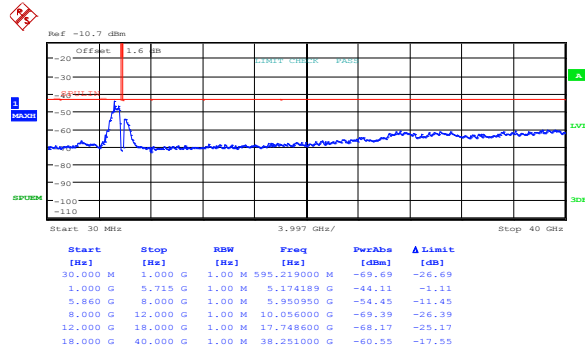


High channel
 Date: 22.APR.2015 16:28:14

Figure 8.4-22: Conducted peak spurious emissions outside restricted bands at low channel, ch1, PMP with Antenna configuration 2

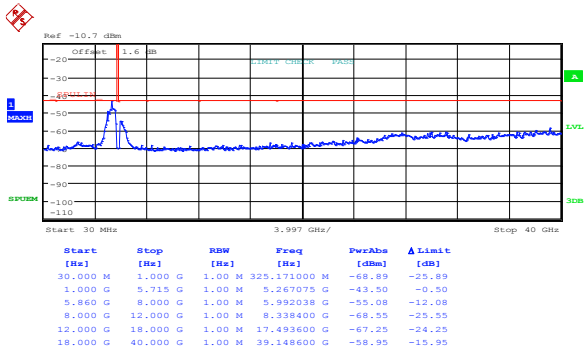

High channel
 Date: 22.APR.2015 16:20:11

Figure 8.4-23: Conducted peak spurious emissions outside restricted bands at high channel, cho, PMP with Antenna configuration 2

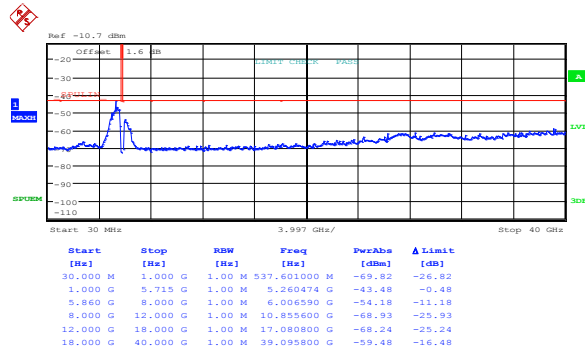


High channel
 Date: 22.APR.2015 16:20:47

Figure 8.4-24: Conducted peak spurious emissions outside restricted bands at high channel, ch1, PMP with Antenna configuration 2


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

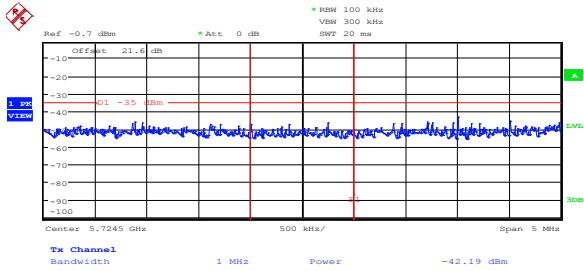


High channel
 Date: 22.APR.2015 13:07:35

Figure 8.4-25: Lower band edge emission at 5725 MHz, cho, PTP

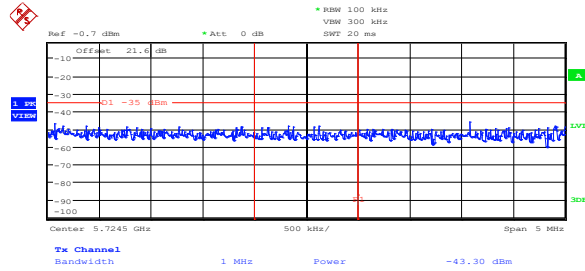


High channel
 Date: 22.APR.2015 13:08:12

Figure 8.4-26: Lower band edge emission at 5725 MHz, ch1, PTP

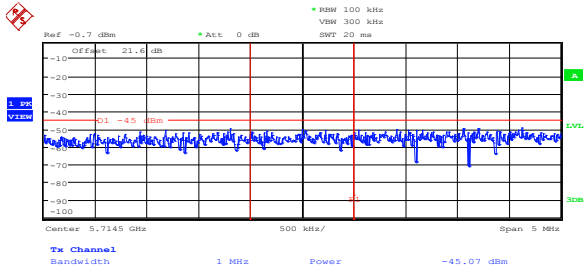

High channel
 Date: 22.APR.2015 13:06:07

Figure 8.4-27: Lower band edge emission at 5715 MHz, cho, PTP

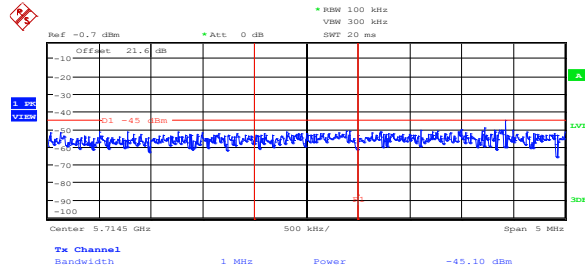


High channel
 Date: 22.APR.2015 13:05:03

Figure 8.4-28: Lower band edge emission at 5715 MHz, ch1, PTP


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

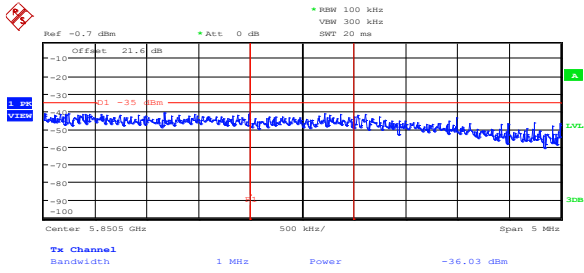


High channel
 Date: 22.APR.2015 13:48:13

Figure 8.4-29: Upper band edge emission at 5850 MHz, cho, PTP

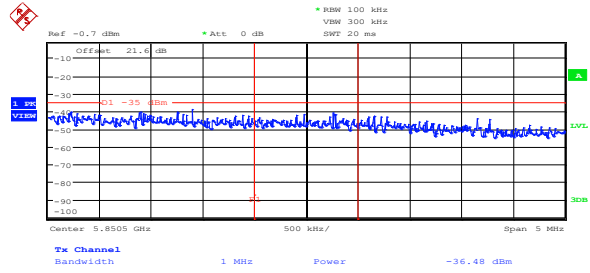


High channel
 Date: 22.APR.2015 13:42:30

Figure 8.4-30: Upper band edge emission at 5850 MHz, ch1, PTP

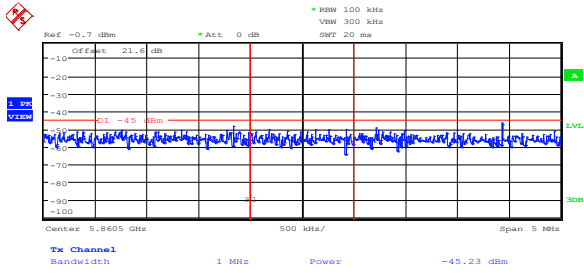

High channel
 Date: 22.APR.2015 13:47:34

Figure 8.4-31: Upper band edge emission at 5860 MHz, cho, PTP

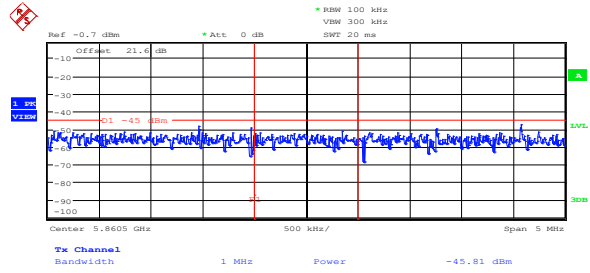


High channel
 Date: 22.APR.2015 13:43:49

Figure 8.4-32: Upper band edge emission at 5860 MHz, ch1, PTP


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

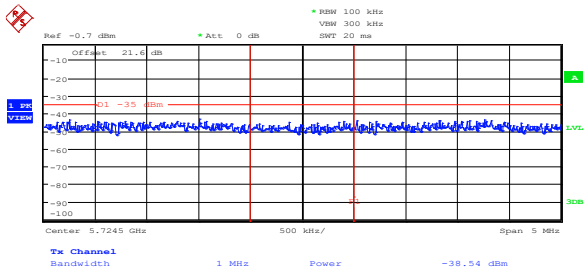


High channel
 Date: 22.APR.2015 15:37:55

Figure 8.4-33: Lower band edge emission at 5725 MHz, cho, PMP with Antenna configuration 1

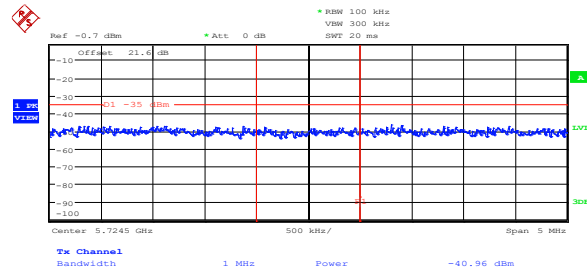


High channel
 Date: 22.APR.2015 15:37:11

Figure 8.4-34: Lower band edge emission at 5725 MHz, ch1, PMP with Antenna configuration 1

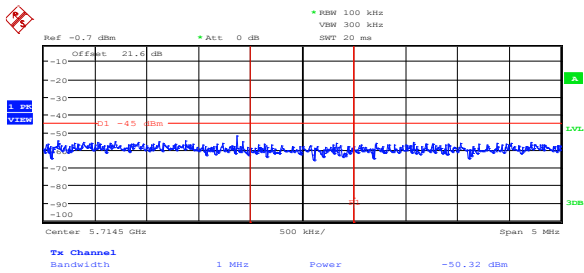

High channel
 Date: 22.APR.2015 15:34:53

Figure 8.4-35: Lower band edge emission at 5715 MHz, cho, PMP with Antenna configuration 1

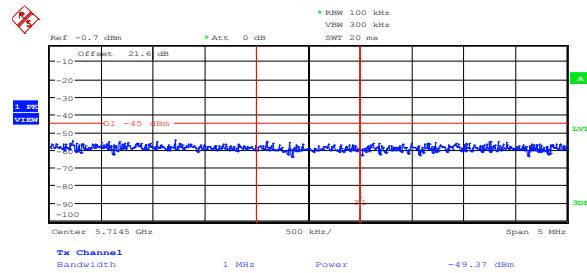


High channel
 Date: 22.APR.2015 15:34:11

Figure 8.4-36: Lower band edge emission at 5715 MHz, ch1, PMP with Antenna configuration 1


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

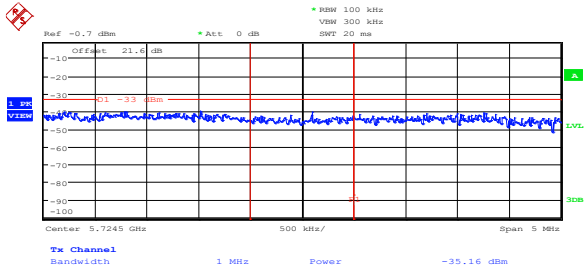


High channel
 Date: 22.APR.2015 15:36:17

Figure 8.4-37: Lower band edge emission at 5725 MHz, cho, PMP with Antenna configuration 2

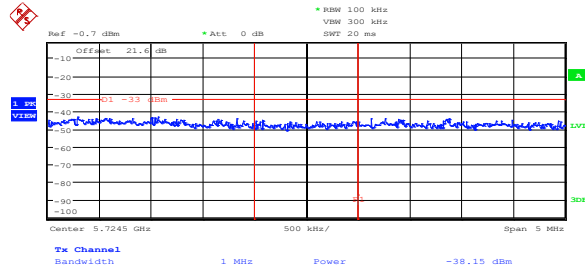


High channel
 Date: 22.APR.2015 15:36:47

Figure 8.4-38: Lower band edge emission at 5725 MHz, ch1, PMP with Antenna configuration 2

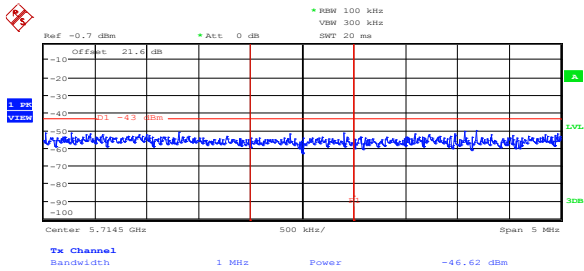

High channel
 Date: 22.APR.2015 15:35:22

Figure 8.4-39: Lower band edge emission at 5715 MHz, cho, PMP with Antenna configuration 2

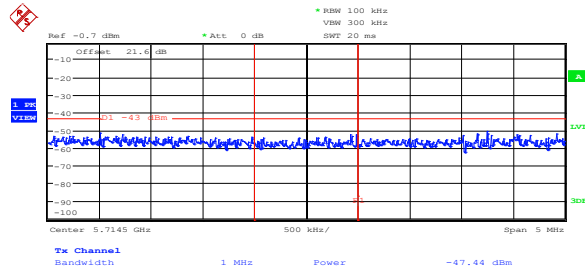


High channel
 Date: 22.APR.2015 15:33:21

Figure 8.4-40: Lower band edge emission at 5715 MHz, ch1, PMP with Antenna configuration 2


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

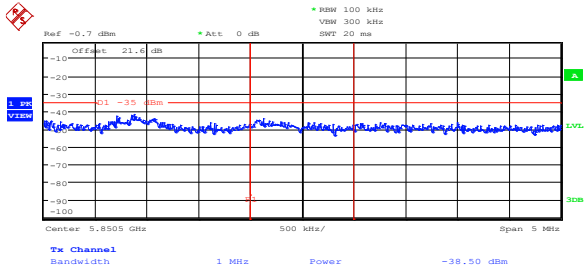


High channel
 Date: 22.APR.2015 16:05:13

Figure 8.4-41: Upper band edge emission at 5850 MHz, cho, PMP with Antenna configuration 1

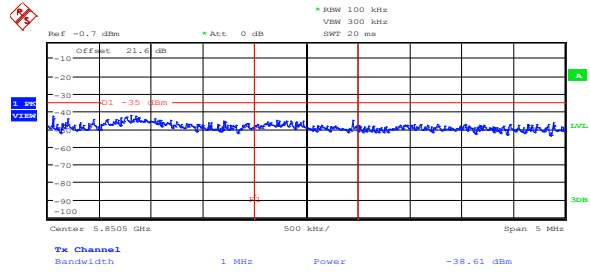


High channel
 Date: 22.APR.2015 16:05:37

Figure 8.4-42: Upper band edge emission at 5850 MHz, ch1, PMP with Antenna configuration 1

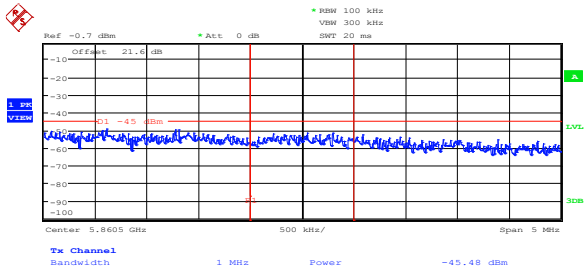

High channel
 Date: 22.APR.2015 16:04:20

Figure 8.4-43: Upper band edge emission at 5860 MHz, cho, PMP with Antenna configuration 1

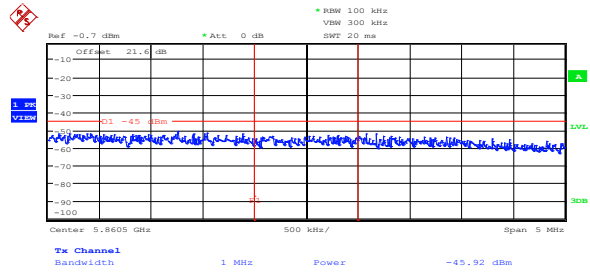


High channel
 Date: 22.APR.2015 16:03:53

Figure 8.4-44: Upper band edge emission at 5860 MHz, ch1, PMP with Antenna configuration 1


Section 8
Test name
Specification

Testing data
 FCC 15.407(b) Spurious (Undesirable) emissions
 FCC Part 15 Subpart E

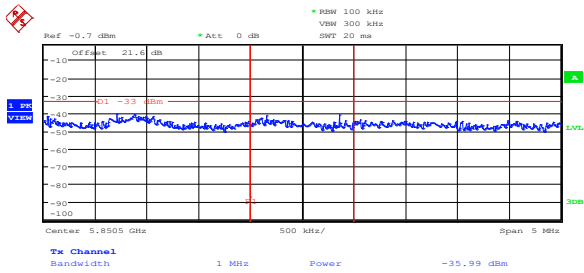


High channel
 Date: 22.APR.2015 15:59:40

Figure 8.4-45: Upper band edge emission at 5850 MHz, cho, PMP with Antenna configuration 2

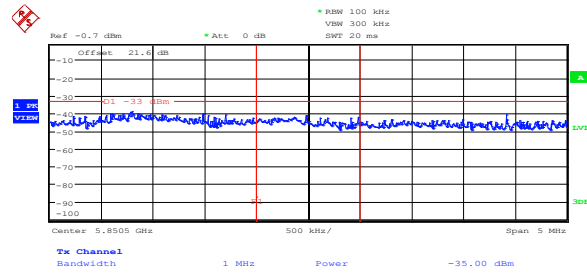


High channel
 Date: 22.APR.2015 15:55:48

Figure 8.4-46: Upper band edge emission at 5850 MHz, ch1, PMP with Antenna configuration 2

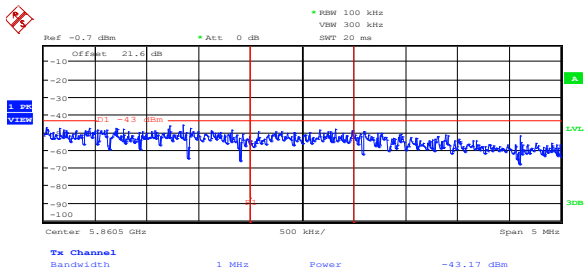

High channel
 Date: 22.APR.2015 15:58:42

Figure 8.4-47: Upper band edge emission at 5860 MHz, cho, PMP with Antenna configuration 2

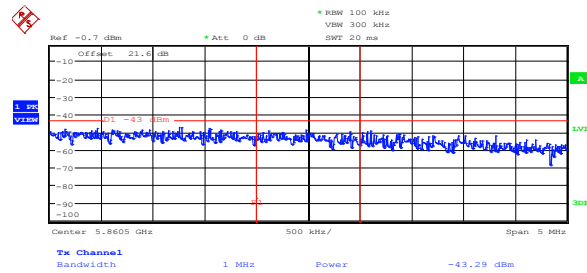

High channel
 Date: 22.APR.2015 15:54:49

Figure 8.4-48: Upper band edge emission at 5860 MHz, ch1, PMP with Antenna configuration 2

Table 8.4-3: Radiated field strength measurement results for emissions that fall outside restricted bands for PTP

| Frequency, MHz | Peak Field strength, dBμV/m | FS to EIRP conversion factor, dB | EIRP, dBm/MHz | Limit, dBm/MHz | Margin, dB |
|----------------------|-----------------------------|----------------------------------|---------------|----------------|------------|
| (low channel) 5187.0 | 64.85 | -95.23 | -30.38 | -27.00 | 3.38 |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

Table 8.4-4: Radiated field strength measurement results for emissions that fall outside restricted bands for PMP

| Frequency, MHz | Peak Field strength, dBμV/m | FS to EIRP conversion factor, dB | EIRP, dBm/MHz | Limit, dBm/MHz | Margin, dB |
|-----------------------|-----------------------------|----------------------------------|---------------|----------------|------------|
| (high channel) 5271.1 | 67.97 | -95.23 | -27.26 | -27.00 | 0.26 |
| (low channel) 5178.2 | 65.27 | -95.23 | -29.96 | -27.00 | 2.96 |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

Table 8.4-5: Radiated field strength measurement results for emissions that fall within restricted bands for PTP

| Frequency, MHz | Peak Field strength, dBμV/m | Peak limit, dBμV/m | Peak margin, dB | Average Field strength, dBμV/m | Average limit, dBμV/m | Average margin, dB |
|-----------------------|-----------------------------|--------------------|-----------------|--------------------------------|-----------------------|--------------------|
| (high channel) 5100.0 | 56.63 | 74.00 | 17.37 | 44.65 | 54.00 | 9.35 |
| (high channel) 5420.0 | 61.93 | 74.00 | 12.07 | 47.69 | 54.00 | 6.31 |
| (low channel) 5090.0 | 57.49 | 74.00 | 16.51 | 44.52 | 54.00 | 9.48 |
| (low channel) 5437.0 | 61.25 | 74.00 | 12.75 | 47.61 | 54.00 | 6.39 |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

Table 8.4-6: Radiated field strength measurement results for emissions that fall within restricted bands for PMP with Antenna configuration 1

| Frequency, MHz | Peak Field strength, dBμV/m | Peak limit, dBμV/m | Peak margin, dB | Average Field strength, dBμV/m | Average limit, dBμV/m | Average margin, dB |
|-----------------------|-----------------------------|--------------------|-----------------|--------------------------------|-----------------------|--------------------|
| (high channel) 5128.5 | 59.25 | 74.00 | 14.75 | 45.71 | 54.00 | 8.29 |
| (high channel) 5325.0 | 62.14 | 74.00 | 11.86 | 48.82 | 54.00 | 5.18 |
| (low channel) 5147.0 | 58.50 | 74.00 | 15.50 | 45.29 | 54.00 | 8.71 |
| (low channel) 5455.0 | 61.48 | 74.00 | 12.52 | 47.91 | 54.00 | 6.09 |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

Table 8.4-7: Radiated field strength measurement results for emissions that fall within restricted bands for PMP with Antenna configuration 2

| Frequency, MHz | Peak Field strength, dBμV/m | Peak limit, dBμV/m | Peak margin, dB | Average Field strength, dBμV/m | Average limit, dBμV/m | Average margin, dB |
|-----------------------|-----------------------------|--------------------|-----------------|--------------------------------|-----------------------|--------------------|
| (high channel) 5101.1 | 56.92 | 74.00 | 17.08 | 43.46 | 54.00 | 10.54 |
| (high channel) 5470.0 | 60.06 | 74.00 | 13.94 | 46.97 | 54.00 | 7.03 |
| (low channel) 5110.0 | 57.10 | 74.00 | 16.90 | 43.53 | 54.00 | 10.47 |
| (low channel) 5431.9 | 60.66 | 74.00 | 13.34 | 47.72 | 54.00 | 6.28 |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

8.5 FCC 15.407(g) Frequency stability

8.5.1 Definitions and limits

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

8.5.2 Test summary

| | | | |
|----------------|-----------------|--------------------|-----------|
| Test date: | April 22, 2015 | Temperature: | 23 °C |
| Test engineer: | Andrey Adelberg | Air pressure: | 1007 mbar |
| Verdict: | Pass | Relative humidity: | 32 % |

8.5.3 Observations, settings and special notes

Spectrum analyser settings:


| | |
|-----------------------|----------|
| Resolution bandwidth: | 100 kHz |
| Video bandwidth: | 300 kHz |
| Detector mode: | Peak |
| Trace mode: | Max Hold |

8.5.4 Test data

Frequency stability was assessed between two extreme temperatures +55 °C and -30 °C.
Maximum recorded frequency drift was 100 kHz, which is 17 ppm

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up

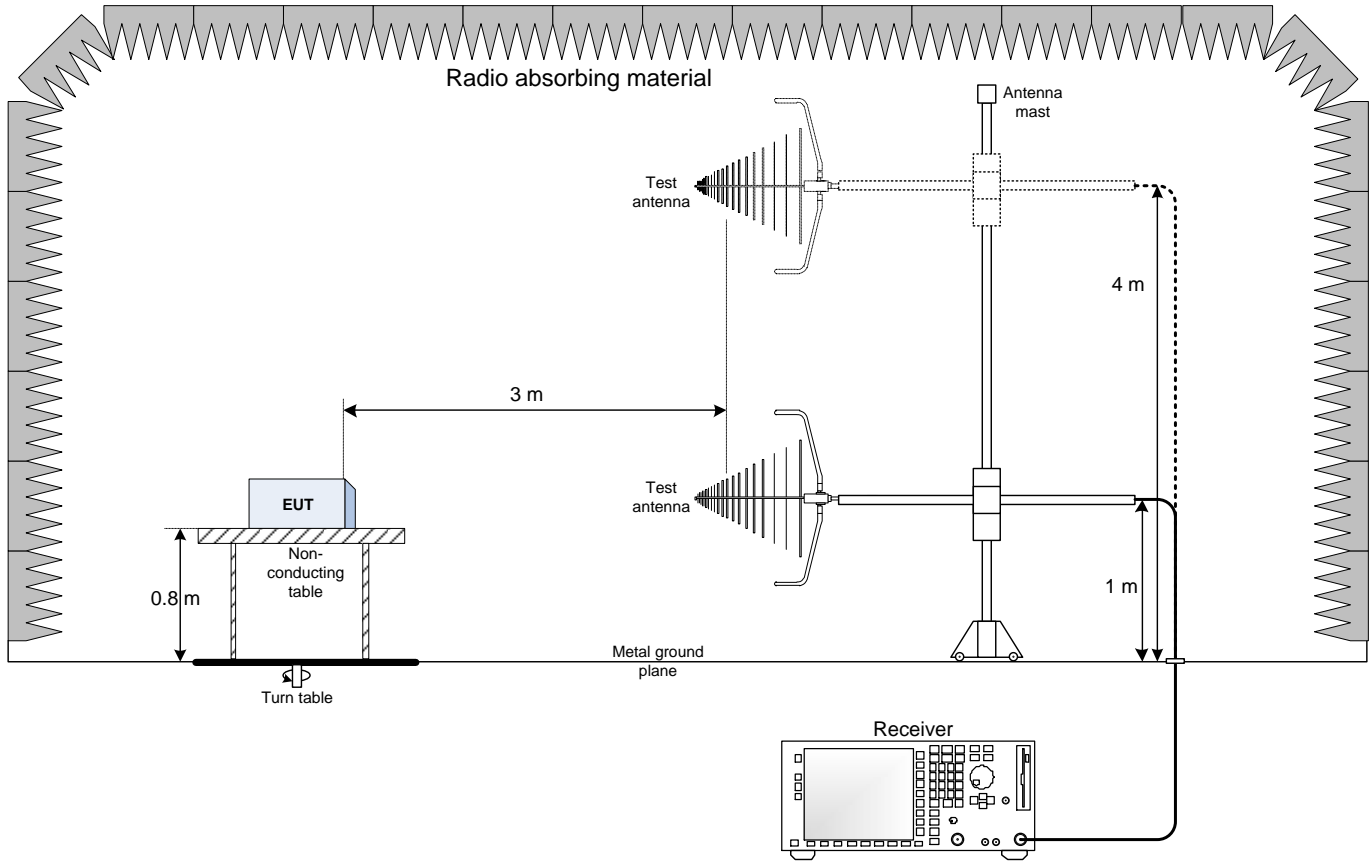

9.2 Conducted emissions set-up

