



FCC Part 15C Test Report

FCC ID: ROWCDW-507601U-10

Product Name:	WiFi Module
Trademark:	N/A
Model Name :	CDW-507601U-10
Prepared For :	CHINA DRAGON TECHNOLOGY LIMITED
Address :	B4 Bidg.haosan No.1 Industry Park,Shajing street,B, Shenzhen, China
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Apr. 02 - Apr. 09, 2018
Date of Report :	Apr. 09, 2018
Report No.:	BCTC-FY180301616E




TEST RESULT CERTIFICATION

Applicant's name..... : **CHINA DRAGON TECHNOLOGY LIMITED**
Address..... : B4 Bidg.haosan No.1 Industry Park,Shajing street,B, Shenzhen,
China
Manufacture's Name..... : **CHINA DRAGON TECHNOLOGY LIMITED**
Address..... : B4 Bidg.haosan No.1 Industry Park,Shajing street,B, Shenzhen,
China
Product description
Product name.....: WiFi Module
Model and/or type reference : CDW-507601U-10
Standards..... : FCC Part15.247
ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Eric Yang
Reviewer(Supervisor): Jade Yang
Approved(Manager): Carson Zhang



**Table of Contents**

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	11
3.1.3 DEVIATION FROM TEST STANDARD	11
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 RADIATED EMISSION LIMITS	15
3.2.2 TEST PROCEDURE	16
3.2.3 DEVIATION FROM TEST STANDARD	16
3.2.4 TEST SETUP	16
3.2.5 EUT OPERATING CONDITIONS	17
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	18
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	19
3.3 RADIATED BAND EMISSION MEASUREMENT	34
3.3.1 TEST REQUIREMENT:	34
3.3.2 TEST PROCEDURE	34
3.3.3 DEVIATION FROM TEST STANDARD	35
3.3.4 TEST SETUP	35
3.3.5 EUT OPERATING CONDITIONS	35
4 . POWER SPECTRAL DENSITY TEST	39
4.1 APPLIED PROCEDURES / LIMIT	39
4.1.1 TEST PROCEDURE	39
4.1.2 DEVIATION FROM STANDARD	39

**Table of Contents**

	Page
4.1.3 TEST SETUP	39
4.1.4 EUT OPERATION CONDITIONS	39
4.1.5 TEST RESULTS	40
5 . BANDWIDTH TEST	48
5.1 APPLIED PROCEDURES / LIMIT	48
5.1.1 TEST PROCEDURE	48
5.1.2 DEVIATION FROM STANDARD	48
5.1.3 TEST SETUP	48
5.1.4 EUT OPERATION CONDITIONS	48
5.1.5 TEST RESULTS	49
6 . PEAK OUTPUT POWER TEST	57
6.1 APPLIED PROCEDURES / LIMIT	57
6.1.1 TEST PROCEDURE	57
6.1.2 DEVIATION FROM STANDARD	57
6.1.3 TEST SETUP	57
6.1.4 EUT OPERATION CONDITIONS	57
6.1.5 TEST RESULTS	58
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	59
7.1 APPLICABLE STANDARD	59
7.2 TEST PROCEDURE	59
7.3 DEVIATION FROM STANDARD	59
7.4 TEST SETUP	59
7.5 EUT OPERATION CONDITIONS	59
7.1 TEST RESULTS	59
8 . DUTY CYCLE OF TEST SIGNAL	68
8.1 STANDARD REQUIREMENT	68
8.2 FORMULA:	68
9 . ANTENNA REQUIREMENT	71
9.1 STANDARD REQUIREMENT	71
9.2 EUT ANTENNA	71
10 . EUT TEST PHOTO	72
11 . EUT PHOTO	74
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Restricted Band of Operation	PASS	
15.247 (d)	Band Edge (Out of Band Emissions)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	WiFi Module	
Trade Name	N/A	
Model Name	CDW-507601U-10	
Serial Model	N/A	
Model Difference	N/A	
Product Description	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
	Modulation Type:	WIFI: OFDM/DSSS
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
	Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
	Antenna Designation:	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Power Source	DC 3.3V	
hardware version	--	
Software version	--	
Serial number	--	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	N/A	External Antenna	3.52	
2	N/A	N/A	External Antenna	2.8	
3	N/A	N/A	External Antenna	3.60	

2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test



Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	WiFi Module	N/A	CDW-507601U-10	N/A	EUT
E-2	PC	N/A	BCTC-EMC2016-0069	Lenov B51-80	Lab.Provide
E-3	adapter	N/A	ADLX65NLC3A	N/A	Lab.Provide

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1M	USB cable unshielded
C2	NO	NO	1.5M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	2017.08.27	2018.08.26
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	2017.08.27	2018.08.26
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	2017.08.27	2018.08.26
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1201	2017.09.03	2018.09.02
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2017.09.03	2018.09.02
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2017.08.27	2018.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2017.08.27	2018.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2017.08.27	2018.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2017.09.03	2018.09.02
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2017.08.27	2018.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2017.08.27	2018.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2017.08.27	2018.08.26
13	Power Metter	ANRITSU	ML2487A	6K00001568	2017.08.27	2018.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2017.08.27	2018.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2017.08.27	2018.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2017.08.27	2018.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2017.08.27	2018.08.26

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-1011 65-ha	2017.08.27	2018.08.26
2	LISN	SCHWARZBECK	NSLK8127	8127739	2017.08.27	2018.08.26
3	LISN	R&S	NSLK8126	8126487	2017.08.27	2018.08.26
4	RF cables	R&S	R204	R20X	2017.08.27	2018.08.26
5	Attenuator	R&S	ESH3-Z2	143206	2017.08.27	2018.08.26



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

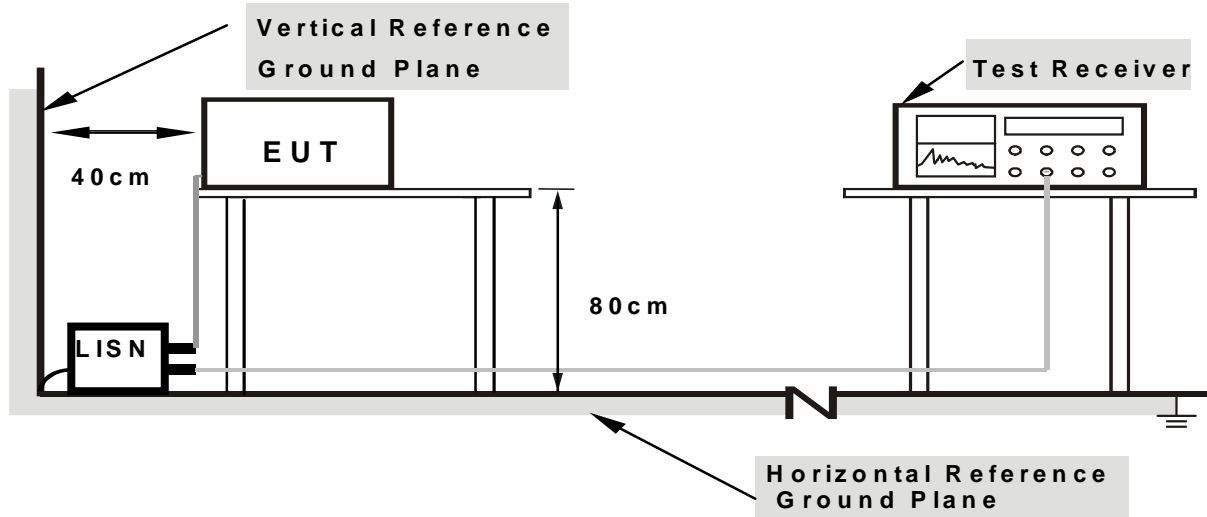

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



3.1.6 TEST RESULTS

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

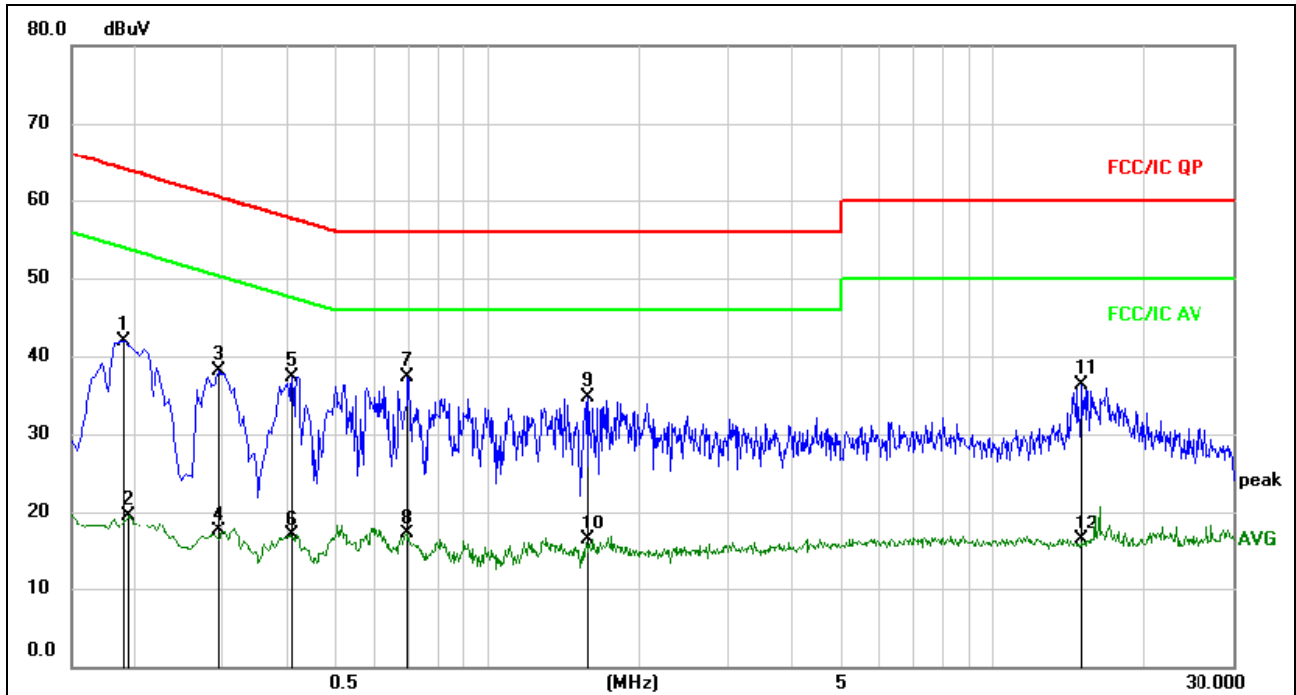


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1905	22.61	19.37	41.98	64.01	-22.03	QP	
2		0.1949	0.16	19.37	19.53	53.83	-34.30	AVG	
3		0.2940	18.66	19.40	38.06	60.41	-22.35	QP	
4		0.2940	-1.99	19.40	17.41	50.41	-33.00	AVG	
5		0.4110	18.05	19.34	37.39	57.63	-20.24	QP	
6		0.4110	-2.46	19.34	16.88	47.63	-30.75	AVG	
7	*	0.6900	17.83	19.52	37.35	56.00	-18.65	QP	
8		0.6900	-2.47	19.52	17.05	46.00	-28.95	AVG	
9		1.5900	15.34	19.43	34.77	56.00	-21.23	QP	
10		1.5900	-3.20	19.43	16.23	46.00	-29.77	AVG	
11		15.0180	16.54	19.71	36.25	60.00	-23.75	QP	
12		15.0180	-3.32	19.71	16.39	50.00	-33.61	AVG	



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

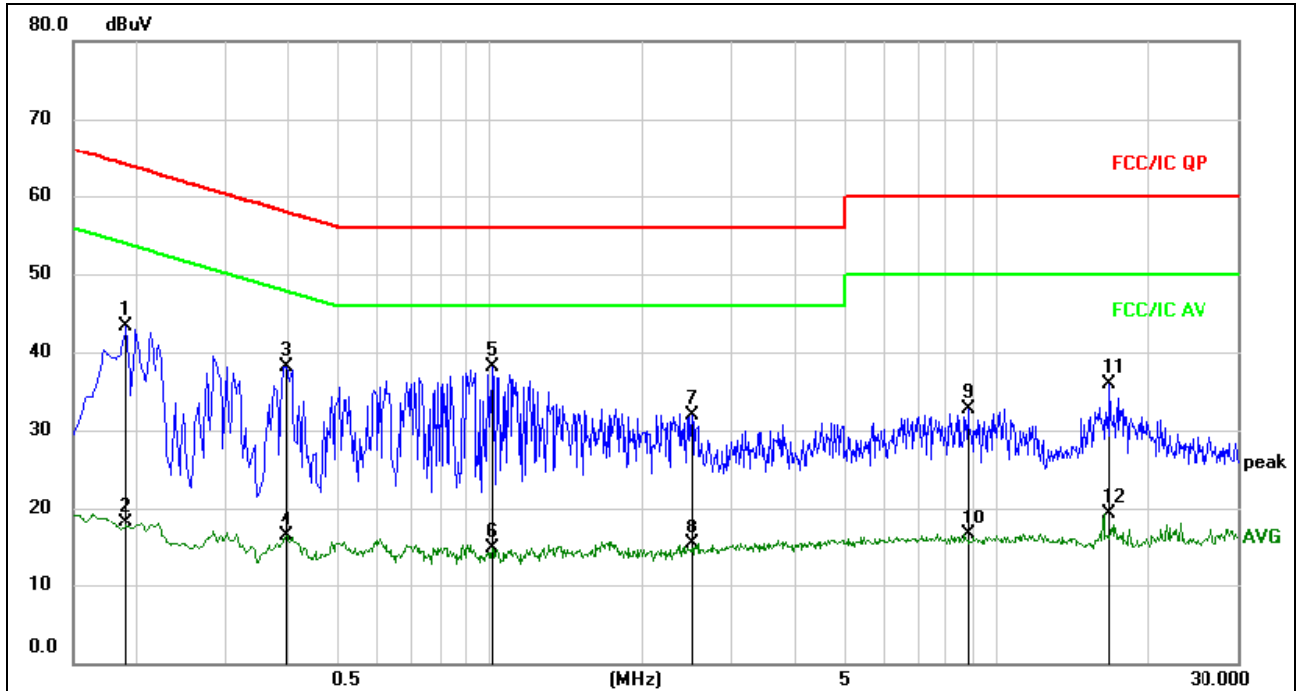

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1905	23.94	19.37	43.31	64.01	-20.70	QP	
2		0.1905	-1.29	19.37	18.08	54.01	-35.93	AVG	
3		0.3975	18.81	19.33	38.14	57.91	-19.77	QP	
4		0.3975	-3.08	19.33	16.25	47.91	-31.66	AVG	
5	*	1.0095	18.76	19.41	38.17	56.00	-17.83	QP	
6		1.0095	-4.75	19.41	14.66	46.00	-31.34	AVG	
7		2.5125	12.49	19.47	31.96	56.00	-24.04	QP	
8		2.5125	-4.24	19.47	15.23	46.00	-30.77	AVG	
9		8.8215	13.03	19.61	32.64	60.00	-27.36	QP	
10		8.8215	-3.20	19.61	16.41	50.00	-33.59	AVG	
11		16.6830	16.20	19.75	35.95	60.00	-24.05	QP	
12		16.6830	-0.43	19.75	19.32	50.00	-30.68	AVG	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

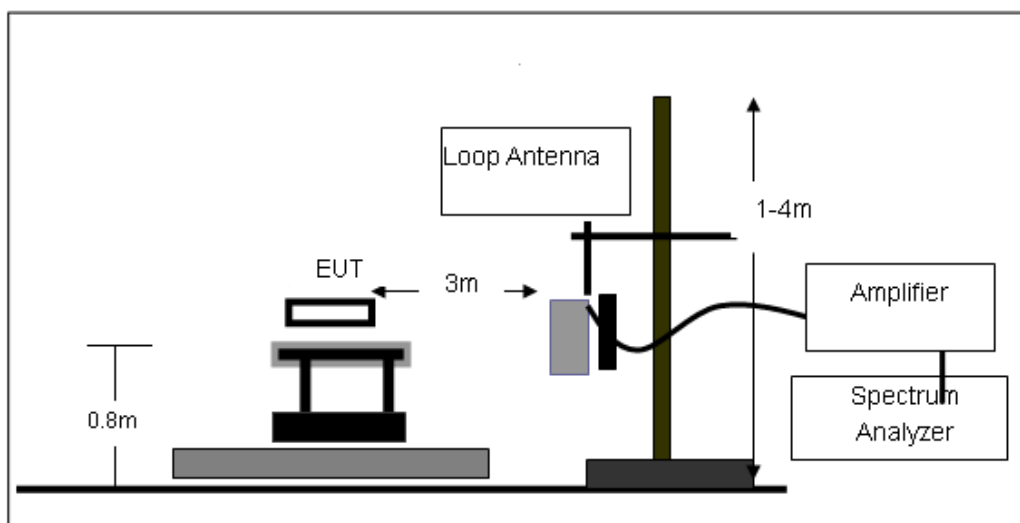

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

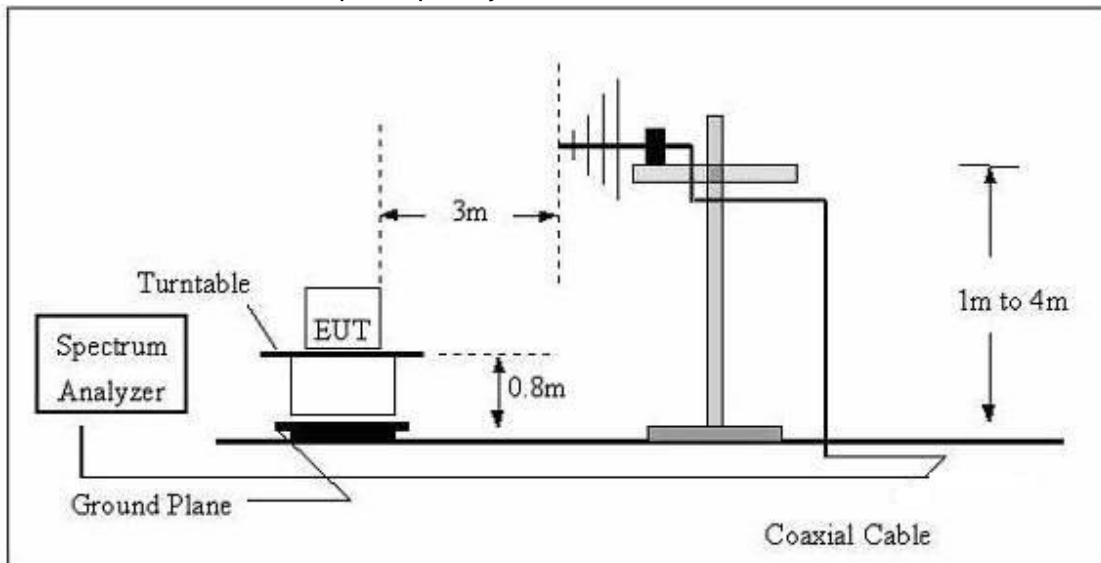

(C) Radiated Emission Test-Up Frequency Above 1GHz

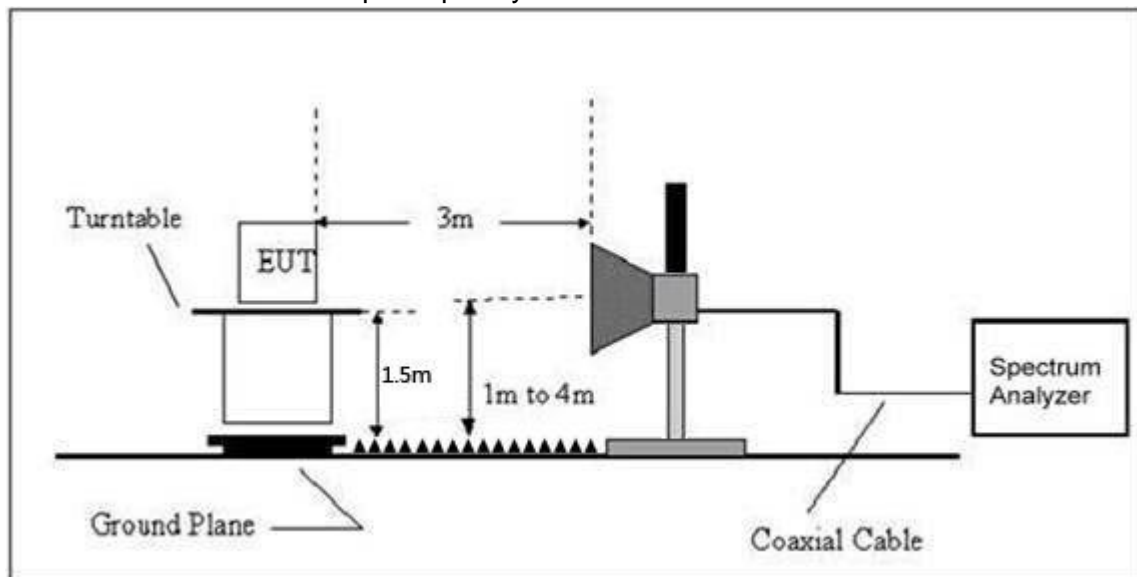

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.3V
Test Mode :	Mode 5	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.3V		
Test Mode :	Mode 5		

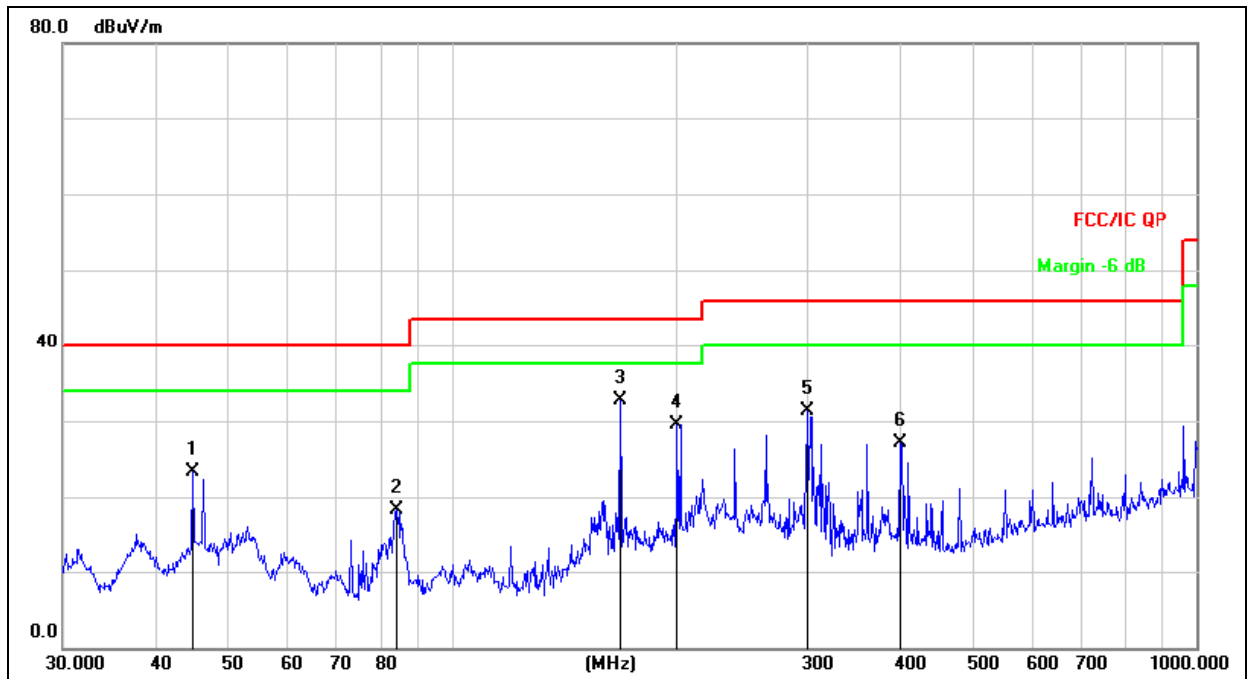


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.7433	37.36	-14.08	23.28	40.00	-16.72	QP
2		84.1100	37.00	-18.73	18.27	40.00	-21.73	QP
3	*	167.8243	51.47	-18.69	32.78	43.50	-10.72	QP
4		199.9856	45.81	-16.28	29.53	43.50	-13.97	QP
5		300.3672	44.75	-13.45	31.30	46.00	-14.70	QP
6		399.0302	39.01	-12.00	27.01	46.00	-18.99	QP



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.3V		
Test Mode :	Mode 5		

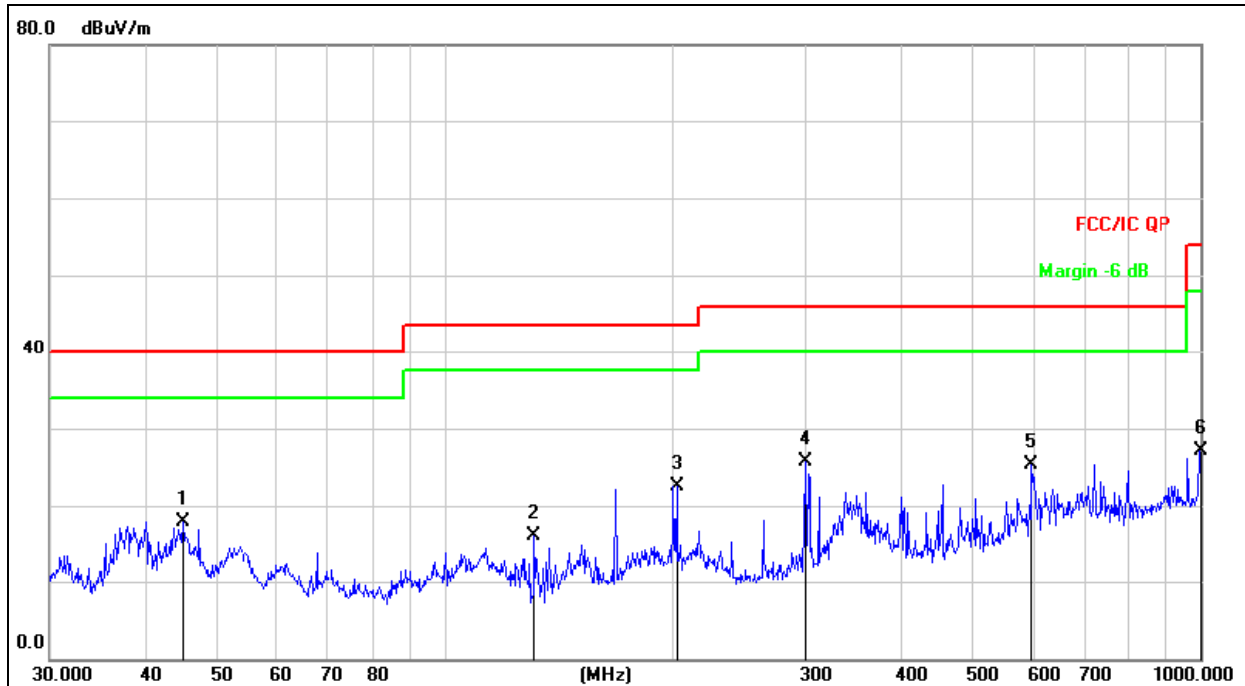

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.9006	32.01	-14.05	17.96	40.00	-22.04	QP
2		131.2965	35.18	-19.11	16.07	43.50	-27.43	QP
3		202.1005	38.81	-16.27	22.54	43.50	-20.96	QP
4	*	300.3672	39.09	-13.45	25.64	46.00	-20.36	QP
5		597.2234	32.16	-6.77	25.39	46.00	-20.61	QP
6		1000.000	28.73	-1.54	27.19	54.00	-26.81	QP



3.2.8 TEST RESULTS (1ghz~25ghz)

ANT 1

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412									
V	4824.00	67.00	39.55	7.85	25.66	60.96	74.00	-13.04	PK
V	4824.00	48.96	39.55	7.85	25.66	42.92	54.00	-11.08	AV
V	7236.00	67.22	38.33	7.52	24.55	60.96	74.00	-13.04	PK
V	7236.00	48.05	38.33	7.52	24.55	41.79	54.00	-12.21	AV
V	15450.00	45.02	35.23	6.75	26.59	43.13	74.00	-30.87	PK
H	4824.00	67.62	39.55	7.85	25.66	61.58	74.00	-12.42	PK
H	4824.00	49.92	39.55	7.85	25.66	43.88	54.00	-10.12	AV
H	7236.00	67.84	38.33	7.52	23.55	60.58	74.00	-13.42	PK
H	7236.00	44.83	38.33	7.52	23.22	37.24	54.00	-16.76	AV
H	15450.00	47.27	35.45	6.75	27.88	46.45	74.00	-27.55	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	68.00	38.89	7.57	25.45	62.13	74.00	-11.87	PK
V	4874.00	50.70	38.89	7.57	25.45	44.83	54.00	-9.17	AV
V	7311.00	67.37	38.78	7.35	24.78	60.72	74.00	-13.28	PK
V	7311.00	47.71	38.78	7.35	24.78	41.06	54.00	-12.94	AV
V	15450.00	46.51	35.89	6.42	26.47	43.51	74.00	-30.49	PK
H	4874.00	66.06	38.89	7.57	25.45	60.19	74.00	-13.81	PK
H	4874.00	49.10	38.89	7.57	25.45	43.23	54.00	-10.77	AV
H	7311.00	69.34	38.78	7.35	24.78	62.69	74.00	-11.31	PK
H	7311.00	48.37	38.78	7.35	24.78	41.72	54.00	-12.28	AV
H	15450.00	45.06	36.68	6.42	26.65	41.45	74.00	-32.55	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462									
V	4924.00	67.12	38.75	7.46	25.45	61.28	74.00	-12.72	PK
V	4924.00	49.92	38.75	7.46	25.45	44.08	54.00	-9.92	AV
V	7386.00	65.94	38.65	7.22	24.78	59.29	74.00	-14.71	PK
V	7386.00	48.26	38.65	7.22	24.78	41.61	54.00	-12.39	AV
V	15450.00	46.58	35.58	6.35	26.47	43.82	74.00	-30.18	PK
H	4924.00	64.36	38.75	7.46	25.45	58.52	74.00	-15.48	PK
H	4924.00	48.73	38.75	7.46	25.45	42.89	54.00	-11.11	AV
H	7386.00	68.97	38.65	7.22	24.78	62.32	74.00	-11.68	PK
H	7386.00	47.04	38.65	7.22	24.78	40.39	54.00	-13.61	AV
H	15450.00	46.17	36.42	6.32	26.65	42.72	74.00	-31.28	PK



Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412									
V	4824.00	66.27	39.55	7.85	25.66	60.23	74.00	-13.77	PK
V	4824.00	48.43	39.55	7.85	25.66	42.39	54.00	-11.61	AV
V	7236.00	66.49	38.33	7.52	24.55	60.23	74.00	-13.77	PK
V	7236.00	47.53	38.33	7.52	24.55	41.27	54.00	-12.73	AV
V	15450.00	44.54	35.23	6.75	26.59	42.65	74.00	-31.35	PK
H	4824.00	66.88	39.55	7.85	25.66	60.84	74.00	-13.16	PK
H	4824.00	49.38	39.55	7.85	25.66	43.34	54.00	-10.66	AV
H	7236.00	67.11	38.33	7.52	23.55	59.85	74.00	-14.15	PK
H	7236.00	44.35	38.33	7.52	23.22	36.76	54.00	-17.24	AV
H	15450.00	46.75	35.45	6.75	27.88	45.93	74.00	-28.07	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	67.27	38.89	7.57	25.45	61.40	74.00	-12.60	PK
V	4874.00	50.15	38.89	7.57	25.45	44.28	54.00	-9.72	AV
V	7311.00	66.64	38.78	7.35	24.78	59.99	74.00	-14.01	PK
V	7311.00	47.20	38.78	7.35	24.78	40.55	54.00	-13.45	AV
V	15450.00	46.00	35.89	6.42	26.47	43.00	74.00	-31.00	PK
H	4874.00	65.34	38.89	7.57	25.45	59.47	74.00	-14.53	PK
H	4874.00	48.57	38.89	7.57	25.45	42.70	54.00	-11.30	AV
H	7311.00	68.59	38.78	7.35	24.78	61.94	74.00	-12.06	PK
H	7311.00	47.85	38.78	7.35	24.78	41.20	54.00	-12.80	AV
H	15450.00	44.57	36.68	6.42	26.65	40.96	74.00	-33.04	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462									
V	4924.00	66.39	38.75	7.46	25.45	60.55	74.00	-13.45	PK
V	4924.00	49.37	38.75	7.46	25.45	43.53	54.00	-10.47	AV
V	7386.00	65.23	38.65	7.22	24.78	58.58	74.00	-15.42	PK
V	7386.00	47.74	38.65	7.22	24.78	41.09	54.00	-12.91	AV
V	15450.00	46.07	35.58	6.35	26.47	43.31	74.00	-30.69	PK
H	4924.00	63.66	38.75	7.46	25.45	57.82	74.00	-16.18	PK
H	4924.00	48.20	38.75	7.46	25.45	42.36	54.00	-11.64	AV
H	7386.00	68.22	38.65	7.22	24.78	61.57	74.00	-12.43	PK
H	7386.00	46.53	38.65	7.22	24.78	39.88	54.00	-14.12	AV
H	15450.00	45.67	36.42	6.32	26.65	42.22	74.00	-31.78	PK



Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n(20MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412									
V	4824.00	66.04	39.55	7.85	25.66	60.00	74.00	-14.00	PK
V	4824.00	48.26	39.55	7.85	25.66	42.22	54.00	-11.78	AV
V	7236.00	66.25	38.33	7.52	24.55	59.99	74.00	-14.01	PK
V	7236.00	47.36	38.33	7.52	24.55	41.10	54.00	-12.90	AV
V	15450.00	44.38	35.23	6.75	26.59	42.49	74.00	-31.51	PK
H	4824.00	66.65	39.55	7.85	25.66	60.61	74.00	-13.39	PK
H	4824.00	49.21	39.55	7.85	25.66	43.17	54.00	-10.83	AV
H	7236.00	66.87	38.33	7.52	23.55	59.61	74.00	-14.39	PK
H	7236.00	44.19	38.33	7.52	23.22	36.60	54.00	-17.40	AV
H	15450.00	46.59	35.45	6.75	27.88	45.77	74.00	-28.23	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	67.03	38.89	7.57	25.45	61.16	74.00	-12.84	PK
V	4874.00	49.97	38.89	7.57	25.45	44.10	54.00	-9.90	AV
V	7311.00	66.40	38.78	7.35	24.78	59.75	74.00	-14.25	PK
V	7311.00	47.03	38.78	7.35	24.78	40.38	54.00	-13.62	AV
V	15450.00	45.84	35.89	6.42	26.47	42.84	74.00	-31.16	PK
H	4874.00	65.11	38.89	7.57	25.45	59.24	74.00	-14.76	PK
H	4874.00	48.39	38.89	7.57	25.45	42.52	54.00	-11.48	AV
H	7311.00	68.34	38.78	7.35	24.78	61.69	74.00	-12.31	PK
H	7311.00	47.68	38.78	7.35	24.78	41.03	54.00	-12.97	AV
H	15450.00	44.42	36.68	6.42	26.65	40.81	74.00	-33.19	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462									
V	4924.00	66.15	38.75	7.46	25.45	60.31	74.00	-13.69	PK
V	4924.00	49.20	38.75	7.46	25.45	43.36	54.00	-10.64	AV
V	7386.00	65.00	38.65	7.22	24.78	58.35	74.00	-15.65	PK
V	7386.00	47.57	38.65	7.22	24.78	40.92	54.00	-13.08	AV
V	15450.00	45.91	35.58	6.35	26.47	43.15	74.00	-30.85	PK
H	4924.00	63.44	38.75	7.46	25.45	57.60	74.00	-16.40	PK
H	4924.00	48.03	38.75	7.46	25.45	42.19	54.00	-11.81	AV
H	7386.00	67.98	38.65	7.22	24.78	61.33	74.00	-12.67	PK
H	7386.00	46.36	38.65	7.22	24.78	39.71	54.00	-14.29	AV
H	15450.00	45.51	36.42	6.32	26.65	42.06	74.00	-31.94	PK



Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n(40MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2422									
V	4844	64.78	39.55	7.77	25.66	58.66	74.00	-15.34	PK
V	4844	47.27	39.55	7.77	25.66	41.15	54.00	-12.85	AV
V	7266	64.72	38.33	7.30	24.55	58.24	74.00	-15.76	PK
V	7266	45.22	38.33	7.30	24.55	38.74	54.00	-15.26	AV
V	15440	47.11	35.23	6.60	26.59	45.07	74.00	-28.93	PK
H	4844	65.81	39.55	7.77	25.66	59.69	74.00	-14.31	PK
H	4844	42.65	39.55	7.77	25.66	36.53	54.00	-17.47	AV
H	7266	62.02	38.33	7.30	23.55	54.54	74.00	-19.46	PK
H	7266	46.32	38.33	7.30	23.22	38.51	54.00	-15.49	AV
H	15440	45.44	35.45	6.60	27.88	44.47	74.00	-29.53	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	64.84	38.89	7.57	25.45	58.97	74.00	-15.03	PK
V	4874.00	47.92	38.89	7.57	25.45	42.05	54.00	-11.95	AV
V	7311.00	67.84	38.78	7.35	24.78	61.19	74.00	-12.81	PK
V	7311.00	48.21	38.78	7.35	24.78	41.56	54.00	-12.44	AV
V	15450.00	47.62	35.89	6.42	26.47	44.62	74.00	-29.38	PK
H	4874.00	66.66	38.89	7.57	25.45	60.79	74.00	-13.21	PK
H	4874.00	47.85	38.89	7.57	25.45	41.98	54.00	-12.02	AV
H	7311.00	64.65	38.78	7.35	24.78	58.00	74.00	-16.00	PK
H	7311.00	48.41	38.78	7.35	24.78	41.76	54.00	-12.24	AV
H	15450.00	45.93	36.68	6.42	26.65	42.32	74.00	-31.68	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2452									
V	4904.00	65.83	38.75	7.38	25.45	59.91	74.00	-14.09	PK
V	4904.00	47.17	38.75	7.38	25.45	41.25	54.00	-12.75	AV
V	7356.00	62.21	38.65	7.15	24.78	55.49	74.00	-18.51	PK
V	7356.00	46.21	38.65	7.15	24.78	39.49	54.00	-14.51	AV
V	15440.00	47.54	35.58	6.25	26.47	44.68	74.00	-29.32	PK
H	4904.00	66.56	38.75	7.38	25.45	60.64	74.00	-13.36	PK
H	4904.00	43.50	38.75	7.38	25.45	37.58	54.00	-16.42	AV
H	7356.00	57.91	38.65	7.15	24.78	51.19	74.00	-22.81	PK
H	7356.00	45.49	38.65	7.15	24.78	38.77	54.00	-15.23	AV
H	15440.00	45.05	36.42	6.25	26.65	41.53	74.00	-32.47	PK



Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



ANT 2

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412									
V	4824.00	66.48	39.55	7.85	25.66	60.44	74.00	-13.56	PK
V	4824.00	48.58	39.55	7.85	25.66	42.54	54.00	-11.46	AV
V	7236.00	66.70	38.33	7.52	24.55	60.44	74.00	-13.56	PK
V	7236.00	47.68	38.33	7.52	24.55	41.42	54.00	-12.58	AV
V	15450.00	44.67	35.23	6.75	26.59	42.78	74.00	-31.22	PK
H	4824.00	67.09	39.55	7.85	25.66	61.05	74.00	-12.95	PK
H	4824.00	49.54	39.55	7.85	25.66	43.50	54.00	-10.50	AV
H	7236.00	67.32	38.33	7.52	23.55	60.06	74.00	-13.94	PK
H	7236.00	44.49	38.33	7.52	23.22	36.90	54.00	-17.10	AV
H	15450.00	46.90	35.45	6.75	27.88	46.08	74.00	-27.92	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	67.48	38.89	7.57	25.45	61.61	74.00	-12.39	PK
V	4874.00	50.31	38.89	7.57	25.45	44.44	54.00	-9.56	AV
V	7311.00	66.84	38.78	7.35	24.78	60.19	74.00	-13.81	PK
V	7311.00	47.34	38.78	7.35	24.78	40.69	54.00	-13.31	AV
V	15450.00	46.15	35.89	6.42	26.47	43.15	74.00	-30.85	PK
H	4874.00	65.55	38.89	7.57	25.45	59.68	74.00	-14.32	PK
H	4874.00	48.72	38.89	7.57	25.45	42.85	54.00	-11.15	AV
H	7311.00	68.80	38.78	7.35	24.78	62.15	74.00	-11.85	PK
H	7311.00	48.00	38.78	7.35	24.78	41.35	54.00	-12.65	AV
H	15450.00	44.71	36.68	6.42	26.65	41.10	74.00	-32.90	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462									
V	4924.00	66.60	38.75	7.46	25.45	60.76	74.00	-13.24	PK
V	4924.00	49.53	38.75	7.46	25.45	43.69	54.00	-10.31	AV
V	7386.00	65.43	38.65	7.22	24.78	58.78	74.00	-15.22	PK
V	7386.00	47.89	38.65	7.22	24.78	41.24	54.00	-12.76	AV
V	15450.00	46.22	35.58	6.35	26.47	43.46	74.00	-30.54	PK
H	4924.00	63.86	38.75	7.46	25.45	58.02	74.00	-15.98	PK
H	4924.00	48.35	38.75	7.46	25.45	42.51	54.00	-11.49	AV
H	7386.00	68.43	38.65	7.22	24.78	61.78	74.00	-12.22	PK
H	7386.00	46.67	38.65	7.22	24.78	40.02	54.00	-13.98	AV
H	15450.00	45.81	36.42	6.32	26.65	42.36	74.00	-31.64	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412									
V	4824.00	63.72	39.55	7.85	25.66	57.68	74.00	-16.32	PK
V	4824.00	46.56	39.55	7.85	25.66	40.52	54.00	-13.48	AV
V	7236.00	63.93	38.33	7.52	24.55	57.67	74.00	-16.33	PK
V	7236.00	45.70	38.33	7.52	24.55	39.44	54.00	-14.56	AV
V	15450.00	42.82	35.23	6.75	26.59	40.93	74.00	-33.07	PK
H	4824.00	64.31	39.55	7.85	25.66	58.27	74.00	-15.73	PK
H	4824.00	47.48	39.55	7.85	25.66	41.44	54.00	-12.56	AV
H	7236.00	64.53	38.33	7.52	23.55	57.27	74.00	-16.73	PK
H	7236.00	42.64	38.33	7.52	23.22	35.05	54.00	-18.95	AV
H	15450.00	44.95	35.45	6.75	27.88	44.13	74.00	-29.87	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	64.68	38.89	7.57	25.45	58.81	74.00	-15.19	PK
V	4874.00	48.22	38.89	7.57	25.45	42.35	54.00	-11.65	AV
V	7311.00	64.07	38.78	7.35	24.78	57.42	74.00	-16.58	PK
V	7311.00	45.38	38.78	7.35	24.78	38.73	54.00	-15.27	AV
V	15450.00	44.23	35.89	6.42	26.47	41.23	74.00	-32.77	PK
H	4874.00	62.83	38.89	7.57	25.45	56.96	74.00	-17.04	PK
H	4874.00	46.70	38.89	7.57	25.45	40.83	54.00	-13.17	AV
H	7311.00	65.95	38.78	7.35	24.78	59.30	74.00	-14.70	PK
H	7311.00	46.00	38.78	7.35	24.78	39.35	54.00	-14.65	AV
H	15450.00	42.86	36.68	6.42	26.65	39.25	74.00	-34.75	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462									
V	4924.00	63.83	38.75	7.46	25.45	57.99	74.00	-16.01	PK
V	4924.00	47.47	38.75	7.46	25.45	41.63	54.00	-12.37	AV
V	7386.00	62.72	38.65	7.22	24.78	56.07	74.00	-17.93	PK
V	7386.00	45.90	38.65	7.22	24.78	39.25	54.00	-14.75	AV
V	15450.00	44.30	35.58	6.35	26.47	41.54	74.00	-32.46	PK
H	4924.00	61.21	38.75	7.46	25.45	55.37	74.00	-18.63	PK
H	4924.00	46.35	38.75	7.46	25.45	40.51	54.00	-13.49	AV
H	7386.00	65.60	38.65	7.22	24.78	58.95	74.00	-15.05	PK
H	7386.00	44.73	38.65	7.22	24.78	38.08	54.00	-15.92	AV
H	15450.00	43.91	36.42	6.32	26.65	40.46	74.00	-33.54	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412									
V	4824.00	62.46	39.55	7.85	25.66	56.42	74.00	-17.58	PK
V	4824.00	45.64	39.55	7.85	25.66	39.60	54.00	-14.40	AV
V	7236.00	62.66	38.33	7.52	24.55	56.40	74.00	-17.60	PK
V	7236.00	44.79	38.33	7.52	24.55	38.53	54.00	-15.47	AV
V	15450.00	41.97	35.23	6.75	26.59	40.08	74.00	-33.92	PK
H	4824.00	63.03	39.55	7.85	25.66	56.99	74.00	-17.01	PK
H	4824.00	46.54	39.55	7.85	25.66	40.50	54.00	-13.50	AV
H	7236.00	63.25	38.33	7.52	23.55	55.99	74.00	-18.02	PK
H	7236.00	41.80	38.33	7.52	23.22	34.21	54.00	-19.80	AV
H	15450.00	44.06	35.45	6.75	27.88	43.24	74.00	-30.76	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	63.39	38.89	7.57	25.45	57.52	74.00	-16.48	PK
V	4874.00	47.26	38.89	7.57	25.45	41.39	54.00	-12.61	AV
V	7311.00	62.80	38.78	7.35	24.78	56.15	74.00	-17.85	PK
V	7311.00	44.48	38.78	7.35	24.78	37.83	54.00	-16.17	AV
V	15450.00	43.36	35.89	6.42	26.47	40.36	74.00	-33.65	PK
H	4874.00	61.58	38.89	7.57	25.45	55.71	74.00	-18.29	PK
H	4874.00	45.77	38.89	7.57	25.45	39.90	54.00	-14.10	AV
H	7311.00	64.64	38.78	7.35	24.78	57.99	74.00	-16.01	PK
H	7311.00	45.09	38.78	7.35	24.78	38.44	54.00	-15.56	AV
H	15450.00	42.01	36.68	6.42	26.65	38.40	74.00	-35.60	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462									
V	4924.00	62.57	38.75	7.46	25.45	56.73	74.00	-17.27	PK
V	4924.00	46.53	38.75	7.46	25.45	40.69	54.00	-13.31	AV
V	7386.00	61.47	38.65	7.22	24.78	54.82	74.00	-19.18	PK
V	7386.00	44.99	38.65	7.22	24.78	38.34	54.00	-15.66	AV
V	15450.00	43.42	35.58	6.35	26.47	40.66	74.00	-33.34	PK
H	4924.00	60.00	38.75	7.46	25.45	54.16	74.00	-19.85	PK
H	4924.00	45.43	38.75	7.46	25.45	39.59	54.00	-14.41	AV
H	7386.00	64.29	38.65	7.22	24.78	57.64	74.00	-16.36	PK
H	7386.00	43.85	38.65	7.22	24.78	37.20	54.00	-16.80	AV
H	15450.00	43.04	36.42	6.32	26.65	39.59	74.00	-34.41	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(40MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2422									
V	4844	65.25	39.55	7.77	25.66	59.13	74.00	-14.87	PK
V	4844	47.61	39.55	7.77	25.66	41.49	54.00	-12.51	AV
V	7266	65.19	38.33	7.30	24.55	58.71	74.00	-15.29	PK
V	7266	45.55	38.33	7.30	24.55	39.07	54.00	-14.93	AV
V	15440	47.45	35.23	6.60	26.59	45.41	74.00	-28.59	PK
H	4844	66.29	39.55	7.77	25.66	60.17	74.00	-13.83	PK
H	4844	42.96	39.55	7.77	25.66	36.84	54.00	-17.16	AV
H	7266	62.47	38.33	7.30	23.55	54.99	74.00	-19.01	PK
H	7266	46.66	38.33	7.30	23.22	38.85	54.00	-15.15	AV
H	15440	45.78	35.45	6.60	27.88	44.81	74.00	-29.19	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	65.32	38.89	7.57	25.45	59.45	74.00	-14.55	PK
V	4874.00	48.27	38.89	7.57	25.45	42.40	54.00	-11.60	AV
V	7311.00	68.34	38.78	7.35	24.78	61.69	74.00	-12.31	PK
V	7311.00	48.56	38.78	7.35	24.78	41.91	54.00	-12.09	AV
V	15450.00	47.97	35.89	6.42	26.47	44.97	74.00	-29.04	PK
H	4874.00	67.14	38.89	7.57	25.45	61.27	74.00	-12.73	PK
H	4874.00	48.20	38.89	7.57	25.45	42.33	54.00	-11.67	AV
H	7311.00	65.12	38.78	7.35	24.78	58.47	74.00	-15.53	PK
H	7311.00	48.76	38.78	7.35	24.78	42.11	54.00	-11.89	AV
H	15450.00	46.27	36.68	6.42	26.65	42.66	74.00	-31.34	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2452									
V	4904.00	65.83	66.31	7.38	25.45	60.39	74.00	-13.61	PK
V	4904.00	47.17	47.51	7.38	25.45	41.59	54.00	-12.41	AV
V	7356.00	62.21	62.67	7.15	24.78	55.95	74.00	-18.05	PK
V	7356.00	46.21	46.55	7.15	24.78	39.83	54.00	-14.17	AV
V	15440.00	47.54	47.89	6.25	26.47	45.03	74.00	-28.97	PK
H	4904.00	66.56	67.05	7.38	25.45	61.13	74.00	-12.88	PK
H	4904.00	43.50	43.81	7.38	25.45	37.89	54.00	-16.11	AV
H	7356.00	57.91	58.33	7.15	24.78	51.61	74.00	-22.39	PK
H	7356.00	45.49	45.83	7.15	24.78	39.11	54.00	-14.89	AV
H	15440.00	45.05	45.38	6.25	26.65	41.86	74.00	-32.14	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



ANT 3

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412									
V	4824.00	66.85	39.55	7.85	25.66	60.81	74.00	-13.19	PK
V	4824.00	48.85	39.55	7.85	25.66	42.81	54.00	-11.19	AV
V	7236.00	67.07	38.33	7.52	24.55	60.81	74.00	-13.19	PK
V	7236.00	47.95	38.33	7.52	24.55	41.69	54.00	-12.31	AV
V	15450.00	44.92	35.23	6.75	26.59	43.03	74.00	-30.97	PK
H	4824.00	67.47	39.55	7.85	25.66	61.43	74.00	-12.57	PK
H	4824.00	49.81	39.55	7.85	25.66	43.77	54.00	-10.23	AV
H	7236.00	67.69	38.33	7.52	23.55	60.43	74.00	-13.57	PK
H	7236.00	44.74	38.33	7.52	23.22	37.15	54.00	-16.85	AV
H	15450.00	47.16	35.45	6.75	27.88	46.34	74.00	-27.66	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	67.85	38.89	7.57	25.45	61.98	74.00	-12.02	PK
V	4874.00	50.59	38.89	7.57	25.45	44.72	54.00	-9.28	AV
V	7311.00	67.22	38.78	7.35	24.78	60.57	74.00	-13.43	PK
V	7311.00	47.61	38.78	7.35	24.78	40.96	54.00	-13.04	AV
V	15450.00	46.41	35.89	6.42	26.47	43.41	74.00	-30.59	PK
H	4874.00	65.92	38.89	7.57	25.45	60.05	74.00	-13.95	PK
H	4874.00	48.99	38.89	7.57	25.45	43.12	54.00	-10.88	AV
H	7311.00	69.19	38.78	7.35	24.78	62.54	74.00	-11.46	PK
H	7311.00	48.26	38.78	7.35	24.78	41.61	54.00	-12.39	AV
H	15450.00	44.96	36.68	6.42	26.65	41.35	74.00	-32.65	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462									
V	4924.00	66.97	38.75	7.46	25.45	61.13	74.00	-12.87	PK
V	4924.00	49.80	38.75	7.46	25.45	43.96	54.00	-10.04	AV
V	7386.00	65.80	38.65	7.22	24.78	59.15	74.00	-14.85	PK
V	7386.00	48.15	38.65	7.22	24.78	41.50	54.00	-12.50	AV
V	15450.00	46.47	35.58	6.35	26.47	43.71	74.00	-30.29	PK
H	4924.00	64.22	38.75	7.46	25.45	58.38	74.00	-15.62	PK
H	4924.00	48.62	38.75	7.46	25.45	42.78	54.00	-11.22	AV
H	7386.00	68.82	38.65	7.22	24.78	62.17	74.00	-11.83	PK
H	7386.00	46.93	38.65	7.22	24.78	40.28	54.00	-13.72	AV
H	15450.00	46.07	36.42	6.32	26.65	42.62	74.00	-31.38	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412									
V	4824.00	66.36	39.55	7.85	25.66	60.32	74.00	-13.68	PK
V	4824.00	48.49	39.55	7.85	25.66	42.45	54.00	-11.55	AV
V	7236.00	66.58	38.33	7.52	24.55	60.32	74.00	-13.68	PK
V	7236.00	47.60	38.33	7.52	24.55	41.34	54.00	-12.66	AV
V	15450.00	44.60	35.23	6.75	26.59	42.71	74.00	-31.29	PK
H	4824.00	66.97	39.55	7.85	25.66	60.93	74.00	-13.07	PK
H	4824.00	49.45	39.55	7.85	25.66	43.41	54.00	-10.59	AV
H	7236.00	67.20	38.33	7.52	23.55	59.94	74.00	-14.06	PK
H	7236.00	44.41	38.33	7.52	23.22	36.82	54.00	-17.18	AV
H	15450.00	46.82	35.45	6.75	27.88	46.00	74.00	-28.00	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	67.36	38.89	7.57	25.45	61.49	74.00	-12.51	PK
V	4874.00	50.22	38.89	7.57	25.45	44.35	54.00	-9.65	AV
V	7311.00	66.73	38.78	7.35	24.78	60.08	74.00	-13.92	PK
V	7311.00	47.26	38.78	7.35	24.78	40.61	54.00	-13.39	AV
V	15450.00	46.07	35.89	6.42	26.47	43.07	74.00	-30.93	PK
H	4874.00	65.44	38.89	7.57	25.45	59.57	74.00	-14.43	PK
H	4874.00	48.63	38.89	7.57	25.45	42.76	54.00	-11.24	AV
H	7311.00	68.68	38.78	7.35	24.78	62.03	74.00	-11.97	PK
H	7311.00	47.91	38.78	7.35	24.78	41.26	54.00	-12.74	AV
H	15450.00	44.64	36.68	6.42	26.65	41.03	74.00	-32.97	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462									
V	4924.00	66.48	38.75	7.46	25.45	60.55	60.64	-13.36	PK
V	4924.00	49.44	38.75	7.46	25.45	43.53	43.60	-10.40	AV
V	7386.00	65.32	38.65	7.22	24.78	58.58	58.67	-15.33	PK
V	7386.00	47.80	38.65	7.22	24.78	41.09	41.15	-12.85	AV
V	15450.00	46.14	35.58	6.35	26.47	43.31	43.38	-30.62	PK
H	4924.00	63.75	38.75	7.46	25.45	57.82	57.91	-16.09	PK
H	4924.00	48.27	38.75	7.46	25.45	42.36	42.43	-11.57	AV
H	7386.00	68.32	38.65	7.22	24.78	61.57	61.67	-12.33	PK
H	7386.00	46.59	38.65	7.22	24.78	39.88	39.94	-14.06	AV
H	15450.00	45.73	36.42	6.32	26.65	42.22	42.28	-31.72	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412									
V	4824.00	66.23	39.55	7.85	25.66	60.19	74.00	-13.81	PK
V	4824.00	48.39	39.55	7.85	25.66	42.35	54.00	-11.65	AV
V	7236.00	66.44	38.33	7.52	24.55	60.18	74.00	-13.82	PK
V	7236.00	47.50	38.33	7.52	24.55	41.24	54.00	-12.76	AV
V	15450.00	44.50	35.23	6.75	26.59	42.61	74.00	-31.39	PK
H	4824.00	66.84	39.55	7.85	25.66	60.80	74.00	-13.20	PK
H	4824.00	49.35	39.55	7.85	25.66	43.31	54.00	-10.69	AV
H	7236.00	67.06	38.33	7.52	23.55	59.80	74.00	-14.20	PK
H	7236.00	44.32	38.33	7.52	23.22	36.73	54.00	-17.27	AV
H	15450.00	46.72	35.45	6.75	27.88	45.90	74.00	-28.10	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	67.22	38.89	7.57	25.45	61.35	74.00	-12.65	PK
V	4874.00	50.12	38.89	7.57	25.45	44.25	54.00	-9.75	AV
V	7311.00	66.59	38.78	7.35	24.78	59.94	74.00	-14.06	PK
V	7311.00	47.16	38.78	7.35	24.78	40.51	54.00	-13.49	AV
V	15450.00	45.97	35.89	6.42	26.47	42.97	74.00	-31.03	PK
H	4874.00	65.30	38.89	7.57	25.45	59.43	74.00	-14.57	PK
H	4874.00	48.53	38.89	7.57	25.45	42.66	54.00	-11.34	AV
H	7311.00	68.54	38.78	7.35	24.78	61.89	74.00	-12.11	PK
H	7311.00	47.81	38.78	7.35	24.78	41.16	54.00	-12.84	AV
H	15450.00	44.54	36.68	6.42	26.65	40.93	74.00	-33.07	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462									
V	4924.00	66.34	38.75	7.46	25.45	60.50	74.00	-13.50	PK
V	4924.00	49.34	38.75	7.46	25.45	43.50	54.00	-10.50	AV
V	7386.00	65.18	38.65	7.22	24.78	58.53	74.00	-15.47	PK
V	7386.00	47.70	38.65	7.22	24.78	41.05	54.00	-12.95	AV
V	15450.00	46.04	35.58	6.35	26.47	43.28	74.00	-30.72	PK
H	4924.00	63.62	38.75	7.46	25.45	57.78	74.00	-16.22	PK
H	4924.00	48.17	38.75	7.46	25.45	42.33	54.00	-11.67	AV
H	7386.00	68.17	38.65	7.22	24.78	61.52	74.00	-12.48	PK
H	7386.00	46.49	38.65	7.22	24.78	39.84	54.00	-14.16	AV
H	15450.00	45.64	36.42	6.32	26.65	42.19	74.00	-31.81	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(40MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2422									
V	4844	65.80	39.55	7.77	25.66	59.68	74.00	-14.32	PK
V	4844	48.02	39.55	7.77	25.66	41.90	54.00	-12.11	AV
V	7266	65.74	38.33	7.30	24.55	59.26	74.00	-14.74	PK
V	7266	45.94	38.33	7.30	24.55	39.46	54.00	-14.54	AV
V	15440	47.86	35.23	6.60	26.59	45.82	74.00	-28.18	PK
H	4844	66.85	39.55	7.77	25.66	60.73	74.00	-13.27	PK
H	4844	43.32	39.55	7.77	25.66	37.20	54.00	-16.80	AV
H	7266	63.00	38.33	7.30	23.55	55.52	74.00	-18.48	PK
H	7266	47.05	38.33	7.30	23.22	39.24	54.00	-14.76	AV
H	15440	46.16	35.45	6.60	27.88	45.19	74.00	-28.81	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437									
V	4874.00	65.87	38.89	7.57	25.45	60.00	74.00	-14.00	PK
V	4874.00	48.68	38.89	7.57	25.45	42.81	54.00	-11.19	AV
V	7311.00	68.92	38.78	7.35	24.78	62.27	74.00	-11.73	PK
V	7311.00	48.98	38.78	7.35	24.78	42.33	54.00	-11.67	AV
V	15450.00	48.37	35.89	6.42	26.47	45.37	74.00	-28.63	PK
H	4874.00	67.71	38.89	7.57	25.45	61.84	74.00	-12.16	PK
H	4874.00	48.61	38.89	7.57	25.45	42.74	54.00	-11.26	AV
H	7311.00	65.67	38.78	7.35	24.78	59.02	74.00	-14.98	PK
H	7311.00	49.17	38.78	7.35	24.78	42.52	54.00	-11.48	AV
H	15450.00	46.66	36.68	6.42	26.65	43.05	74.00	-30.95	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2452									
V	4904.00	66.87	38.75	7.38	25.45	60.95	74.00	-13.05	PK
V	4904.00	47.92	38.75	7.38	25.45	42.00	54.00	-12.00	AV
V	7356.00	63.20	38.65	7.15	24.78	56.48	74.00	-17.52	PK
V	7356.00	46.95	38.65	7.15	24.78	40.23	54.00	-13.77	AV
V	15440.00	48.29	35.58	6.25	26.47	45.43	74.00	-28.57	PK
H	4904.00	67.61	38.75	7.38	25.45	61.69	74.00	-12.31	PK
H	4904.00	44.18	38.75	7.38	25.45	38.26	54.00	-15.74	AV
H	7356.00	58.82	38.65	7.15	24.78	52.10	74.00	-21.90	PK
H	7356.00	46.21	38.65	7.15	24.78	39.49	54.00	-14.51	AV
H	15440.00	45.77	36.42	6.25	26.65	42.25	74.00	-31.75	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

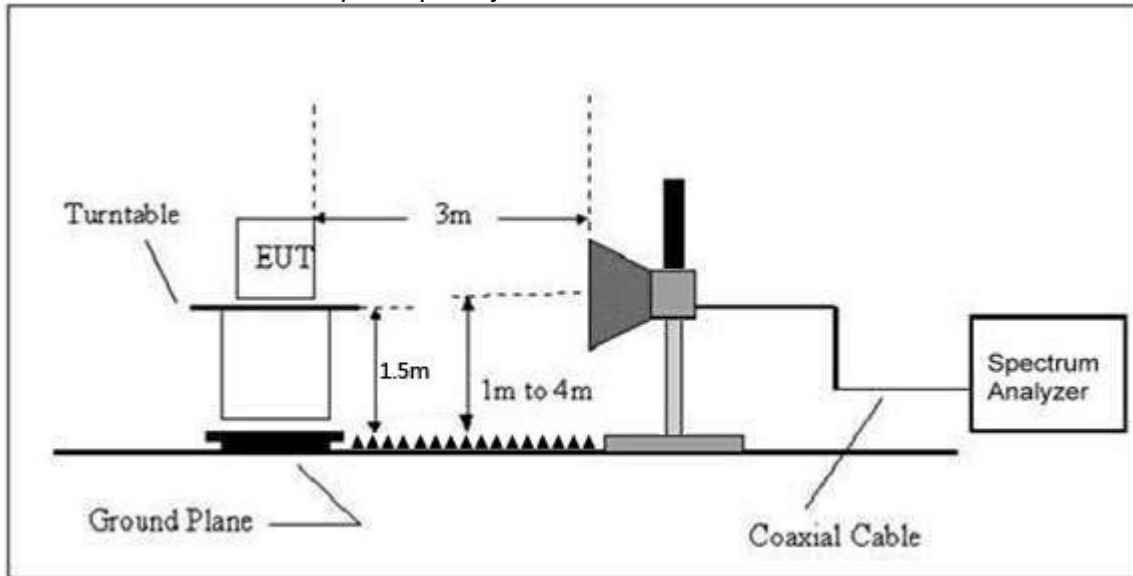

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

ANT 1

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
802.11b	Low Channel 2412MHz									
	H	2390.00	56.79	38.06	7.42	20.15	46.30	74.00	54.00	PASS
	H	2400.00	61.71	38.06	7.42	20.15	51.22	74.00	54.00	PASS
	V	2390.00	60.57	38.06	7.42	20.15	50.08	74.00	54.00	PASS
	V	2400.00	62.94	38.06	7.42	20.15	52.45	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	61.53	38.17	7.45	20.54	51.35	74.00	54.00	PASS
	H	2485.50	59.09	38.17	7.45	20.54	48.91	74.00	54.00	PASS
	V	2483.50	62.02	38.20	7.45	20.54	51.81	74.00	54.00	PASS
	V	2485.50	59.92	38.20	7.45	20.54	49.71	74.00	54.00	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	59.64	38.06	7.42	20.15	49.15	74.00	54.00	PASS
	H	2400.00	62.46	38.06	7.42	20.15	51.97	74.00	54.00	PASS
	V	2390.00	59.79	38.06	7.42	20.15	49.30	74.00	54.00	PASS
	V	2400.00	61.36	38.06	7.42	20.15	50.87	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	61.34	38.17	7.45	20.54	51.16	74.00	54.00	PASS
	H	2485.50	58.62	38.17	7.45	20.54	48.44	74.00	54.00	PASS
	V	2483.50	62.43	38.20	7.45	20.54	52.22	74.00	54.00	PASS
	V	2485.50	57.19	38.20	7.45	20.54	46.98	74.00	54.00	PASS
802.11N20	Low Channel 2412MHz									
	H	2390.00	60.50	38.06	7.42	20.15	50.01	74.00	54.00	PASS
	H	2400.00	63.03	38.06	7.42	20.15	52.54	74.00	54.00	PASS
	V	2390.00	59.74	38.06	7.42	20.15	49.25	74.00	54.00	PASS
	V	2400.00	62.30	38.06	7.42	20.15	51.81	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	60.12	38.17	7.45	20.54	49.94	74.00	54.00	PASS
	H	2485.50	59.67	38.17	7.45	20.54	49.49	74.00	54.00	PASS
	V	2483.50	61.46	38.20	7.45	20.54	51.25	74.00	54.00	PASS
	V	2485.50	60.21	38.20	7.45	20.54	50.00	74.00	54.00	PASS
802.11N40	Low Channel 2422MHz									
	H	2390.00	57.91	38.06	7.42	20.15	47.42	74.00	54.00	PASS
	H	2400.00	58.23	38.06	7.42	20.15	47.74	74.00	54.00	PASS
	V	2390.00	57.14	38.06	7.42	20.15	46.65	74.00	54.00	PASS
	V	2400.00	58.89	38.06	7.42	20.15	48.40	74.00	54.00	PASS
	High Channel 2452MHz									
	H	2483.50	57.96	38.17	7.45	20.54	47.78	74.00	54.00	PASS
	H	2485.50	57.12	38.17	7.45	20.54	46.94	74.00	54.00	PASS
	V	2483.50	58.45	38.20	7.45	20.54	48.24	74.00	54.00	PASS
	V	2485.50	57.51	38.20	7.45	20.54	47.30	74.00	54.00	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



ANT 2

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
802.11b	Low Channel 2412MHz									
	H	2390.00	56.26	38.06	7.42	20.15	45.77	74.00	54.00	PASS
	H	2400.00	61.14	38.06	7.42	20.15	50.65	74.00	54.00	PASS
	V	2390.00	60.00	38.06	7.42	20.15	49.51	74.00	54.00	PASS
	V	2400.00	62.35	38.06	7.42	20.15	51.86	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	60.95	38.17	7.45	20.54	50.77	74.00	54.00	PASS
	H	2485.50	58.54	38.17	7.45	20.54	48.36	74.00	54.00	PASS
	V	2483.50	61.44	38.20	7.45	20.54	51.23	74.00	54.00	PASS
	V	2485.50	59.36	38.20	7.45	20.54	49.15	74.00	54.00	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	59.09	38.06	7.42	20.15	48.60	74.00	54.00	PASS
	H	2400.00	61.88	38.06	7.42	20.15	51.39	74.00	54.00	PASS
	V	2390.00	59.24	38.06	7.42	20.15	48.75	74.00	54.00	PASS
	V	2400.00	60.78	38.06	7.42	20.15	50.29	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	60.76	38.17	7.45	20.54	50.58	74.00	54.00	PASS
	H	2485.50	58.07	38.17	7.45	20.54	47.89	74.00	54.00	PASS
	V	2483.50	61.85	38.20	7.45	20.54	51.64	74.00	54.00	PASS
	V	2485.50	56.65	38.20	7.45	20.54	46.44	74.00	54.00	PASS
802.11N20	Low Channel 2412MHz									
	H	2390.00	59.94	38.06	7.42	20.15	49.45	74.00	54.00	PASS
	H	2400.00	62.44	38.06	7.42	20.15	51.95	74.00	54.00	PASS
	V	2390.00	59.19	38.06	7.42	20.15	48.70	74.00	54.00	PASS
	V	2400.00	61.72	38.06	7.42	20.15	51.23	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	59.56	38.17	7.45	20.54	49.38	74.00	54.00	PASS
	H	2485.50	59.12	38.17	7.45	20.54	48.94	74.00	54.00	PASS
	V	2483.50	60.88	38.20	7.45	20.54	50.67	74.00	54.00	PASS
	V	2485.50	59.65	38.20	7.45	20.54	49.44	74.00	54.00	PASS
802.11N40	Low Channel 2422MHz									
	H	2390.00	58.46	38.06	7.42	20.15	47.97	74.00	54.00	PASS
	H	2400.00	58.79	38.06	7.42	20.15	48.30	74.00	54.00	PASS
	V	2390.00	57.69	38.06	7.42	20.15	47.20	74.00	54.00	PASS
	V	2400.00	59.46	38.06	7.42	20.15	48.97	74.00	54.00	PASS
	High Channel 2452MHz									
	H	2483.50	58.51	38.17	7.45	20.54	48.33	74.00	54.00	PASS
	H	2485.50	57.67	38.17	7.45	20.54	47.49	74.00	54.00	PASS
	V	2483.50	59.01	38.20	7.45	20.54	48.80	74.00	54.00	PASS
	V	2485.50	58.07	38.20	7.45	20.54	47.86	74.00	54.00	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



ANT 3

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
802.11b	Low Channel 2412MHz									
	H	2390.00	57.08	38.06	7.42	20.15	46.59	74.00	54.00	PASS
	H	2400.00	62.02	38.06	7.42	20.15	51.53	74.00	54.00	PASS
	V	2390.00	60.87	38.06	7.42	20.15	50.38	74.00	54.00	PASS
	V	2400.00	62.24	38.06	7.42	20.15	51.75	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	61.84	38.17	7.45	20.54	51.66	74.00	54.00	PASS
	H	2485.50	59.39	38.17	7.45	20.54	49.21	74.00	54.00	PASS
	V	2483.50	60.29	38.20	7.45	20.54	50.08	74.00	54.00	PASS
	V	2485.50	60.22	38.20	7.45	20.54	50.01	74.00	54.00	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	59.94	38.06	7.42	20.15	49.45	74.00	54.00	PASS
	H	2400.00	61.76	38.06	7.42	20.15	51.27	74.00	54.00	PASS
	V	2390.00	60.10	38.06	7.42	20.15	49.61	74.00	54.00	PASS
	V	2400.00	61.67	38.06	7.42	20.15	51.18	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	61.65	38.17	7.45	20.54	51.47	74.00	54.00	PASS
	H	2485.50	58.91	38.17	7.45	20.54	48.73	74.00	54.00	PASS
	V	2483.50	62.75	38.20	7.45	20.54	52.54	74.00	54.00	PASS
	V	2485.50	57.48	38.20	7.45	20.54	47.27	74.00	54.00	PASS
802.11N20	Low Channel 2412MHz									
	H	2390.00	60.81	38.06	7.42	20.15	50.32	74.00	54.00	PASS
	H	2400.00	61.31	38.06	7.42	20.15	50.82	74.00	54.00	PASS
	V	2390.00	60.04	38.06	7.42	20.15	49.55	74.00	54.00	PASS
	V	2400.00	61.59	38.06	7.42	20.15	51.10	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	60.42	38.17	7.45	20.54	50.24	74.00	54.00	PASS
	H	2485.50	59.97	38.17	7.45	20.54	49.79	74.00	54.00	PASS
	V	2483.50	61.77	38.20	7.45	20.54	51.56	74.00	54.00	PASS
	V	2485.50	60.51	38.20	7.45	20.54	50.30	74.00	54.00	PASS
802.11N40	Low Channel 2422MHz									
	H	2390.00	57.61	38.06	7.42	20.15	47.12	74.00	54.00	PASS
	H	2400.00	57.93	38.06	7.42	20.15	47.44	74.00	54.00	PASS
	V	2390.00	56.84	38.06	7.42	20.15	46.35	74.00	54.00	PASS
	V	2400.00	58.59	38.06	7.42	20.15	48.10	74.00	54.00	PASS
	High Channel 2452MHz									
	H	2483.50	57.66	38.17	7.45	20.54	47.48	74.00	54.00	PASS
	H	2485.50	56.82	38.17	7.45	20.54	46.64	74.00	54.00	PASS
	V	2483.50	58.15	38.20	7.45	20.54	47.94	74.00	54.00	PASS
	V	2485.50	57.22	38.20	7.45	20.54	47.01	74.00	54.00	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.										



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.





4.1.5 TEST RESULTS

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX b Mode		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-22.03	8	PASS
2437 MHz	-8.229	8	PASS
2462 MHz	-3.622	8	PASS

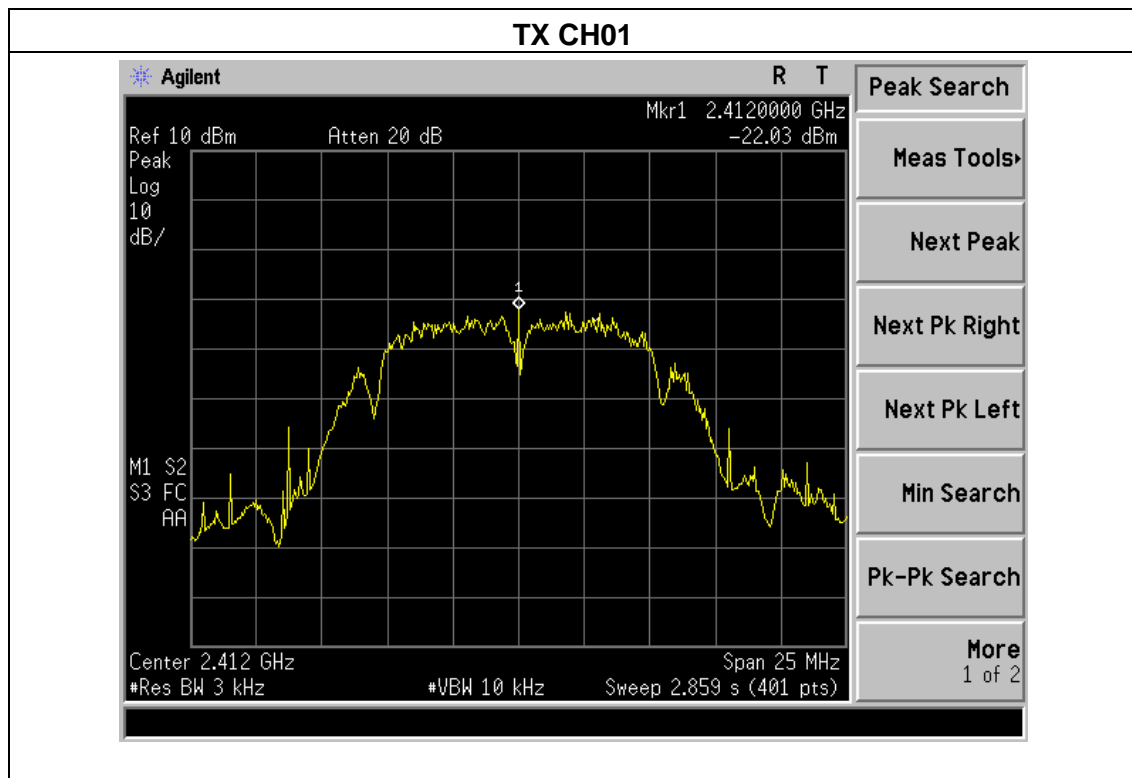


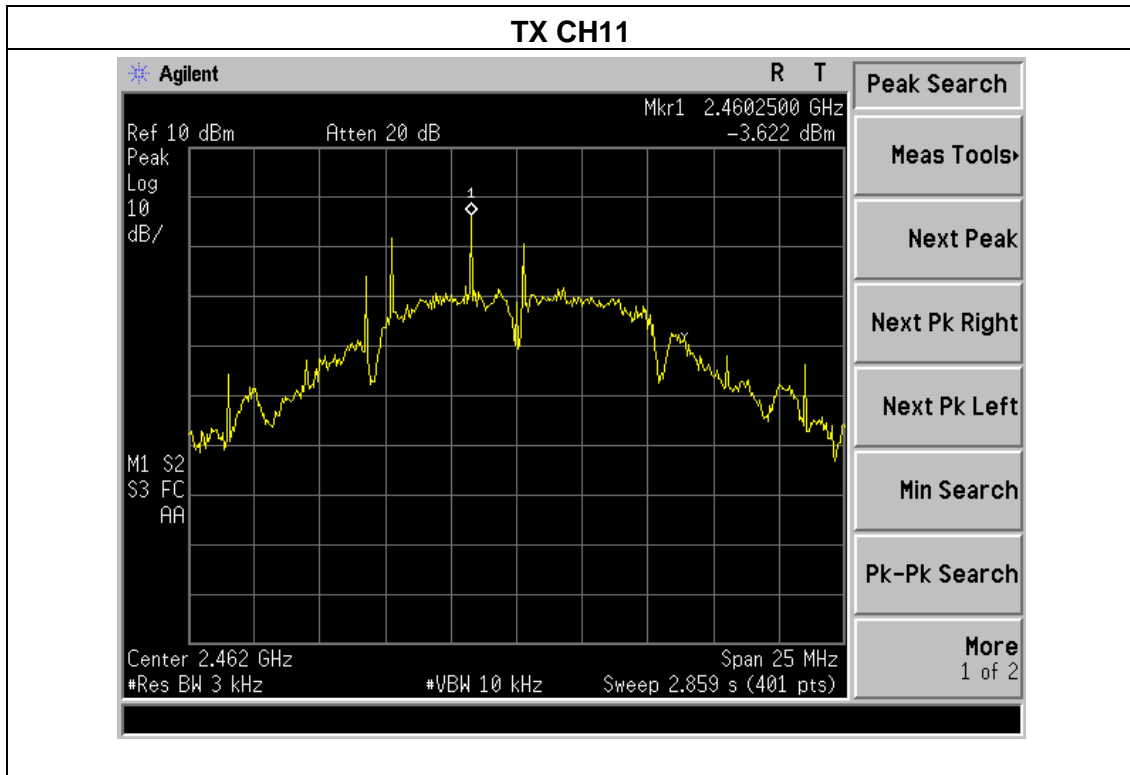
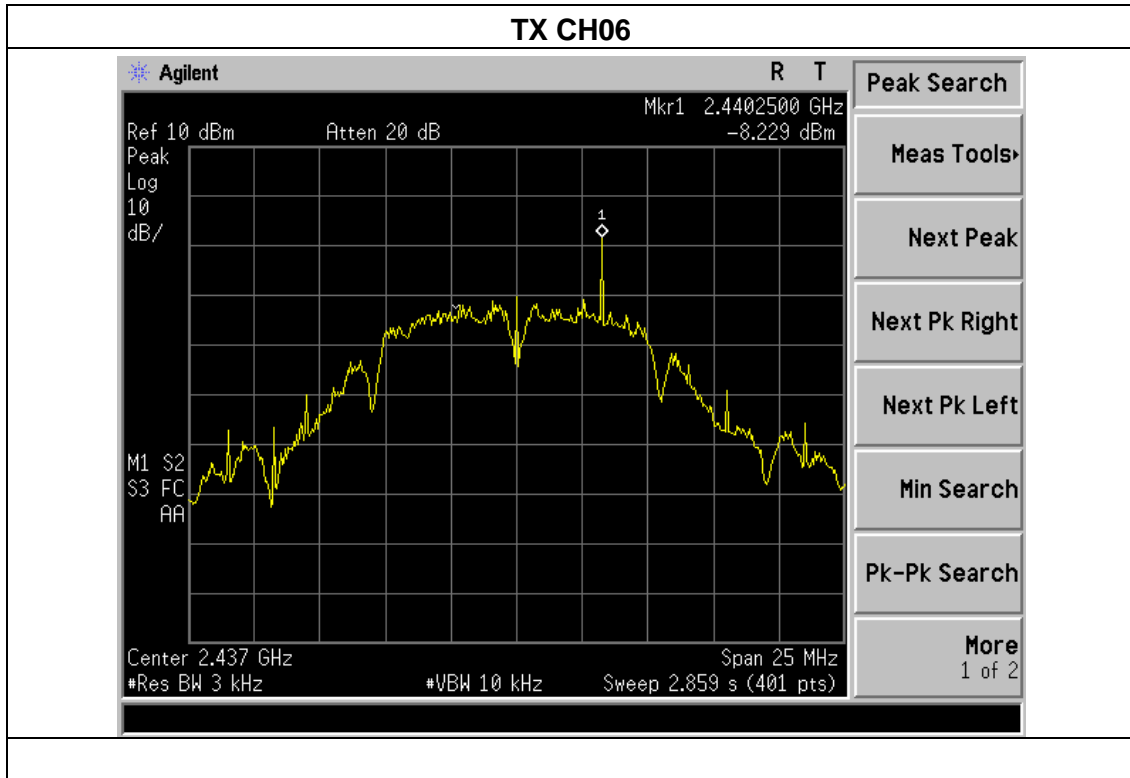




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX g Mode		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-21.37	8	PASS
2437 MHz	-20.57	8	PASS
2462 MHz	-19.35	8	PASS

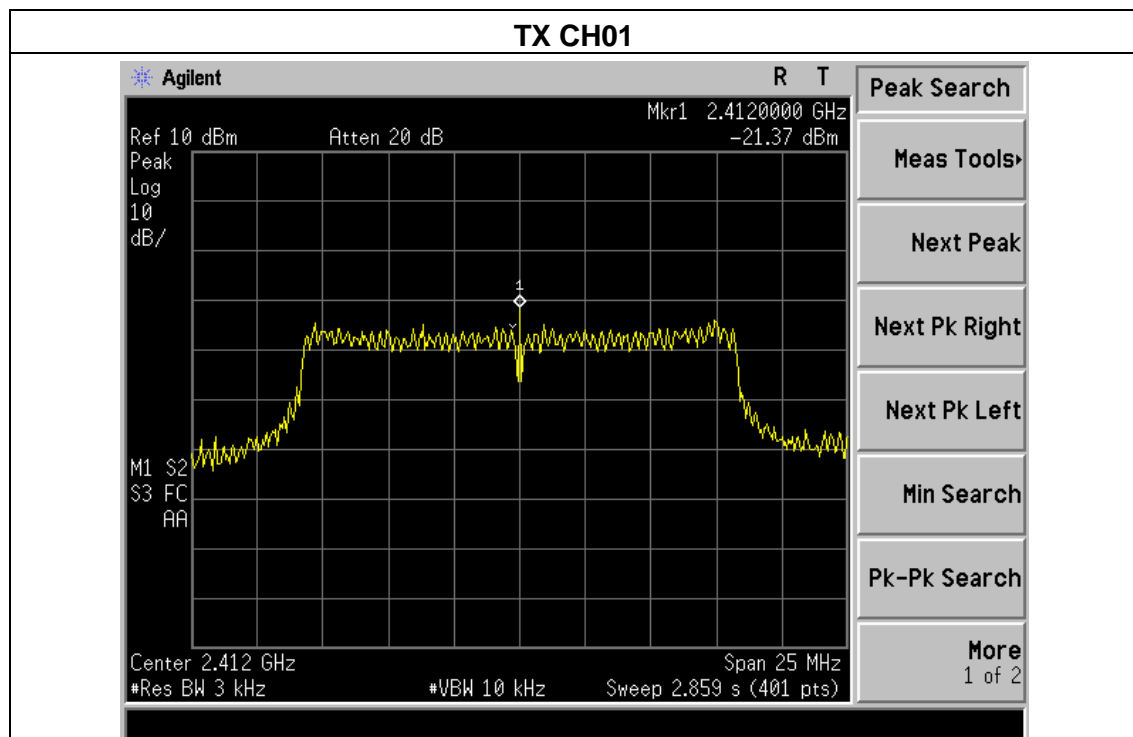


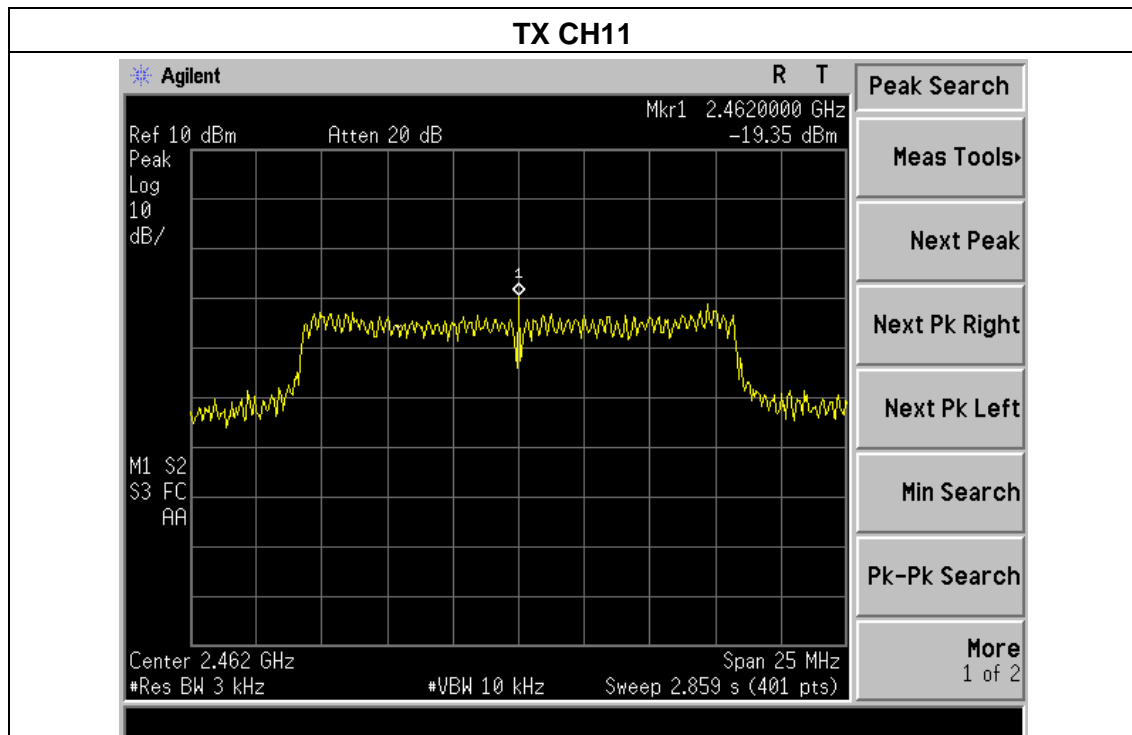
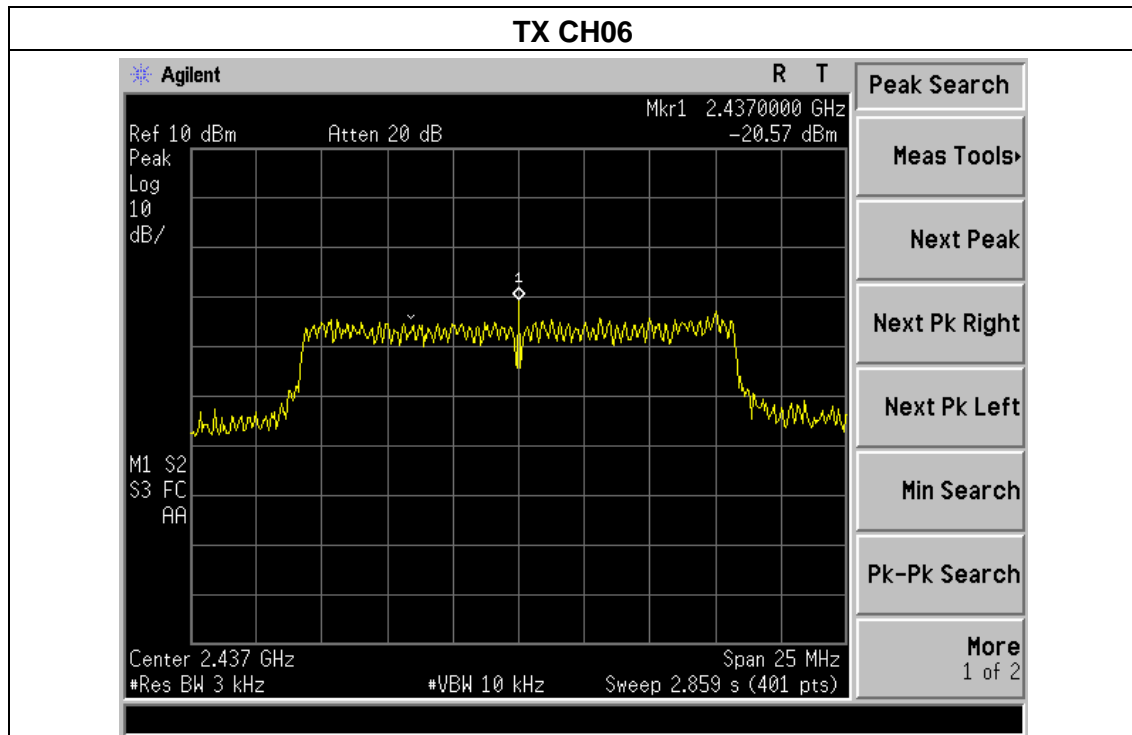




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX n Mode(20M)		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	--22.08	8	PASS
2437 MHz	-20.5	8	PASS
2462 MHz	-19.1	8	PASS

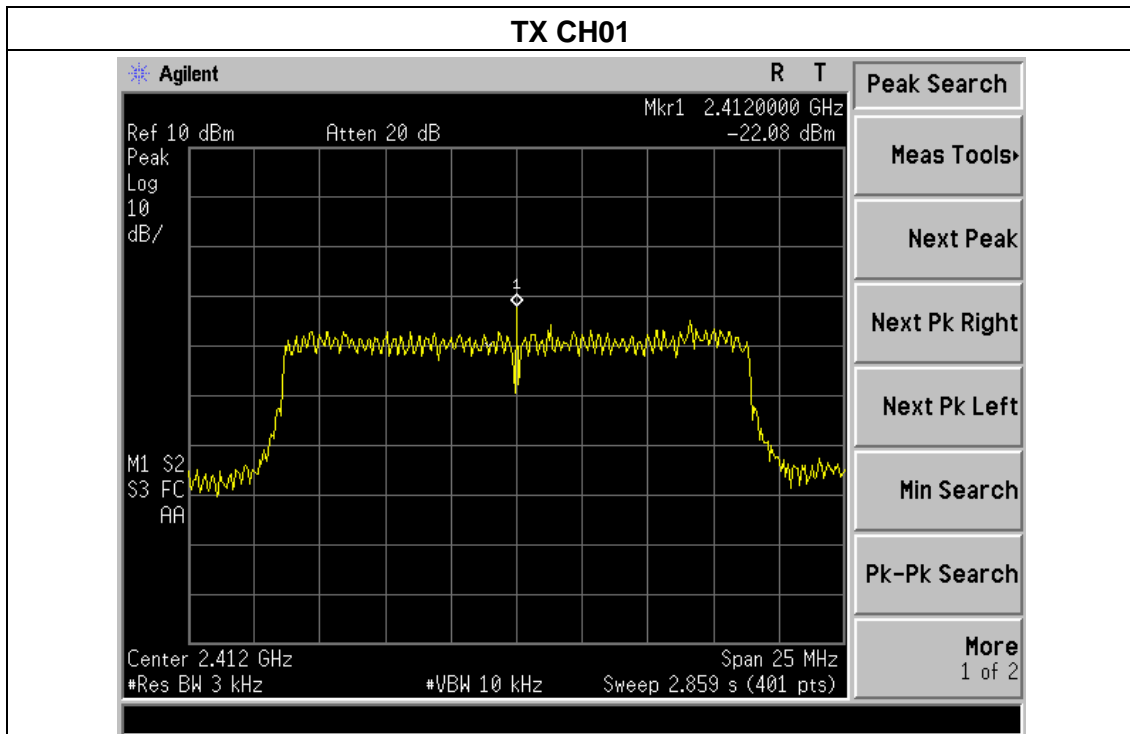


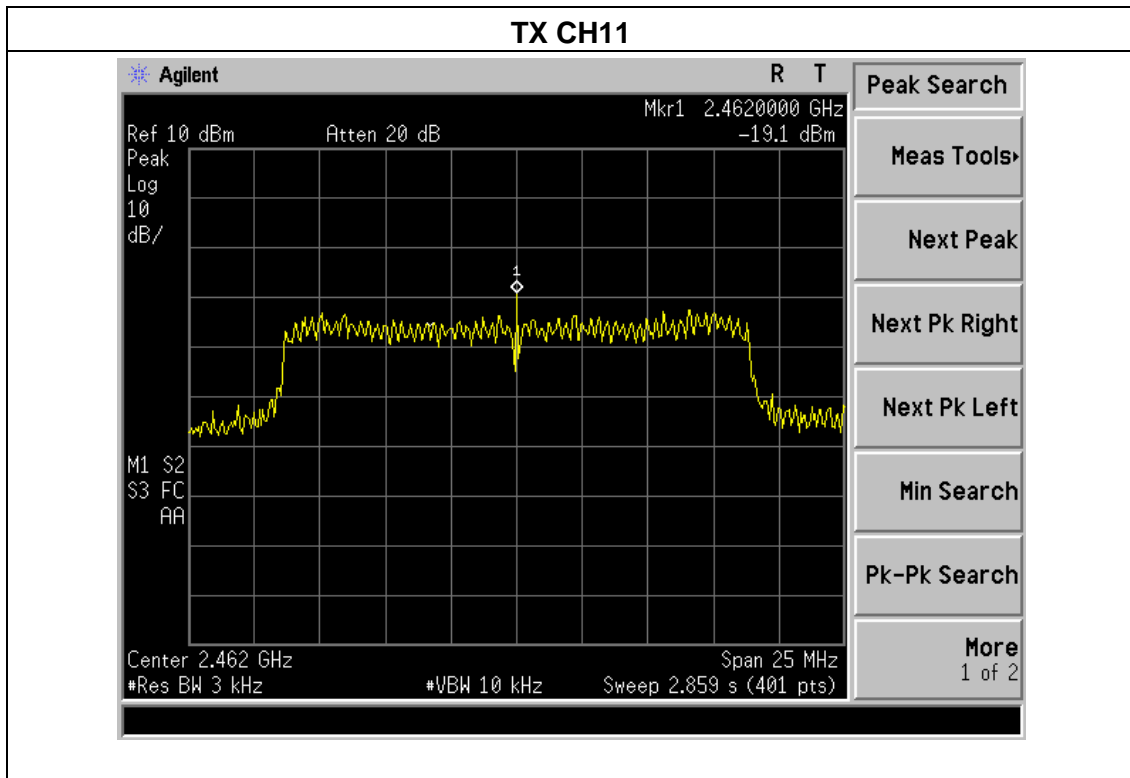
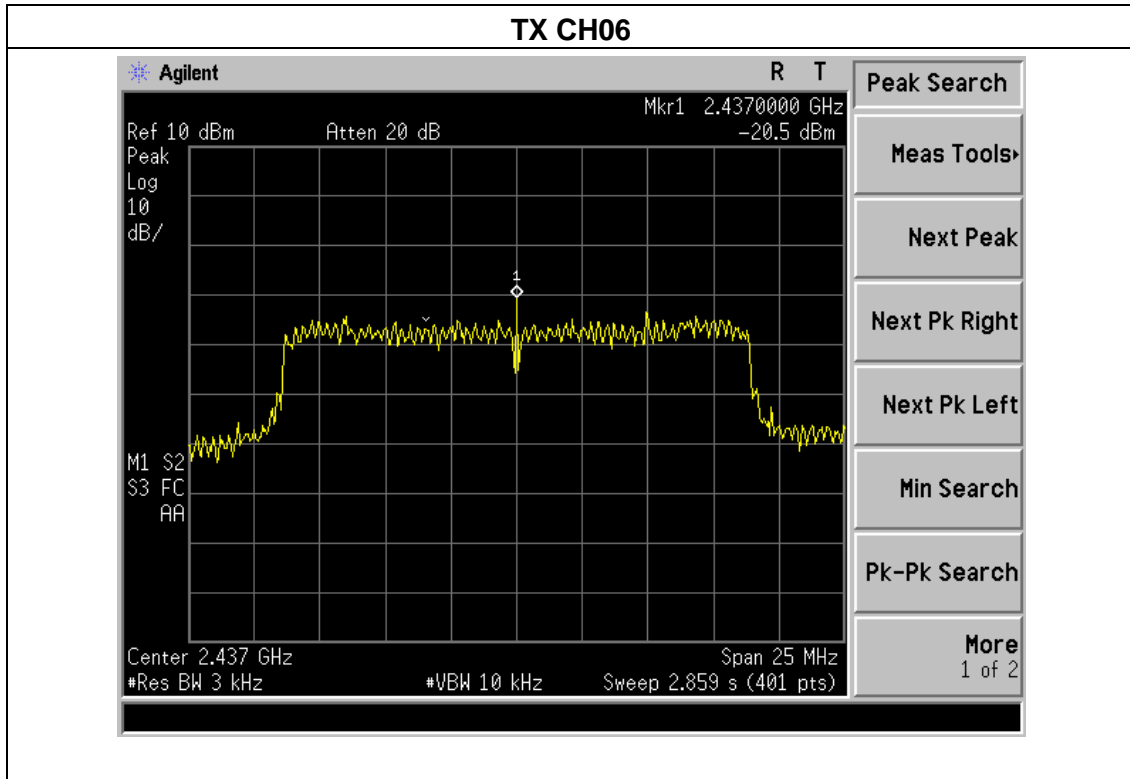




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX n Mode(40M)		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2422 MHz	-15.35	8	PASS
2437 MHz	-19.83	8	PASS
2452 MHz	-20.13	8	PASS

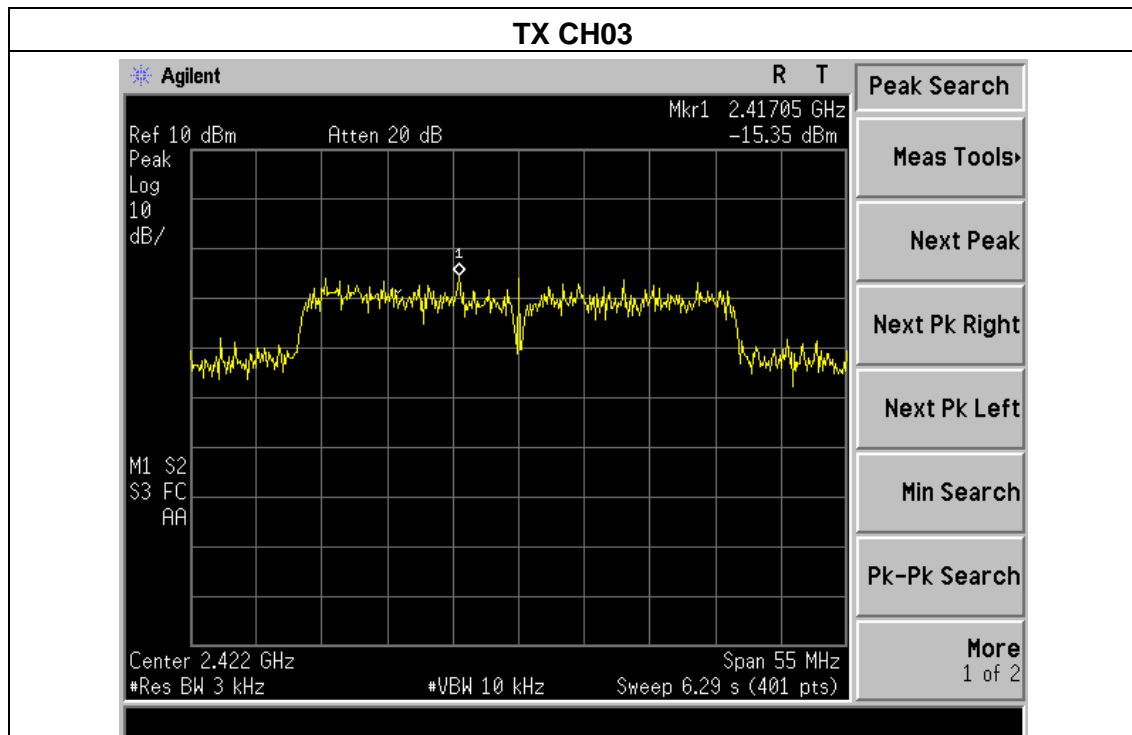

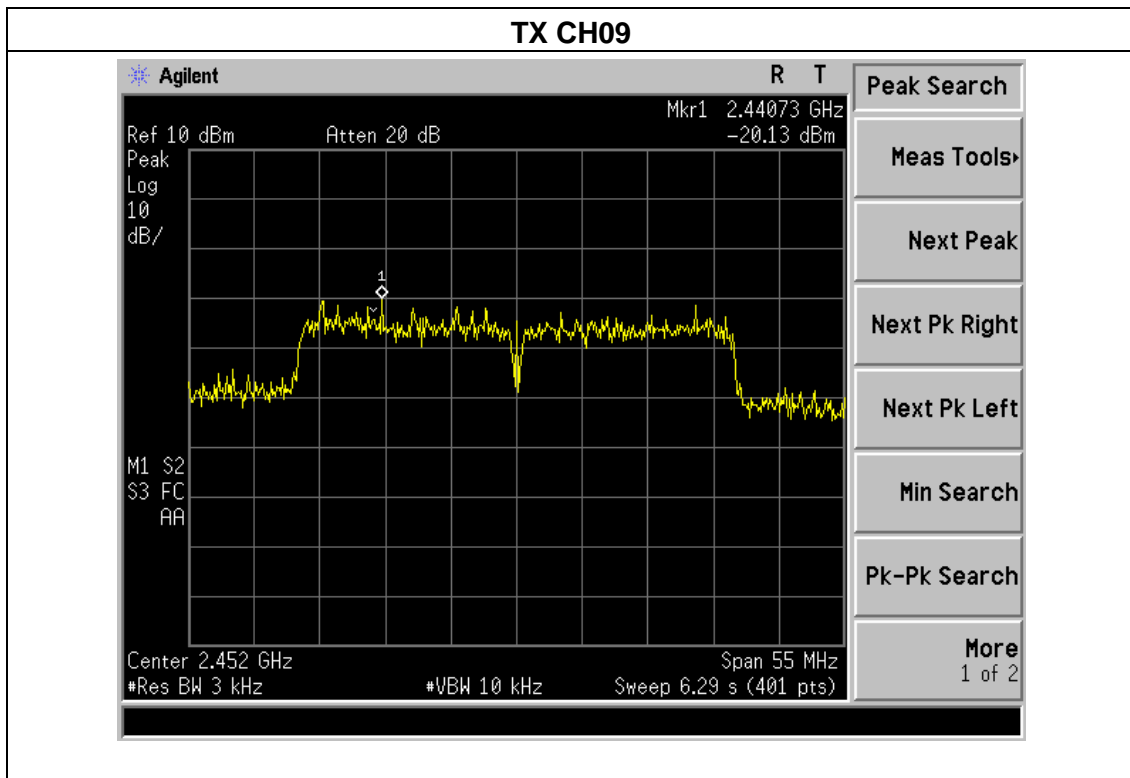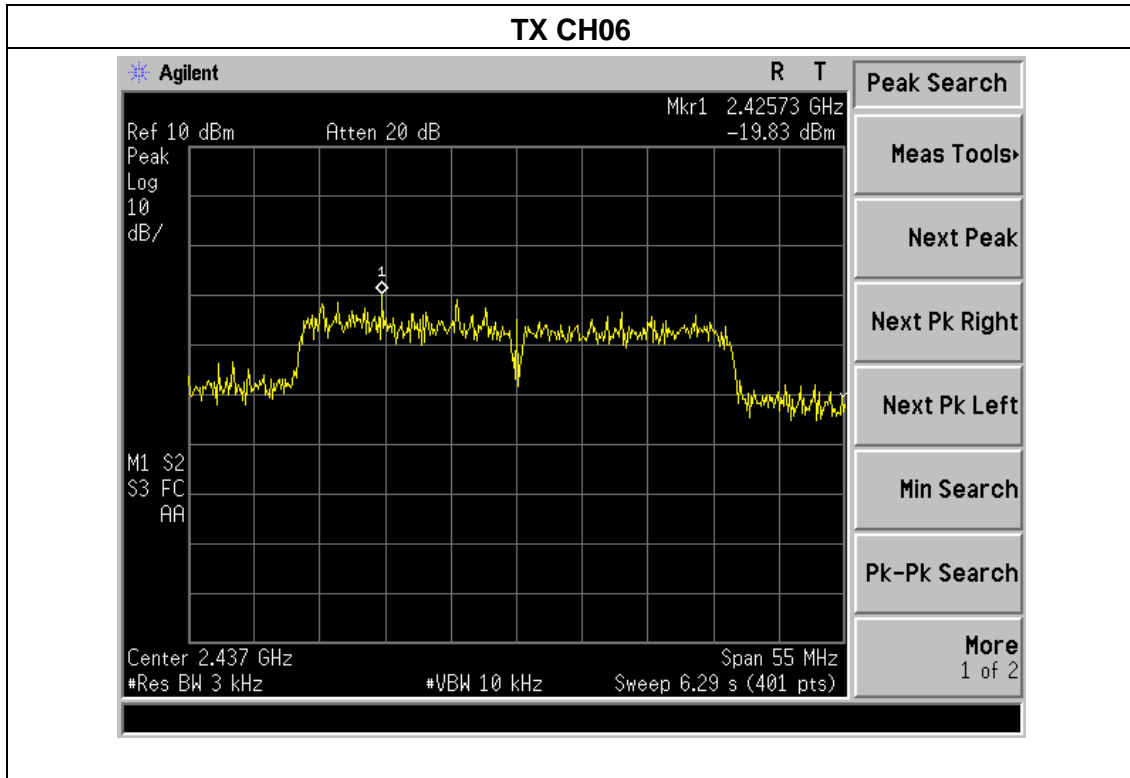

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





5.1.5 TEST RESULTS

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX b Mode		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.607	500	Pass
Middle	2437	10.069	500	Pass
High	2462	10.106	500	Pass

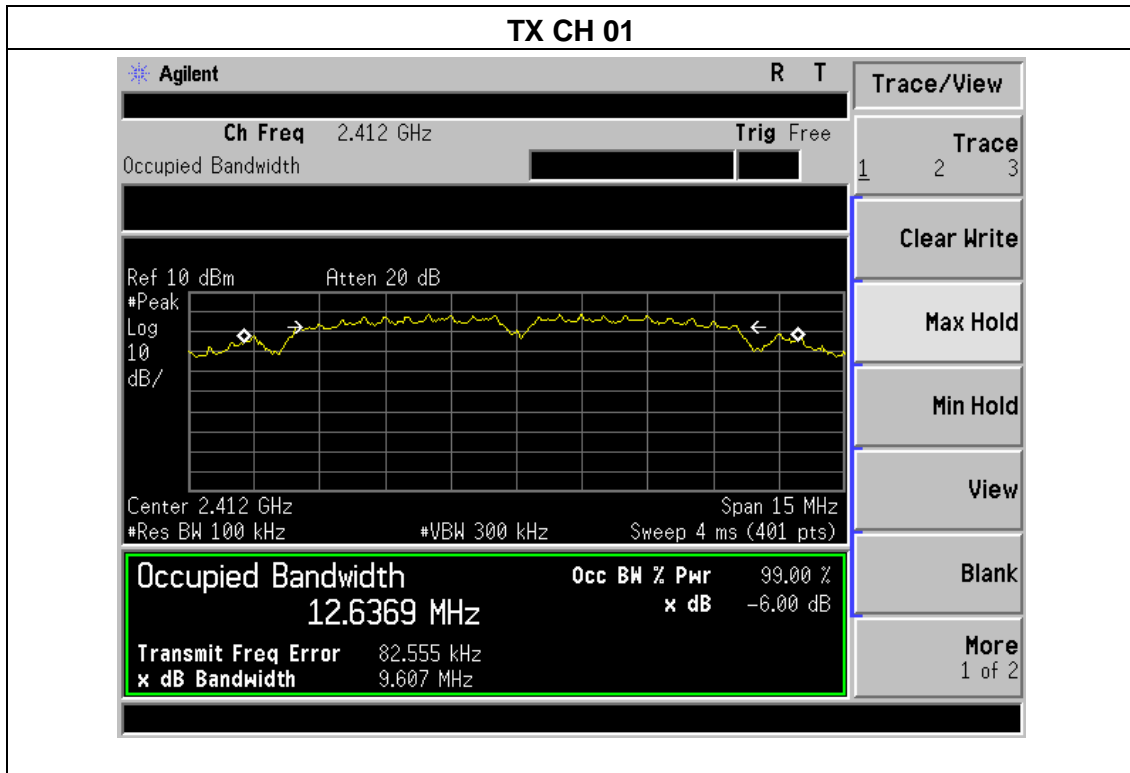


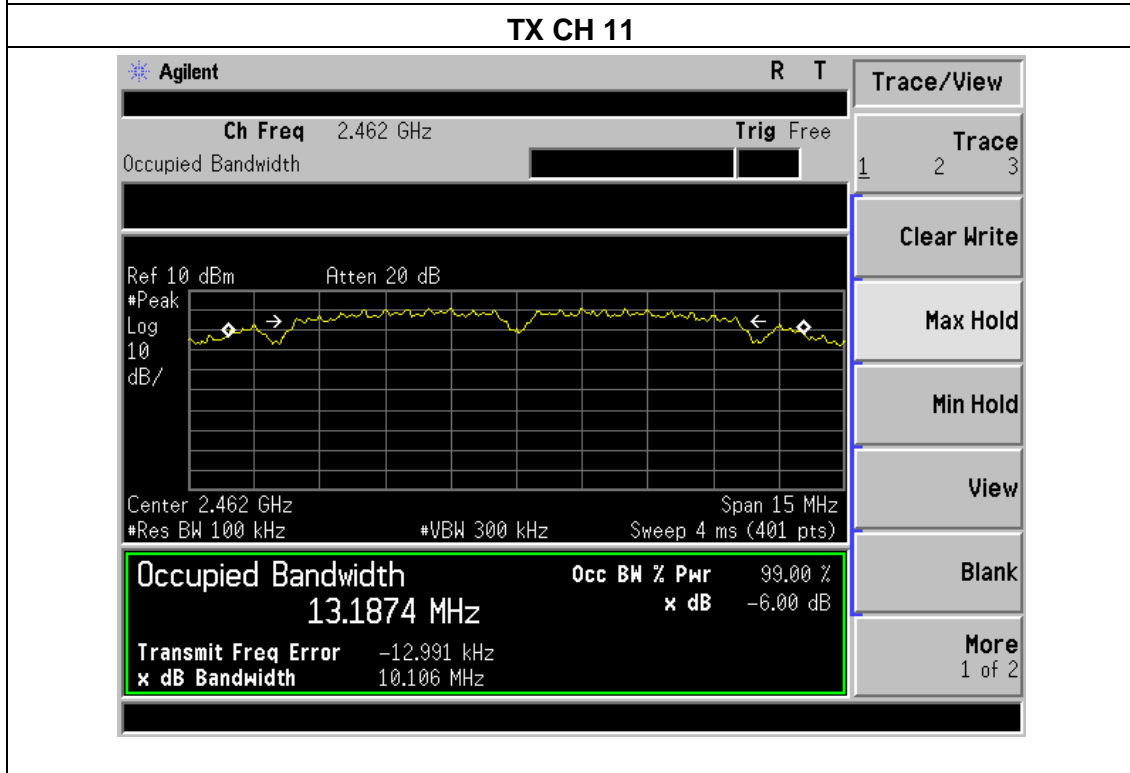
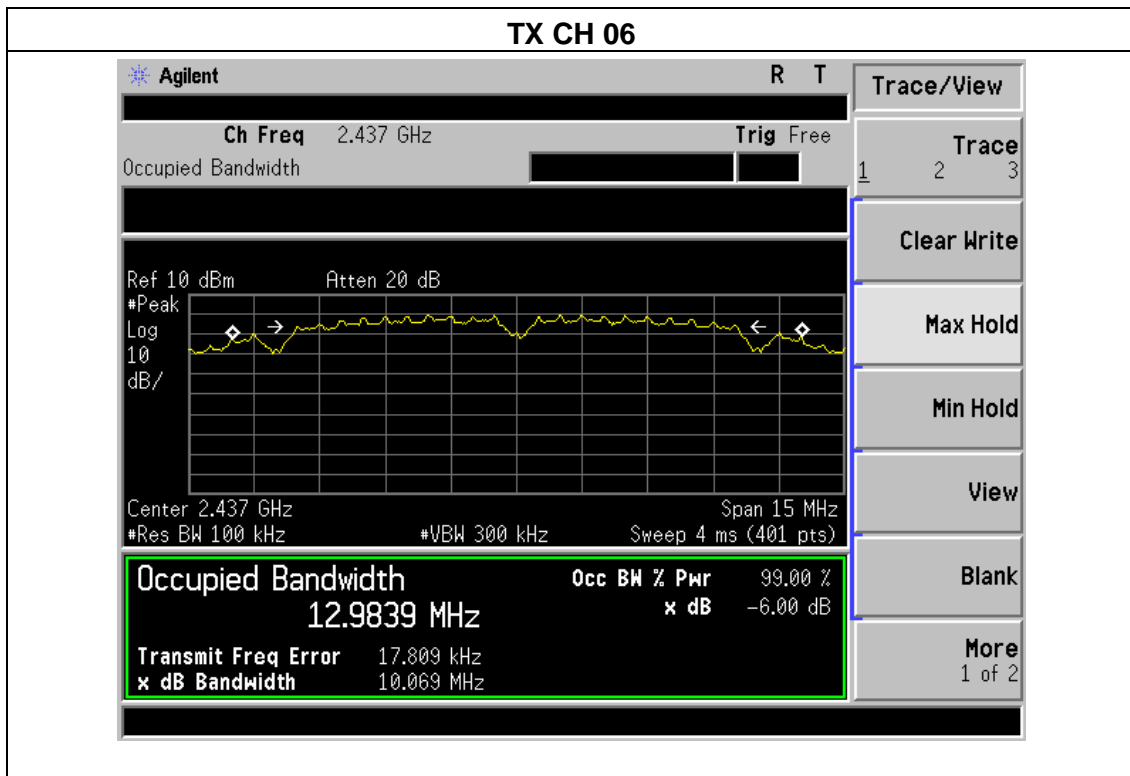




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX g Mode		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.414	500	Pass
Middle	2437	16.478	500	Pass
High	2462	16.384	500	Pass

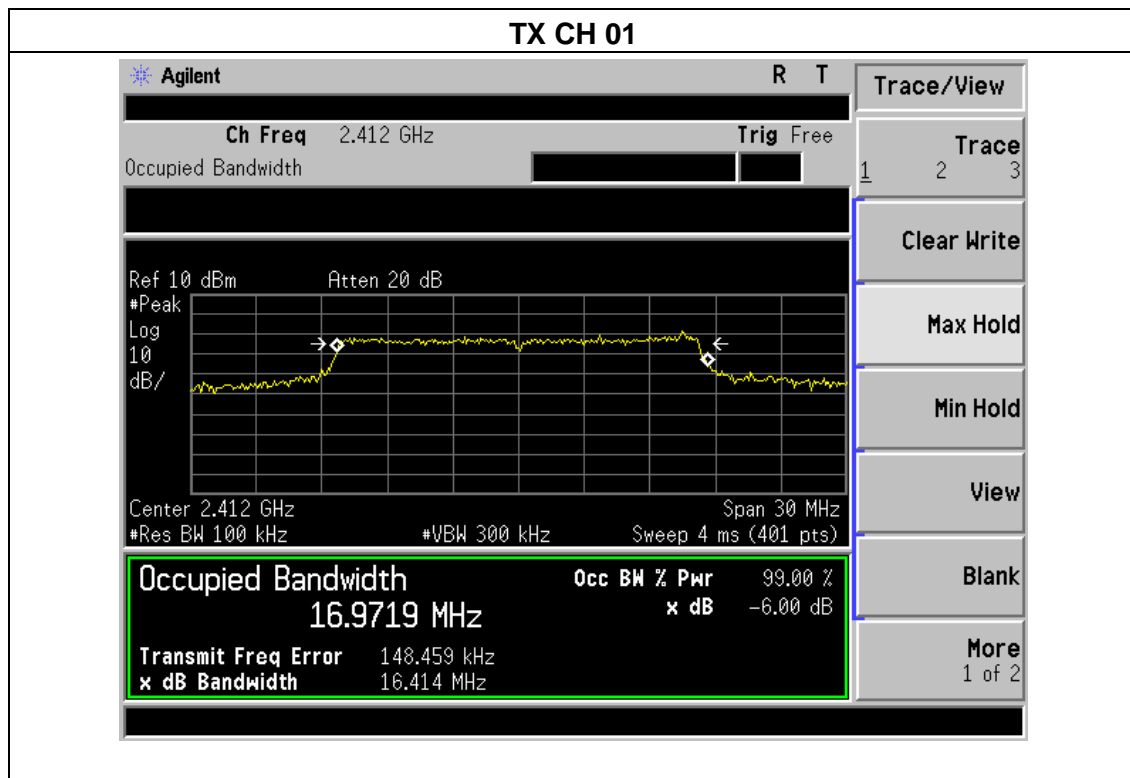


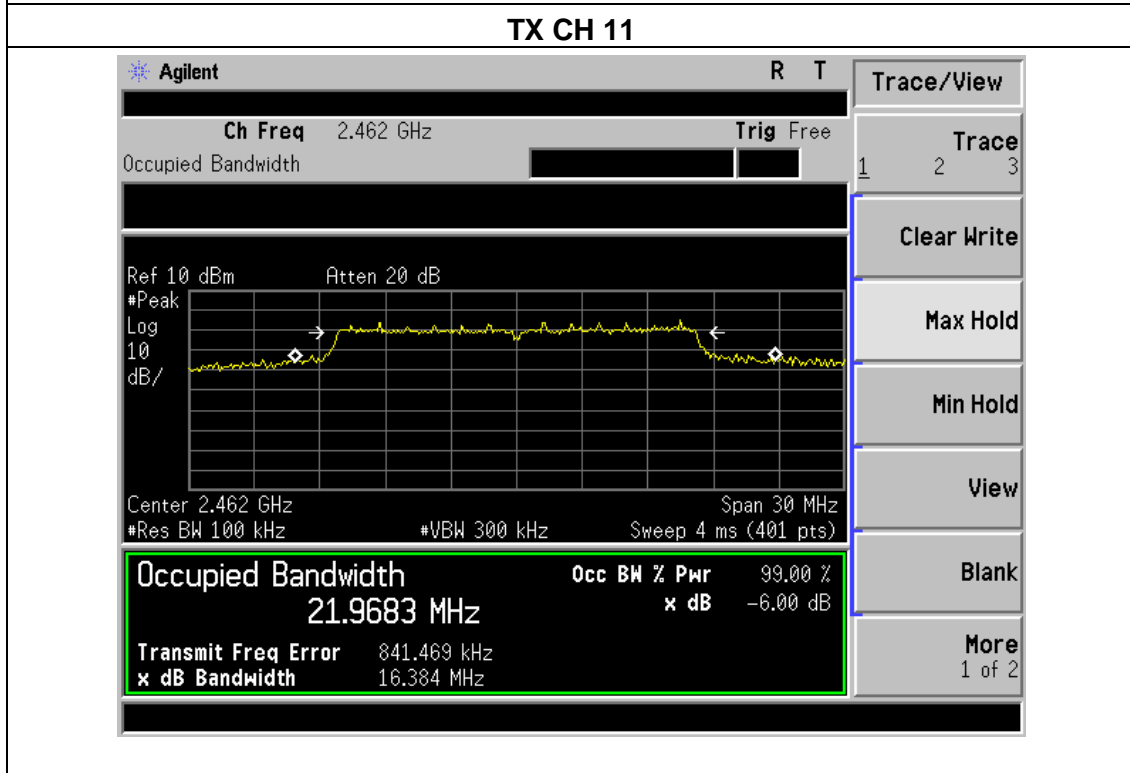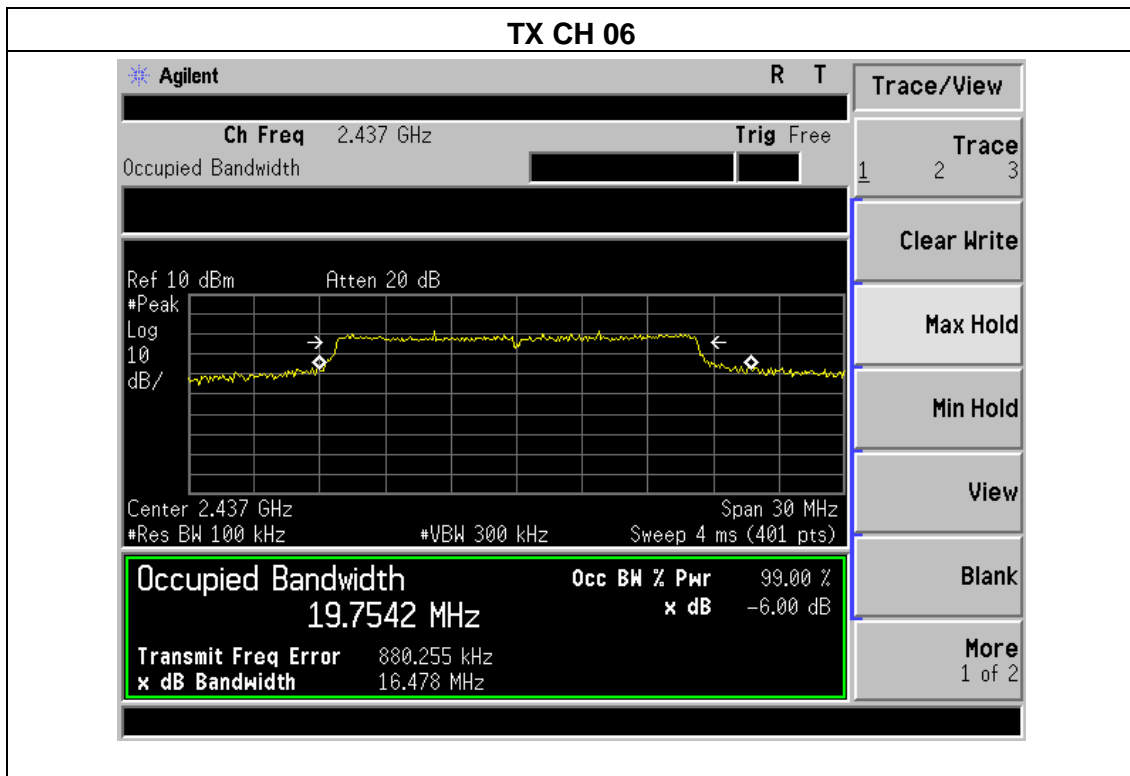




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX n Mode(20M)		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.394	500	Pass
Middle	2437	16.950	500	Pass
High	2462	16.789	500	Pass

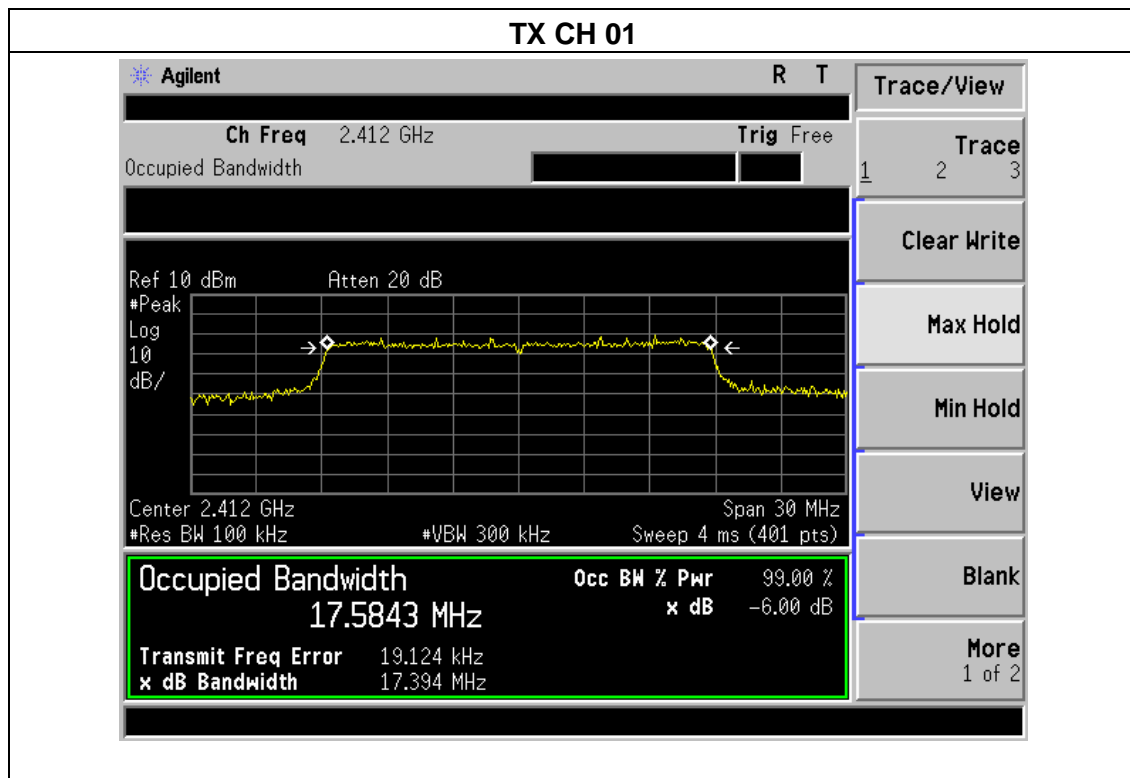


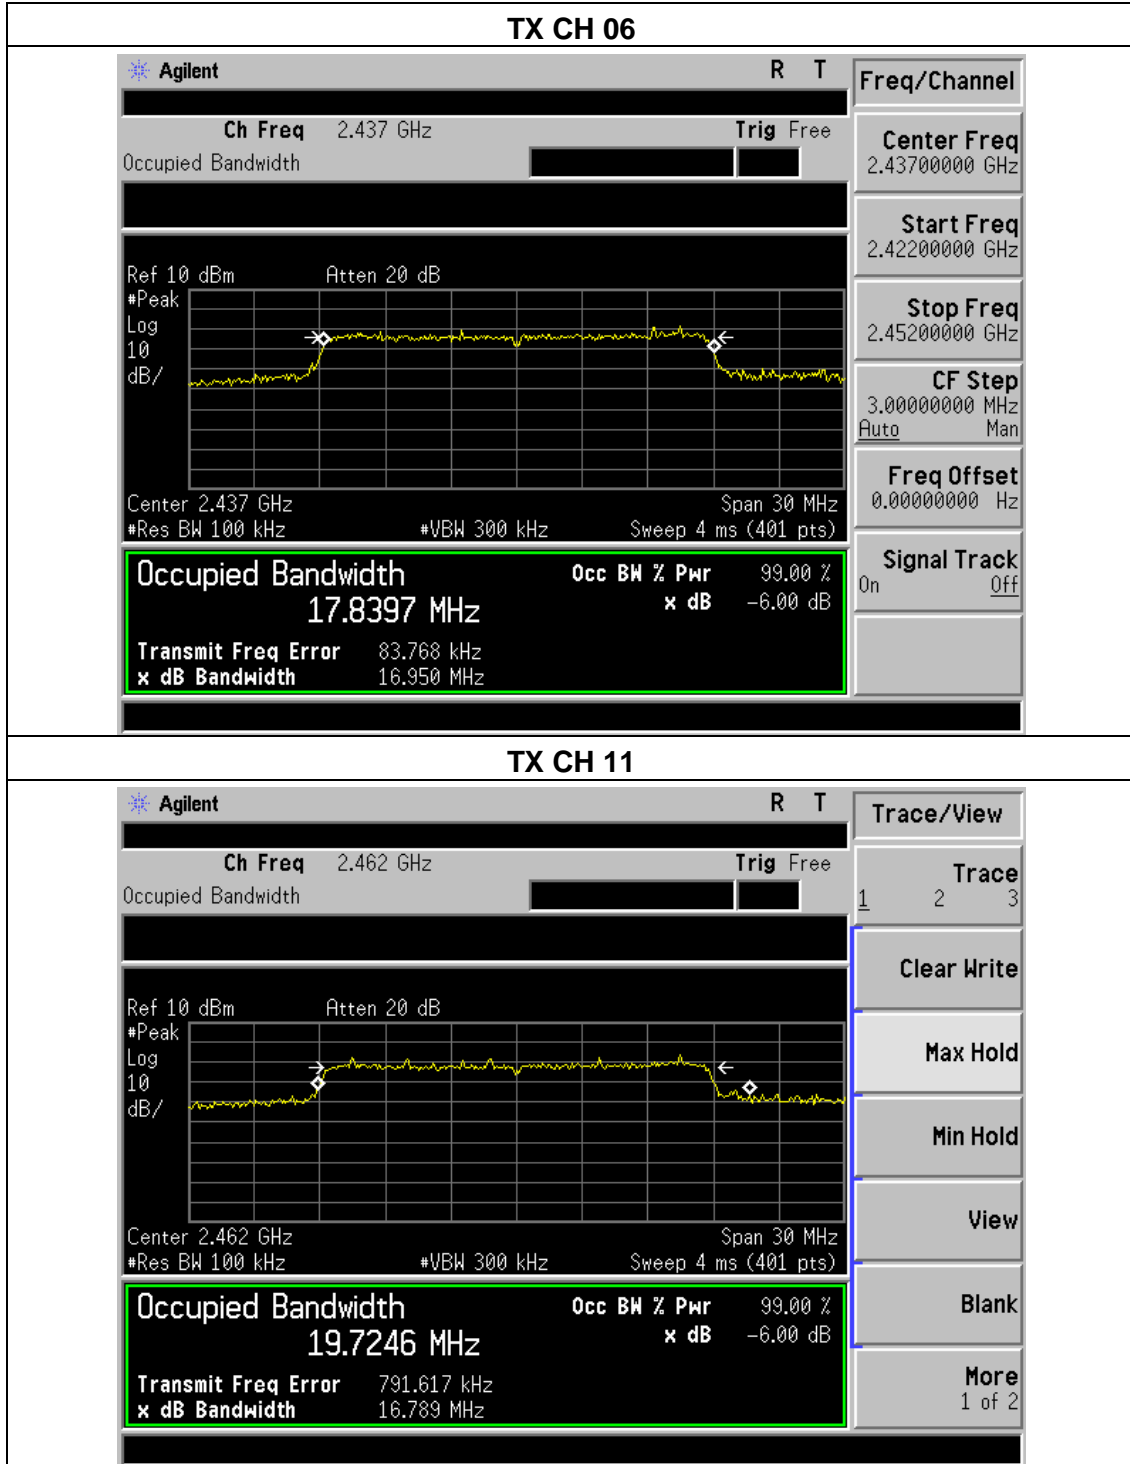




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.3V
Test Mode :	TX n Mode(40M)		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	35.561	500	Pass
Middle	2437	35.365	500	Pass
High	2452	35.580	500	Pass

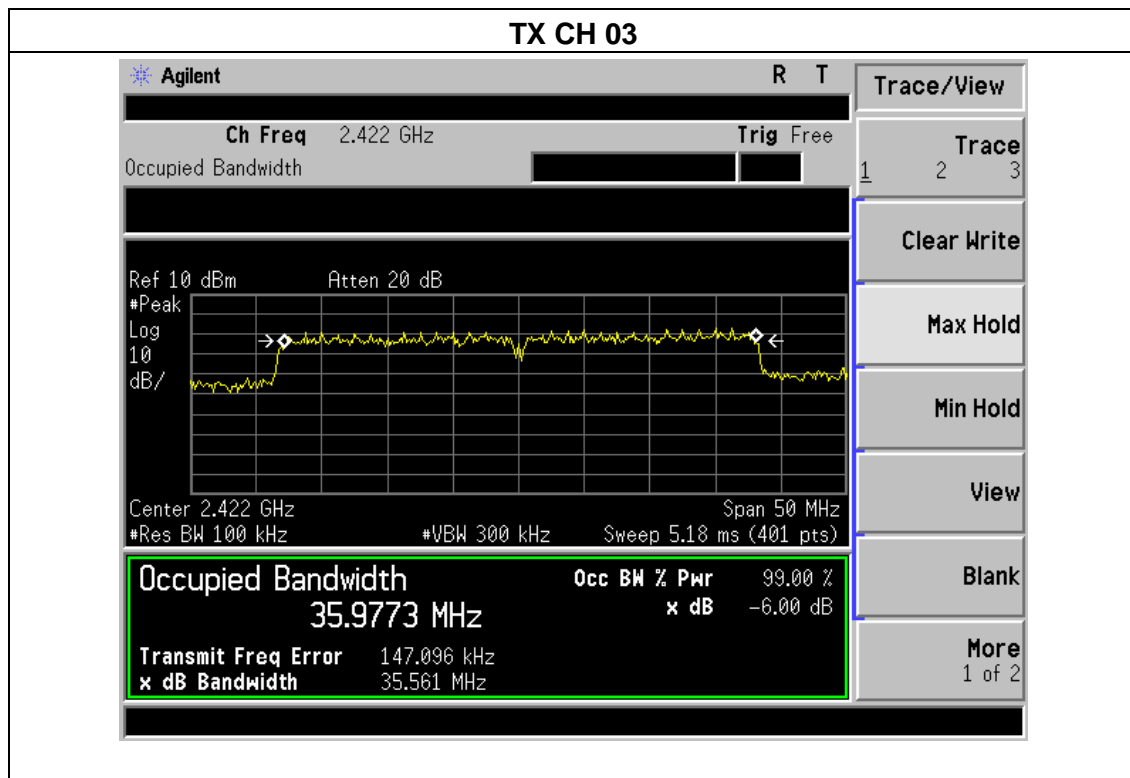

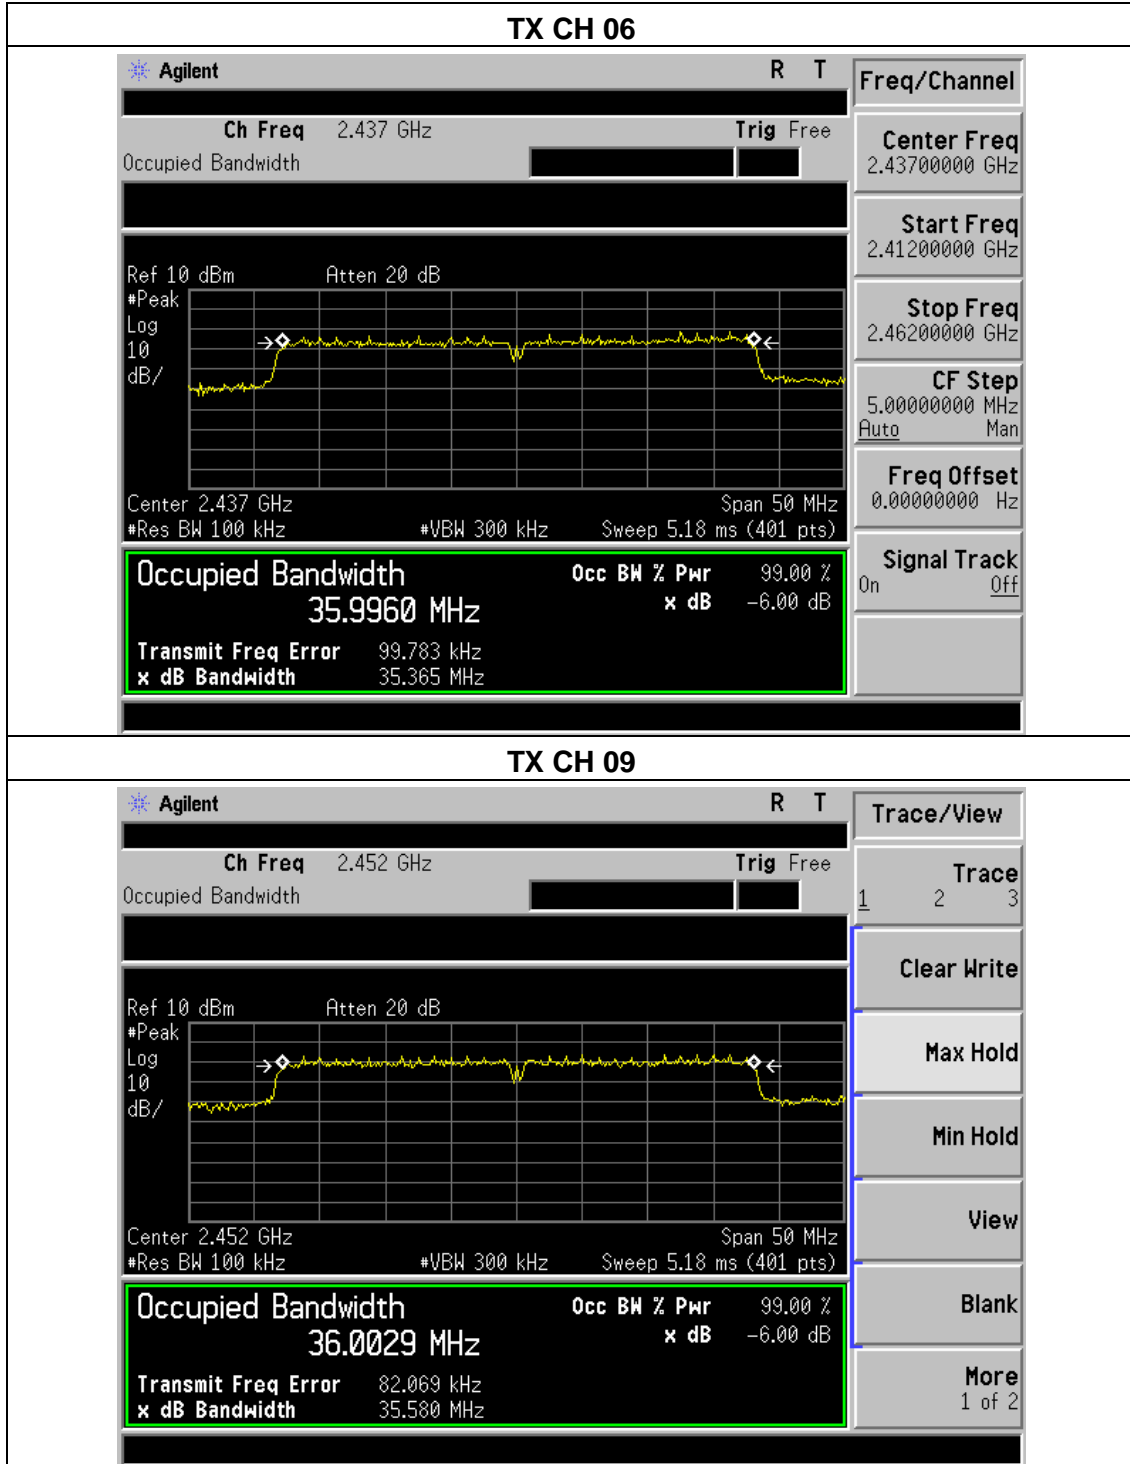

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.3V

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b Mode			
CH01	2412	12.96	30
CH06	2437	13.58	30
CH11	2462	12.64	30
802.11g Mode			
CH01	2412	12.35	30
CH06	2437	11.79	30
CH11	2462	11.58	30
802.11n-HT20 Mode			
CH01	2412	11.45	30
CH06	2437	11.38	30
CH11	2462	11.52	30
802.11n-HT40 Mode			
CH03	2422	10.28	30
CH06	2437	9.94	30
CH09	2452	9.56	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

7.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP




7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.1 TEST RESULTS



802.11b: Band Edge, Left Side

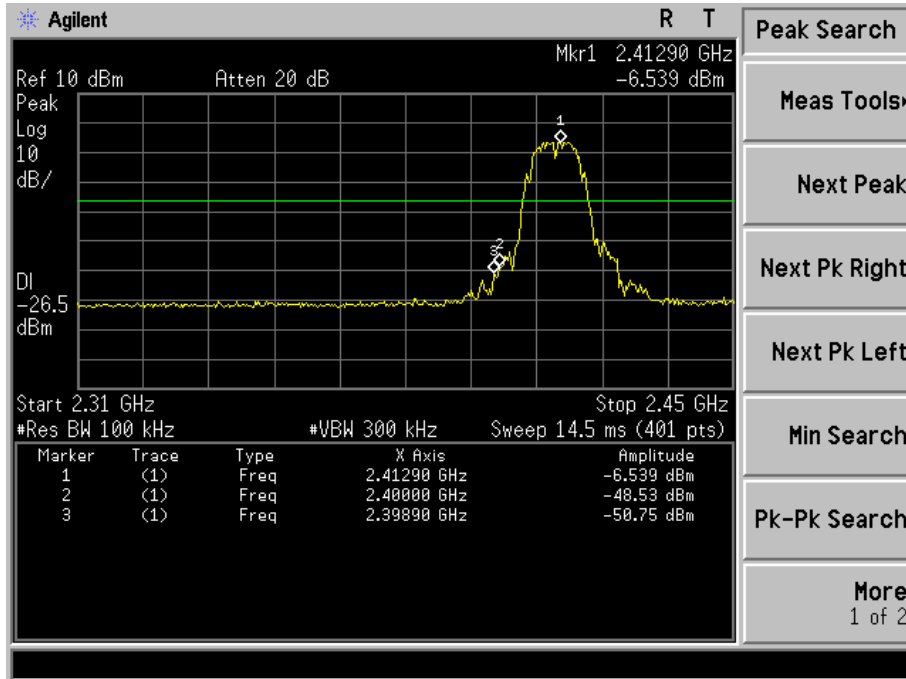


802.11b: Band Edge, Right Side

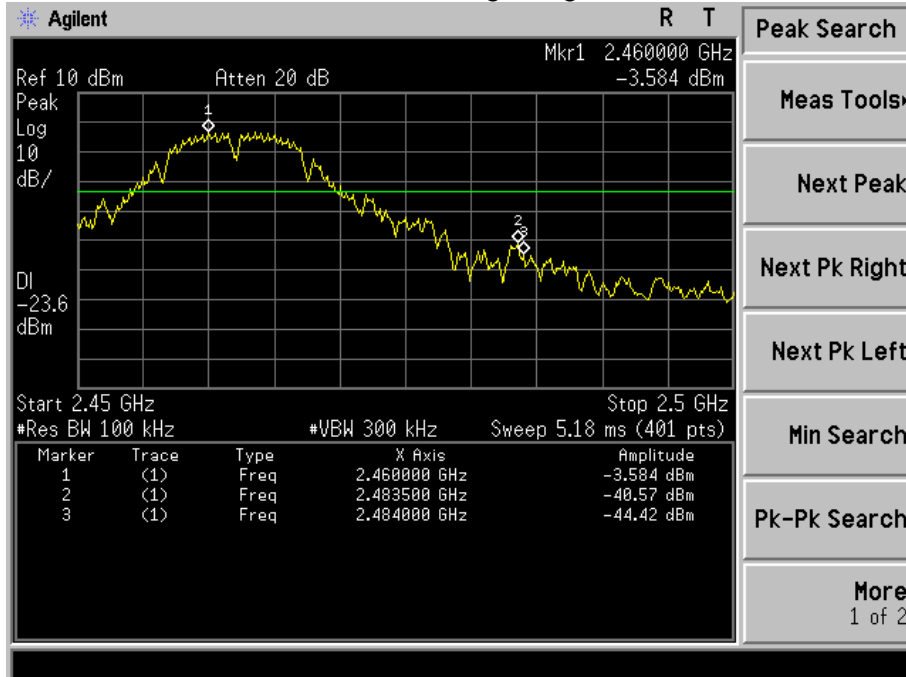




802.11g: Band Edge, Left Side

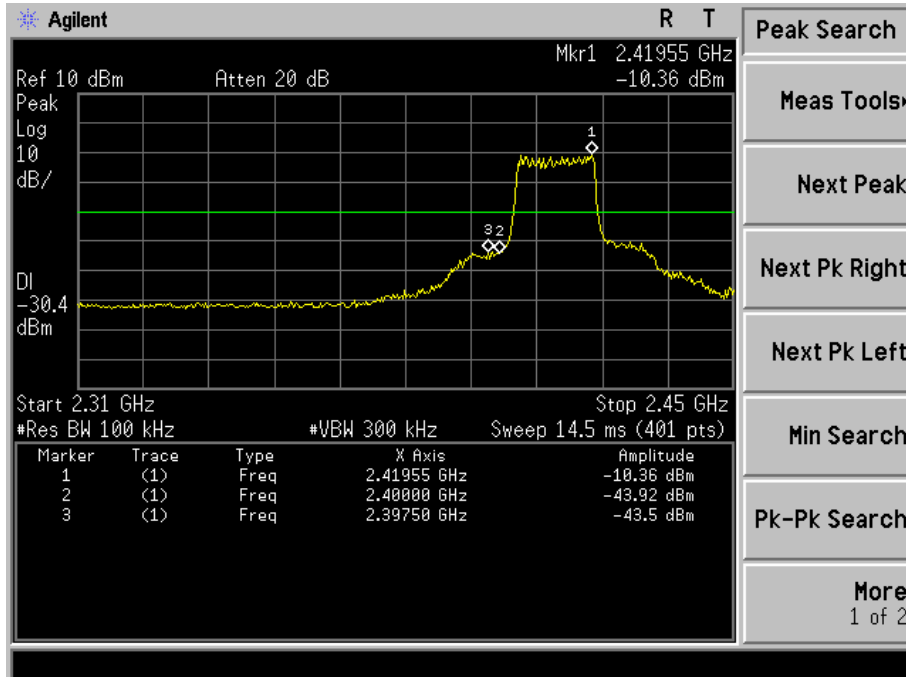


802.11g: Band Edge, Right Side

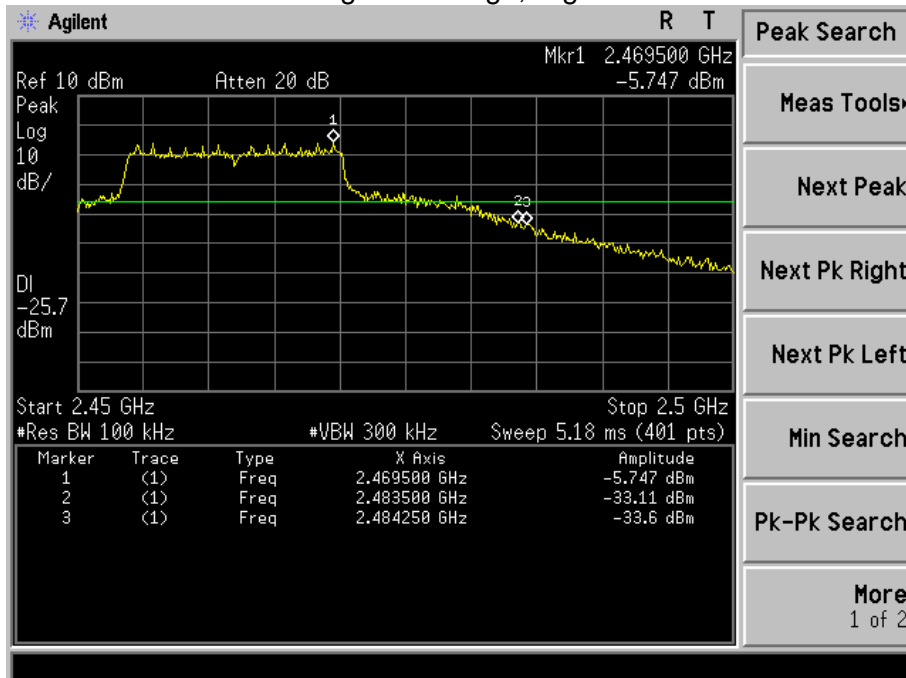




802.11n-HT20: Band Edge, Left Side

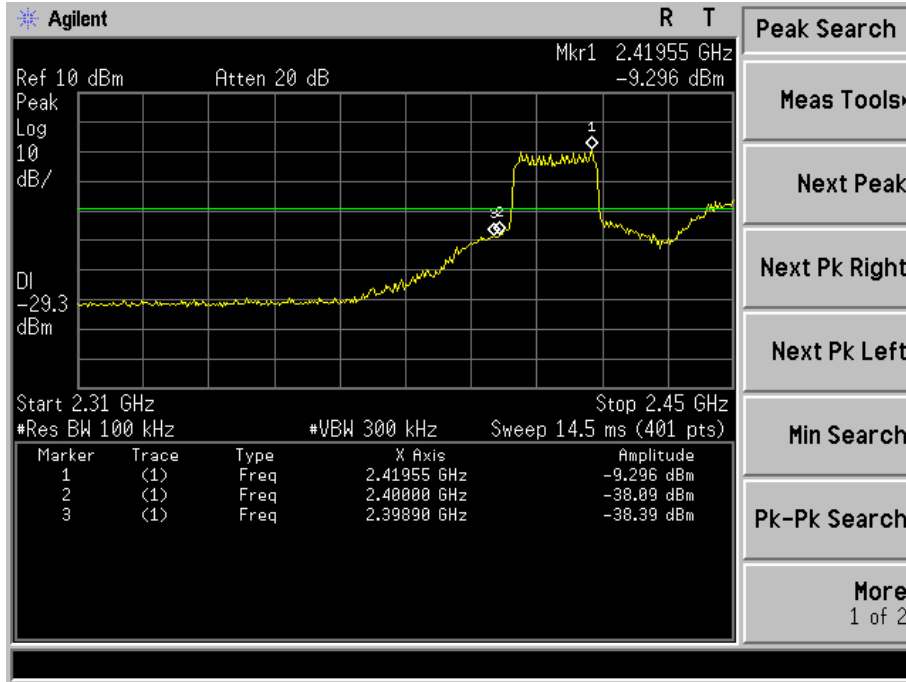


802.11n-HT20: Band Edge, Right Side

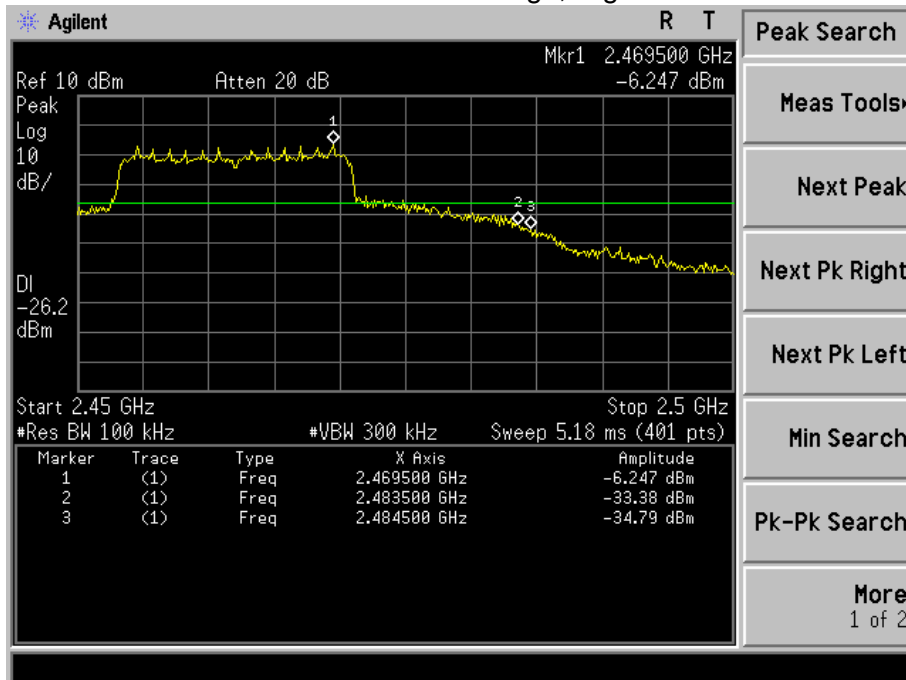




802.11n-HT40: Band Edge, Left Side

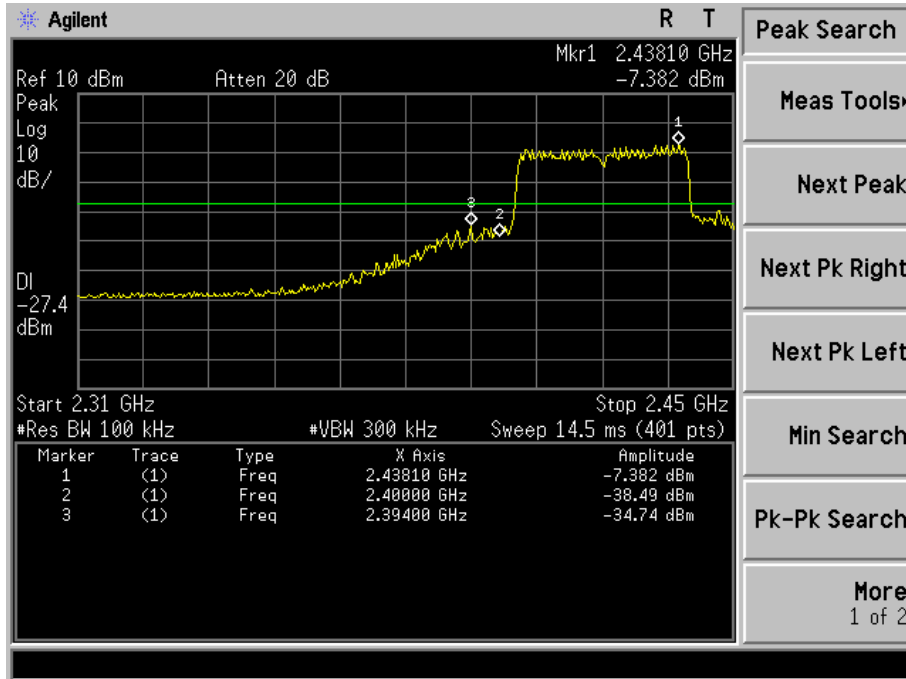

802.11n-HT40: Band Edge, Right Side


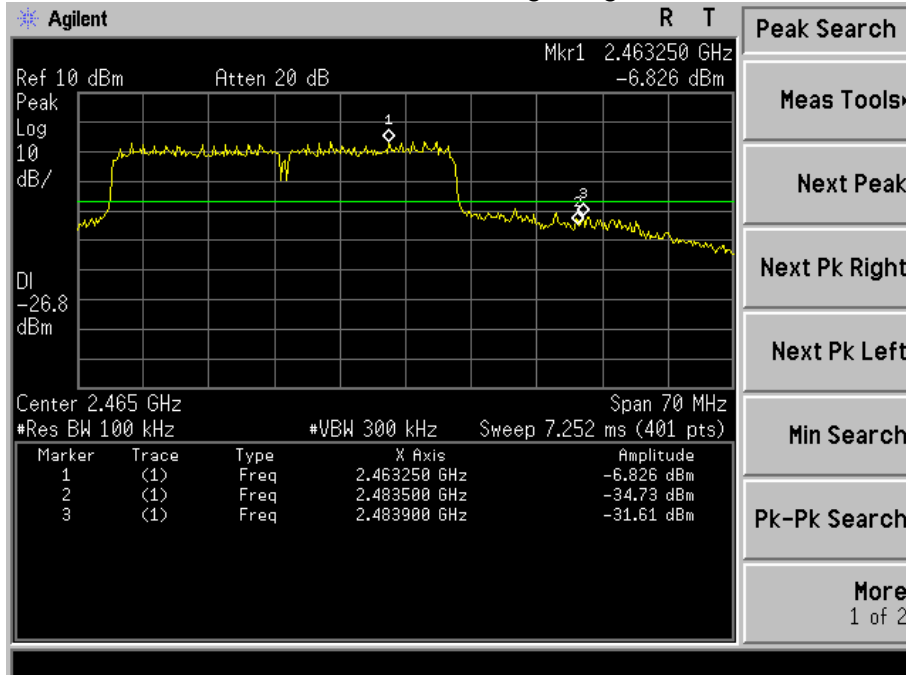






CONDUCTED EMISSION MEASUREMENT

802.11b



Low Channel 2412MHz

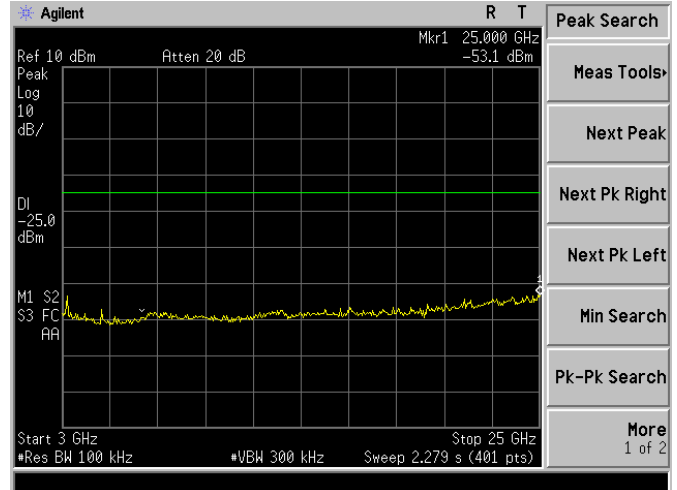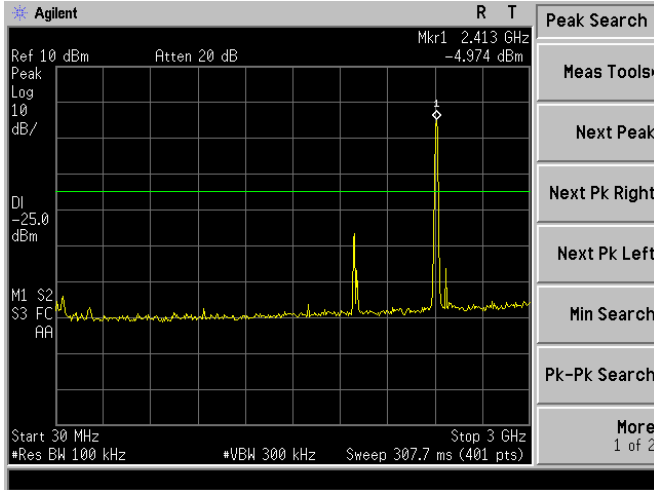

Middle Channel 2437MHz

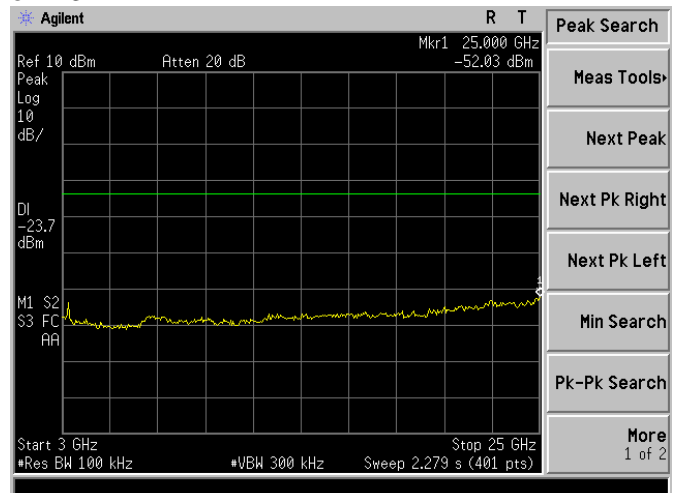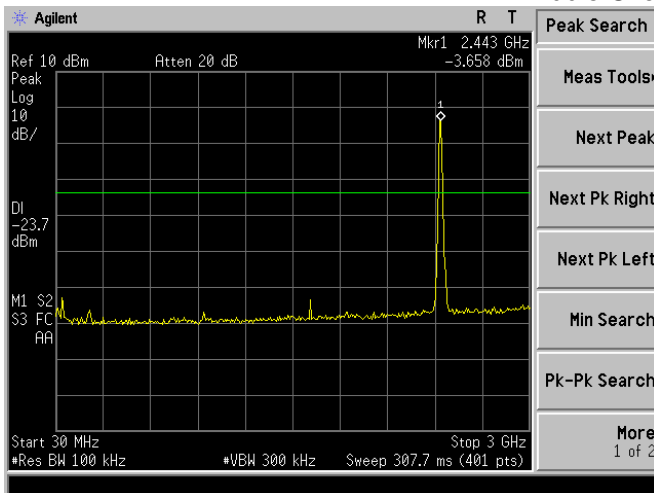



High Channel 2462MHz

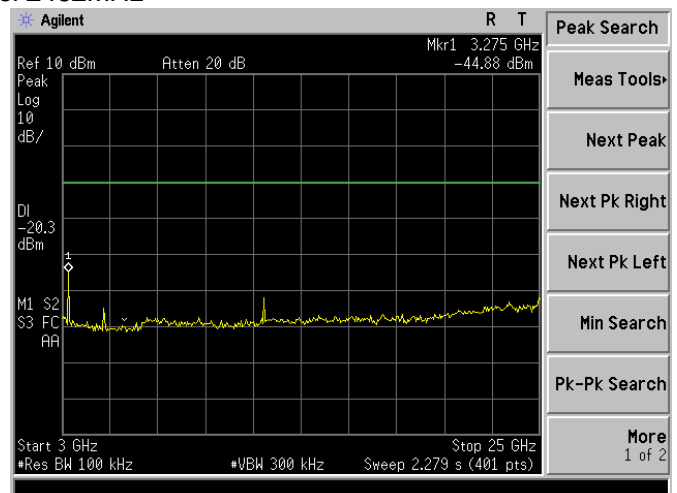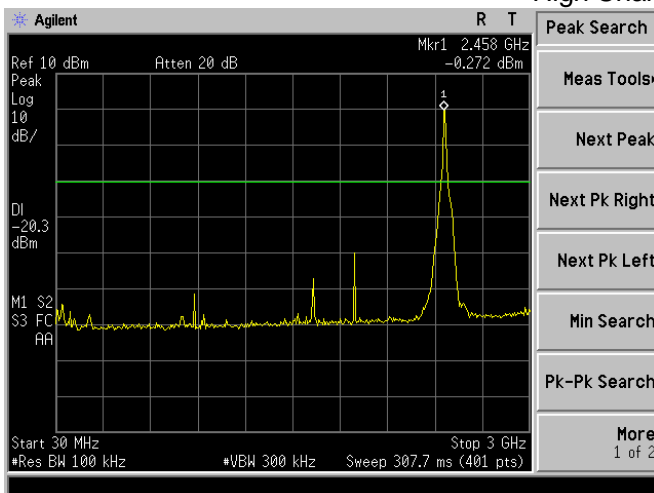





802.11g



Low Channel 2412MHz

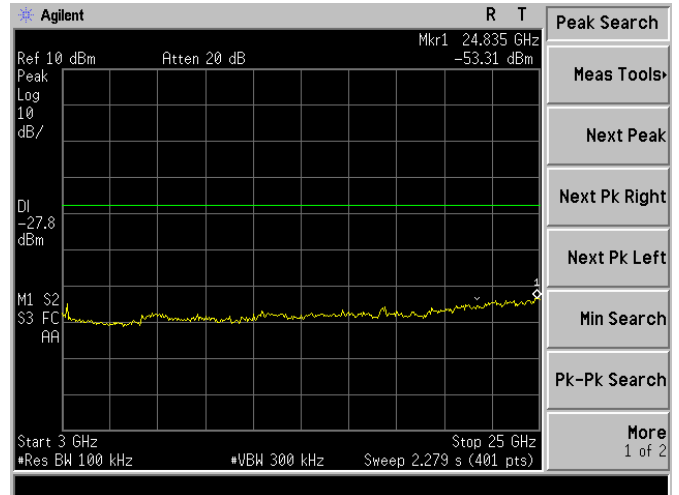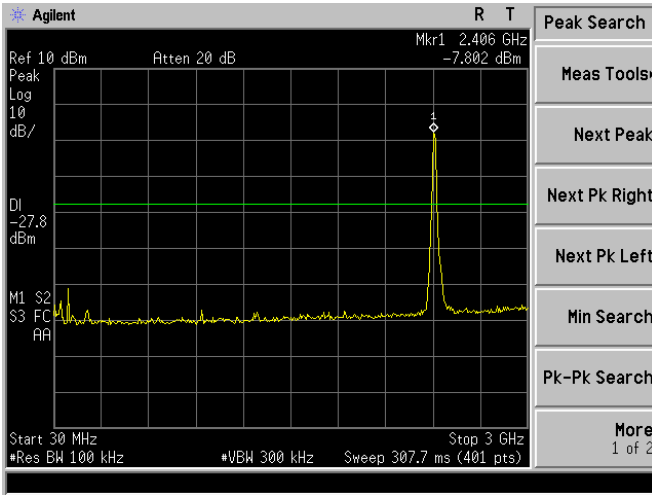

Middle Channel 2437MHz

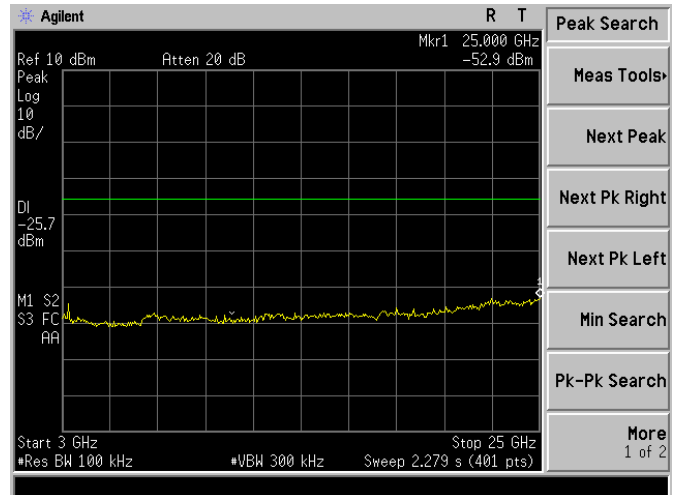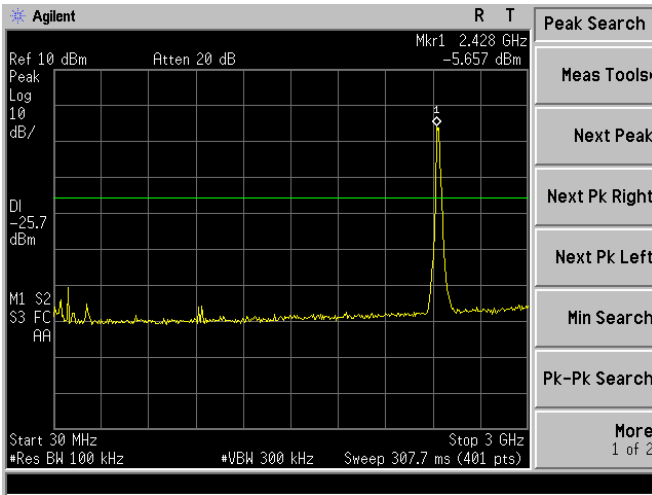



High Channel 2462MHz

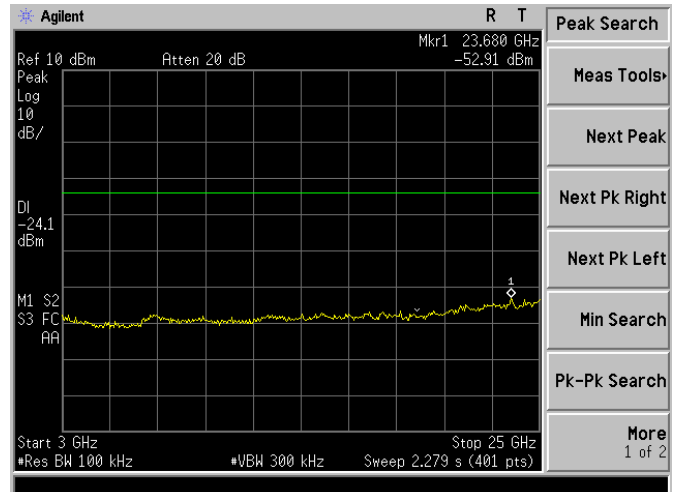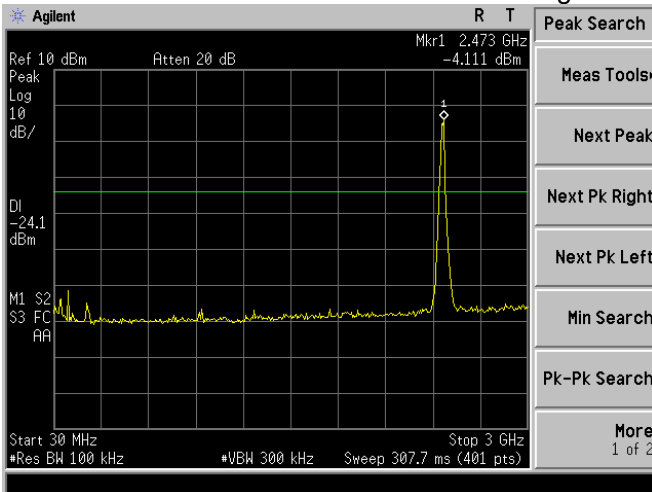





802.11n20



Low Channel 2412MHz

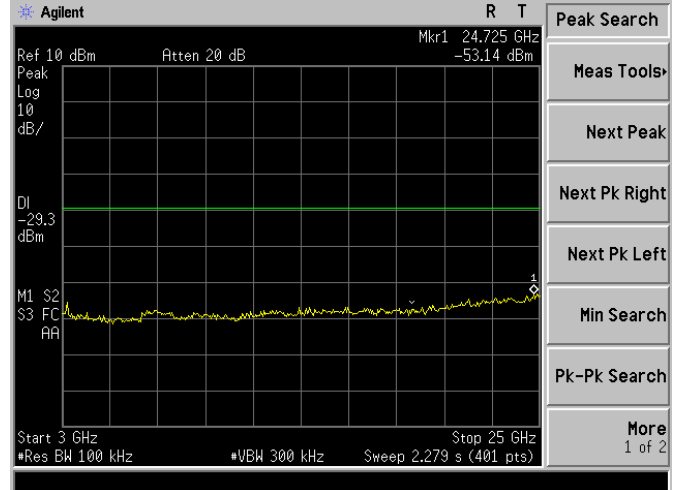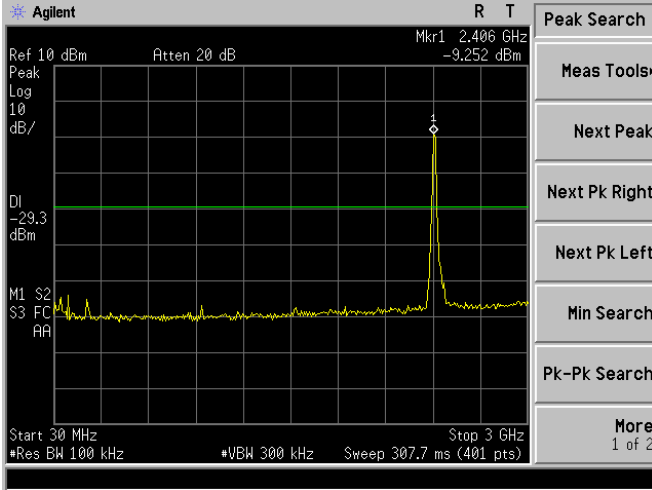

Middle Channel 2437MHz

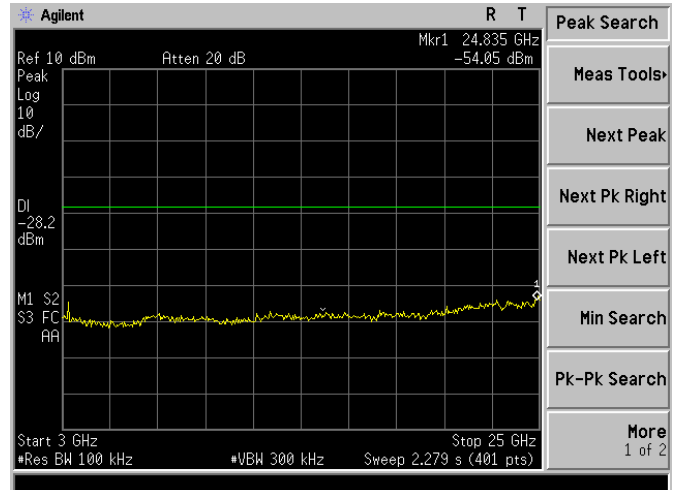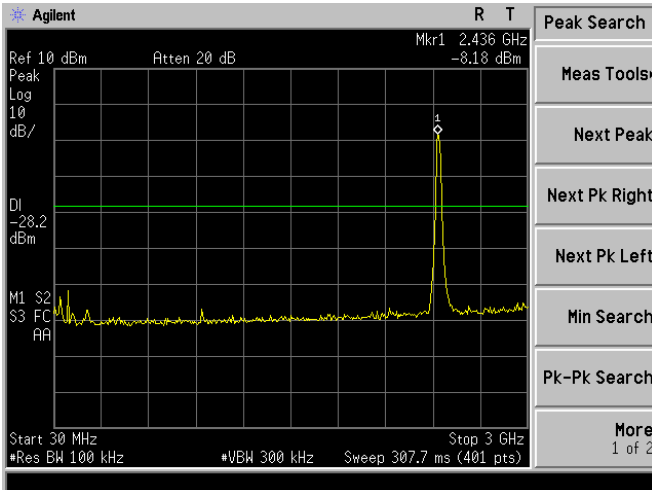



High Channel 2462MHz

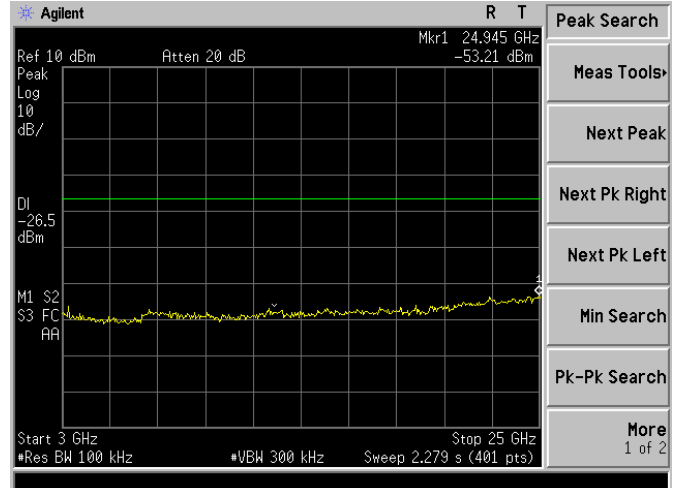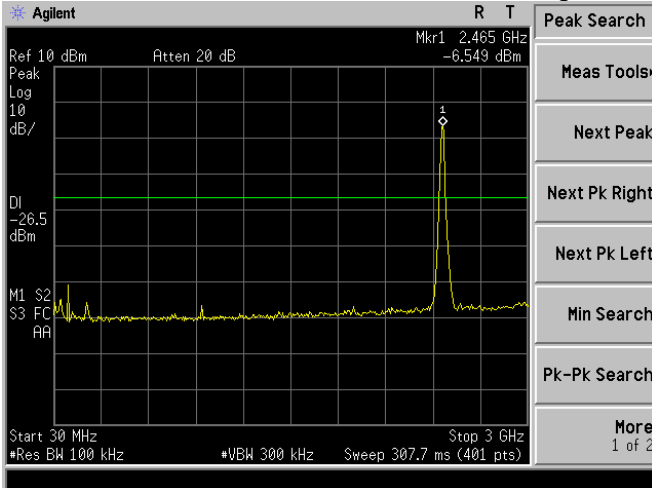





802.11n40



Low Channel 2422MHz

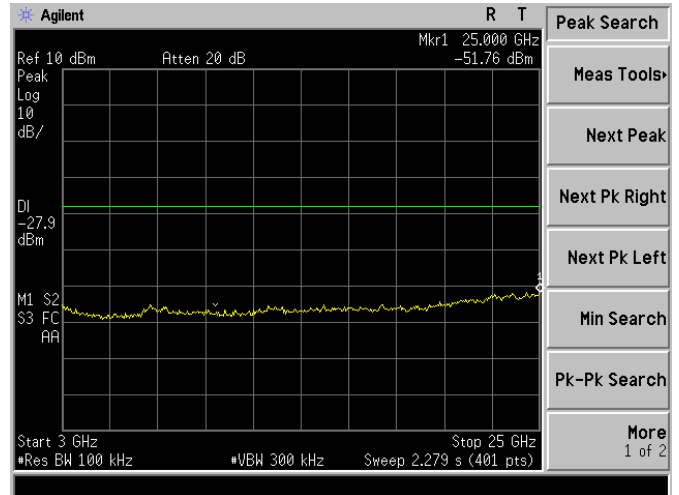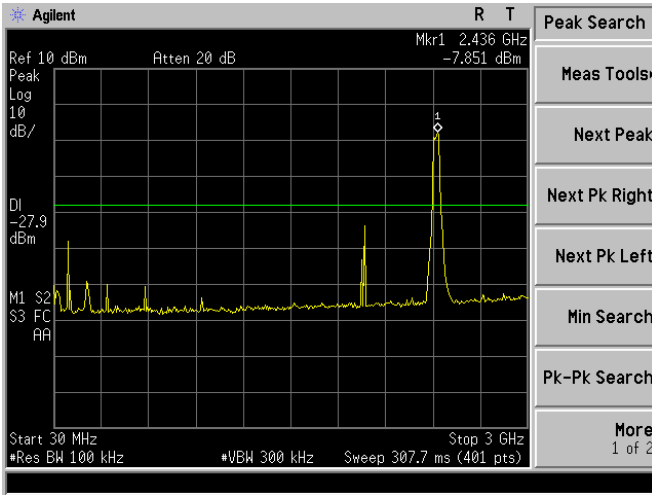

Middle Channel 2437MHz

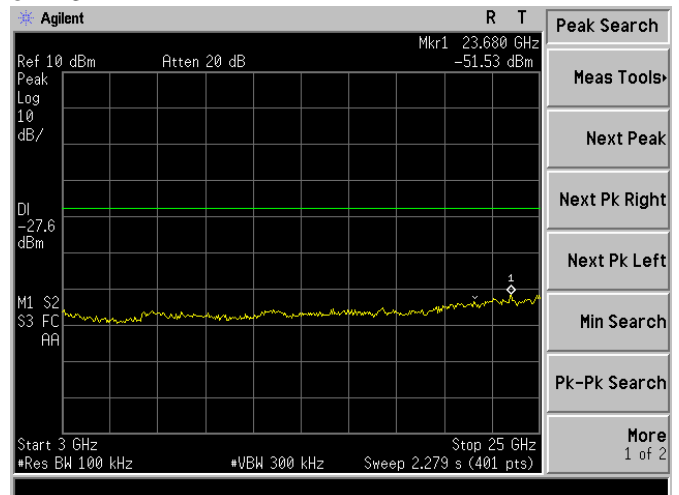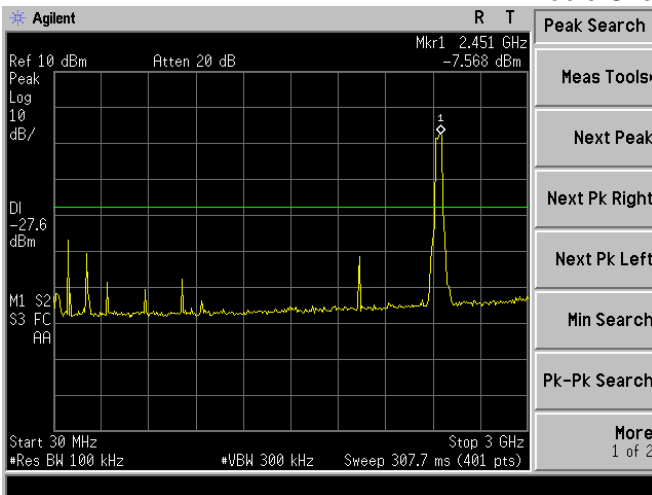

High Channel 2452MHz

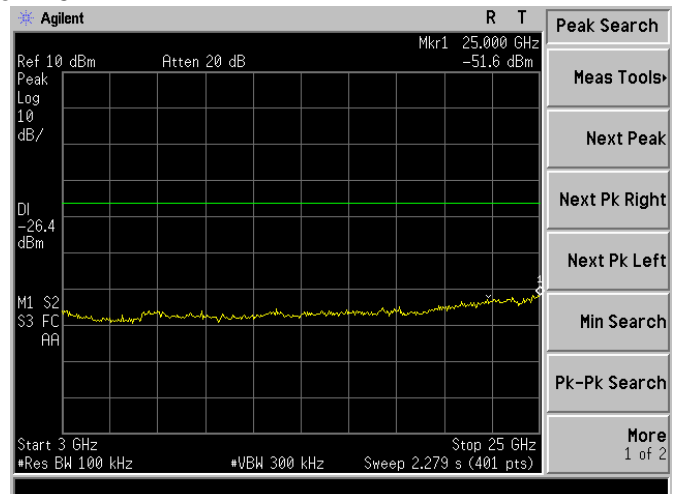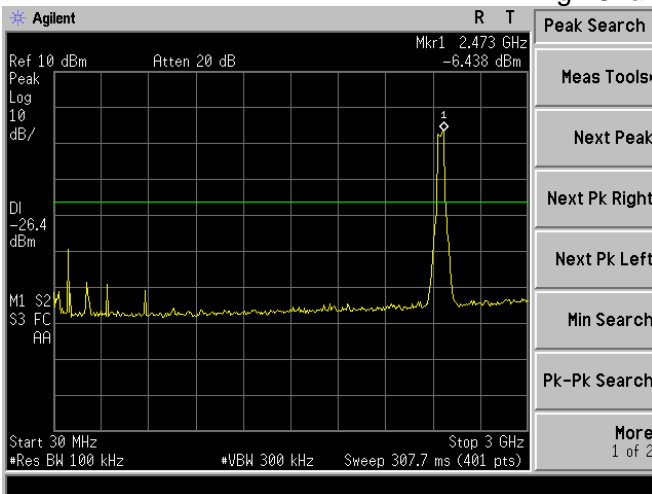



8. DUTY CYCLE OF TEST SIGNAL

8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 FORMULA:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$


Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

Duty Cycle:


	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0

802.11b

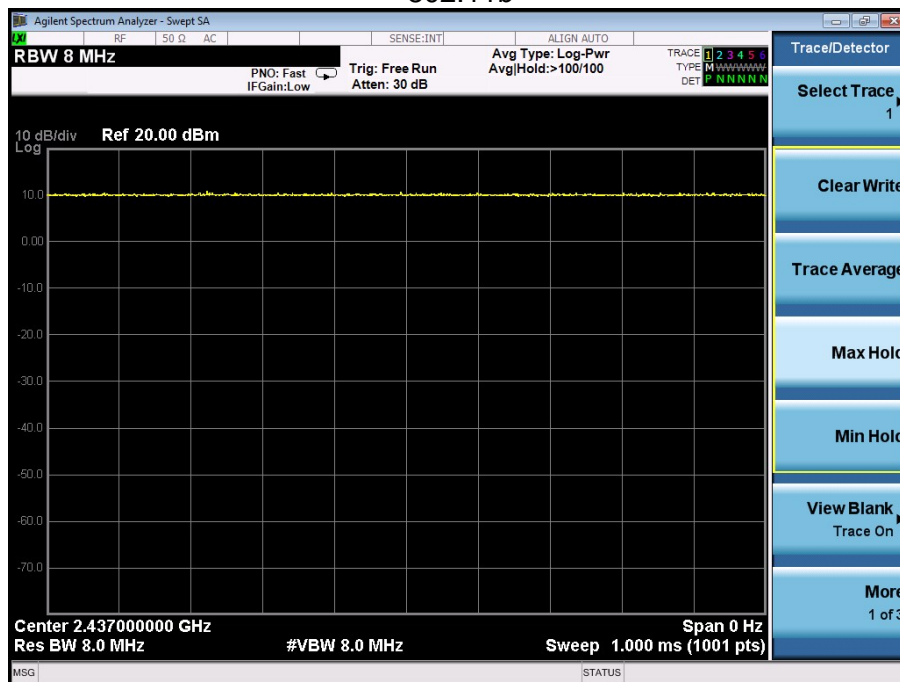




802.11g

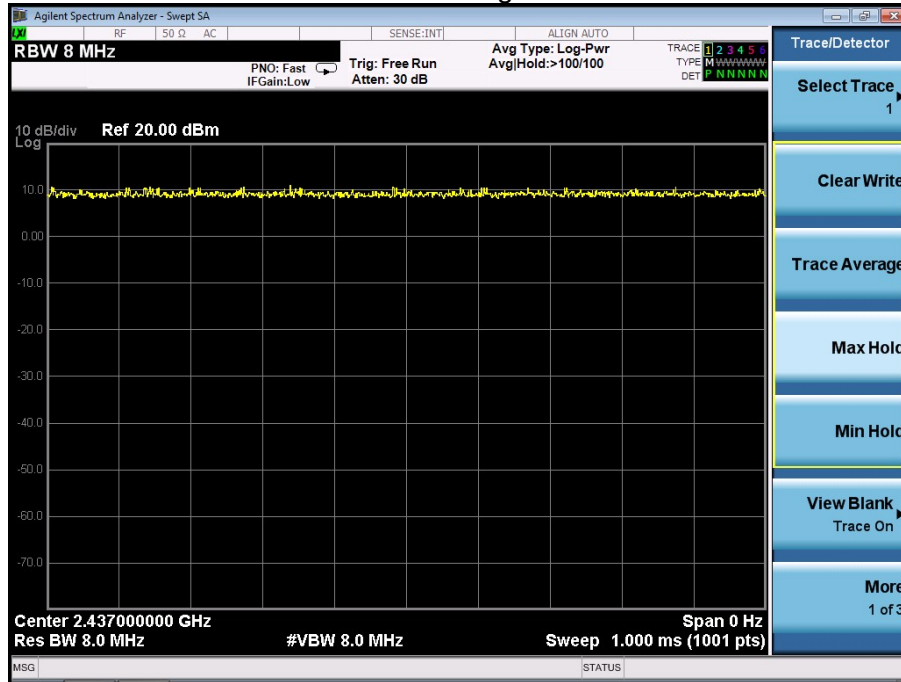


802.11n(HT20)

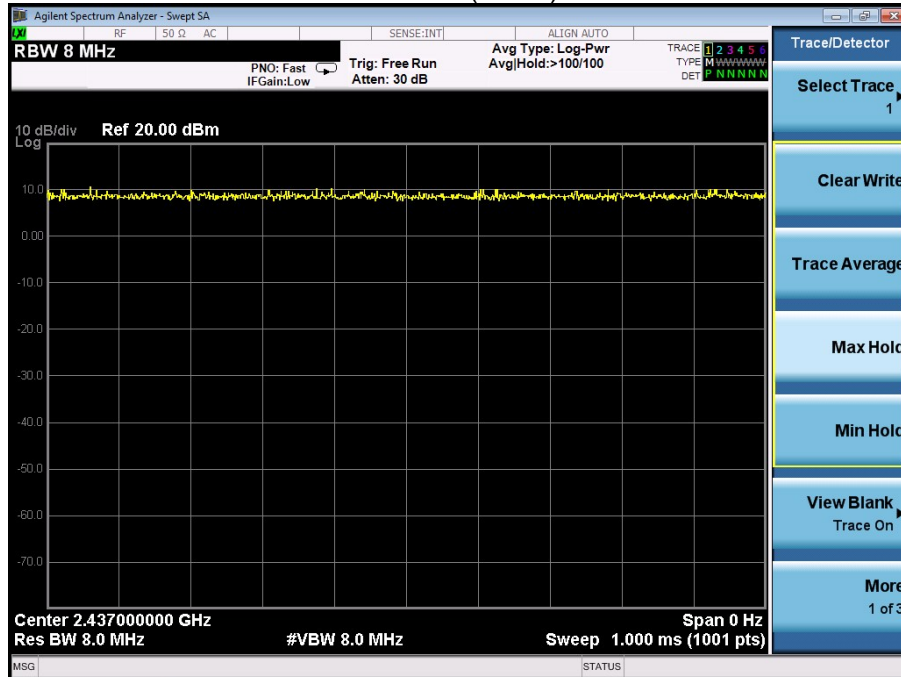



802.11n(HT40)

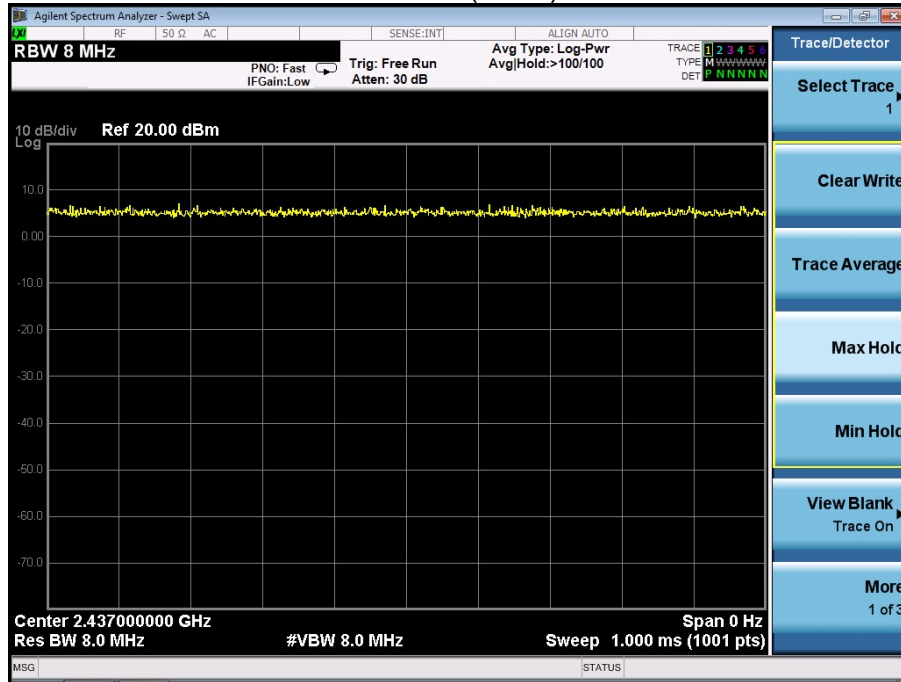



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA


The EUT antenna is U.FL connection external antenna. It respectively can use three kinds of specifications an antenna gain of 3.52dBi, 2.8dBi, and 3.6dBi. It complies with the standard requirement.

10. EUT TEST PHOTO


Conducted Measurement Photos





Radiated Measurement Photos

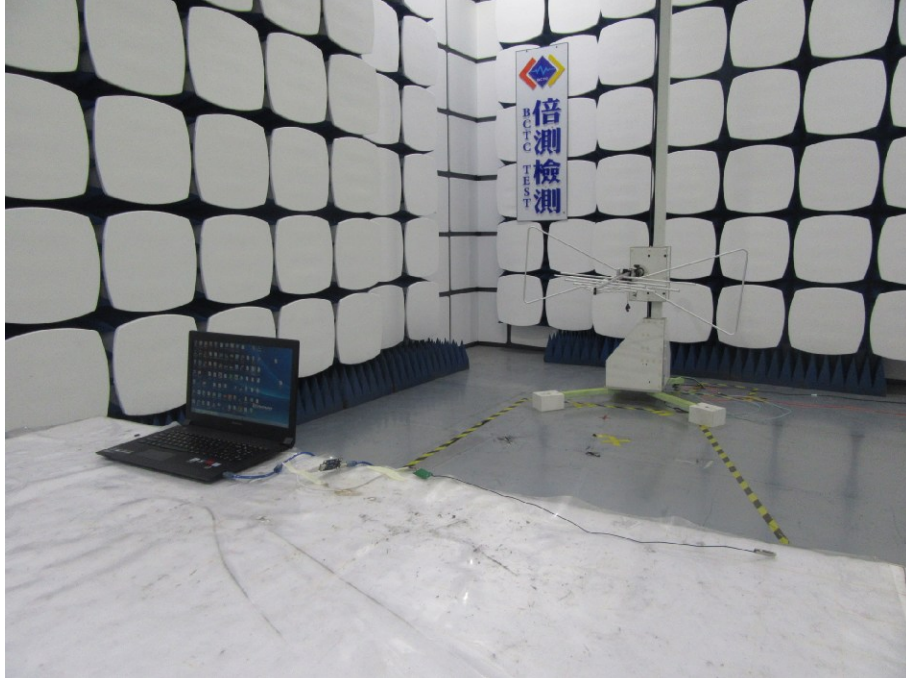

Radiated Measurement Photos

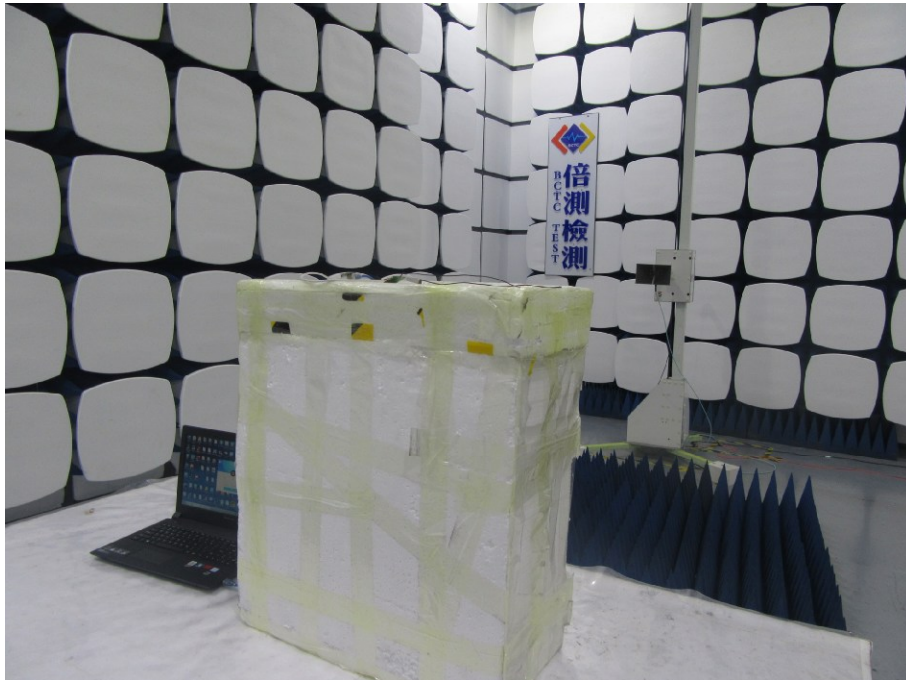

11. EUT PHOTO

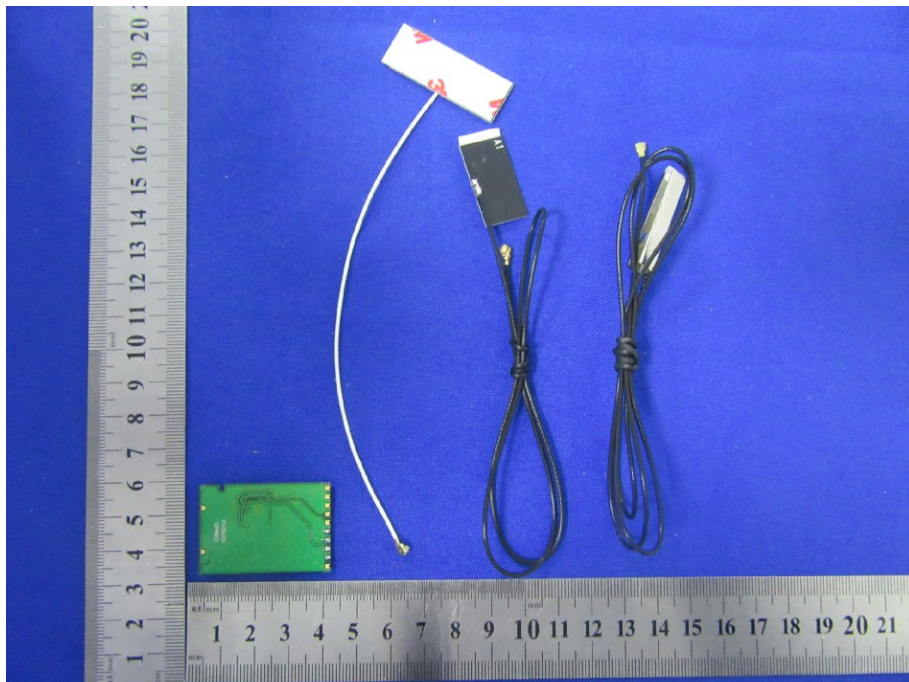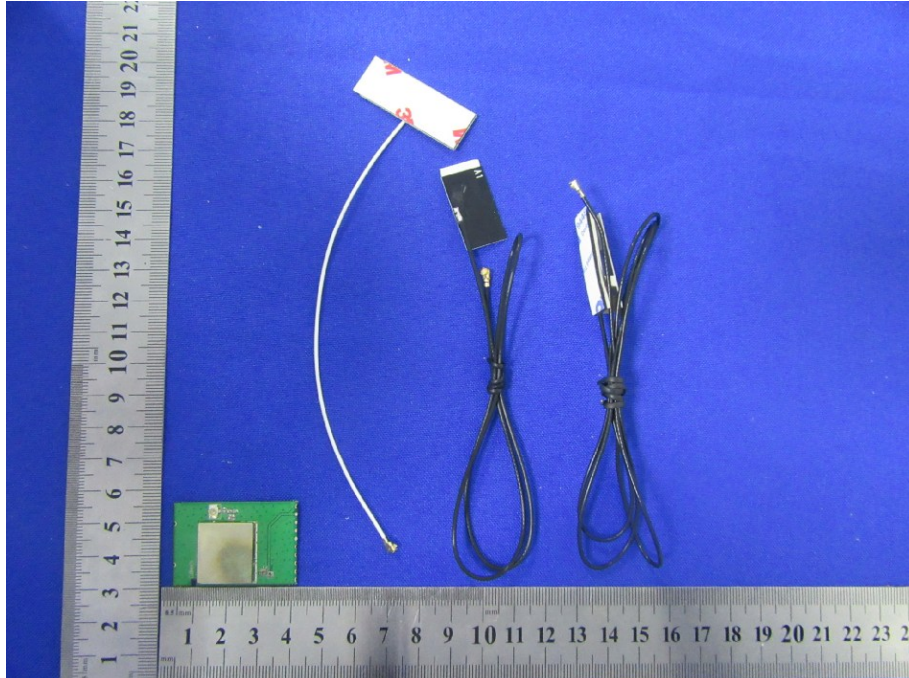

***** END OF REPORT *****