

FCC Part 15C Test Report

FCC ID:ROWCDW-9776010-00

Product Name:	WiFi Module
Trademark:	N/A
Model Name :	CDW-9776010-00
Prepared For :	CHINA DRAGON TECHNOLOGY LIMITED
Address :	B4 Bidg. haosan No.1 Industry Park, Shajing street, B, Shenzhen, China
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Feb. 23, 2019 to Mar. 04, 2019
Date of Report :	Mar. 04, 2019
Report No.:	BCTC-FY190200618E

TEST RESULT CERTIFICATION

Applicant's name CHINA DRAGON TECHNOLOGY LIMITED

Address B4 Bidg. haosan No.1 Industry Park, Shajing street, B, Shenzhen, China

Manufacture's Name CHINA DRAGON TECHNOLOGY LIMITED

Address B4 Bidg. haosan No.1 Industry Park, Shajing street, B, Shenzhen, China

Product description

Product name WiFi Module

Trademark N/A

Model and/or type CDW-9776010-00
reference

Standards FCC Part15.247
ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Leke Xie

Reviewer(Supervisor): Eric Yang

Approved(Manager): Zero Zhou



Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.1.2 TEST PROCEDURE	12
3.1.3 DEVIATION FROM TEST STANDARD	12
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	13
3.1.6 TEST RESULTS	14
3.2 RADIATED EMISSION MEASUREMENT	20
3.2.1 RADIATED EMISSION LIMITS	20
3.2.2 TEST PROCEDURE	20
3.2.3 DEVIATION FROM TEST STANDARD	21
3.2.4 TEST SETUP	21
3.2.5 EUT OPERATING CONDITIONS	22
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	23
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	24
3.2.8 TEST RESULTS (1GHZ~25GHZ)	30
3.3 RADIATED BAND EMISSION MEASUREMENT	34
3.3.1 TEST REQUIREMENT:	34
3.3.2 TEST PROCEDURE	34
3.3.3 DEVIATION FROM TEST STANDARD	35
3.3.4 TEST SETUP	35
3.3.5 EUT OPERATING CONDITIONS	35
4 . POWER SPECTRAL DENSITY TEST	37

Table of Contents	Page
4.1 APPLIED PROCEDURES / LIMIT	37
4.1.1 TEST PROCEDURE	37
4.1.2 DEVIATION FROM STANDARD	37
4.1.3 TEST SETUP	37
4.1.4 EUT OPERATION CONDITIONS	37
4.1.5 TEST RESULTS	38
5 . BANDWIDTH TEST	46
5.1 APPLIED PROCEDURES / LIMIT	46
5.1.1 TEST PROCEDURE	46
5.1.2 DEVIATION FROM STANDARD	46
5.1.3 TEST SETUP	46
5.1.4 EUT OPERATION CONDITIONS	46
5.1.5 TEST RESULTS	47
6 . PEAK OUTPUT POWER TEST	55
6.1 APPLIED PROCEDURES/LIMIT	55
6.1.1 TEST PROCEDURE	55
6.1.2 DEVIATION FROM STANDARD	55
6.1.3 TEST SETUP	55
6.1.4 EUT OPERATION CONDITIONS	55
6.1.5 TEST RESULTS	56
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	57
7.1 APPLICABLE STANDARD	57
7.2 TEST PROCEDURE	57
7.3 DEVIATION FROM STANDARD	57
7.4 TEST SETUP	57
7.5 EUT OPERATION CONDITIONS	57
7.6 TEST RESULT	57
8 . DUTY CYCLE OF TEST SIGNAL	66
8.1 STANDARD REQUIREMENT	66
8.2 FORMULA:	66
9 . ANTENNA REQUIREMENT	69
9.1 STANDARD REQUIREMENT	69
9.2 EUT ANTENNA	69



Table of Contents

	Page
10 . EUT TEST PHOTO	70
11 . EUT PHOTO	75
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (d)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.205	Restricted Band of Operation	PASS	
15.247 (d)	Band Edge (Out of Band Emissions)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

Test site MRA number: CN1212

IC Registered No.: 23583

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59℃
9	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
10	Radiated disturbance(1GHz-6GHz)	U=4.9dB
11	Radiated disturbance(1GHz-18GHz)	U=5.0dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	WiFi Module	
Trade Name	N/A	
Model Name	CDW-9776010-00	
Model Difference	N/A	
Product Description	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
	Modulation Type:	WIFI: OFDM/DSSS
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
	Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
	Antenna Designation:	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Ratings	DC 3.3V	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	RFFPA401520I MLB301	External antenna	3.32	
2	N/A	RFFPA281353I MLB301	External antenna	2.91	
3	N/A	RFMTA340758I MAB701	External antenna	3.52	

2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:


- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

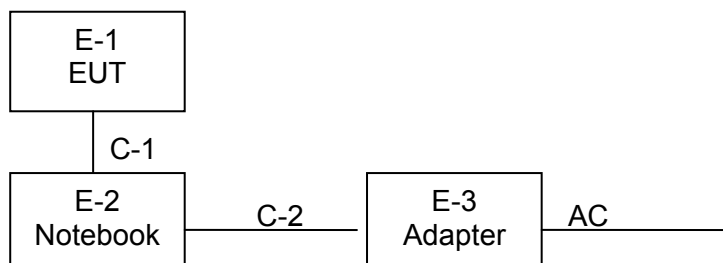

Radiated Spurious Emission



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	WiFi Module	N/A	CDW-9776010-00	N/A	EUT
E-2	Adapter	N/A	A0001	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.8M	USB cable unshielded
C-2	NO	NO	0.8M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	2018.06.20	2019.06.20
2	Test Receiver (9kHz-7GHz)	R&S	ESRP	101154	2018.06.20	2019.06.20
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBEC K	VULB9163	VULB9163-942	2018.06.23	2019.06.23
4	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	2018.06.23	2021.06.22
5	Horn Antenna (18GHz-40GHz)	SCHWARZBEC K	BBHA9170	822	2018.08.06	2019.08.06
6	Amplifier (9KHz-6GHz)	SCHWARZBEC K	BBV9744	9744-0037	2018.06.20	2019.06.20
7	Amplifier (0.5GHz-18GHz)	SCHWARZBEC K	BBV9718	9718-309	2018.06.20	2019.06.20
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-H G	2034381	2018.08.06	2019.08.06
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	2018.06.23	2019.06.23
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2019.02.12	2020.02.12
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	2018.03.27	2019.03.27
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	2018.06.19	2019.06.19
13	Power Metter	Keysight	E4419	\	2018.04.15	2019.04.15
14	Power Sensor (AV)	Keysight	E9300A	\	2018.04.15	2019.04.15
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	2018.07.11	2019.07.11
16	Test Receiver 9kHz-40GHz	R&S	FSP40	100550	2018.06.13	2019.06.12
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	2018.06.20	2019.06.20
2	LISN	SCHWARZBECK	NSLK8127	8127739	2018.06.19	2019.06.19
3	LISN	R&S	ENV216	101375	2018.06.20	2019.06.20
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	2019.02.12	2020.02.12
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

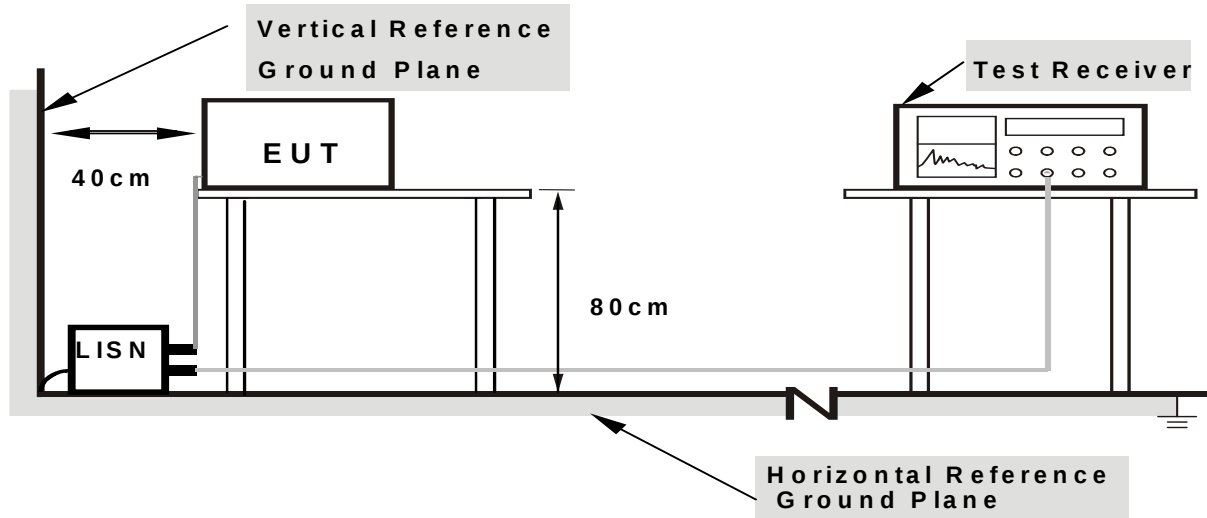

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC120V 60Hz	Test Mode :	Mode 5(ANT1)

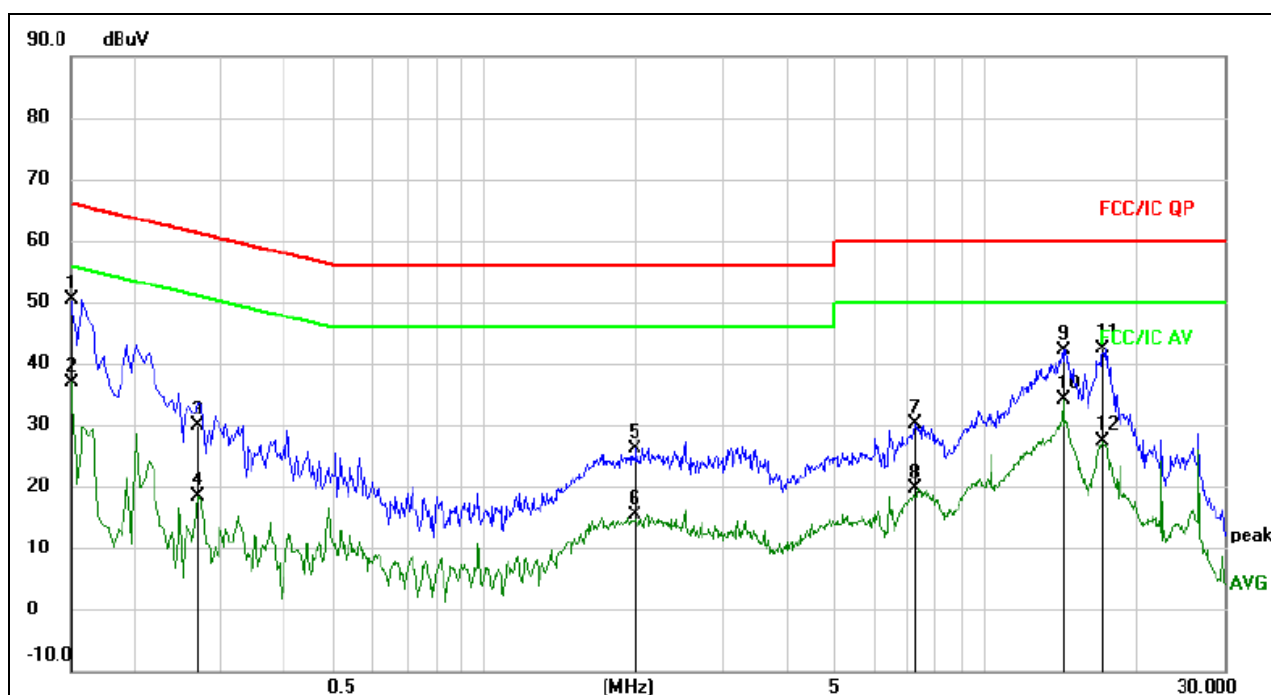


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	40.82	9.52	50.34	66.00	-15.66	QP	
2		0.1500	27.32	9.52	36.84	56.00	-19.16	AVG	
3		0.2700	20.30	9.54	29.84	61.12	-31.28	QP	
4		0.2700	8.79	9.54	18.33	51.12	-32.79	AVG	
5		2.0100	16.62	9.59	26.21	56.00	-29.79	QP	
6		2.0100	5.78	9.59	15.37	46.00	-30.63	AVG	
7		7.2140	20.34	9.72	30.06	60.00	-29.94	QP	
8		7.2140	9.97	9.72	19.69	50.00	-30.31	AVG	
9		14.3380	32.39	9.70	42.09	60.00	-17.91	QP	
10		14.3380	24.34	9.70	34.04	50.00	-15.96	AVG	
11		17.1340	32.57	9.74	42.31	60.00	-17.69	QP	
12		17.1340	17.64	9.74	27.38	50.00	-22.62	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC120V 60Hz	Test Mode :	Mode 5(ANT1)

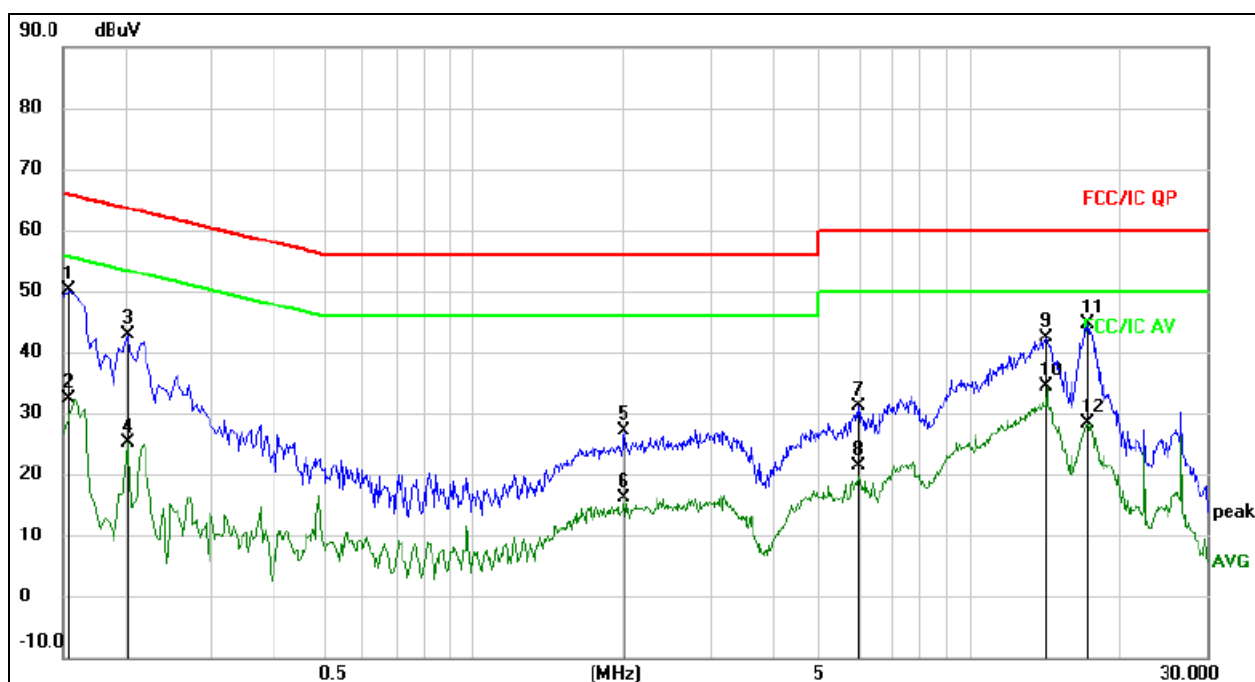


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	40.57	9.52	50.09	65.79	-15.70	QP	
2		0.1539	22.91	9.52	32.43	55.79	-23.36	AVG	
3		0.2020	33.52	9.46	42.98	63.53	-20.55	QP	
4		0.2020	15.72	9.46	25.18	53.53	-28.35	AVG	
5		2.0220	17.43	9.59	27.02	56.00	-28.98	QP	
6		2.0220	6.55	9.59	16.14	46.00	-29.86	AVG	
7		5.9859	21.31	9.76	31.07	60.00	-28.93	QP	
8		5.9859	11.70	9.76	21.46	50.00	-28.54	AVG	
9		14.2259	32.67	9.70	42.37	60.00	-17.63	QP	
10		14.2259	24.58	9.70	34.28	50.00	-15.72	AVG	
11	*	17.2059	34.91	9.74	44.65	60.00	-15.35	QP	
12		17.2059	18.66	9.74	28.40	50.00	-21.60	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC120V 60Hz	Test Mode :	Mode 5(ANT2)

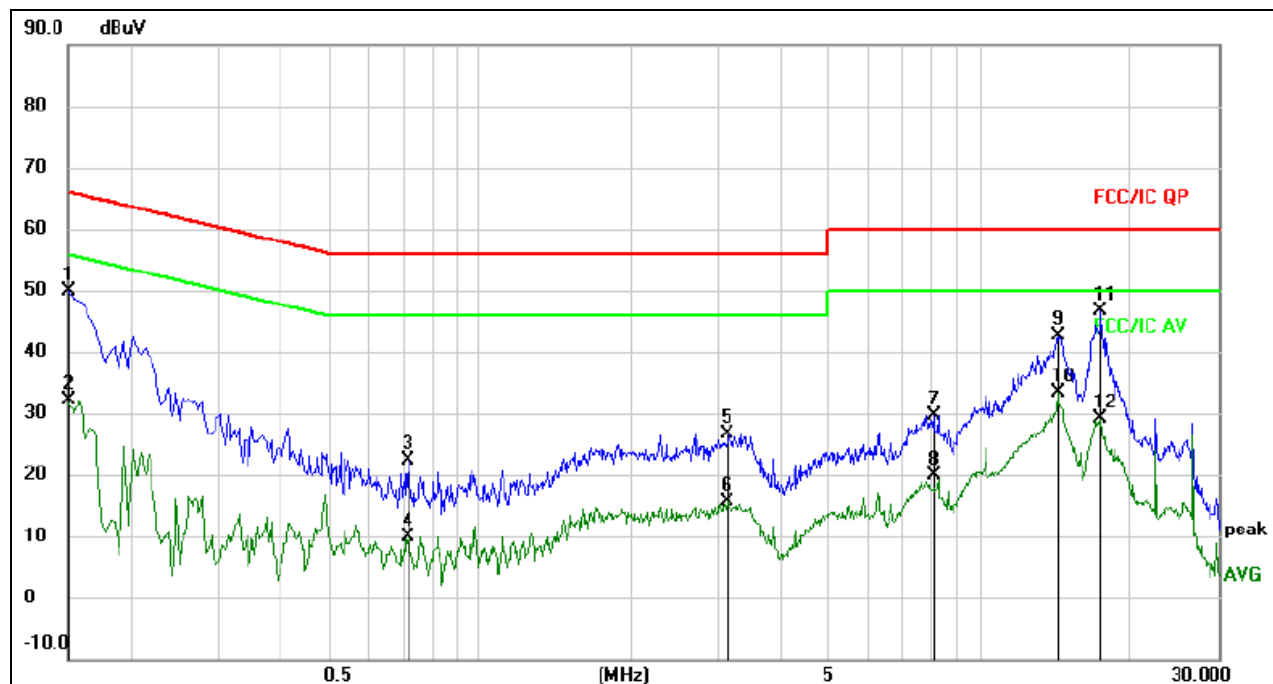


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	40.31	9.52	49.83	66.00	-16.17	QP	
2		0.1500	22.59	9.52	32.11	56.00	-23.89	AVG	
3		0.7180	12.80	9.65	22.45	56.00	-33.55	QP	
4		0.7180	0.23	9.65	9.88	46.00	-36.12	AVG	
5		3.1099	16.87	9.67	26.54	56.00	-29.46	QP	
6		3.1099	5.84	9.67	15.51	46.00	-30.49	AVG	
7		8.0819	19.97	9.71	29.68	60.00	-30.32	QP	
8		8.0819	10.13	9.71	19.84	50.00	-30.16	AVG	
9		14.3339	32.81	9.70	42.51	60.00	-17.49	QP	
10		14.3339	23.65	9.70	33.35	50.00	-16.65	AVG	
11	*	17.4139	36.84	9.74	46.58	60.00	-13.42	QP	
12		17.4139	19.28	9.74	29.02	50.00	-20.98	AVG	

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC120V 60Hz	Test Mode :	Mode 5(ANT2)

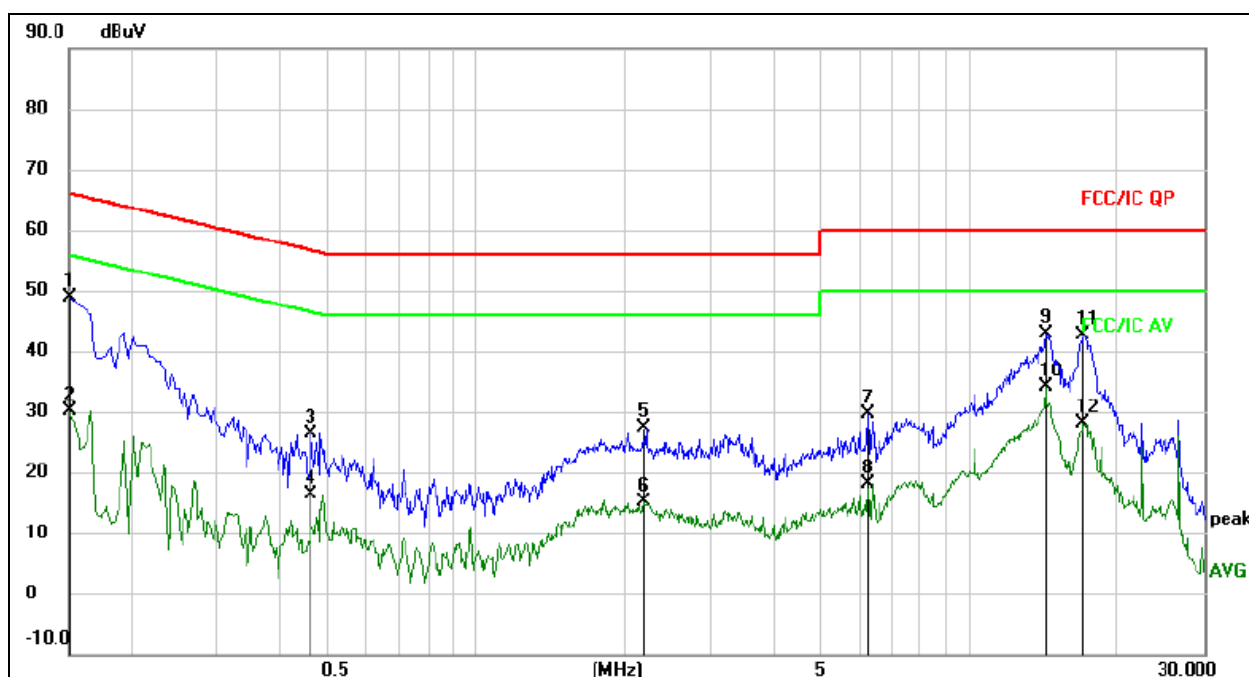


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	39.46	9.52	48.98	66.00	-17.02	QP	
2		0.1500	20.54	9.52	30.06	56.00	-25.94	AVG	
3		0.4660	16.80	9.56	26.36	56.58	-30.22	QP	
4		0.4660	6.94	9.56	16.50	46.58	-30.08	AVG	
5		2.1980	17.87	9.60	27.47	56.00	-28.53	QP	
6		2.1980	5.41	9.60	15.01	46.00	-30.99	AVG	
7		6.2300	19.94	9.75	29.69	60.00	-30.31	QP	
8		6.2300	8.43	9.75	18.18	50.00	-31.82	AVG	
9		14.3379	33.18	9.70	42.88	60.00	-17.12	QP	
10	*	14.3379	24.41	9.70	34.11	50.00	-15.89	AVG	
11		17.0900	32.90	9.74	42.64	60.00	-17.36	QP	
12		17.0900	18.27	9.74	28.01	50.00	-21.99	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC120V 60Hz	Test Mode :	Mode 5(ANT3)

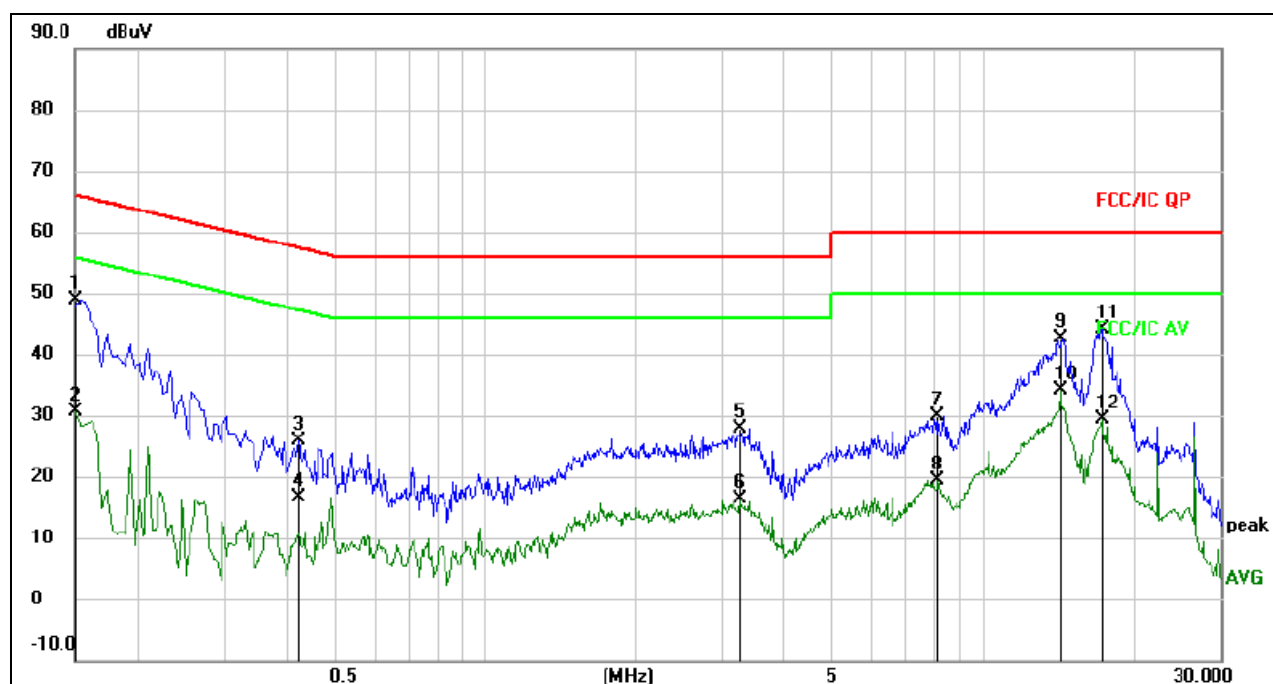


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	39.28	9.52	48.80	66.00	-17.20	QP	
2		0.1500	21.18	9.52	30.70	56.00	-25.30	AVG	
3		0.4220	16.35	9.52	25.87	57.41	-31.54	QP	
4		0.4220	7.16	9.52	16.68	47.41	-30.73	AVG	
5		3.2540	18.19	9.68	27.87	56.00	-28.13	QP	
6		3.2540	6.77	9.68	16.45	46.00	-29.55	AVG	
7		8.1300	20.13	9.71	29.84	60.00	-30.16	QP	
8		8.1300	9.60	9.71	19.31	50.00	-30.69	AVG	
9		14.3339	32.93	9.70	42.63	60.00	-17.37	QP	
10		14.3339	24.35	9.70	34.05	50.00	-15.95	AVG	
11	*	17.3139	34.41	9.74	44.15	60.00	-15.85	QP	
12		17.3139	19.74	9.74	29.48	50.00	-20.52	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC120V 60Hz	Test Mode :	Mode 5(ANT3)

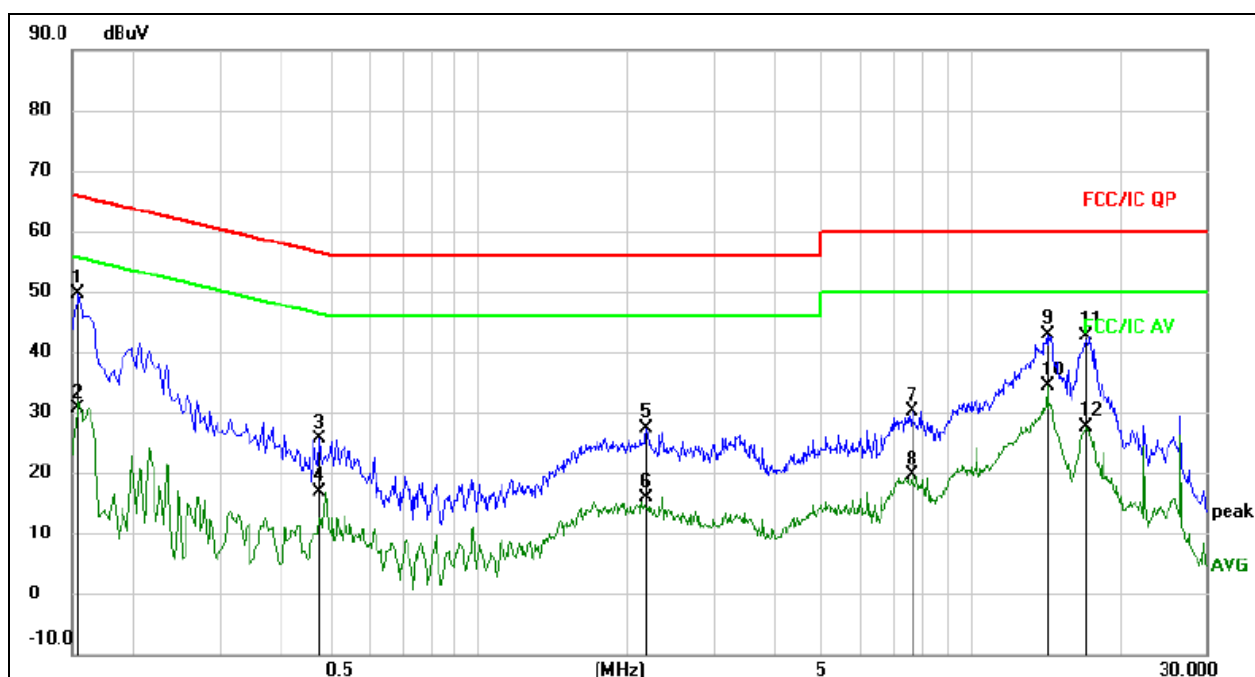

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	40.20	9.52	49.72	65.79	-16.07	QP	
2		0.1539	21.19	9.52	30.71	55.79	-25.08	AVG	
3		0.4780	15.97	9.57	25.54	56.37	-30.83	QP	
4		0.4780	7.19	9.57	16.76	46.37	-29.61	AVG	
5		2.1980	17.73	9.60	27.33	56.00	-28.67	QP	
6		2.1980	6.19	9.60	15.79	46.00	-30.21	AVG	
7		7.5819	20.38	9.71	30.09	60.00	-29.91	QP	
8		7.5819	9.80	9.71	19.51	50.00	-30.49	AVG	
9		14.3379	33.07	9.70	42.77	60.00	-17.23	QP	
10	*	14.3379	24.60	9.70	34.30	50.00	-15.70	AVG	
11		17.1779	32.85	9.74	42.59	60.00	-17.41	QP	
12		17.1779	17.87	9.74	27.61	50.00	-22.39	AVG	

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

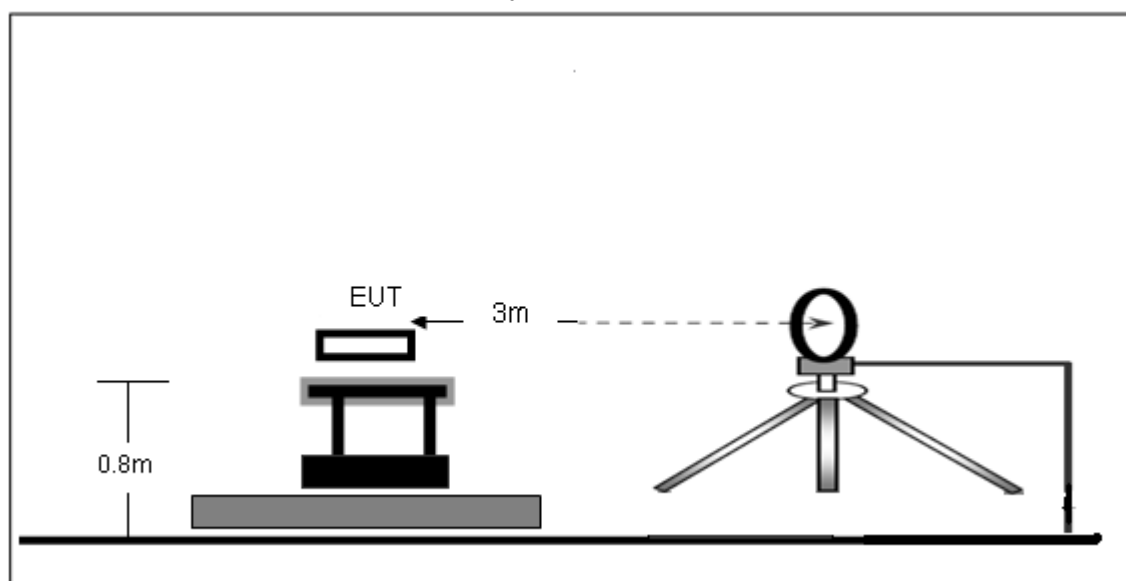

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

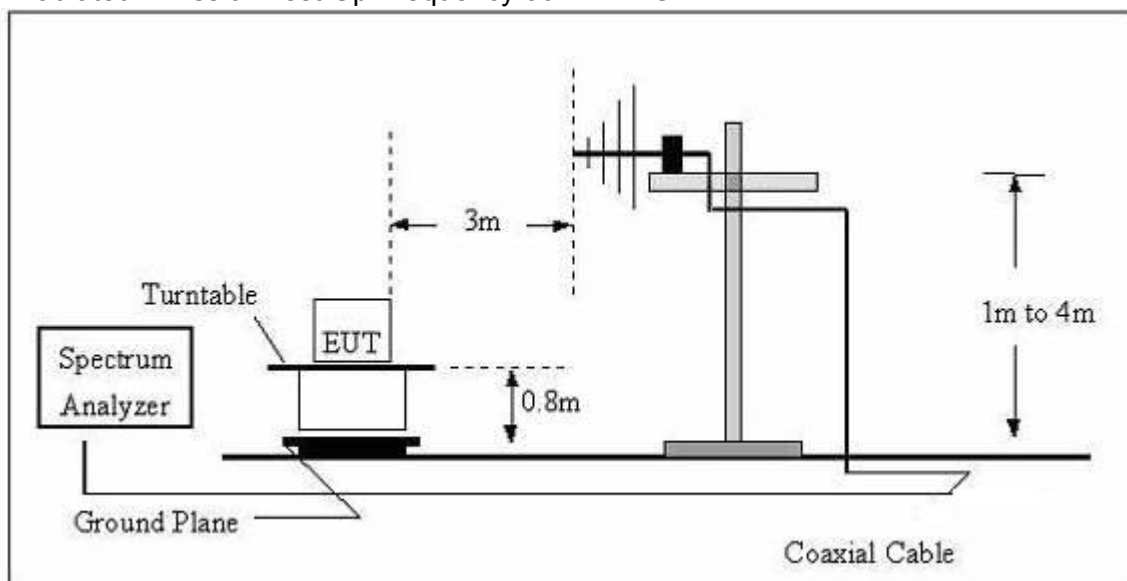

(C) Radiated Emission Test-Up Frequency Above 1GHz

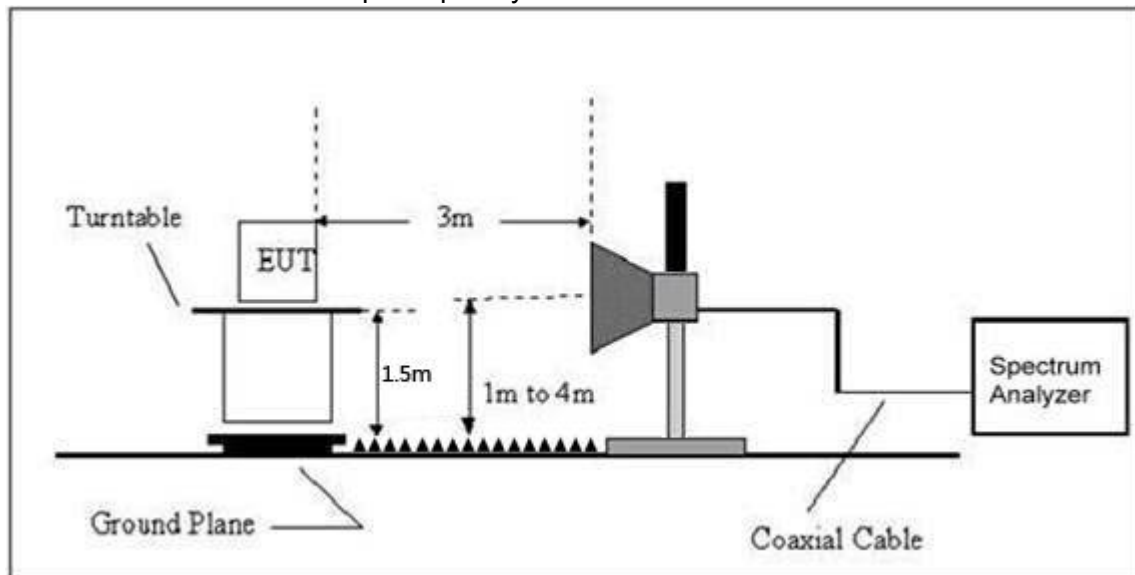

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 5V Form Notebook
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 5V Form Notebook		
Test Mode :	Mode 5(ANT1)		

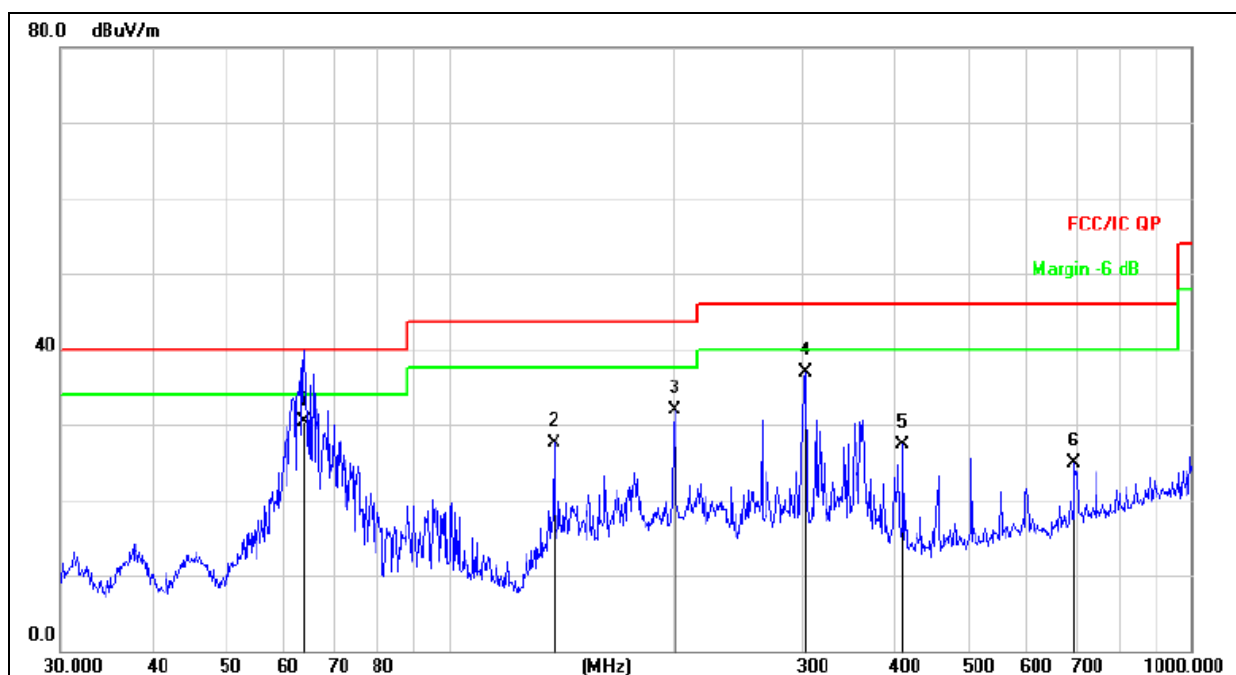


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		63.9588	47.04	-16.81	30.23	40.00	-9.77	QP
2		138.3873	46.19	-18.75	27.44	43.50	-16.06	QP
3		201.3930	48.08	-16.27	31.81	43.50	-11.69	QP
4	*	302.4812	50.38	-13.53	36.85	46.00	-9.15	QP
5		408.9460	38.16	-10.89	27.27	46.00	-18.73	QP
6		696.8567	30.19	-5.24	24.95	46.00	-21.05	QP

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	DC 5V Form Notebook		
Test Mode :	Mode 5(ANT1)		

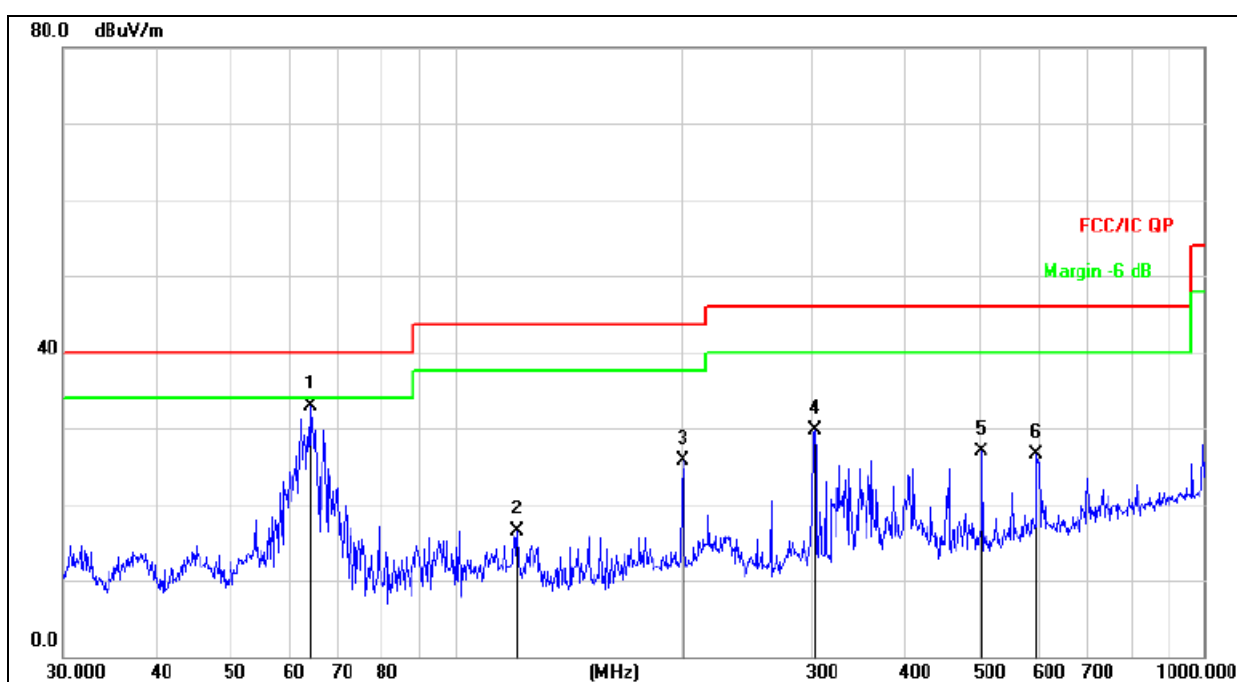


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	63.9828	49.67	-16.82	32.85	40.00	-7.15	QP
2		121.1231	34.20	-17.64	16.56	43.50	-26.94	QP
3		201.3930	42.02	-16.27	25.75	43.50	-17.75	QP
4		302.4812	43.16	-13.53	29.63	46.00	-16.37	QP
5		504.7062	35.70	-8.82	26.88	46.00	-19.12	QP
6		597.2234	33.02	-6.58	26.44	46.00	-19.56	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 5V Form Notebook		
Test Mode :	Mode 5(ANT2)		

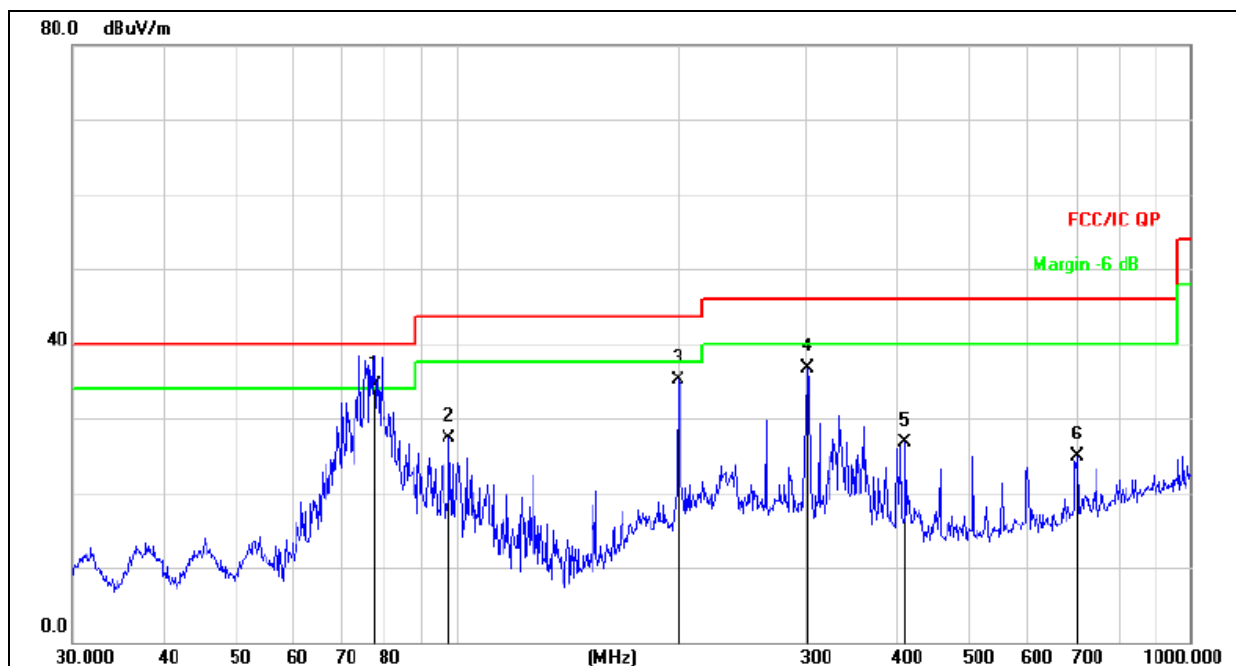


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	77.3212	54.09	-19.82	34.27	40.00	-5.73	QP
2		97.7983	43.93	-16.68	27.25	43.50	-16.25	QP
3		200.6881	51.33	-16.28	35.05	43.50	-8.45	QP
4		301.4224	50.27	-13.56	36.71	46.00	-9.29	QP
5		408.9460	37.55	-10.89	26.66	46.00	-19.34	QP
6		701.7610	29.93	-5.11	24.82	46.00	-21.18	QP

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	DC 5V Form Notebook		
Test Mode :	Mode 5(ANT2)		

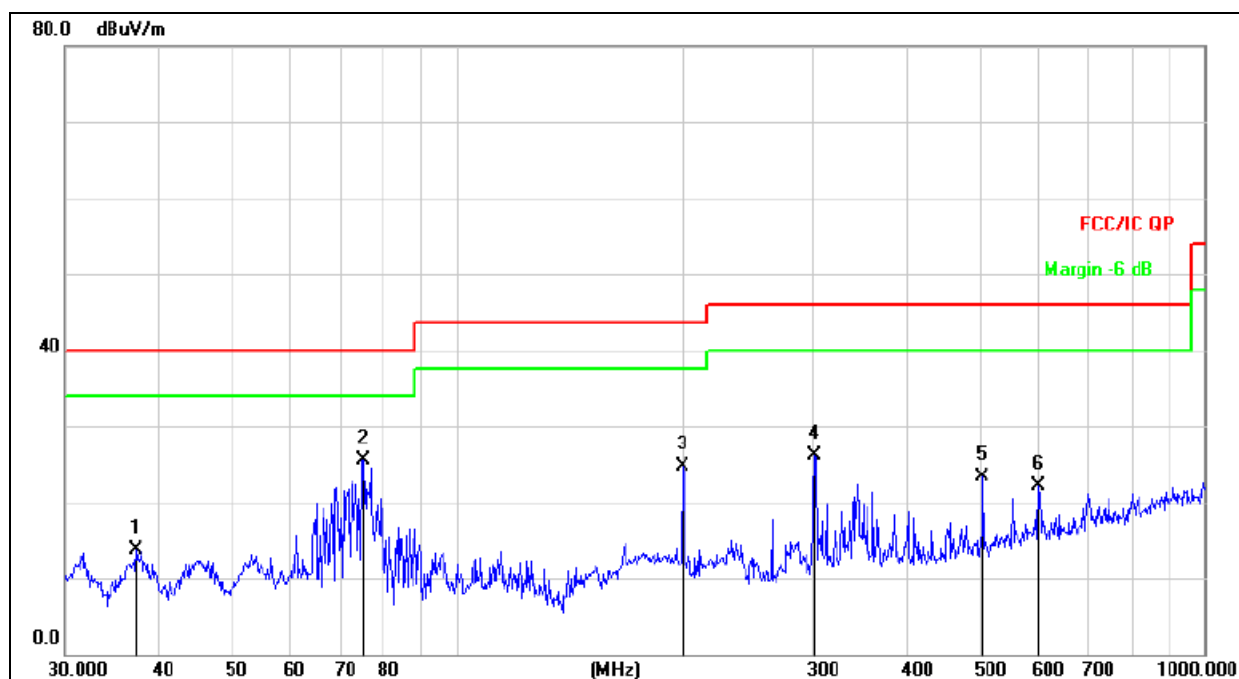


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		37.2855	29.53	-15.92	13.61	40.00	-26.39	QP
2	*	75.1822	44.94	-19.34	25.60	40.00	-14.40	QP
3		200.6881	41.06	-16.28	24.78	43.50	-18.72	QP
4		301.4224	39.61	-13.56	26.05	46.00	-19.95	QP
5		504.7062	32.05	-8.82	23.23	46.00	-22.77	QP
6		599.3212	28.61	-6.54	22.07	46.00	-23.93	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 5V Form Notebook		
Test Mode :	Mode 5(ANT3)		

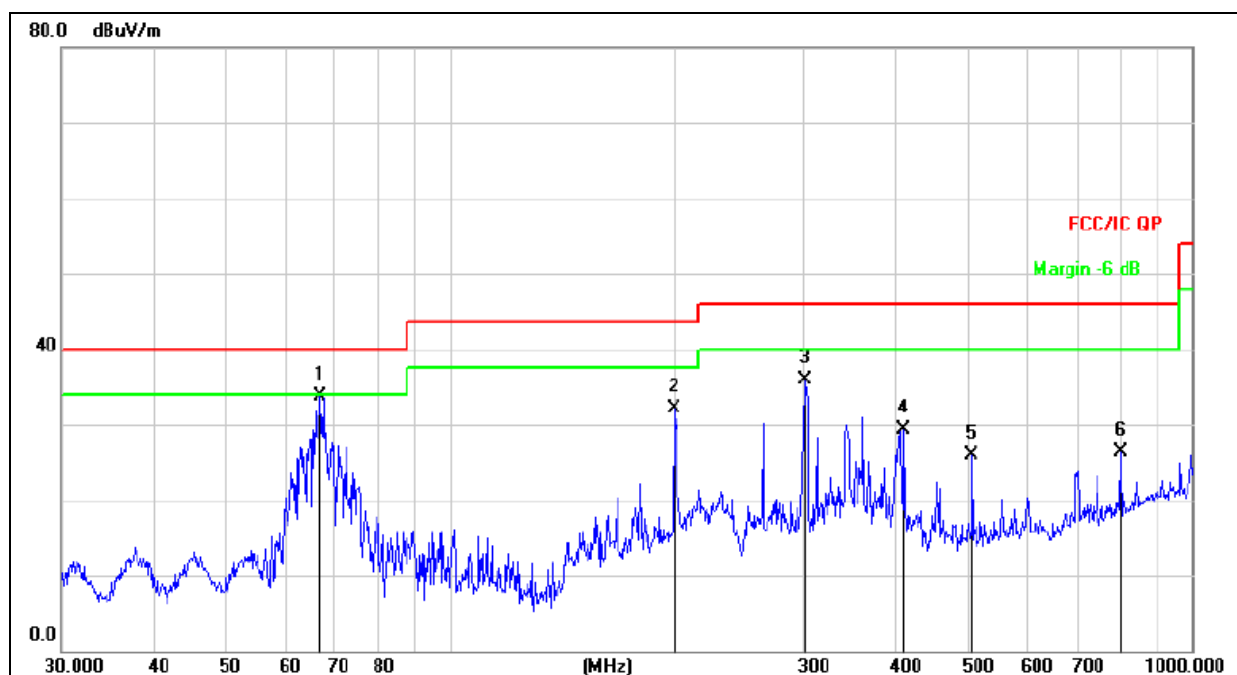


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	66.9669	51.20	-17.50	33.70	40.00	-6.30	QP
2		200.6881	48.35	-16.28	32.07	43.50	-11.43	QP
3		301.4224	49.51	-13.56	35.95	46.00	-10.05	QP
4		408.9460	40.11	-10.89	29.22	46.00	-16.78	QP
5		504.7062	34.68	-8.82	25.86	46.00	-20.14	QP
6		798.9797	29.90	-3.65	26.25	46.00	-19.75	QP



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	DC 5V Form Notebook		
Test Mode :	Mode 5(ANT3)		

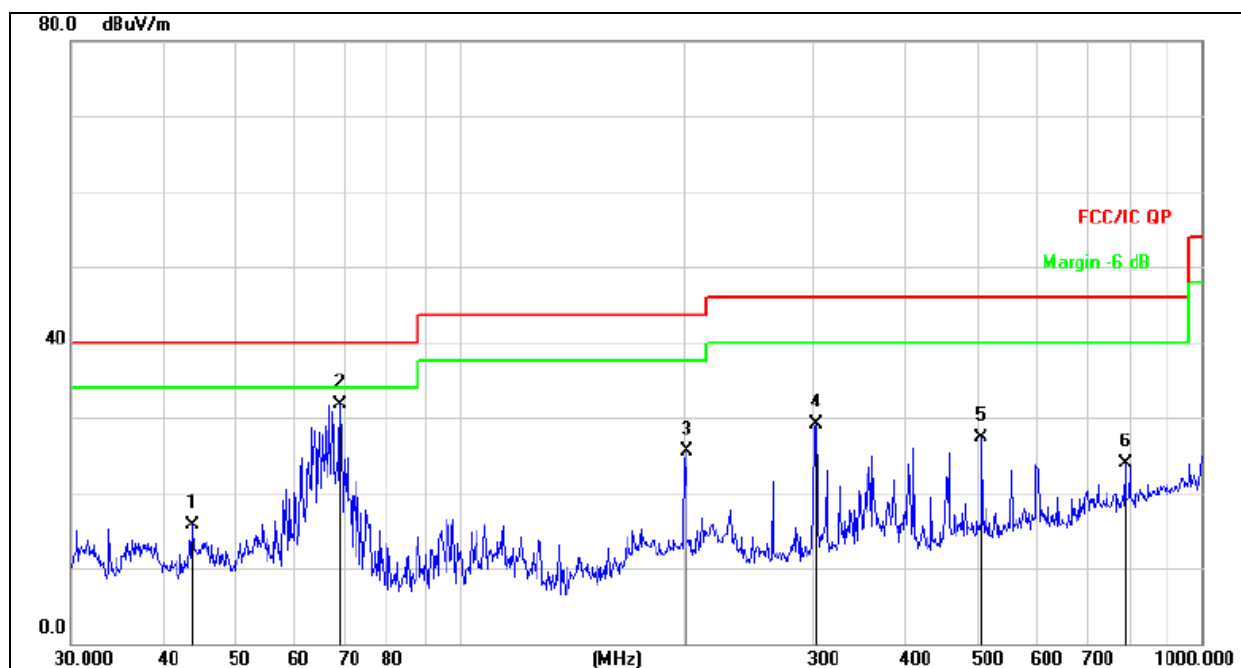

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		43.6584	30.88	-15.21	15.67	40.00	-24.33	QP
2	*	69.1141	49.78	-17.99	31.79	40.00	-8.21	QP
3		202.1005	41.68	-16.25	25.43	43.50	-18.07	QP
4		302.4812	42.57	-13.53	29.04	46.00	-16.96	QP
5		504.7062	36.21	-8.82	27.39	46.00	-18.61	QP
6		787.8513	27.63	-3.81	23.82	46.00	-22.18	QP

3.2.8 TEST RESULTS (1GHZ~25GHZ)

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	66.52	39.55	7.85	25.66	60.48	74.00	-13.52	PK
V	4824.00	51.24	39.55	7.85	25.66	45.20	54.00	-8.80	AV
V	7236.00	67.01	38.33	7.52	24.55	60.75	74.00	-13.25	PK
V	7236.00	49.37	38.33	7.52	24.55	43.11	54.00	-10.89	AV
V	15450.00	52.12	35.23	6.75	26.59	50.23	74.00	-23.77	PK
H	4824.00	65.96	39.55	7.85	25.66	59.92	74.00	-14.08	PK
H	4824.00	50.73	39.55	7.85	25.66	44.69	54.00	-9.31	AV
H	7236.00	66.93	38.33	7.52	23.55	59.67	74.00	-14.33	PK
H	7236.00	49.99	38.33	7.52	23.22	42.40	54.00	-11.60	AV
H	15450.00	53.11	35.45	6.75	27.88	52.29	74.00	-21.71	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	66.87	38.89	7.57	25.45	61.00	74.00	-13.00	Pk
V	4874.00	51.41	38.89	7.57	25.45	45.54	54.00	-8.46	AV
V	7311.00	66.99	38.78	7.35	24.78	60.34	74.00	-13.66	Pk
V	7311.00	48.90	38.78	7.35	24.78	42.25	54.00	-11.75	AV
V	15450.00	51.33	35.89	6.42	26.47	48.33	74.00	-25.67	Pk
H	4874.00	64.82	38.89	7.57	25.45	58.95	74.00	-15.05	Pk
H	4874.00	49.87	38.89	7.57	25.45	44.00	54.00	-10.00	AV
H	7311.00	66.75	38.78	7.35	24.78	60.10	74.00	-13.90	Pk
H	7311.00	48.98	38.78	7.35	24.78	42.33	54.00	-11.67	AV
H	15450.00	51.77	36.68	6.42	26.65	48.16	74.00	-25.84	Pk

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel: 2462MHz									
V	4924.00	65.90	38.75	7.46	25.45	60.06	74.00	-13.94	PK
V	4924.00	50.82	38.75	7.46	25.45	44.98	54.00	-9.02	AV
V	7386.00	67.79	38.65	7.22	24.78	61.14	74.00	-12.86	PK
V	7386.00	49.58	38.65	7.22	24.78	42.93	54.00	-11.07	AV
V	15450.00	52.82	35.58	6.35	26.47	50.06	74.00	-23.94	PK
H	4924.00	63.99	38.75	7.46	25.45	58.15	74.00	-15.85	PK
H	4924.00	48.84	38.75	7.46	25.45	43.00	54.00	-11.00	AV
H	7386.00	65.70	38.65	7.22	24.78	59.05	74.00	-14.95	PK
H	7386.00	48.31	38.65	7.22	24.78	41.66	54.00	-12.34	AV
H	15450.00	50.36	36.42	6.32	26.65	46.91	74.00	-27.09	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. All the ANT have test, only the worst case reported.

802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	66.79	39.55	7.85	25.66	60.75	74.00	-13.25	PK
V	4824.00	50.67	39.55	7.85	25.66	44.63	54.00	-9.37	AV
V	7236.00	67.10	38.33	7.52	24.55	60.84	74.00	-13.16	PK
V	7236.00	50.03	38.33	7.52	24.55	43.77	54.00	-10.23	AV
V	15450.00	53.30	35.23	6.75	26.59	51.41	74.00	-22.59	PK
H	4824.00	65.29	39.55	7.85	25.66	59.25	74.00	-14.75	PK
H	4824.00	48.61	39.55	7.85	25.66	42.57	54.00	-11.43	AV
H	7236.00	66.00	38.33	7.52	23.55	58.74	74.00	-15.26	PK
H	7236.00	48.33	38.33	7.52	23.22	40.74	54.00	-13.26	AV
H	15450.00	50.99	35.45	6.75	27.88	50.17	74.00	-23.83	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	68.23	38.89	7.57	25.45	62.36	74.00	-11.64	PK
V	4874.00	49.64	38.89	7.57	25.45	43.77	54.00	-10.23	AV
V	7311.00	68.17	38.78	7.35	24.78	61.52	74.00	-12.48	PK
V	7311.00	49.01	38.78	7.35	24.78	42.36	54.00	-11.64	AV
V	15450.00	51.82	35.89	6.42	26.47	48.82	74.00	-25.18	PK
H	4874.00	64.61	38.89	7.57	25.45	58.74	74.00	-15.26	PK
H	4874.00	49.01	38.89	7.57	25.45	43.14	54.00	-10.86	AV
H	7311.00	66.49	38.78	7.35	24.78	59.84	74.00	-14.16	PK
H	7311.00	47.84	38.78	7.35	24.78	41.19	54.00	-12.81	AV
H	15450.00	52.30	36.68	6.42	26.65	48.69	74.00	-25.31	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel: 2462MHz									
V	4924.00	69.45	38.75	7.46	25.45	63.61	74.00	-10.39	PK
V	4924.00	50.99	38.75	7.46	25.45	45.15	54.00	-8.85	AV
V	7386.00	67.94	38.65	7.22	24.78	61.29	74.00	-12.71	PK
V	7386.00	48.95	38.65	7.22	24.78	42.30	54.00	-11.70	AV
V	15450.00	53.34	35.58	6.35	26.47	50.58	74.00	-23.42	PK
H	4924.00	64.09	38.75	7.46	25.45	58.25	74.00	-15.75	PK
H	4924.00	49.91	38.75	7.46	25.45	44.07	54.00	-9.93	AV
H	7386.00	66.26	38.65	7.22	24.78	59.61	74.00	-14.39	PK
H	7386.00	47.61	38.65	7.22	24.78	40.96	54.00	-13.04	AV
H	15450.00	50.92	36.42	6.32	26.65	47.47	74.00	-26.53	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. All the ANT have test, only the worst case reported.

802.11n(20MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	68.98	39.55	7.85	25.66	62.94	74.00	-11.06	PK
V	4824.00	52.29	39.55	7.85	25.66	46.25	54.00	-7.75	AV
V	7236.00	68.75	38.33	7.52	24.55	62.49	74.00	-11.51	PK
V	7236.00	47.70	38.33	7.52	24.55	41.44	54.00	-12.56	AV
V	15450.00	53.36	35.23	6.75	26.59	51.47	74.00	-22.53	PK
H	4824.00	64.39	39.55	7.85	25.66	58.35	74.00	-15.65	PK
H	4824.00	49.84	39.55	7.85	25.66	43.80	54.00	-10.20	AV
H	7236.00	65.46	38.33	7.52	23.55	58.20	74.00	-15.80	PK
H	7236.00	46.24	38.33	7.52	23.22	38.65	54.00	-15.35	AV
H	15450.00	50.50	35.45	6.75	27.88	49.68	74.00	-24.32	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	68.81	38.89	7.57	25.45	62.94	74.00	-11.06	PK
V	4874.00	50.80	38.89	7.57	25.45	44.93	54.00	-9.07	AV
V	7311.00	69.07	38.78	7.35	24.78	62.42	74.00	-11.58	PK
V	7311.00	48.08	38.78	7.35	24.78	41.43	54.00	-12.57	AV
V	15450.00	53.41	35.89	6.42	26.47	50.41	74.00	-23.59	PK
H	4874.00	63.82	38.89	7.57	25.45	57.95	74.00	-16.05	PK
H	4874.00	49.75	38.89	7.57	25.45	43.88	54.00	-10.12	AV
H	7311.00	65.61	38.78	7.35	24.78	58.96	74.00	-15.04	PK
H	7311.00	46.88	38.78	7.35	24.78	40.23	54.00	-13.77	AV
H	15450.00	50.13	36.68	6.42	26.65	46.52	74.00	-27.48	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel: 2462MHz									
V	4924.00	68.17	38.75	7.46	25.45	62.33	74.00	-11.67	PK
V	4924.00	50.58	38.75	7.46	25.45	44.74	54.00	-9.26	AV
V	7386.00	69.27	38.65	7.22	24.78	62.62	74.00	-11.38	PK
V	7386.00	49.14	38.65	7.22	24.78	42.49	54.00	-11.51	AV
V	15450.00	54.31	35.58	6.35	26.47	51.55	74.00	-22.45	PK
H	4924.00	63.01	38.75	7.46	25.45	57.17	74.00	-16.83	PK
H	4924.00	50.29	38.75	7.46	25.45	44.45	54.00	-9.55	AV
H	7386.00	65.73	38.65	7.22	24.78	59.08	74.00	-14.92	PK
H	7386.00	45.74	38.65	7.22	24.78	39.09	54.00	-14.91	AV
H	15450.00	49.18	36.42	6.32	26.65	45.73	74.00	-28.27	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. All the ANT have test, only the worst case reported.

802.11n(40MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2422MHz									
V	4844.00	67.93	39.55	7.77	25.66	61.81	74.00	-12.19	Pk
V	4844.00	49.89	39.55	7.77	25.66	43.77	54.00	-10.23	AV
V	7266.00	70.75	38.33	7.3	24.55	64.27	74.00	-9.73	Pk
V	7266.00	50.07	38.33	7.3	24.55	43.59	54.00	-10.41	AV
V	15450.00	55.81	35.23	6.6	26.59	53.77	74.00	-20.23	Pk
H	4844.00	62.41	39.55	7.77	25.66	56.29	74.00	-17.71	Pk
H	4844.00	50.20	39.55	7.77	25.66	44.08	54.00	-9.92	AV
H	7266.00	65.79	38.33	7.3	23.55	58.31	74.00	-15.69	Pk
H	7266.00	47.32	38.33	7.3	23.22	39.51	54.00	-14.49	AV
H	15450.00	50.63	35.45	6.6	27.88	49.66	74.00	-24.34	Pk

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	68.47	38.89	7.57	25.45	62.60	74.00	-11.40	PK
V	4874.00	51.12	38.89	7.57	25.45	45.25	54.00	-8.75	AV
V	7311.00	71.42	38.78	7.35	24.78	64.77	74.00	-9.23	PK
V	7311.00	49.17	38.78	7.35	24.78	42.52	54.00	-11.48	AV
V	15450.00	56.20	35.89	6.42	26.47	53.20	74.00	-20.80	PK
H	4874.00	61.32	38.89	7.57	25.45	55.45	74.00	-18.55	PK
H	4874.00	49.81	38.89	7.57	25.45	43.94	54.00	-10.06	AV
H	7311.00	65.97	38.78	7.35	24.78	59.32	74.00	-14.68	PK
H	7311.00	47.43	38.78	7.35	24.78	40.78	54.00	-13.22	AV
H	15450.00	49.38	36.68	6.42	26.65	45.77	74.00	-28.23	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel: 2452MHz									
V	4904.00	67.10	38.75	7.38	25.45	61.18	74.00	-12.82	PK
V	4904.00	51.44	38.75	7.38	25.45	45.52	54.00	-8.48	AV
V	7356.00	71.05	38.65	7.15	24.78	64.33	74.00	-9.67	PK
V	7356.00	49.42	38.65	7.15	24.78	42.70	54.00	-11.30	AV
V	15450.00	57.19	35.58	6.25	26.47	54.33	74.00	-19.67	PK
H	4904.00	62.89	38.75	7.38	25.45	56.97	74.00	-17.03	PK
H	4904.00	49.01	38.75	7.38	25.45	43.09	54.00	-10.91	AV
H	7356.00	65.03	38.65	7.15	24.78	58.31	74.00	-15.69	PK
H	7356.00	46.50	38.65	7.15	24.78	39.78	54.00	-14.22	AV
H	15450.00	47.99	36.42	6.25	26.65	44.47	74.00	-29.53	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. All the ANT have test, only the worst case reported.

3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

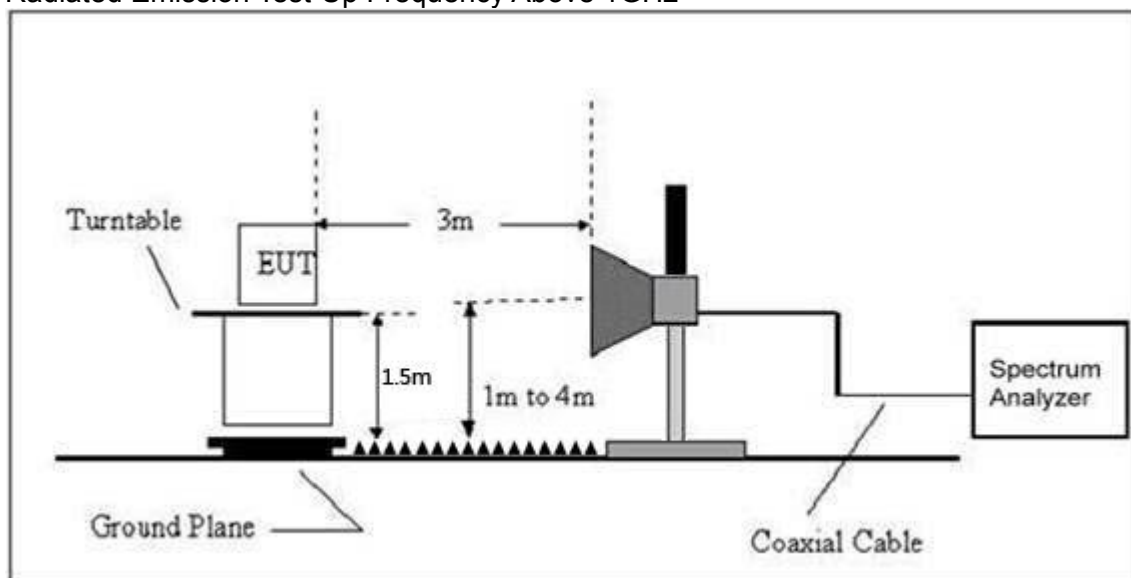

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result	
							PK	PK	AV		
802.11b	Low Channel 2412MHz										
	H	2390.00	60.41	38.06	7.42	20.15	49.92	74.00	54.00	PASS	
	H	2400.00	54.96	38.06	7.42	20.15	44.47	74.00	54.00	PASS	
	V	2390.00	63.77	38.06	7.42	20.15	53.28	74.00	54.00	PASS	
	V	2400.00	53.06	38.06	7.42	20.15	42.57	74.00	54.00	PASS	
	High Channel 2462MHz										
	H	2483.50	63.90	38.17	7.45	20.54	53.72	74.00	54.00	PASS	
	H	2485.50	51.99	38.17	7.45	20.54	41.81	74.00	54.00	PASS	
	V	2483.50	61.95	38.2	7.45	20.54	51.74	74.00	54.00	PASS	
	V	2485.50	53.30	38.2	7.45	20.54	43.09	74.00	54.00	PASS	
	802.11g	Low Channel 2412MHz									
		H	2390.00	62.61	38.06	7.42	20.15	52.12	74.00	54.00	PASS
H		2400.00	52.23	38.06	7.42	20.15	41.74	74.00	54.00	PASS	
V		2390.00	62.37	38.06	7.42	20.15	51.88	74.00	54.00	PASS	
V		2400.00	51.97	38.06	7.42	20.15	41.48	74.00	54.00	PASS	
High Channel 2462MHz											
H		2483.50	62.12	38.17	7.45	20.54	51.94	74.00	54.00	PASS	
H		2485.50	52.79	38.17	7.45	20.54	42.61	74.00	54.00	PASS	
V		2483.50	60.00	38.2	7.45	20.54	49.79	74.00	54.00	PASS	
V		2485.50	54.30	38.2	7.45	20.54	44.09	74.00	54.00	PASS	
802.11n20		Low Channel 2412MHz									
		H	2390.00	60.06	38.06	7.42	20.15	49.57	74.00	54.00	PASS
	H	2400.00	54.55	38.06	7.42	20.15	44.06	74.00	54.00	PASS	
	V	2390.00	64.38	38.06	7.42	20.15	53.89	74.00	54.00	PASS	
	V	2400.00	52.87	38.06	7.42	20.15	42.38	74.00	54.00	PASS	
	High Channel 2462MHz										
	H	2483.50	60.66	38.17	7.45	20.54	50.48	74.00	54.00	PASS	
	H	2485.50	52.73	38.17	7.45	20.54	42.55	74.00	54.00	PASS	
	V	2483.50	60.28	38.2	7.45	20.54	50.07	74.00	54.00	PASS	
	V	2485.50	53.50	38.2	7.45	20.54	43.29	74.00	54.00	PASS	
	802.11n40	Low Channel 2422MHz									
		H	2390.00	63.86	38.06	7.42	20.15	53.37	74.00	54.00	PASS
H		2400.00	54.34	38.06	7.42	20.15	43.85	74.00	54.00	PASS	
V		2390.00	59.69	38.06	7.42	20.15	49.20	74.00	54.00	PASS	
V		2400.00	54.64	38.06	7.42	20.15	44.15	74.00	54.00	PASS	
High Channel 2452MHz											
H		2483.50	61.66	38.17	7.45	20.54	51.48	74.00	54.00	PASS	
H		2485.50	54.78	38.17	7.45	20.54	44.60	74.00	54.00	PASS	
V		2483.50	60.13	38.2	7.45	20.54	49.92	74.00	54.00	PASS	
V		2485.50	51.88	38.2	7.45	20.54	41.67	74.00	54.00	PASS	
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.											
* is stand for AV measured.											

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

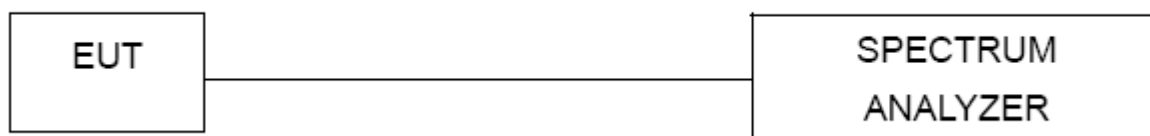

4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

4.1.5 TEST RESULTS


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V Form Notebook
Test Mode :	TX b Mode		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-1.761	8	PASS
2437 MHz	3.449	8	PASS
2462 MHz	-3.368	8	PASS

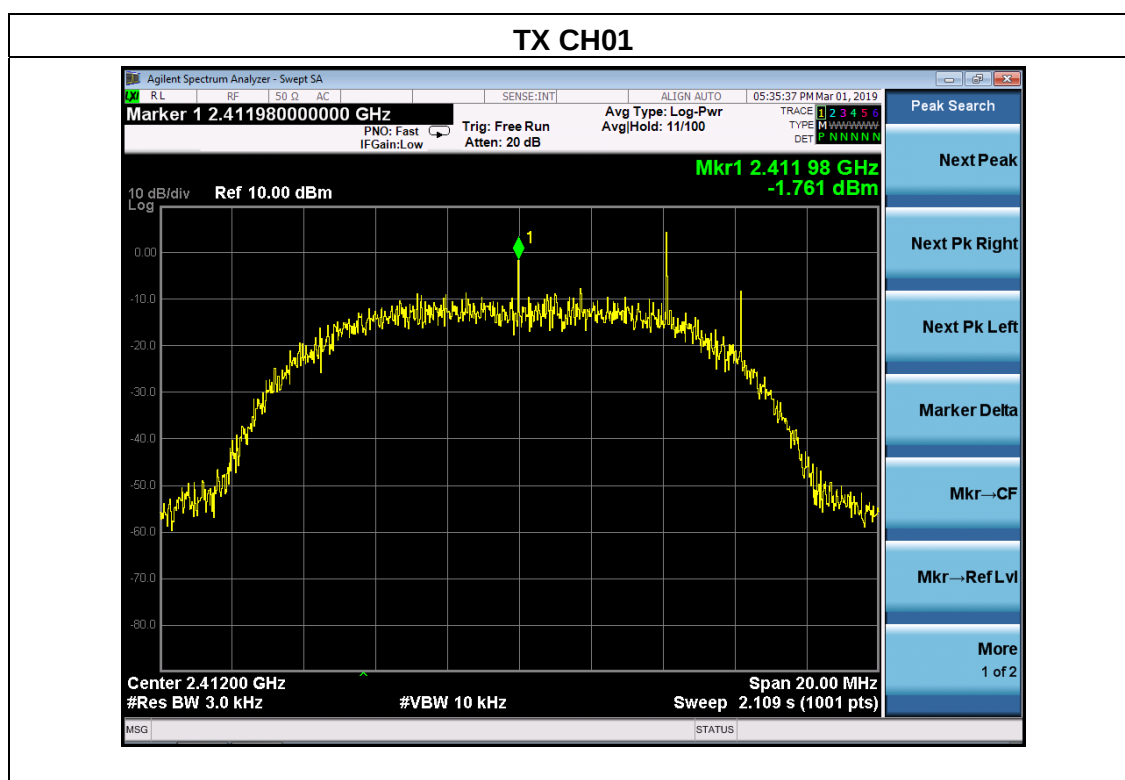




TX CH06

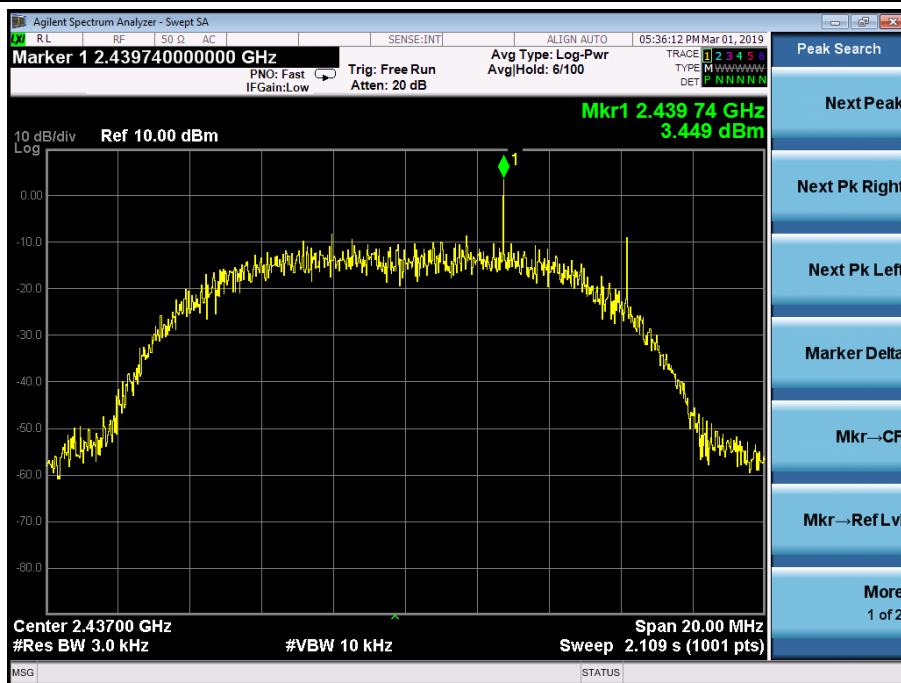


TX CH11

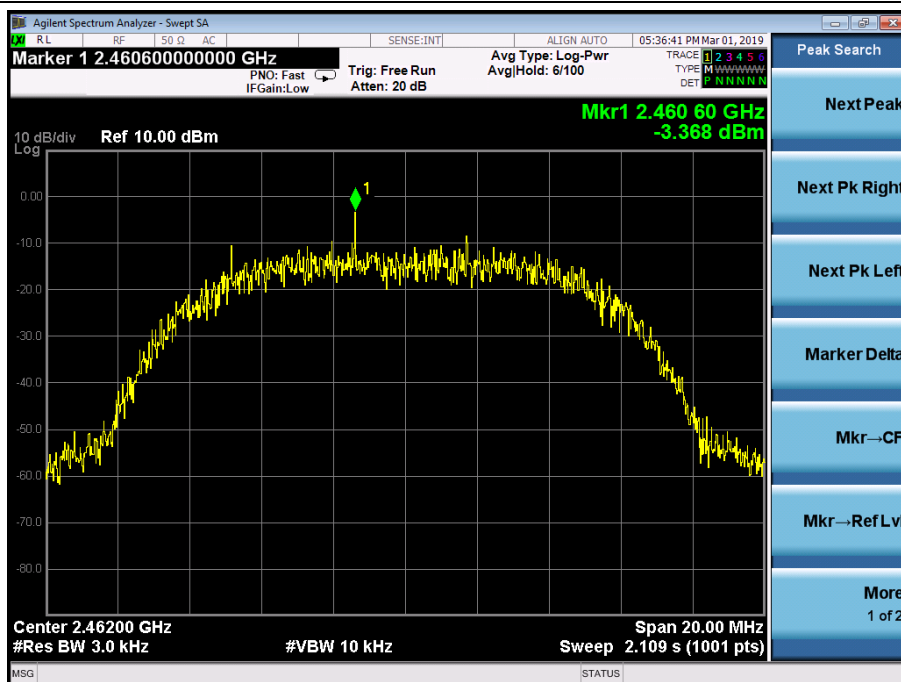


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V Form Notebook
Test Mode :	TX g Mode		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-12.509	8	PASS
2437 MHz	-14.509	8	PASS
2462 MHz	-15.200	8	PASS

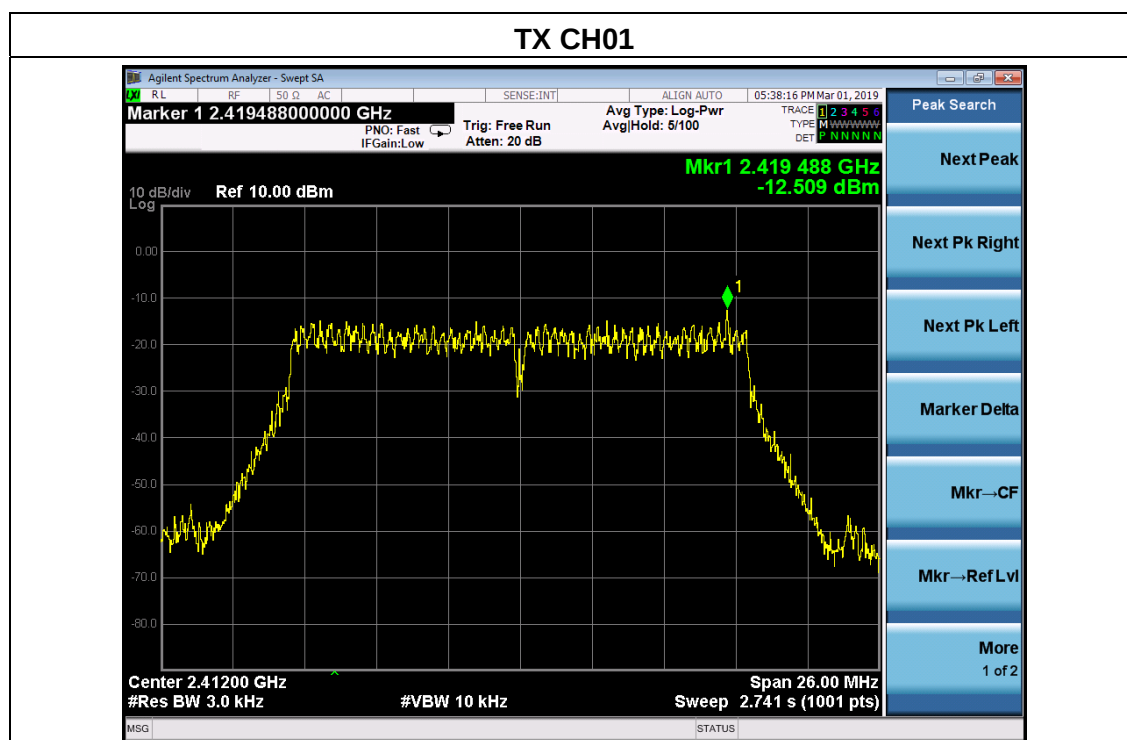




TX CH06

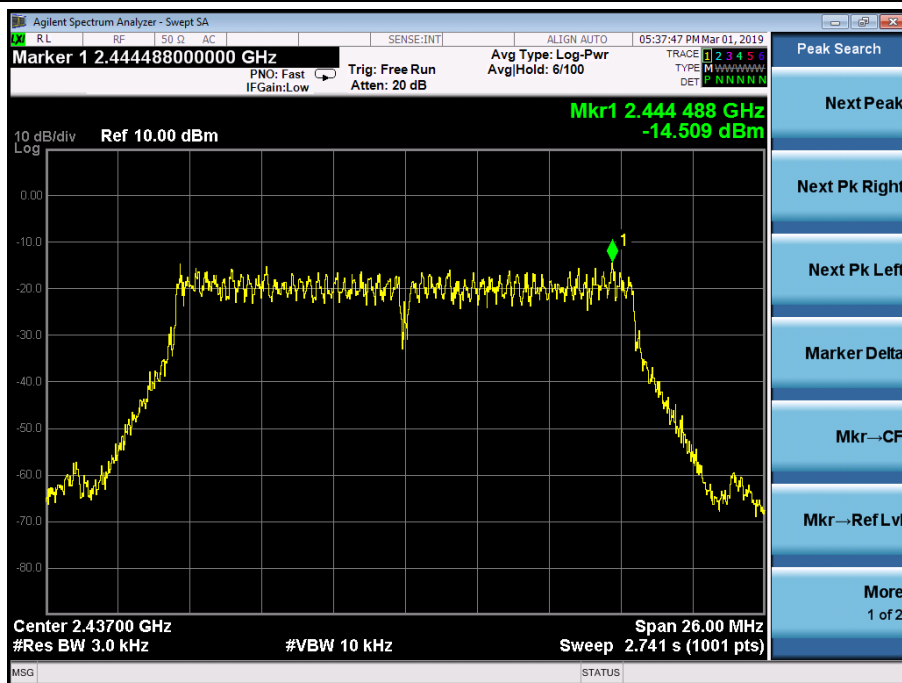


TX CH11

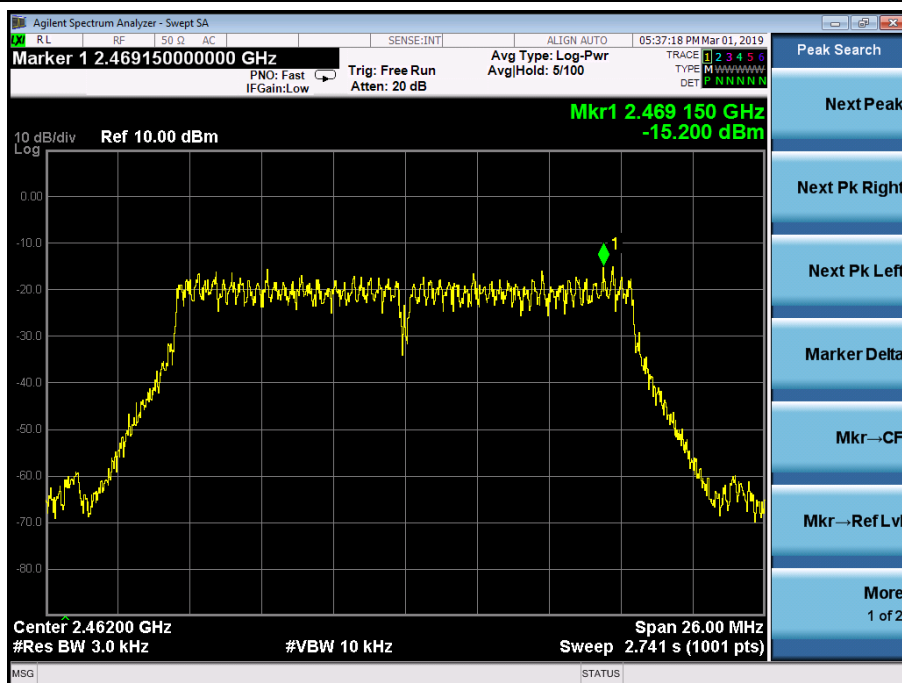


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V Form Notebook
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-13.841	8	PASS
2437 MHz	-15.308	8	PASS
2462 MHz	-14.703	8	PASS

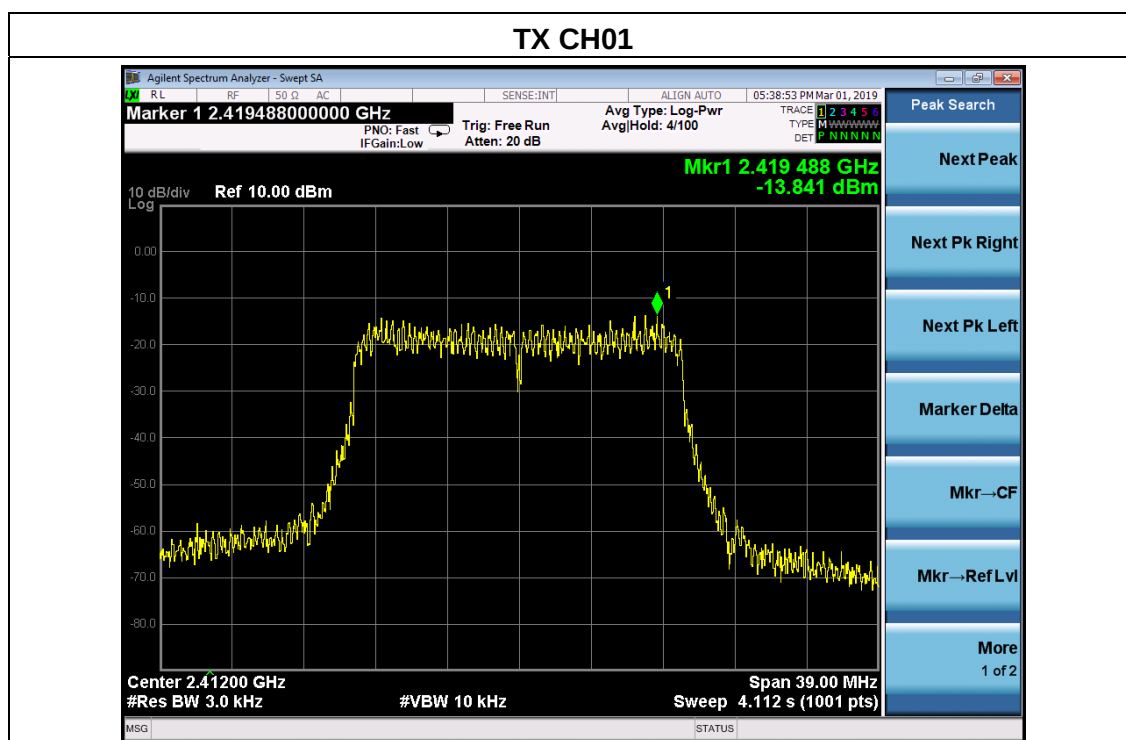




TX CH06

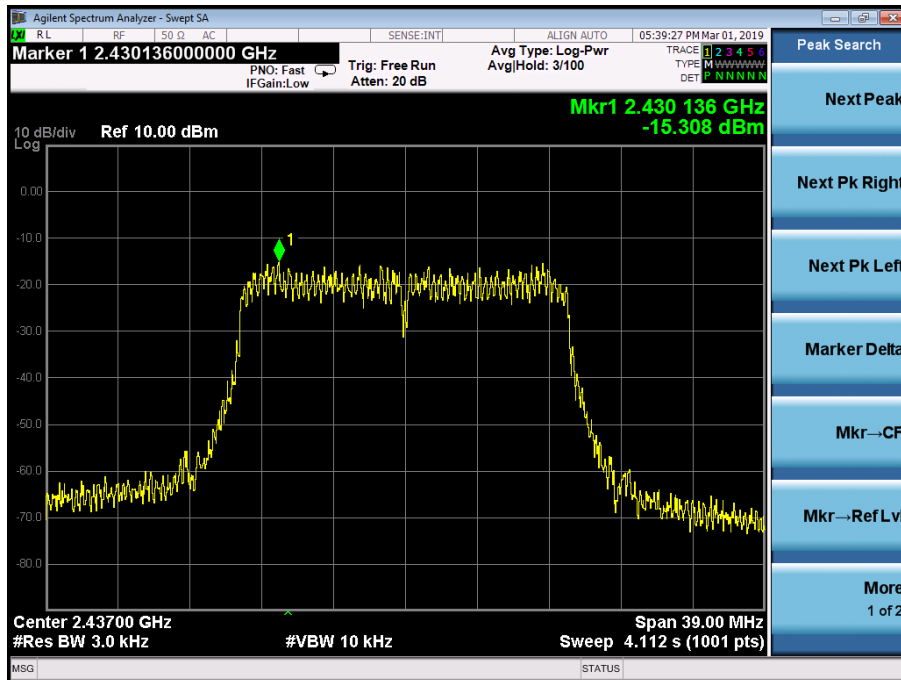


TX CH11

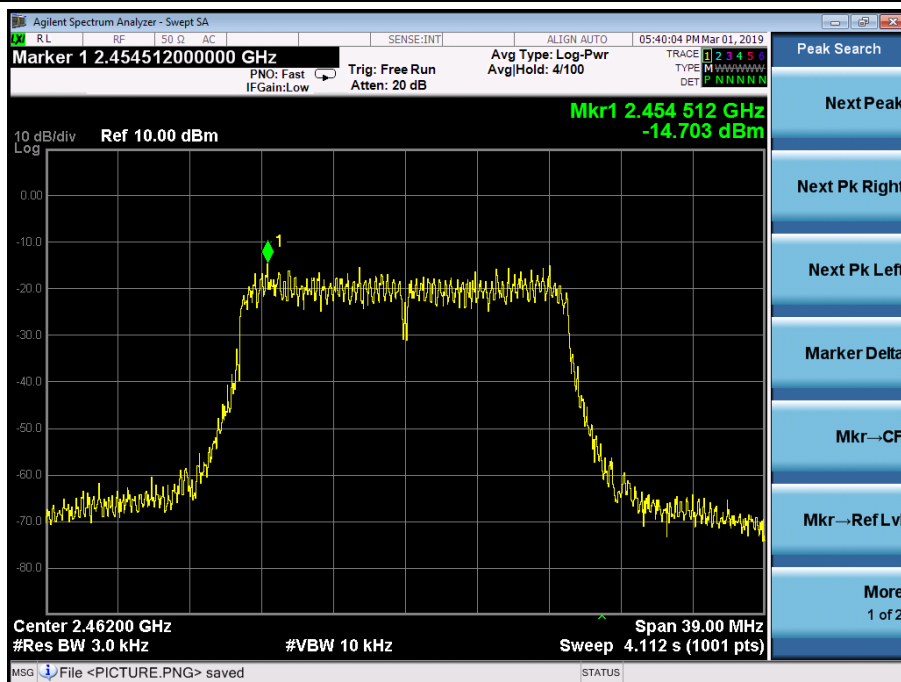




Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V Form Notebook
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2422 MHz	-18.094	8	PASS
2437 MHz	-17.910	8	PASS
2452 MHz	-18.537	8	PASS

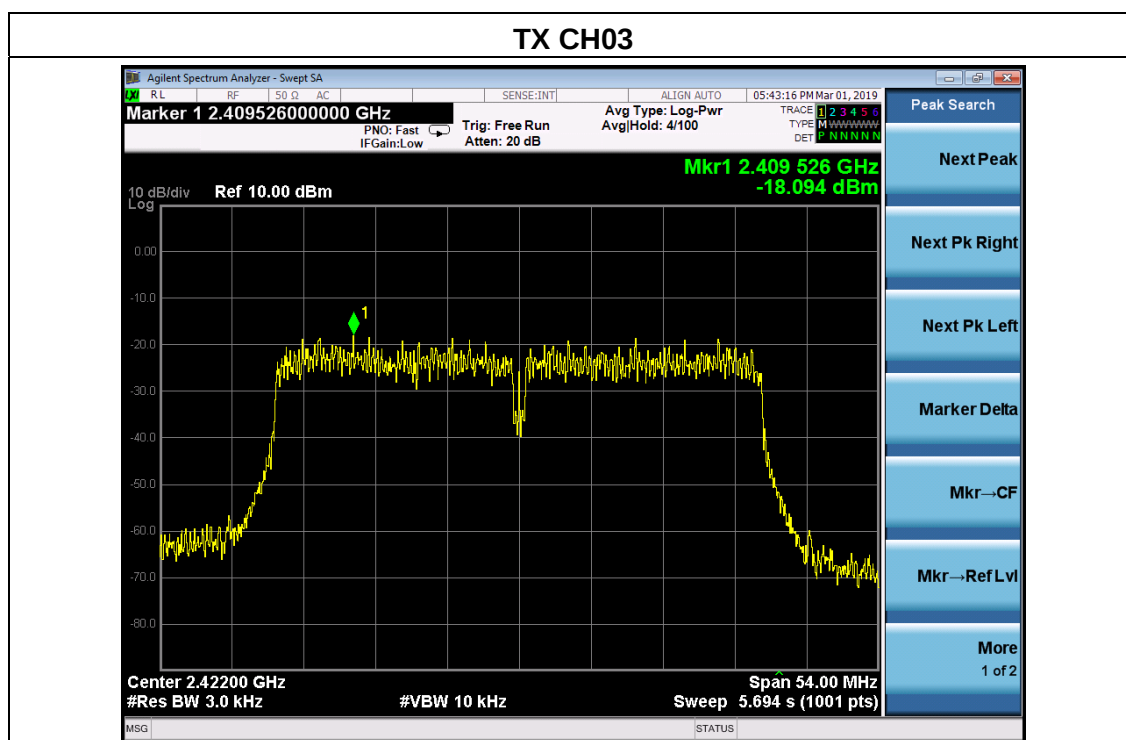




TX CH06

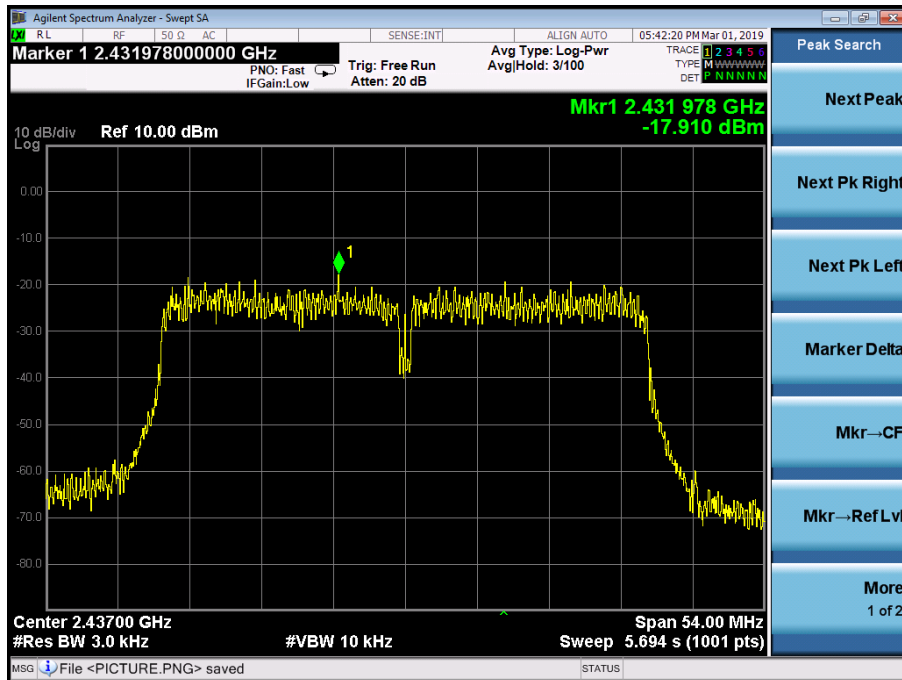

TX CH09

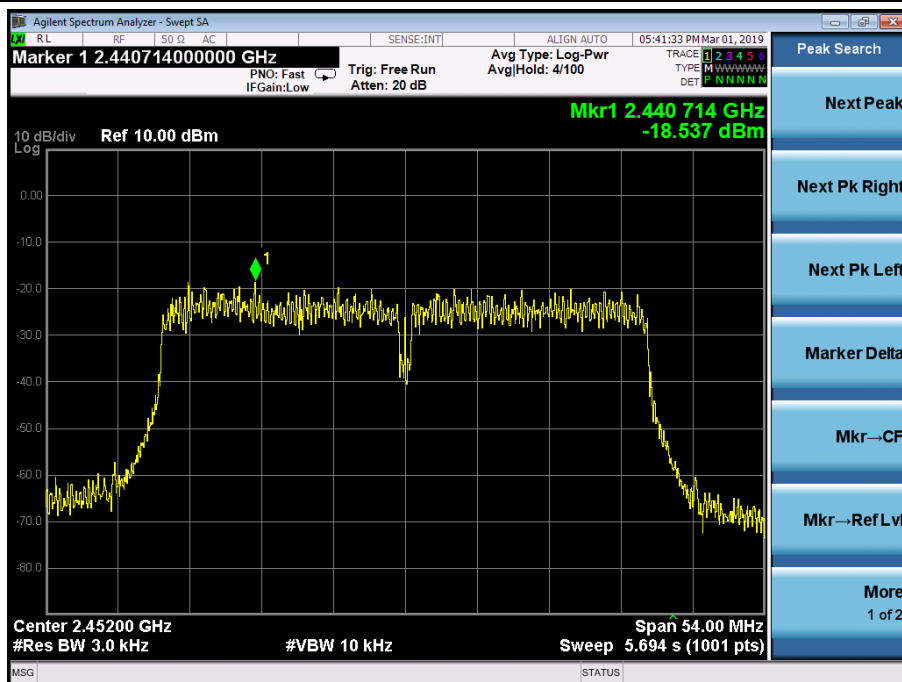

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP




5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V Form Notebook
Test Mode :	TX b Mode		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	10.19	500	Pass
2437	9.72	500	Pass
2462	9.11	500	Pass

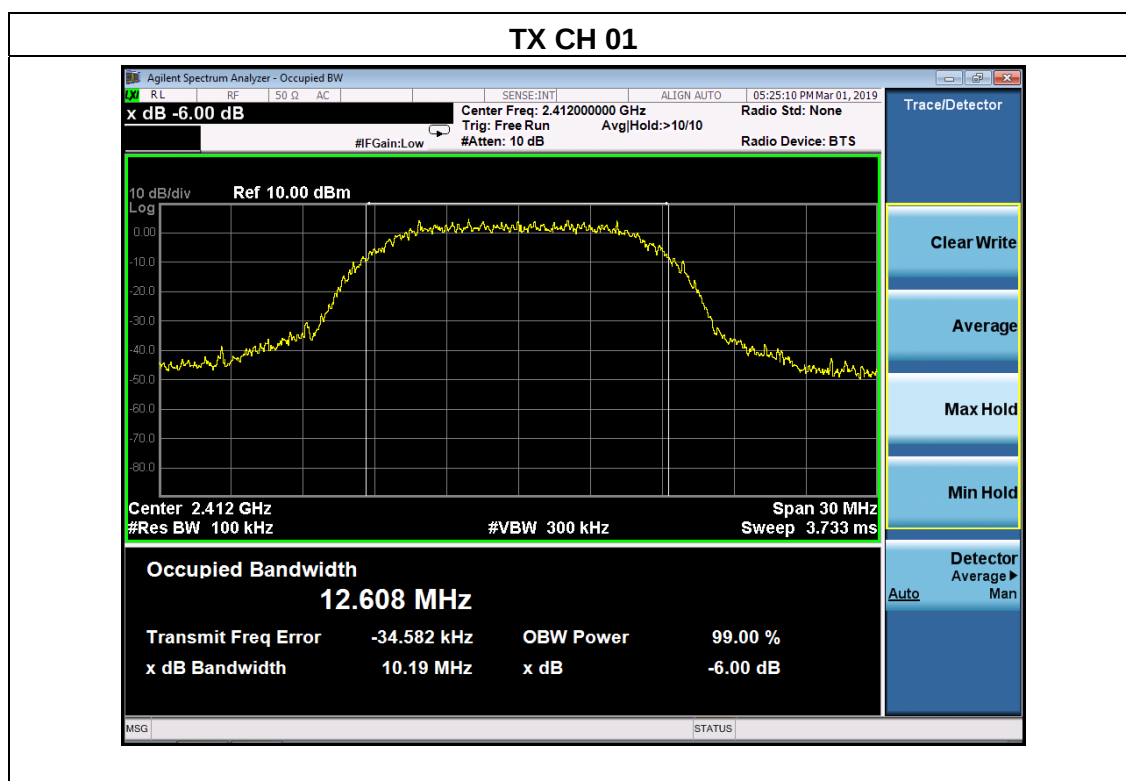




TX CH 06

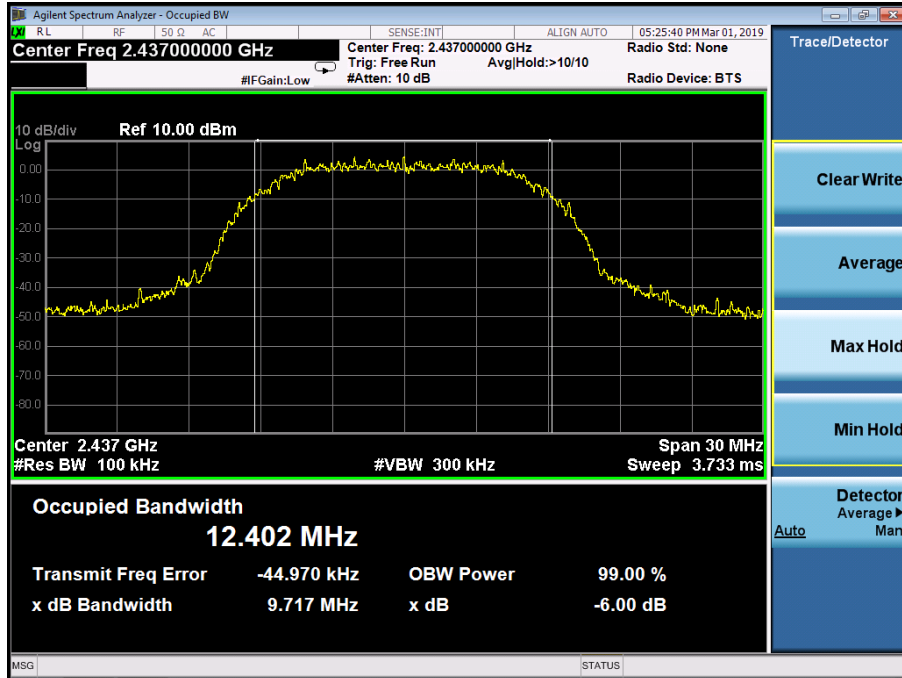


TX CH 11

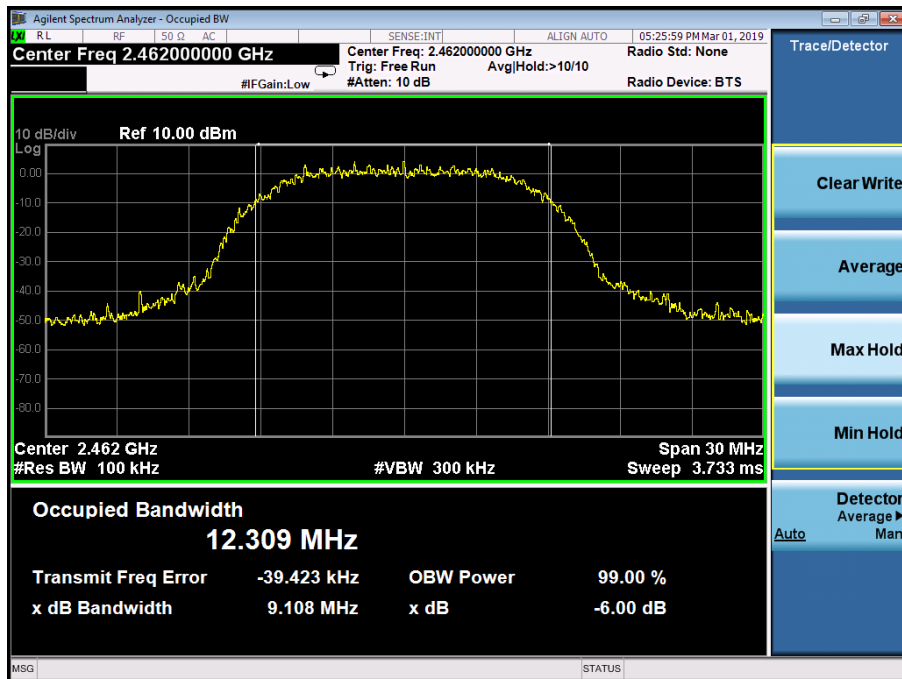


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V Form Notebook
Test Mode :	TX g Mode		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	16.44	500	Pass
2437	16.46	500	Pass
2462	16.45	500	Pass

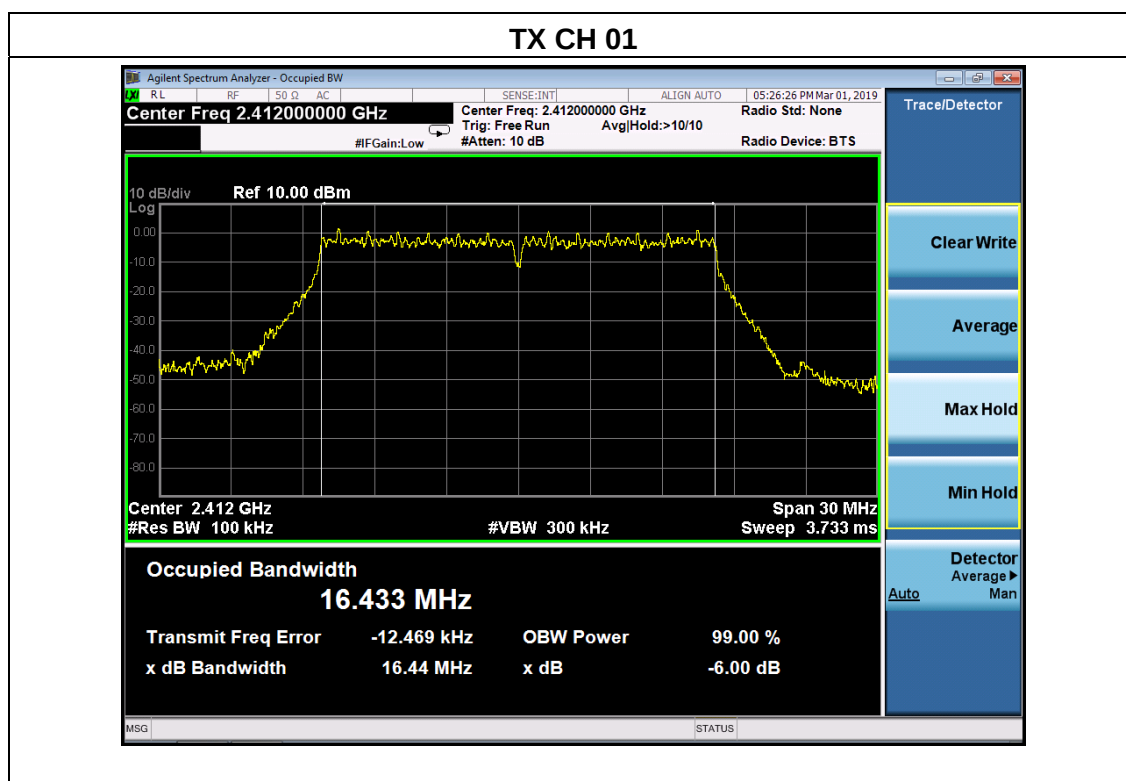




TX CH 06

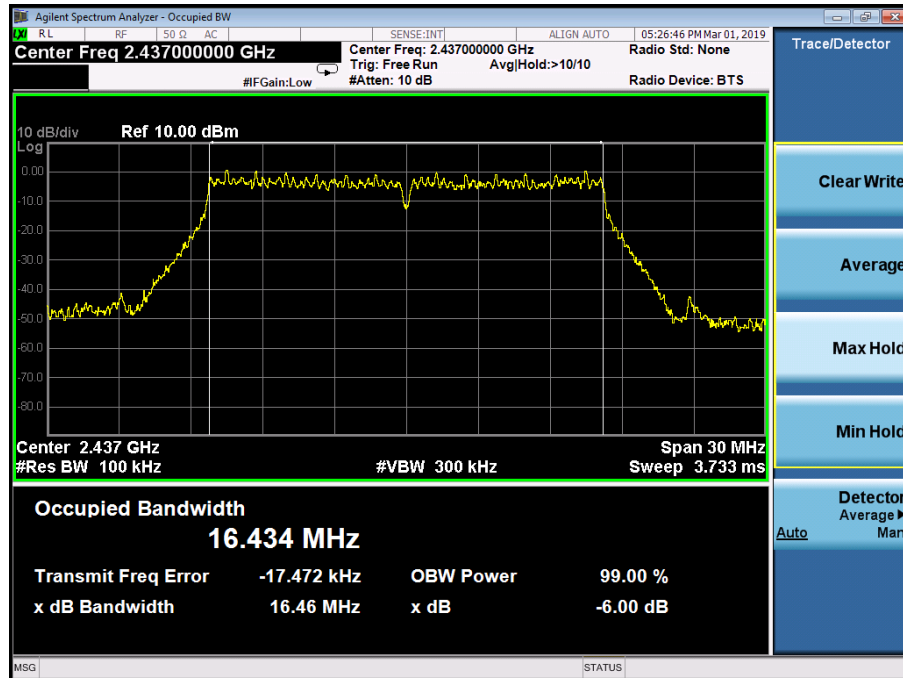


TX CH 11

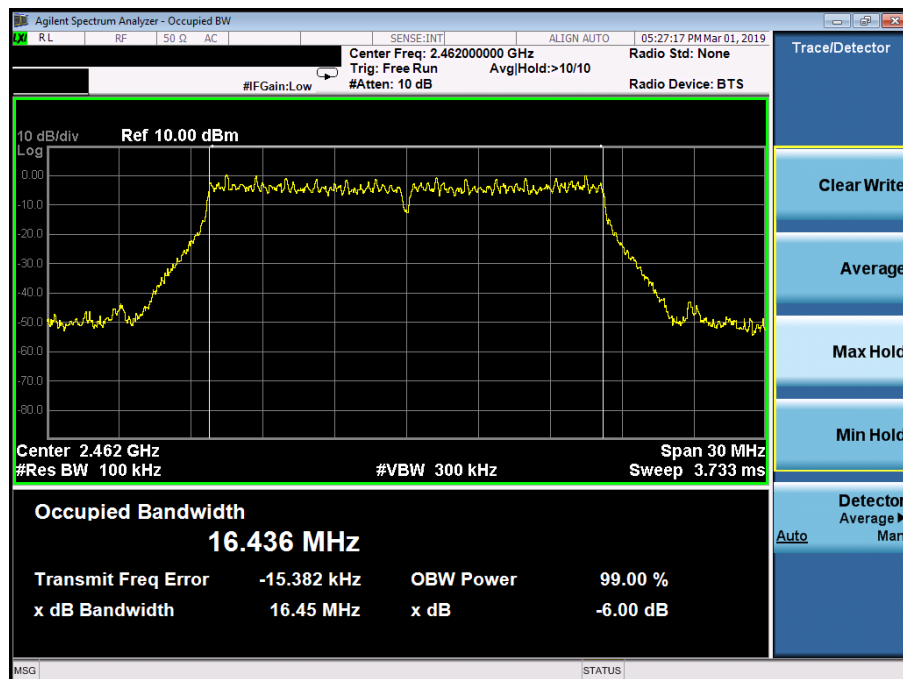


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V Form Notebook
Test Mode :	TX n Mode(20M)		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	17.54	500	Pass
2437	17.53	500	Pass
2462	17.52	500	Pass

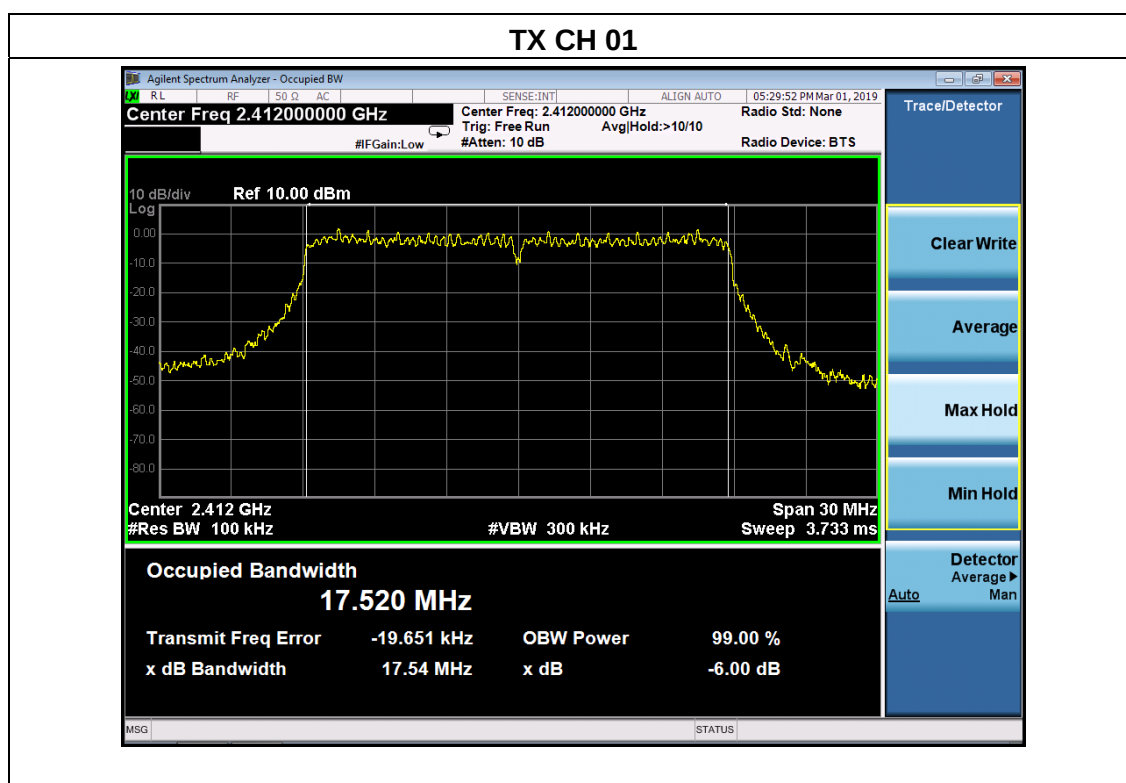




TX CH 06

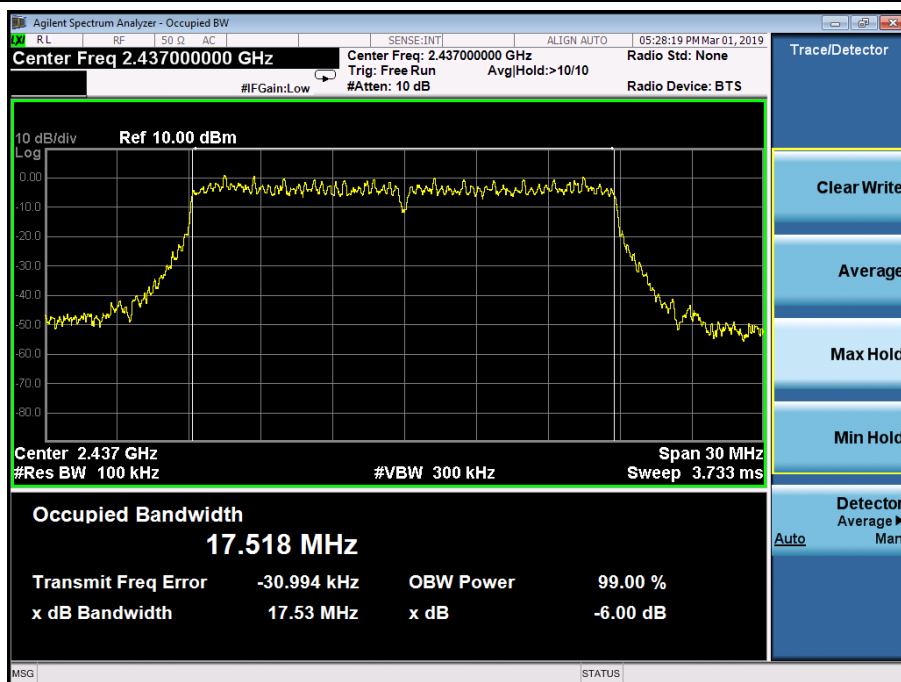


TX CH 11

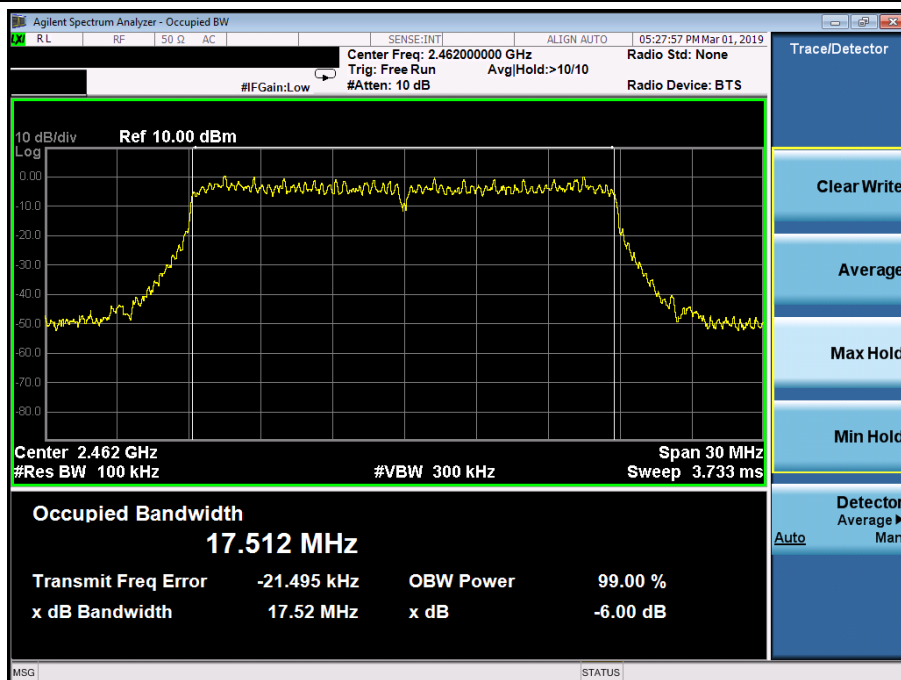


Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V Form Notebook
Test Mode :	TX n Mode(40M)		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2422	35.71	500	Pass
2437	35.47	500	Pass
2452	35.44	500	Pass

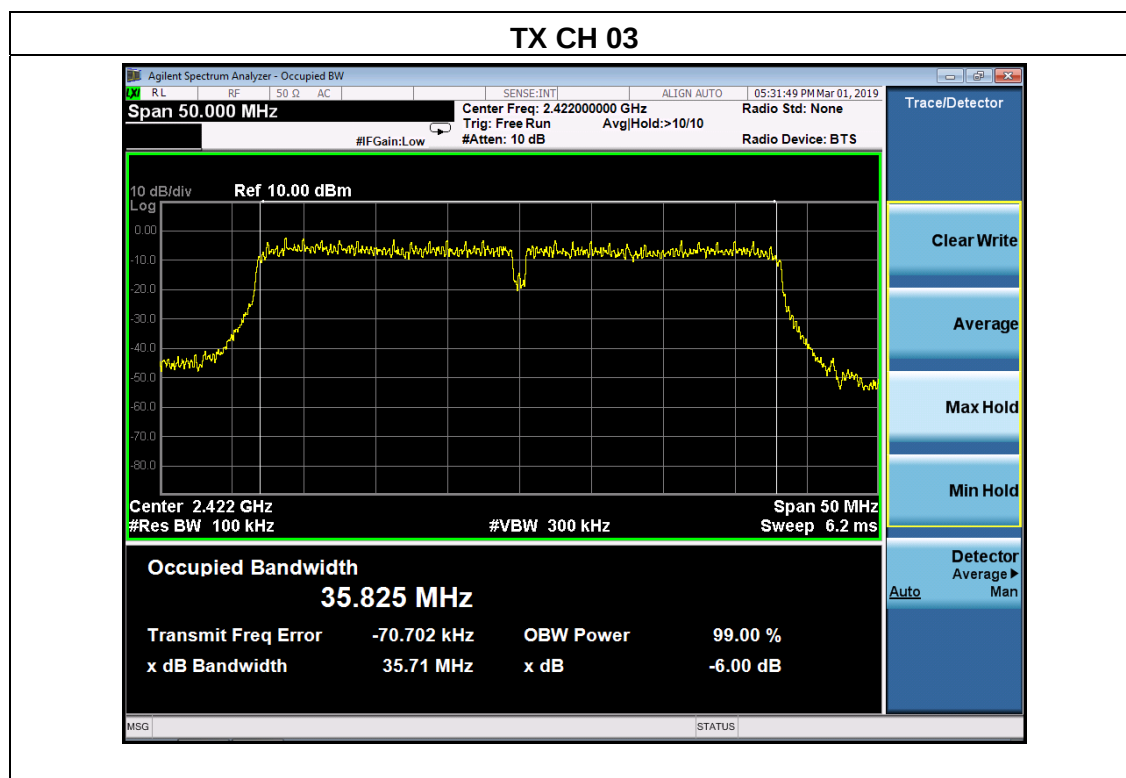




TX CH 06

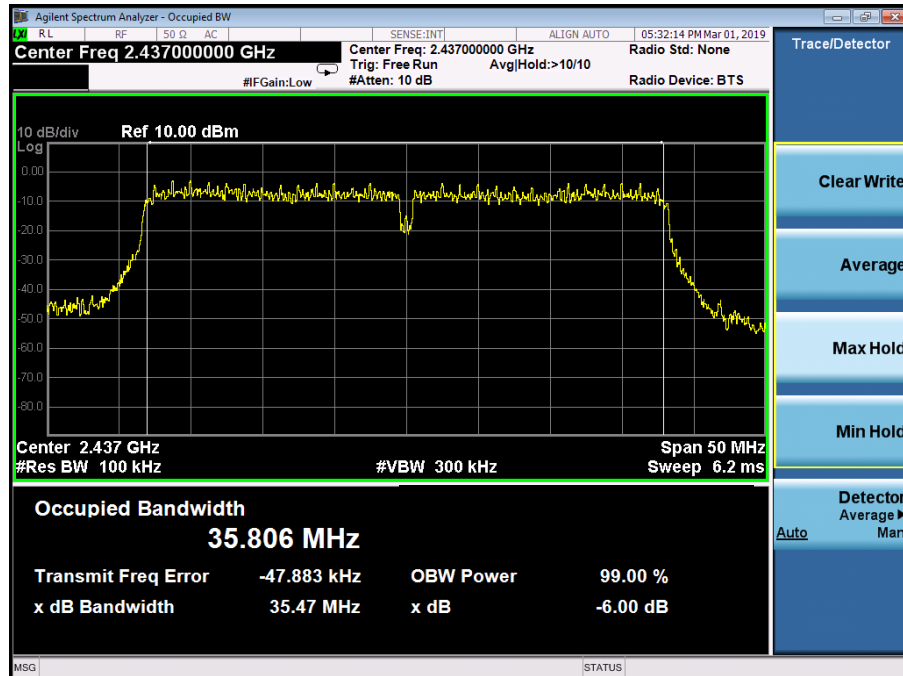

TX CH 09

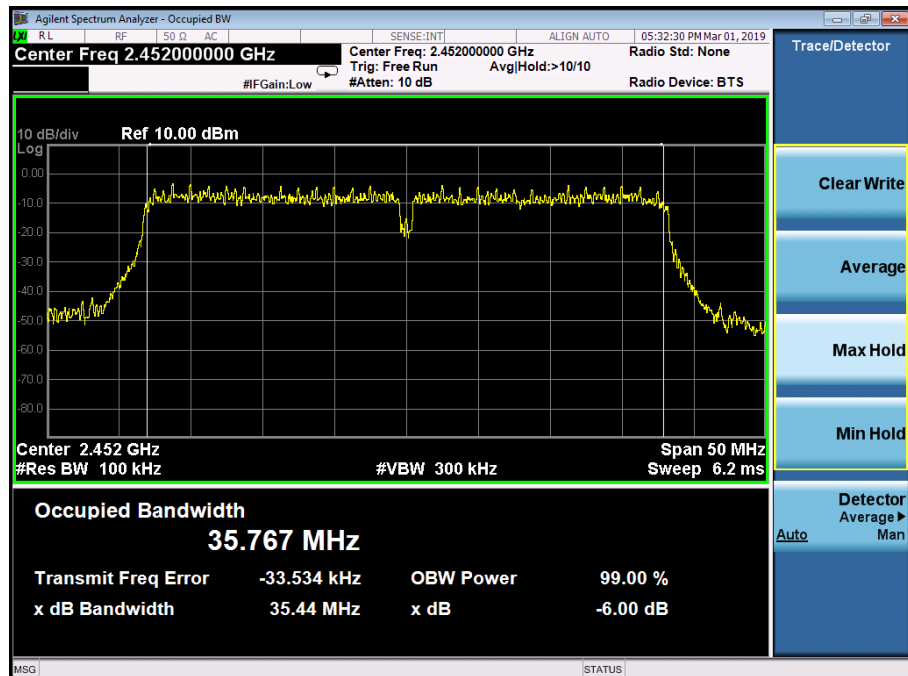

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V Form Notebook

	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b	2412	13.581	30
	2437	13.005	30
	2462	13.011	30
802.11g	2412	12.852	30
	2437	12.430	30
	2462	12.879	30
802.11n20	2412	11.287	30
	2437	11.170	30
	2462	11.333	30
802.11n40	2422	12.185	30
	2437	12.294	30
	2452	11.214	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

7.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP




7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


7.6 TEST RESULT



802.11b: Band Edge, Left Side

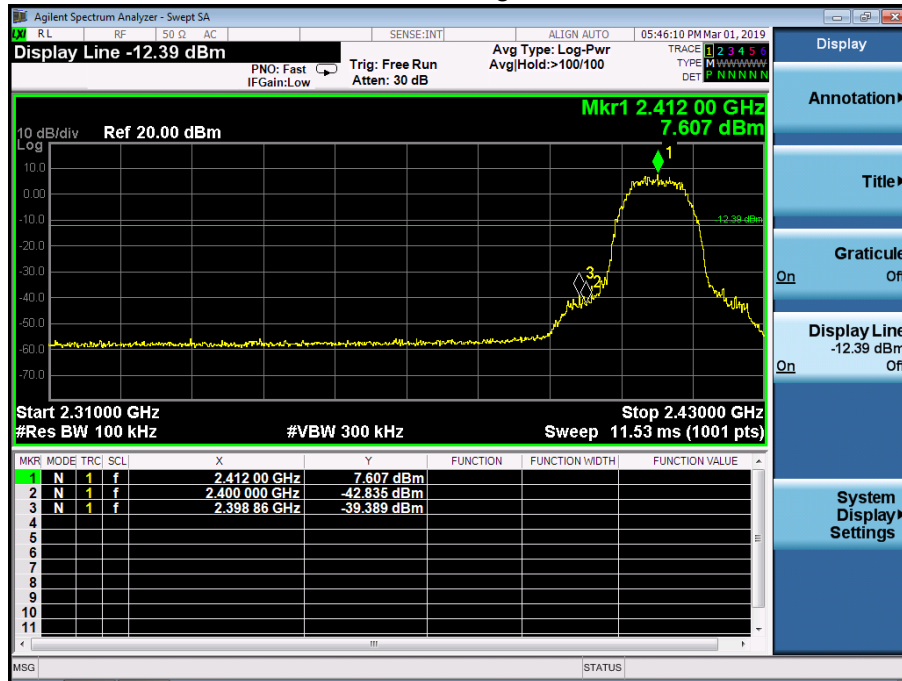


802.11b: Band Edge, Right Side

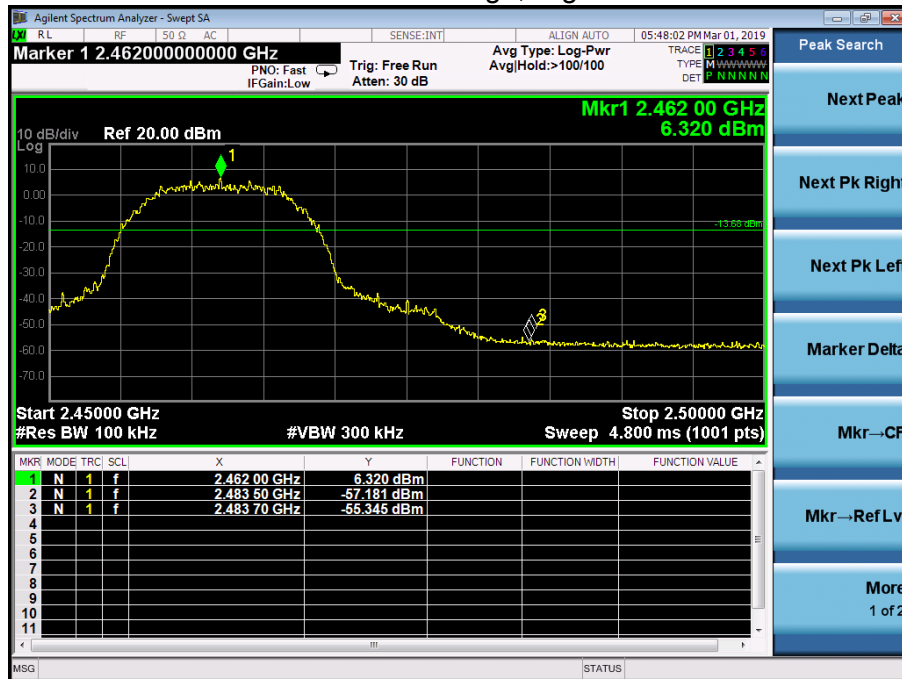




802.11g: Band Edge, Left Side

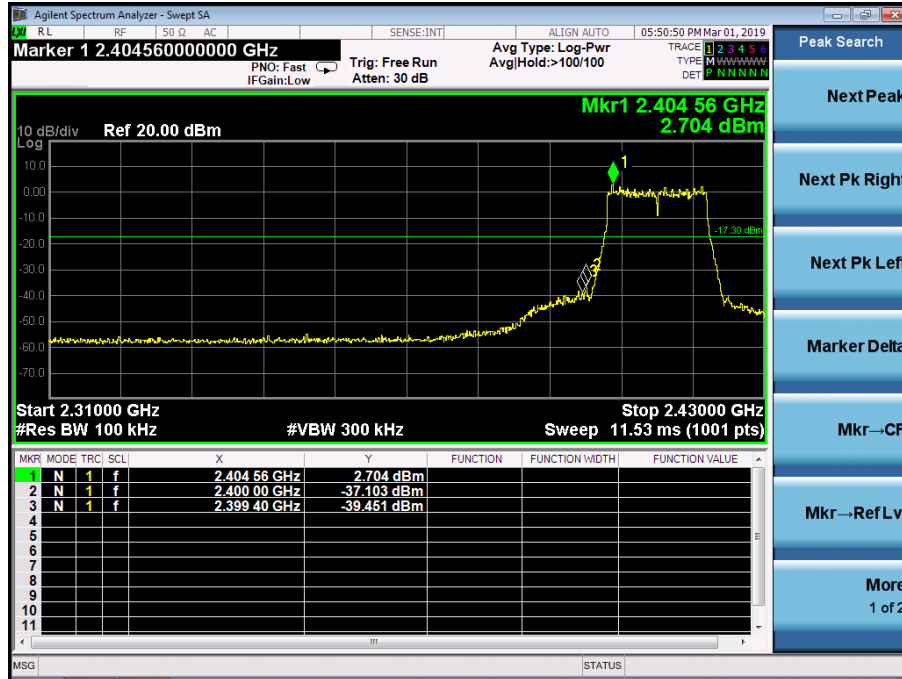


802.11g: Band Edge, Right Side

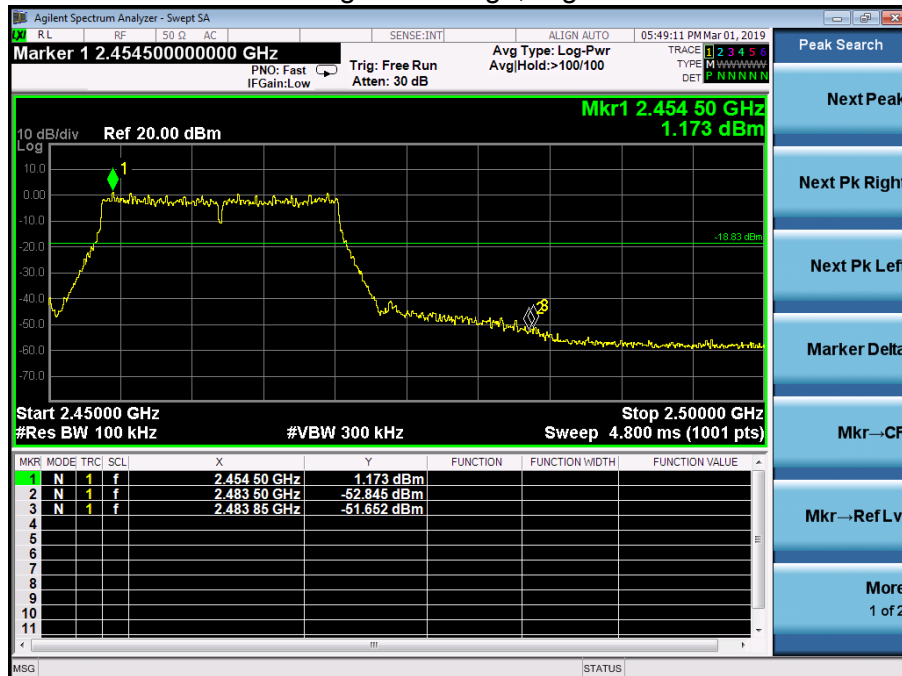




802.11n-HT20: Band Edge, Left Side

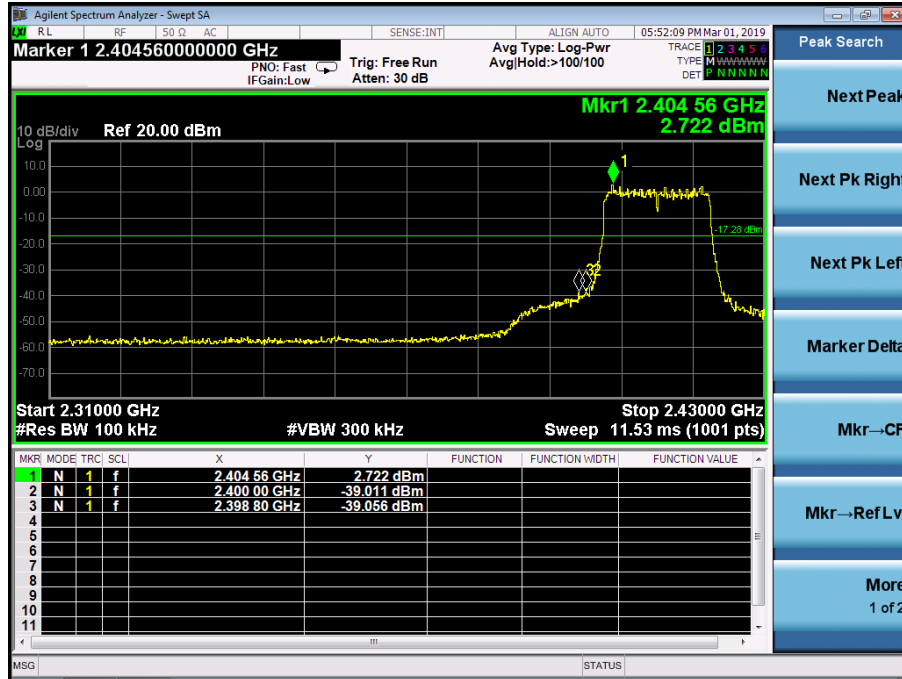


802.11n-HT20: Band Edge, Right Side

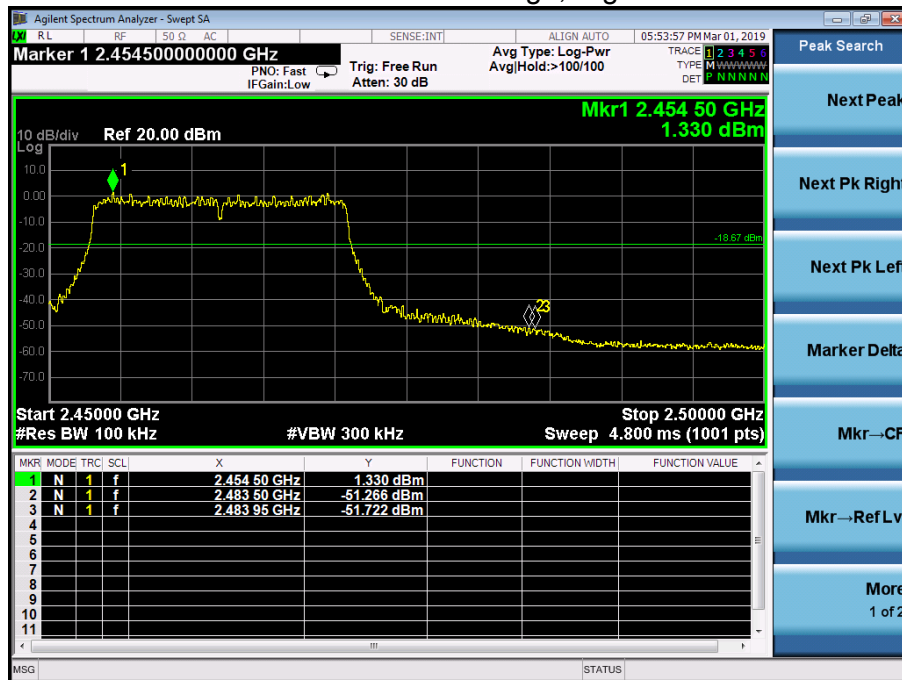




802.11n-HT40: Band Edge, Left Side

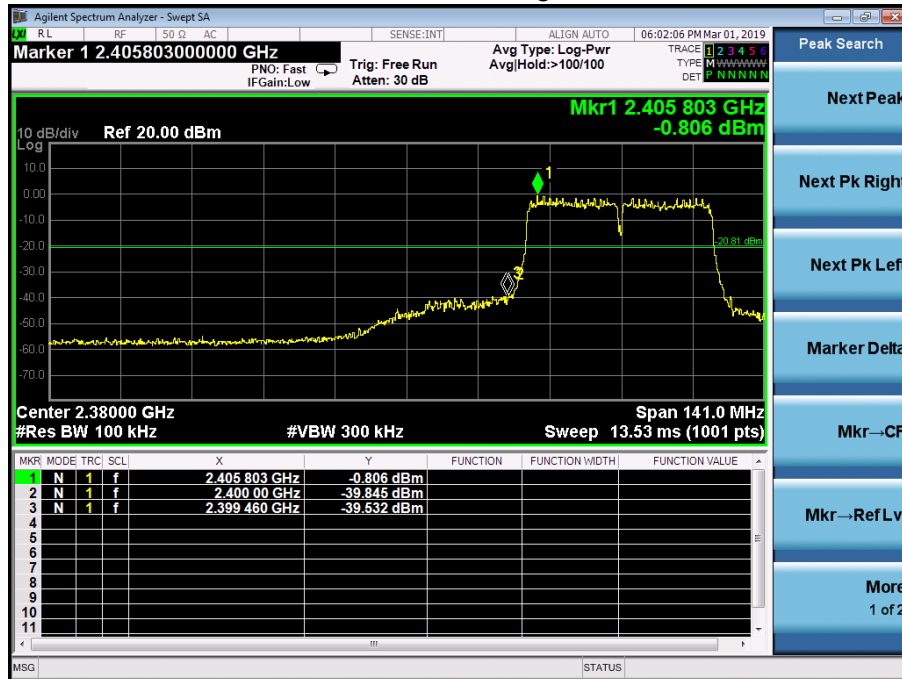

802.11n-HT40: Band Edge, Right Side

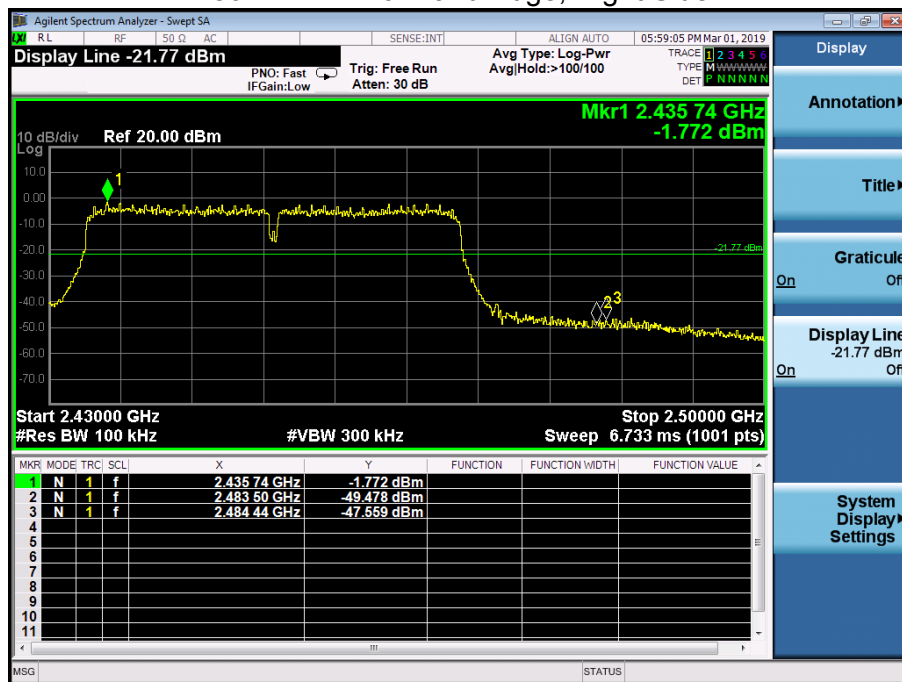




CONDUCTED EMISSION MEASUREMENT

802.11b

Low Channel 2412MHz



Middle Channel 2437MHz

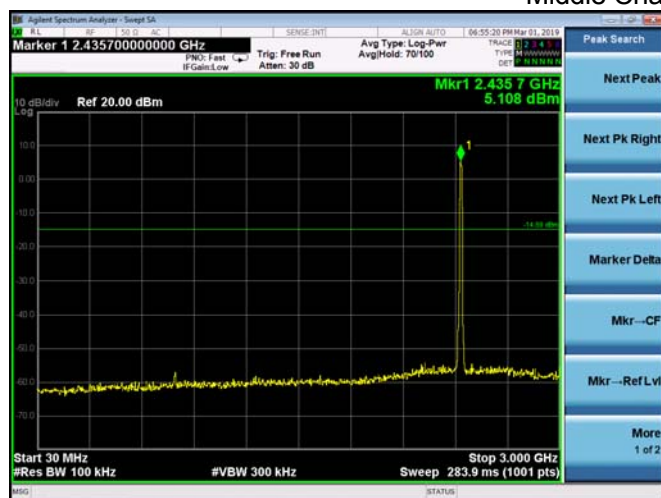


High Channel 2462MHz






802.11g


Low Channel 2412MHz

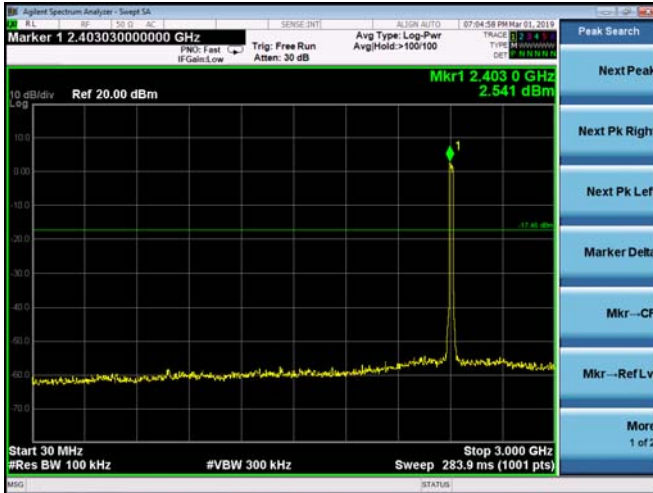

Middle Channel 2437MHz

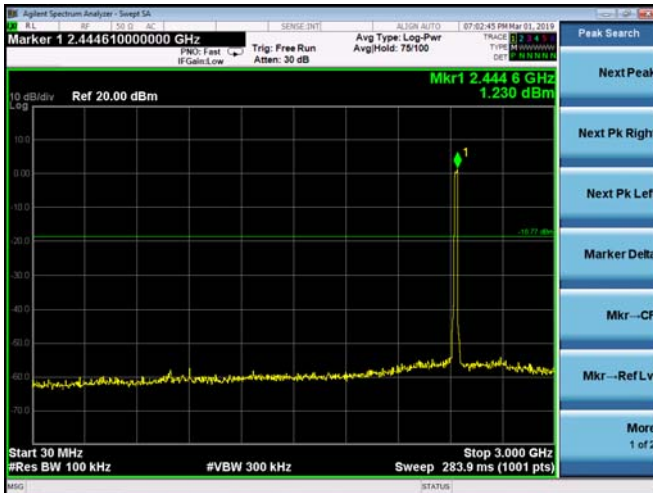


High Channel 2462MHz

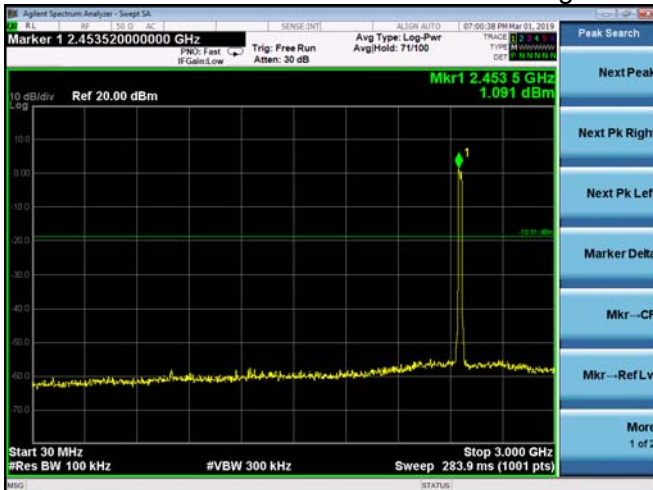


802.11n20


Low Channel 2412MHz

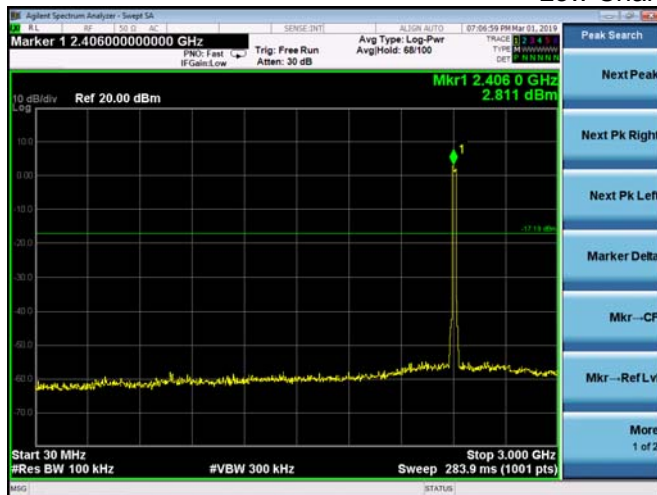

Middle Channel 2437MHz

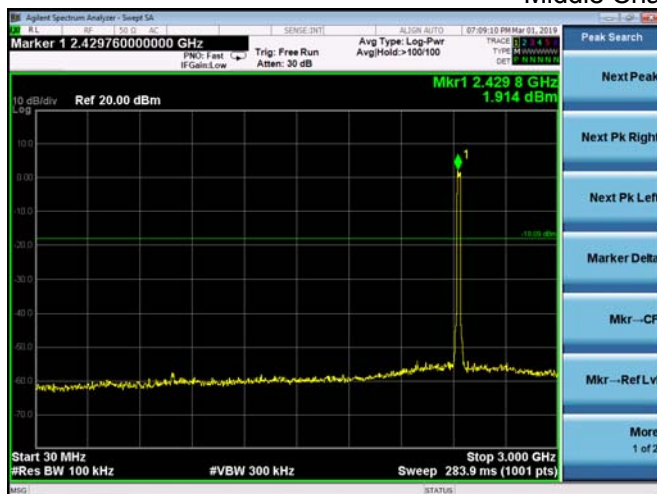



High Channel 2462MHz

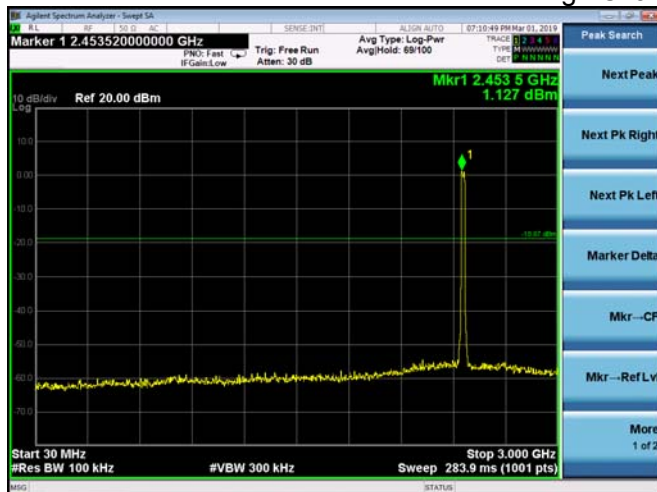




802.11n40


Low Channel 2422MHz

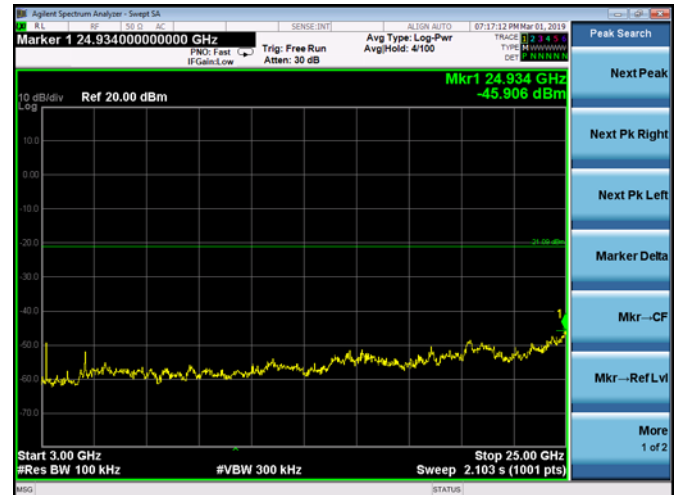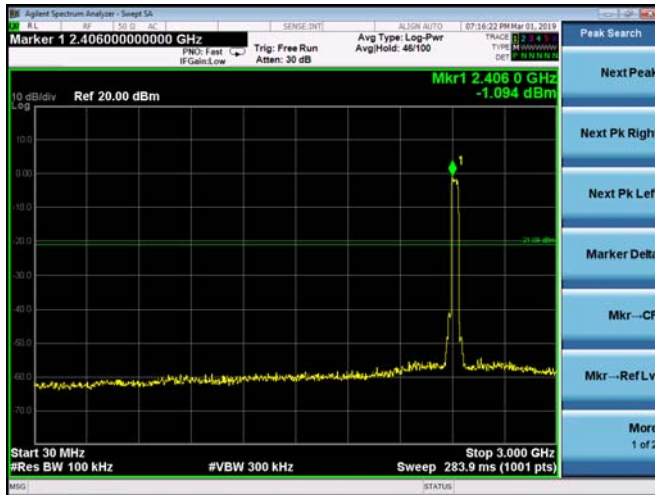

Middle Channel 2437MHz

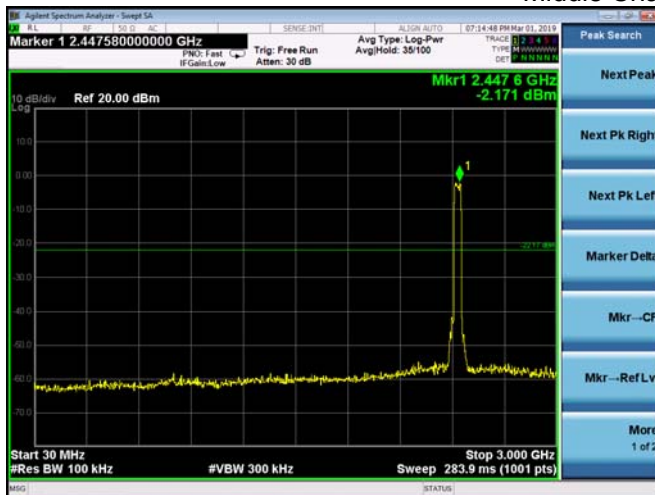

High Channel 2452MHz

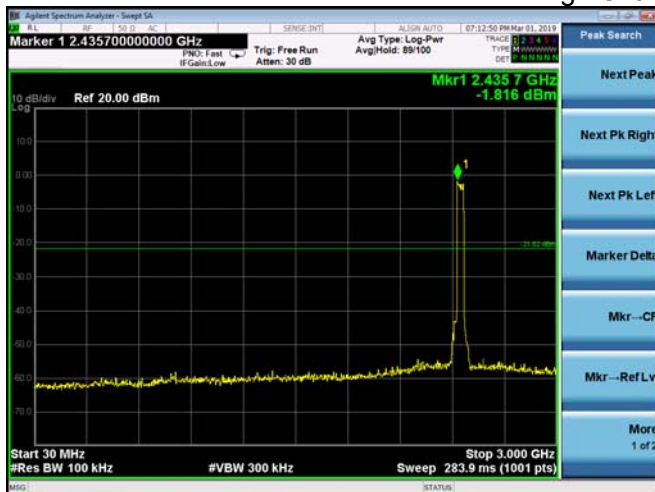

8. DUTY CYCLE OF TEST SIGNAL

8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 FORMULA:


Duty Cycle = $T_{on} / (T_{on} + T_{off})$

Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak


Duty Cycle:

	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0

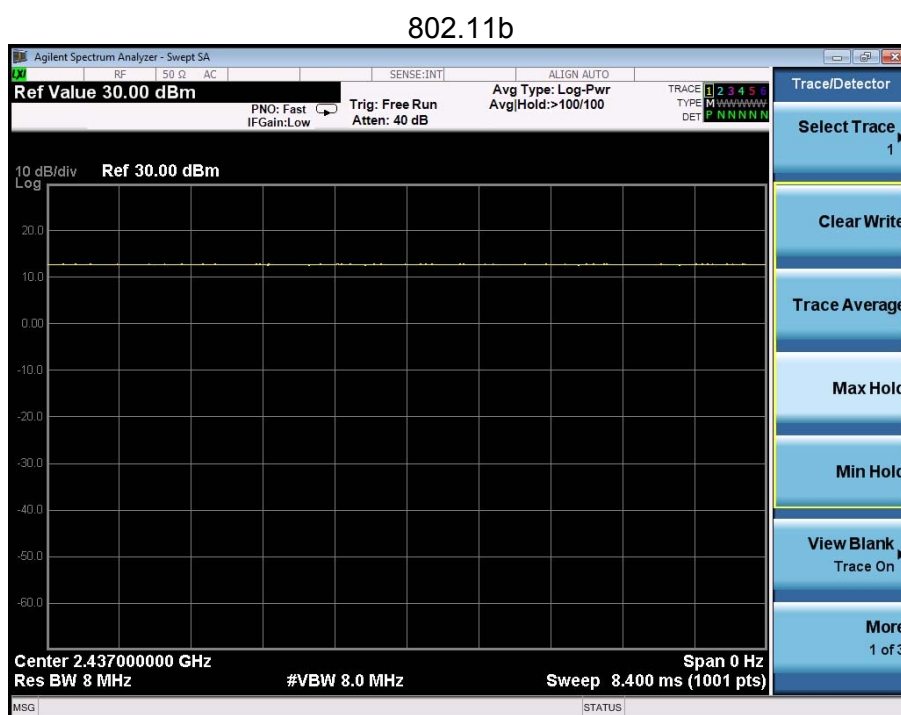




802.11g

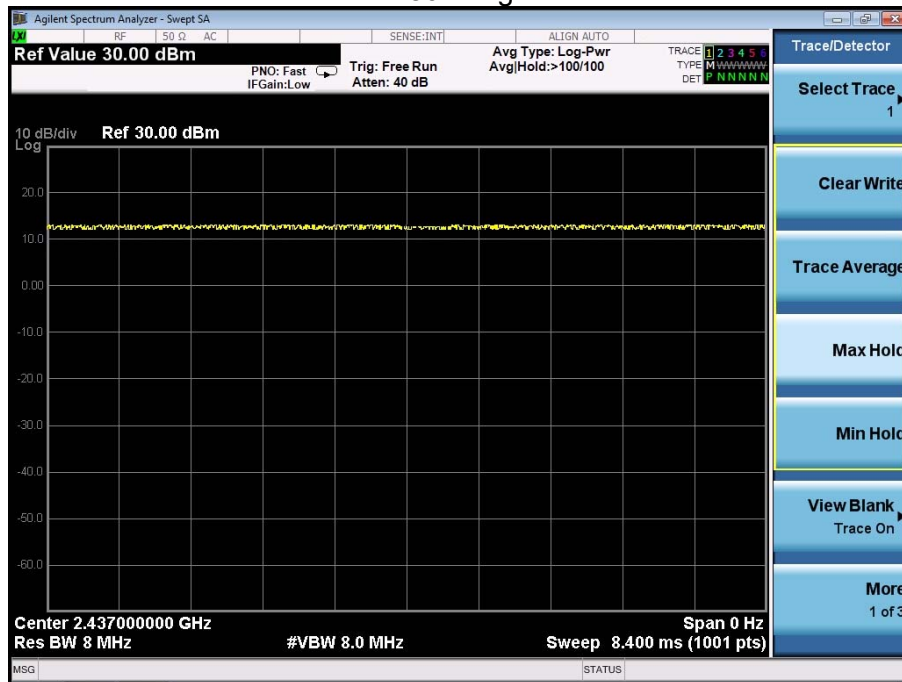


802.11n(HT20)

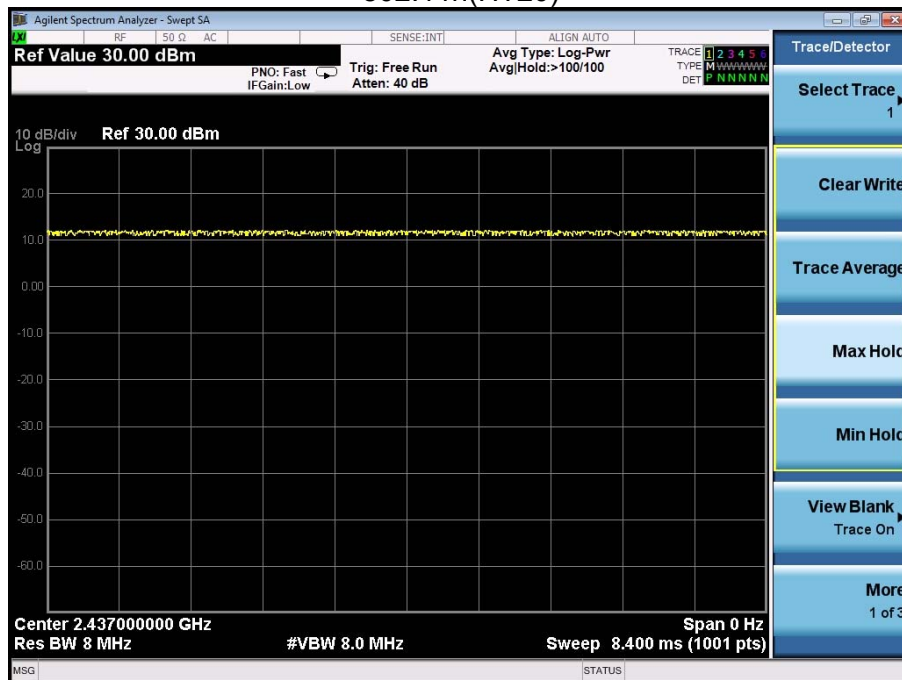



802.11n(HT40)

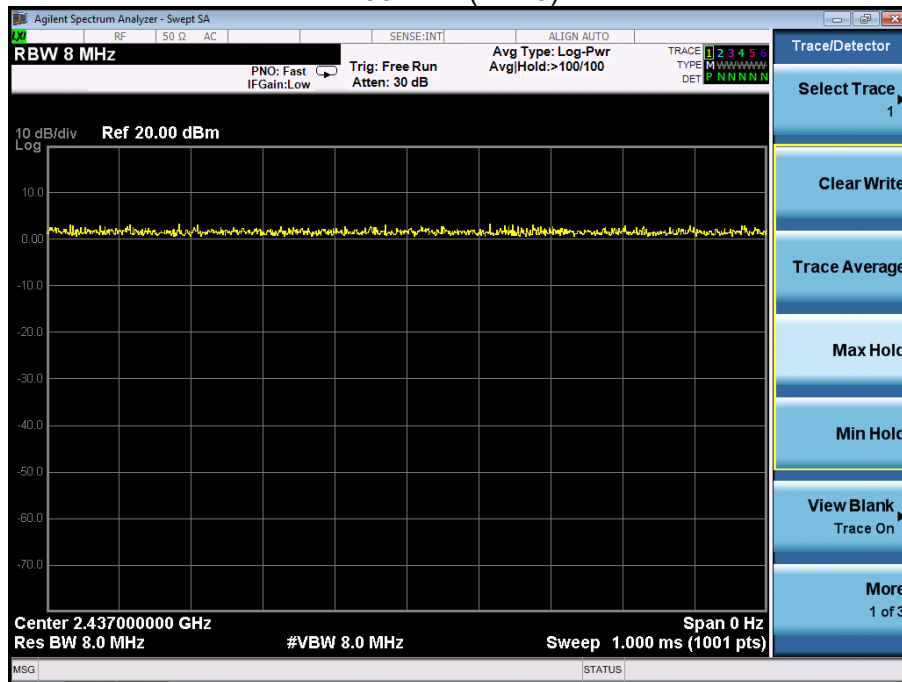

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is External antenna, It comply with the standard requirement.



10. EUT TEST PHOTO

Conducted Measurement Photos(ANT1)





Conducted Measurement Photos(ANT2)





Conducted Measurement Photos(ANT3)



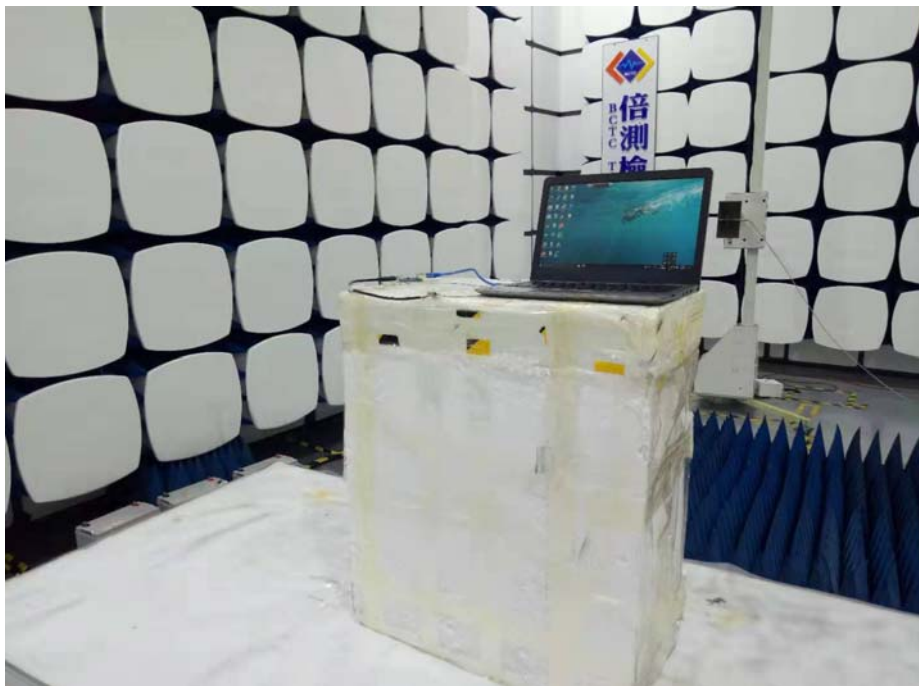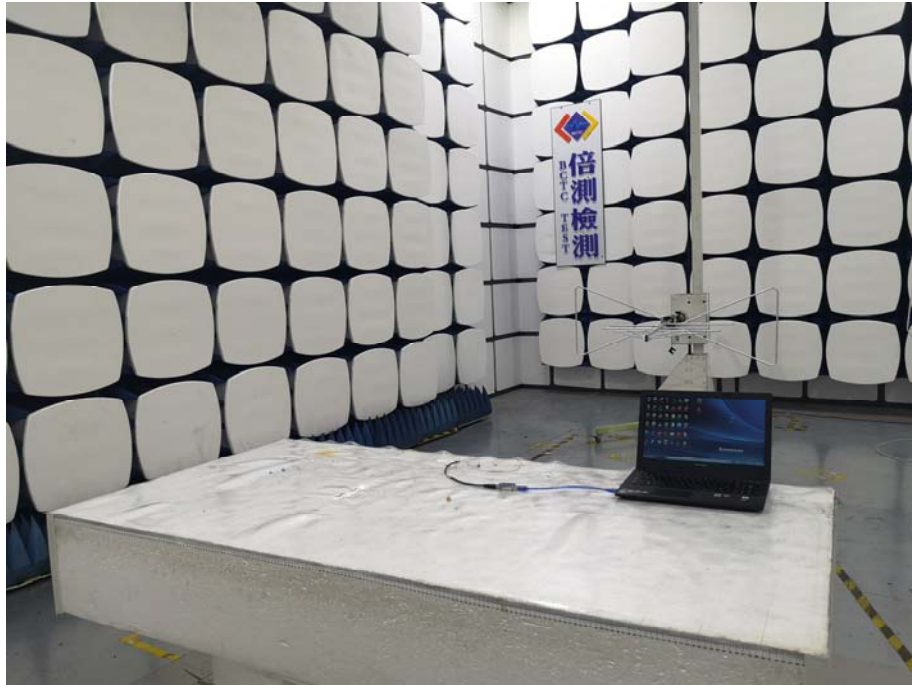



Radiated Measurement Photos(ANT1)




Radiated Measurement Photos(ANT2)







Radiated Measurement Photos(ANT3)

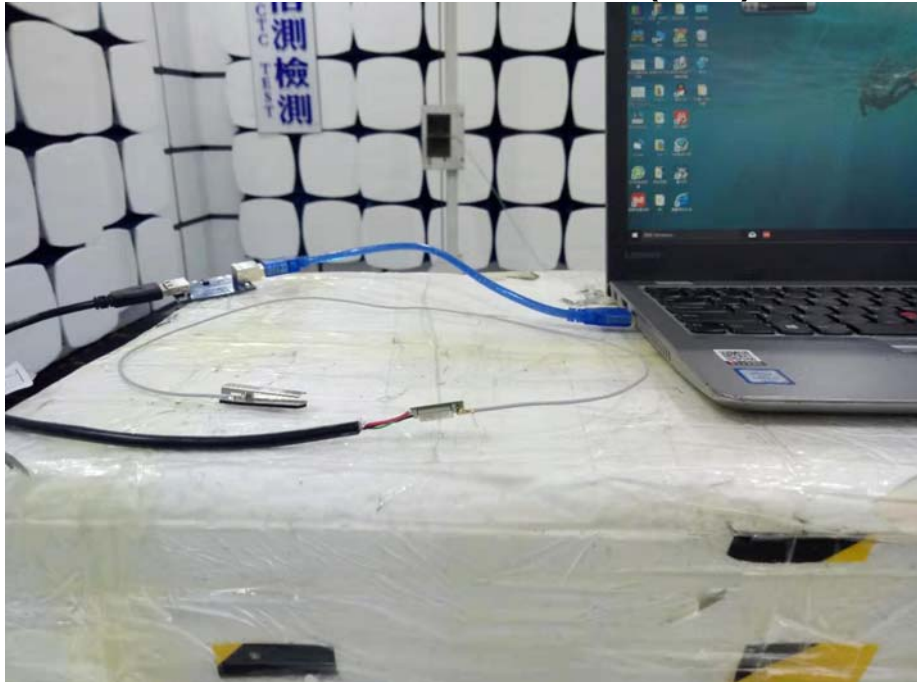



11. EUT PHOTO

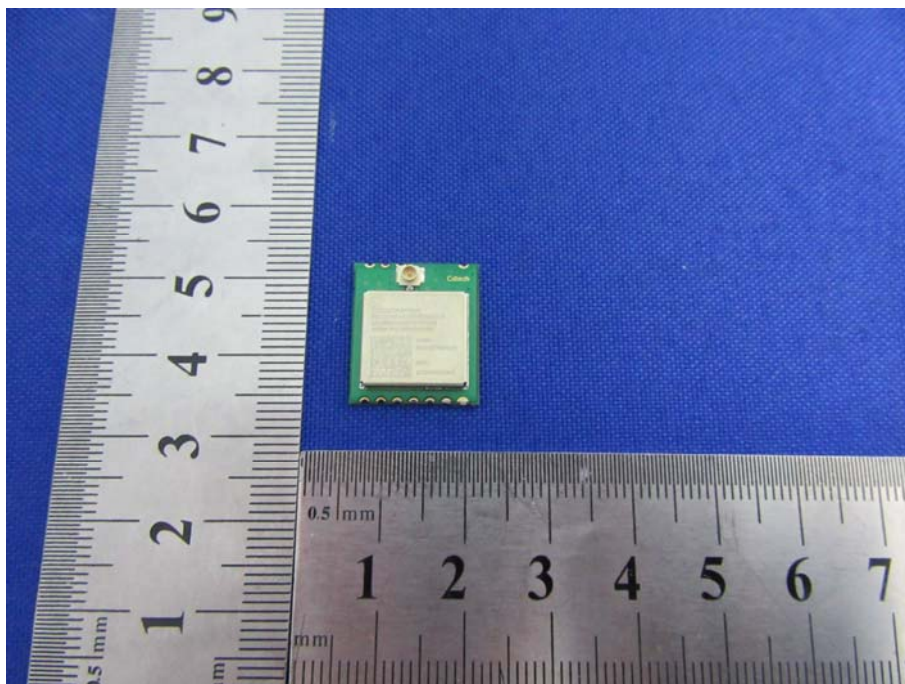

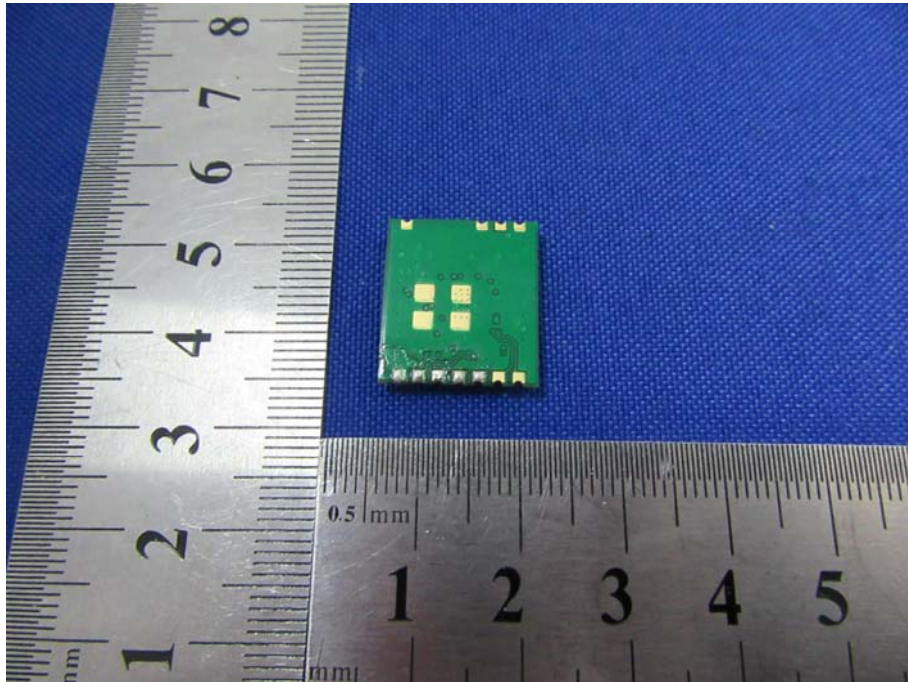

***** END OF REPORT *****