




## Appendix B

Peak Output Power



\*RBW 20 MHz      Marker 1 [T1 ]  
\*VBW 10 MHz      16.09 dBm  
SWT 2.5 ms      2.411487179 GHz

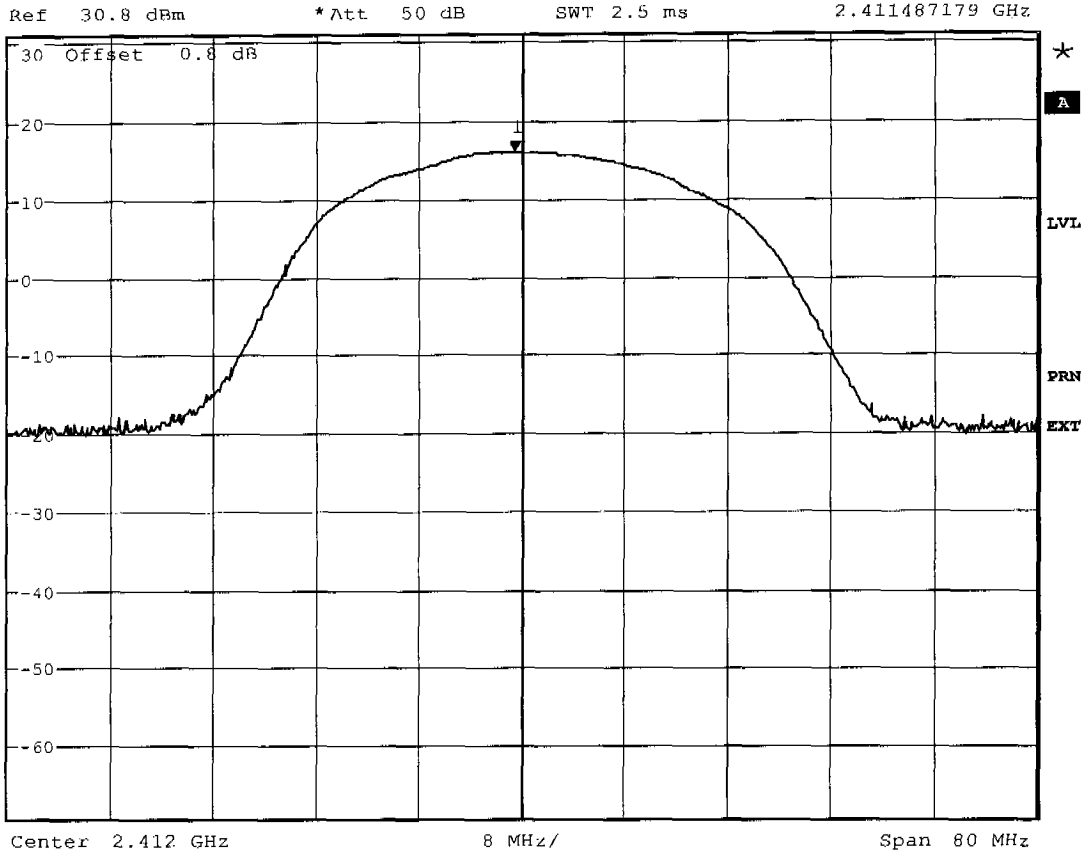


Comment A: Output Power Conducted 11Mb/s 100% Voltage  
Date: 5.DEC.2003 08:52:30



\*RBW 20 MHz      Marker 1 [T1 ]  
\*VBW 10 MHz      14.82 dBm  
SWT 2.5 ms      2.435461538 GHz

Ref 30.8 dBm      \*Att 50 dB

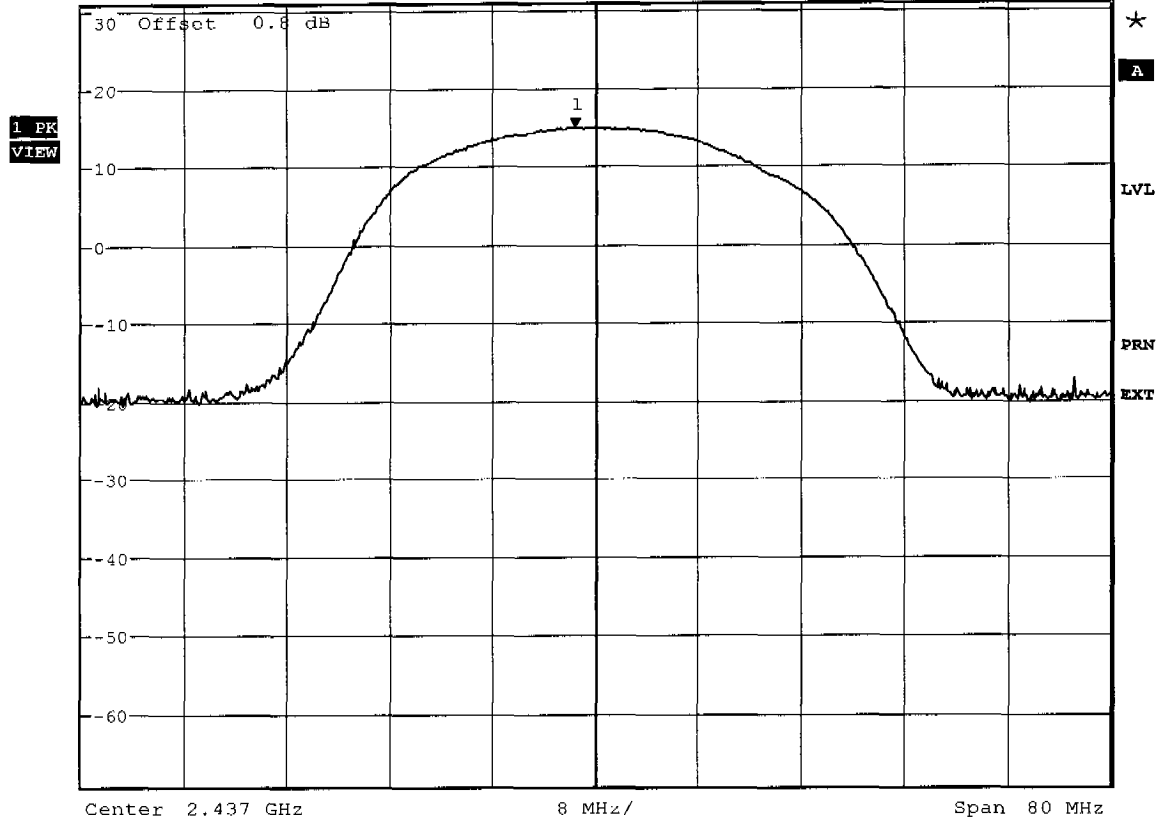


Comment A: Output Power Conducted 11Mb/s 100% Voltage  
Date: 5.DEC.2003 08:51:42



\*RBW 20 MHz      Marker 1 [T1 ]  
\*VBW 10 MHz      13.31 dBm  
SWT 2.5 ms      2.462000000 GHz

Ref 30.8 dBm      \*Att 50 dB

1 PK  
VIEW

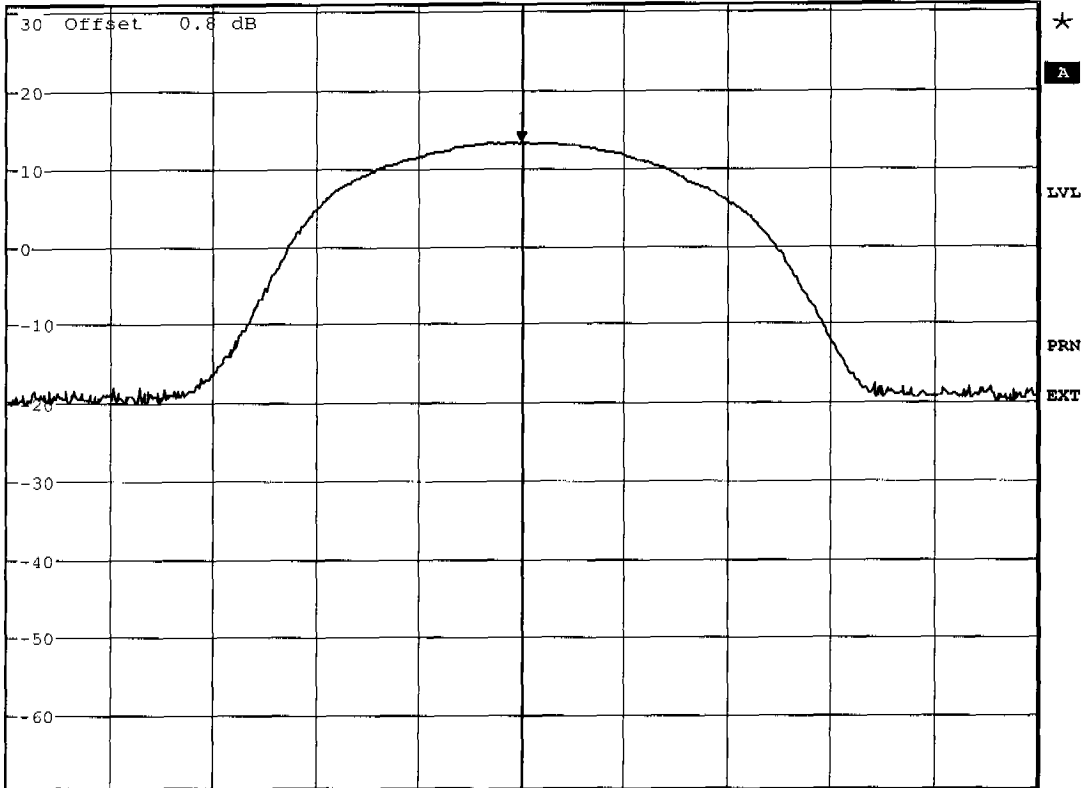

Center 2.462 GHz      8 MHz/      Span 80 MHz


Comment A: Output Power Conducted 11Mb/s 100% Voltage  
Date: 5.DEC.2003 08:50:54



\*RBW 20 MHz      Marker 1 [T1 ]  
\*VBW 10 MHz      16.14 dBm  
SWT 2.5 ms      2.411615385 GHz

Ref 30.8 dBm      \*Att 50 dB

1 PK  
VIEW

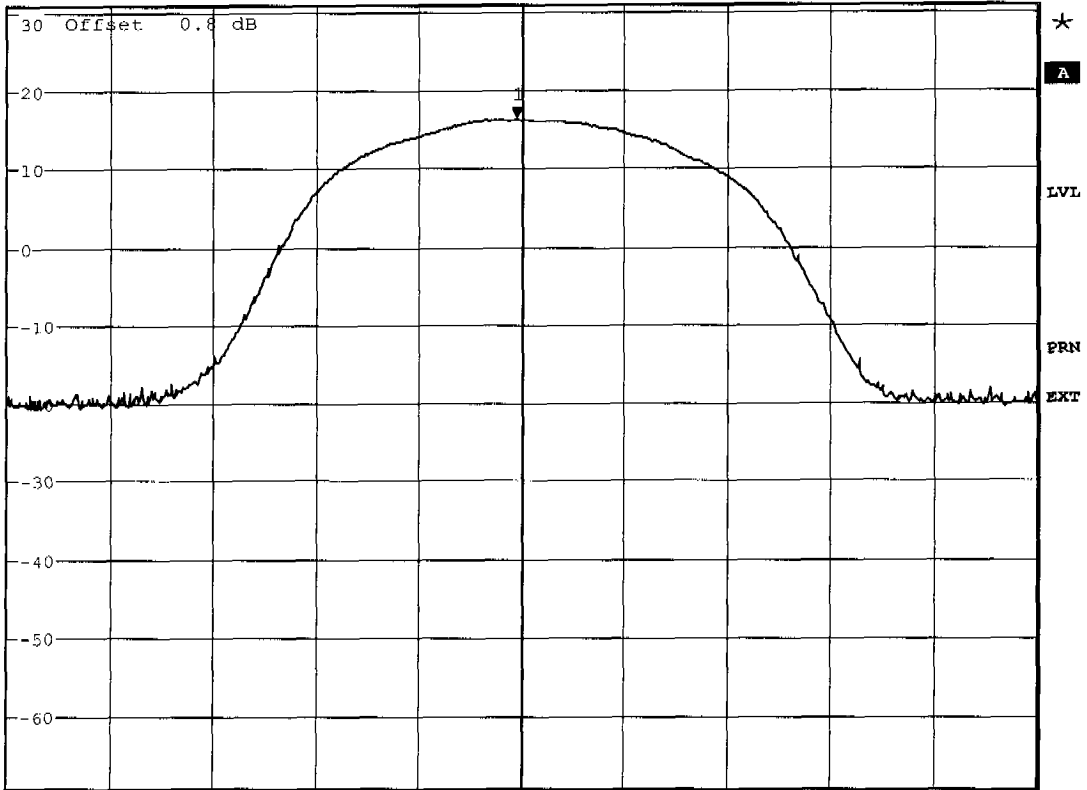

Center 2.412 GHz      8 MHz/      Span 80 MHz


Comment A: Output Power Conducted 11Mb/s 85% Voltage  
Date: 5.DEC.2003 09:16:45



\*RBW 20 MHz      Marker 1 [T1 ]  
\*VBW 10 MHz      14.99 dBm  
SWT 2.5 ms      2.437512821 GHz

Ref 30.8 dBm      \*Att 50 dB

1 PK  
VIEW

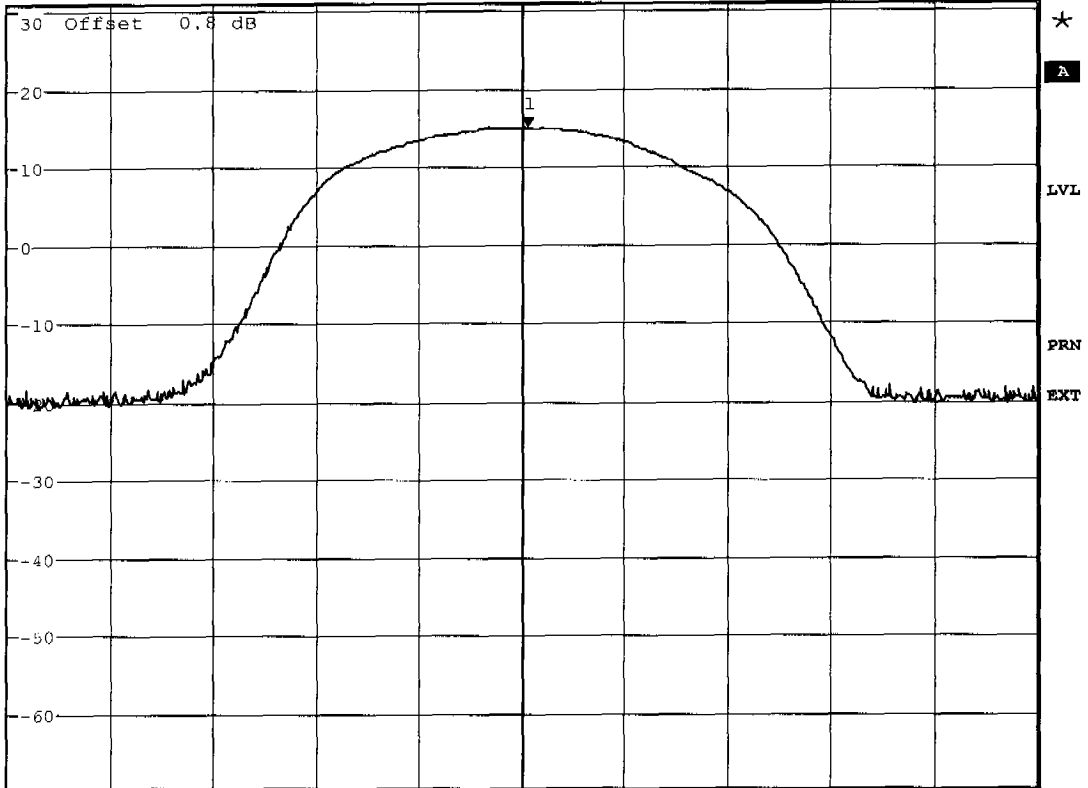


Center 2.437 GHz      8 MHz/      Span 80 MHz

Comment A: Output Power Conducted 11Mb/s 85% Voltage  
Date: 5.DEC.2003 09:16:04



\*RBW 20 MHz      Marker 1 [T1 ]  
\*VBW 10 MHz      13.49 dBm  
SWT 2.5 ms      2.460846154 GHz


Ref 30.8 dBm      \*Att 50 dB

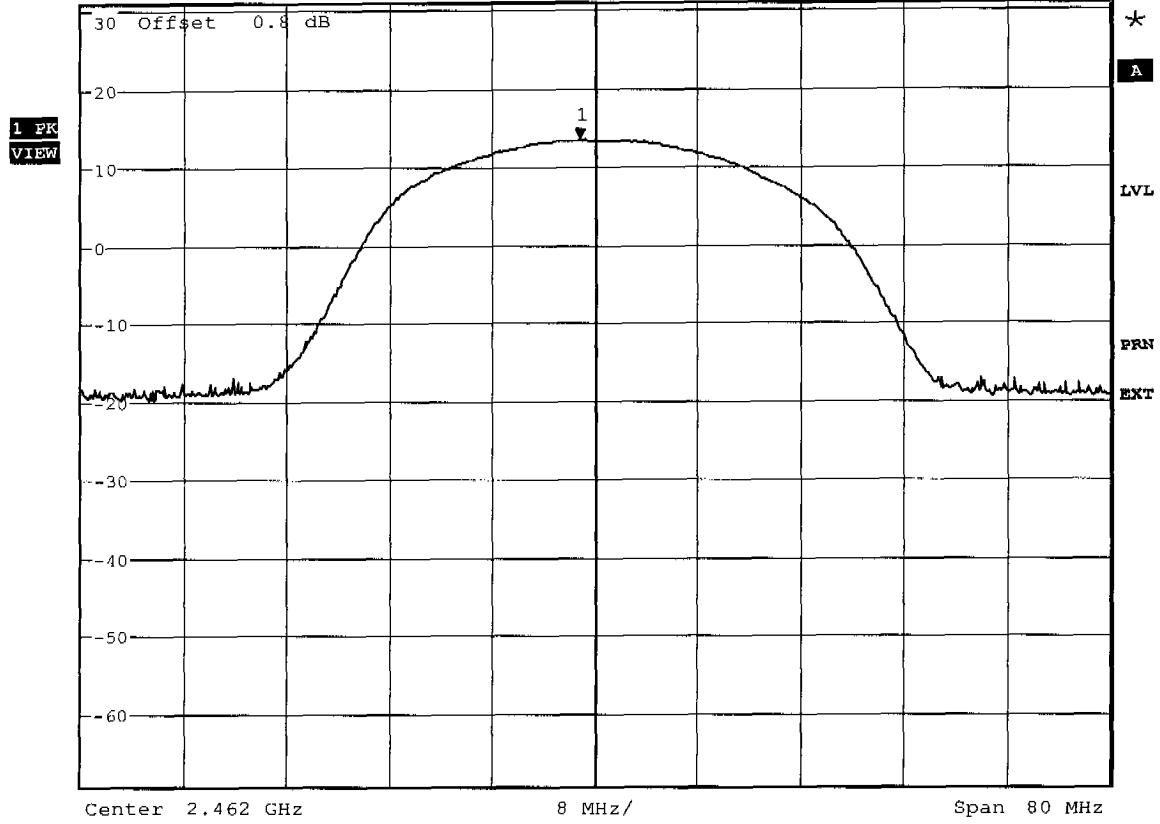

Comment A: Output Power Conducted 11Mb/s 85% Voltage  
Date: 5.DEC.2003 09:15:29



Ref 30.8 dBm      \*Att 50 dB      \*RBW 20 MHz      Marker 1 [T1]      16.14 dBm  
\*VBW 10 MHz      2.411102564 GHz  
SWT 2.5 ms

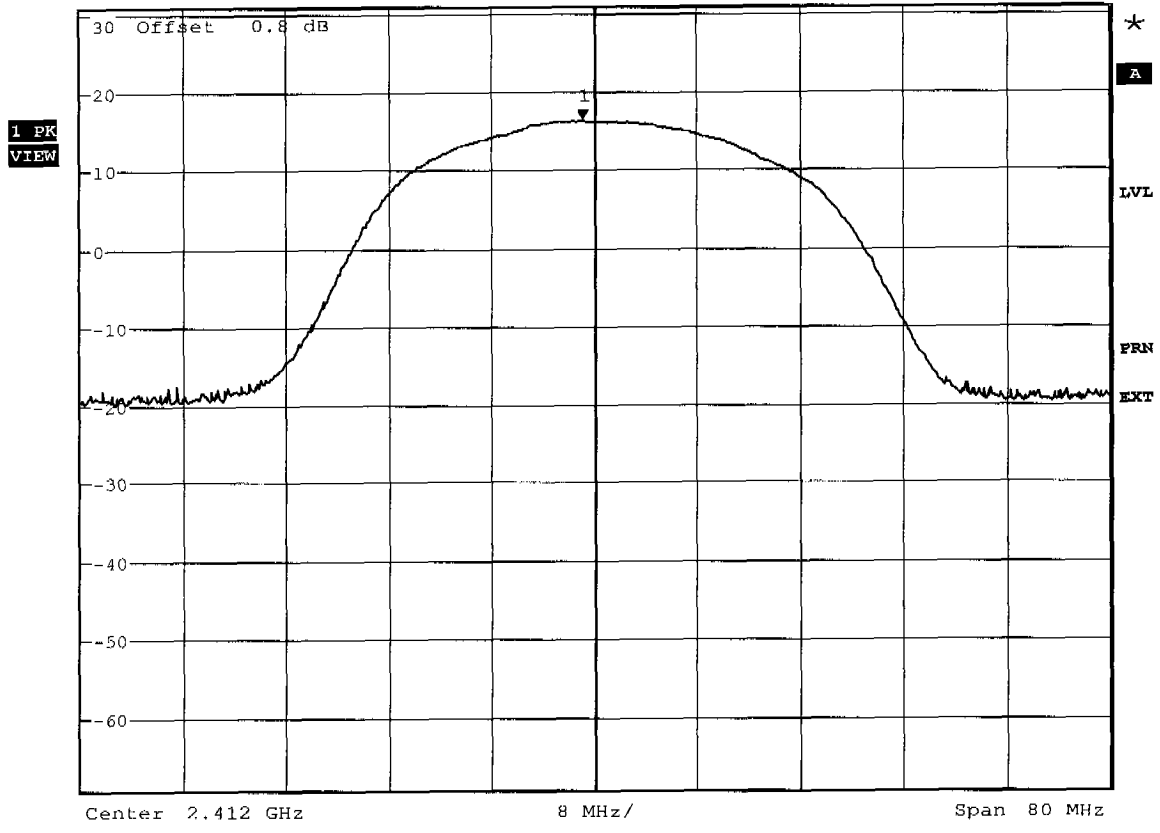

Comment A: Output Power Conducted 11Mb/s 115% Voltage  
Date: 5.DEC.2003 09:10:59






\*RBW 20 MHz      Marker 1 [T1 ]  
\*VBW 10 MHz      14.92 dBm  
SWT 2.5 ms      2.435974359 GHz

Ref 30.8 dBm      \*Att 50 dB

1 PK  
VIEW

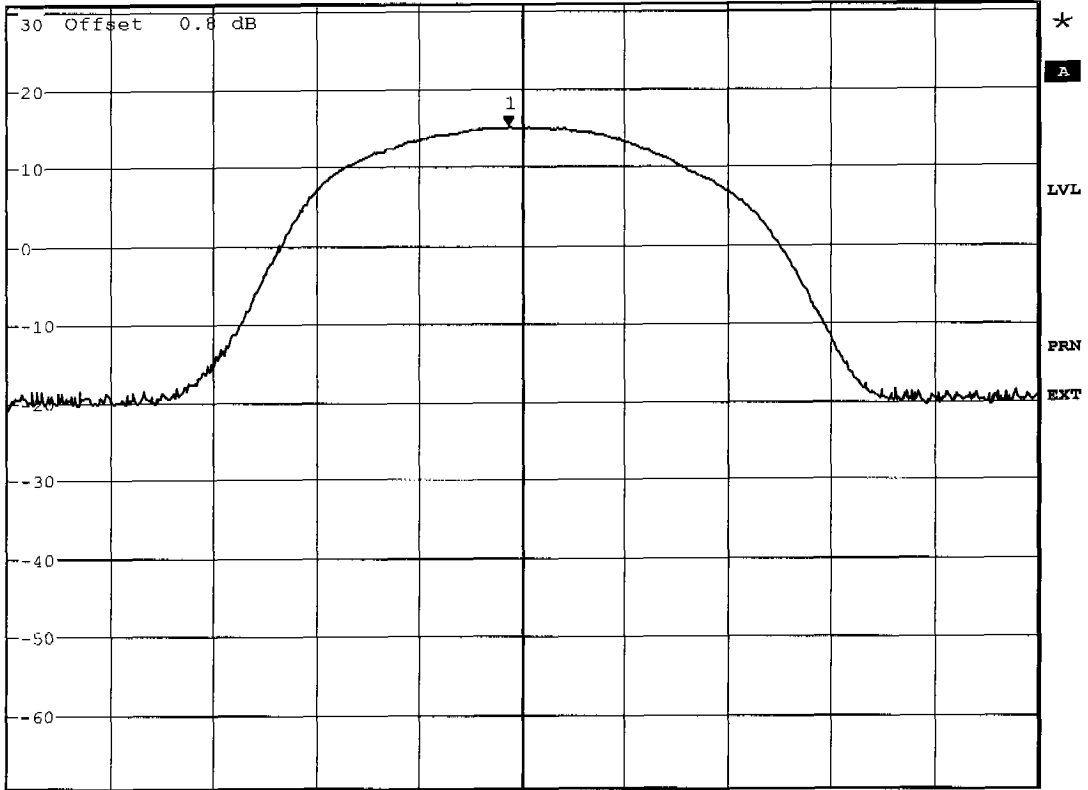

Center 2.437 GHz      8 MHz/      Span 80 MHz


Comment A: Output Power Conducted 11Mb/s 115% Voltage  
Date: 5.DEC.2003 09:11:37



\*RBW 20 MHz      Marker 1 [T1 ]  
\*VBW 10 MHz      13.31 dBm  
SWT 2.5 ms      2.460717949 GHz

Ref 30.8 dBm      \*Att 50 dB


1 PK  
VIEW

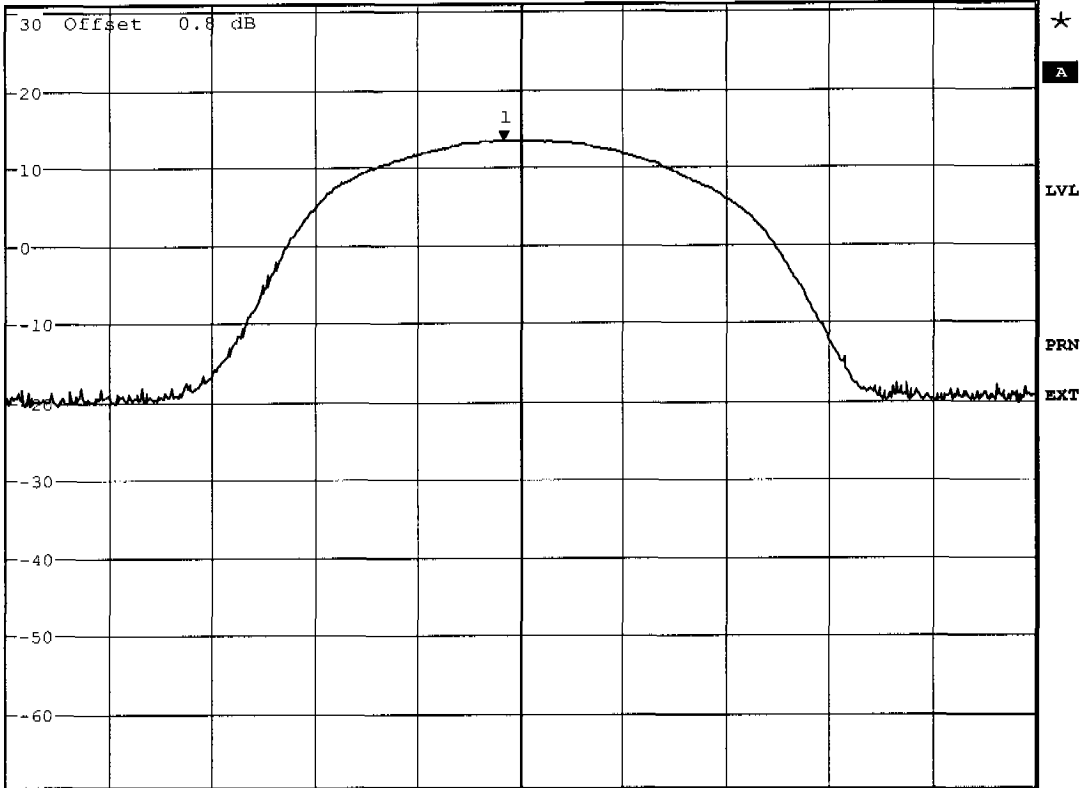

Comment A: Output Power Conducted 11Mb/s 115% Voltage  
Date: 5.DEC.2003 09:12:18


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.459GHz, Pmax: 17.27dBm, RBW: 10MHz

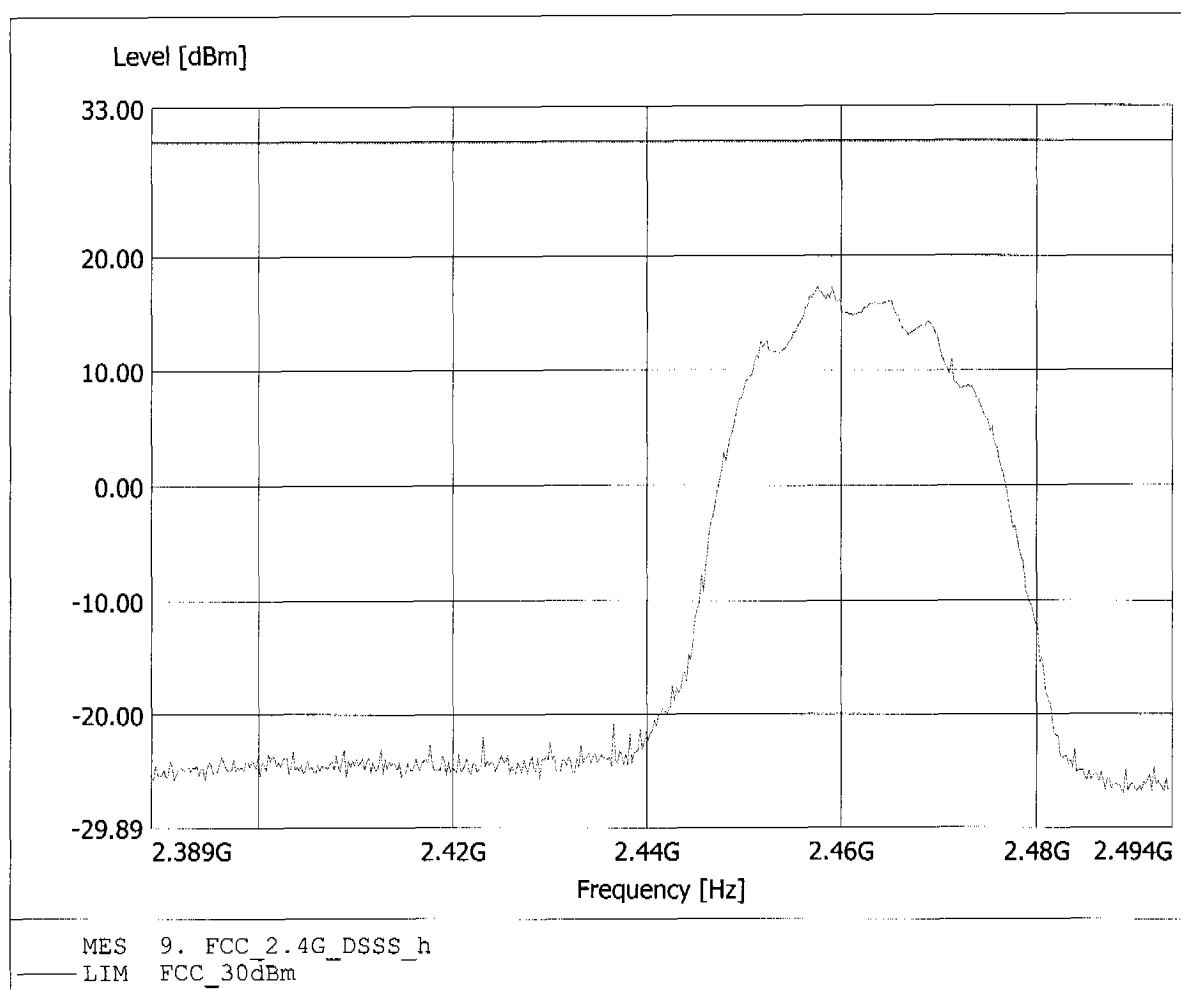


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.457GHz, Pmax: 8.29dBm, RBW: 10MHz

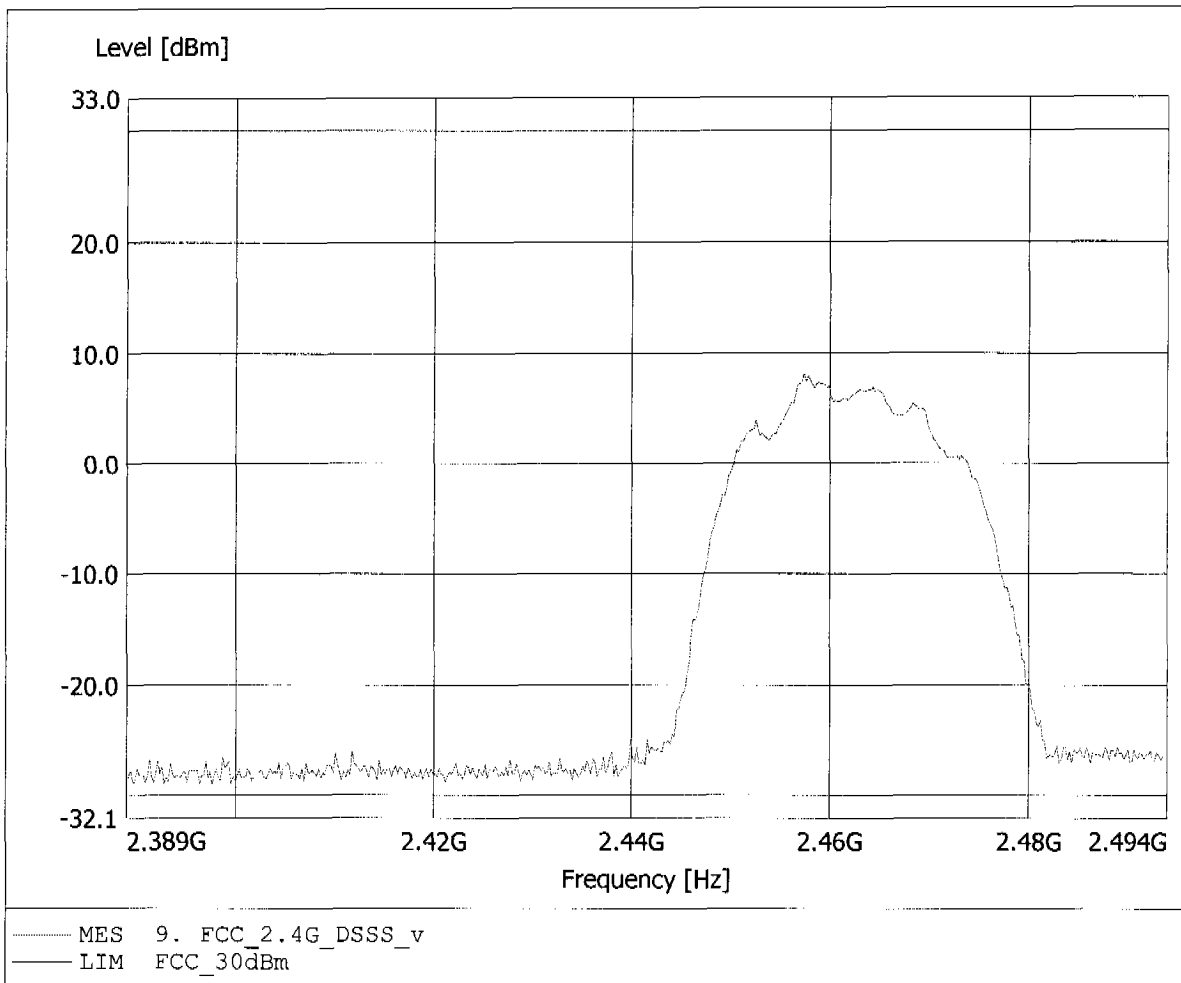


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.414GHz, Pmax: 16.85dBm, RBW: 10MHz

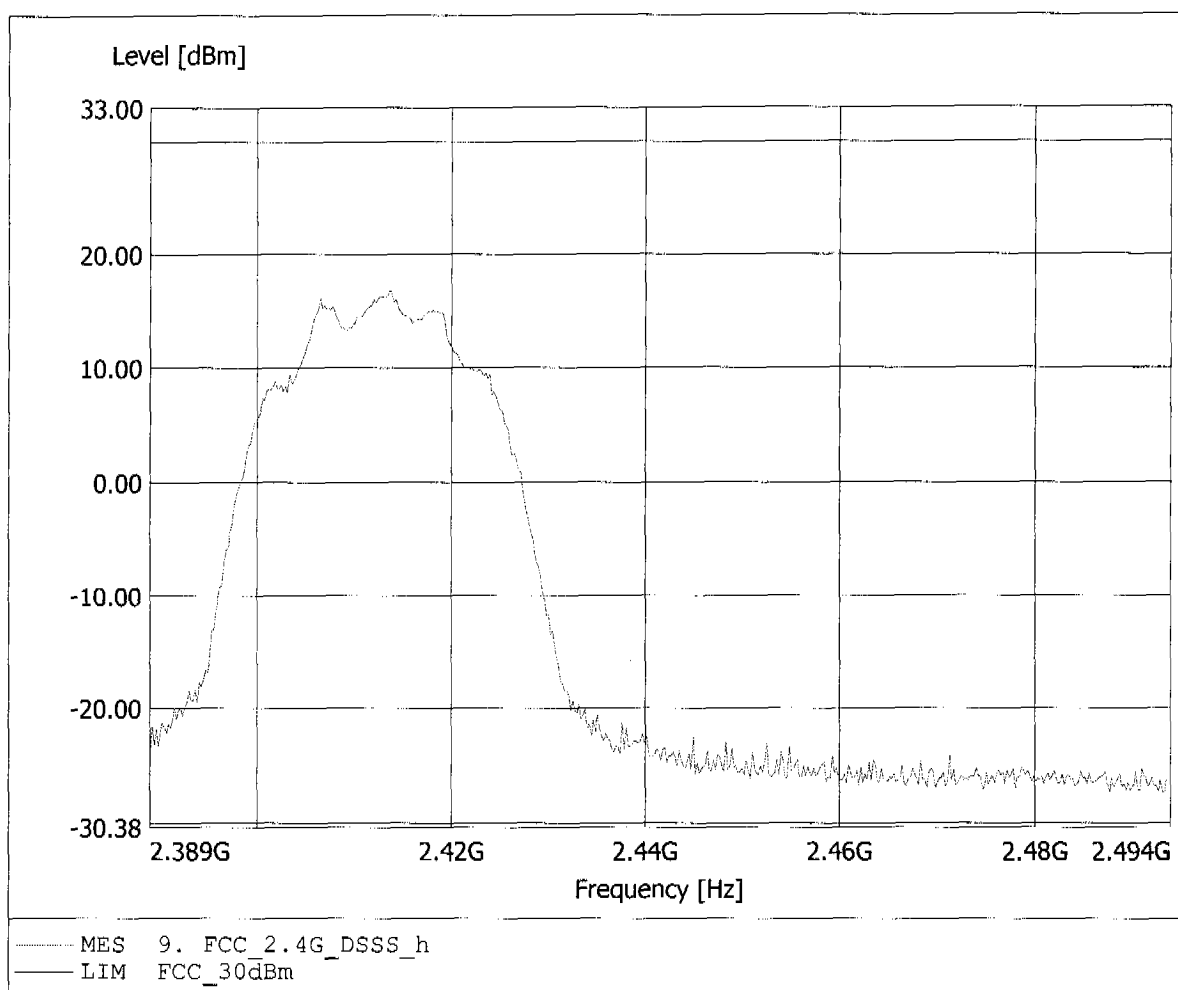


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.413GHz, Pmax: 5.83dBm, RBW: 10MHz

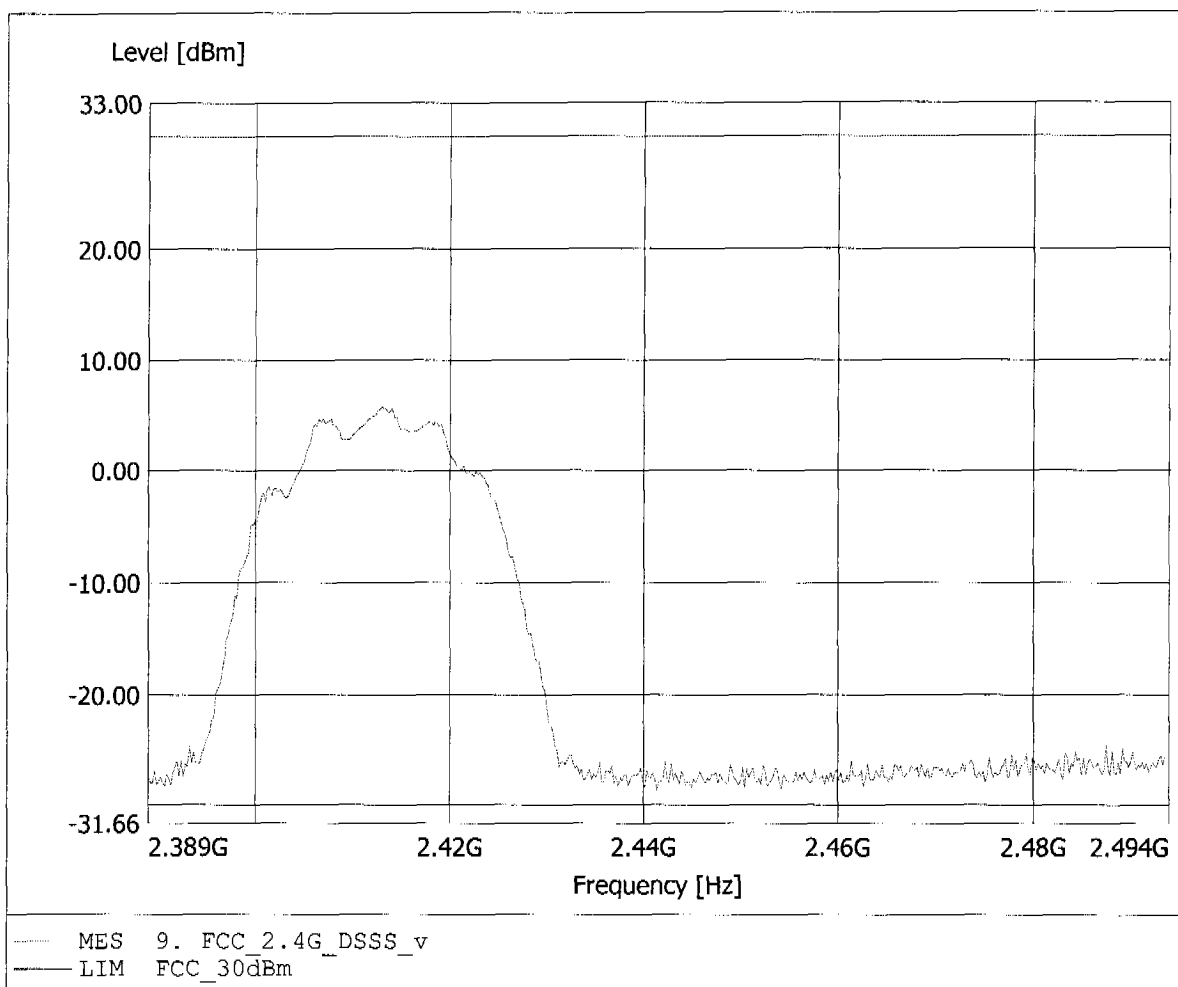


**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.432GHz, Pmax: 17.76dBm, RBW: 10MHz

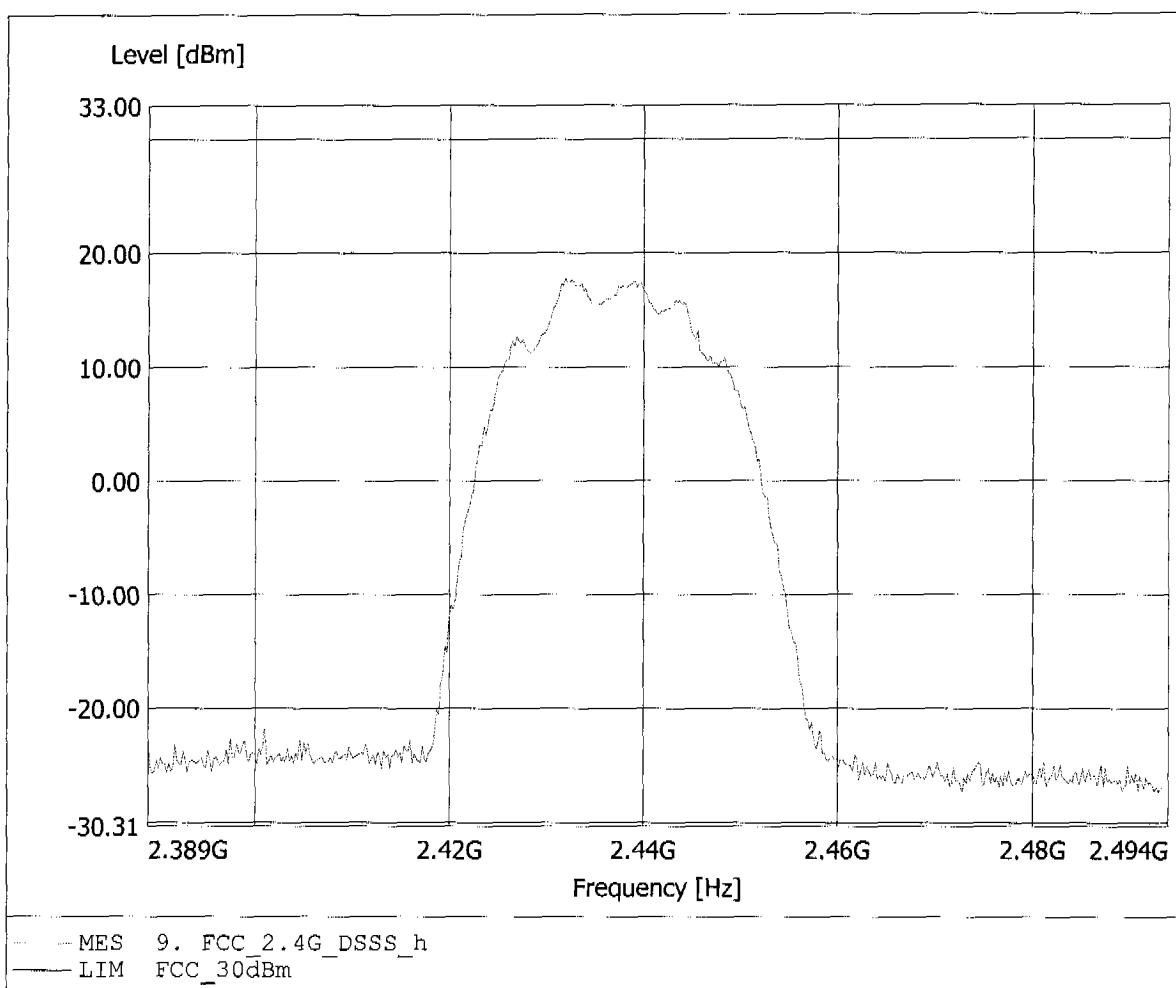

**Carrier power (dBm)**  
**FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.432GHz, Pmax: 6.98dBm, RBW: 10MHz

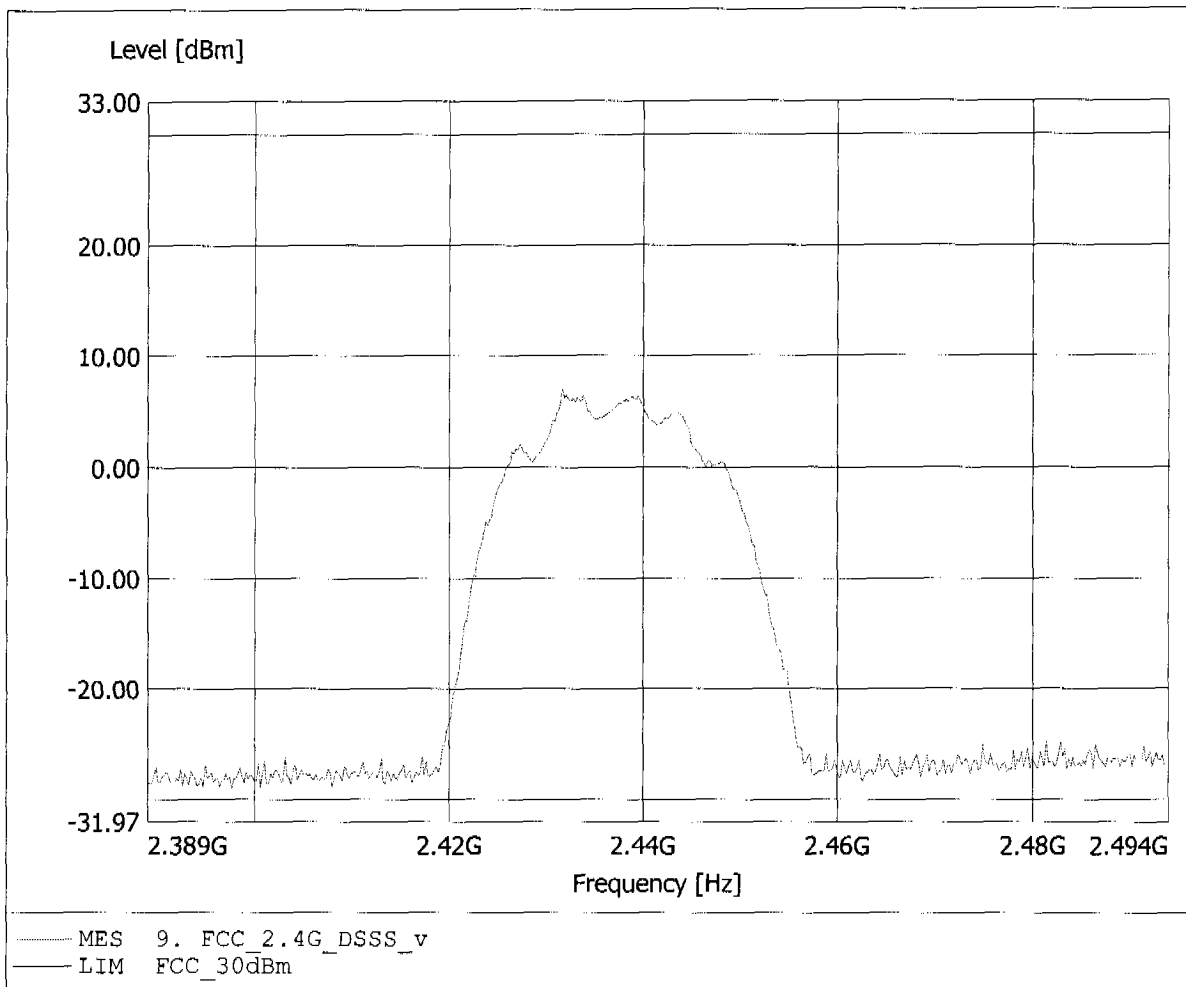






## Appendix C

Spurious Emissions radiated - Transmitter operating


**Carrier power (Field Strength)**  
**FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: BBHA9120D  
Comment 2: Freq: 2.438GHz, Emax: 94.46dBµV/m, RBW: 100kHz

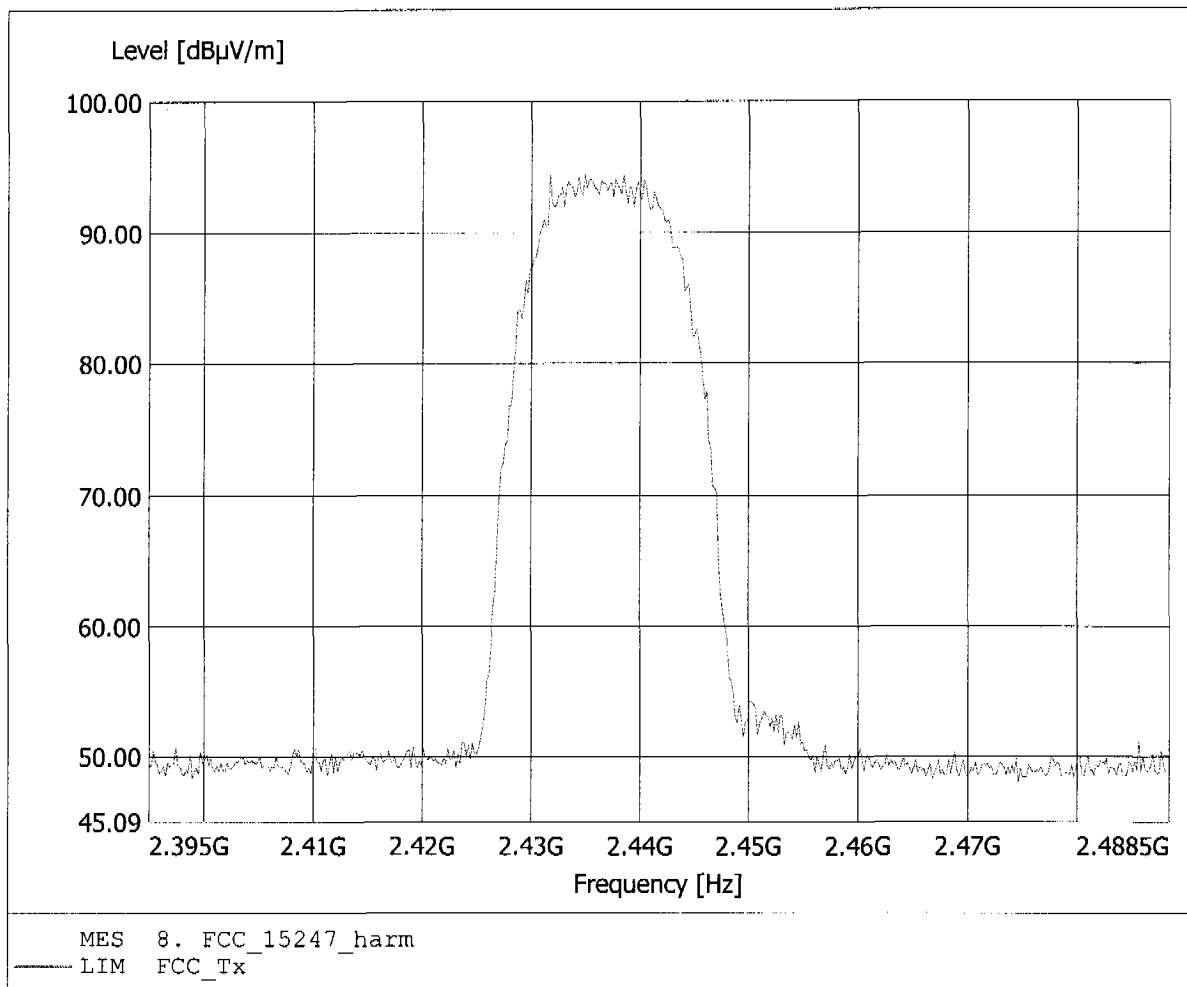


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 198.637MHz, Emax: 31.05dBµV/m, RBW: 100kHz

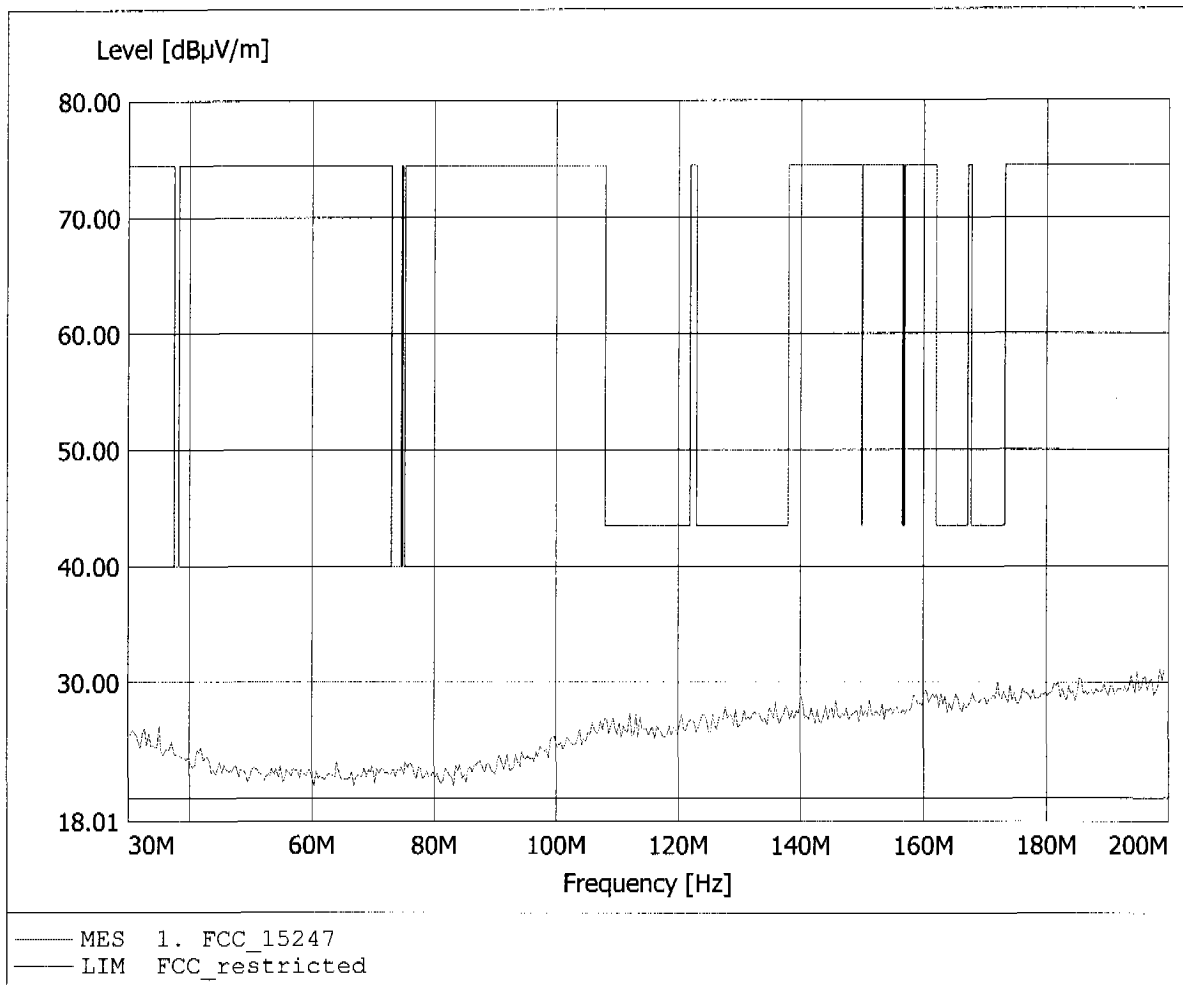


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 191.824MHz, Emax: 31.96dBµV/m, RBW: 100kHz

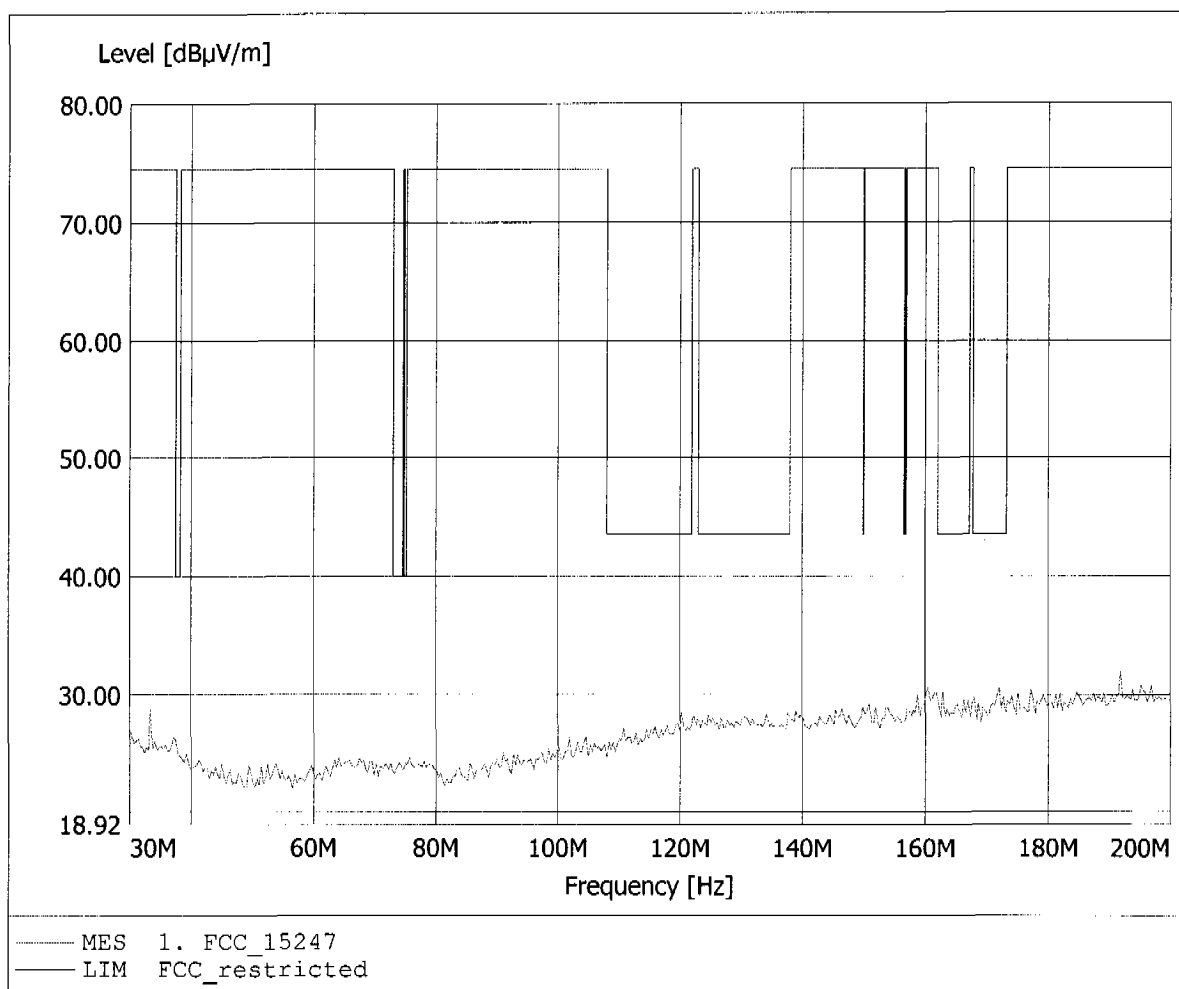


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 318.637MHz, Emax: 46.16dBµV/m, RBW: 100kHz

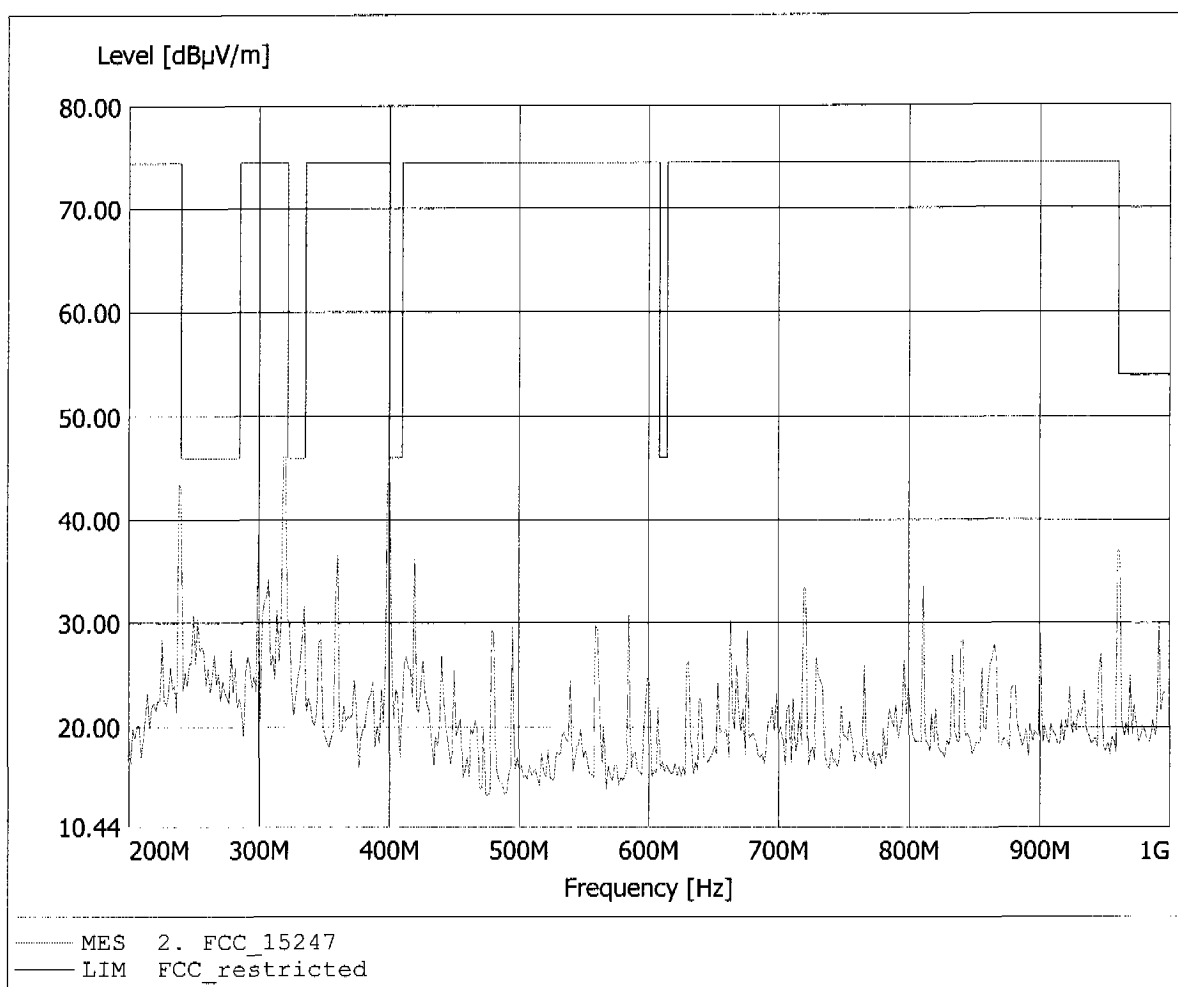


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 318.637MHz, Emax: 46.16dBµV/m, RBW: 100kHz

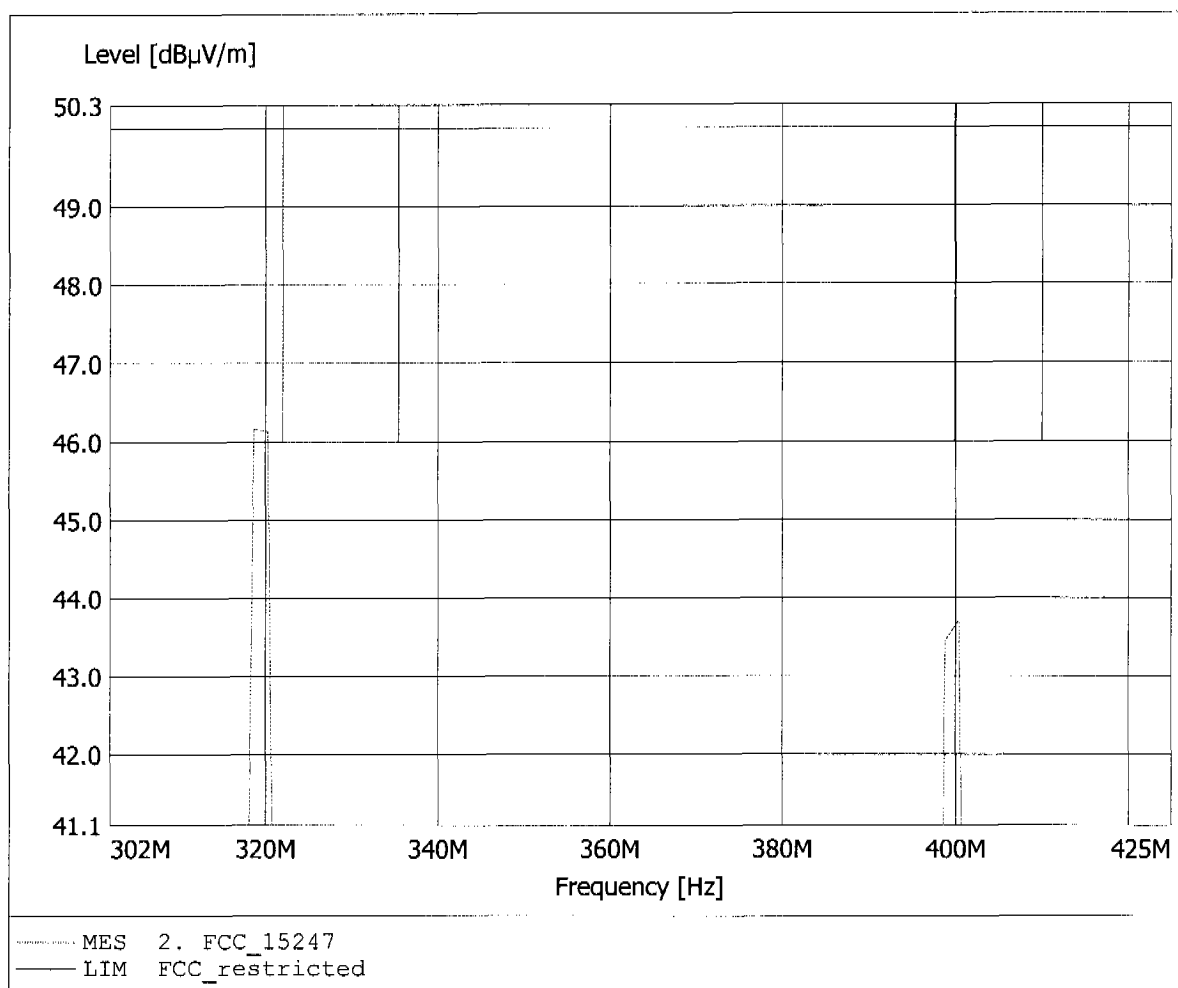


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 320.240MHz, Emax: 45.71dBµV/m, RBW: 100kHz

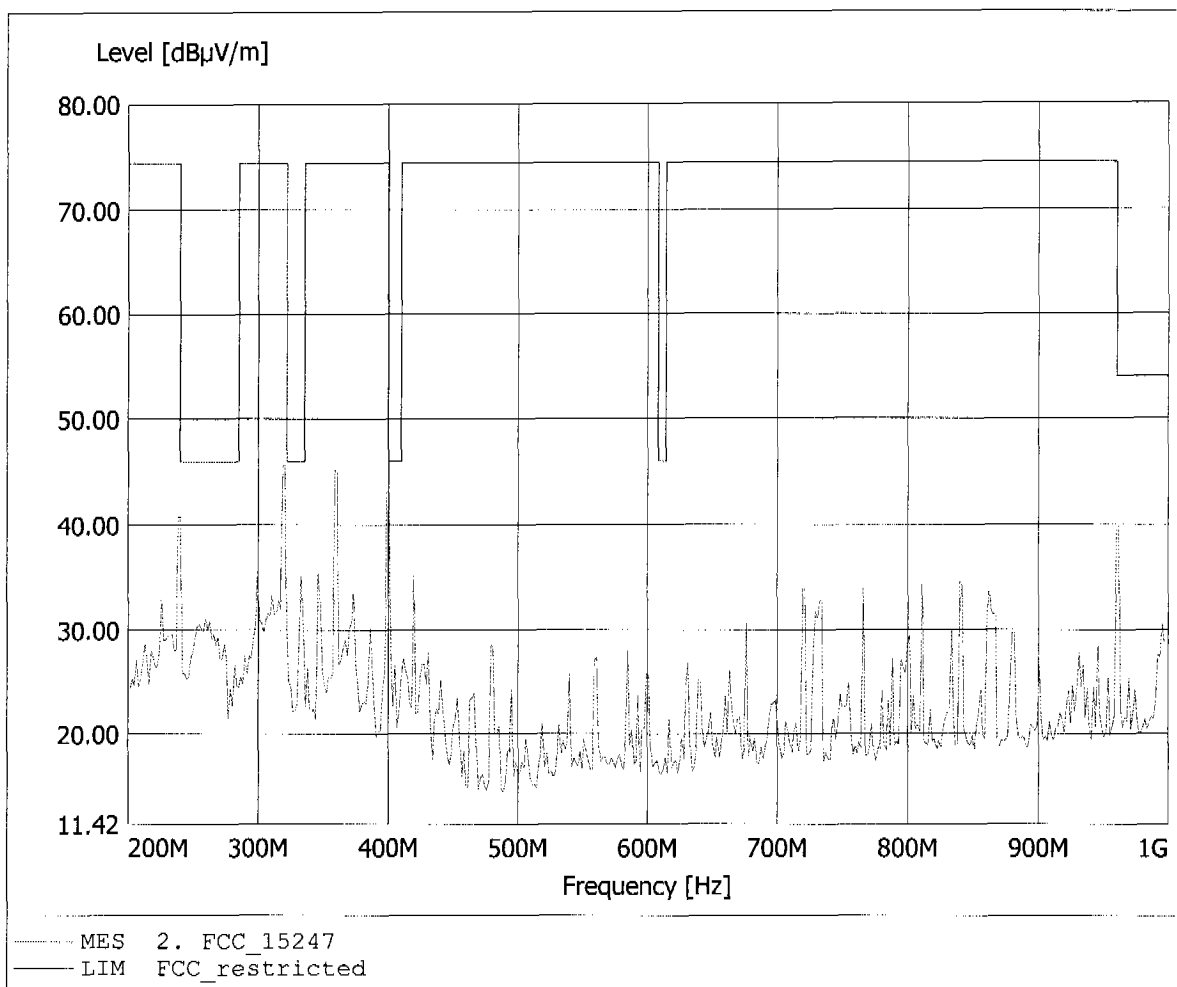

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 320.240MHz, Emax: 45.71dBµV/m, RBW: 100kHz

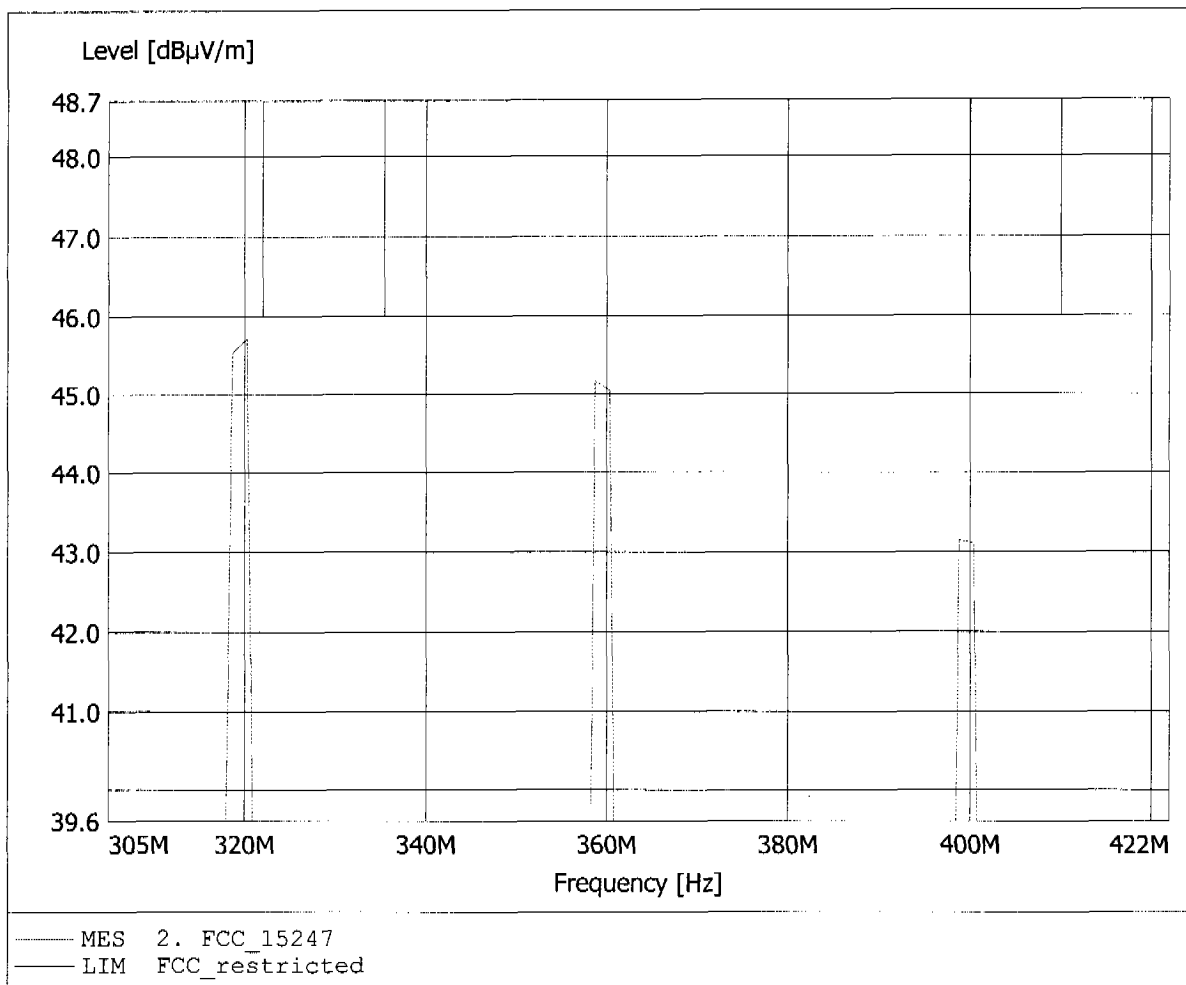




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.397GHz, Emax: 60.92dBµV/m, RBW: 1MHz

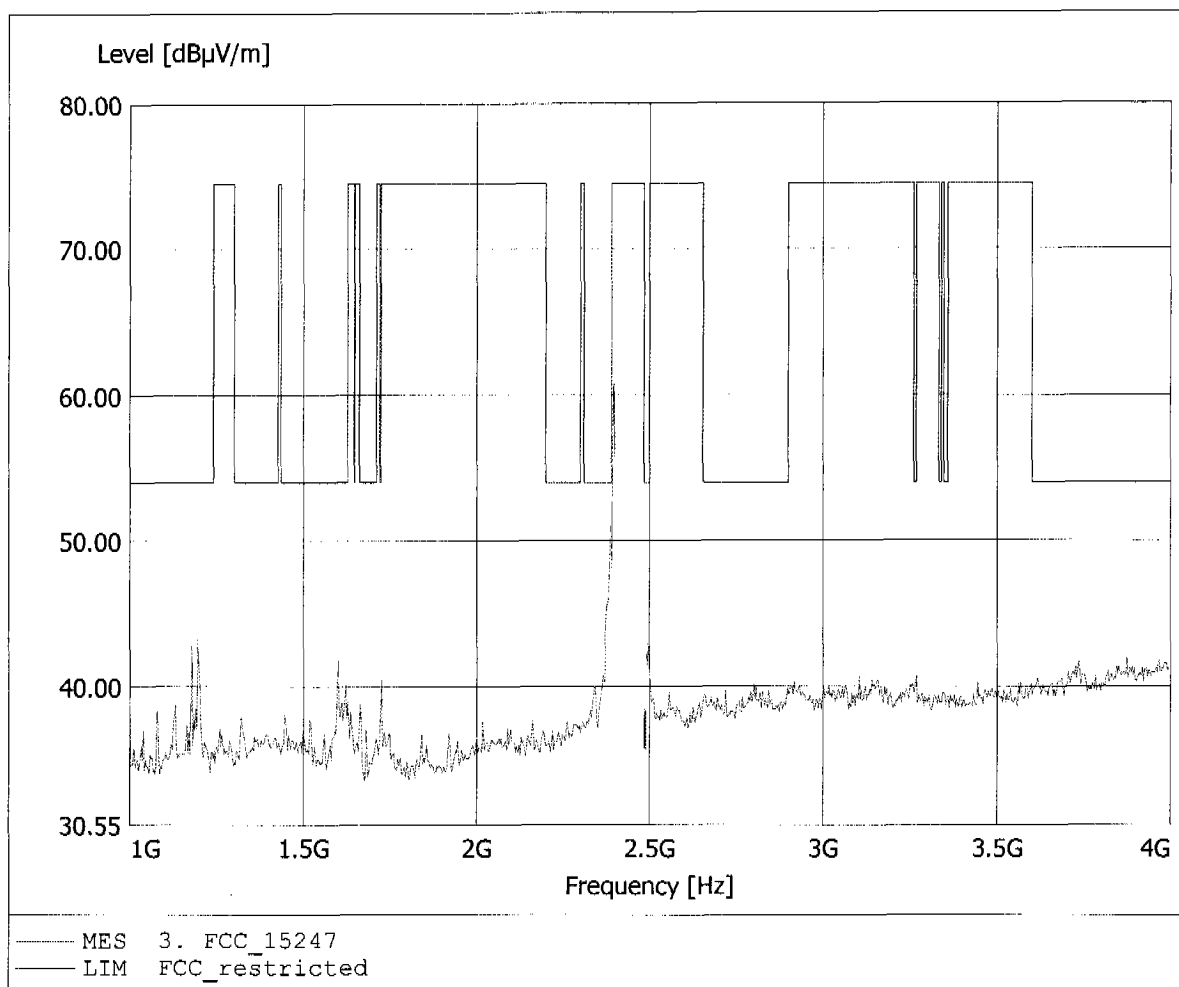


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.397GHz, Emax: 60.92dBµV/m, RBW: 1MHz

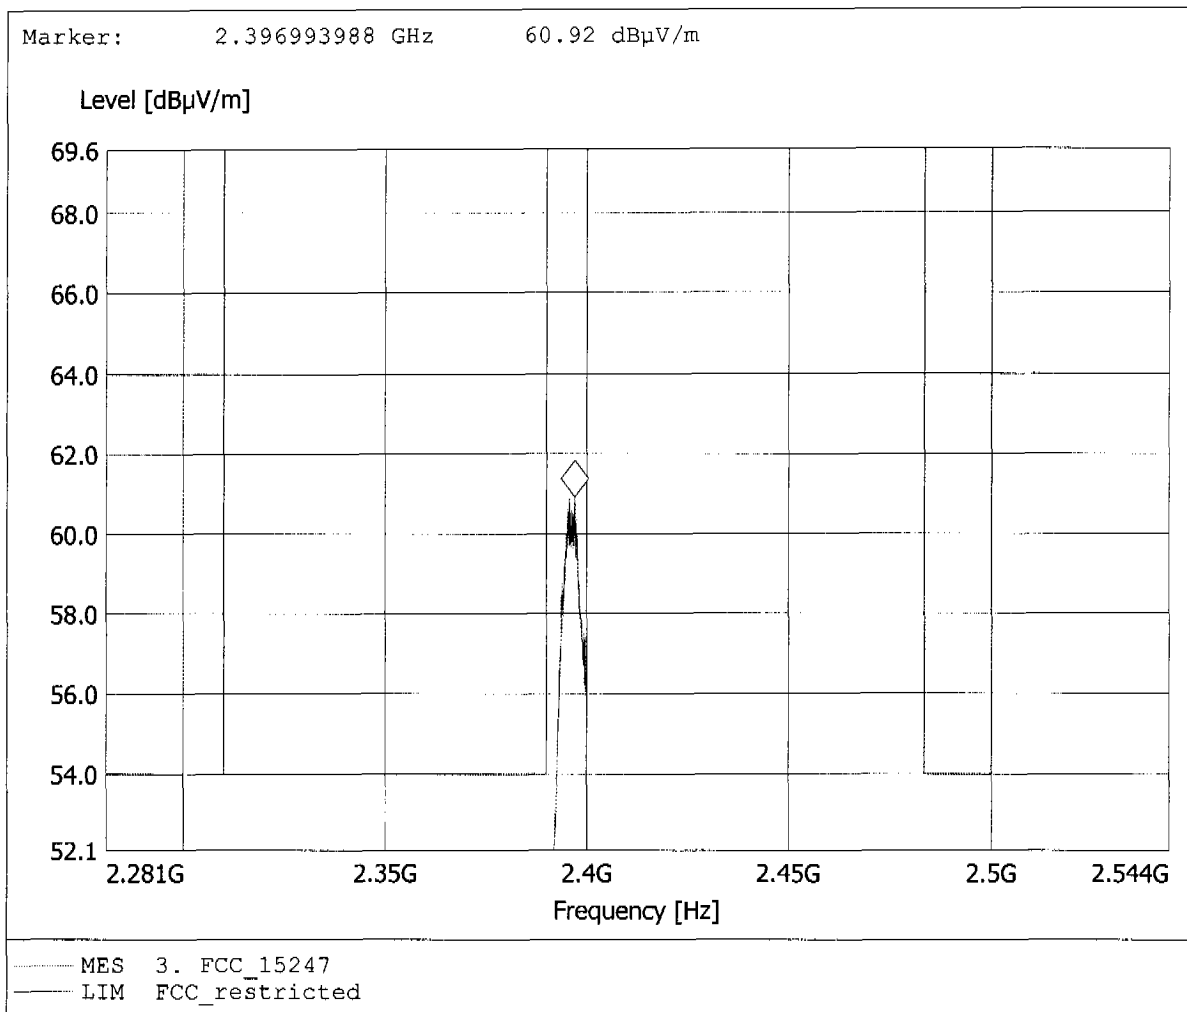


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.396GHz, Emax: 55.91dBuV/m, RBW: 1MHz

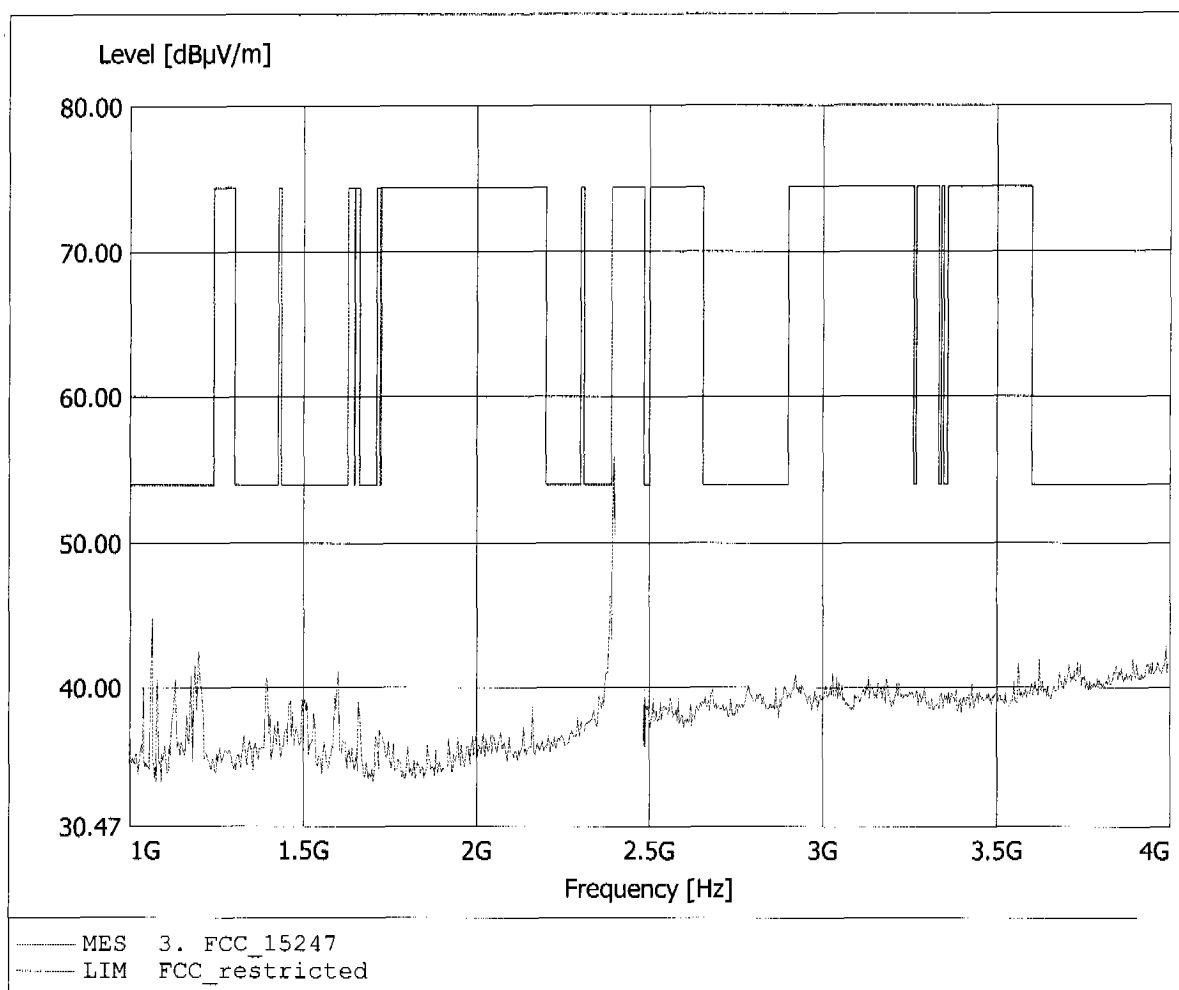


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.396GHz, Emax: 55.91dBµV/m, RBW: 1MHz

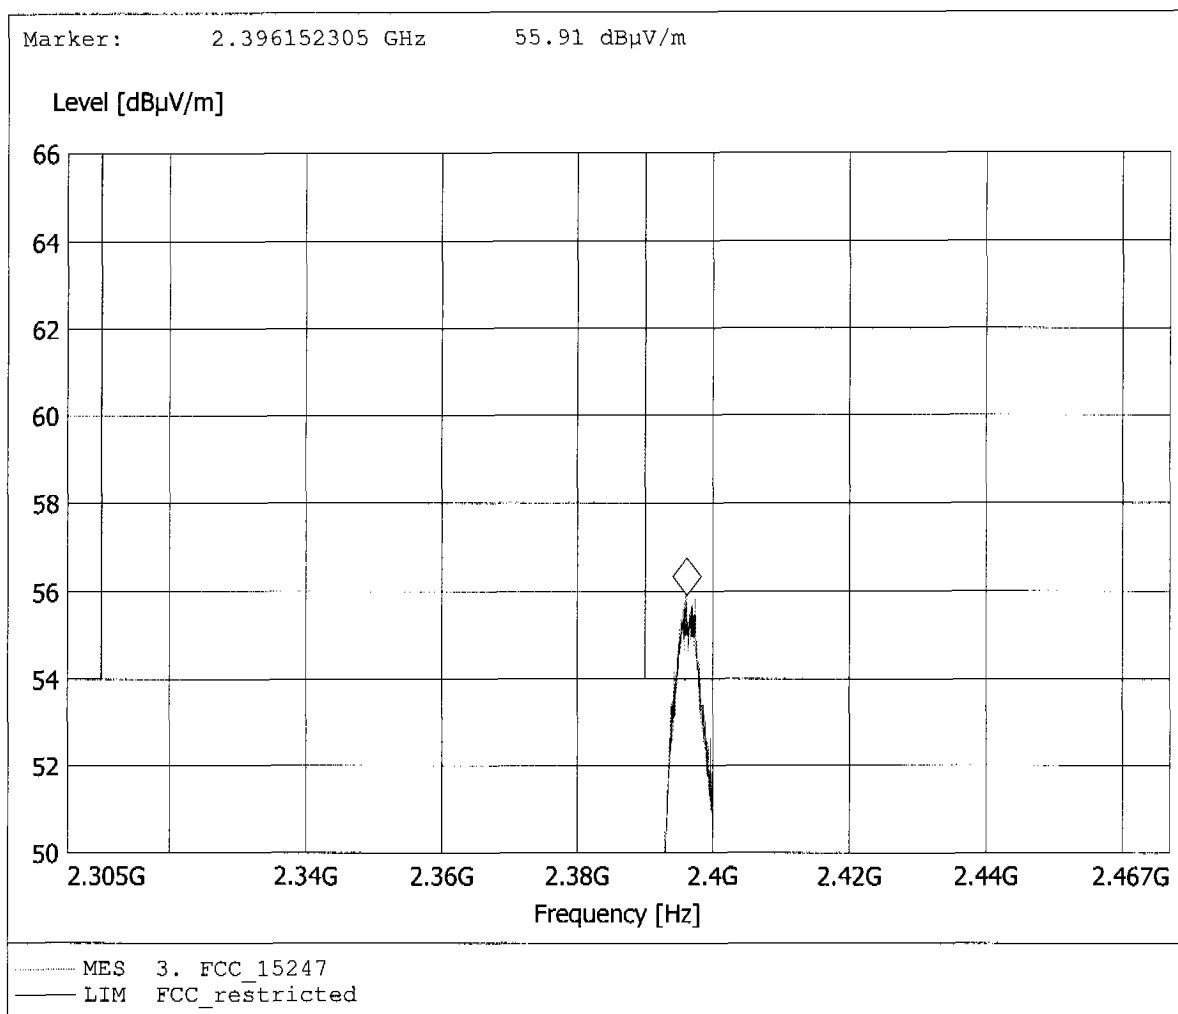


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 4.826GHz, Emax: 45.18dBµV/m, RBW: 1MHz

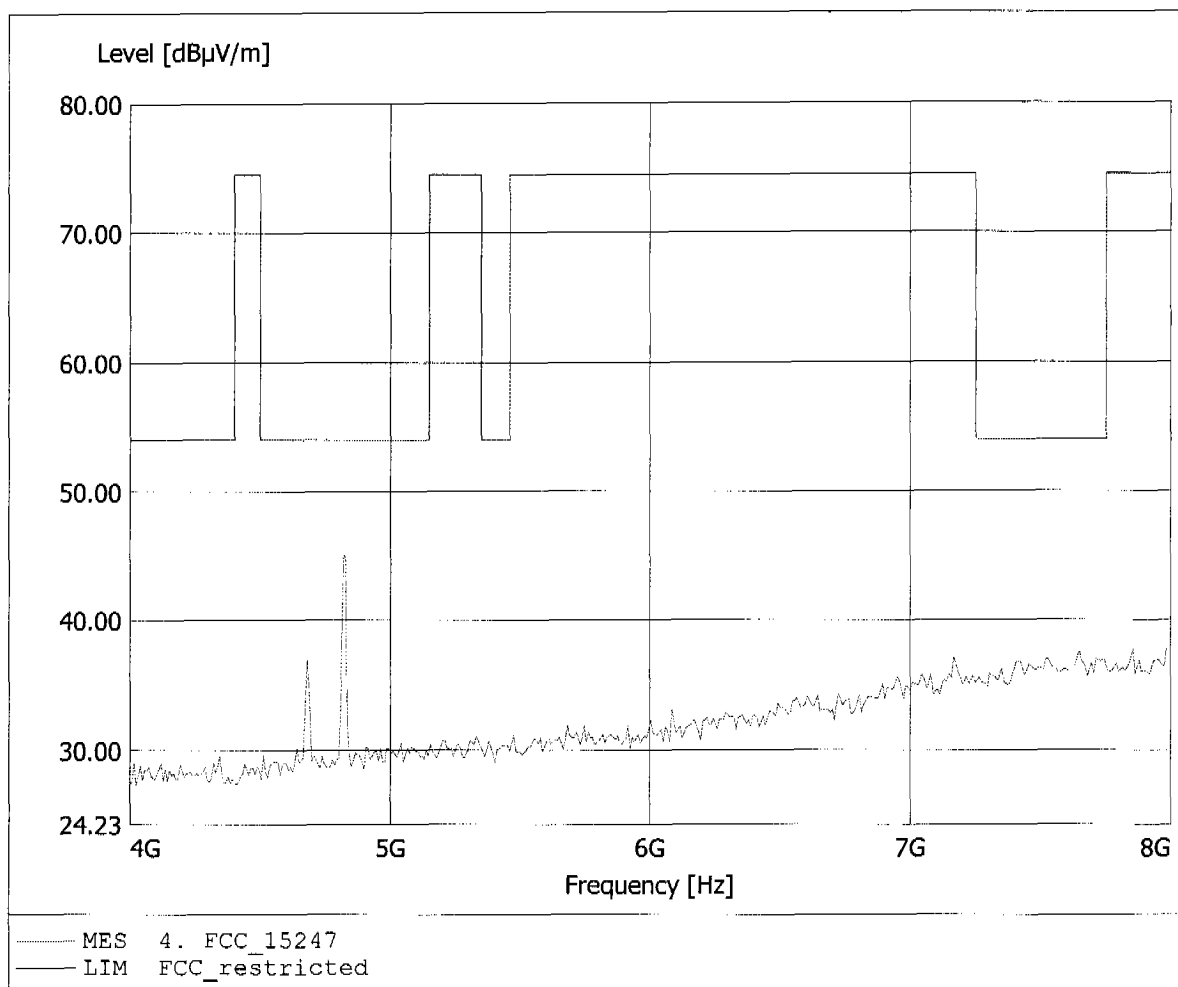


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 4.826GHz, Emax: 42.65dBµV/m, RBW: 1MHz

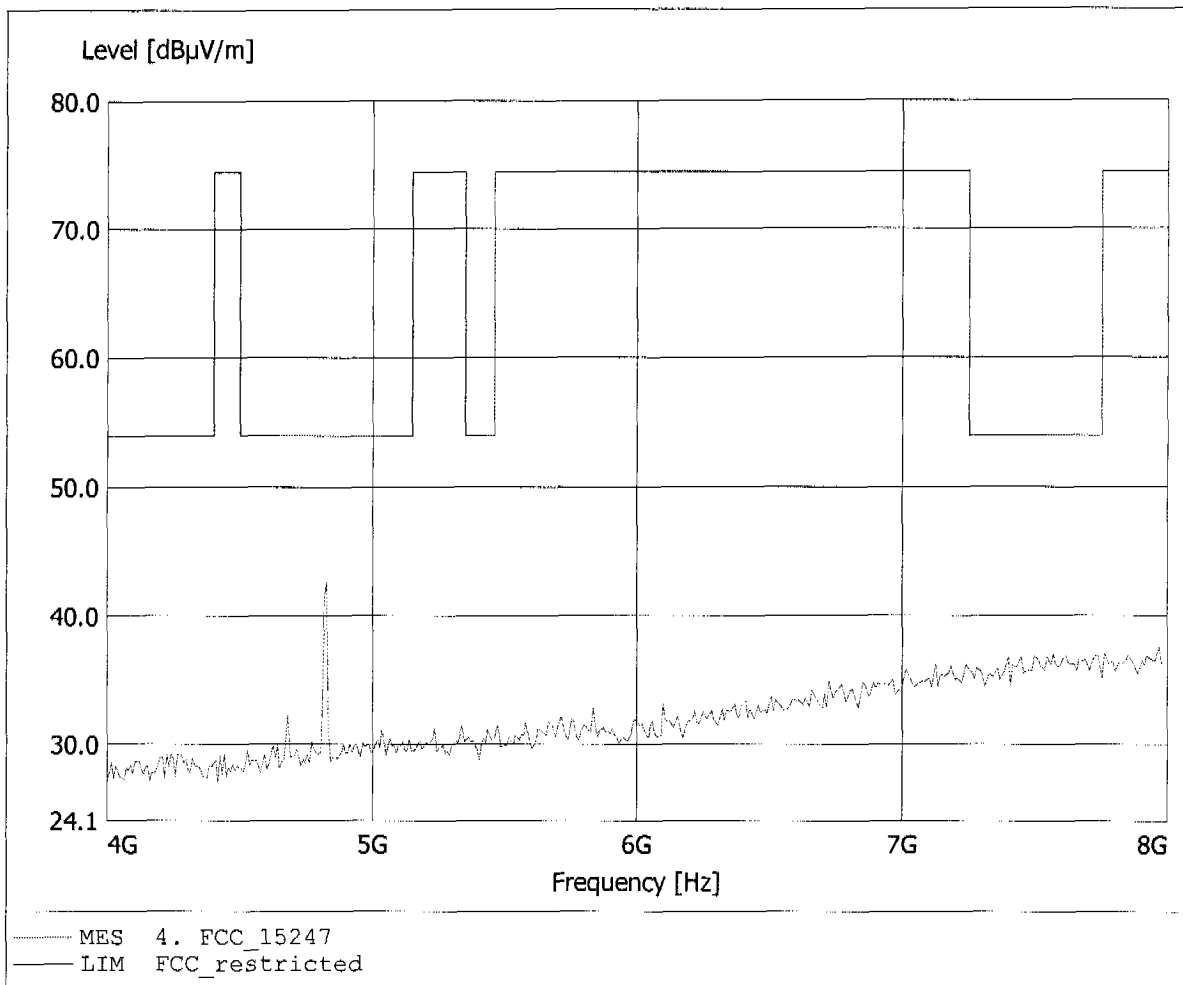


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.735GHz, Emax: 42.16dBµV/m, RBW: 1MHz

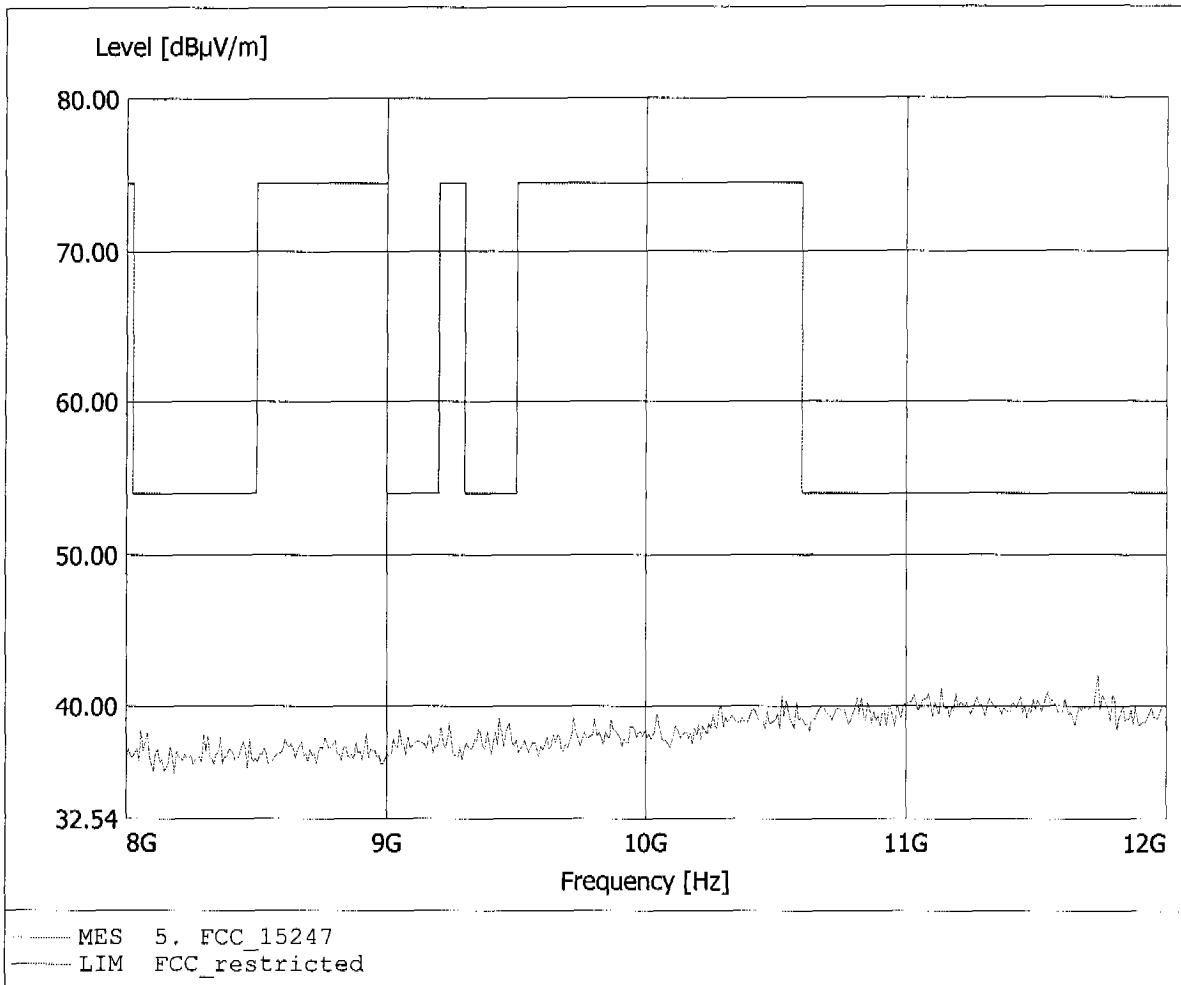

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 9.643GHz, Emax: 42.99dBuV/m, RBW: 1MHz

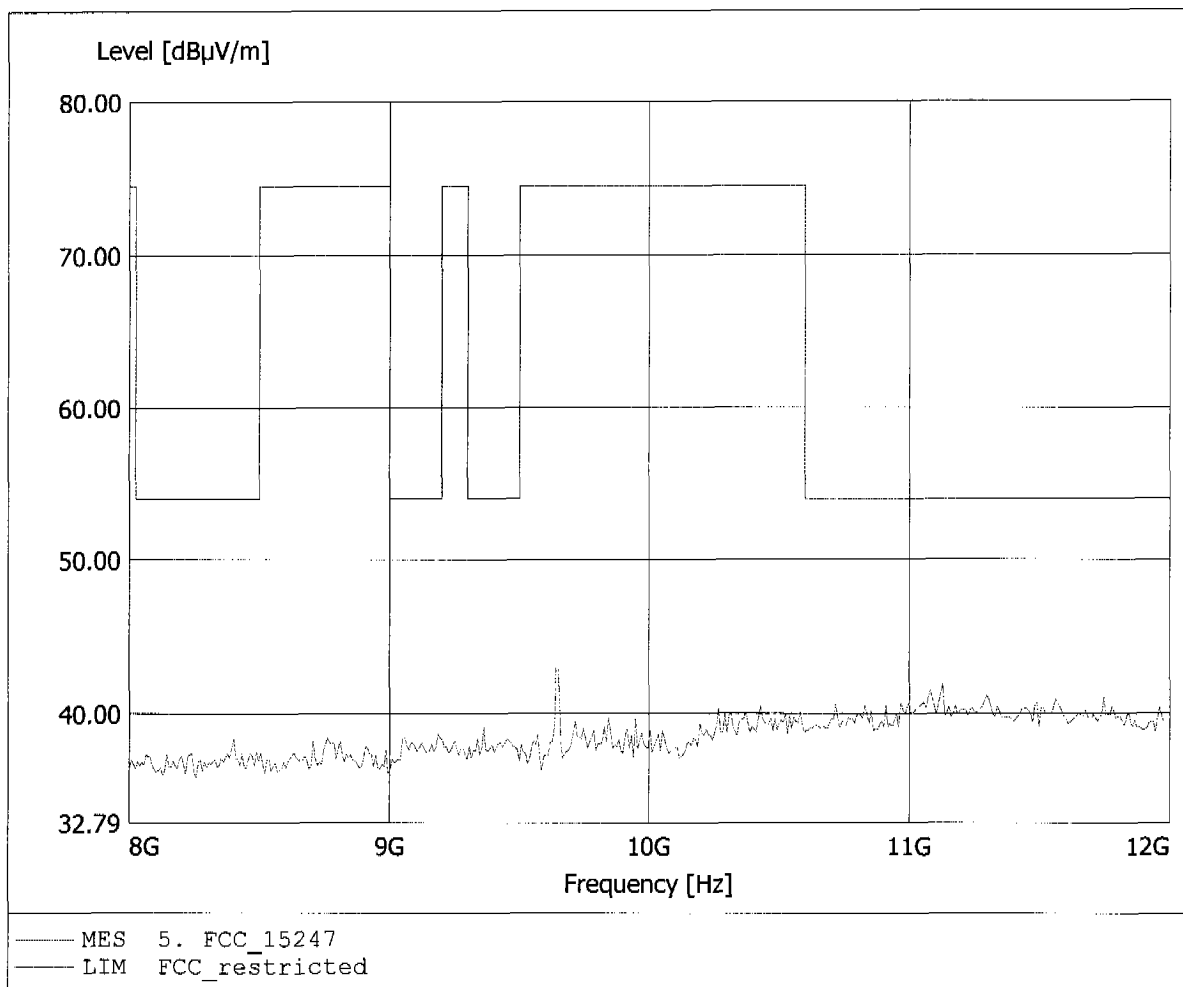




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.114GHz, Emax: 43.69dBµV/m, RBW: 1MHz

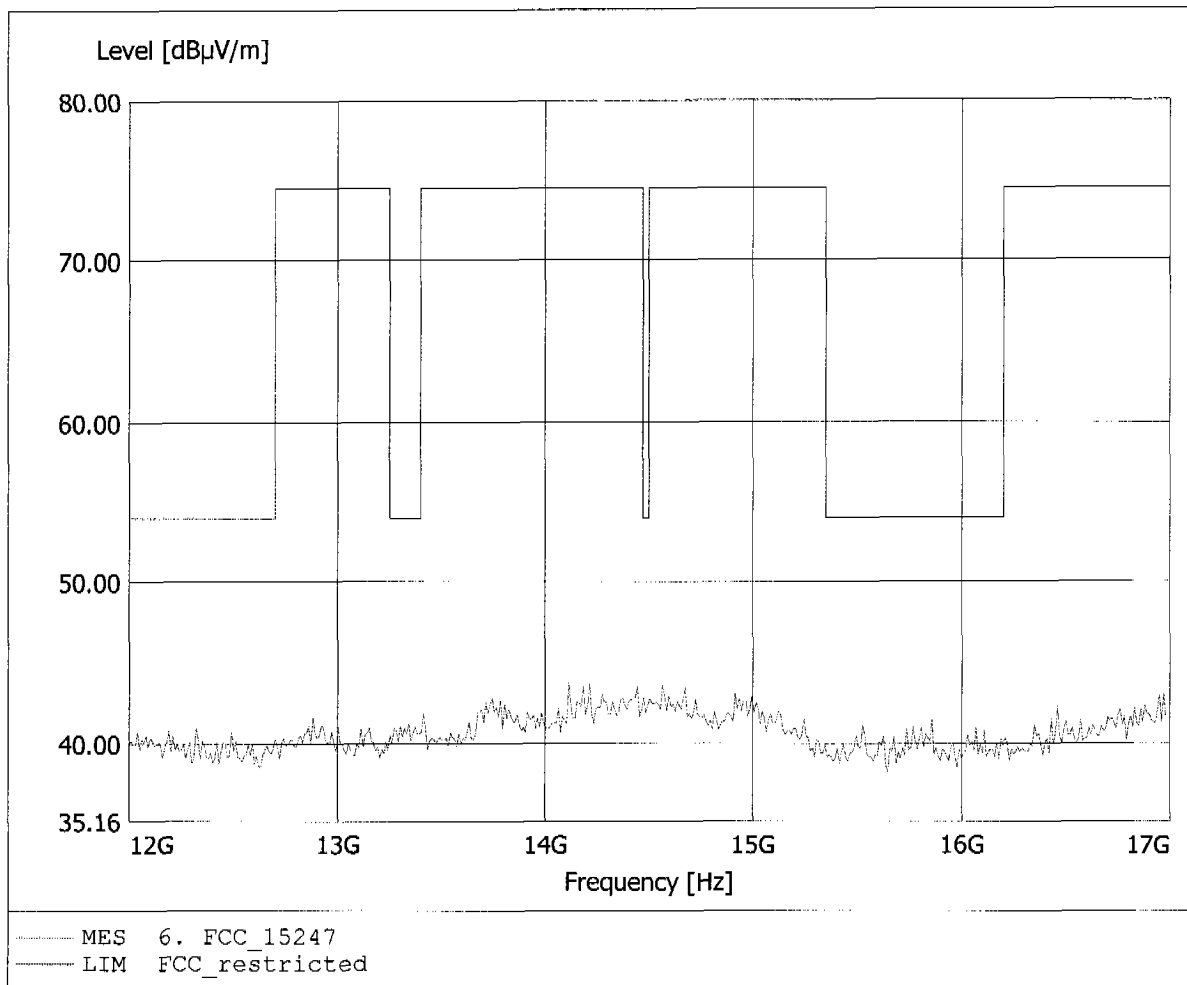


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.475GHz, Emax: 44.79dBµV/m, RBW: 1MHz

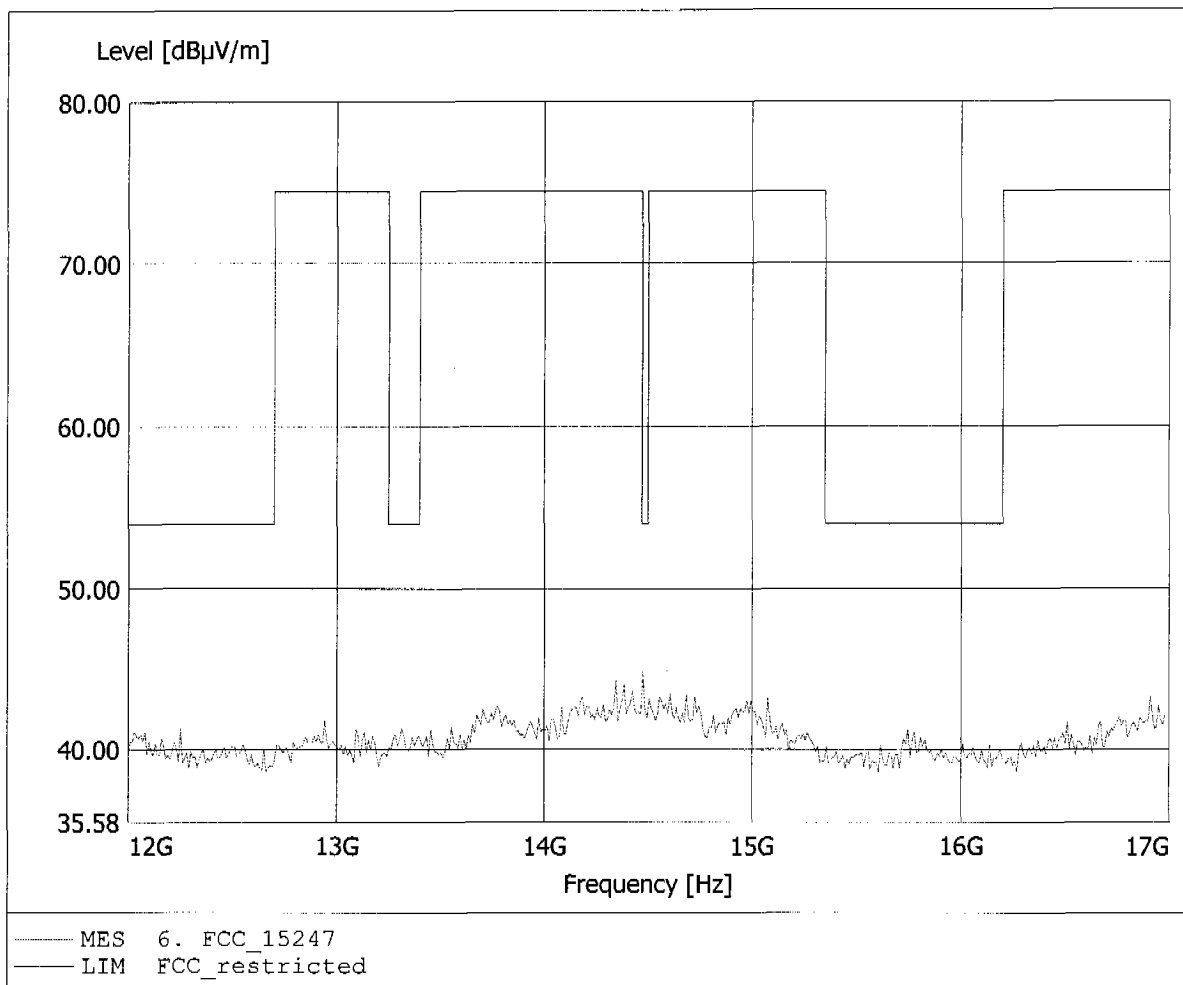


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.000GHz, Emax: 44.53dBµV/m, RBW: 1MHz

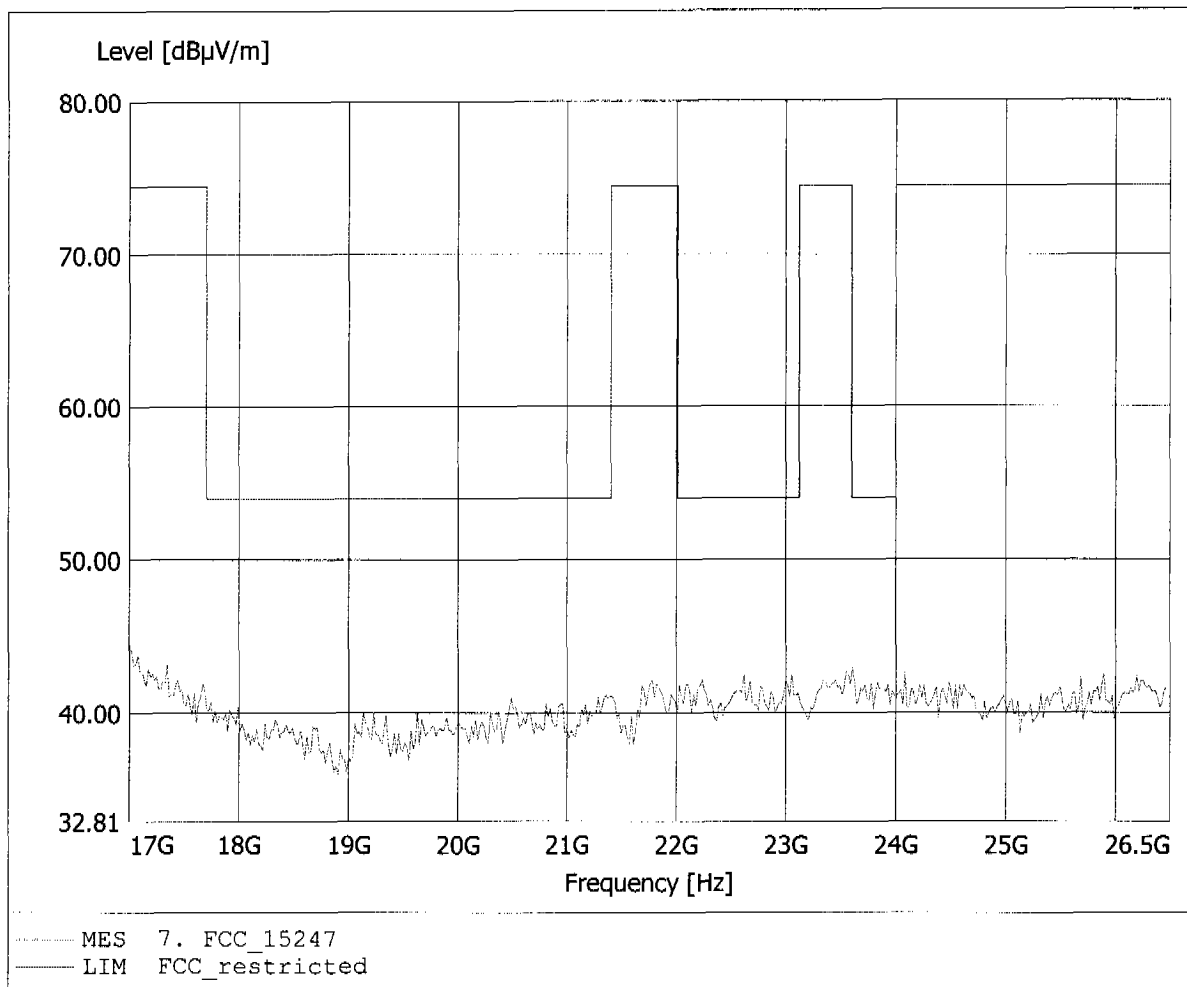


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:1  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.019GHz, Emax: 44.48dBµV/m, RBW: 1MHz

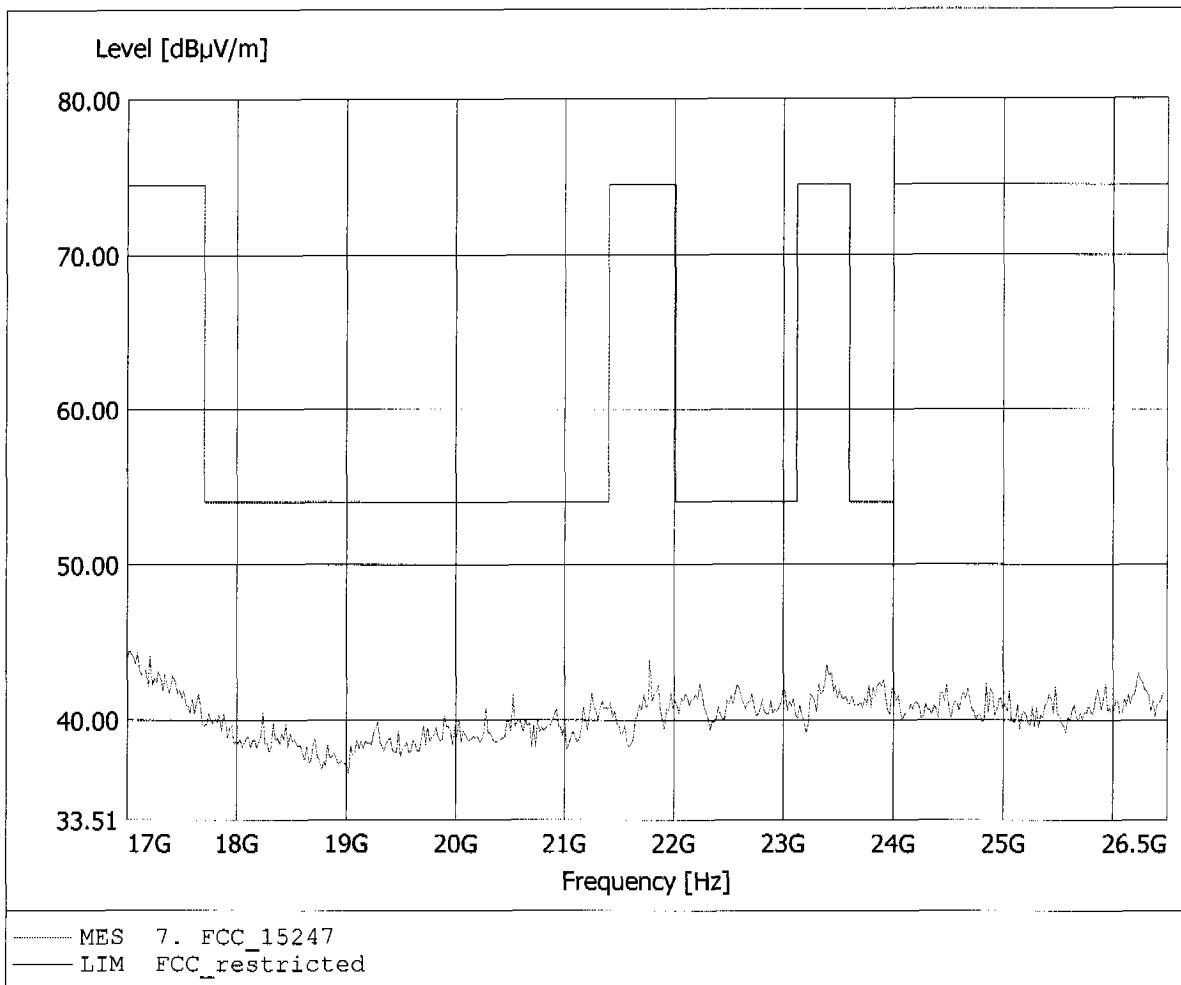


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 178.878MHz, Emax: 31.19dBuV/m, RBW: 100kHz

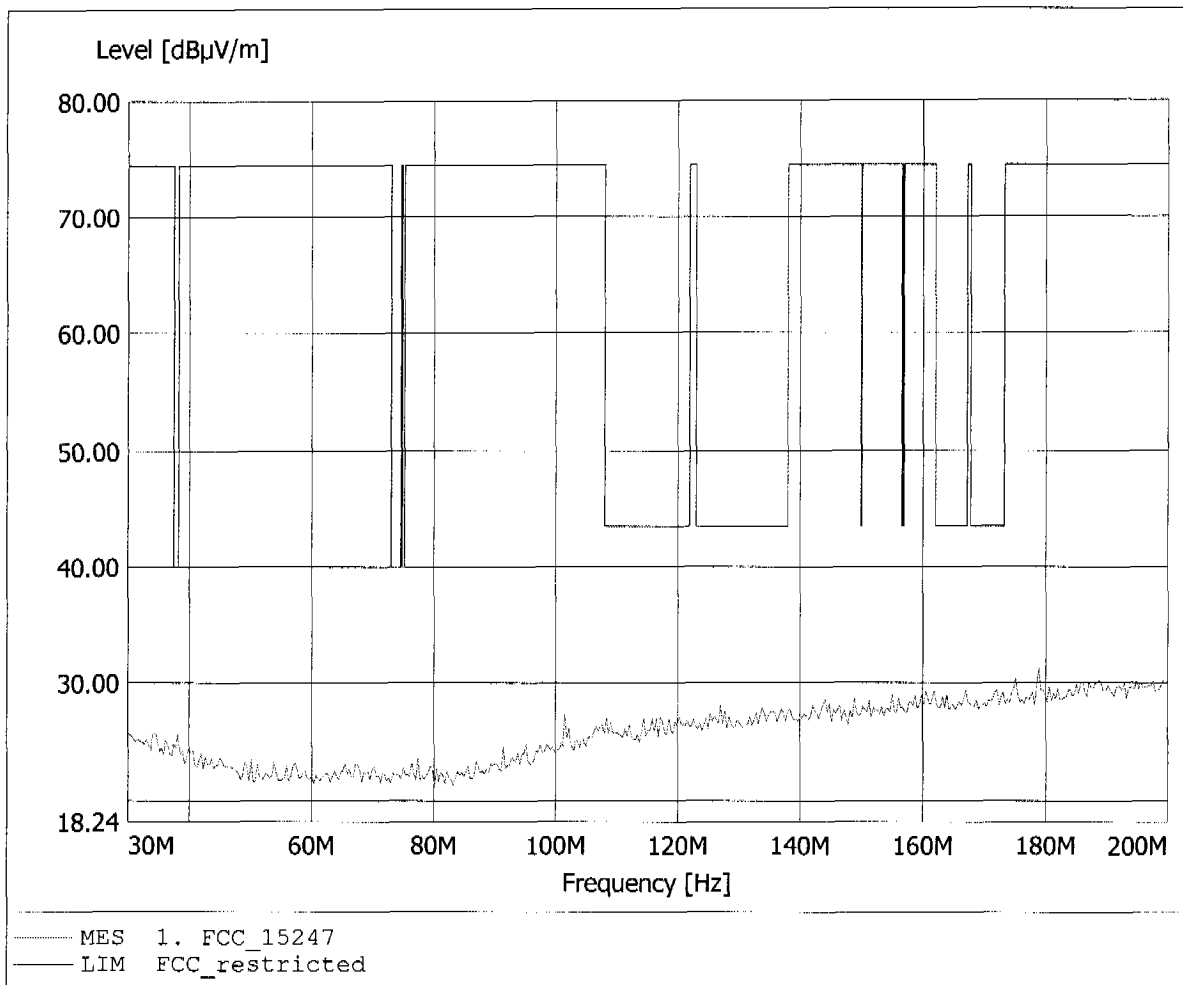


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 161.844MHz, Emax: 31.64dBµV/m, RBW: 100kHz

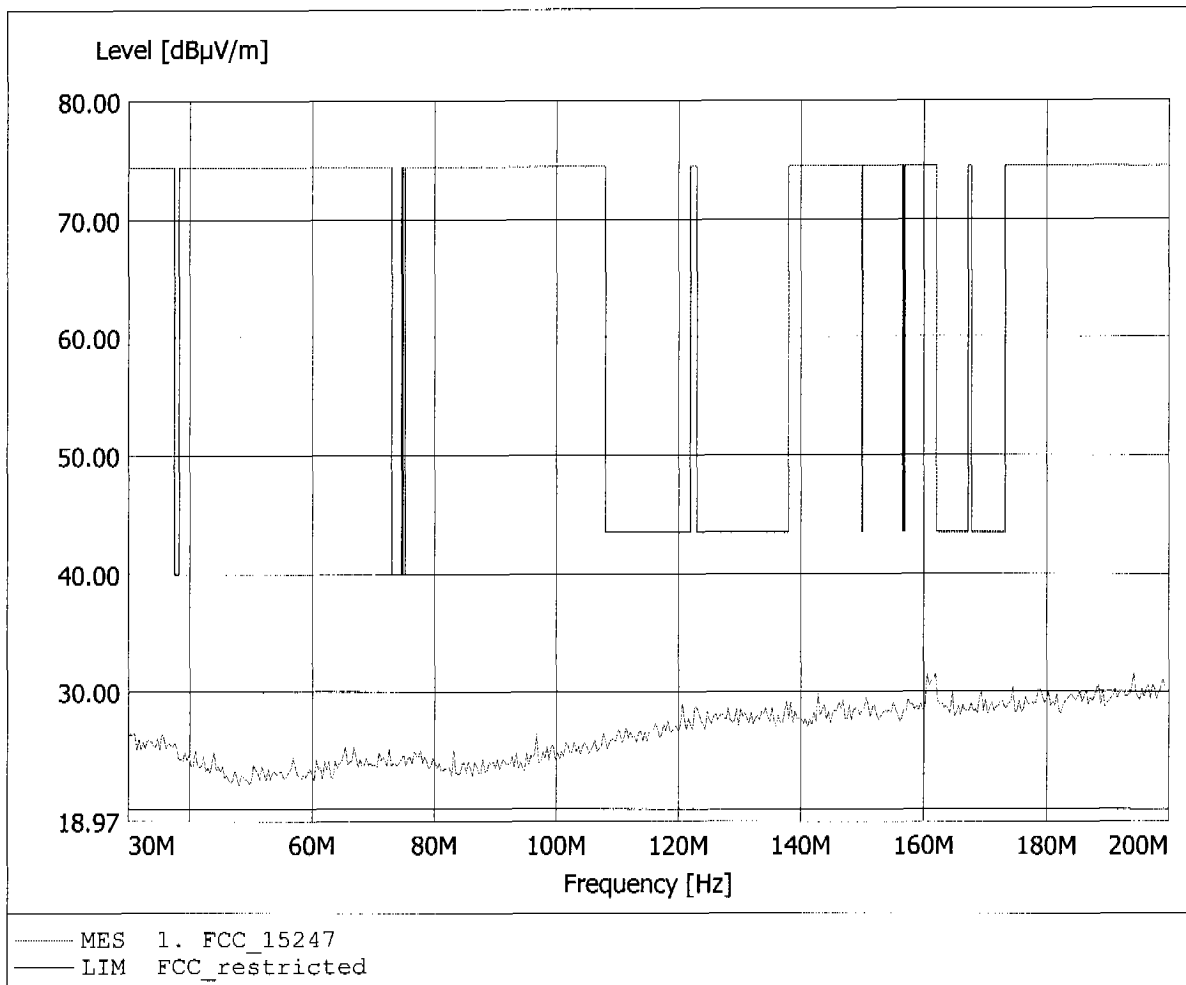


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 320.240MHz, Emax: 46.49dBµV/m, RBW: 100kHz

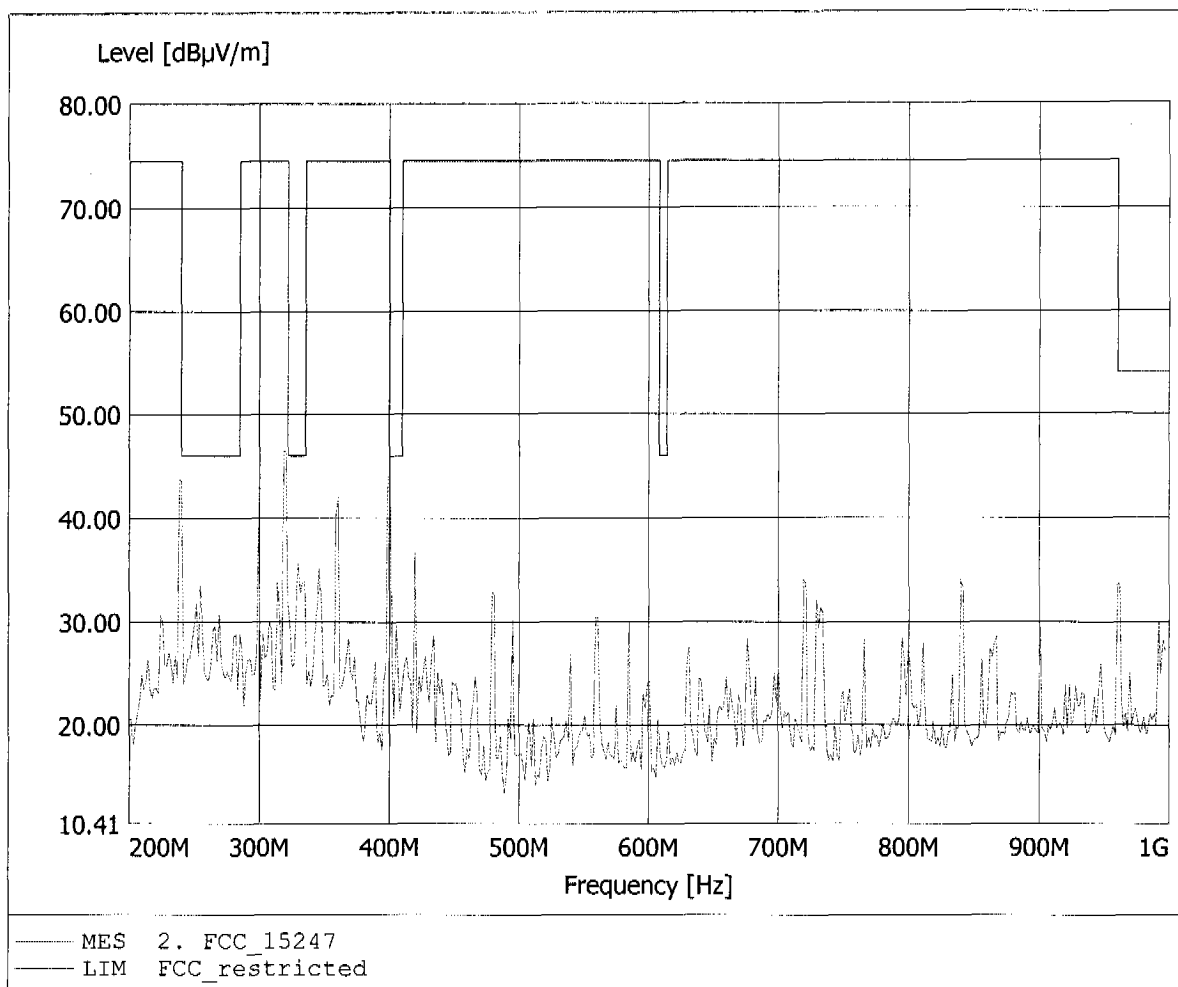

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
 Model: SA5250/1 mPCI  
 Approval Holder: Philips Semiconductors Dresden AG  
 Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
 Test Site / Operator: ETS / Mr. Hoppe  
 Test Specification: according to §15.247  
 Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
 Comment 2: Freq: 320.240MHz, Emax: 46.49dBµV/m, RBW: 100kHz

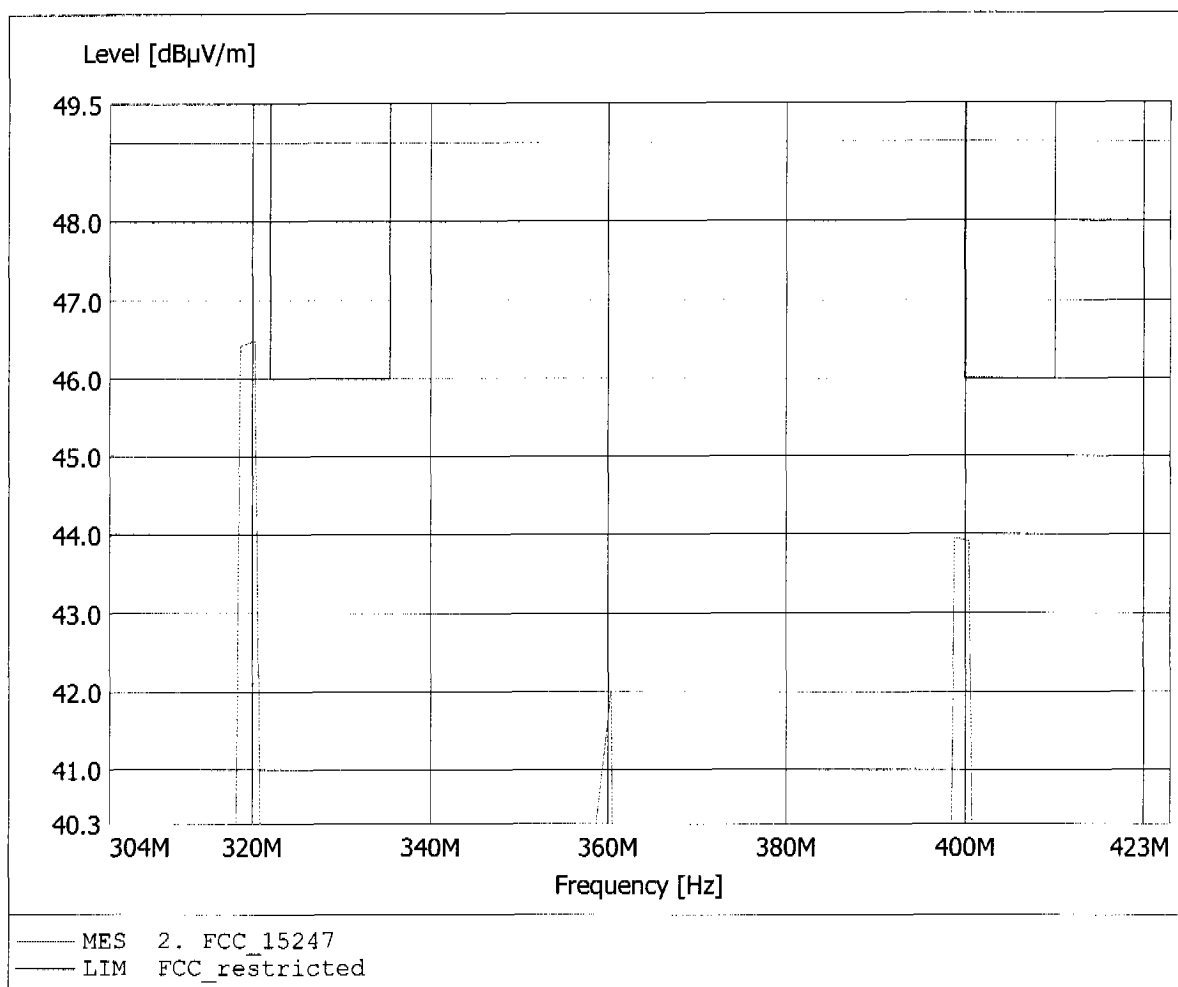




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 360.321MHz, Emax: 45.46dBµV/m, RBW: 100kHz

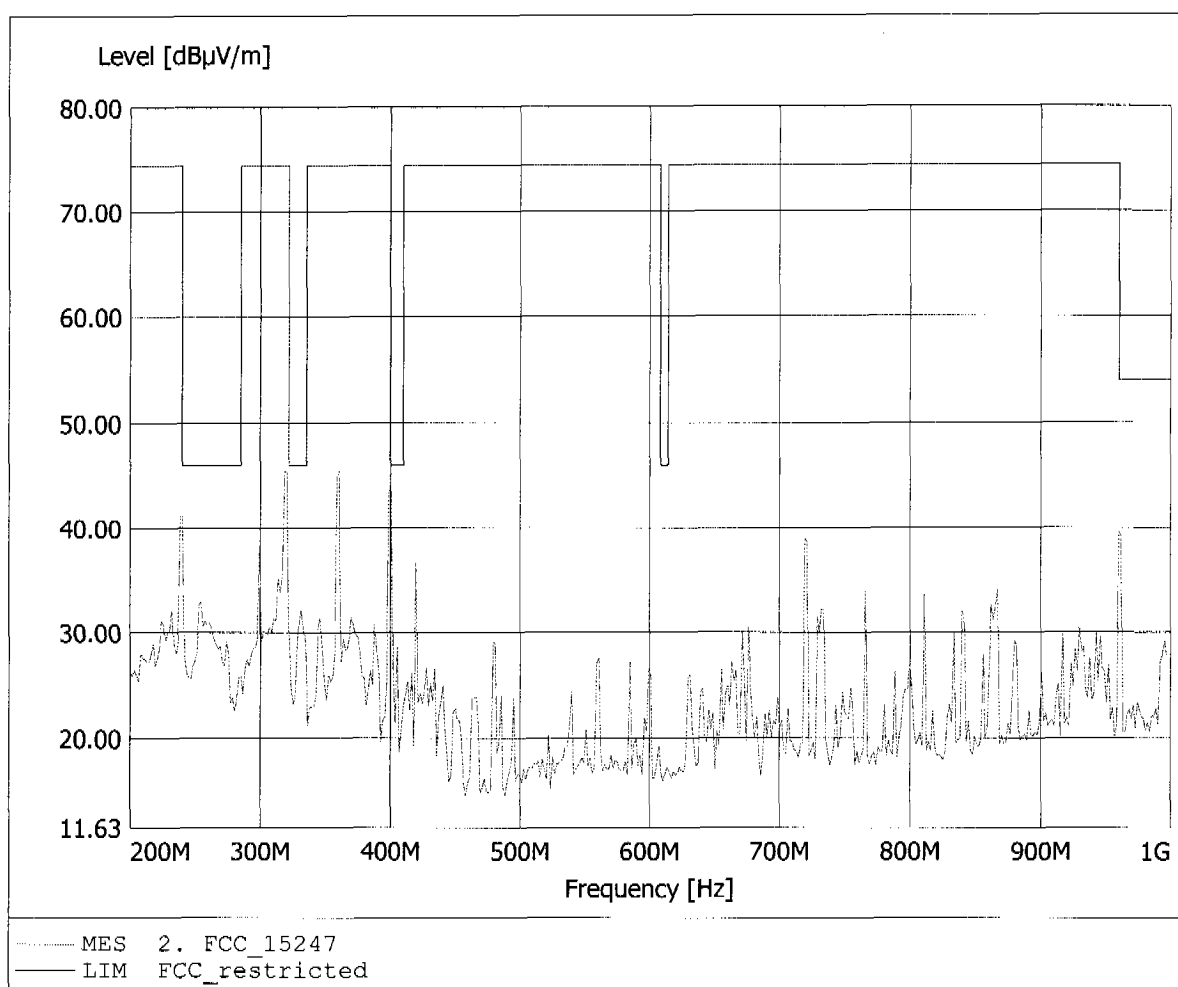


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 360.321MHz, Emax: 45.46dBµV/m, RBW: 100kHz

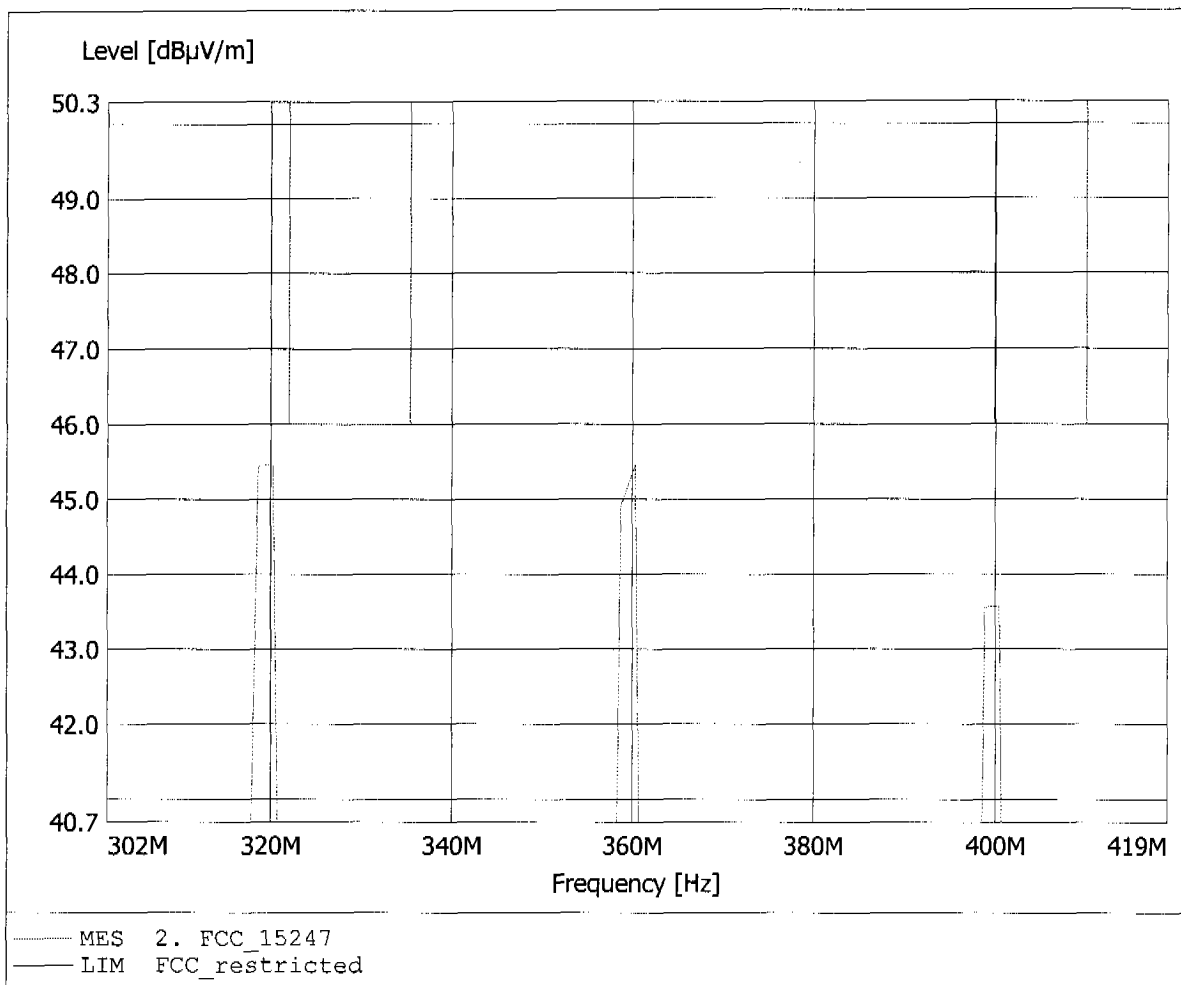


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 1.198GHz, Emax: 45.65dBµV/m, RBW: 1MHz

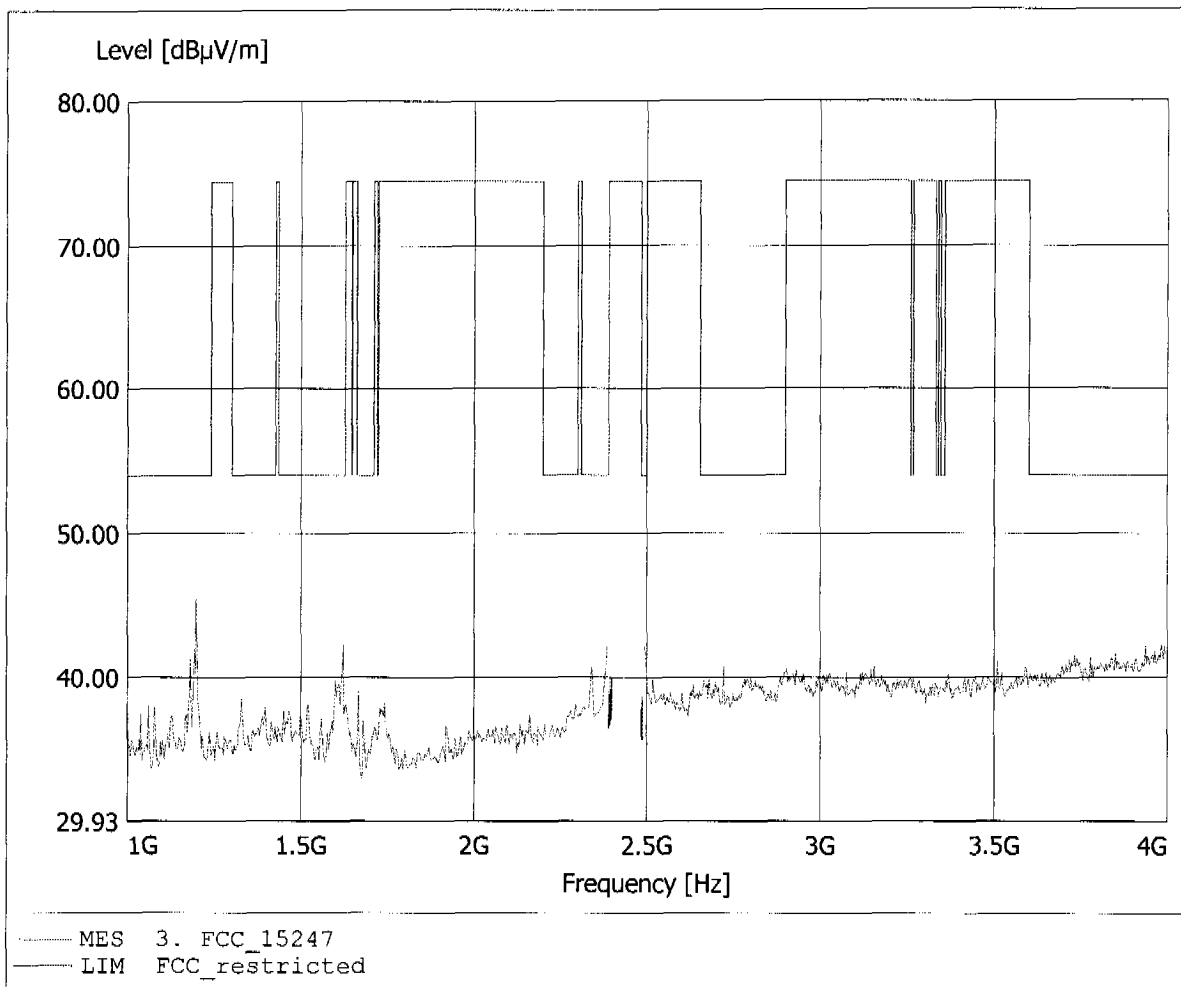


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 1.061GHz, Emax: 44.22dBuV/m, RBW: 1MHz

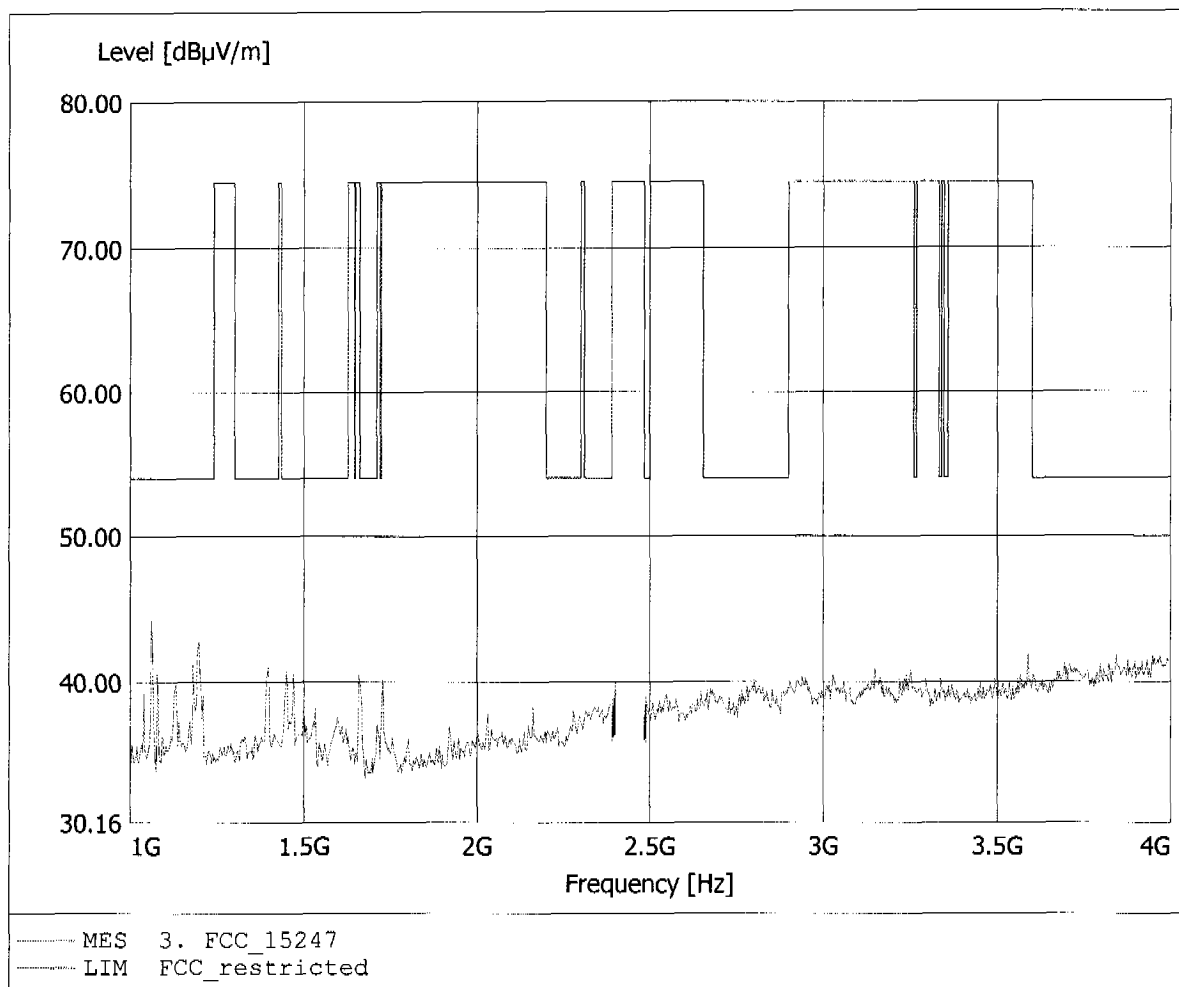


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 4.874GHz, Emax: 42.12dBµV/m, RBW: 1MHz

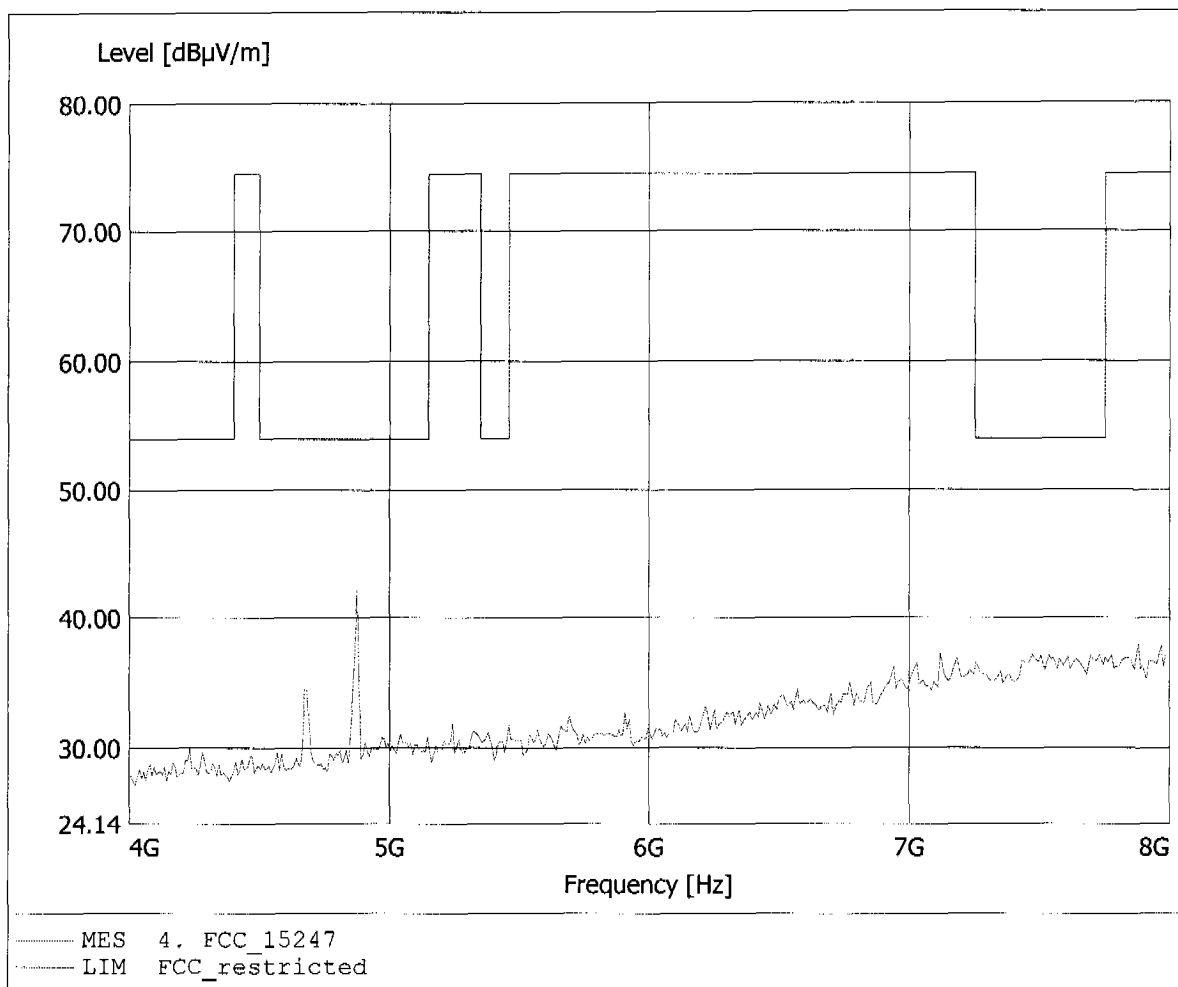


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.952GHz, Emax: 38.27dBuV/m, RBW: 1MHz

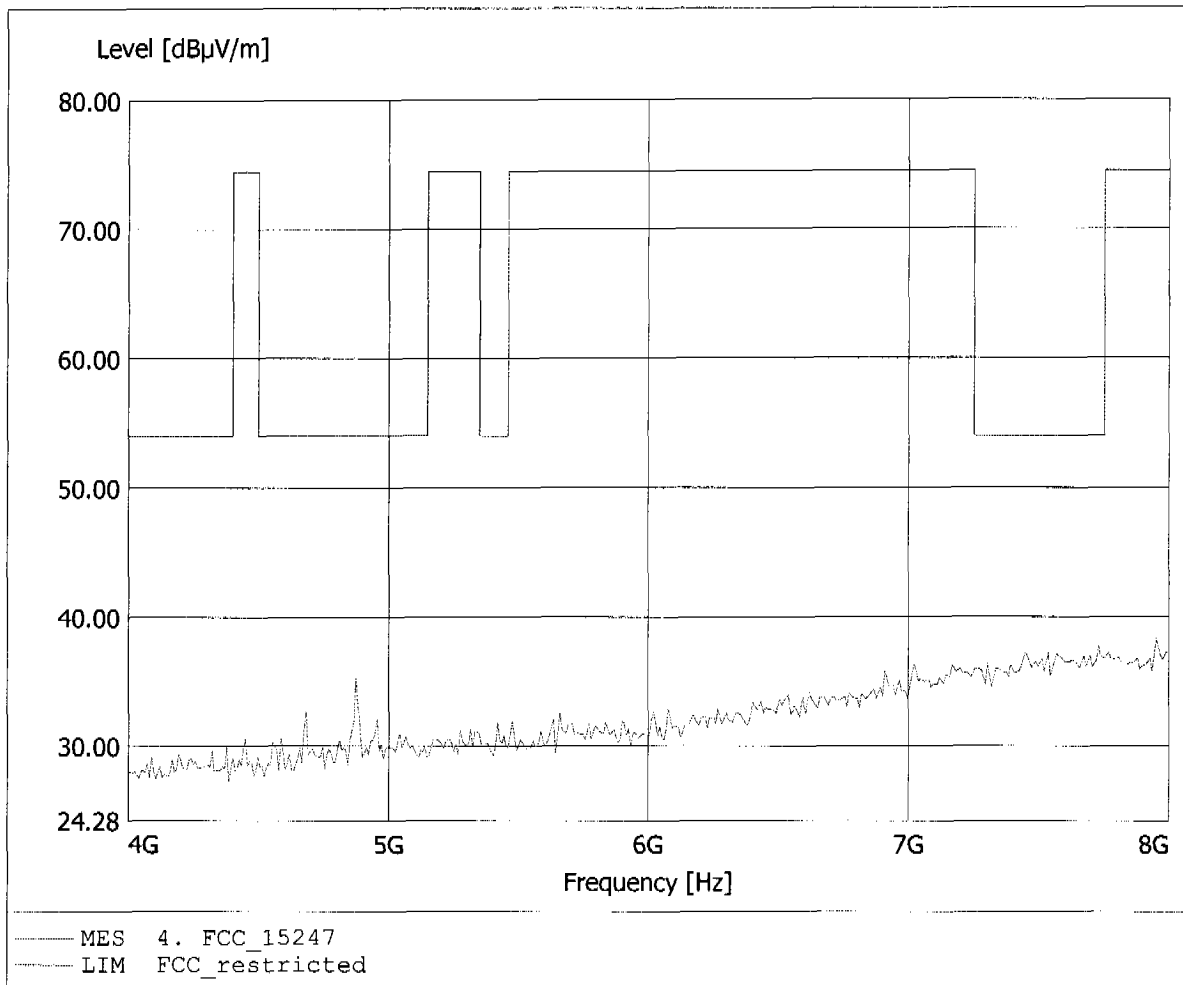


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.222GHz, Emax: 41.69dBuV/m, RBW: 1MHz

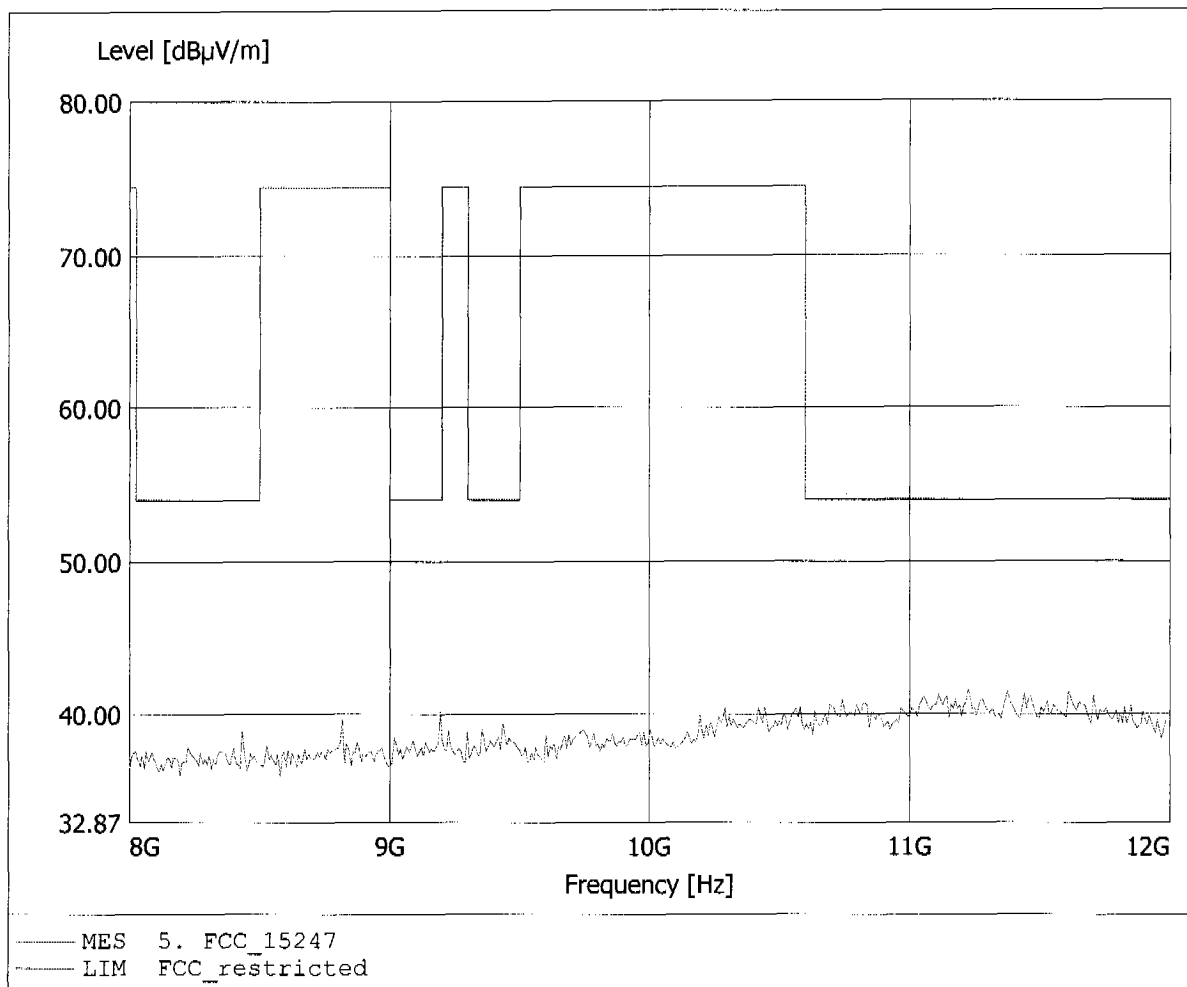

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.006GHz, Emax: 42.53dBµV/m, RBW: 1MHz

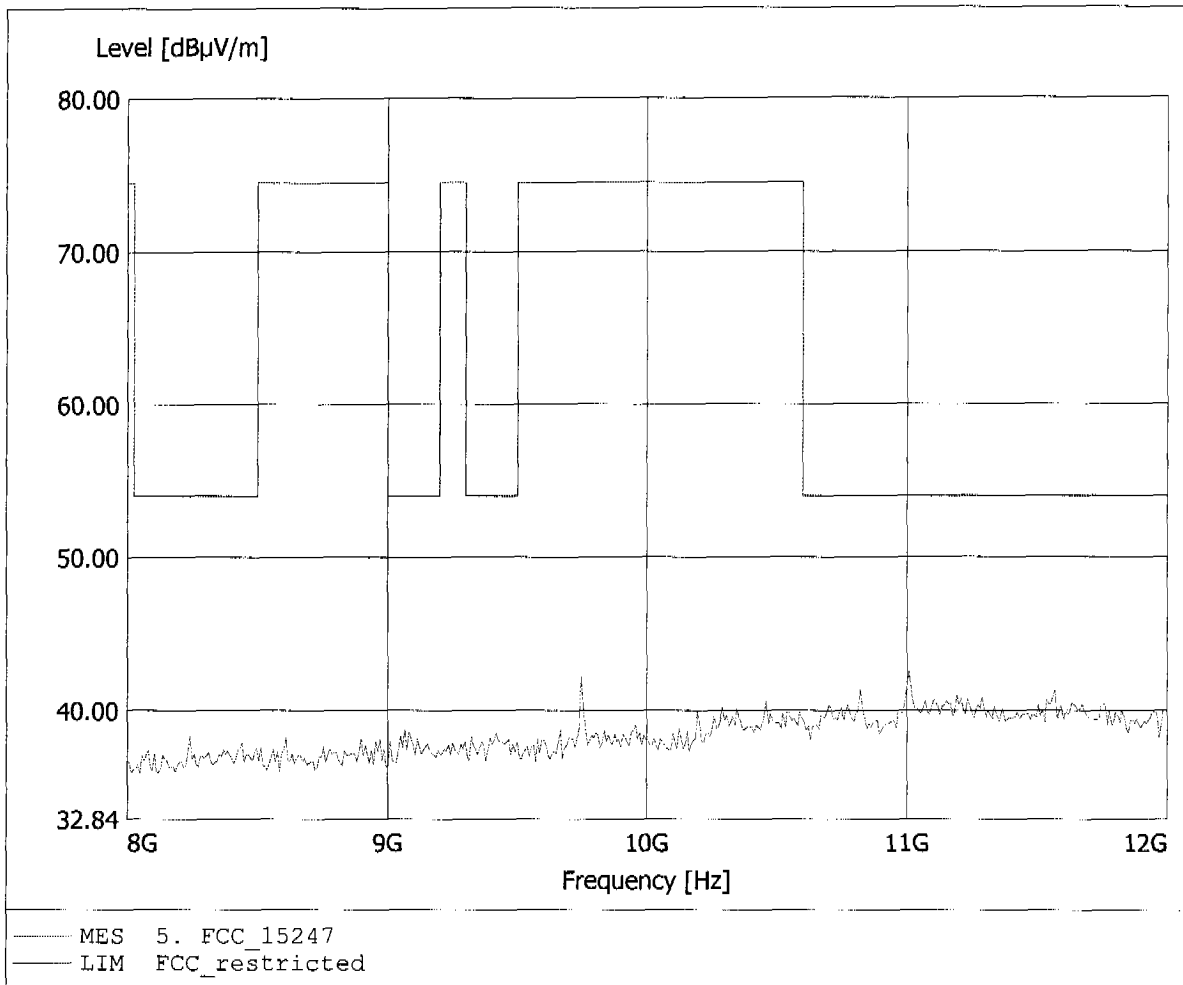




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.505GHz, Emax: 44.40dBµV/m, RBW: 1MHz

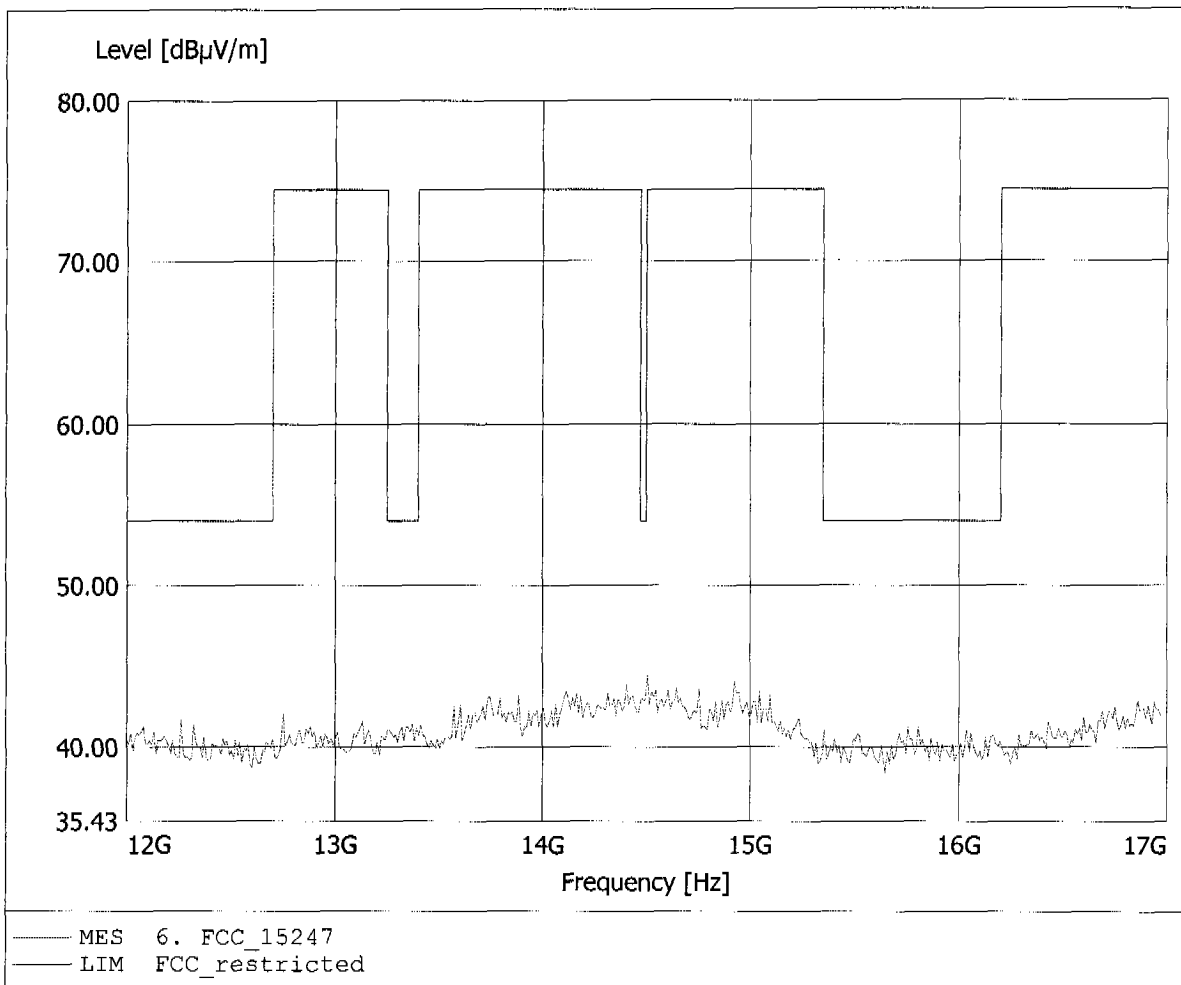


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.335GHz, Emax: 44.13dBuV/m, RBW: 1MHz

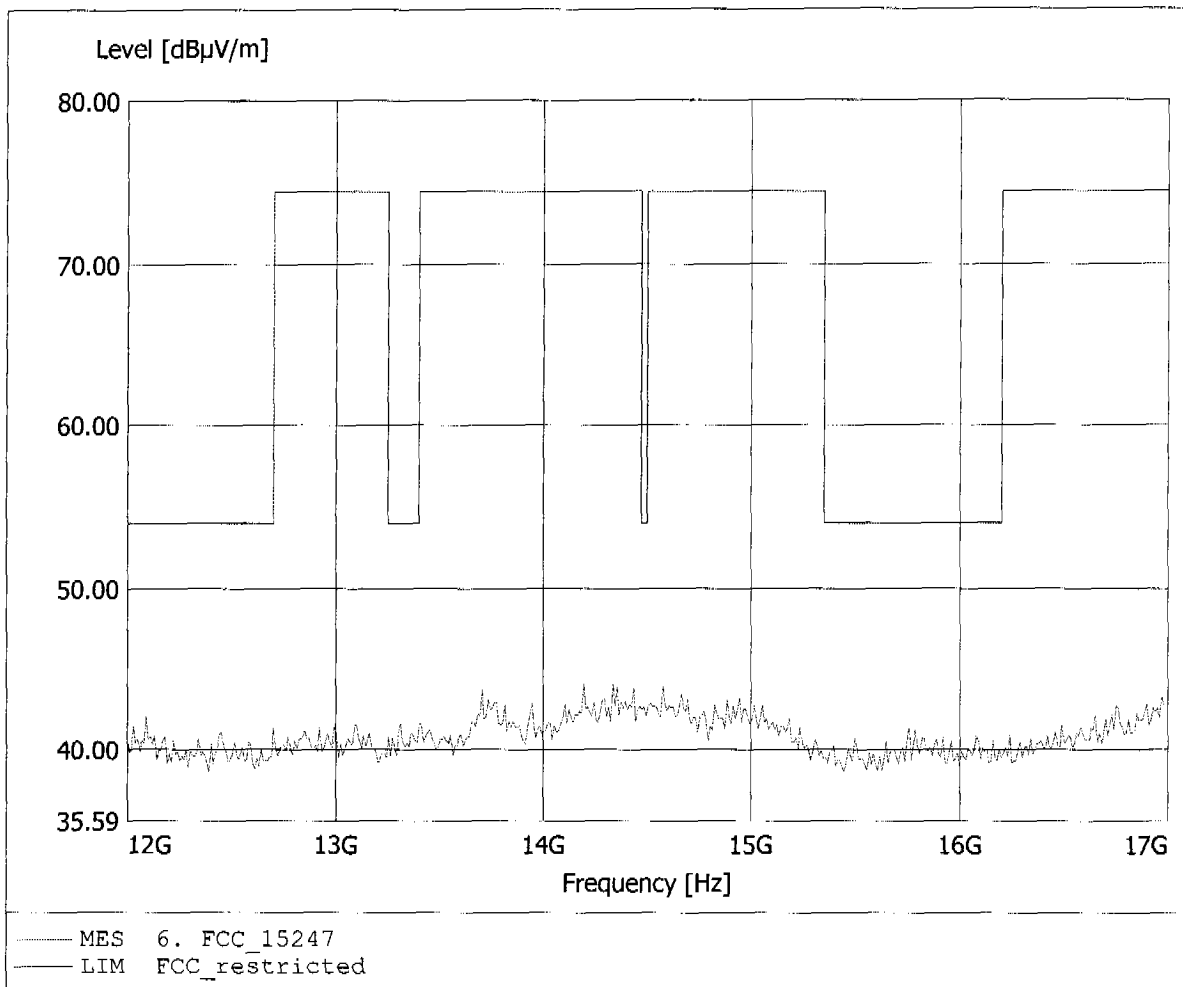


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.019GHz, Emax: 44.89dBµV/m, RBW: 1MHz

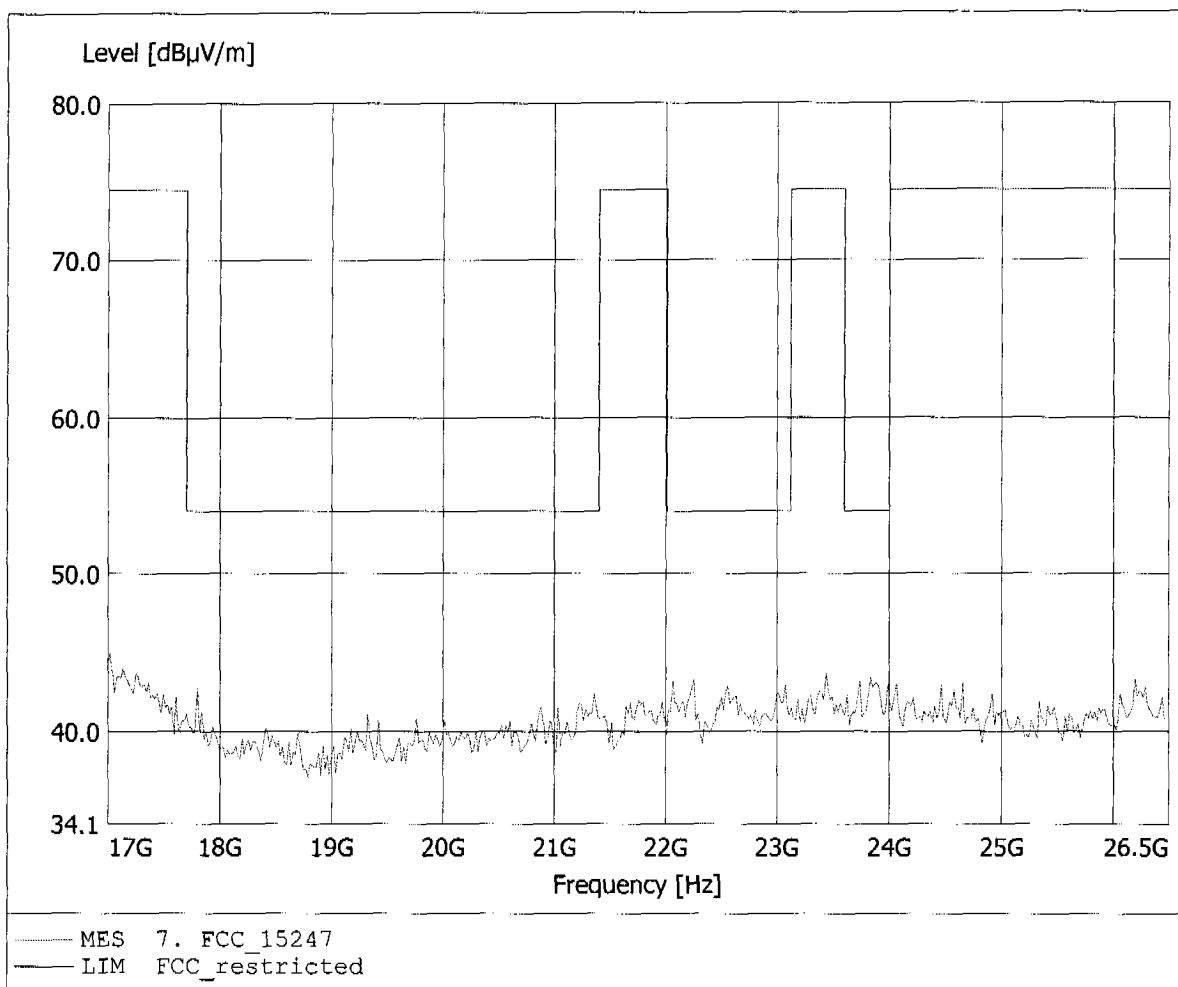


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:6  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.000GHz, Emax: 44.43dBµV/m, RBW: 1MHz

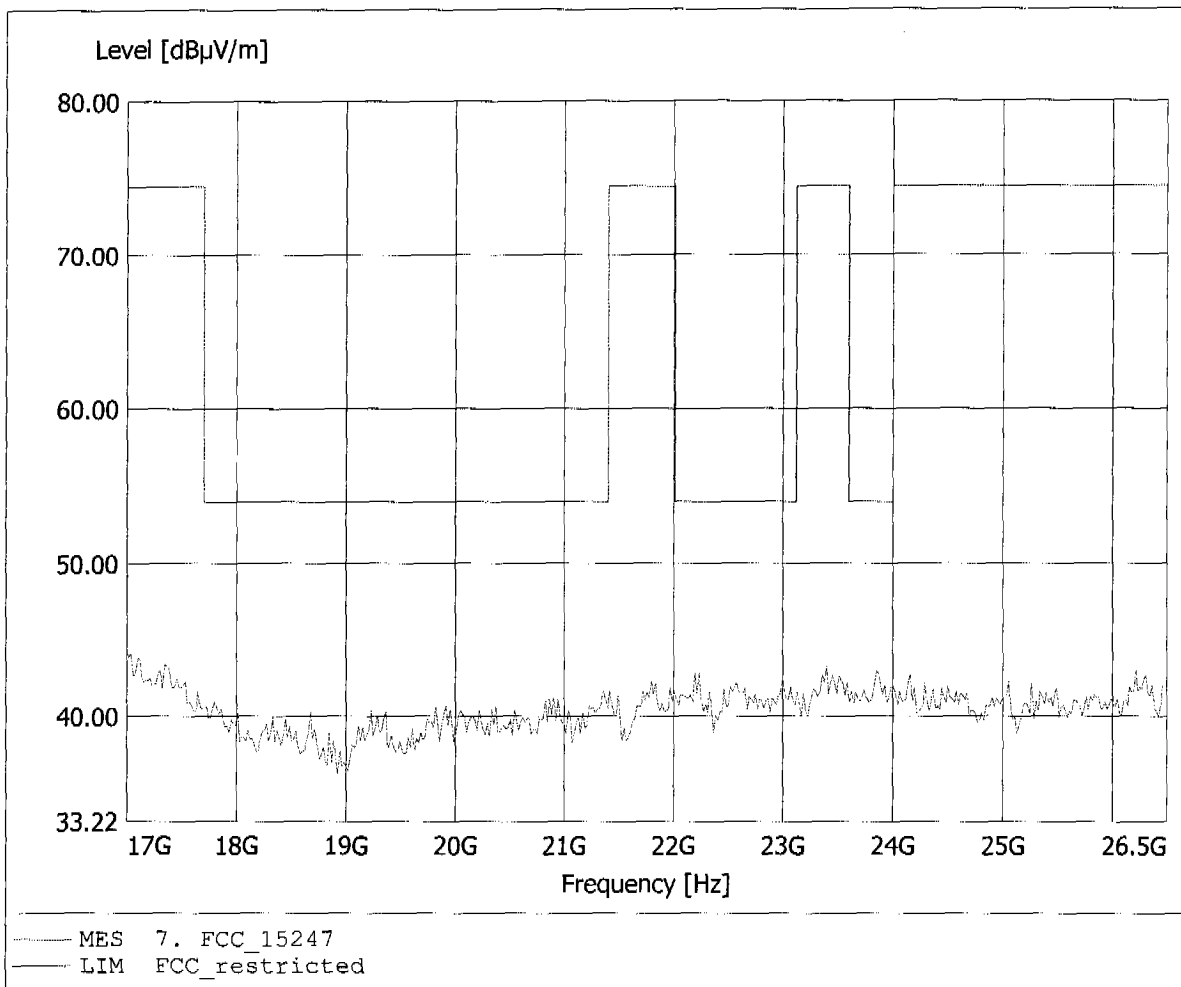


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 182.966MHz, Emax: 31.09dBµV/m, RBW: 100kHz

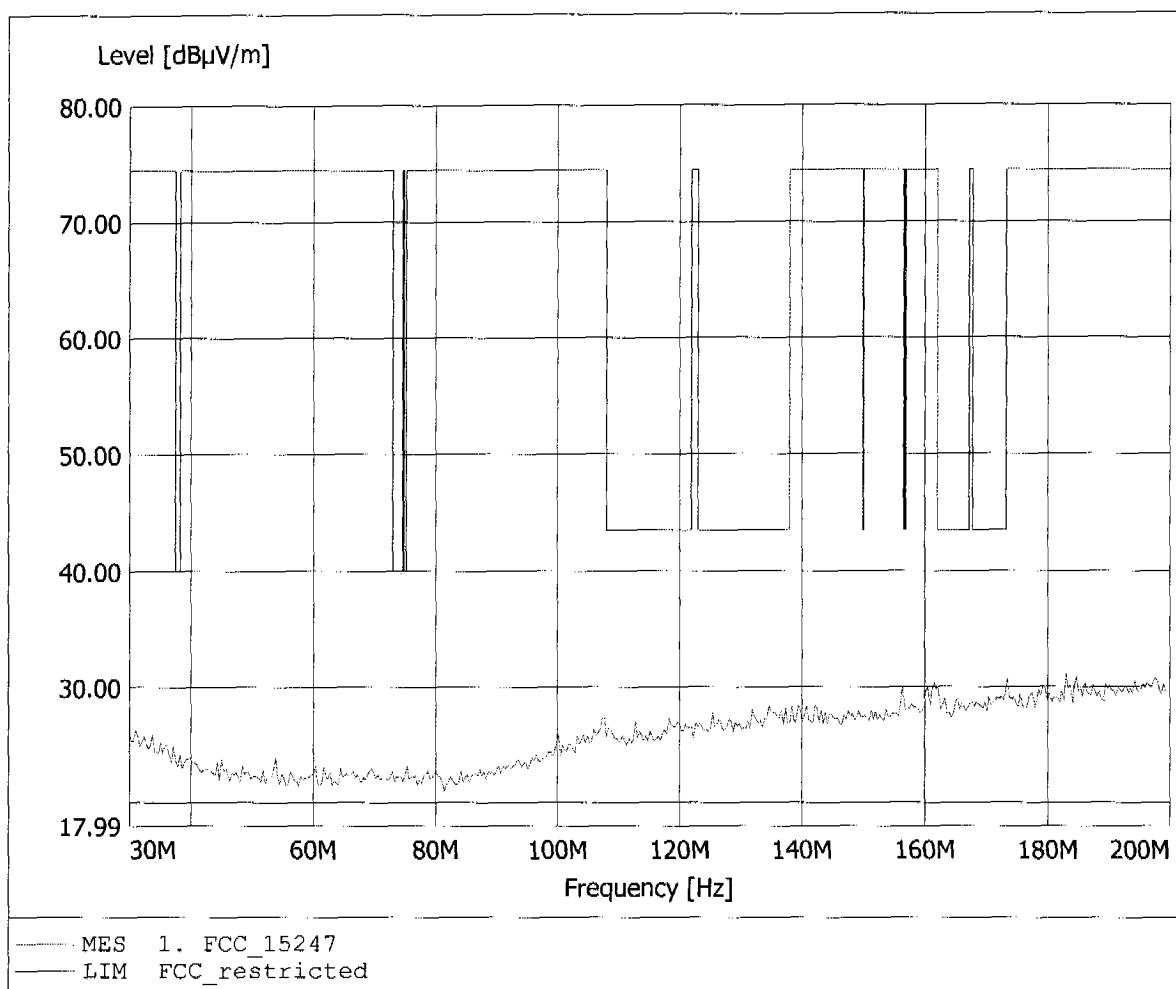


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 192.505MHz, Emax: 31.67dBµV/m, RBW: 100kHz

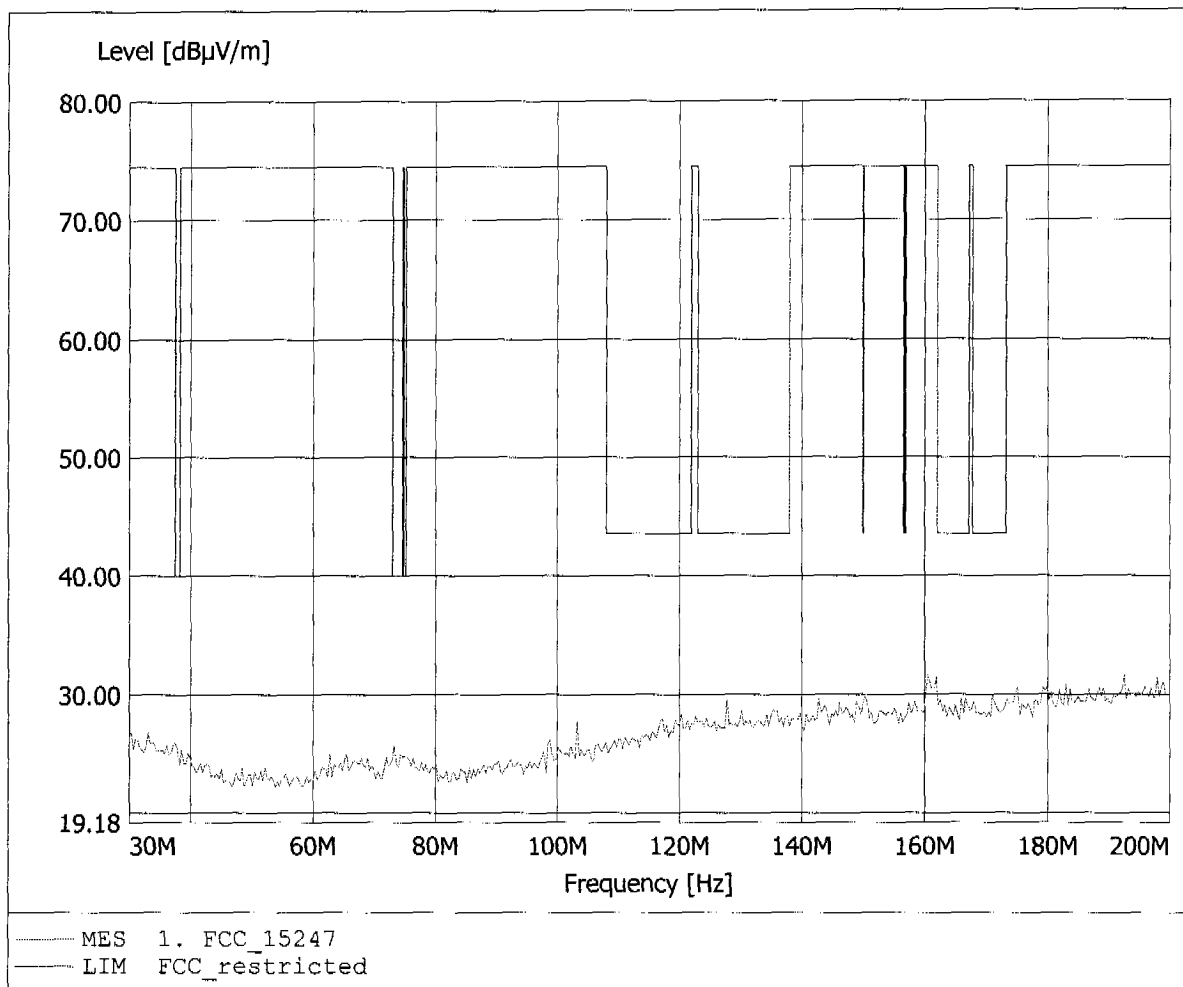


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 318.637MHz, Emax: 46.36dBµV/m, RBW: 100kHz

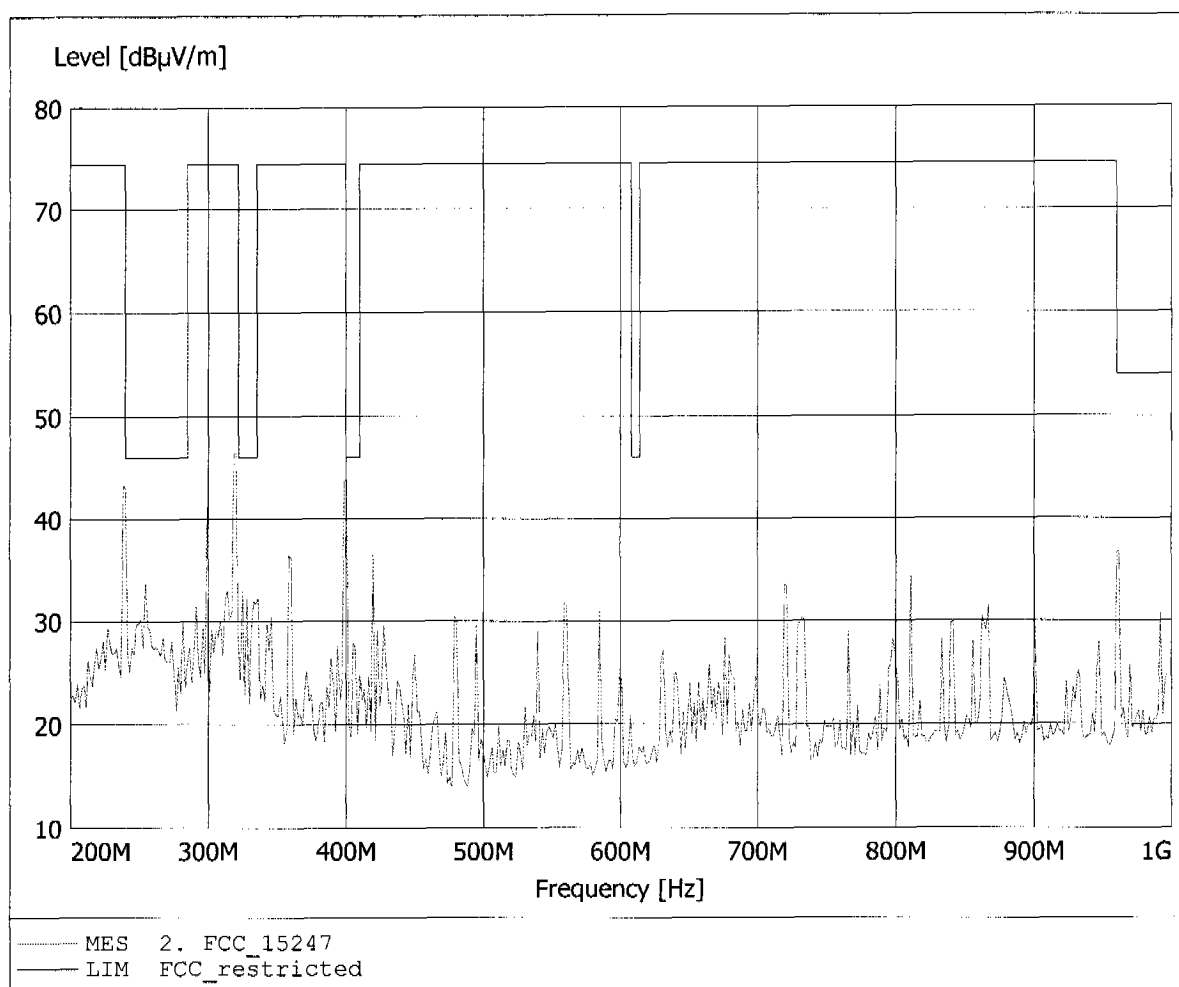

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 318.637MHz, Emax: 46.36dBµV/m, RBW: 100kHz

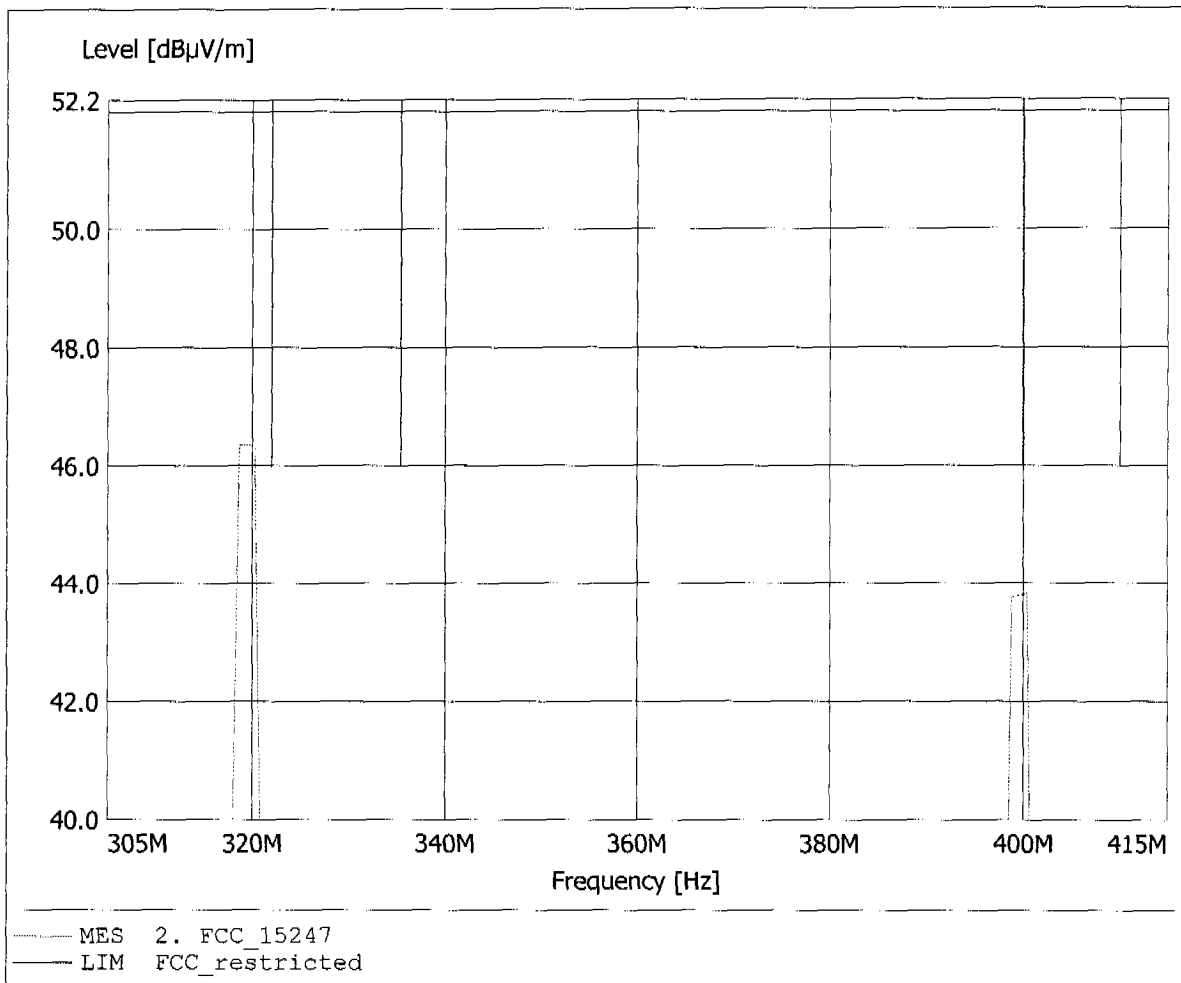




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 358.717MHz, Emax: 45.72dBµV/m, RBW: 100kHz

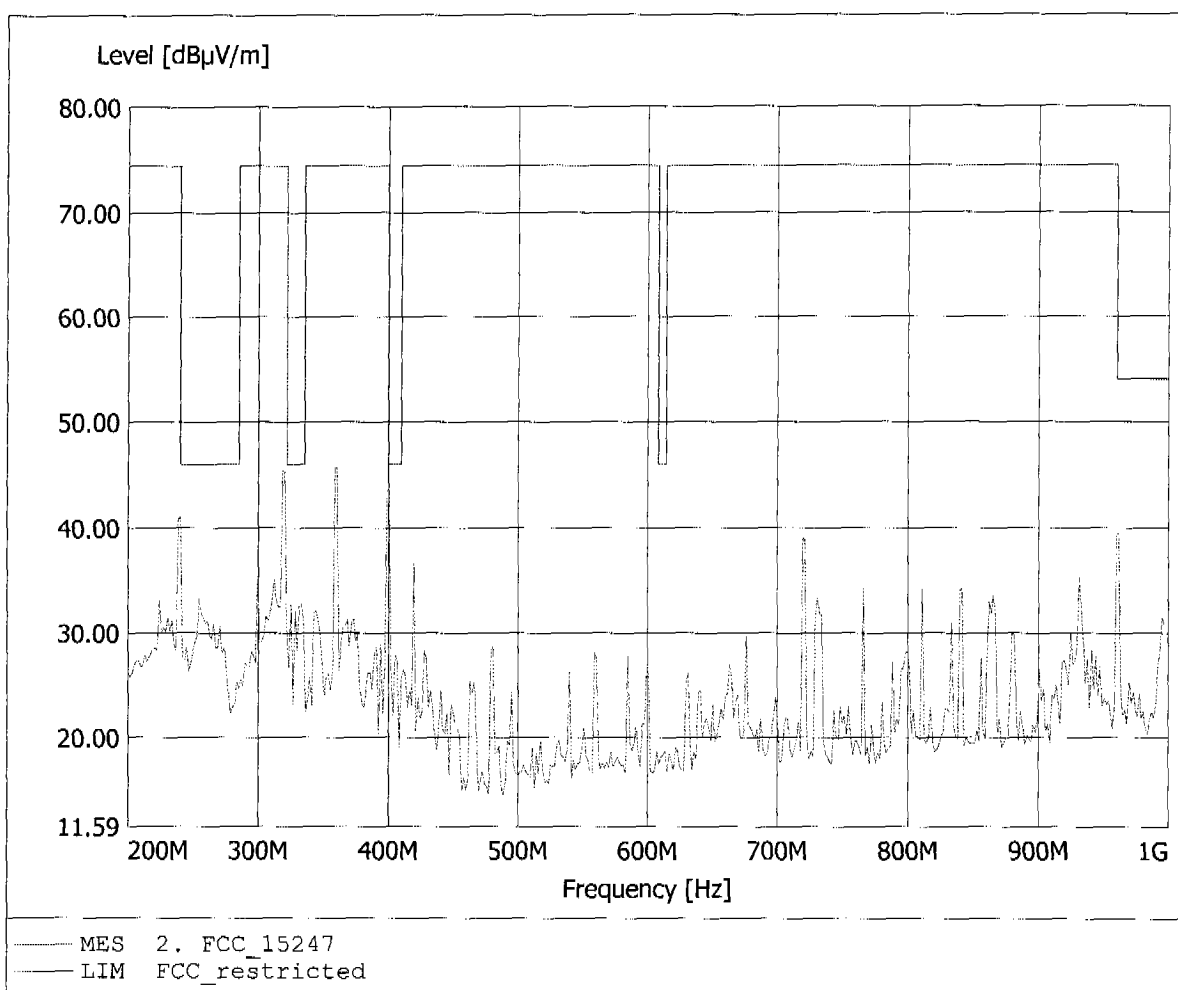


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Comment 2: Freq: 358.717MHz, Emax: 45.72dBµV/m, RBW: 100kHz

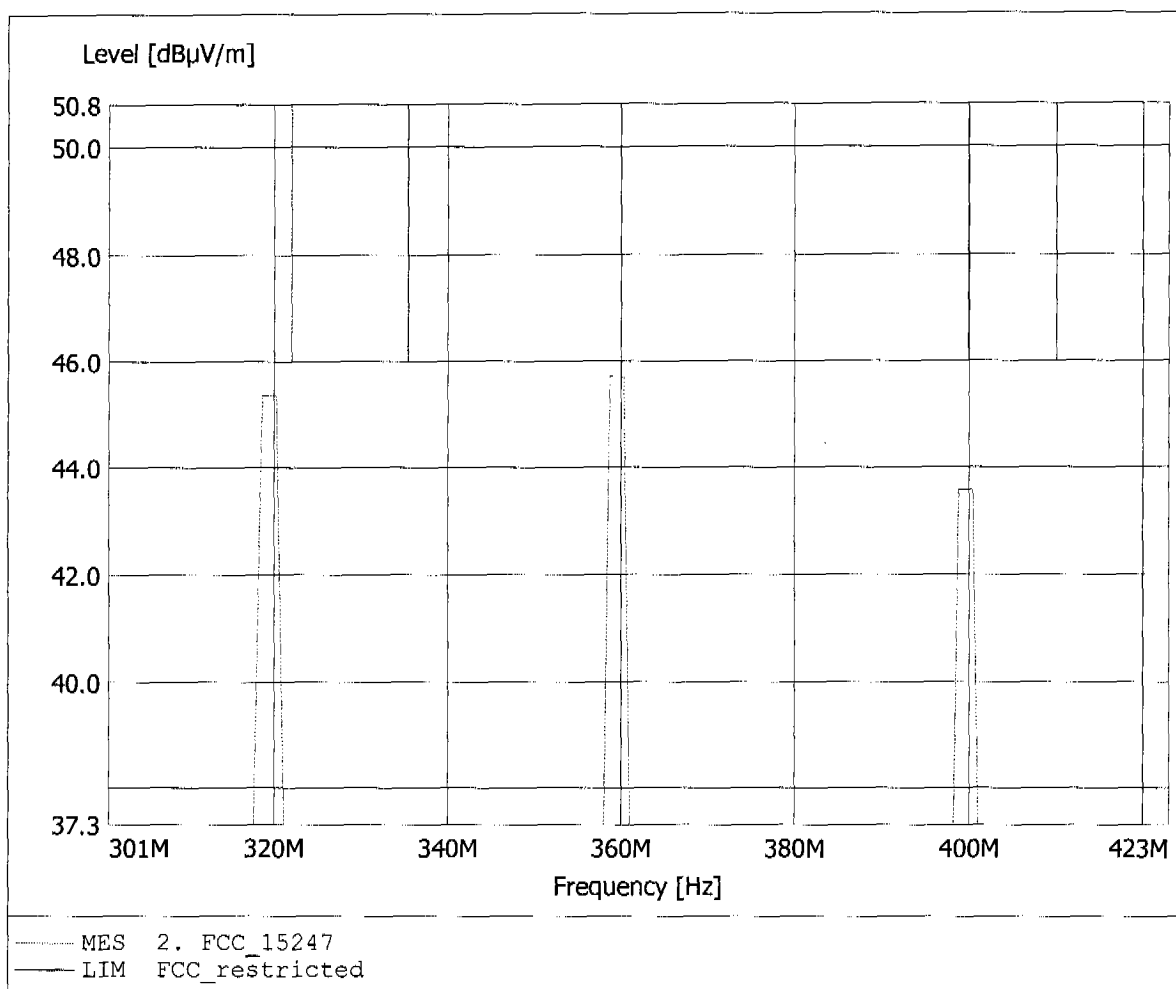


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.488GHz, Emax: 51.00dBµV/m, RBW: 1MHz

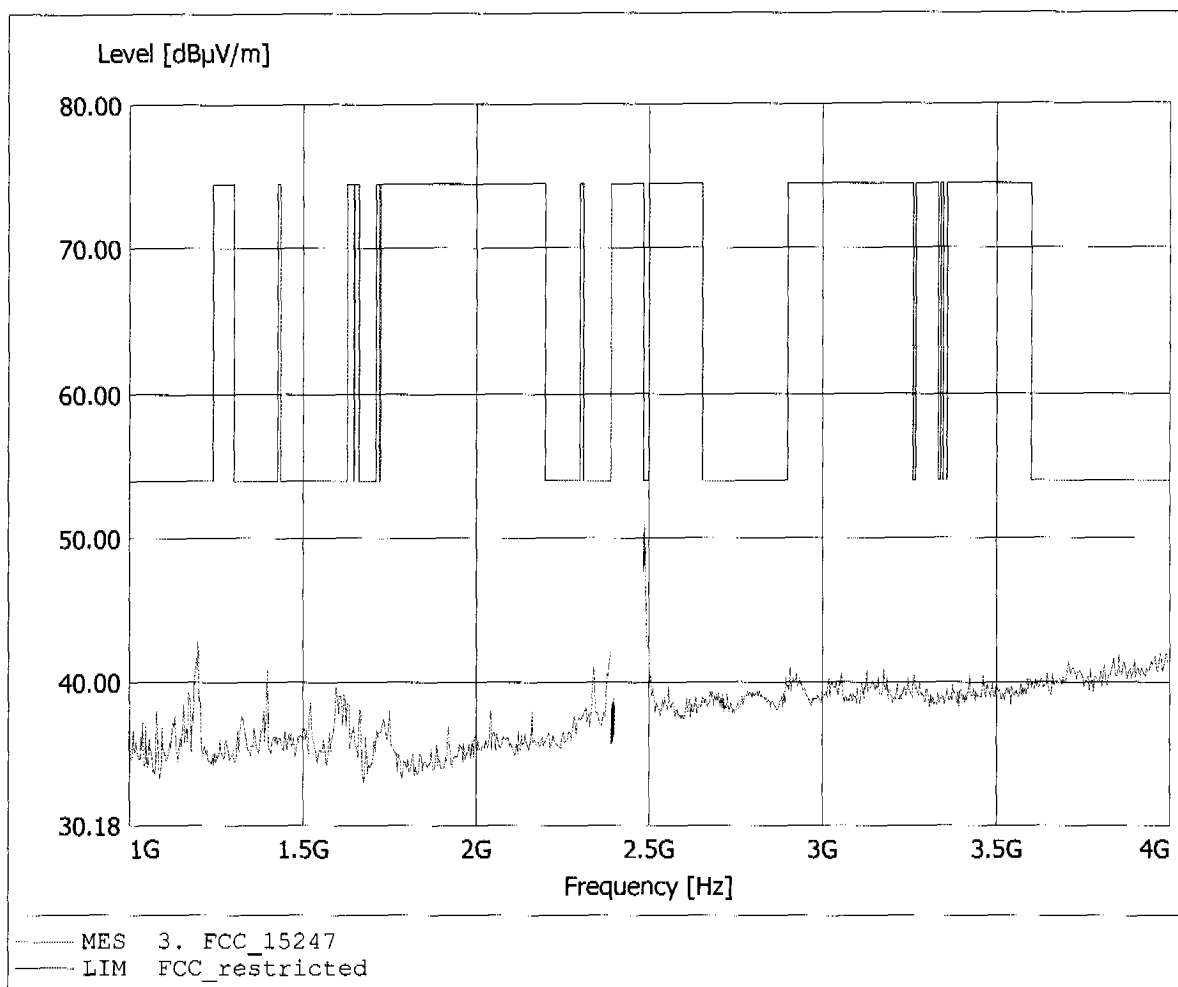


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.  
Comment 2: Freq: 2.488GHz, Emax: 45.01dBµV/m, RBW: 1MHz

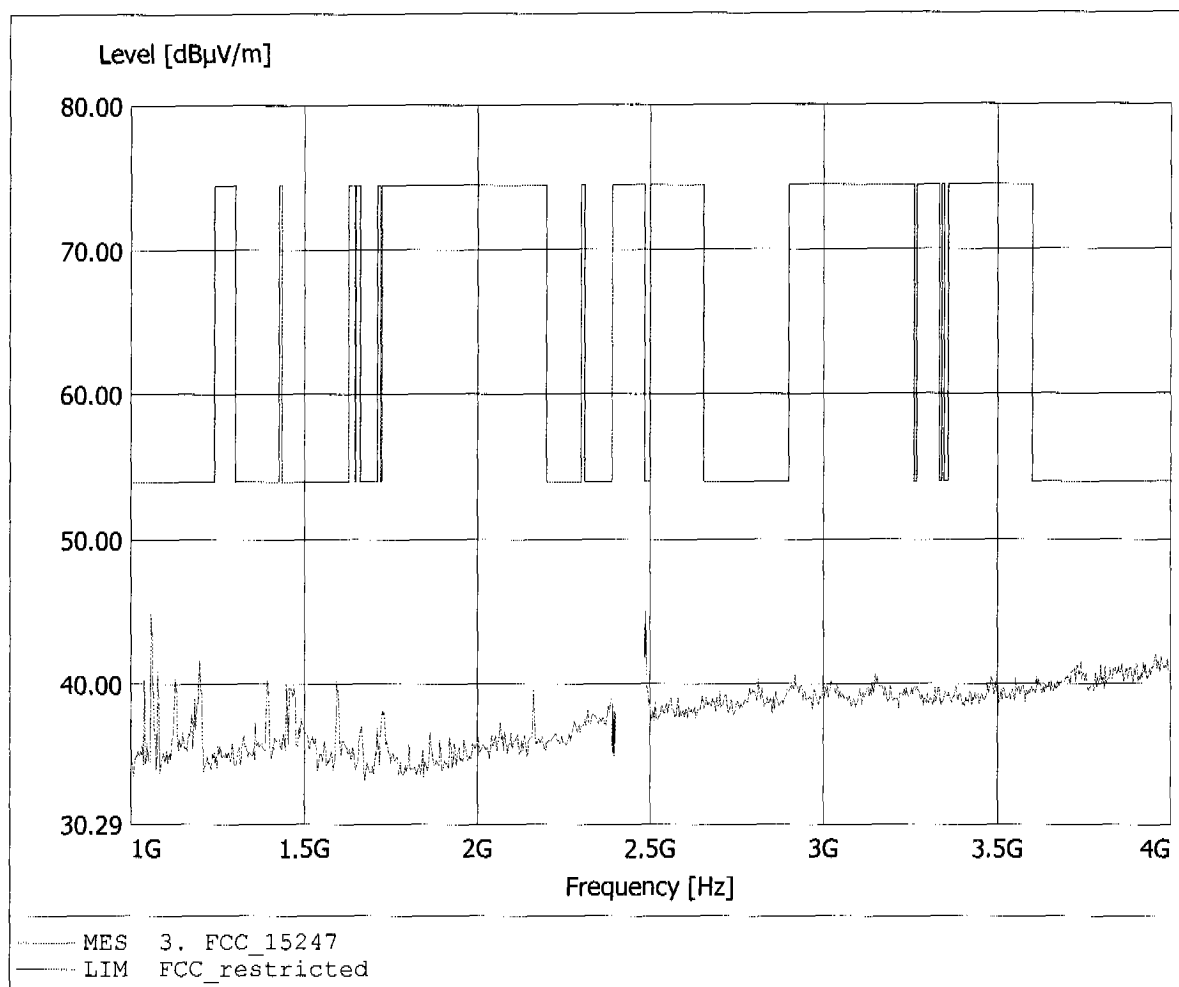


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 4.922GHz, Emax: 46.56dBuV/m, RBW: 1MHz

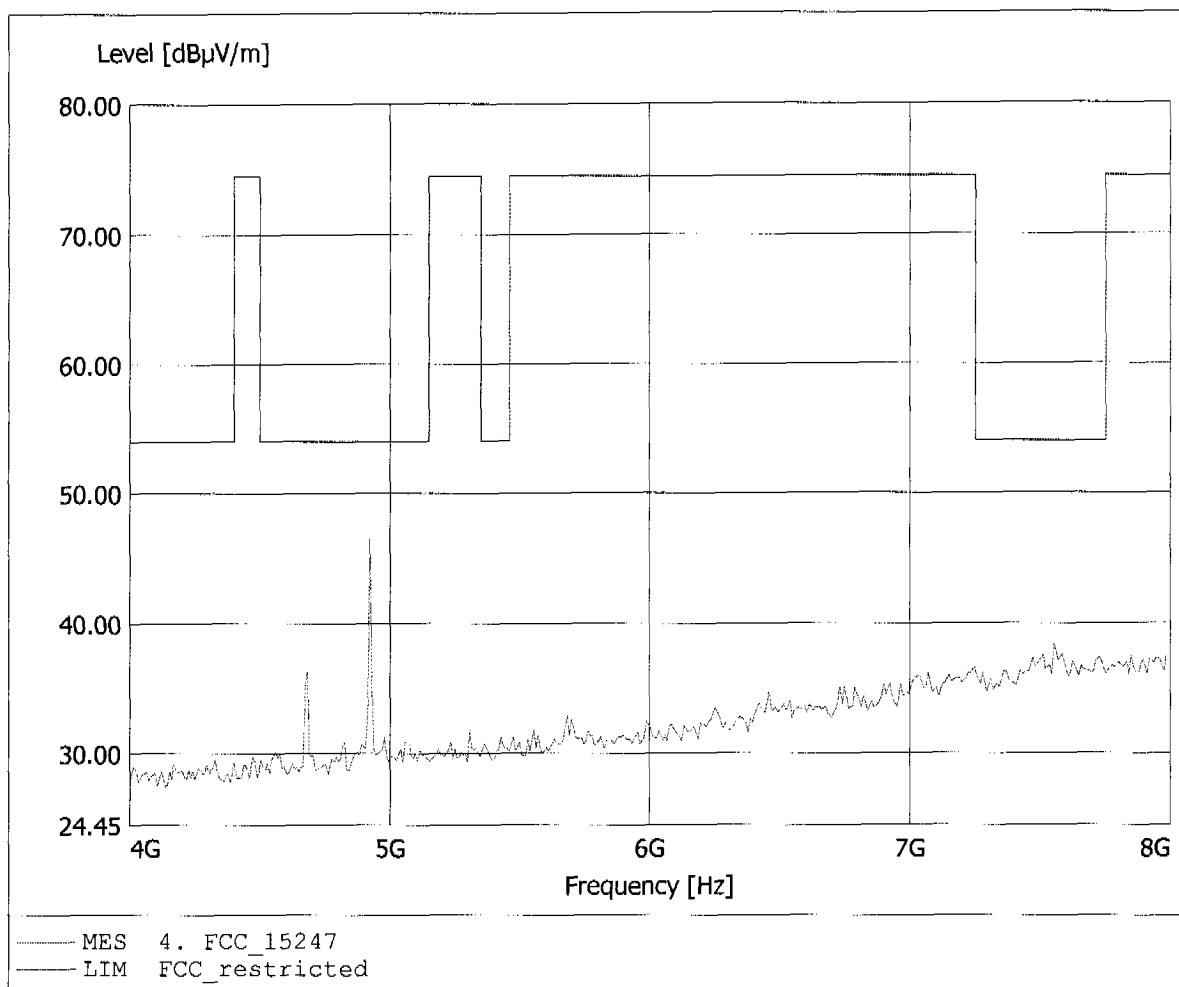


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 7.663GHz, Emax: 37.35dBµV/m, RBW: 1MHz

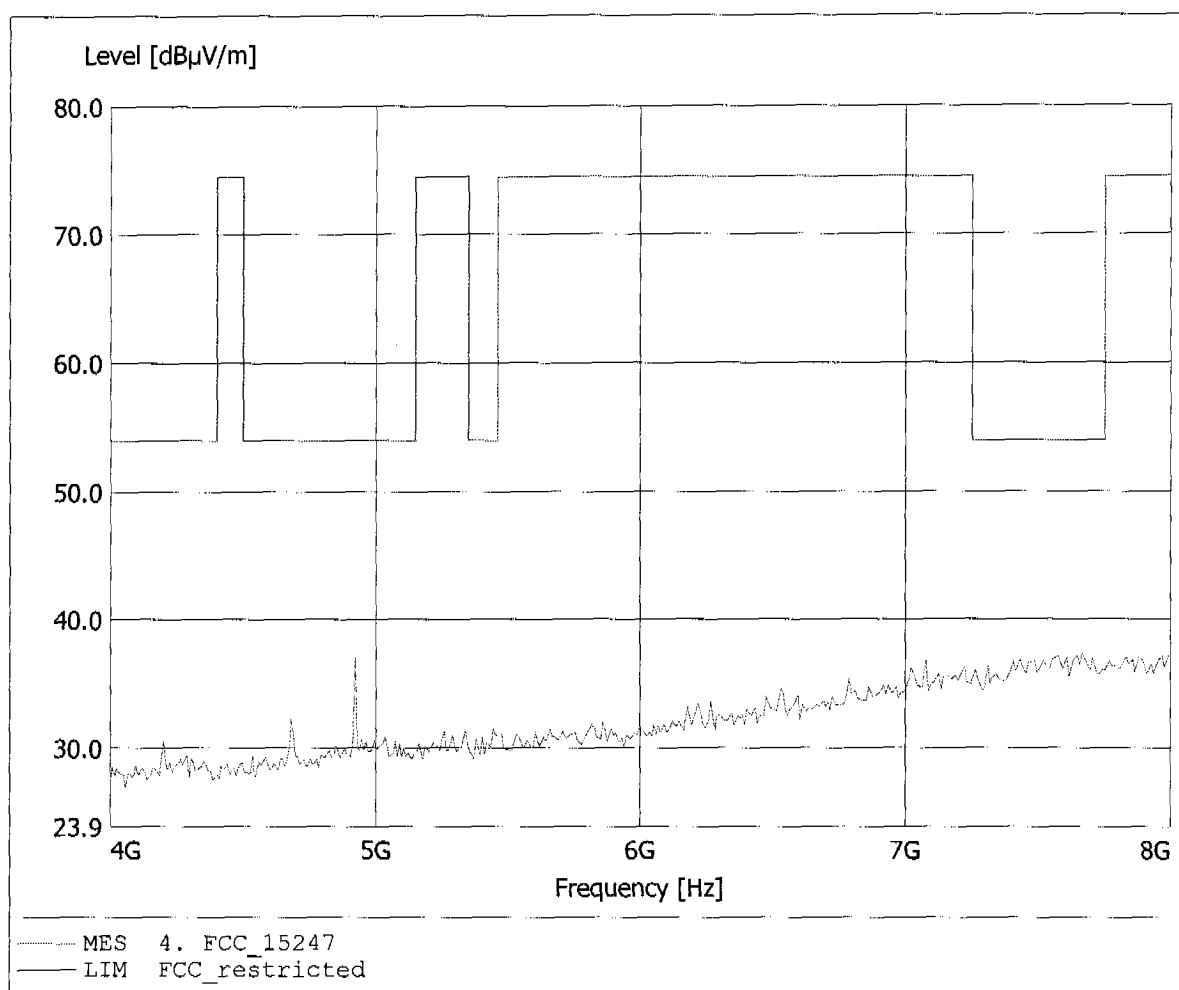


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 11.150GHz, Emax: 41.87dBµV/m, RBW: 1MHz

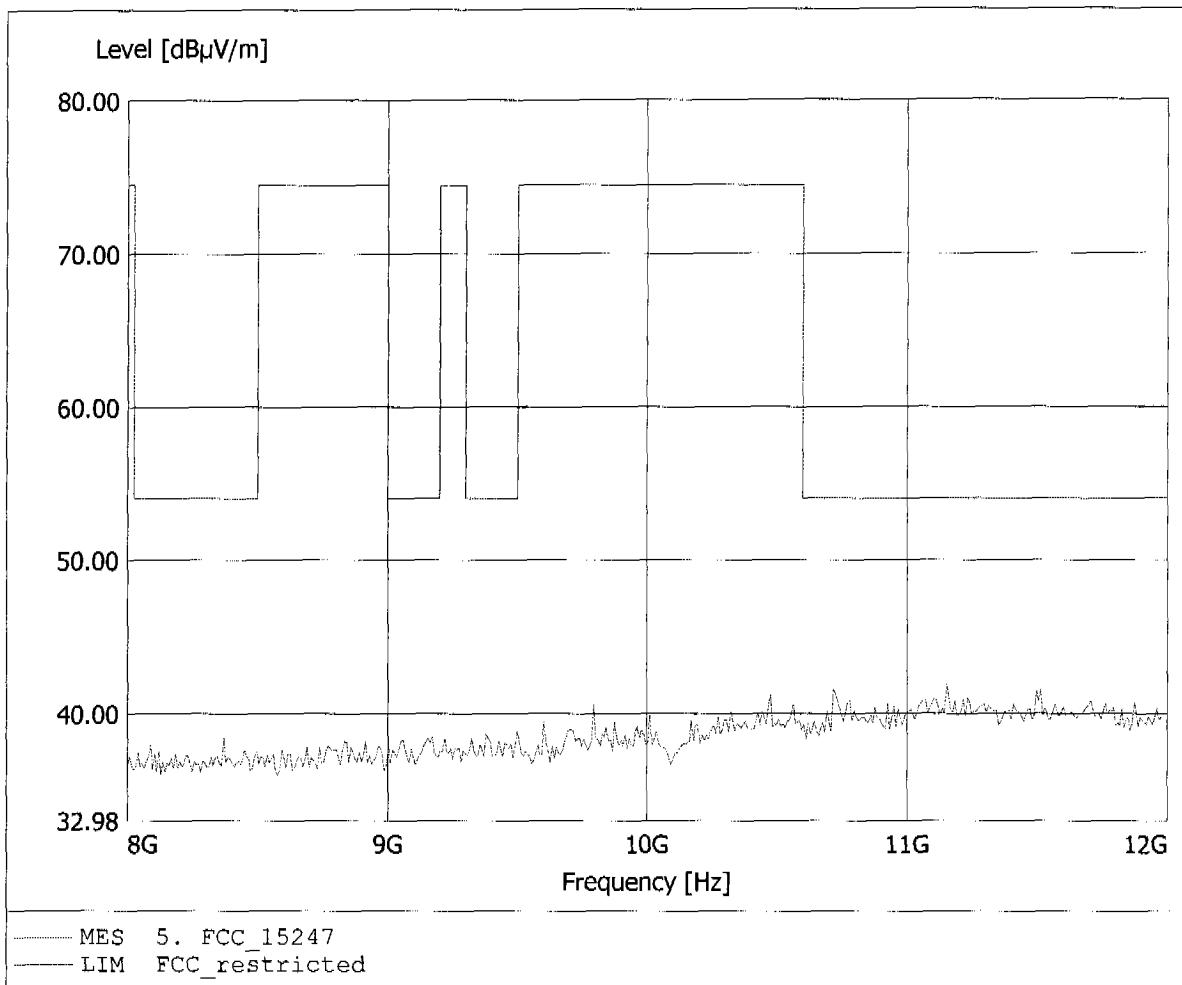

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**


EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 9.852GHz, Emax: 44.20dBµV/m, RBW: 1MHz

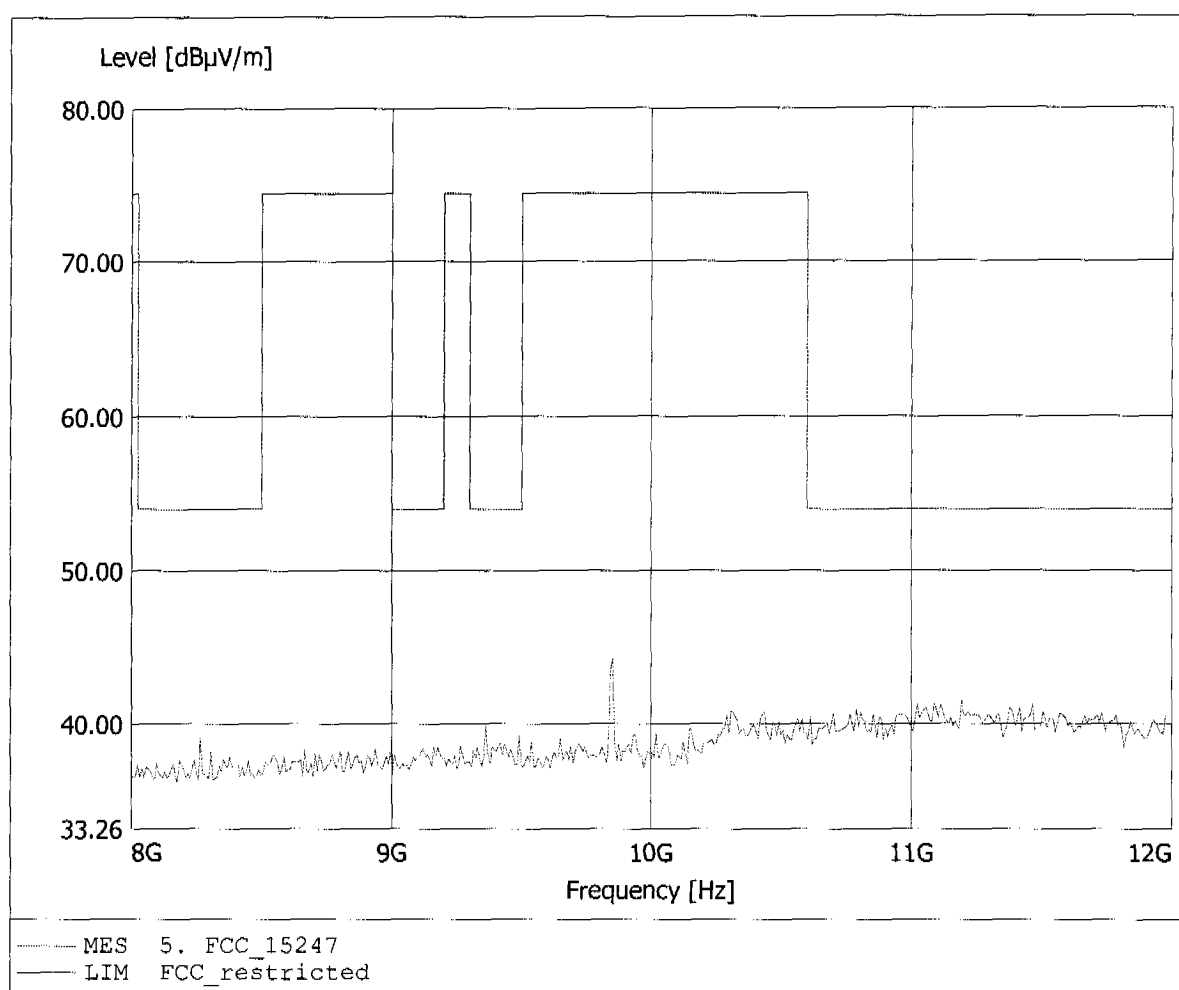




**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.605GHz, Emax: 44.06dBµV/m, RBW: 1MHz

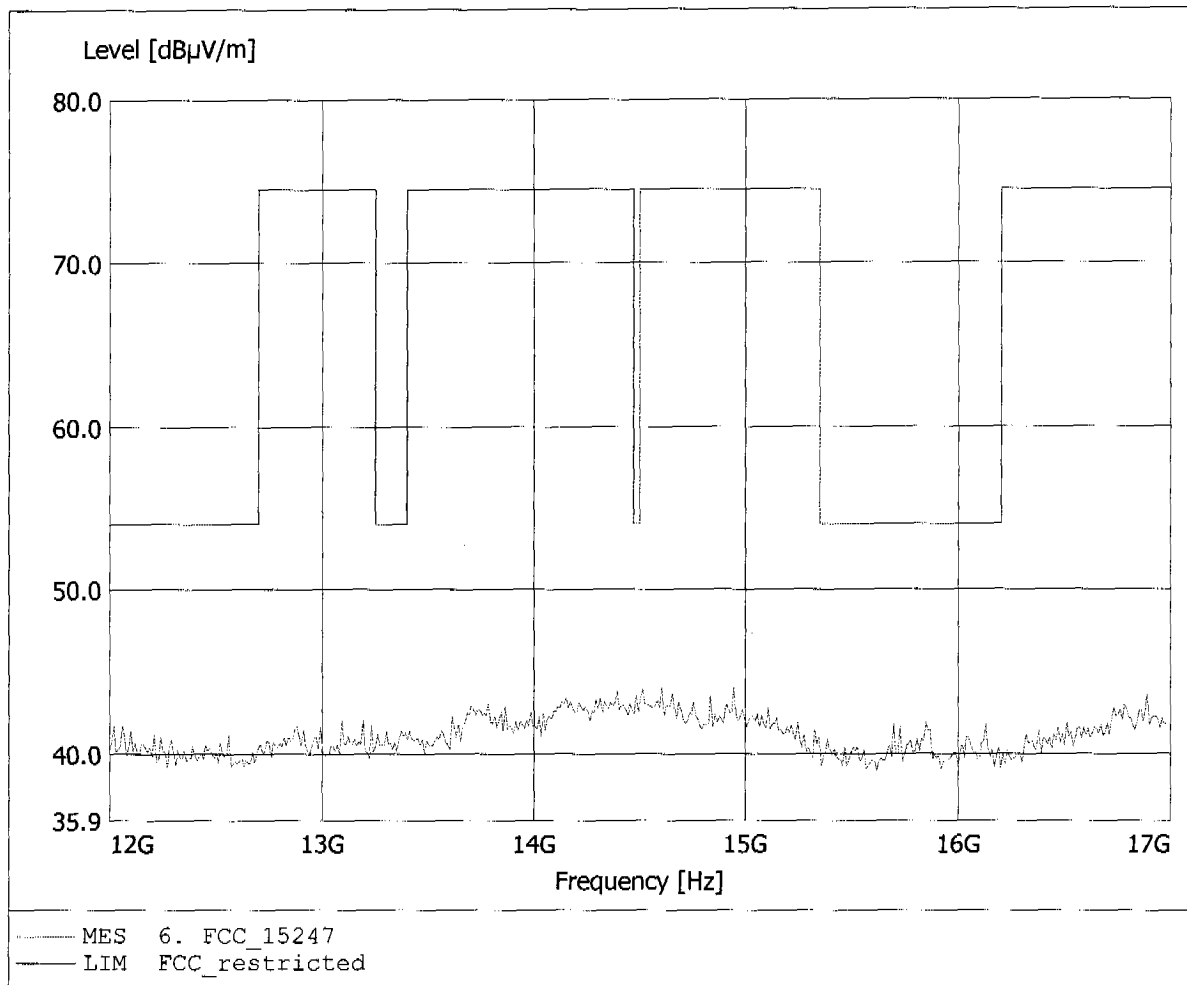


**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to §15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.  
Comment 2: Freq: 14.385GHz, Emax: 44.16dBuV/m, RBW: 1MHz

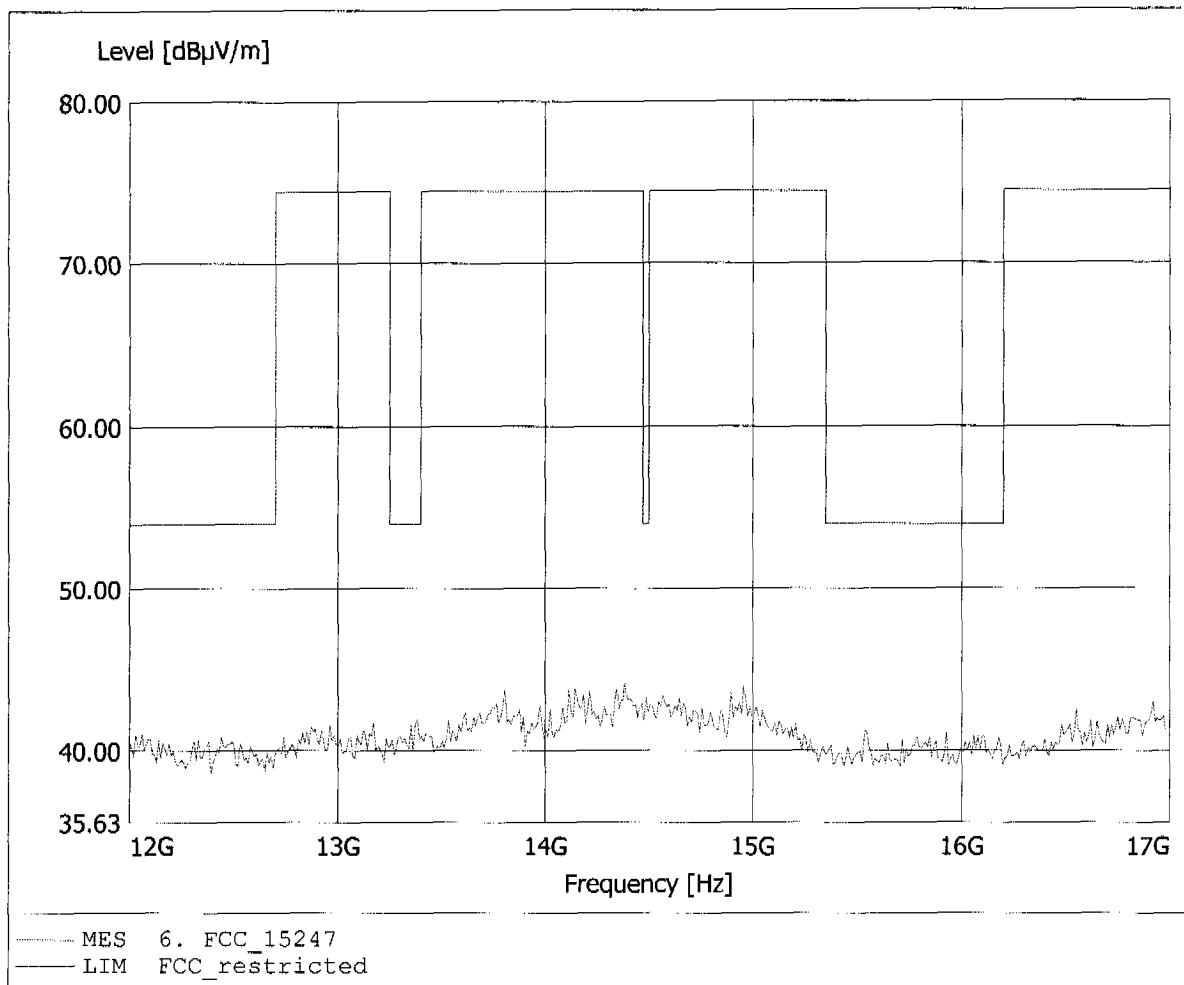

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.000GHz, Emax: 44.38dBuV/m, RBW: 1MHz

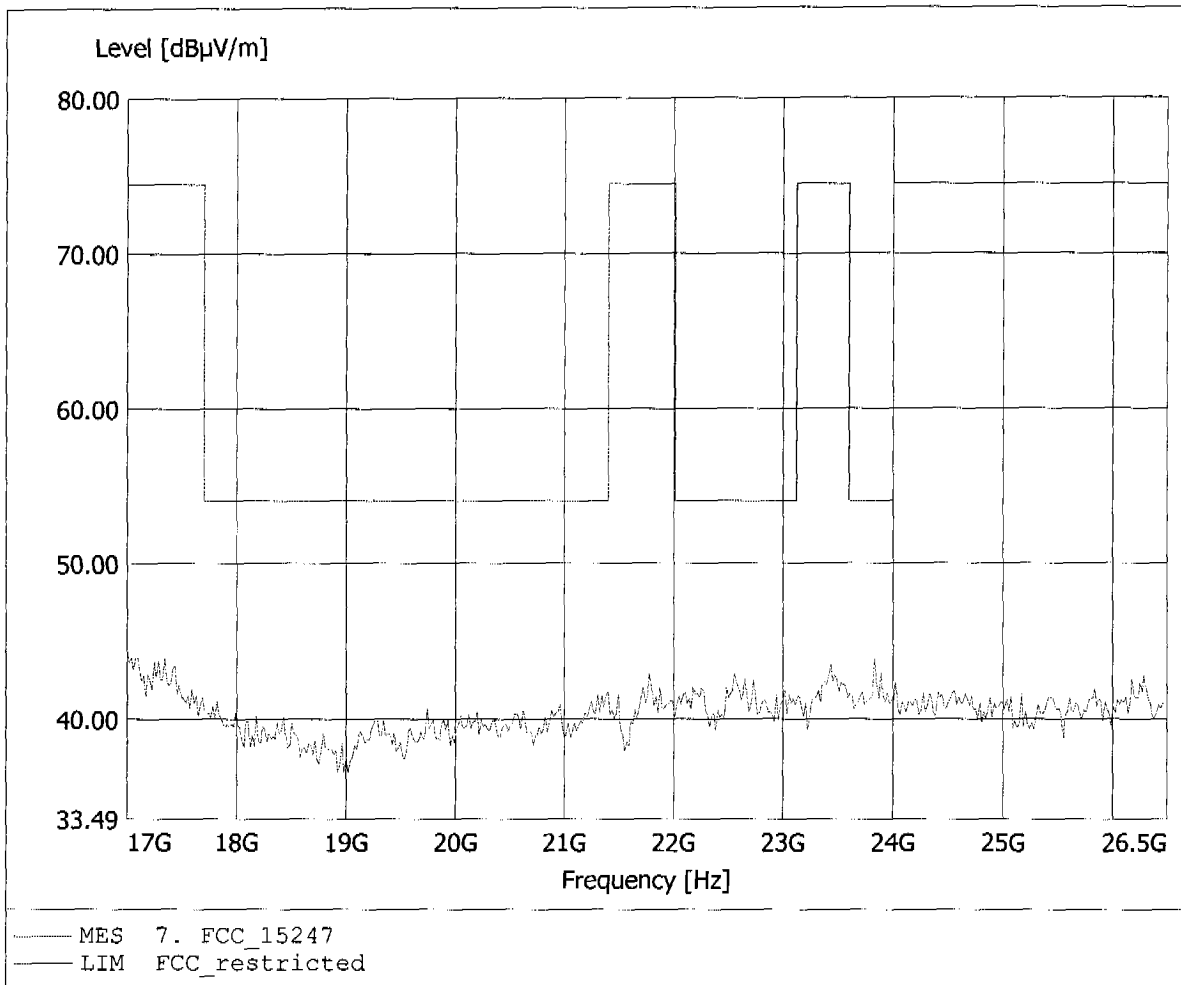

**Spurious emissions Field Strength  
FCC RULES PART 15, SUBPART C**

EUT: SA5250/1 802.11a/b/g mPCI Reference Design / Ch.:11  
Model: SA5250/1 mPCI  
Approval Holder: Philips Semiconductors Dresden AG  
Operating Condition: Tnom: 23°C / Unom: 120 V AC (powered by mPCI-slot)  
Test Site / Operator: ETS / Mr. Hoppe  
Test Specification: according to S15.247, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 17.000GHz, Emax: 44.84dBµV/m, RBW: 1MHz

