

TEST REPORT



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (1) / (47) Pages

1. Applicant

- Name : SD Biosensor, Inc.
- Address : C-4th&5th, 16, Deogyong-daero, 1556beon-gil, Yeongtong-gu, Suwon-si, Gyeonggi-do,16690, REPUBLIC OF KOREA
- Date of Receipt : 2023-02-27

2. Manufacturer

- Name : AMPAK Technology Inc.
- Address : 8F, No.15-1 Zhonghua Road,Hsinchu Industrial Park, Hukou, Hsinchu,Taiwan, 30352

3 Use of Report : For FCC Conformance

4 Test Sample / Model: AP6256 / AP6256

5 Date of Test : 2023-04-29 to 2023-06-07

6 Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.247



7 Testing Environment: refer to 7 page

8 Test Results : Compliance

9. Location of Test : Permanent Testing Lab On Site Testing

(Address : (Unhak-Dong) 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by	Technical Manager
	Su-jun Hwang:  (Signature)	Young-taek Lee:  (Signature)

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2023-08-22

CTK Co., Ltd.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (2) / (47) Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2023-08-22	Issued (CTK-2023-01830)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (3) / (47) Pages

CONTENTS

1. General Product Description	4
1.1 Applicant Information	4
1.2 Product Information.....	4
1.3 Peripheral Devices	4
2. Accreditations	5
2.1 Laboratory Accreditations and Listings.....	5
2.2 Calibration Details of Equipment Used for Measurement.....	5
3. Test Specifications	6
3.1 Standards	6
3.2 Mode of operation during the test	7
3.3 Testing Environment	7
3.4 Maximum Measurement Uncertainty	8
3.5 Test Software	8
4. Technical Characteristic Test.....	9
4.1 6dB Bandwidth	9
4.2 OUTPUT POWER.....	13
4.3 Transmitter Power Spectral Density.....	17
4.4 Conducted Spurious emission.....	21
4.5 Radiated Emission	25
4.6 AC Conducted Emissions	43
APPENDIX A – Test Equipment Used For Tests	46



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (4) / (47) Pages

1. General Product Description

1.1 Applicant Information

Company	SD Biosensor, Inc.
Contact Point	C-4th&5th, 16, Deogyeong-daero, 1556beon-gil, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16690, REPUBLIC OF KOREA
Contact Person	Name : Hyun-Soo Woo E-mail : hswoo@sdbiosensor.com Tel : +82-31-8065-0262 Fax : +82-31-300-0488

1.2 Product Information

FCC ID	RPJAP6256
Product Description	AP6256
Model name	AP6256
Variant Model name	-
Operating Frequency	2 412 MHz – 2 472 MHz (20 MHz_BW)
RF Output Power	802.11b : 4.62 dBm (2.897 mW) 802.11g : 2.91 dBm (1.954 mW) 802.11n_HT20 : 2.59 dBm (1.791 mW)
Antenna Specification	Antenna type : FPC Antenna Peak Gain : 2.8 dBi
Number of channels	13 (802.11b/g/n_HT20)
Type of Modulation	802.11b : DSSS 802.11g/n : OFDM
Data Rate	802.11b : 11 / 5.5 / 2 / 1 Mbps 802.11g : 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps 802.11n: MCS(0 – 7)
Power Source	DC 3.3 V
Test Software(Version)	RFTestTool
RF Power setting in Test SW	"Default

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND772353R5S
AC/DC Adapter	HP	HSTNN-LA40	7628050001

2. Accreditations

2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A
KOREA	NRRA	KR0025

2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-01830
 Page (6) / (47) Pages

3. Test Specifications

3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(b)	Maximum Output Power	C	
15.247(d)	Conducted Spurious emission	C	
15.247(d)	Unwanted Emission(Conducted)	C	
15.247(e)	Transmitter Power Spectral Density	C	
15.209	Radiated Emissions	C	Radiated
15.207	AC Conducted Emissions	C	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.			
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.247			
<i>Note 4:</i> The tests were performed according to the method of measurements prescribed in KDB No.558074, ANSI C63.10-2013			

3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments. During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests. The results are only attached worst cases.

The Output power and Power Spectral Density for the 802.11 ax mode were investigated between all different tones, and we found that the highest tone had the highest output power and lowest tone had the highest PSD readings. Therefore, full testing was performed on both the highest and lowest tones.

Test Frequency & Bandwidth

Bandwidth	Lowest channel 1	Middle channel	Highest channel
20 MHz	2 412 MHz	2 437 MHz	2 462 MHz

Test mode & Worst case

Test mode	Modulation	Data rate (Worst case)	Duty Cycle	Duty Cycle Factor
802.11b	DSSS	1 Mbps	99.53 %	0.02 dB
802.11g	OFDM	6 Mbps	93.36 %	0.30 dB
802.11n_HT20	OFDM	MCS 0	93.21 %	0.31 dB

3.3 Testing Environment

Test Item	Test Date	Temperature (°C)	Relative Humidity (%)
6 dB Bandwidth	2023-05-04	24	35
Maximum Output Power	2023-05-04	24	35
Conducted Spurious emission	2023-05-04	24	35
Unwanted Emission(Conducted)	2023-05-04	24	35
Transmitter Power Spectral Density	2023-05-04	24	35
Radiated Emissions (1GHz Adobe)	2023-04-29 ~ 2023-06-07	22 ~ 25	33 ~ 48
Radiated Emissions (1GHz Below)	2023-05-24 ~ 2023-05-25	21 ~ 22	38 ~ 41
AC Conducted Emissions	2023-05-30	23	42



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (8) / (47) Pages

3.4 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L.: Approx. 95 %, $k = 2$)
Power Spectral Density	1.5 dB (C.L.: Approx. 95 %, $k = 2$)
Occupied Bandwidth	0.1 MHz (C.L.: Approx. 95 %, $k = 2$)
Unwanted Emission(conducted)	3.0 dB (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions ($f \leq 1$ GHz)	3.88 dB (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions ($f > 1$ GHz)	4.50 dB (C.L.: Approx. 95 %, $k = 2$)
Line Conducted Emission	1.94 dB (C.L.: Approx. 95 %, $k = 2$)

3.5 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	EP5RE Ver. 6.0.10, ES10 Ver. 2022.04.000
Line Conducted Test	EMC32 Ver. 10.50.00



4. Technical Characteristic Test

4.1 6dB Bandwidth

Test Procedures

KDB 558074 - Section 8.2
ANSI C63.10-2013 - Section 11.8.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Procedures

ANSI C63.10-2013 - Section 6.9

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW $\geq 3 \times$ RBW
- c) Detector = peak
- d) Trace mode = Max hold
- e) Sweep = auto couple
- f) Allow trace to fully stabilize
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Minimum Standard :

6 dB Bandwidth > 500kHz






CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (10) / (47) Pages




Test Data :

Mode	6 dB Bandwidth and 99 % Bandwidth (MHz)					
	802.11b		802.11g		802.11n_HT20	
Frequency	6 dB	99 %	6 dB	99 %	6 dB	99 %
2 412 MHz	8.16	11.39	16.33	16.44	17.13	17.64
2 437 MHz	8.13	10.75	16.32	16.43	17.32	17.63
2 462 MHz	8.13	11.08	15.80	16.38	16.04	17.58



See next pages for actual measured spectrum plots.

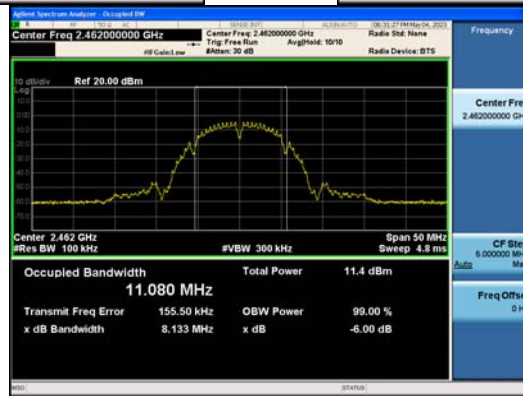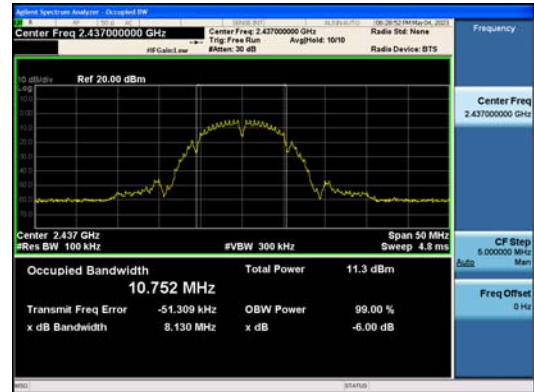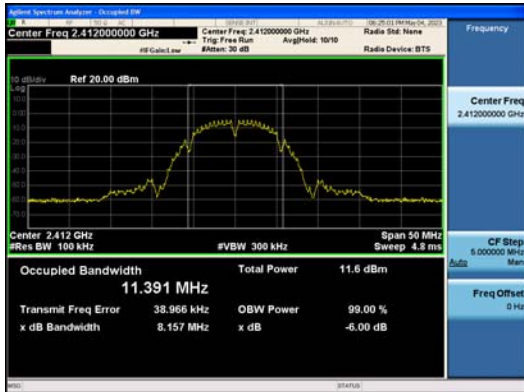

802.11b

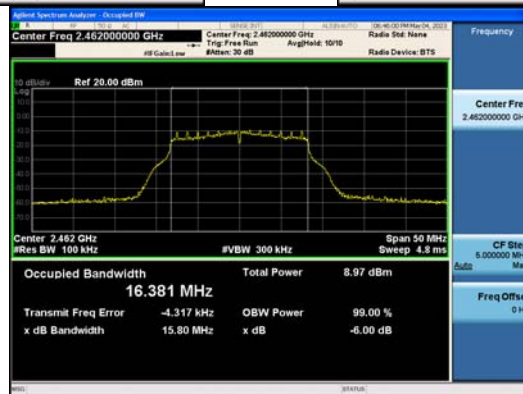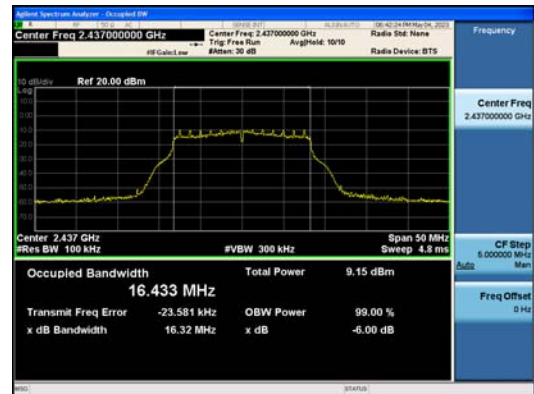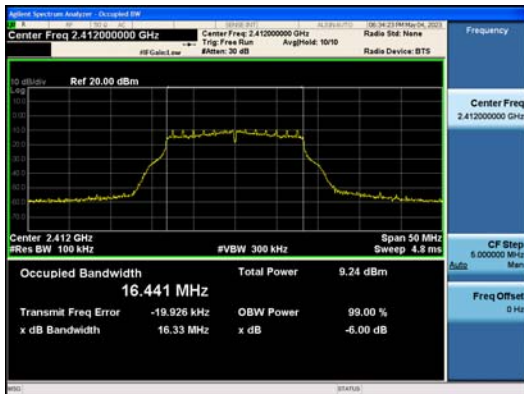

802.11g

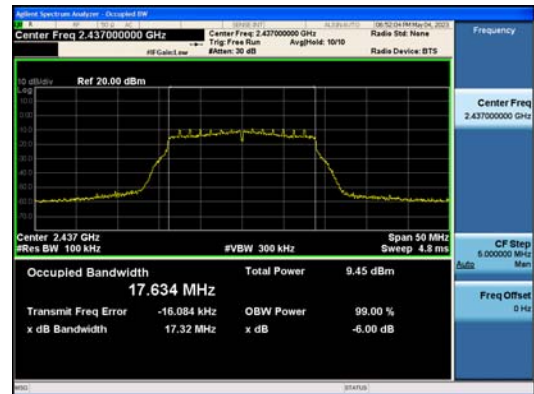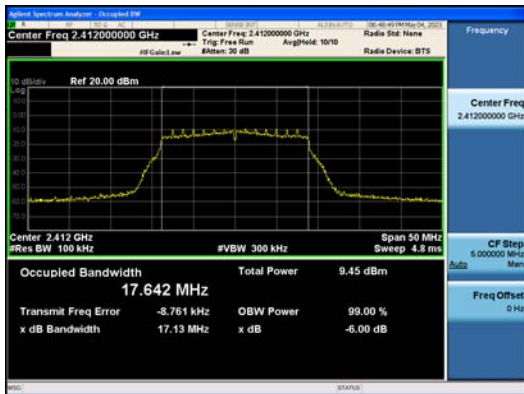


802.11n_HT20

4.2 OUTPUT POWER

Test Procedures

KDB 558074 - Section 8.3.2.2 (Average Power)
ANSI C63.10-2013 - Section 11.9.2.2

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) span $\geq 1.5 \times$ OBW
- b) RBW = 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Sweep time = auto
- e) Detector = RMS
- f) average at least 100
- g) Duty cycle factor = $10\log(1/x)$

Test mode	Duty Cycle Factor
802.11b	0.02 dB
802.11g	0.30 dB
802.11n_HT20	0.31 dB

Limit

Maximum Output Power < 1 W (30 dBm)






CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (14) / (47) Pages



Test Data :

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)
802.11b	2 412	4.60	0.02	4.62	30.00
	2 437	4.34		4.36	
	2 462	4.41		4.43	
802.11g	2 412	2.61	0.30	2.91	30.00
	2 437	2.43		2.73	
	2 462	2.25		2.55	
802.11n _HT20	2 412	2.19	0.31	2.50	30.00
	2 437	2.28		2.59	
	2 462	2.00		2.31	




See next pages for actual measured spectrum plots.

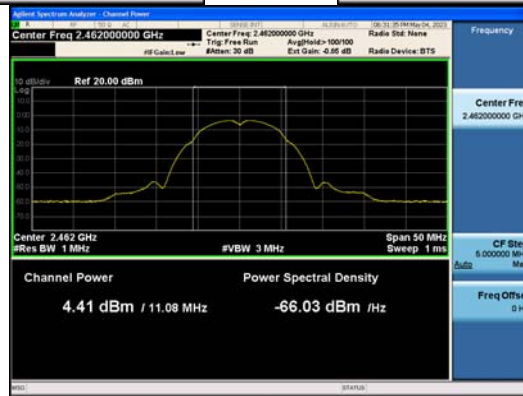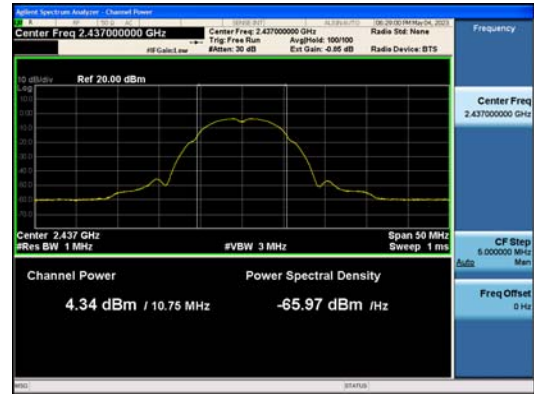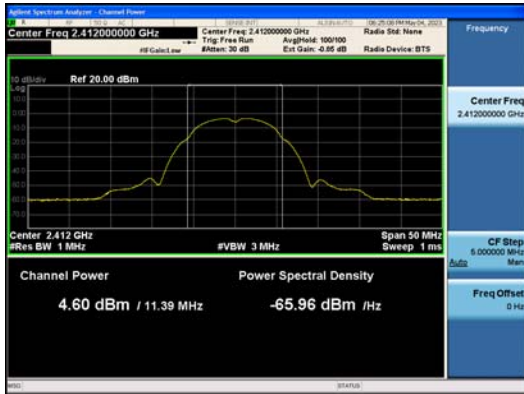

802.11b

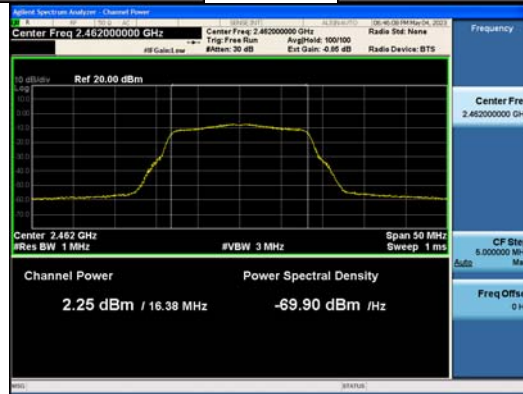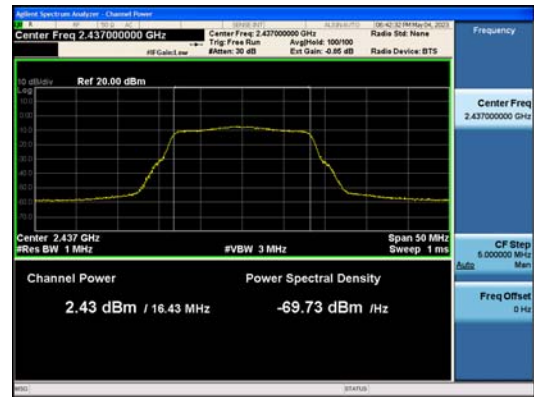

802.11b

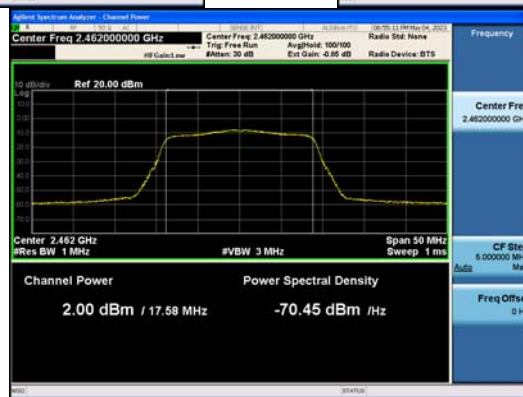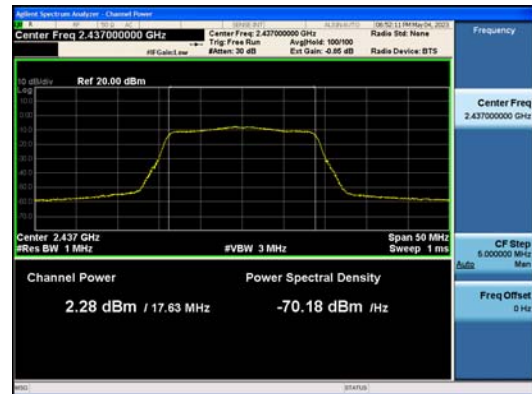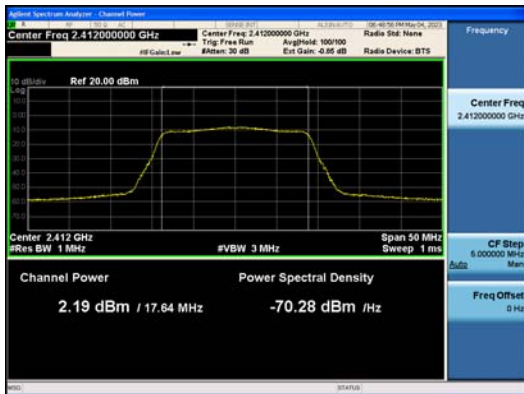

802.11n_HT20



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (17) / (47) Pages

4.3 Transmitter Power Spectral Density

Test Procedures

KDB 558074 - Section 8.4
ANSI C63.10-2013 - Section 11.10.2

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) $RBW : 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$
- b) $VBW \geq 3 \times RBW$
- c) $span \geq 1.5 \times \text{DTS bandwidth}$
- d) Sweep time = auto couple
- e) Detector = peak
- f) Trace mode = max hold
- g) Allow trace to fully stabilize
- h) Use the peak marker function to determine the maximum amplitude level within the RBW.

Limit

Power Spectral Density < 8dBm @ 3 kHz BW



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (18) / (47) Pages



Test Data

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Limit (dBm)
802.11b	2 412	-17.33	8.00
	2 437	-17.45	
	2 462	-17.78	
802.11g	2 412	-21.14	8.00
	2 437	-20.97	
	2 462	-20.37	
802.11n _HT20	2 412	-21.48	8.00
	2 437	-21.09	
	2 462	-21.28	

See next pages for actual measured spectrum plots.



802.11b

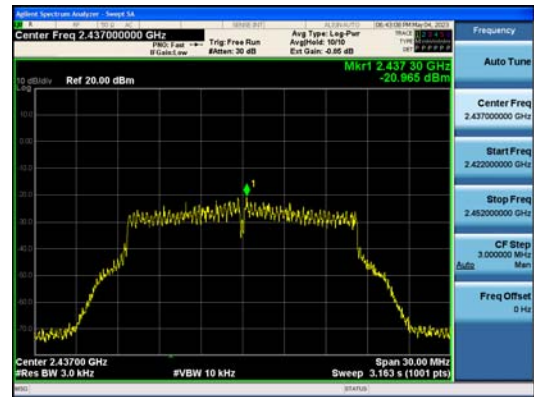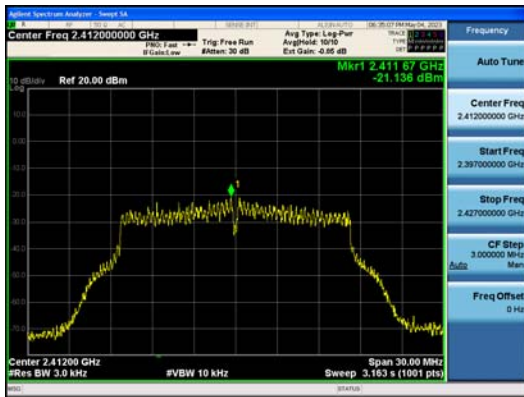


802.11g



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (20) / (47) Pages

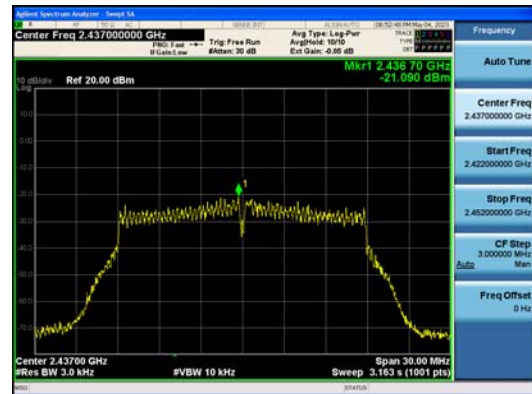

802.11n_HT20



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (21) / (47) Pages

4.4 Conducted Spurious emission

Test Procedures

KDB 558074 - Section 8.5
ANSI C63.10-2013 - Section 11.11.3

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.
After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW $\geq 3 \times$ RBW
- c) Detector = peak
- d) Sweep time = auto couple
- e) Trace mode= max hold
- f) Allow trace to fully stabilize
- g) Use the peak marker function to determine the maximum amplitude level.

Limit :

Emission level < 30 dBc

Test Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 30dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-01830
 Page (22) / (47) Pages



802.11b



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-01830
 Page (23) / (47) Pages




802.11g



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-01830
 Page (24) / (47) Pages

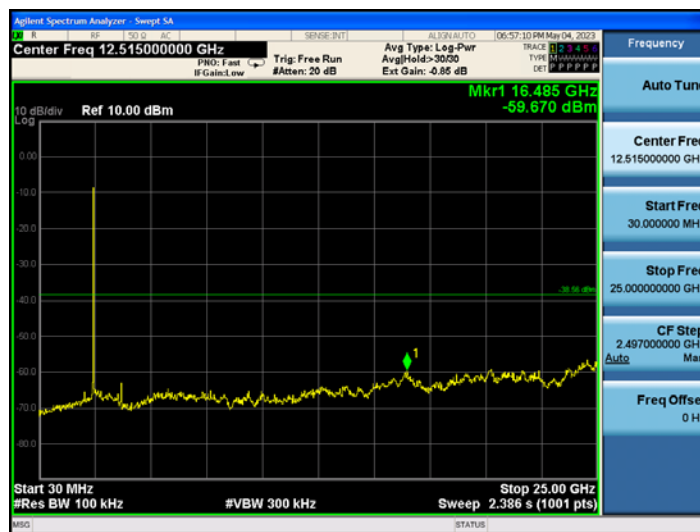

802.11n_HT20



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (25) / (47) Pages

4.5 Radiated Emission

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
 3 m SAC (test distance : 3 m)

Test Procedures

KDB 558074 - Section 8.5, 8.6
ANSI C63.10-2013 - Section 11.11, 11.12

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Test Settings :

Frequency Range = 9 kHz ~ 26.5 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz,
200 Hz for $f < 150$ kHz
- b) VBW \geq RBW
- c) Sweep time = auto couple



Limit :

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Table 1. Restricted Frequency Bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

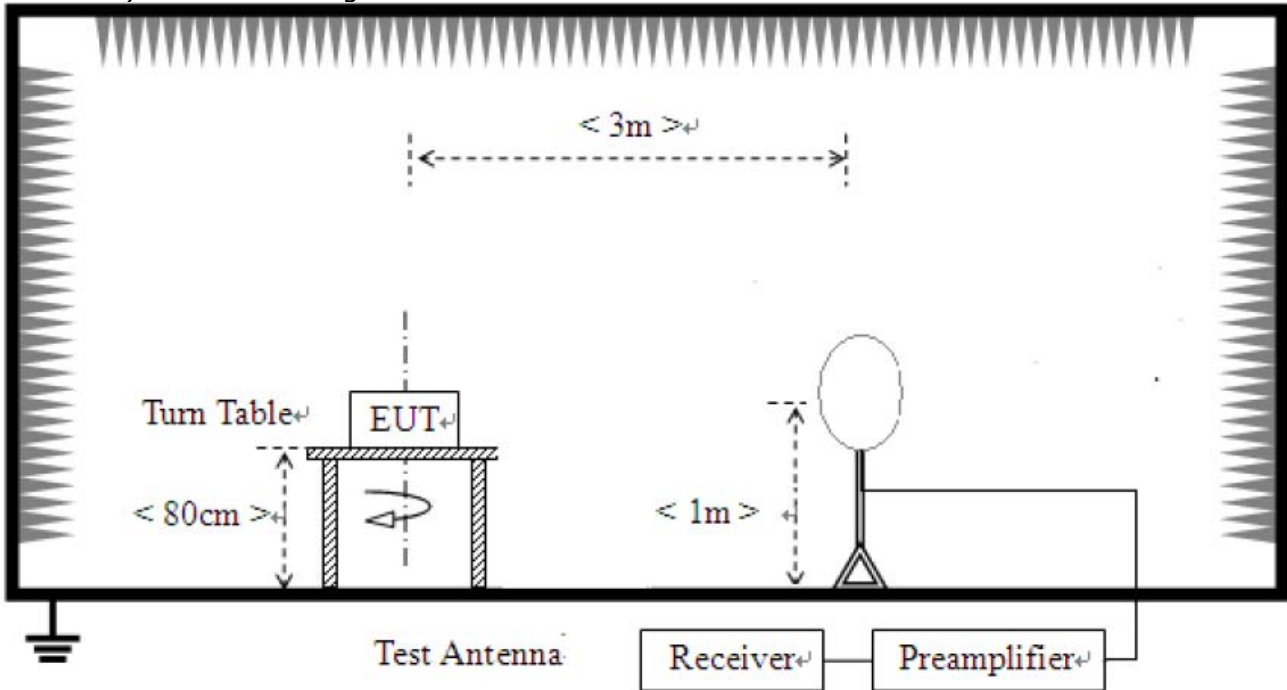

- 2) For field strength of emissions from 30 MHz to 1 GHz

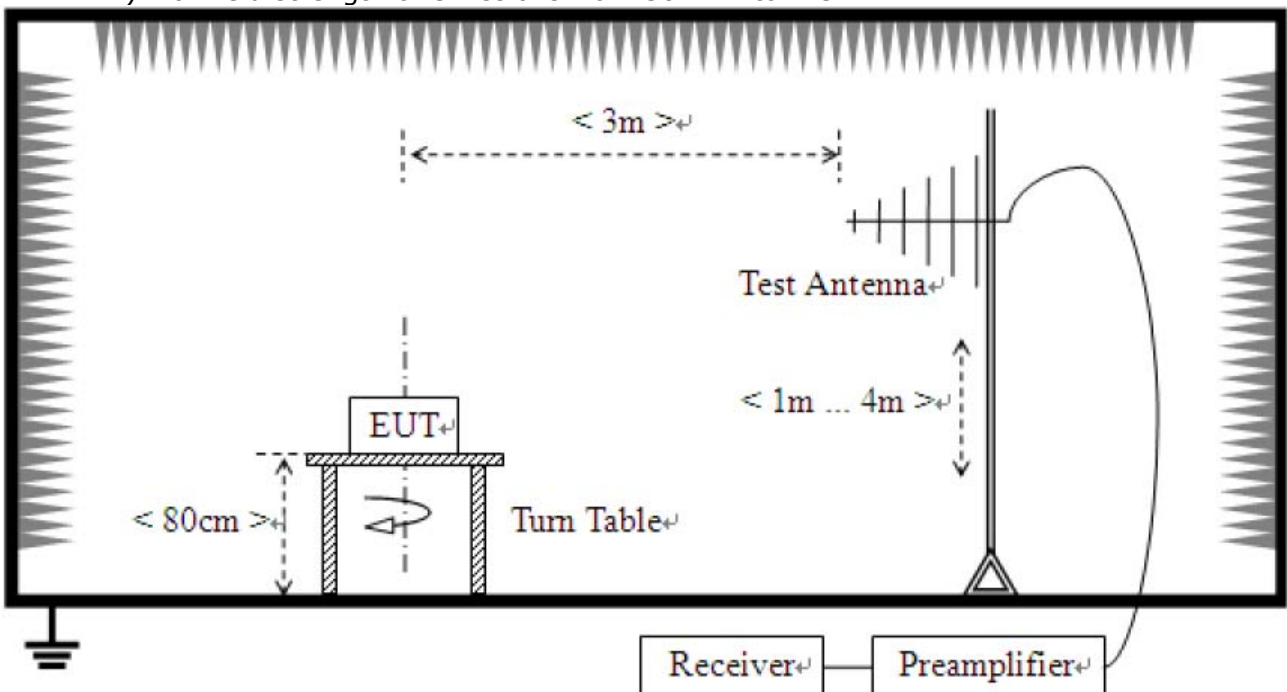

3) For field strength of emissions above 1 GHz

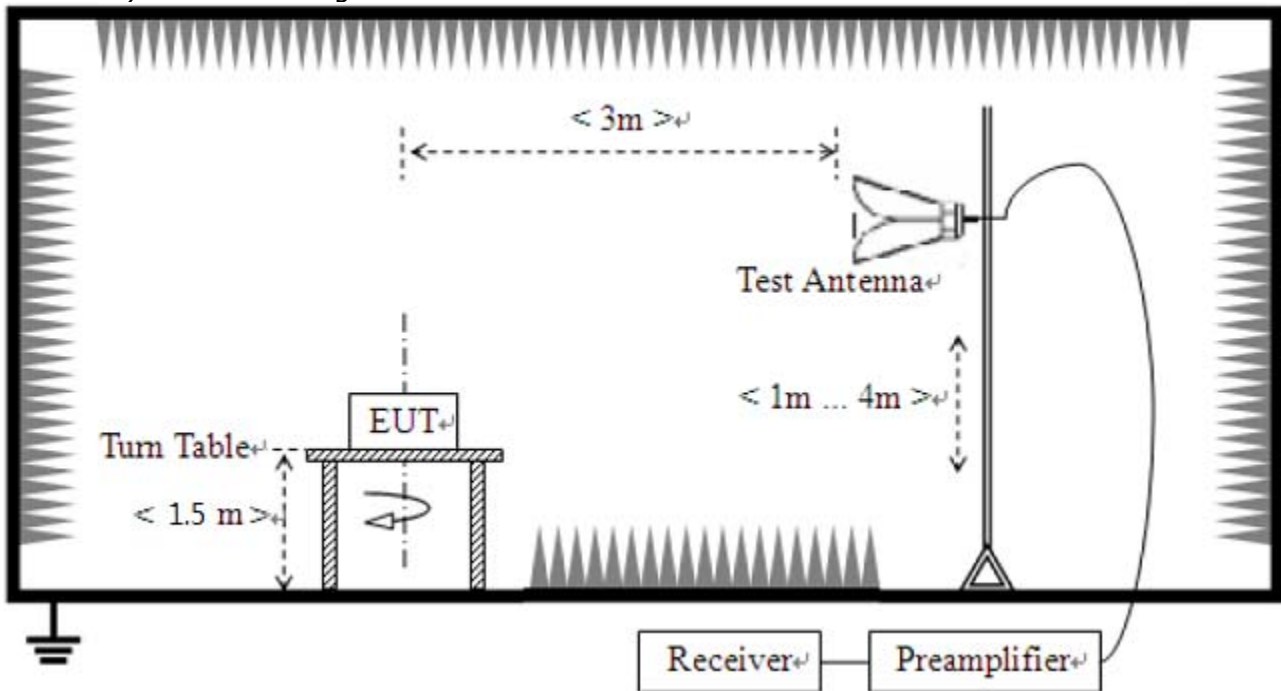

Test results


1) 9 kHz to 30 MHz

Test mode : Transmitter (Worst Case)

The requirements are:

Complies

Test Data

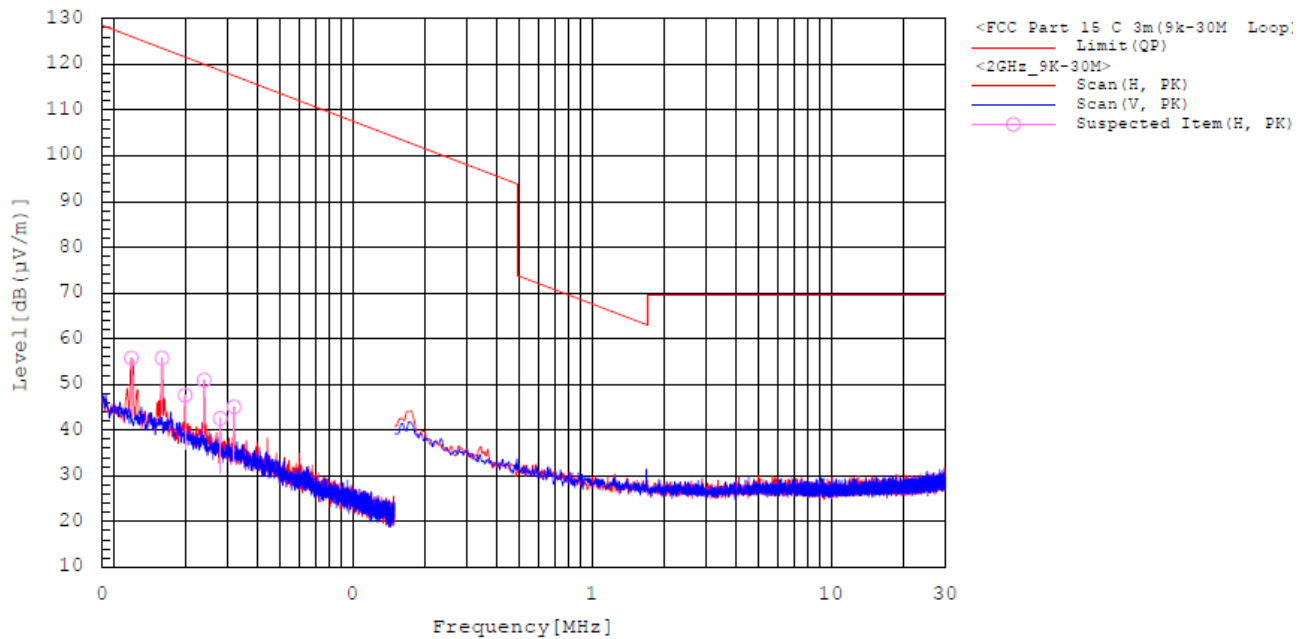

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. This data is the Peak(PK) value.

Test mode : Transmitter (simultaneous transmissions DSS + DTS)

The requirements are:

Complies

Test Data

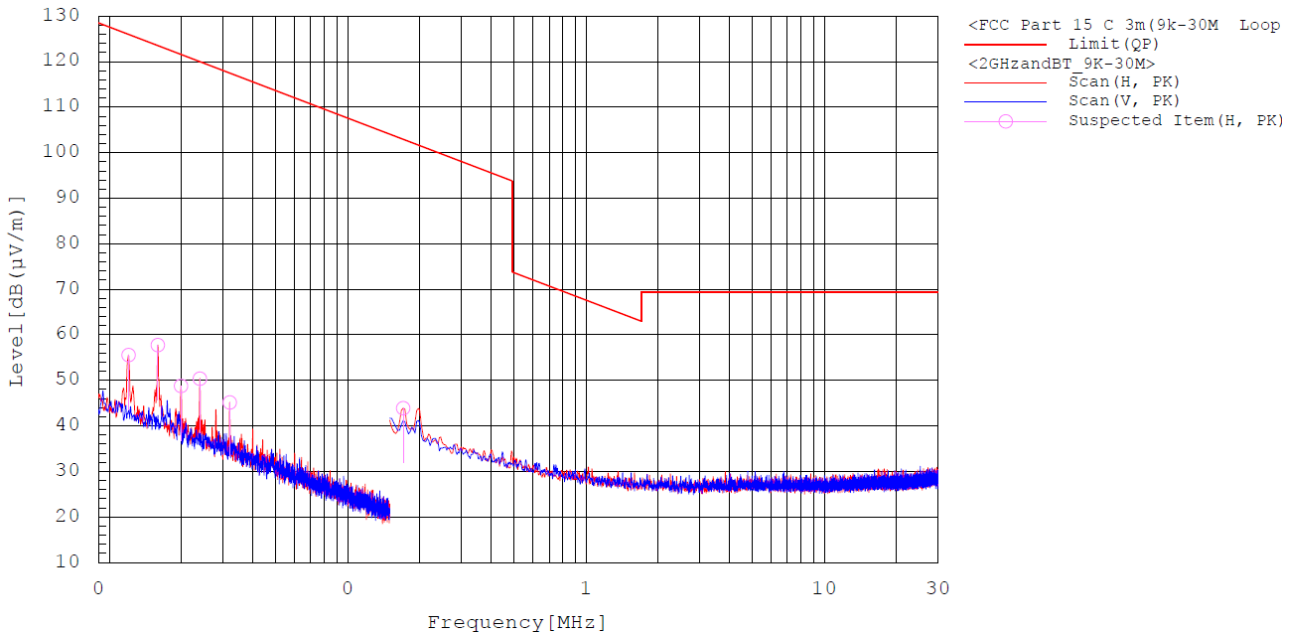

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. This data is the Peak(PK) value.


2) 30 MHz to 1 GHz

Test mode : Transmitter (Worst Case)

The requirements are:

Complies

Test Data

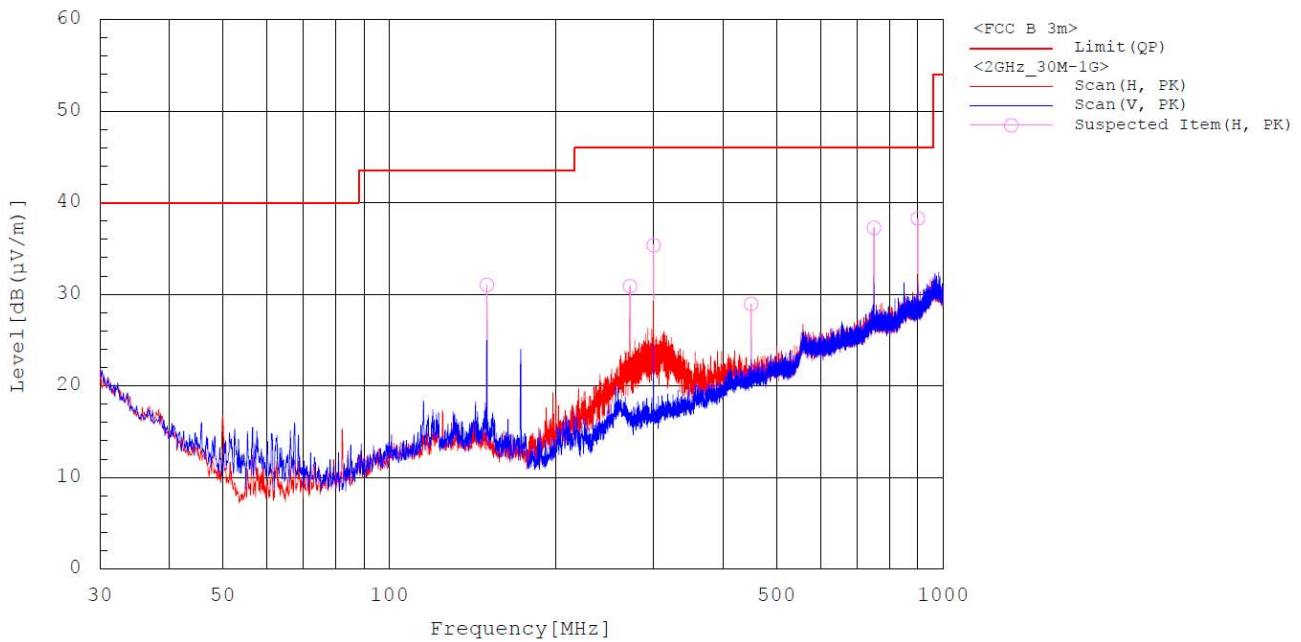

Frequency [MHz]	(P)	Reading [dBUV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
149.989	H	43.80	-12.80	31.00	43.50	12.50
271.918	H	41.30	-10.40	30.90	46.00	15.10
300.048	H	45.50	-10.10	35.40	46.00	10.60
450.010	H	34.50	-5.50	29.00	46.00	17.00
750.031	H	35.70	1.60	37.30	46.00	8.70
900.090	H	34.60	3.70	38.30	46.00	7.70

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : Transmitter (simultaneous transmissions DSS + DTS)

The requirements are:

Complies

Test Data

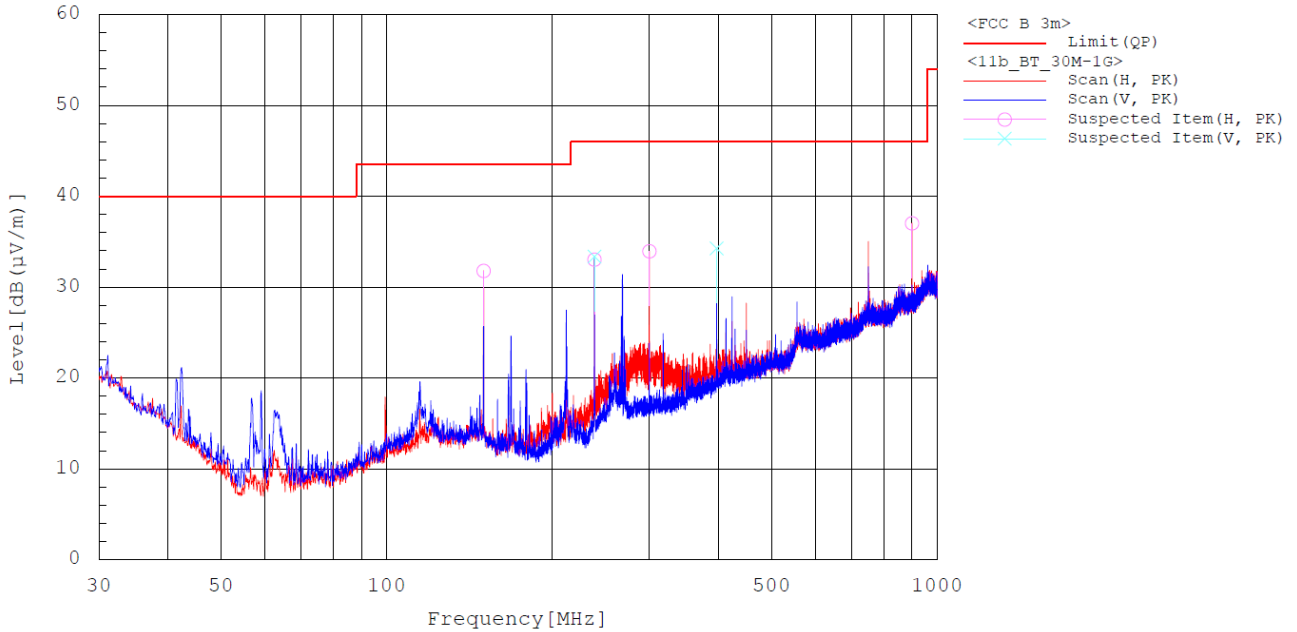

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
149.989	H	44.60	-12.80	31.80	43.50	11.70
238.453	V	45.80	-12.40	33.40	46.00	12.60
238.453	H	45.40	-12.40	33.00	46.00	13.00
300.048	H	44.10	-10.10	34.00	46.00	12.00
397.533	V	41.40	-7.10	34.30	46.00	11.70
900.090	H	33.30	3.70	37.00	46.00	9.00

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

3) above 1 GHz

The requirements are:

Complies



Test Data

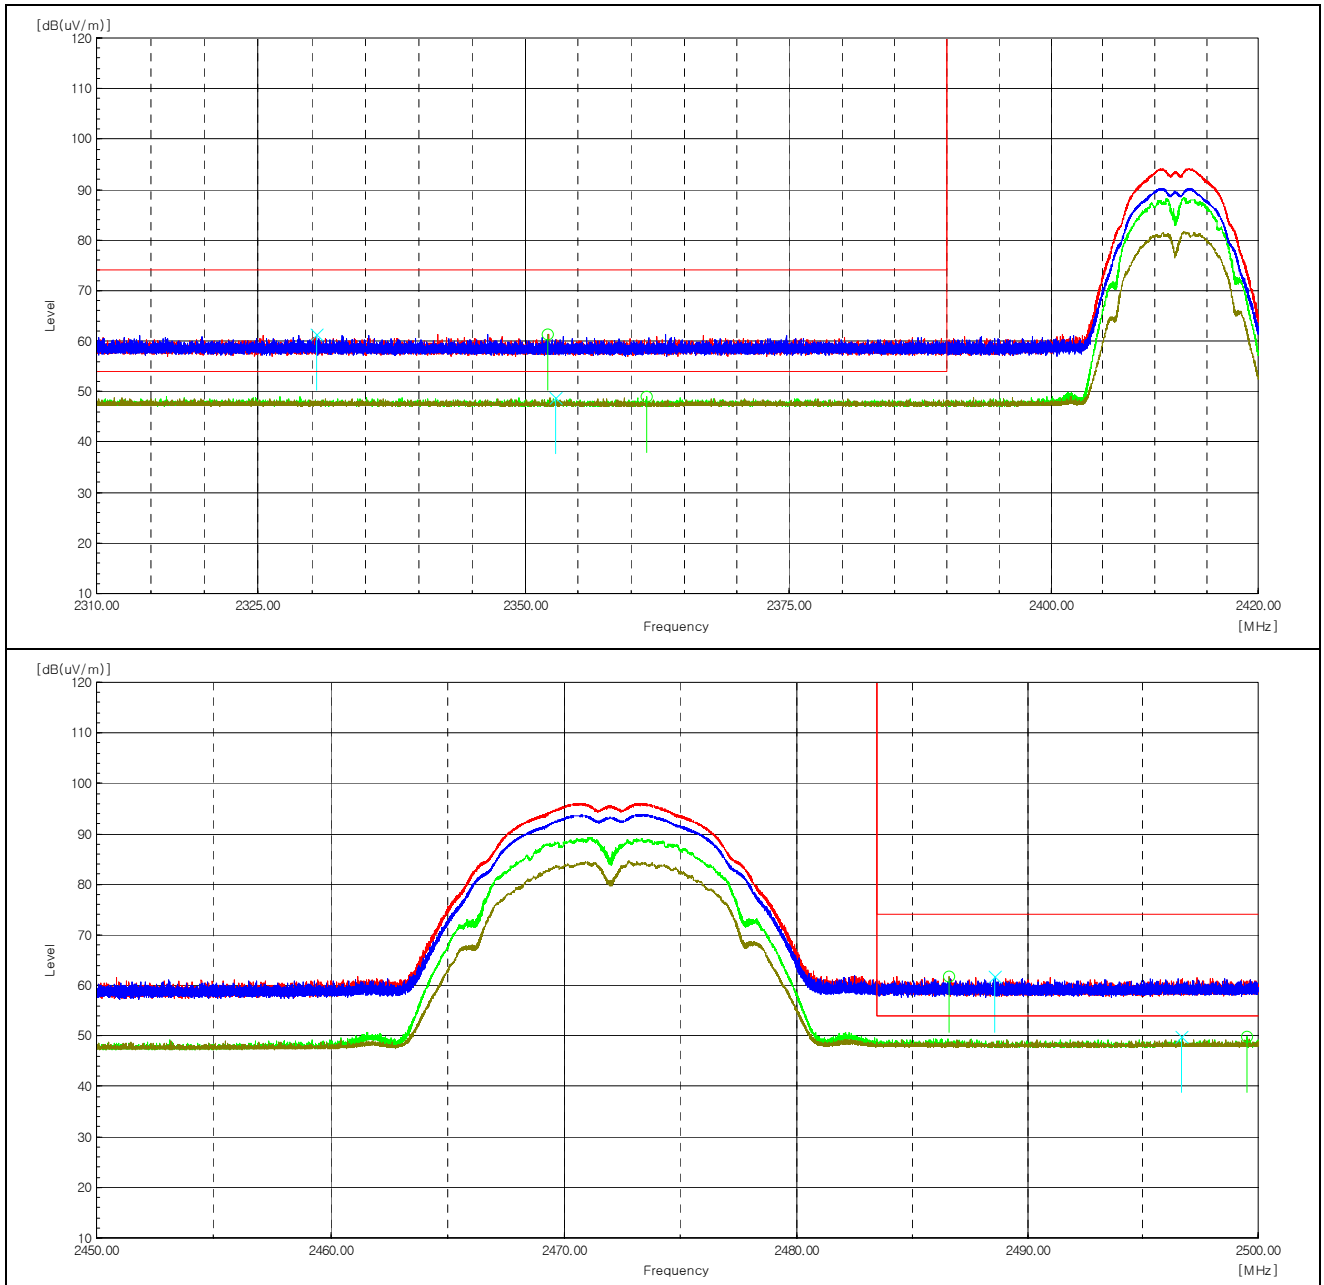



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (35) / (47) Pages

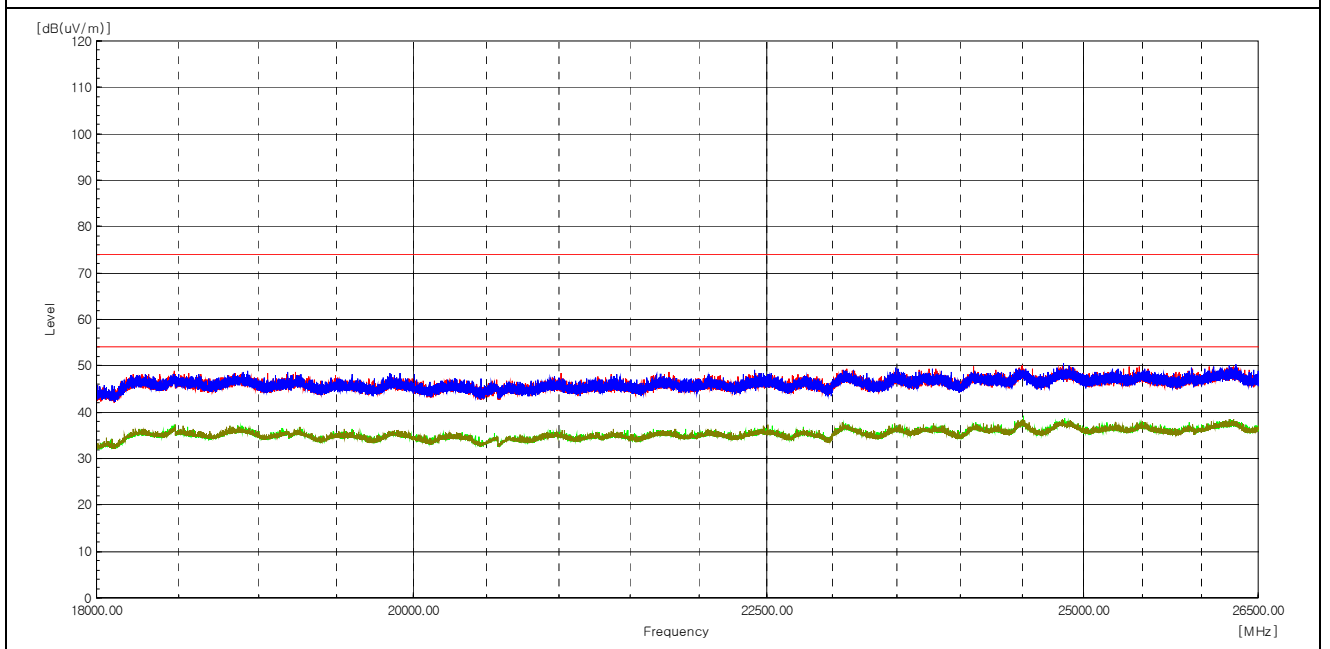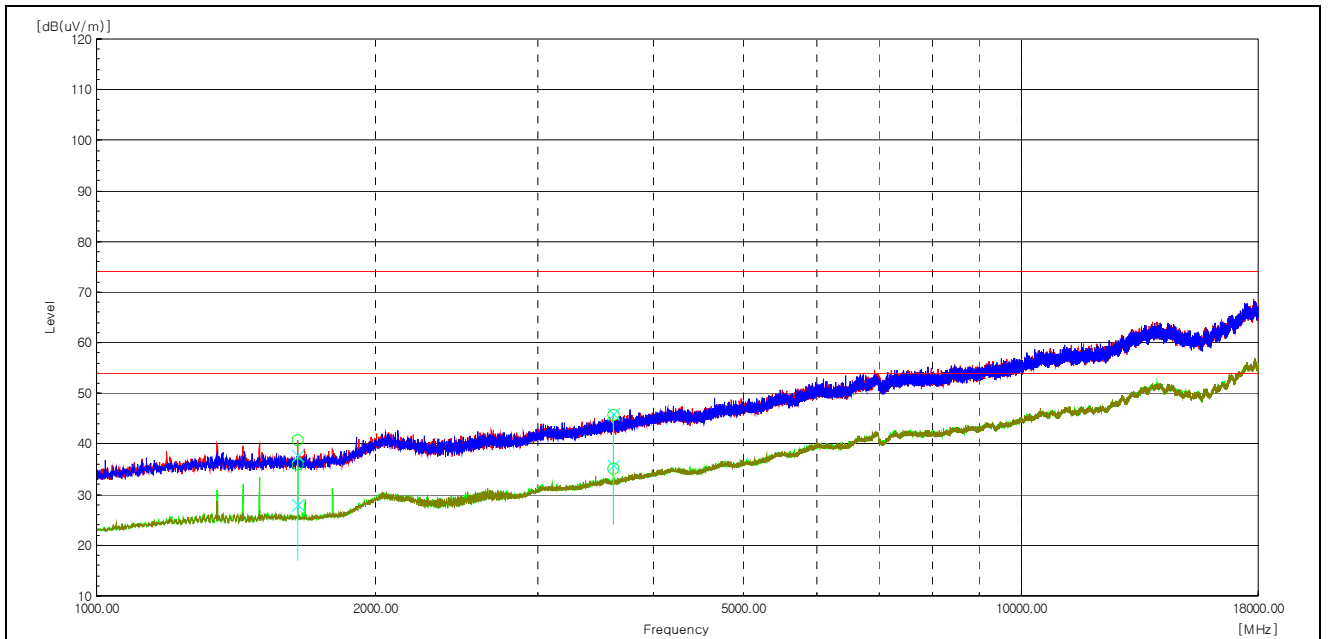



Test Frequency Range : 1 GHz to 18 GHz
Test Mode : 802.11b

Lowest channel (2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
1 649.426	H	49.90	-9.20	40.70	-----	74.00	-	33.30	-----	Peak
1 650.106	H	45.10	-9.20	-----	35.90	-	54.00	-----	18.10	Average
1 649.426	V	47.00	-9.20	37.80	-----	74.00	-	36.20	-----	Peak
1 650.106	V	37.20	-9.20	-----	28.00	-	54.00	-----	26.00	Average
3 618.104	H	46.90	-1.20	45.70	-----	74.00	-	28.30	-----	Peak
3 618.104	H	36.30	-1.20	-----	35.10	-	54.00	-----	18.90	Average
3 618.104	V	47.20	-1.20	46.00	-----	74.00	-	28.00	-----	Peak
3 618.104	V	37.10	-1.20	-----	35.90	-	54.00	-----	18.10	Average

Middle channel (2 437 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
1 650.106	H	49.70	-9.20	40.50	-----	74.00	-----	33.50	-----	Peak
1 650.106	H	45.00	-9.20	-----	35.80	-----	54.00	-----	18.20	Average
1 650.106	V	47.60	-9.20	38.40	-----	74.00	-----	35.60	-----	Peak
1 650.106	V	37.00	-9.20	-----	27.80	-----	54.00	-----	26.20	Average
3 662.986	H	45.30	-1.20	44.10	-----	74.00	-----	29.90	-----	Peak
3 662.986	H	36.30	-1.20	-----	35.10	-----	54.00	-----	18.90	Average
3 662.986	V	46.70	-1.20	45.50	-----	74.00	-----	28.50	-----	Peak
3 662.986	V	37.00	-1.20	-----	35.80	-----	54.00	-----	18.20	Average

Highest channel (2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
1 650.106	H	50.40	-9.20	41.20	-----	74.00	-----	32.80	-----	Peak
1 650.106	H	45.00	-9.20	-----	35.80	-----	54.00	-----	18.20	Average
1 650.106	V	46.60	-9.20	37.40	-----	74.00	-----	36.60	-----	Peak
1 650.106	V	37.00	-9.20	-----	27.80	-----	54.00	-----	26.20	Average
3 708.548	H	45.70	-0.70	45.00	-----	74.00	-----	29.00	-----	Peak
3 707.868	H	35.60	-0.70	-----	34.90	-----	54.00	-----	19.10	Average
3 707.868	V	46.20	-0.70	45.50	-----	74.00	-----	28.50	-----	Peak
3 707.868	V	37.00	-0.70	-----	36.30	-----	54.00	-----	17.70	Average



Test Mode : 802.11g

Lowest channel (2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
1 649.426	H	50.50	-9.20	41.30	-----	74.00	-----	32.70	-----	Peak
1 650.106	H	44.70	-9.20	-----	35.50	-----	54.00	-----	18.50	Average
1 649.426	V	47.30	-9.20	38.10	-----	74.00	-----	35.90	-----	Peak
1 650.106	V	37.10	-9.20	-----	27.90	-----	54.00	-----	26.10	Average
3 617.425	H	47.40	-1.20	46.20	-----	74.00	-----	27.80	-----	Peak
3 618.104	H	36.40	-1.20	-----	35.20	-----	54.00	-----	18.80	Average
3 618.104	V	46.90	-1.20	45.70	-----	74.00	-----	28.30	-----	Peak
3 618.104	V	37.00	-1.20	-----	35.80	-----	54.00	-----	18.20	Average

Middle channel (2 437 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
1 649.426	H	50.20	-9.20	41.00	-----	74.00	-----	33.00	-----	Peak
1 650.106	H	45.10	-9.20	-----	35.90	-----	54.00	-----	18.10	Average
1 649.426	V	48.60	-9.20	39.40	-----	74.00	-----	34.60	-----	Peak
1 650.106	V	36.90	-9.20	-----	27.70	-----	54.00	-----	26.30	Average
3 662.986	H	46.30	-1.20	45.10	-----	74.00	-----	28.90	-----	Peak
3 662.986	H	36.20	-1.20	-----	35.00	-----	54.00	-----	19.00	Average
3 662.306	V	46.70	-1.20	45.50	-----	74.00	-----	28.50	-----	Peak
3 662.986	V	37.10	-1.20	-----	35.90	-----	54.00	-----	18.10	Average

Highest channel (2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
1 650.106	H	50.00	-9.20	40.80	-----	74.00	-----	33.20	-----	Peak
1 650.106	H	44.80	-9.20	-----	35.60	-----	54.00	-----	18.40	Average
1 649.426	V	47.30	-9.20	38.10	-----	74.00	-----	35.90	-----	Peak
1 650.106	V	37.20	-9.20	-----	28.00	-----	54.00	-----	26.00	Average
3 707.868	H	46.30	-0.70	45.60	-----	74.00	-----	28.40	-----	Peak
3 707.868	H	36.10	-0.70	-----	35.40	-----	54.00	-----	18.60	Average
3 707.868	V	46.30	-0.70	45.60	-----	74.00	-----	28.40	-----	Peak
3 707.868	V	36.60	-0.70	-----	35.90	-----	54.00	-----	18.10	Average



Test Mode : 802.11n_HT20

Lowest channel (2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
1 650.106	H	50.00	-9.20	40.80	-----	74.00	-----	33.20	-----	Peak
1 650.106	H	45.20	-9.20	-----	36.00	-----	54.00	-----	18.00	Average
1 649.426	V	47.40	-9.20	38.20	-----	74.00	-----	35.80	-----	Peak
1 650.106	V	37.00	-9.20	-----	27.80	-----	54.00	-----	26.20	Average
3 618.104	H	46.60	-1.20	45.40	-----	74.00	-----	28.60	-----	Peak
3 618.104	H	36.40	-1.20	-----	35.20	-----	54.00	-----	18.80	Average
3 617.425	V	46.20	-1.20	45.00	-----	74.00	-----	29.00	-----	Peak
3 618.104	V	36.90	-1.20	-----	35.70	-----	54.00	-----	18.30	Average

Middle channel (2 437 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
1 650.106	H	50.10	-9.20	40.90	-----	74.00	-----	33.10	-----	Peak
1 650.106	H	45.10	-9.20	-----	35.90	-----	54.00	-----	18.10	Average
1 650.106	V	47.20	-9.20	38.00	-----	74.00	-----	36.00	-----	Peak
1 650.106	V	37.10	-9.20	-----	27.90	-----	54.00	-----	26.10	Average
3 662.986	H	47.00	-1.20	45.80	-----	74.00	-----	28.20	-----	Peak
3 662.986	H	36.30	-1.20	-----	35.10	-----	54.00	-----	18.90	Average
3 663.666	V	46.40	-1.20	45.20	-----	74.00	-----	28.80	-----	Peak
3 662.986	V	36.90	-1.20	-----	35.70	-----	54.00	-----	18.30	Average

Highest channel (2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
1 650.106	H	50.10	-9.20	40.90	-----	74.00	-----	33.10	-----	Peak
1 650.106	H	45.20	-9.20	-----	36.00	-----	54.00	-----	18.00	Average
1 650.106	V	47.00	-9.20	37.80	-----	74.00	-----	36.20	-----	Peak
1 650.106	V	37.60	-9.20	-----	28.40	-----	54.00	-----	25.60	Average
3 707.868	H	46.30	-0.70	45.60	-----	74.00	-----	28.40	-----	Peak
3 707.868	H	36.10	-0.70	-----	35.40	-----	54.00	-----	18.60	Average
3 707.868	V	46.20	-0.70	45.50	-----	74.00	-----	28.50	-----	Peak
3 707.868	V	36.70	-0.70	-----	36.00	-----	54.00	-----	18.00	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (39) / (47) Pages

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz
5. The 18 GHz end had no signal detected.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (40) / (47) Pages

Test Frequency Range : 18 GHz to 26.5 GHz

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

No peak found

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-01830
 Page (41) / (47) Pages

Test frequency range : 2 310 MHz – 2 390 MHz
Test Mode : 802.11b

Lowest channel (2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 352.180	H	67.20	-5.90	61.30	-----	74.00	-----	12.70	-----	Peak
2 361.456	H	54.90	-5.90	-----	49.00	-----	54.00	-----	5.00	Average
2 330.492	V	67.30	-5.90	61.40	-----	74.00	-----	12.60	-----	Peak
2 352.849	V	54.80	-5.90	-----	48.90	-----	54.00	-----	5.10	Average

Test Mode : 802.11g

Lowest channel (2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 312.082	H	67.70	-5.90	61.80	-----	74.00	-----	12.20	-----	Peak
2 371.132	H	54.80	-5.80	-----	49.00	-----	54.00	-----	5.00	Average
2 331.112	V	67.40	-5.90	61.50	-----	74.00	-----	12.50	-----	Peak
2 356.198	V	54.70	-5.90	-----	48.80	-----	54.00	-----	5.20	Average

Test Mode : 802.11n_HT20

Lowest channel (2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 380.359	H	66.70	-5.80	60.90	-----	74.00	-----	13.10	-----	Peak
2 313.560	H	54.00	-5.90	-----	48.10	-----	54.00	-----	5.90	Average
2 323.007	V	66.40	-5.90	60.50	-----	74.00	-----	13.50	-----	Peak
2 323.064	V	54.50	-5.90	-----	48.60	-----	54.00	-----	5.40	Average



Test frequency range : 2 483.5 MHz – 2 500 MHz
Test Mode : 802.11b

Highest channel (2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 486.624	H	67.00	-5.20	61.80	-----	74.00	-----	12.20	-----	Peak
2 499.504	H	55.00	-5.10	-----	49.90	-----	54.00	-----	4.10	Average
2 488.595	V	66.90	-5.20	61.70	-----	74.00	-----	12.30	-----	Peak
2 496.688	V	55.00	-5.10	-----	49.90	-----	54.00	-----	4.10	Average

Test Mode : 802.11g

Highest channel (2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 483.575	H	74.10	-5.30	68.80	-----	74.00	-----	5.20	-----	Peak
2 483.503	H	55.90	-5.30	-----	50.60	-----	54.00	-----	3.40	Average
2 483.535	V	71.50	-5.30	66.20	-----	74.00	-----	7.80	-----	Peak
2 490.204	V	54.60	-5.20	-----	49.40	-----	54.00	-----	4.60	Average

Test Mode : 802.11n_HT20

Highest channel (2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 483.621	H	75.50	-5.30	70.20	-----	74.00	-----	3.80	-----	Peak
2 483.559	H	55.50	-5.30	-----	50.20	-----	54.00	-----	3.80	Average
2 483.505	V	73.20	-5.30	67.90	-----	74.00	-----	6.10	-----	Peak
2 499.720	V	54.50	-5.10	-----	49.40	-----	54.00	-----	4.60	Average

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (43) / (47) Pages

4.6 AC Conducted Emissions

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

ANSI C63.10-2013 - Section 6.2

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.


Test Results

The requirements are:

Complies

Test Data


[LINE]

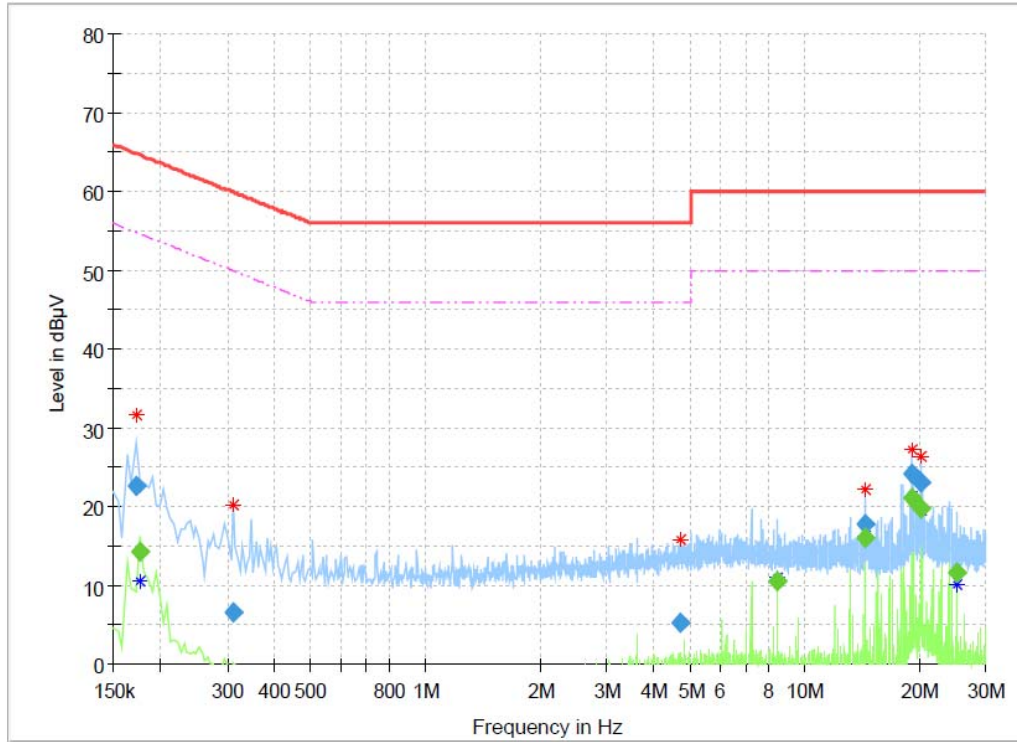

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.172500	22.69	---	64.84	42.15	15000.0	9.000	L1	ON	10.0
0.177000	---	14.38	54.63	40.24	15000.0	9.000	L1	ON	10.0
0.312000	6.51	---	59.92	53.41	15000.0	9.000	L1	ON	9.8
4.681500	5.32	---	56.00	50.68	15000.0	9.000	L1	ON	9.7
8.439000	---	10.63	50.00	39.37	15000.0	9.000	L1	ON	9.8
14.469000	---	16.06	50.00	33.94	15000.0	9.000	L1	ON	9.8
14.469000	17.85	---	60.00	42.15	15000.0	9.000	L1	ON	9.8
19.108500	---	21.11	50.00	28.89	15000.0	9.000	L1	ON	9.9
19.108500	24.11	---	60.00	35.89	15000.0	9.000	L1	ON	9.9
20.314500	---	19.69	50.00	30.31	15000.0	9.000	L1	ON	9.9
20.314500	23.16	---	60.00	36.84	15000.0	9.000	L1	ON	9.9
25.318500	---	11.54	50.00	38.46	15000.0	9.000	L1	ON	9.8

[NEUTRAL]

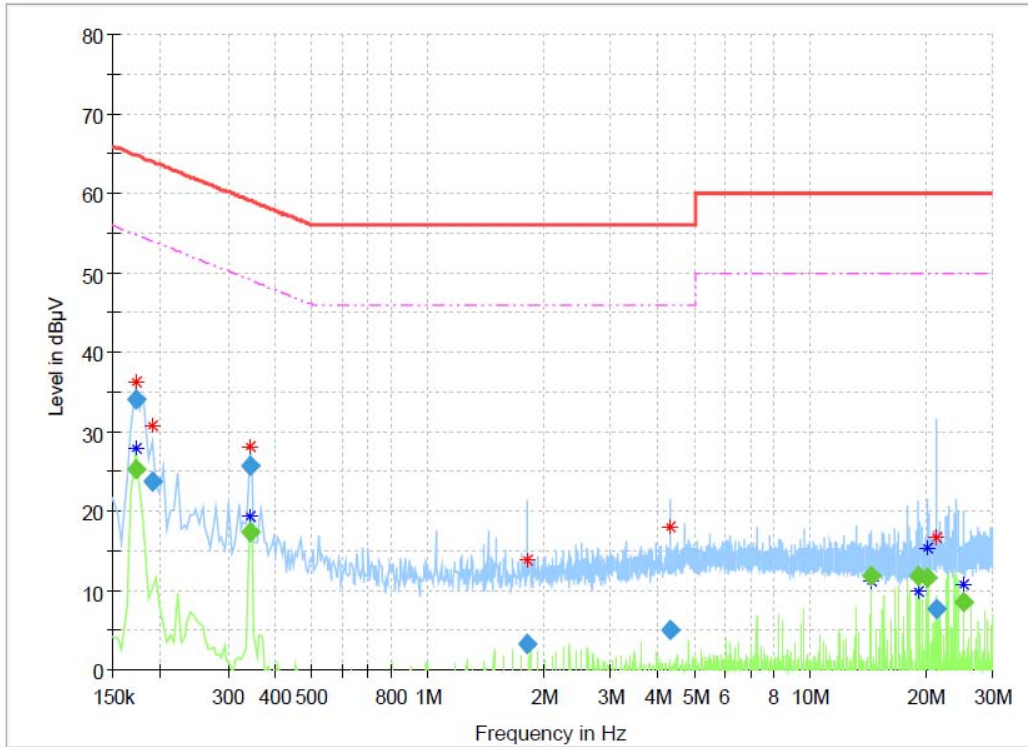

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.172500	---	25.22	54.84	29.62	15000.0	9.000	N	ON	9.9
0.172500	34.06	---	64.84	30.77	15000.0	9.000	N	ON	9.9
0.190500	23.74	---	64.02	40.28	15000.0	9.000	N	ON	9.9
0.343500	---	17.30	49.12	31.82	15000.0	9.000	N	ON	9.8
0.343500	25.69	---	59.12	33.43	15000.0	9.000	N	ON	9.8
1.824000	3.41	---	56.00	52.60	15000.0	9.000	N	ON	9.6
4.317000	5.09	---	56.00	50.91	15000.0	9.000	N	ON	9.7
14.469000	---	11.84	50.00	38.16	15000.0	9.000	N	ON	9.9
19.117500	---	11.80	50.00	38.20	15000.0	9.000	N	ON	10.0
20.328000	---	11.71	50.00	38.29	15000.0	9.000	N	ON	10.0
21.336000	7.70	---	60.00	52.30	15000.0	9.000	N	ON	10.0
25.147500	---	8.53	50.00	41.47	15000.0	9.000	N	ON	10.0



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2023-01830
 Page (46) / (47) Pages

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY50510240	2022-07-13	2023-07-13
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2023-03-22	2024-03-22
3	DC Power Supply	Agilent	E3632A	MY40009327	2023-03-27	2024-03-27
4	Dual-Tracking DC Power Supply	Topward Electric Instruments Co.,Ltd.	6303D	711196	2023-03-22	2024-03-22
5	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2023-05-03	2024-05-03
6	BILOG ANTENNA	TESEQ	CBL6111D	60654	2021-09-03	2023-09-03
7	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2022-04-15	2024-04-15
8	6dB Attenuator	PASTERNAK	PE7AP006-06	L20210504000023	2022-08-10	2023-08-10
9	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2022-08-10	2023-08-10
10	Spectrum Analyzer	R&S	FSV40	101574	2023-01-11	2024-01-11
11	PRE AMPLIFIER	HP	8449B	3008A00620	2023-04-21	2024-04-21
12	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2023-04-13	2024-04-13
13	HORN ANTENNA	SCHWARZBECK	BBHA9170	1153	2022-10-31	2023-10-31
14	LOW NOISE AMPLIFIER	TESTEK	TK-PA1840H	210124-L	2022-11-09	2023-11-09
15	Band Reject Filter	Micro Tronics	BRM50702	G233	2023-01-03	2024-01-03
16	EMI Test Receiver	R&S	ESR3	102826	2023-05-03	2024-05-03
17	LISN	R&S	ENV216	102698	2023-05-03	2024-05-03



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2023-01830
Page (47) / (47) Pages

	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (Conducted)	Junkosha Inc.	MWX221	1512S151	2023-05-03
2	RF Cable (Line Conducted)	Canare Corporation	L-5D2W	N/A	2023-05-03
3	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2023-03-06
4	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	L-5D2W	N/A	2023-03-06
5	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2023-04-03
6	RF Cable (1 GHz - 18 GHz Radiated)	Rosenberger	NONE	1520.9927.00	2022-04-14
7	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	J0970749	2023-04-03
8	RF Cable (1 GHz - 18 GHz Radiated)	Sensorview Co., LTD	13A26	TPC2204060007	2023-04-03
9	RF Cable (18 GHz - 40 GHz Radiated)	Sensorview Co., LTD	9S40	TPC2204060009	2022-04-14
10	RF Cable (18 GHz - 40 GHz Radiated)	Sensorview Co., LTD	9A40	TP210713-001	2022-04-14

-END-