



FCC 47 CFR PART 15 SUBPART C 15.247 TEST REPORT

FOR

Bluetooth Keyboard

Model : FC660MBT

Trade Name : Leopold

Issued to

Leopold Co., Ltd.

**B-dong-306, DaebangTriplaon Business Tower, 158, Haneulmaeul-ro,
IlSandong-gu, Goyang-si, Gyeonggi-do 10355 South Korea**

Issued by

WH Technology Corp.



Xizhi Office	7F., No.262, Sec. 3, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
Xizhi Lab	No. 67-22, Baoxin St., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
Tel.: +886-2-7729-7707 Fax: +886-2-8648-1311	

Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of WH Technology Corp. This document may be altered or revised by WH Technology Corp. personnel only, and shall be noted in the revision section of the document.



Contents

1. General Information	4
2. Report of Measurements and Examinations	5
2.1 List of Measurements and Examinations	5
3. Test Configuration of Equipment under Test	6
3.1 Description of the Tested Samples	6
3.2 Carrier Frequency of Channels	7
3.3 Test Mode and Test Software	7
3.4 Test Methodology & General Test Procedures	8
3.5 Measurement Uncertainty	9
3.6 Description of the Support Equipments	9
4. Test and Measurement Equipment	10
4.1 Calibration	10
4.2 Equipment	10
5. Antenna Requirements	12
5.1 Standard Applicable	12
5.2 Antenna Construction and Directional Gain	12
6. Test of Conducted Emission	13
6.1 Test Limit	13
6.2 Test Procedures	13
6.3 Typical Test Setup	14
6.4 Test Result and Data	15
7. Test of Radiated Emission	17
7.1 Test Limit	17
7.2 Test Procedures	18
7.3 Typical Test Setup	19
7.4 Test Result and Data (9kHz ~ 30MHz)	20
7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found)	20
7.6 Test Result and Data (Above 1GHz)	22
8. 20dB Bandwidth Measurement Data	24
8.1 Test Limit	24
8.2 Test Procedures	24
8.3 Test Setup Layout	24
8.4 Test Result and Data	24
9. Frequencies Separation	27
9.1 Test Limit	27
9.2 Test Procedures	27
9.3 Test Setup Layout	27
9.4 Test Result and Data	27
10. Dwell Time on each channel	30
10.1 Test Limit	30
10.2 Test Procedures	30
10.3 Test Setup Layout	30
10.4 Test Result and Data	31



11. Number of Hopping Channels	37
11.1 Test Limit	37
11.2 Test Procedures	37
11.3 Test Setup Layout	37
11.4 Test Result and Data.....	37
12. Maximum Peak Output Power	39
12.1 Test Limit	39
12.2 Test Procedures	39
12.3 Test Setup Layout	39
12.4 Test Result and Data.....	39
13. Band Edges Measurement.....	42
13.1 Test Limit	42
13.2 Test Procedure	42
13.3 Test Setup Layout	42
13.4 Test Result and Data.....	42
13.5 Restrict Band Emission Measurement Data	45
14. Restricted Bands of Operation	47
14.1 Labeling Requirement	47



1. General Information

Applicant : Leopold Co., Ltd.

Address : B-dong-306, DaebangTriplaon Business Tower, 158, Haneulmaeul-ro, Ilsandong-gu, Goyang-si, Gyeonggi-do 10355 South Korea

Manufacturer : Datacomp Electronics Co., Ltd.

Address : No. 38, Sec. 2 Nan-Kan Road, Lu-Chu Village, Taoyuan, Taiwan R.O.C.

EUT : Bluetooth Keyboard

Model Name : FC660MBT

Model Differences : N/A

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.10-2013. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

FCC part 15 subpart C

Receipt Date : 01/31/2020

Final Test Date : 07/01/2020

Tested By:

Jul. 01, 2020

Reviewed by:

Jul. 01, 2020

Date

Bing Zhang / Project Engineer

Date

Bell Wei / Manager
Designation Number: TW2954



2. Report of Measurements and Examinations

2.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Conducted Emission	Pass
15.209	Radiated Emission	Pass
15.247(a)(1)	Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	20dB Bandwidth Measurement	Pass
15.247(a)(1)	Dwell Time	Pass
15.247(b)	Number of Hopping Channels	Pass
15.247(b)	Peak Output Power Measurement Data	Pass
15.247(d)	Band Edges Measurement Data	Pass



3. Test Configuration of Equipment under Test

3.1 Description of the Tested Samples

EUT Name : Bluetooth Keyboard
Model Number : FC660MBT
FCC ID : RPK-FC660MBT
Receipt Date : 01/31/2020
EUT Power Rating : DC 5V from PC
DC 3V from AAA Batteries*2
Operate Frequency : Refer to the channel list as described below
(2402 ~ 2480 MHz)
Modulation Technique : GFSK
Number of Channels : 79
Channel Spacing : 1 MHz
Operating Mode : Simplex Duplex
Antenna Type : PCB Antenna
Antenna Gain : 2.78 dBi



3.2 Carrier Frequency of Channels

Channel	Frequency (MHz)						
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

3.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10-2013.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive “BLUETEST3” under WIN8 was executed to keep transmitting and receiving data via Wireless.
- d. The following test modes were performed for test:
 - GFSK: CH00: 2402MHz, CH39: 2441MHz, CH78: 2480MHz



3.4 Test Methodology & General Test Procedures

All testing as described bellowed were performed in accordance with ANSI C63.10-2013 and FCC CFR 47 Part 15 Subpart C.

Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

- 1) Putting the EUT on the platform and turning on the EUT (on/off button on the bottom of the EUT).
- 2) Setting test channel described as “Channel setting and operating condition”, and testing channel by channel.
- 3) For the spurious emission test based on ANSI(2013), at the frequency where below 1GHz used quasi-peak detector mode; where above 1GHz used the peak and average detector mode. IF the peak value may be under average limit, the average mode will not be performed.



3.5 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated emission	±4.11dB
Peak Output Power (Conducted)	±1.38dB
Peak Output Power (Radiated)	±1.70dB
Power Spectral Density	±1.39dB
Radiated emission (3m)	±4.11dB
Radiated emission (10m)	±3.89dB

3.6 Description of the Support Equipments

Setup Diagram

See test photographs attached in appendix for the actual connections between EUT and support equipment.

Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID	Trade name	Data Cable	Power Cord
1.	Notebook	N16P7	NXVGKTA0017 51042C17200	DOC	Acer	Shielded 1.8m	Unshielded 1.8m
2	Type-C Cable	U20AMCM18MBK	N/A	DOC	Cablex Wire and Cable MFG	N/A	N/A

Note: (1) All the above equipment /cable were placed in worse case position to maximize emission signals during emission test.

(2) Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



4. Test and Measurement Equipment

4.1 Calibration

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2 Equipment

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.



TABLE LIST OF TEST AND MEASUREMENT EQUIPMENT

Conducted emission				
Instrument	Manufacturer	Model No.	Serial No.	Cali Due Date
EMI Test Receiver	R&S	ESHS10	830223/008	2020/08/11
Spectrum Analyzer	R&S	FSP3	833387/010	2020/12/19
Two-Line V-Network	R&S	NNB-2/16z	98062	2020/08/04
Test Cable	N/A	N/A	EMI-3	2020/10/09
Measurement Software	AUDIX	e3	V6.101222a	N/A
Radiated emission Below 1GHz				
Instrument	Manufacturer	Model No.	Serial No.	Cali Due Date
Bilog antenna	Chase	CBL6111A	1546	2020/07/30
LOOP Antenna	EMCO	6507	9301-1298	2021/01/08
Pre-amplifier	Anritsu	MH648A	M15180	2020/08/11
Cable	EMCI	EMCCFD400-NM-NM-7000	180617	2020/08/11
Cable	Marvelous Microwave	260260.F141	120A	2020/08/11
Receiver	R&S	ESCI3	101131	2020/09/08
Measurement Software	AUDIX	e3	V9.160707	N/A
Radiated emission Above 1GHz				
Instrument	Manufacturer	Model No.	Serial No.	Cali Due Date
Horn antenna	ETS LINDGREN	3117	00114397	2021/04/08
Horn antenna	com-power	AH-826	81000	2021/10/15
Horn antenna	Schwarzbeck	BBHA9170	#687	2021/06/21
Pre-amplifier	EMCI	EMC051845	980108	2020/12/19
Pre-amplifier	MITEQ	JS4-18002600-30-5A	808329	2021/09/23
Pre-amplifier	EMC INSTRUMENT	EMC264035SE	980288	2021/05/06
RF CABLE	SUCOFLEX	104PEA	27348/4PEA	2021/08/12
RF CABLE	AGILENT	EMC102-KM-KM-3000	160101	2021/09/10
RF CABLE	AGILENT	EMC102-KM-KM-600	160102	2021/09/10
Spectrum Analyzer	R&S	FSP7	830180/006	2021/04/23
Spectrum Analyzer	AGILENT	N9010A	MY51280195	2021/09/23
Spectrum Analyzer	ADVANTEST	R3182	150900201	2021/02/19
Measurement Software	AUDIX	e3	V6.101222a	N/A

*CALIBRATION INTERVAL OF INSTRUMENTS LISTED ABOVE IS ONE YEAR.



5. Antenna Requirements

5.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.2 Antenna Construction and Directional Gain

Antenna Type: PCB Antenna

Antenna Gain: 2.78 dBi



6. Test of Conducted Emission

6.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

6.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




6.3 Typical Test Setup

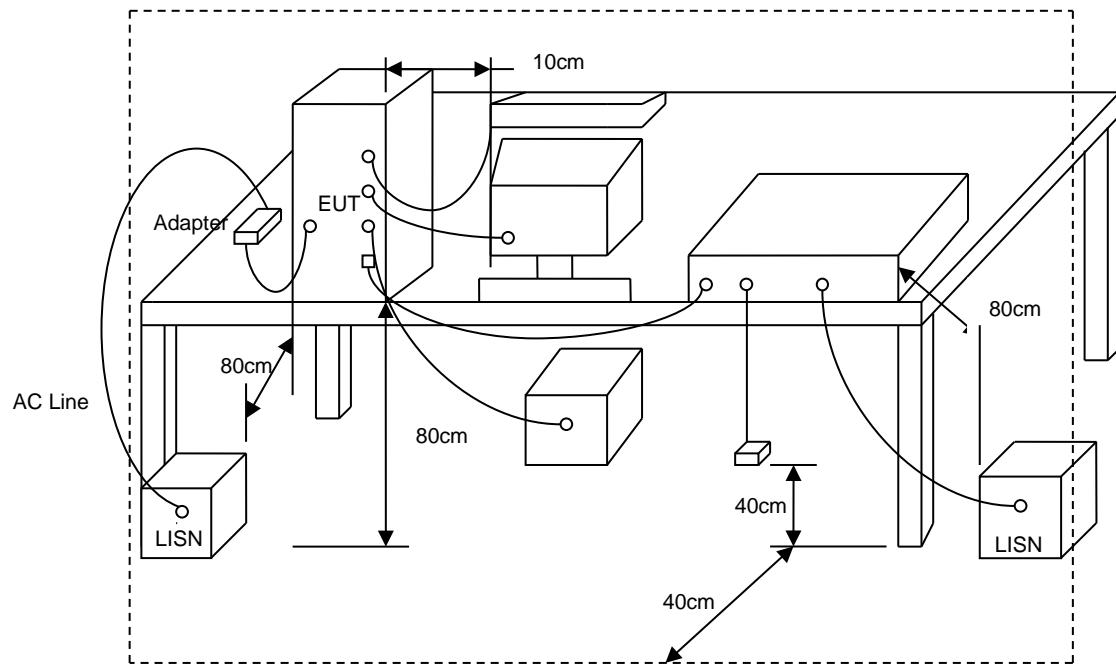



6.4 Test Result and Data


Power	:	DC 5V	Pol/Phase	:	LINE
Temperature	:	25.1 °C	Humidity	:	56 %
Test Mode	:	USB Power + Bluetooth Connection			

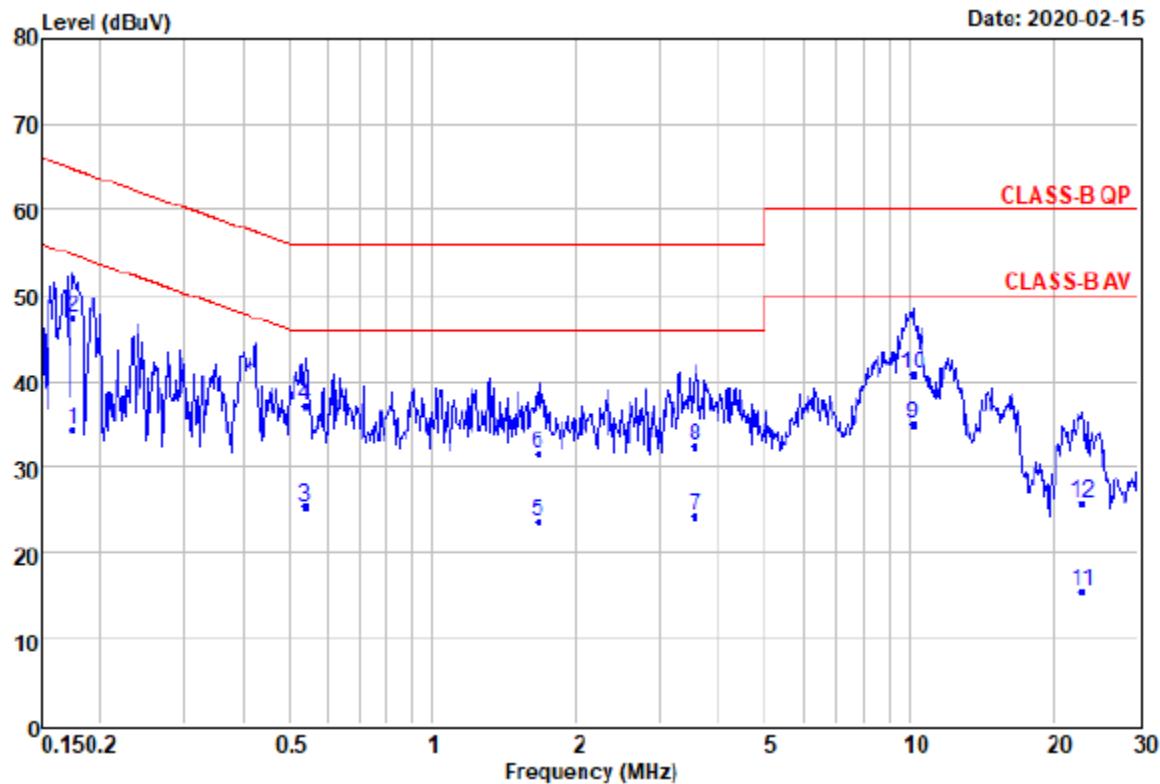

Freq	Remarks	: Factor=Insertion loss+Cable loss					
		Read	Over	Limit	Line	Remark	
		Level	Factor	Limit			
1		0.17	24.19	34.26	10.07	-20.46	54.72 Average
2		0.17	37.24	47.31	10.07	-17.41	64.72 QP
3		0.54	15.17	25.25	10.08	-20.75	46.00 Average
4		0.54	27.03	37.11	10.08	-18.89	56.00 QP
5		1.66	13.39	23.53	10.14	-22.47	46.00 Average
6		1.66	21.41	31.55	10.14	-24.45	56.00 QP
7		3.57	13.97	24.18	10.21	-21.82	46.00 Average
8		3.57	22.16	32.37	10.21	-23.63	56.00 QP
9 @		10.13	24.62	34.99	10.37	-15.01	50.00 Average
10		10.13	30.48	40.85	10.37	-19.15	60.00 QP
11		23.02	4.79	15.41	10.62	-34.59	50.00 Average
12		23.02	15.19	25.81	10.62	-34.19	60.00 QP



Power	DC 5V	Pol/Phase	NEUTRAL
Temperature	25.1 °C	Humidity	56 %
Test Mode	USB Power + Bluetooth Connection		

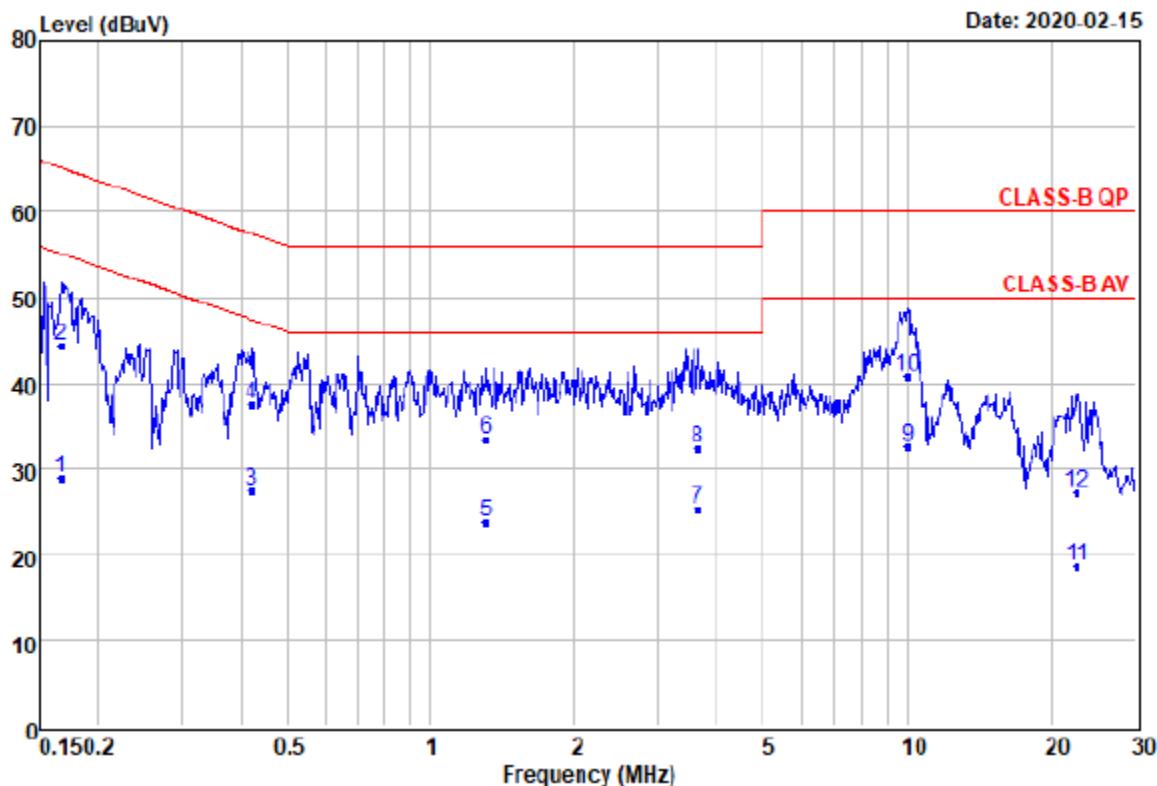

Remarks	: Factor=Insertion loss+Cable loss						
	Freq	Read	Level Factor	Over Limit	Limit	Line	Remark
		MHz	dBuV	dBuV	dB	dB	dBuV
	1	0.17	18.85	28.91	10.06	-26.21	55.12 Average
	2	0.17	34.36	44.42	10.06	-20.70	65.12 QP
	3	0.42	17.39	27.46	10.07	-20.00	47.46 Average
	4	0.42	27.48	37.55	10.07	-19.91	57.46 QP
	5	1.30	13.60	23.72	10.12	-22.28	46.00 Average
	6	1.30	23.30	33.42	10.12	-22.58	56.00 QP
	7	3.64	15.15	25.35	10.20	-20.65	46.00 Average
	8	3.64	22.25	32.45	10.20	-23.55	56.00 QP
9 @	9.97	22.34	32.70	10.36	-17.30	50.00	Average
	10	9.97	30.44	40.80	10.36	-19.20	60.00 QP
	11	22.66	8.10	18.66	10.56	-31.34	50.00 Average
	12	22.66	16.67	27.23	10.56	-32.77	60.00 QP



7. Test of Radiated Emission

7.1 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3




7.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




7.3 Typical Test Setup


For radiated emissions below 30MHz

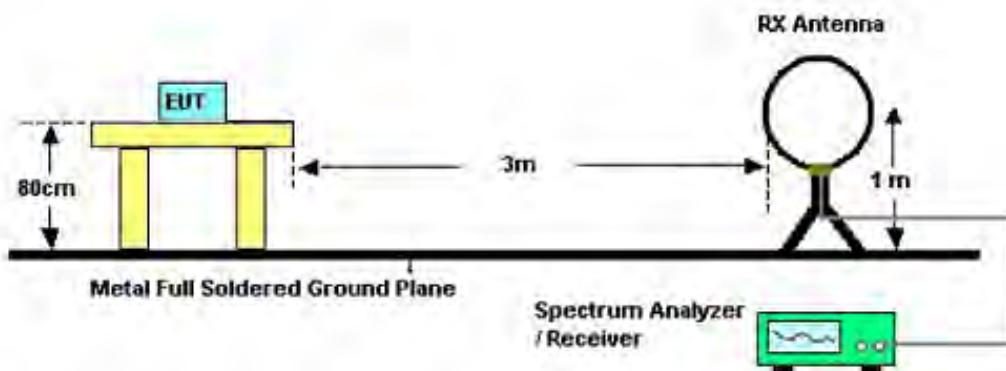

For radiated emissions above 30MHz

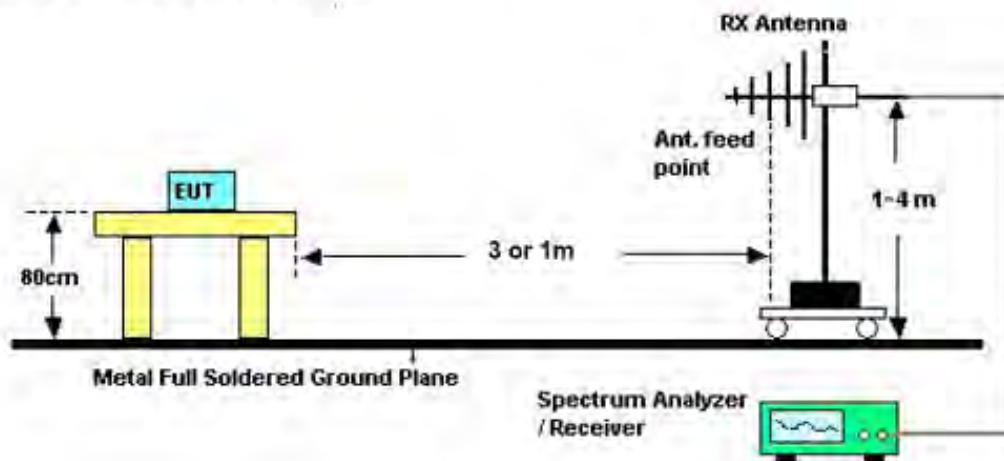

For radiated emissions above 1GHz

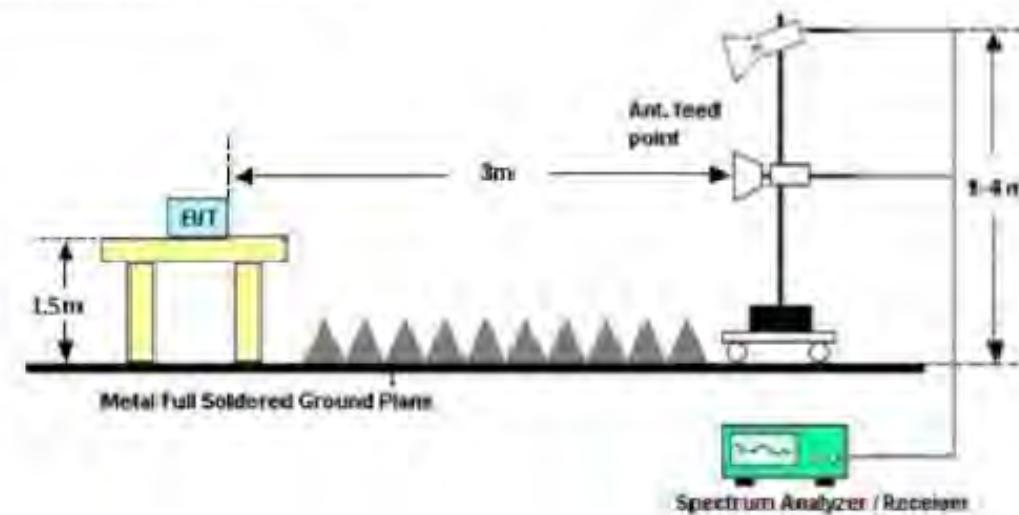




7.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found)

Power	: DC 3V	Pol/Phase	: HORIZONTAL
Temperature	: 26 °C	Humidity	: 70 %
Test Mode	: GFSK: CH78		

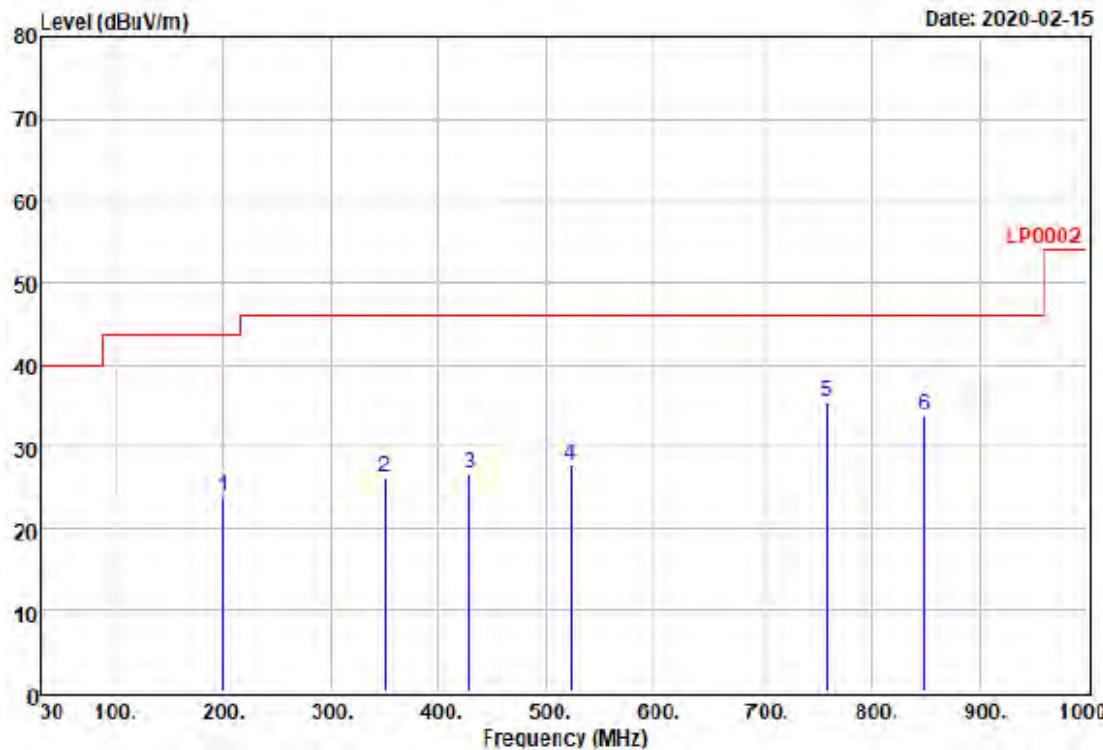


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

Freq	Read		Level	Limit	Over	Remark
	Level	Factor				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	199.980	41.33	-17.58	23.75	43.50	-19.75 QP
2	350.490	37.77	-11.67	26.10	46.00	-19.90 QP
3	428.940	36.31	-9.64	26.67	46.00	-19.33 QP
4	522.450	36.07	-8.31	27.76	46.00	-18.24 QP
5 @	758.490	40.59	-5.10	35.49	46.00	-10.51 QP
6	848.760	36.44	-2.76	33.68	46.00	-12.32 QP



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 26 °C	Humidity	: 70 %
Test Mode	: GFSK: CH78		

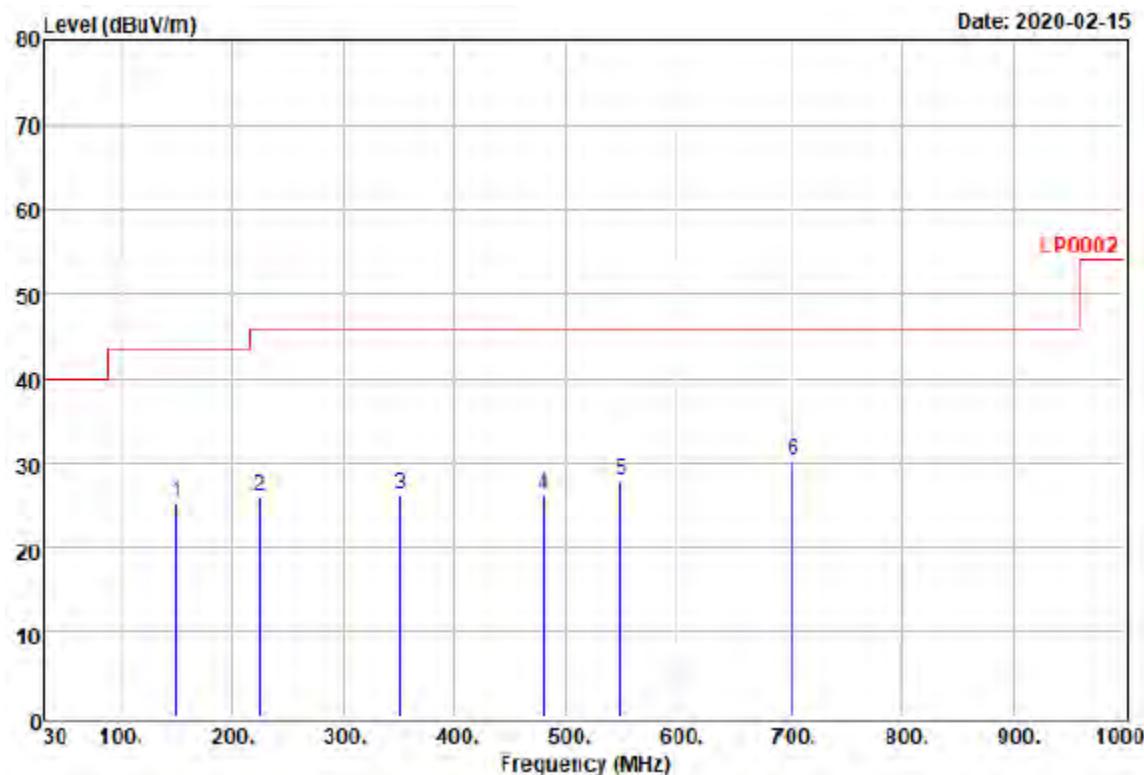


Remarks : 1.Result=Read Value+Factor
: 2.Factor=Antenna Factor-Cable loss-
: Amplifier Factor

Freq	Read		Limit	Over	Line	Limit	Over	Remark
	Level	Factor						
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	dB	
1	149.470	40.08	-14.77	25.31	43.50	-18.19	QP	
2	224.490	42.41	-16.44	25.97	46.00	-20.03	QP	
3	350.970	37.76	-11.66	26.10	46.00	-19.90	QP	
4	480.100	35.06	-8.98	26.08	46.00	-19.92	QP	
5	549.640	35.78	-7.86	27.92	46.00	-18.08	QP	
6 @	702.220	35.91	-5.70	30.21	46.00	-15.79	QP	



7.6 Test Result and Data (Above 1GHz)

Power	:	DC 3V	Pol/Phase	:	HORIZONTAL
Temperature	:	26 °C	Humidity	:	70 %
Test Mode	:	GFSK: CH00, CH39, CH78			

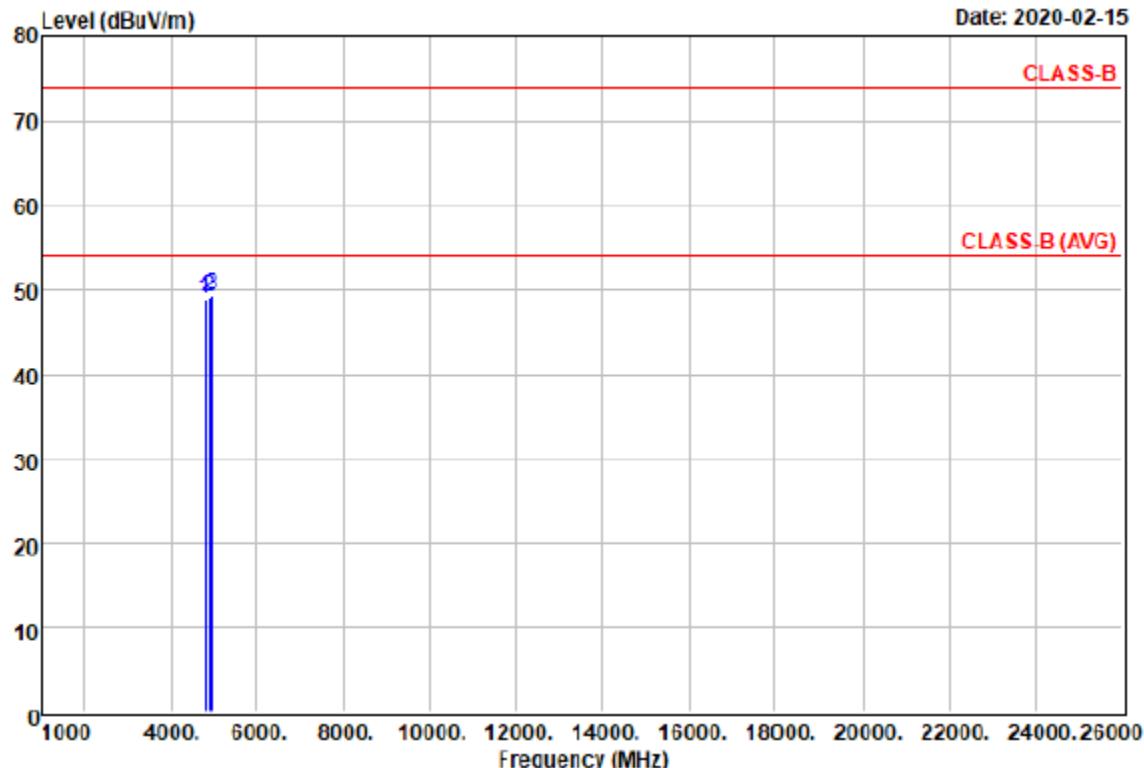


Freq	Read		Limit	Over	Remark
	Level	Factor			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 4804.000	54.33	-5.44	48.89	74.00	-25.11 Peak
2 4882.000	54.18	-5.15	49.03	74.00	-24.97 Peak
3 @ 4960.000	54.10	-4.86	49.24	74.00	-24.76 Peak

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor, Cable loss, Pre-Amp, etc.
3. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
4. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
5. Peak detector measurement data will represent the worst case results.
6. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. The other emission levels were 20dB below the limit.



Power :	DC 3V	Pol/Phase :	VERTICAL
Temperature :	26 °C	Humidity :	70 %
Test Mode :	GFSK: CH00, CH39, CH78		

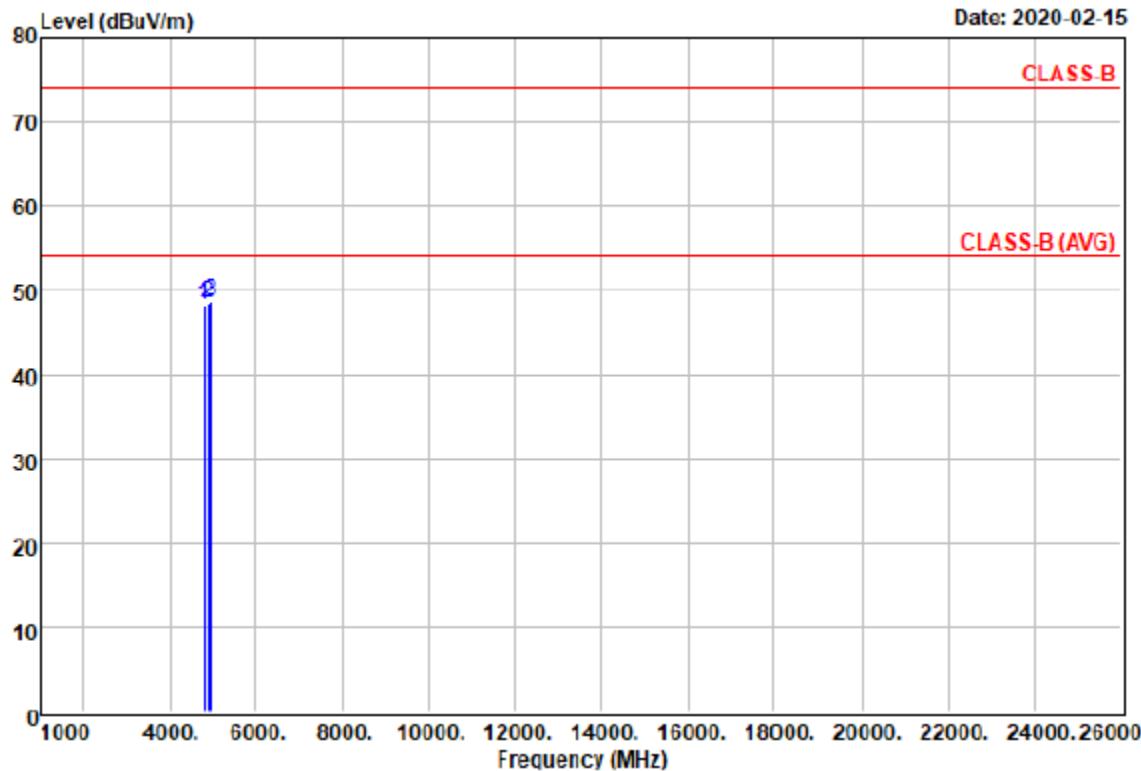

Freq	Read		Limit	Over	Over	Remark
	Level	Factor				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 4804.000	53.77	-5.44	48.33	74.00	-25.67	Peak
2 4882.000	53.65	-5.15	48.50	74.00	-25.50	Peak
3 @ 4960.000	53.50	-4.86	48.64	74.00	-25.36	Peak

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor: Antenna factor, Cable loss, Pre-Amp, etc.
3. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
4. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
5. Peak detector measurement data will represent the worst case results.
6. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
7. The other emission levels were 20dB below the limit.



8. 20dB Bandwidth Measurement Data


8.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 ~ 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

8.3 Test Setup Layout



8.4 Test Result and Data

Test Date: 2020.06.30

Temperature: 25°C


Atmospheric pressure: 1012 hPa

Humidity: 54%


Modulation Standard	Channel	Frequency (MHz)	20dB Bandwidth (MHz)
GFSK (1Mbps)	00	2402	1.142
	39	2441	1.134
	78	2480	1.132



GFSK (1Mbps) Channel: 00

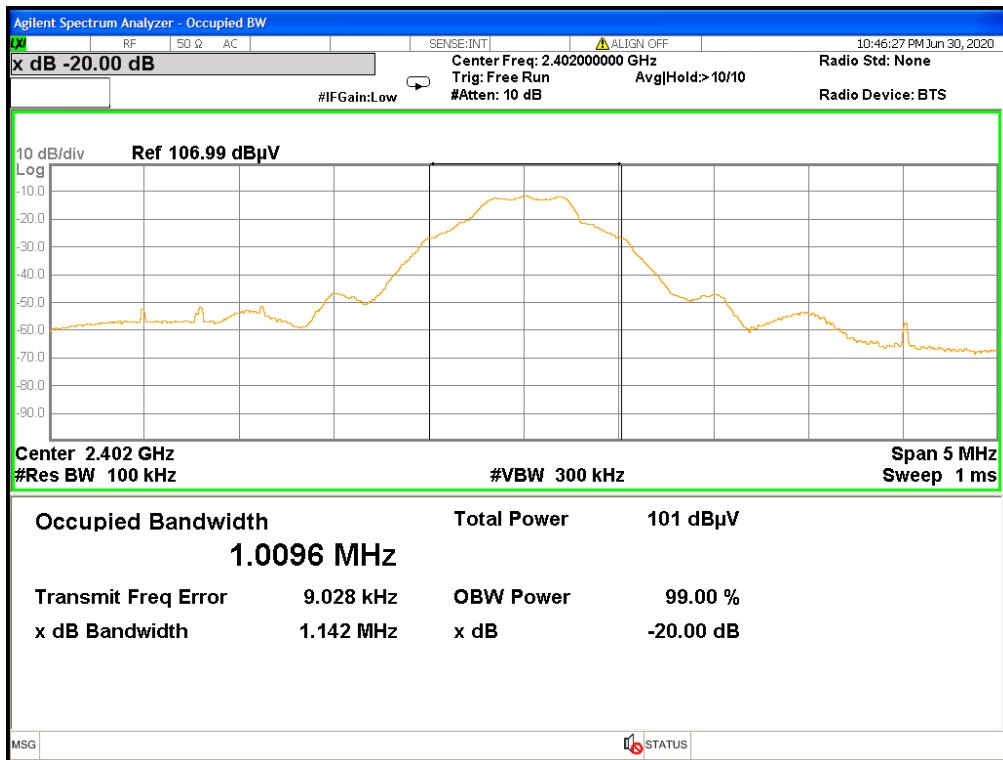


GFSK (1Mbps) Channel: 39

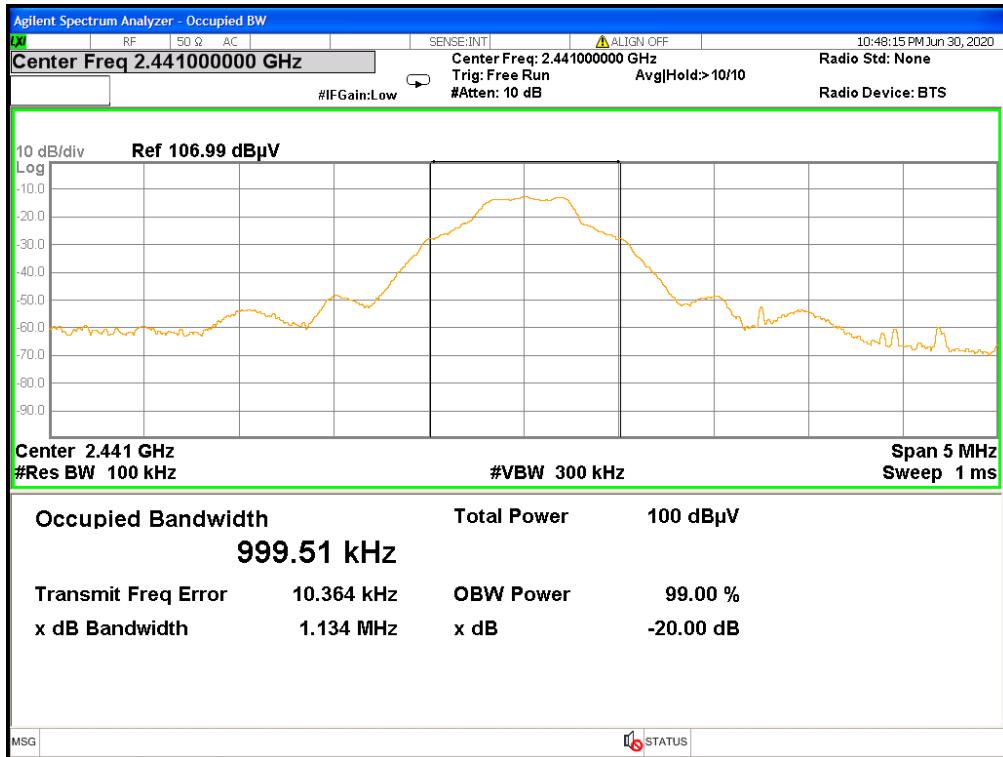



GFSK (1Mbps) Channel: 78

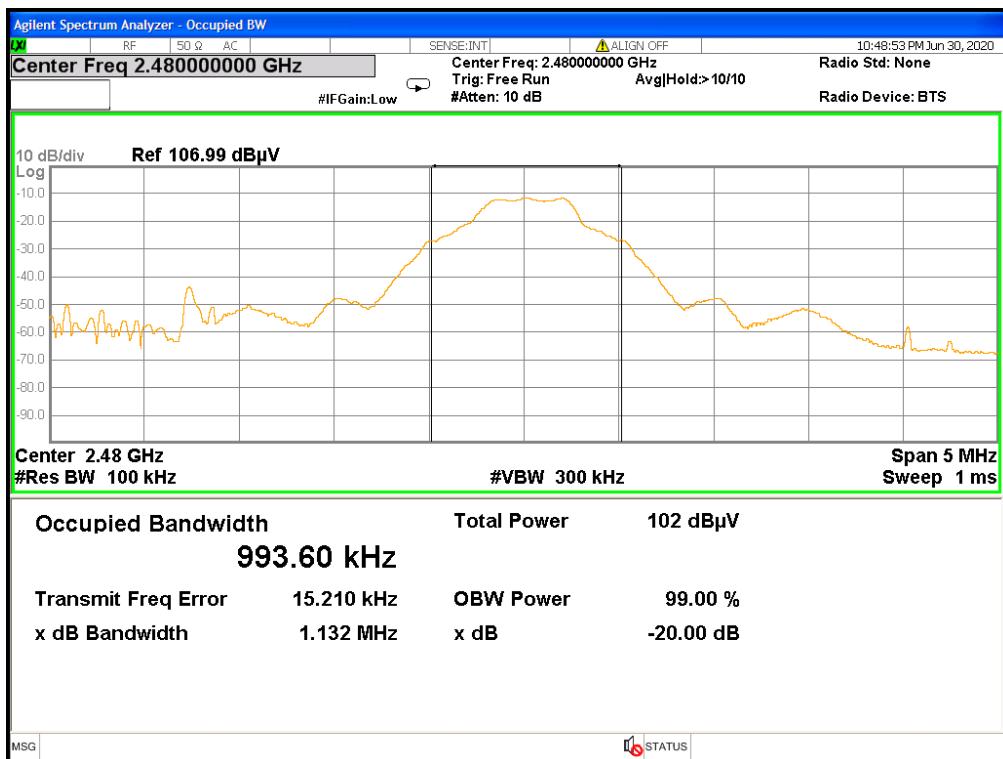



9. Frequencies Separation


9.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 kHz and VBW to 100 kHz.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels.

9.3 Test Setup Layout



9.4 Test Result and Data

Test Date: 2020.06.30

Temperature: 25°C

Atmospheric pressure: 1012 hPa

Humidity: 54%

Modulation Standard	Channel	Frequency (MHz)	Frequency Separation (MHz)
GFSK (1Mbps)	00	2402	1.000
	39	2441	0.982
	78	2480	0.998



GFSK (1Mbps) Channel: 00



GFSK (1Mbps) Channel: 39





GFSK (1Mbps) Channel: 78





10. Dwell Time on each channel


10.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Adjust the center frequency to measure frequency, then set zero span mode.
- c. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz.
- d. Measure the time duration of one transmission on the measured frequency.

10.3 Test Setup Layout





10.4 Test Result and Data

Test Date: 2020.06.30 Temperature: 25°C

Atmospheric pressure: 1012 hPa Humidity: 54%

Modulation Standard	Channel	Frequency (MHz)	Reading Data (ms)	Dwell Time (ms)
GFSK DH1	00	2402	0.420	134.4
	39	2441	0.420	134.4
	78	2480	0.420	134.4
GFSK DH3	00	2402	1.670	267.2
	39	2441	1.670	267.2
	78	2480	1.660	265.6
GFSK DH5	00	2402	2.920	311.466
	39	2441	2.920	311.466
	78	2480	2.920	311.466

Test period: 0.4(second/ channel) x 79 channel= 31.6 second

Example:


CH00,DH1 mode = 0.420 (ms)*[(1600/2)/79]*31.6= 134.4 (ms)

CH00,DH3 mode = 1.670 (ms)*[(1600/4)/79]*31.6= 267.2 (ms)


CH00,DH5 mode = 2.920 (ms)*[(1600/6)/79]*31.6= 311.466 (ms)



GFSK (1Mbps) Rate: DH1 Channel: 00

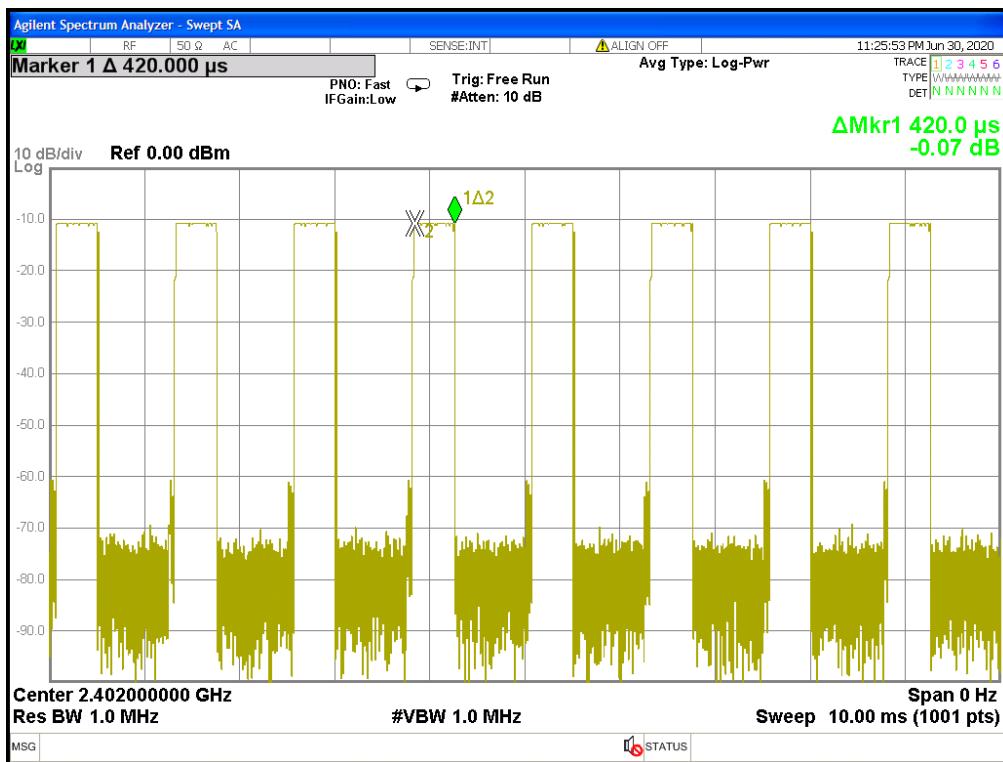


GFSK (1Mbps) Rate: DH1 Channel: 39

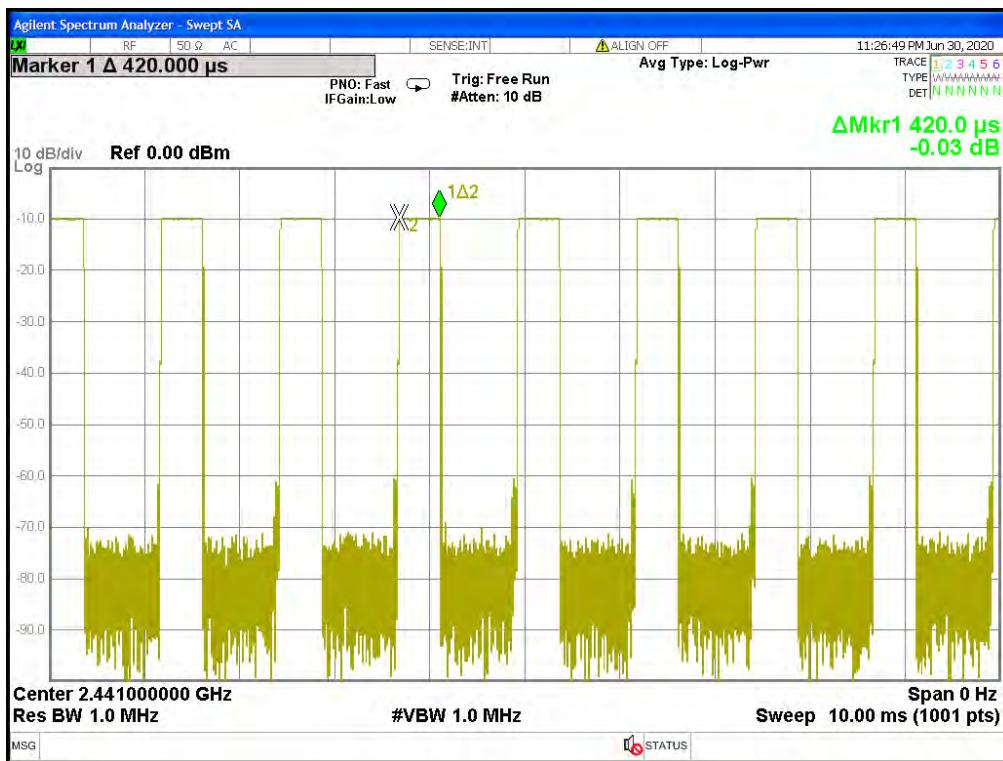




GFSK (1Mbps) Rate: DH1 Channel: 78

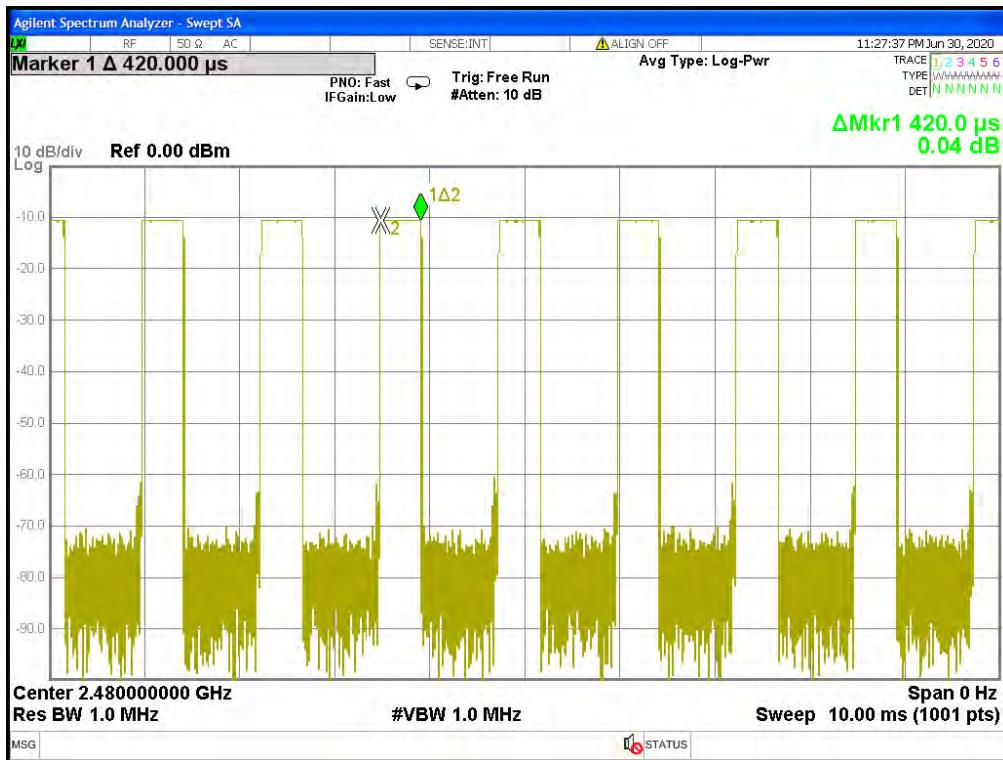

GFSK (1Mbps) Rate: DH3 Channel: 00

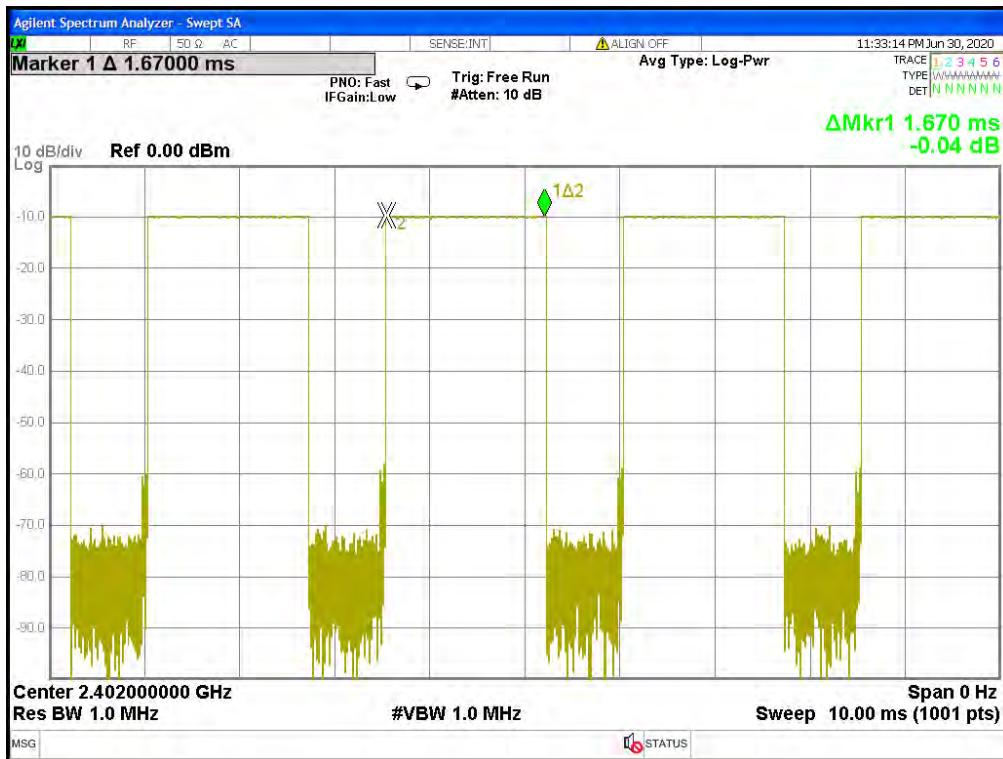




GFSK (1Mbps) Rate: DH3 Channel: 39



GFSK (1Mbps) Rate: DH3 Channel: 78

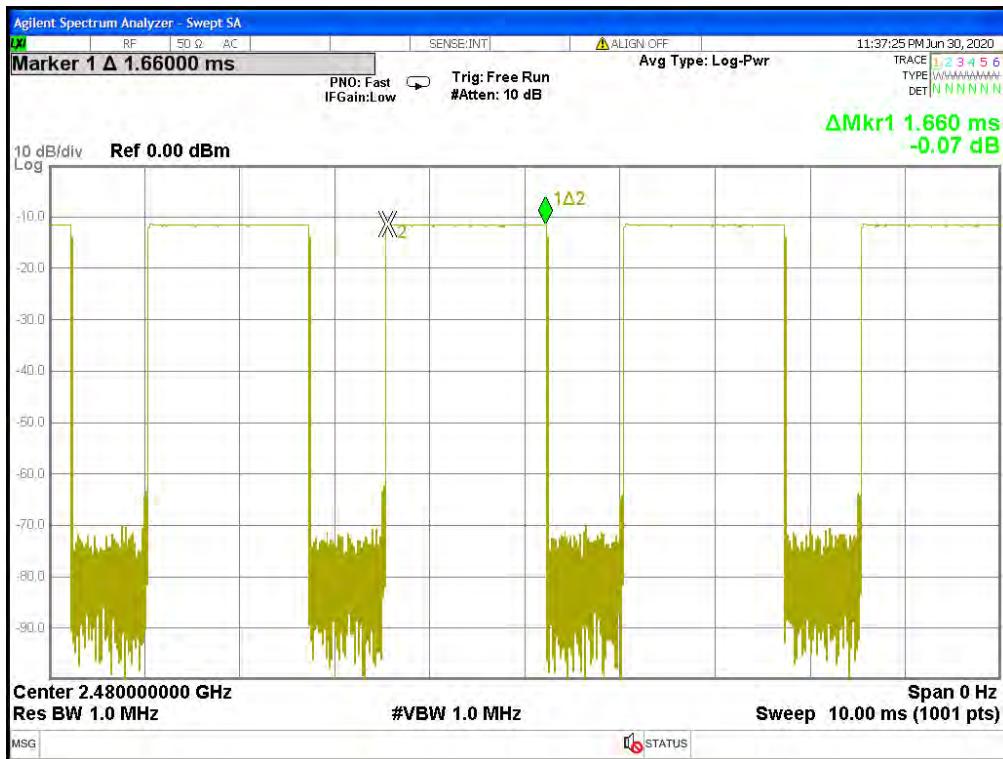




GFSK (1Mbps) Rate: DH5 Channel: 00



GFSK (1Mbps) Rate: DH5 Channel: 39

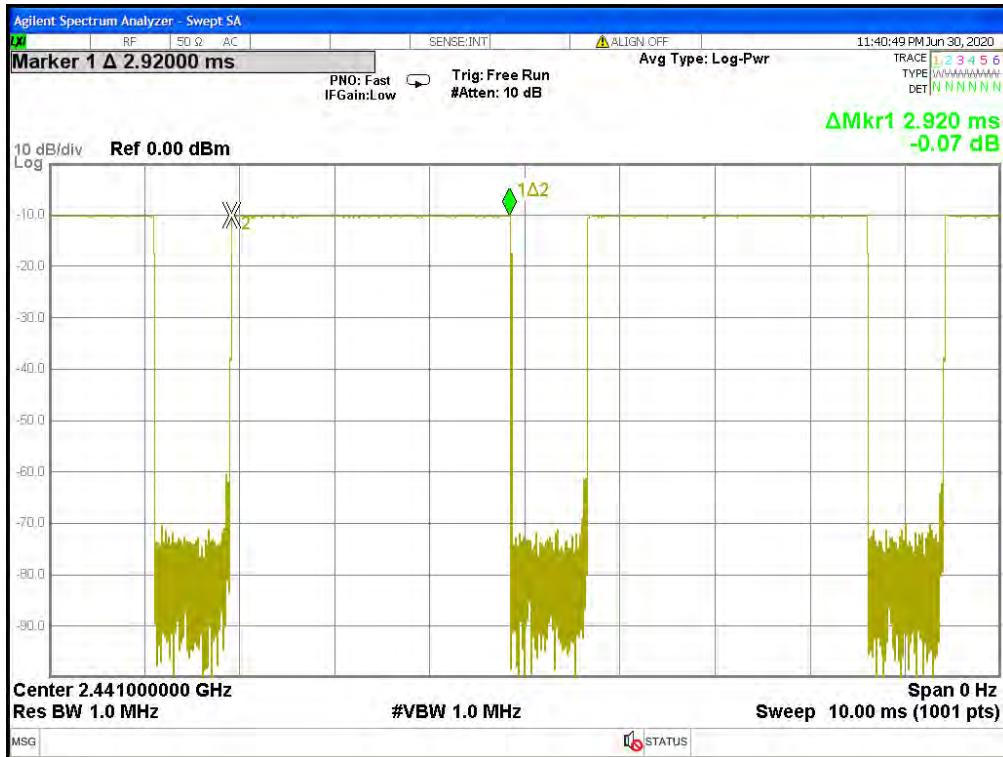



GFSK (1Mbps) Rate: DH5 Channel: 78





11. Number of Hopping Channels

11.1 Test Limit


Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

11.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 kHz and VBW to 100 kHz.
- c. Set the MaxHold function, and then keep the EUT in hopping mode.

Record all the signals from each channel until each one has been record.

11.3 Test Setup Layout



11.4 Test Result and Data

Test Date: 2020.06.30

Temperature: 25°C


Atmospheric pressure: 1012 hPa

Humidity: 54%

Modulation Standard	Hopping Channels
GFSK (1Mbps)	79



GFSK (1Mbps)

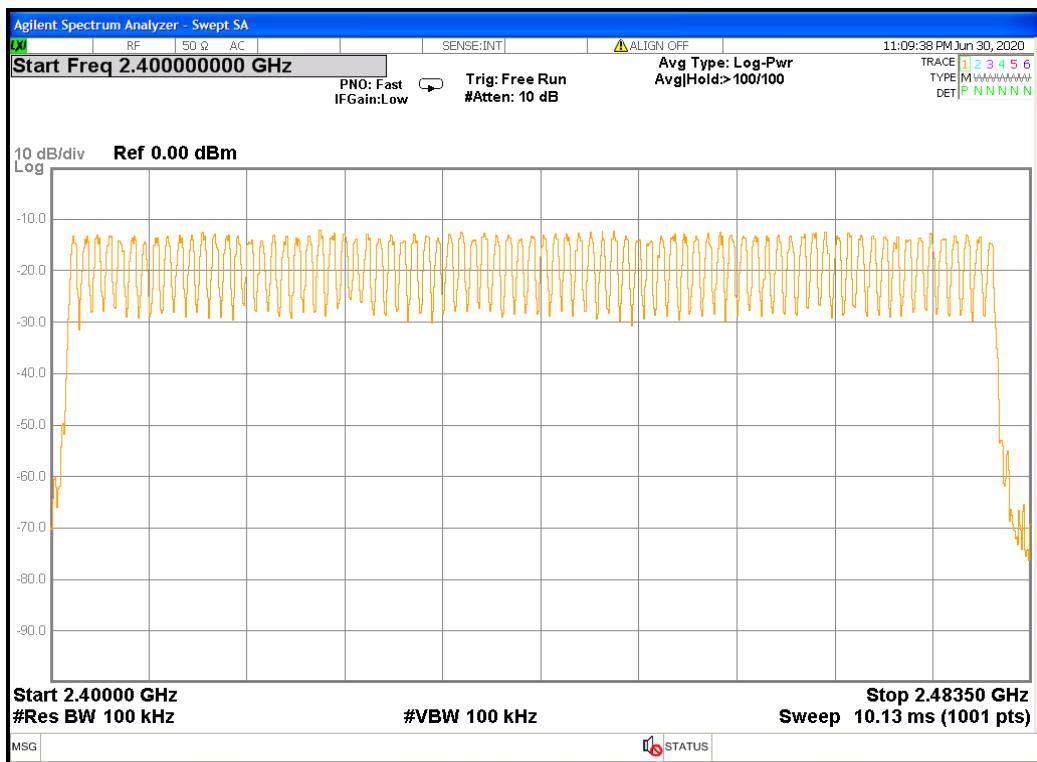



12. Maximum Peak Output Power


12.1 Test Limit

The Maximum Peak Output Power Measurement is 30 dBm.

12.2 Test Procedures

The transmitter output was connected to the spectrum analyzer. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

12.3 Test Setup Layout



12.4 Test Result and Data

Test Date: 2020.06.30

Temperature: 25°C

Atmospheric pressure: 1012 hPa

Humidity: 54%


Modulation Standard	Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
GFSK (1Mbps)	00	2402	-9.34	0.116413
	39	2441	-9.65	0.108393
	78	2480	-9.32	0.116950



GFSK (1Mbps) Channel: 00




GFSK (1Mbps) Channel: 39

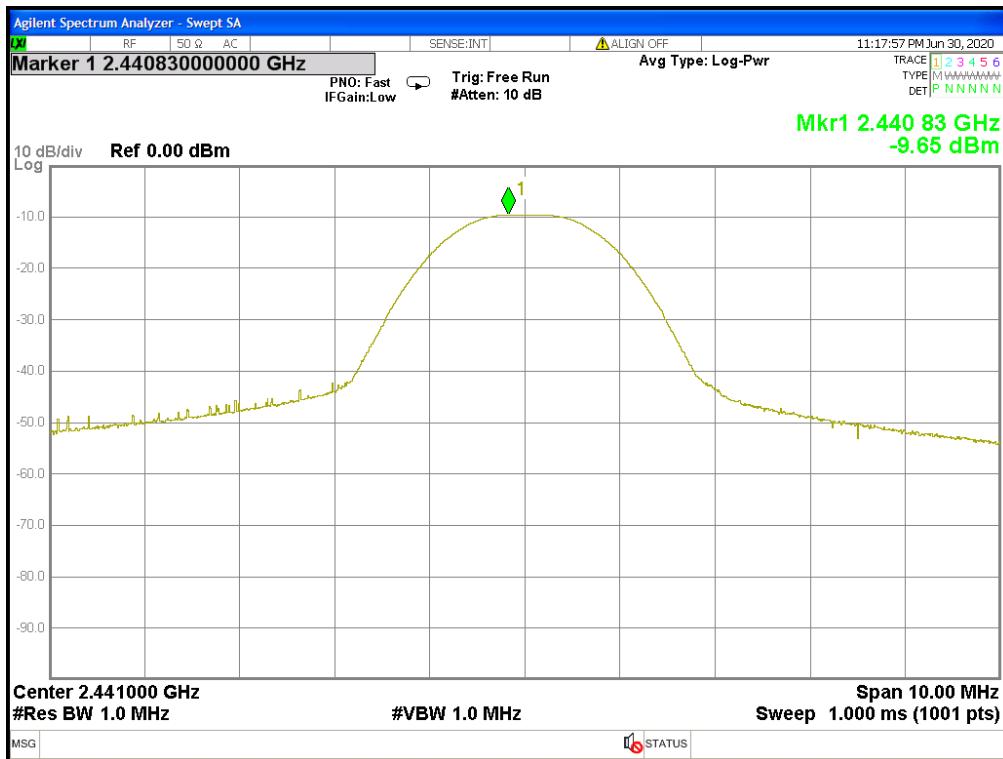



GFSK (1Mbps) Channel: 78

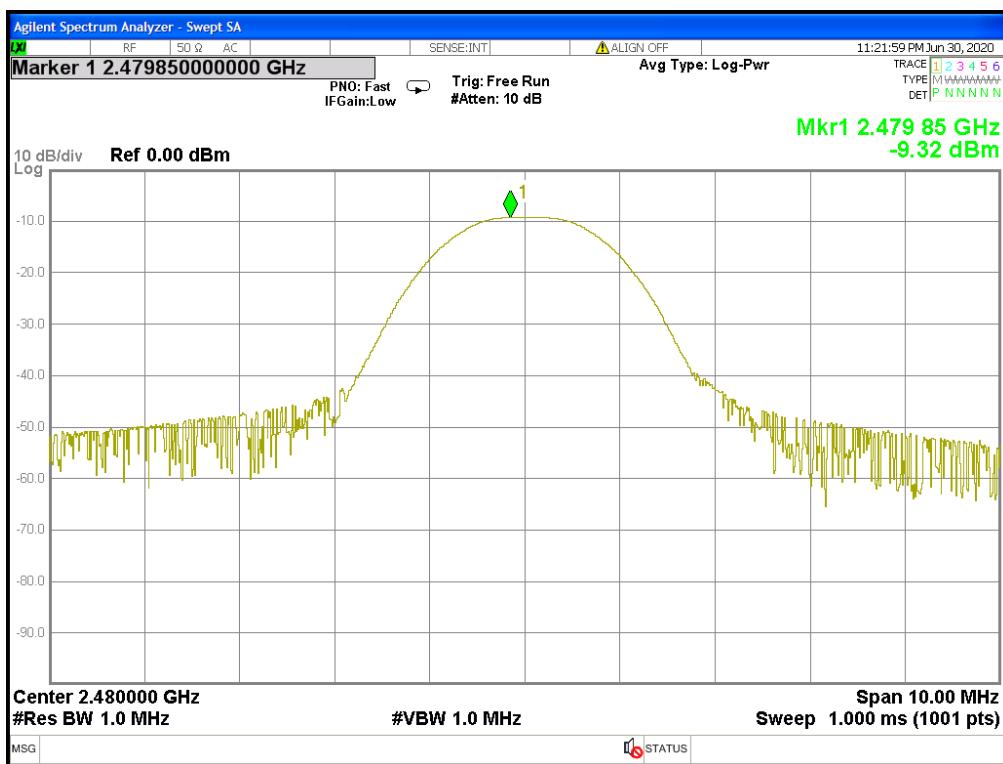



13. Band Edges Measurement


13.1 Test Limit

Below – 20 dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

13.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set both RBW and VBW of spectrum analyzer to 100 kHz with convenient frequency span including 100 kHz bandwidth from band edge.
- c. The band edges was measured and recorded.

13.3 Test Setup Layout

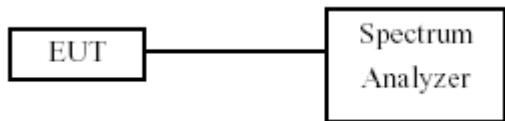

13.4 Test Result and Data

Test Date: 2020.02.14

Temperature: 25°C


Atmospheric pressure: 1012 hPa

Humidity: 54%


Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency (MHz)	maximum value (dBm)
GFSK (1Mbps)	00	2402	2399.8	-79.03
	78	2480	2480.0	-23.60
GFSK (1Mbps)	hopping	2402	2399.6	-54.26
		2480	2487.1	-59.10



GFSK (1Mbps) Channel: 00


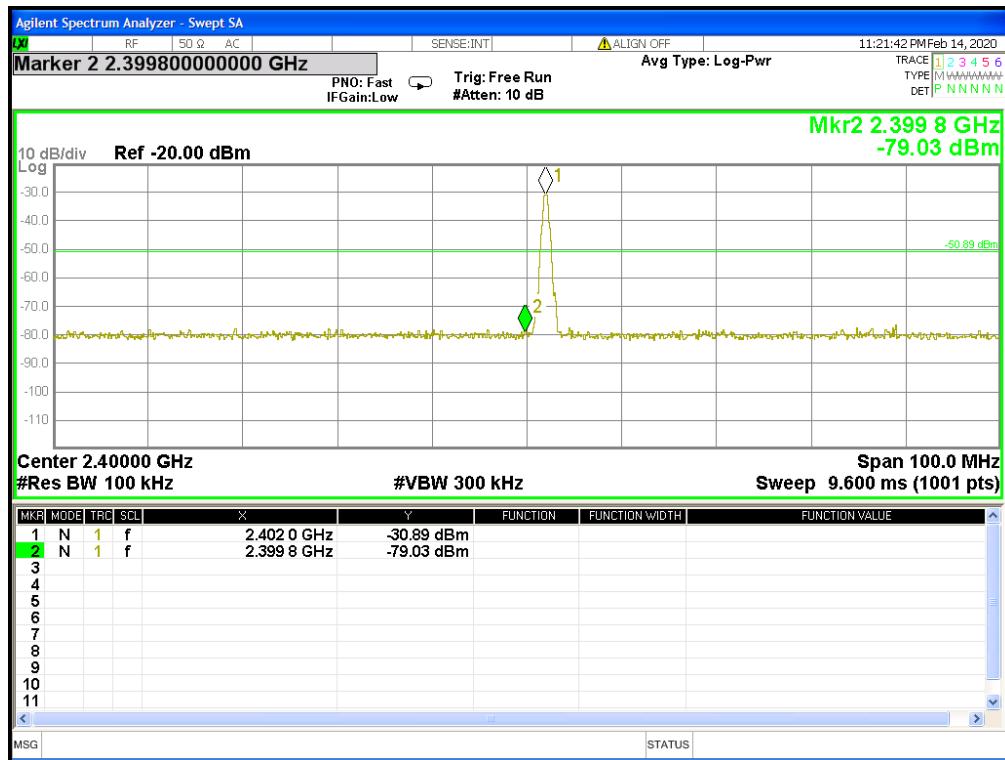


GFSK (1Mbps) Channel: 78

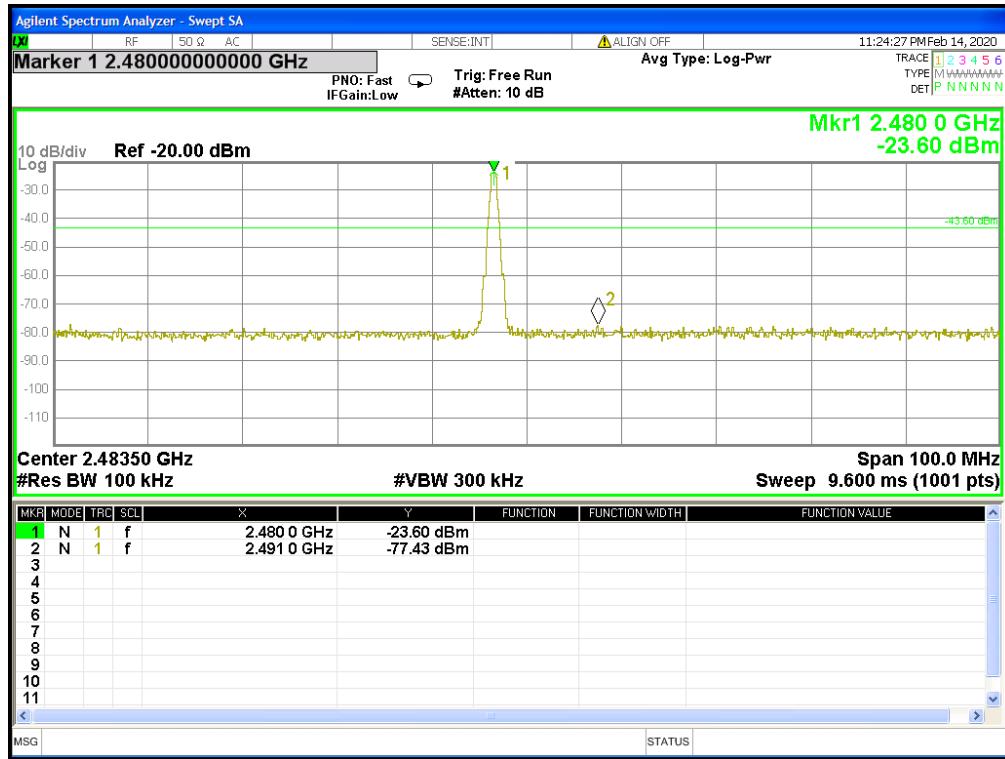




GFSK (1Mbps) hopping

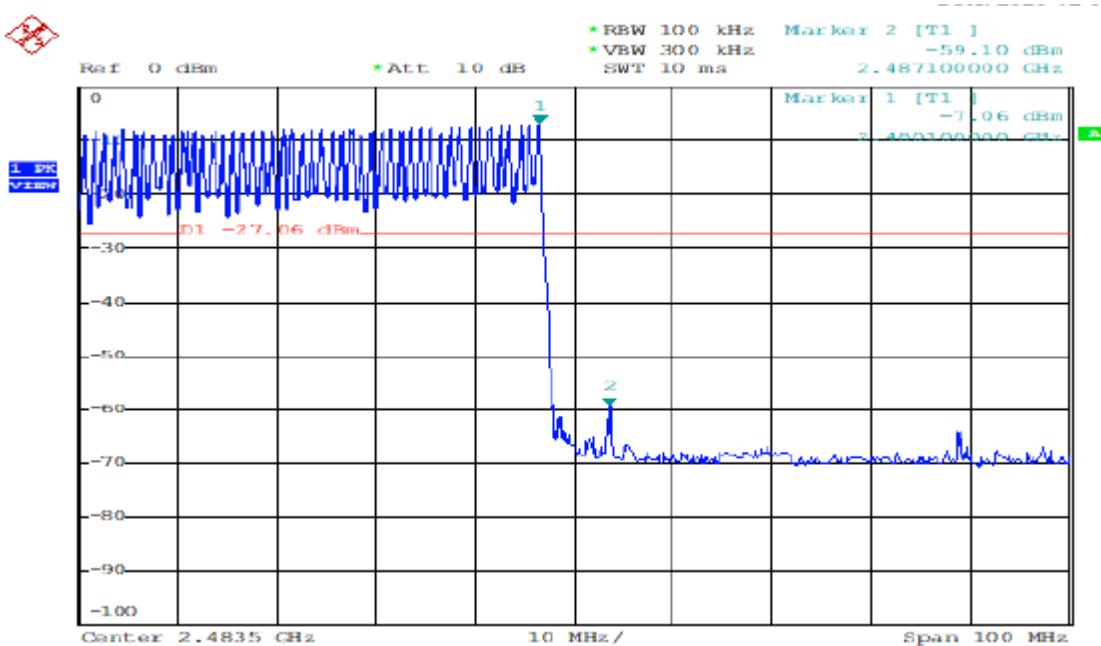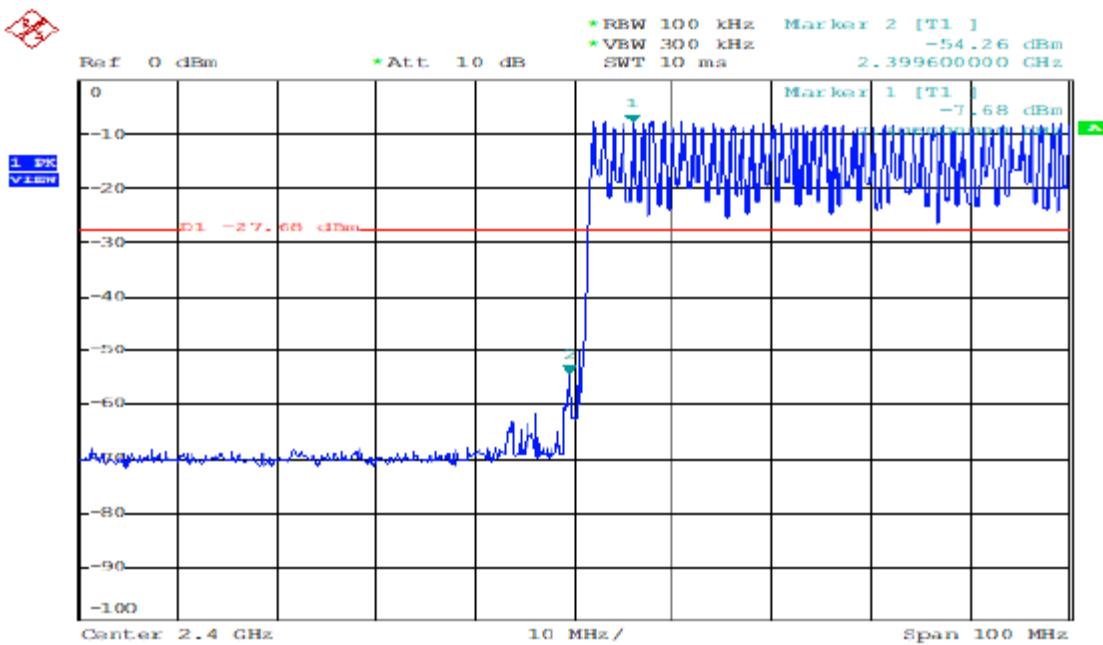



13.5 Restrict Band Emission Measurement Data

Power	:	DC 3V	Pol/Phase	:	HORIZONTAL
Temperature	:	26 °C	Humidity	:	70 %
Test Mode	:	CH LO & HI – Restricted Bands	Memo	:	GFSK

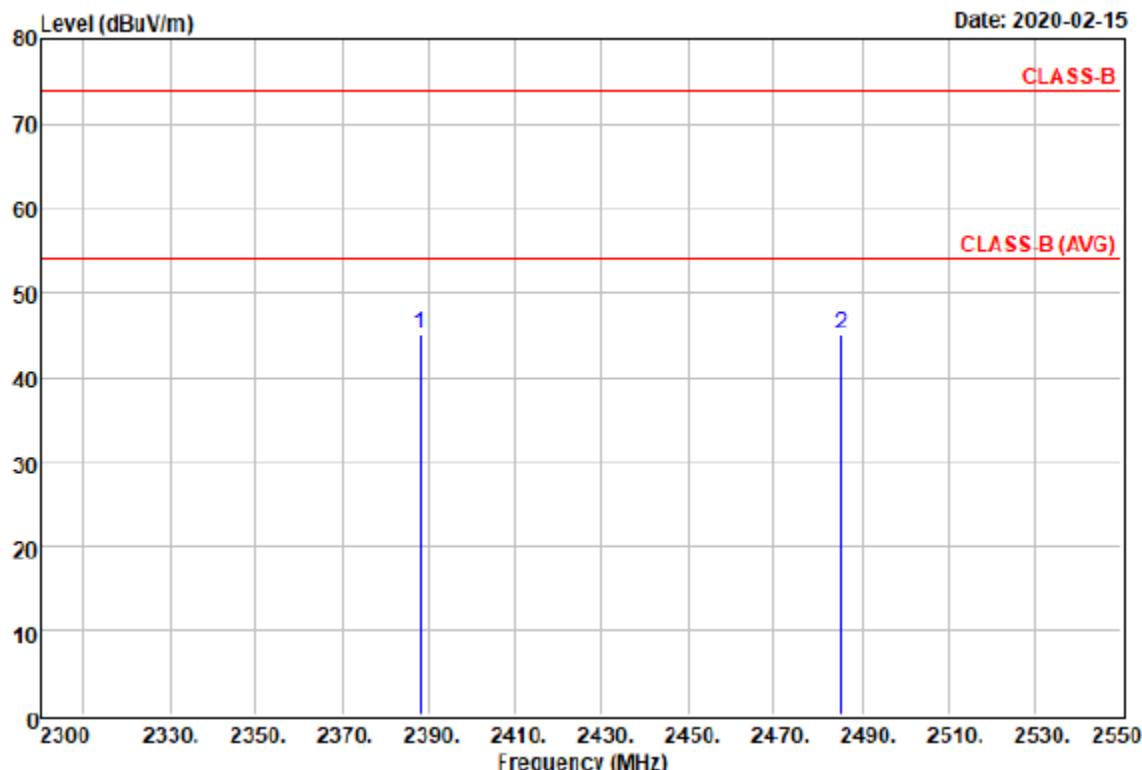


Freq	Read		Limit	Over	Remark
	Level	Factor			
MHz	dB _{UV}	dB/m	dB _{UV} /m	dB _{UV} /m	dB
1 @ 2388.000	55.18	-10.06	45.12	74.00	-28.88 Peak
2 2485.100	54.83	-9.86	44.97	74.00	-29.03 Peak

Note:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 10 Hz for Average detection at frequency above 1 GHz.



Power	: DC 3V	Pol/Phase	: VERTICAL
Temperature	: 26 °C	Humidity	: 70 %
Test Mode	: CH LO & HI – Restricted Bands	Memo	: GFSK

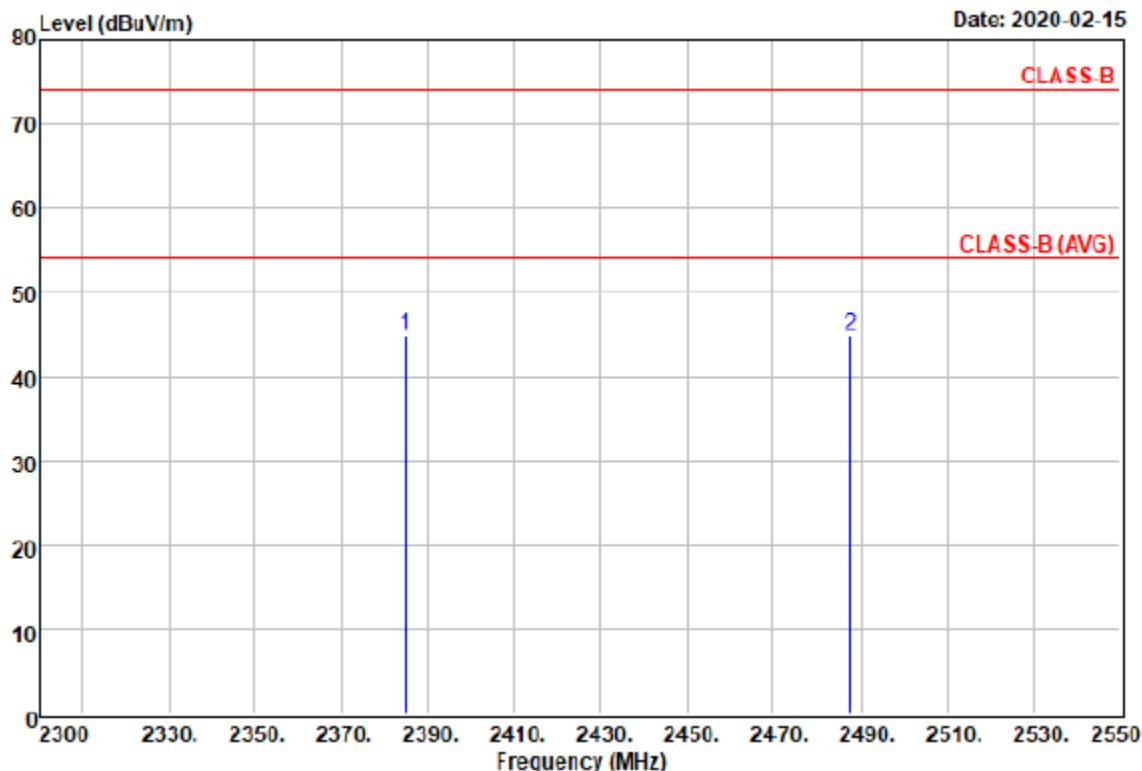

Freq	Read		Limit	Over	Remark
	Level	Factor			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 2385.000	54.80	-10.07	44.73	74.00	-29.27 Peak
2 @ 2487.700	54.65	-9.86	44.79	74.00	-29.21 Peak

Note:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 10 Hz for Average detection at frequency above 1 GHz.



14. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

**: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

14.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.