# SGS

## SGS-CSTC Standards Technical Services Ltd.

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (

 Fax:
 +86 (

 Email:
 ee.sh

+86 (0) 755 2601 2053 +86 (0) 755 2671 0594 ee.shenzhen@sgs.com

Report No.: SZEM130700409201 Page: 1 of 98

## **FCC REPORT**

Application No:	SZEM1307004092RF
Applicant:	Create New Technology (HK) Limited
Manufacturer:	Create New Technology (HK) Limited
Product Name:	TVpad
Model No.(EUT):	M358
FCC ID:	RPSTVPM358X
Standards:	47 CFR Part 15, Subpart C (2012)
Date of Receipt:	2013-07-30
Date of Test:	2013-08-15 to 2013-08-26
Date of Issue:	2013-09-02
Test Result:	PASS *

.\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM130700409201 Page: 2 of 98

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS



Report No.: SZEM130700409201 Page: 3 of 98

## 3 Contents

		P	Page
1	cov	ER PAGE	1
2	TES	T SUMMARY	2
3	CON	ITENTS	3
4	GEN	IERAL INFORMATION	4
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	4
	4.3	TEST ENVIRONMENT AND MODE	
	4.4	DESCRIPTION OF SUPPORT UNITS	6
	4.5	TEST LOCATION	6
	4.6	TEST FACILITY	
	4.7	DEVIATION FROM STANDARDS	
	4.8	Abnormalities from Standard Conditions	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	EQUIPMENT LIST	8
5	TES	T RESULTS AND MEASUREMENT DATA	11
	5.1	ANTENNA REQUIREMENT	11
	5.2	CONDUCTED EMISSIONS	12
	5.3	CONDUCTED PEAK OUTPUT POWER	
	5.4	6DB OCCUPY BANDWIDTH	
	5.5	Power Spectral Density	
	5.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	5.7	RF CONDUCTED SPURIOUS EMISSIONS	
	5.8	RADIATED SPURIOUS EMISSIONS	
	5.8.1		
	5.8.2		
	5.9	BAND EDGE (RADIATED EMISSION)	5-98



Report No.: SZEM130700409201 Page: 4 of 98

## 4 General Information

#### 4.1 Client Information

Applicant:	Create New Technology (HK) Limited
Address of Applicant:	FLAT/RM 704 7/F BRIGHT WAY TOWER 33 MONG KOK ROAD Hong Kong
Manufacturer:	Create New Technology (HK) Limited
Address of Manufacturer:	FLAT/RM 704 7/F BRIGHT WAY TOWER 33 MONG KOK ROAD
	Hong Kong

#### 4.2 General Description of EUT

Product Name:	TVpad
Model No.:	M358
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
	IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
	IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)
	IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)
	IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,
	QPSK,BPSK)
Sample Type:	Fixed production
Test Power Grade:	44 (manufacturer declare )
Test Software of EUT:	adb shell (manufacturer declare )
Antenna Type and Gain:	Type :Integral
	Gain :1.42dBi
Adapter:	MODEL : MU10-Q050200-A1
	Input: AC 100V-240V 50-60Hz 0.3A
	Output: DC 5.0V === 2.0A
Test Voltage:	120V 60Hz
DC Cable:	105cm
AV Cable:	105cm



Report No.: SZEM130700409201 Page: 5 of 98

Operation F	Frequ	ency each	of channe	el <u>(</u> 802.11b/g/n H <sup>-</sup>	T <u>20)</u>	_		-		
Channel	Fr	equency	Channe	Frequency	Channel	Fre	quency	Chanr	nel	Frequency
1	24	412MHz	4	2427MHz	7	244	42MHz	10		2457MHz
2	24	417MHz	5	2432MHz	8	244	47MHz	11		2462MHz
3	24	422MHz	6	2437MHz	9	245	52MHz			
Operation F	Frequ	ency each	of channe	el(802.11n HT40)						
Channe	I	Frequ	ency	Channel	Frequen	су	Chan	nel		Frequency
1		24221	ИНz	4	2437MF	lz	7			2452MHz
2		2427	ИНz	5	2442MF	lz				
3		24321	ИНz	6	2447MF	lz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700409201 Page: 6 of 98

#### 4.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1002mbar
Test mode:	
Transmitting mode:	The EUT transmitted the continuous modulation test signal at the specific channel(s).

## 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
TV	Dell	N/A
TF card	SANDISC	N/A
USB disk	SANDISC	N/A
LAN cable	2.5m	N/A

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM130700409201 Page: 7 of 98

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

#### 4.7 Deviation from Standards

None.

#### 4.8 Abnormalities from Standard Conditions

None.

#### 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM130700409201 Page: 8 of 98

## 4.10Equipment List

	Conducted Emissio	n			
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2014-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2013-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2014-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2013-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2013-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2013-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2014-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2014-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700409201 Page: 9 of 98

RE in Chamber					
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
13	Band filter	Amindeon	82346	SEL0094	2014-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04



Report No.: SZEM130700409201 Page: 10 of 98

	RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24		
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24		
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29		
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29		
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24		
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16		
8	Band filter	amideon	82346	SEL0094	2014-05-16		
9	POWER METER	R & S	NRVS	SEL0144	2013-10-24		
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16		
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24		

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700409201 Page: 11 of 98

## 5 Test results and Measurement Data

#### 5.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203 /247(c)

#### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is1.42dBi.

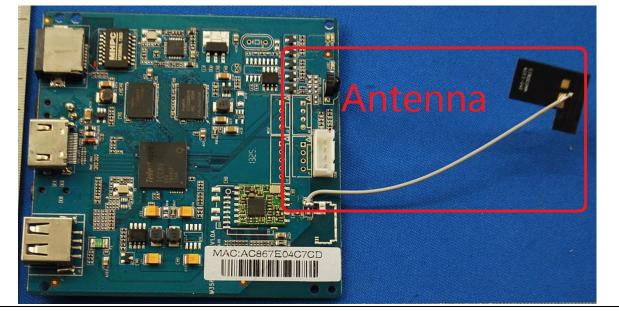




Report No.: SZEM130700409201 Page: 12 of 98

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range	150kHz to 30MHz			
Limit:		Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithn	n of the frequency.		
Test Procedure:				5Ω ound es to he EUT he he f 2.

#### 5.2 Conducted Emissions



Report No.: SZEM130700409201 Page: 13 of 98

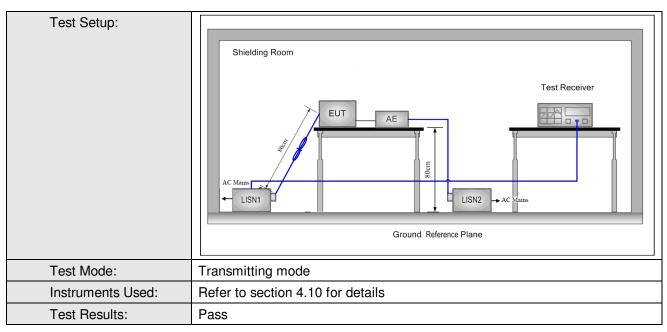


#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.




Report No.: SZEM130700409201 Page: 14 of 98

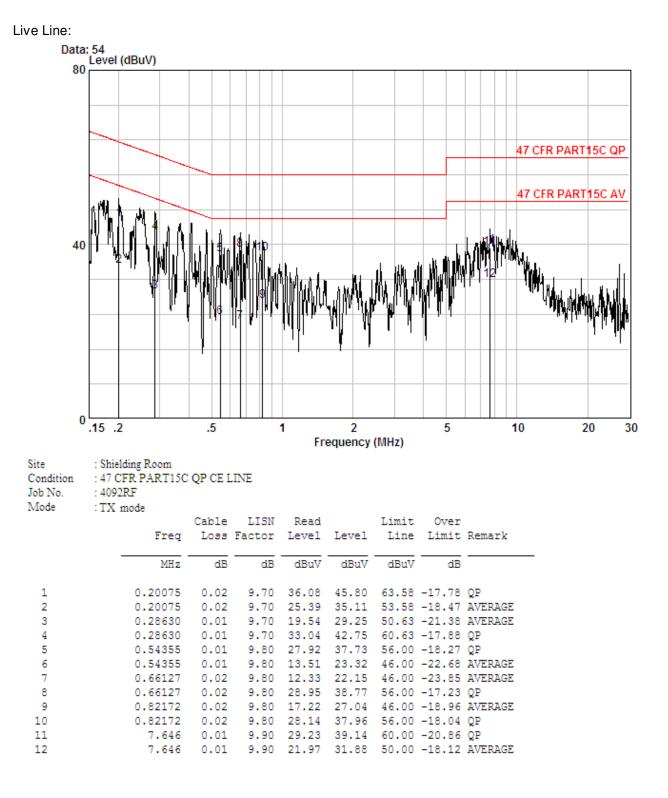



Report No.: SZEM130700409201 Page: 15 of 98

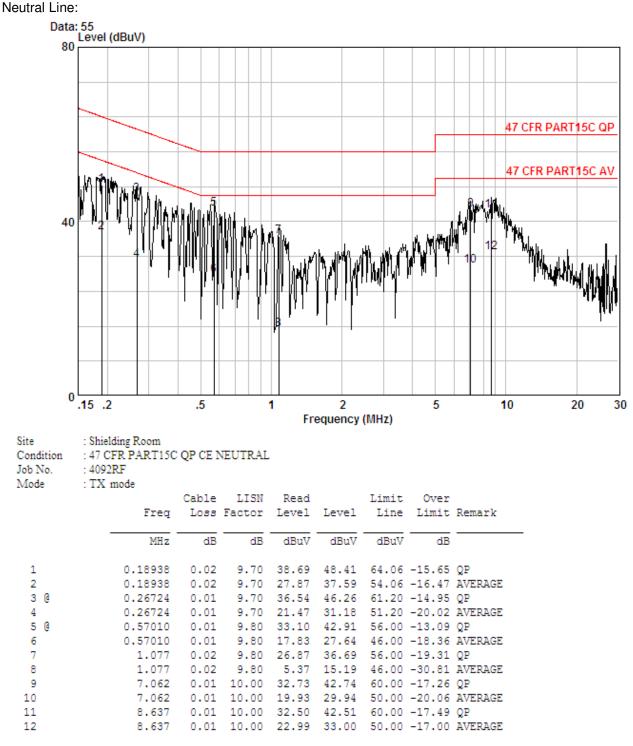

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM130700409201 Page: 16 of 98

#### 5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)		
Test Method:	KDB558074 D01		
Test Setup:	KDB558074 D01		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 4.10 for details		
Exploratory Test Mode:	Transmitting mode		
Final Test Mode:	Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b;		
	54Mbps of rate is the worst case of 802.11g ; 65Mbps of rate is the worst case of 802.11n(HT20) ; 135Mbps of rate is the worst case of 802.11n(HT40)		
Limit:	30dBm		
Test Results:	Pass		



Report No.: SZEM130700409201 Page: 17 of 98

Pre-scan under all rate at lowest channel 1								
Mode	802.11b							
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	16.59	16.77	16.83	16.96				
Mode				802	2.11g			
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	15.66	15.71	15.78	15.82	15.86	15.94	16.01	16.09
Mode	802.11n(HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	15.83	15.92	15.96	16.01	16.08	16.12	16.14	16.15
Mode	802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power (dBm)	15.21	15.25	15.29	15.32	15.39	15.43	15.48	15.55
Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).								




Report No.: SZEM130700409201 Page: 18 of 98

#### Measurement Data

802.11b mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	16.96	30.00	Pass		
Middle	17.49	30.00	Pass		
Highest	16.92	30.00	Pass		
	802.11g mo	de			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	16.09	30.00	Pass		
Middle	16.41	30.00	Pass		
Highest	16.62	30.00	Pass		
	802.11n(HT20)	mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	16.15	30.00	Pass		
Middle	16.47	30.00	Pass		
Highest	16.72	30.00	Pass		
802.11n(HT40)mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	15.55	30.00	Pass		
Middle	15.68	30.00	Pass		
Highest	15.80	30.00	Pass		



Report No.: SZEM130700409201 Page: 19 of 98

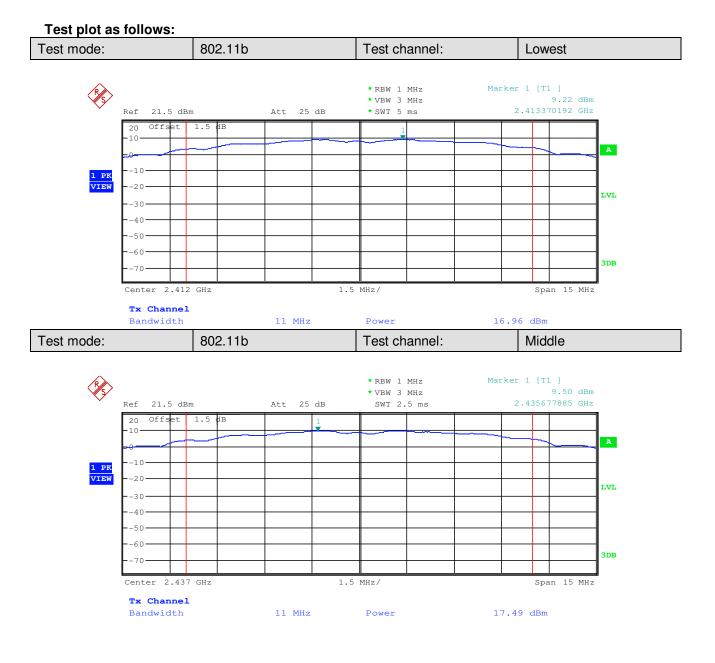





Report No.: SZEM130700409201 Page: 20 of 98





Report No.: SZEM130700409201 Page: 21 of 98






Report No.: SZEM130700409201 Page: 22 of 98






Report No.: SZEM130700409201 Page: 23 of 98

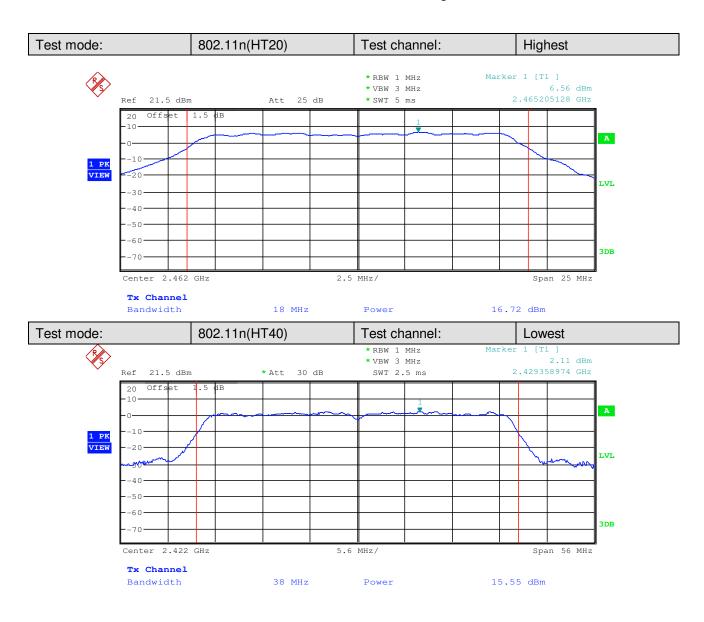



Report No.: SZEM130700409201 Page: 24 of 98

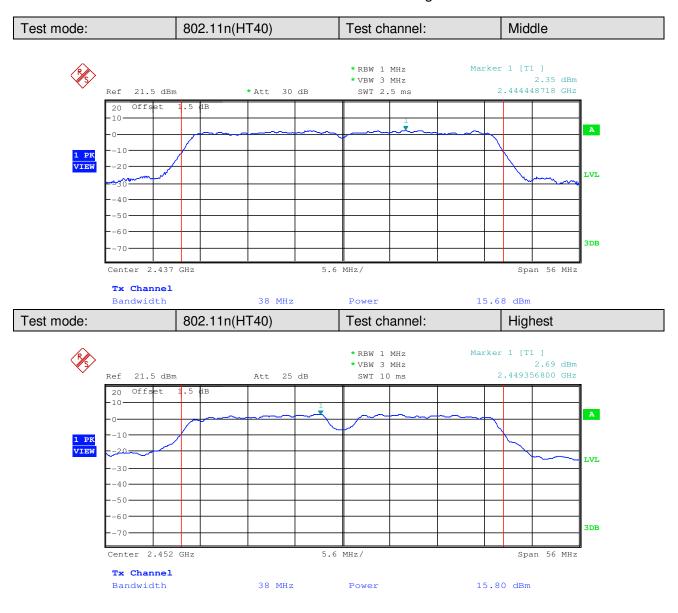



Report No.: SZEM130700409201 Page: 25 of 98

#### 5.4 6dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)		
Test Method:	KDB558074 D01		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Instruments Used:	Refer to section 4.10 for details		
Exploratory Test Mode:	Transmitting mode		
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).		
Limit:	≥ 500 kHz		
Test Results:	Pass		

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700409201 Page: 26 of 98

#### **Measurement Data** 802.11b mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result 10.144230769 ≥500 Lowest Pass Middle ≥500 10.144230769 Pass Highest 10.096453846 ≥500 Pass 802.11g mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result Lowest 16.586538462 ≥500 Pass Middle 16.586538462 ≥500 Pass Highest 16.586538462 ≥500 Pass 802.11n(HT20) mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result Lowest 16.586538462 ≥500 Pass Middle 16.586538462 ≥500 Pass Highest 16.586538462 ≥500 Pass 802.11n(HT40)mode Test channel 6dB Occupy Bandwidth (MHz) Limit (kHz) Result Lowest 36.538461538 ≥500 Pass Middle 36.538461538 ≥500 Pass Highest ≥500 36.538461538 Pass



Report No.: SZEM130700409201 Page: 27 of 98

#### Test plot as follows:

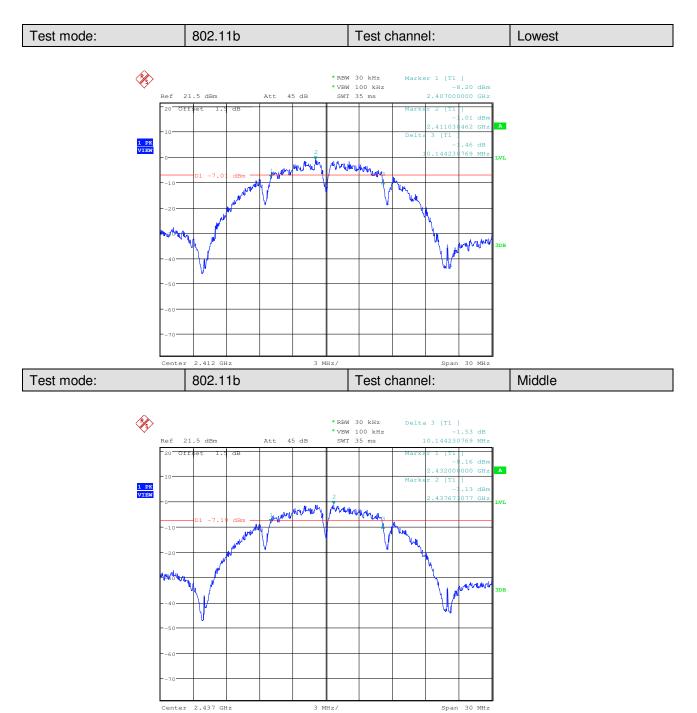


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

3 MHz/

Center 2.437 GHz




Report No.: SZEM130700409201 Page: 28 of 98

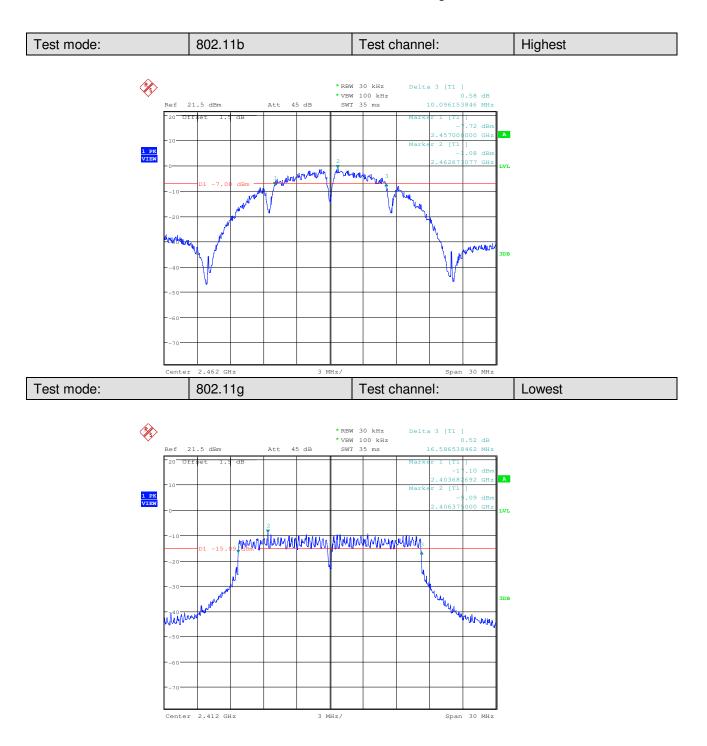




Report No.: SZEM130700409201 Page: 29 of 98

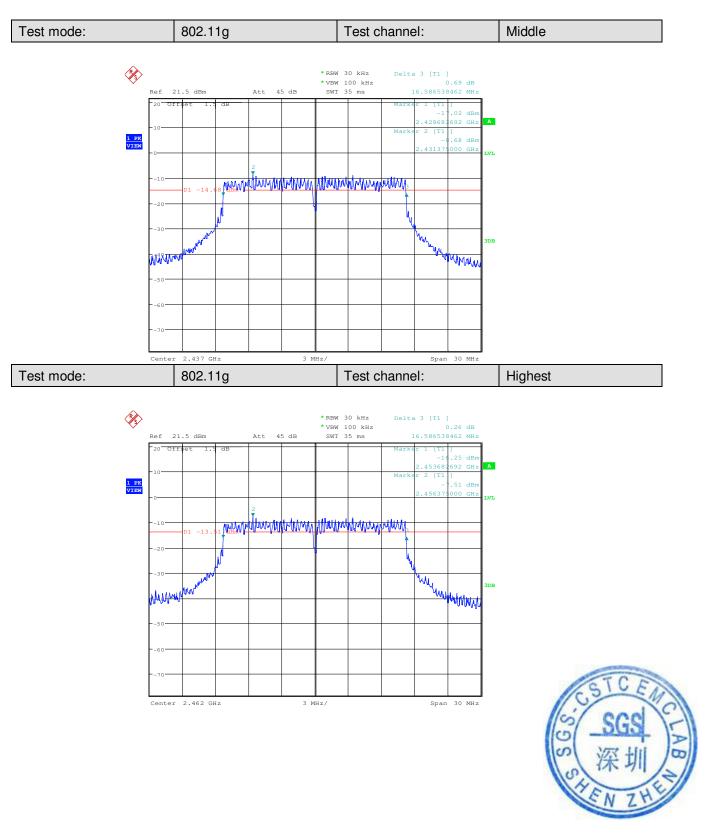




Report No.: SZEM130700409201 Page: 30 of 98

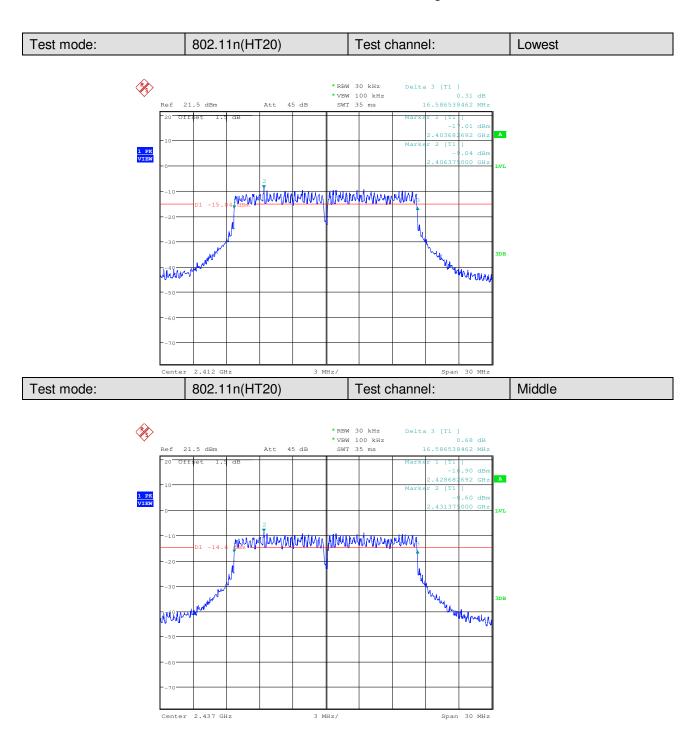




Report No.: SZEM130700409201 Page: 31 of 98

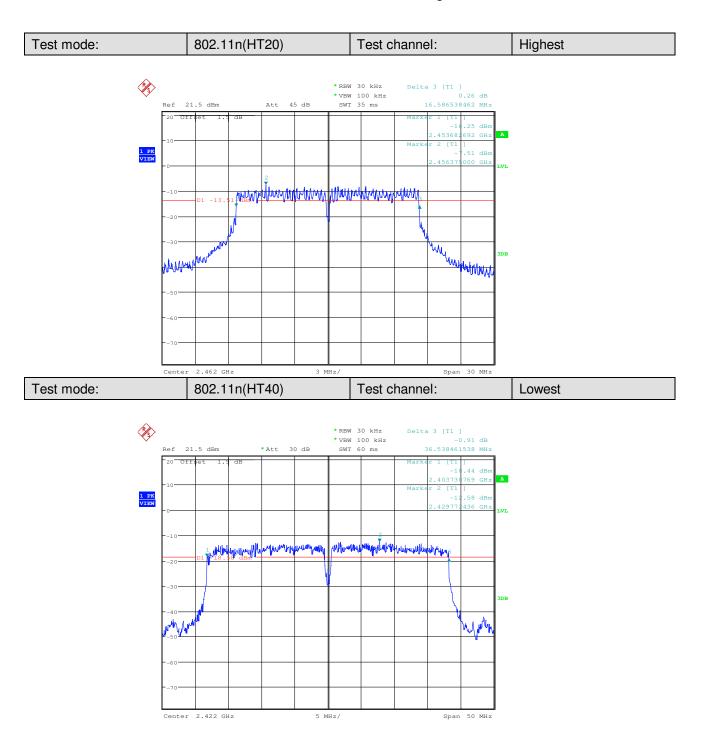



Report No.: SZEM130700409201 Page: 32 of 98

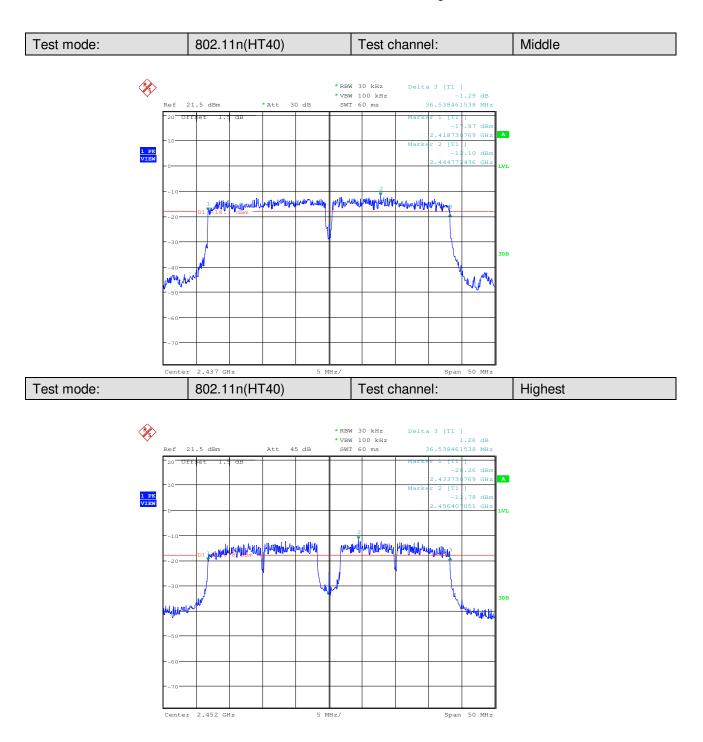



Report No.: SZEM130700409201 Page: 33 of 98

#### 5.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)		
Test Method:	KDB558074 D01		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 4.10 for details		
Exploratory Test Mode:			
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).		
Limit:	≤8.00dBm		
Test Results:	Pass		

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700409201 Page: 34 of 98


#### **Measurement Data**

802.11b mode					
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result		
Lowest	-14.38	≤8.00	Pass		
Middle	-16.05	≤8.00	Pass		
Highest	-16.21	≤8.00	Pass		
	802.11g mode				
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result		
Lowest	-18.85	≤8.00	Pass		
Middle	-18.63	≤8.00	Pass		
Highest	Highest -18.73		Pass		
	802.11n(HT20) mode				
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result		
Lowest	-19.08	≤8.00	Pass		
Middle	-18.74	≤8.00	Pass		
Highest	-18.41	≤8.00	Pass		
802.11n(HT40) mode					
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result		
Lowest	-22.47	≤8.00	Pass		
Middle	-22.50	≤8.00	Pass		
Highest	-22.29	≤8.00	Pass		




Report No.: SZEM130700409201 Page: 35 of 98

#### Test plot as follows:

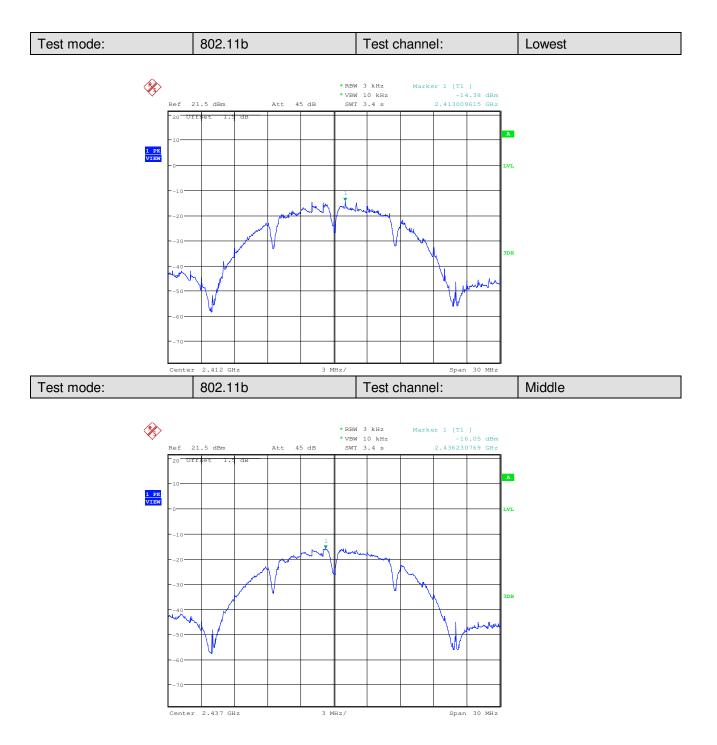




Report No.: SZEM130700409201 Page: 36 of 98

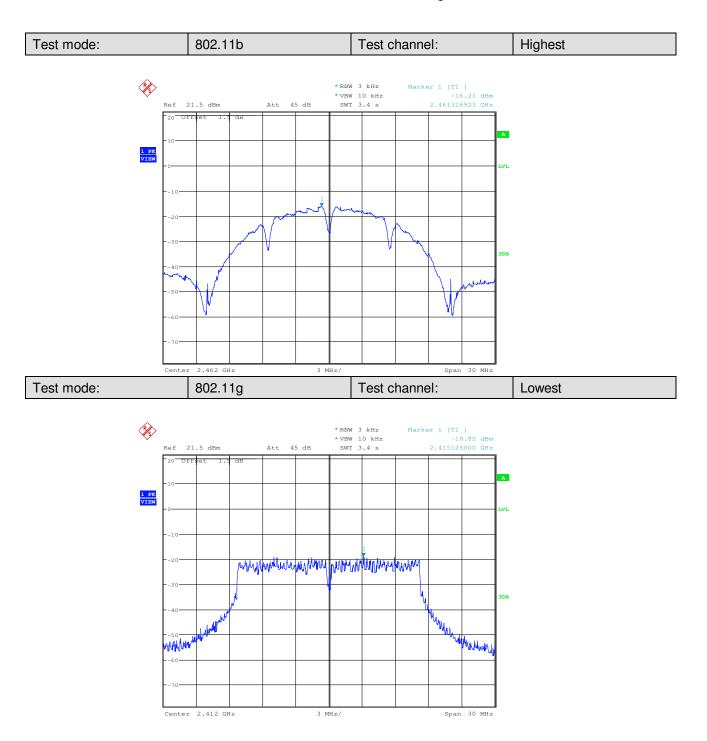




Report No.: SZEM130700409201 Page: 37 of 98

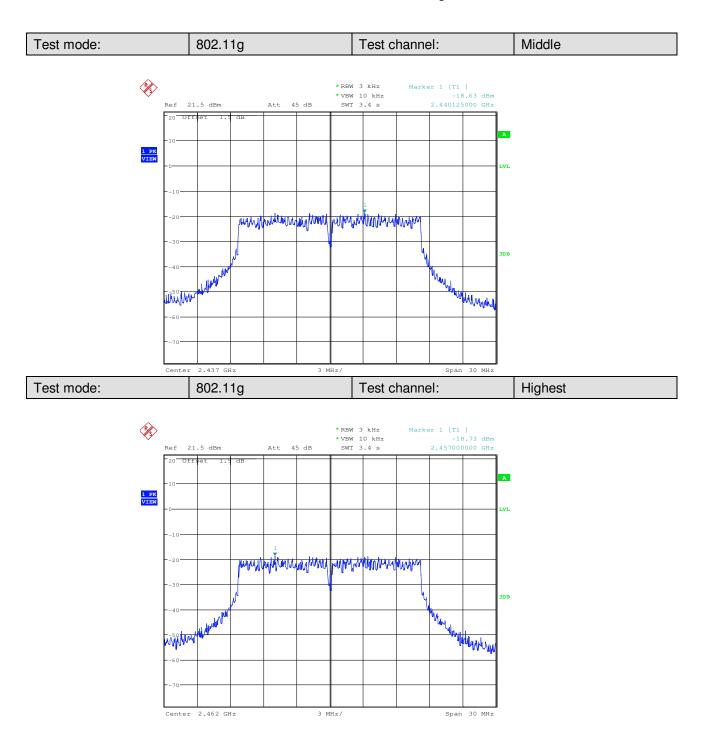




Report No.: SZEM130700409201 Page: 38 of 98

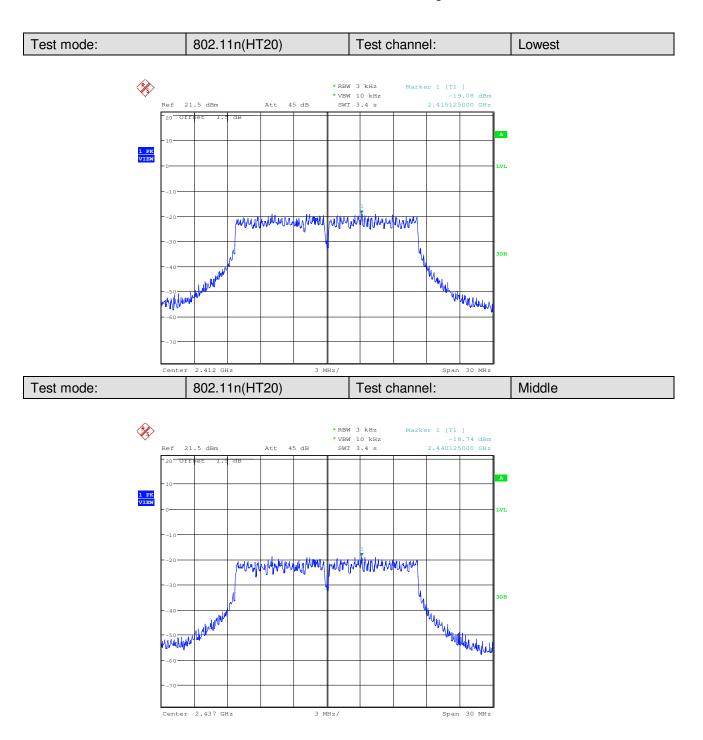




Report No.: SZEM130700409201 Page: 39 of 98

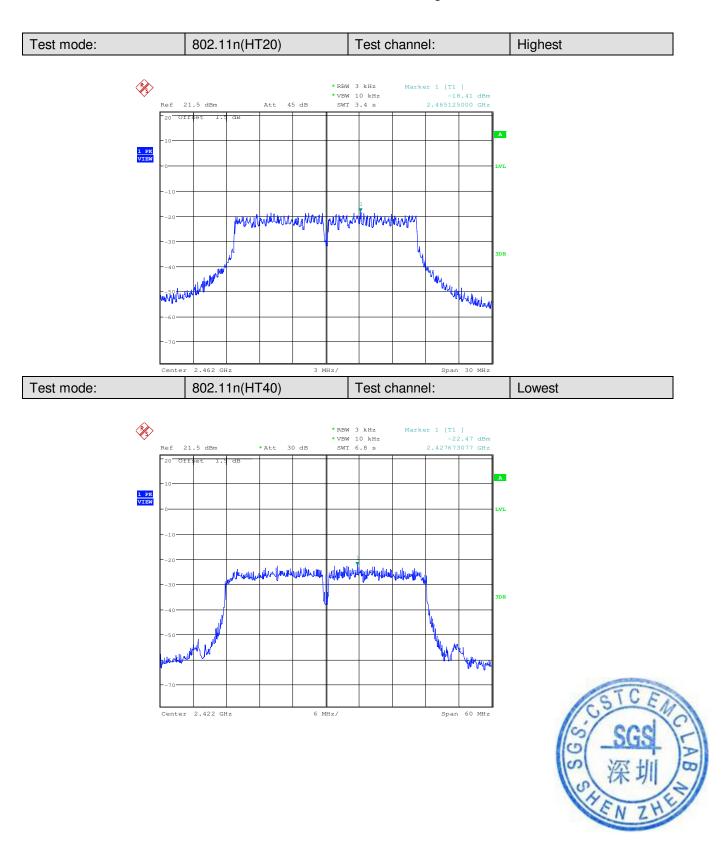



Report No.: SZEM130700409201 Page: 40 of 98

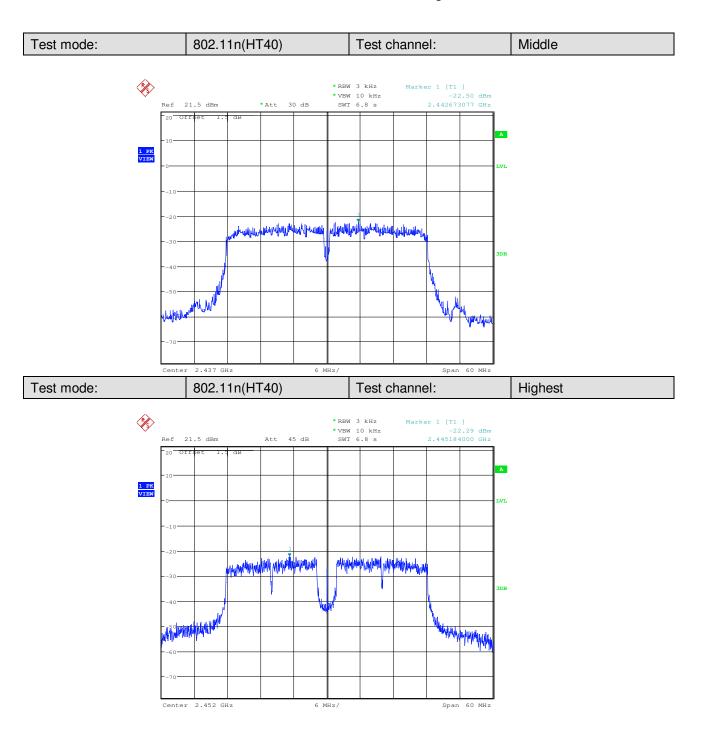



Report No.: SZEM130700409201 Page: 41 of 98

#### 5.6 Band-edge for RF Conducted Emissions


47 CFR Part 15C Section 15.247 (d)						
KDB558074 D01						
Spectrum Analyzer E.U.T Non-Conducted Table						
Ground Reference Plane						
Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Transmitting mode						
Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).						
In any 100 kHz bandwidth outside the frequency band in which the spread						
spectrum intentional radiator is operating, the radio frequency power that is						
produced by the intentional radiator shall be at least 20 dB below that in the						
100 kHz bandwidth within the band that contains the highest level of the						
desired power, based on either an RF conducted or a radiated measurement.						
Refer to section 4.10 for details						
Pass						

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700409201 Page: 42 of 98

#### Test plot as follows:

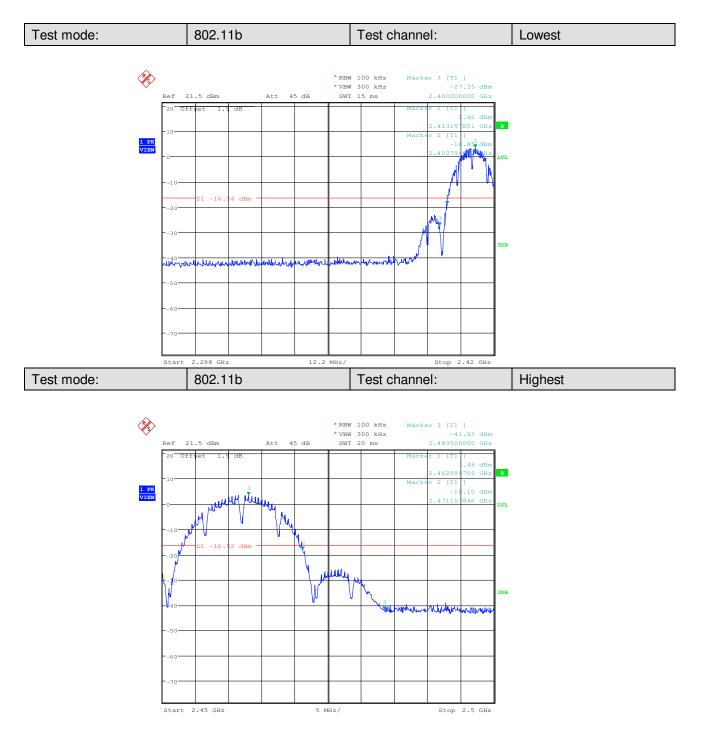




Report No.: SZEM130700409201 Page: 43 of 98

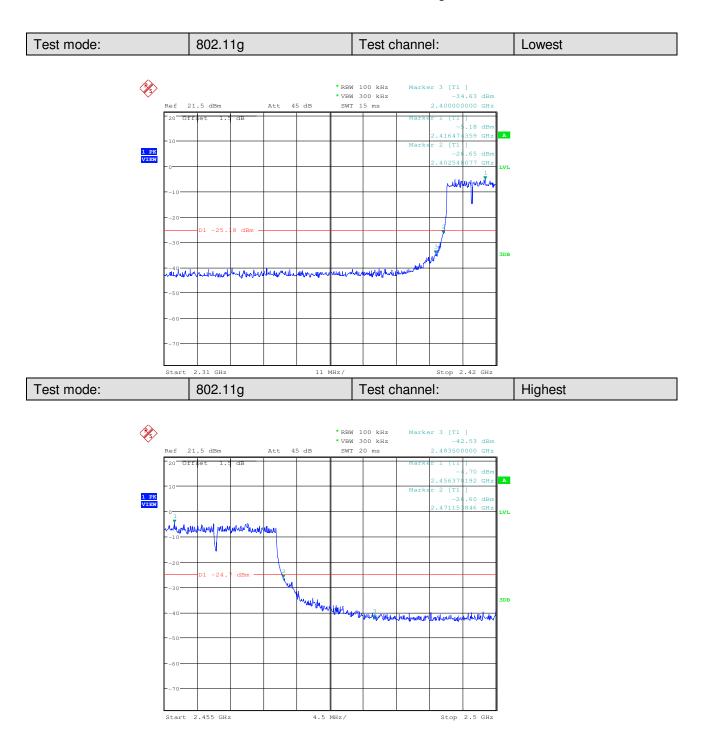

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700409201 Page: 44 of 98

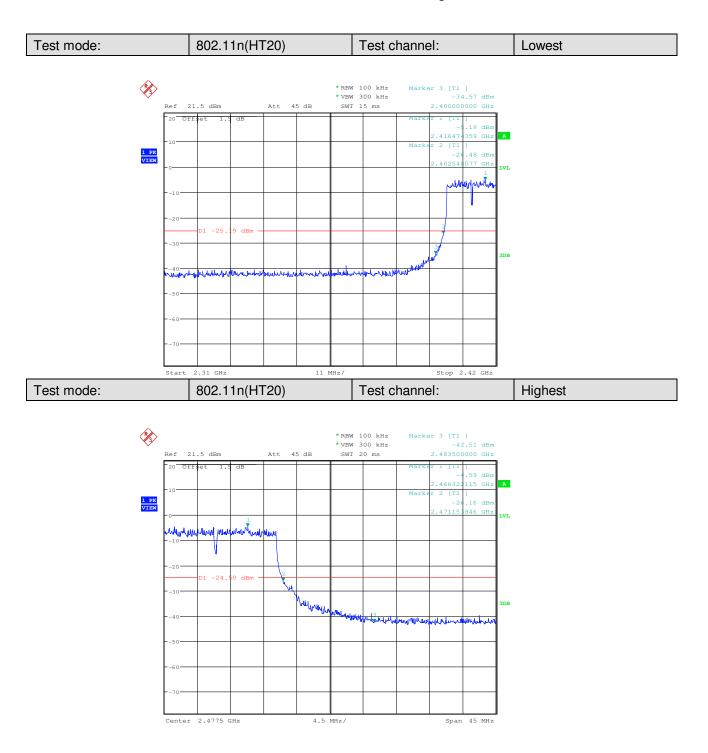



Report No.: SZEM130700409201 Page: 45 of 98

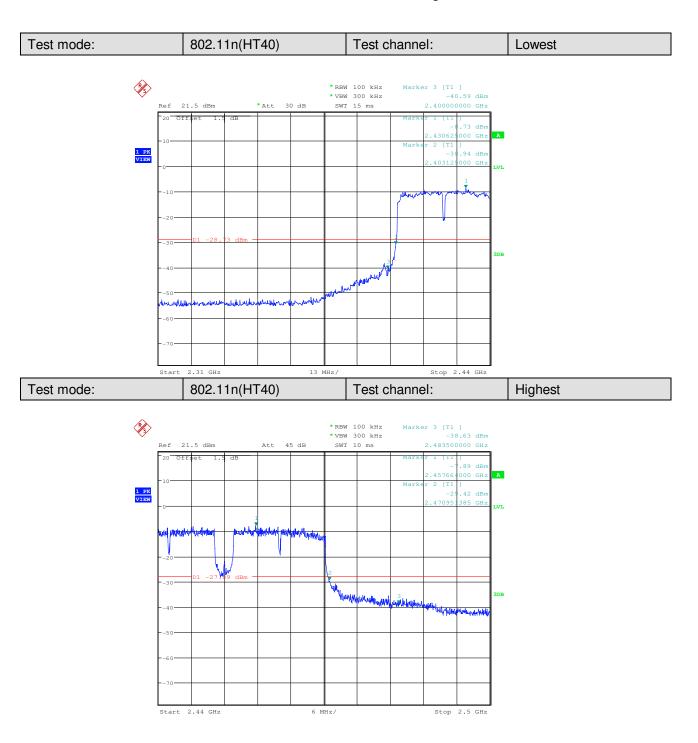



Report No.: SZEM130700409201 Page: 46 of 98

#### 5.7 **RF Conducted Spurious Emissions**


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table
	Ground Reference Plane
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread
	spectrum intentional radiator is operating, the radio frequency power that is
	produced by the intentional radiator shall be at least 20 dB below that in the
	100 kHz bandwidth within the band that contains the highest level of the
	desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700409201 Page: 47 of 98

#### Test plot as follows:

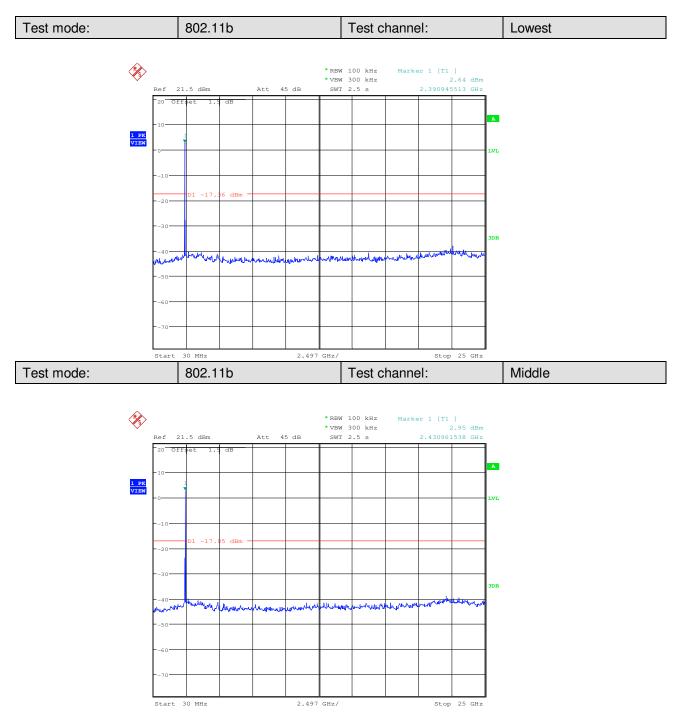




Report No.: SZEM130700409201 Page: 48 of 98

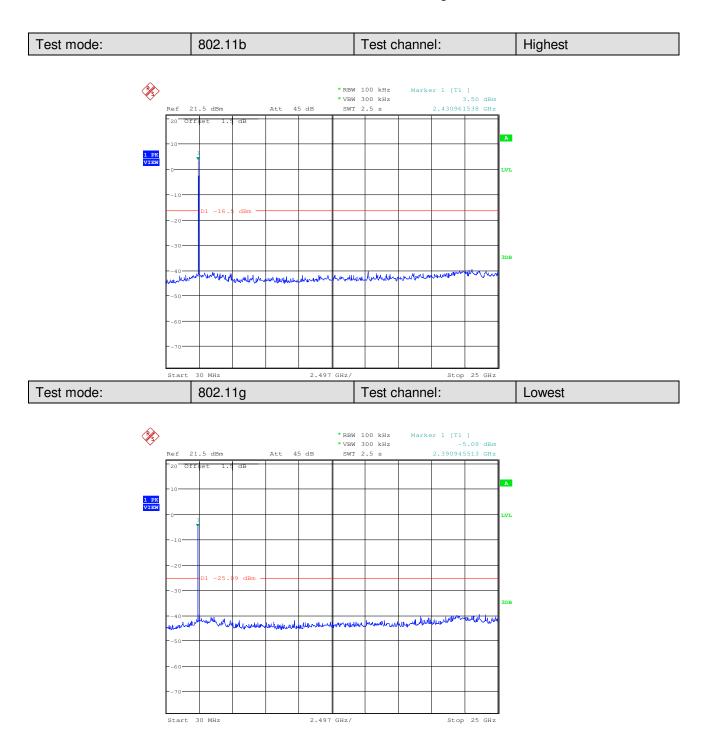




Report No.: SZEM130700409201 Page: 49 of 98

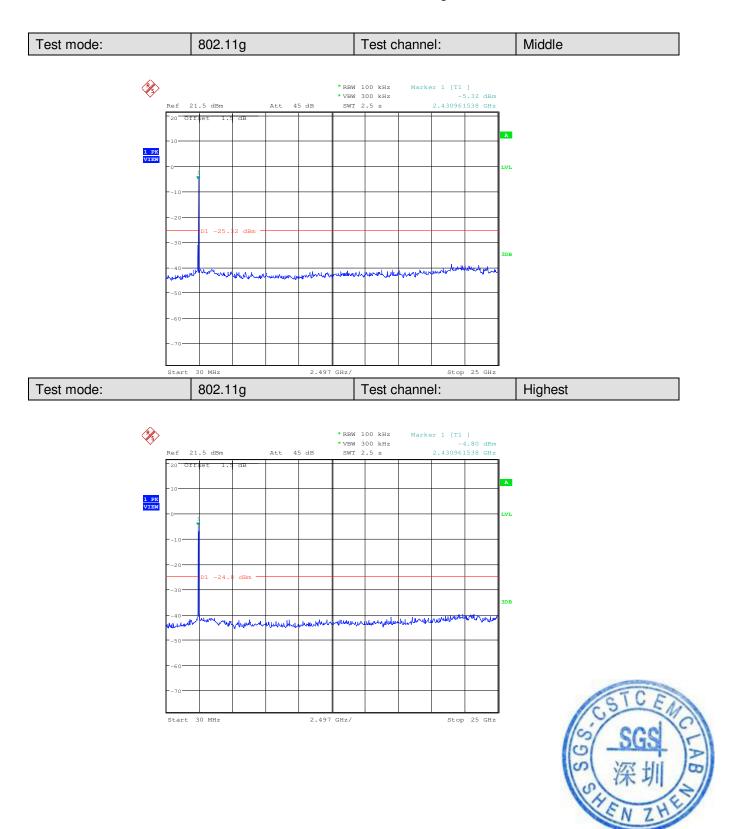




Report No.: SZEM130700409201 Page: 50 of 98

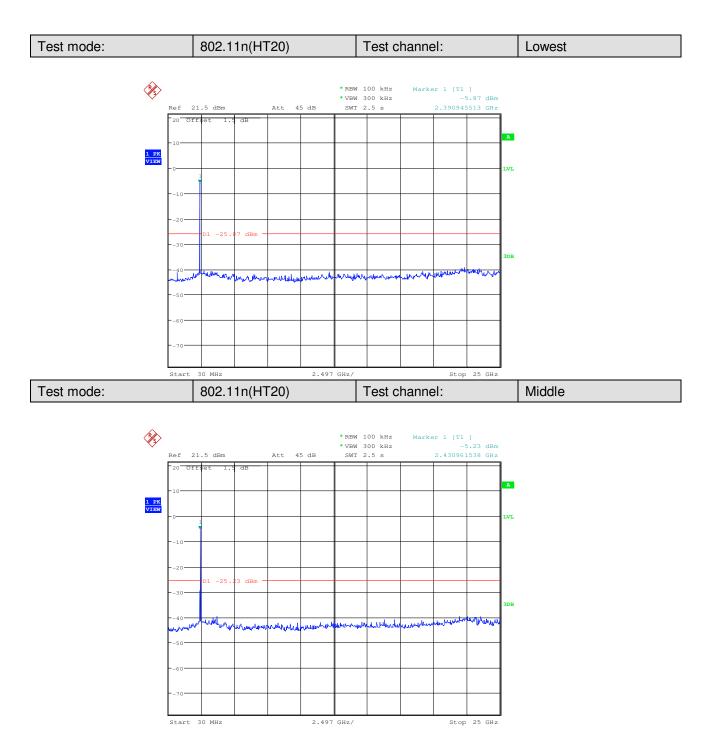




Report No.: SZEM130700409201 Page: 51 of 98

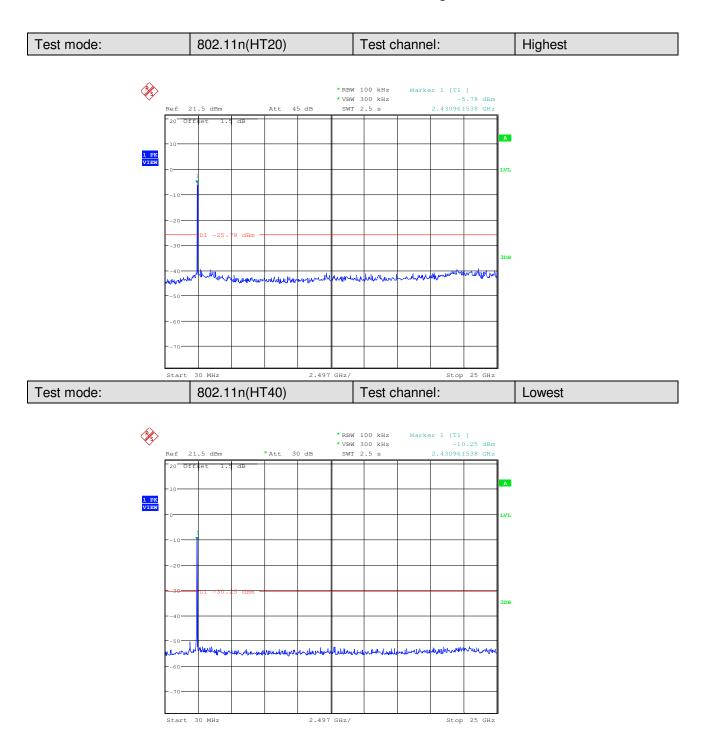



Report No.: SZEM130700409201 Page: 52 of 98

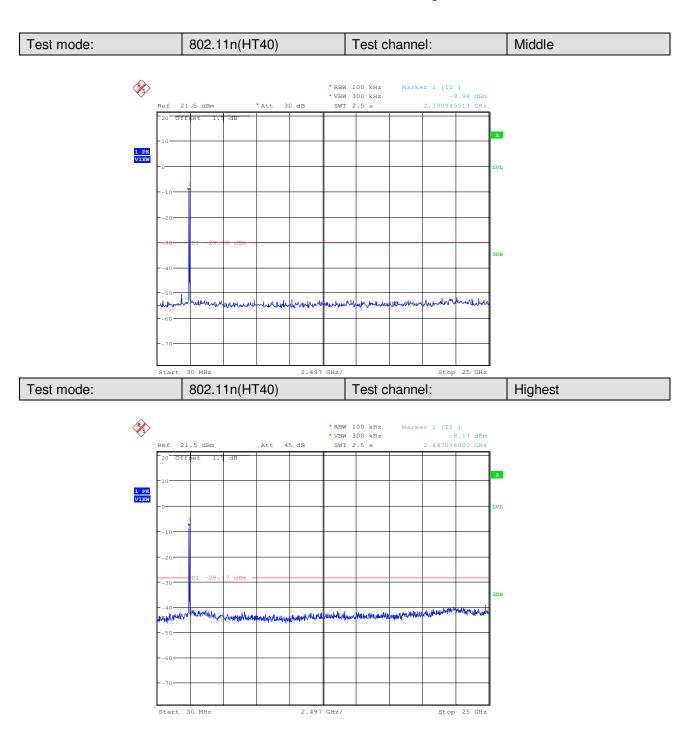



Report No.: SZEM130700409201 Page: 53 of 98


#### 5.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section	n 15.209 and 15.20	05					
Test Method:	ANSI C63.10 2009							
Test Site:	Measurement Distance:	3m (Semi-Anecho	ic Chamber)					
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak			
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average			
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak			
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average			
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak			
	Above 1GHz	Peak	1MHz	3MHz	Peak			
	Above ronz	Peak	1MHz	10Hz	Average			
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)			
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30	-	-	30			
	30MHz-88MHz	100	40.0	Quasi-peak	3			
	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency							
	emissions is 20dB above the maximum permitted average emission limit							
	applicable to the equipment under test. This peak limit applies to the tota peak							
	emission level rad	iated by the device	е.					

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700409201 Page: 54 of 98

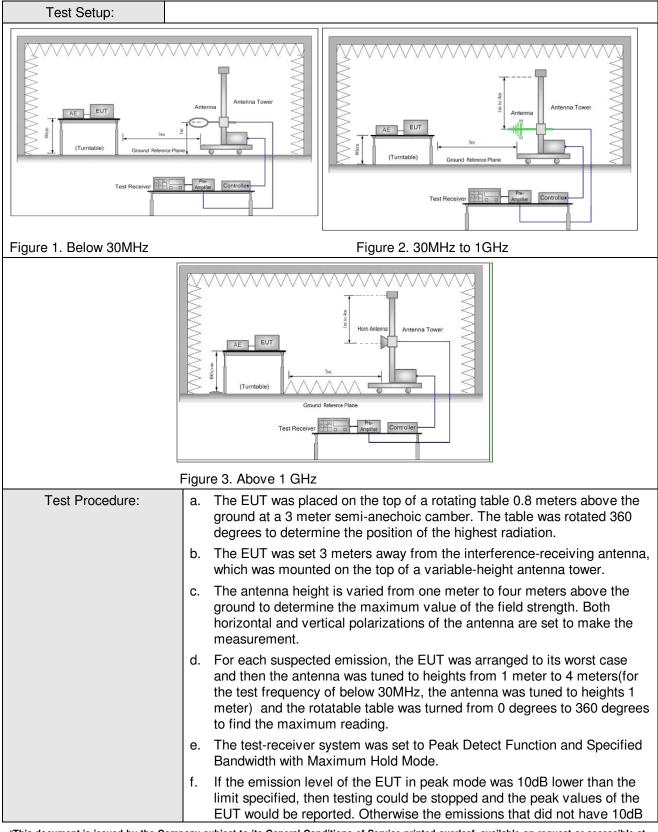

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700409201 Page: 55 of 98

	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
	g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
	h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test	Transmitting mode
Mode:	
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM130700409201 Page: 56 of 98

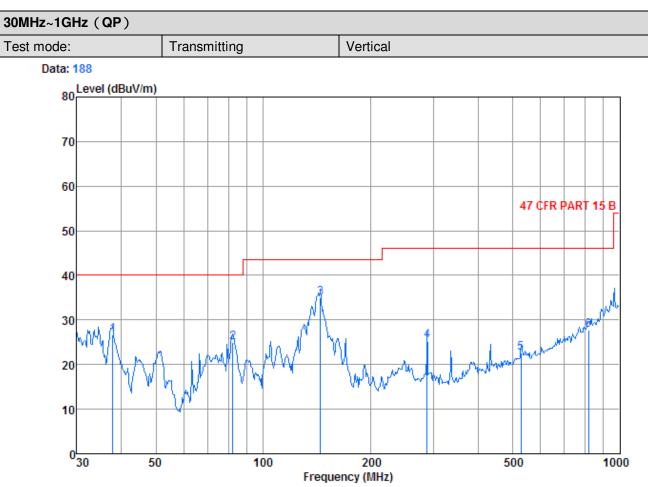


#### 5.8.1 Radiated emission below 1GHz

Condition: 47 CFR PART 15 B 3m 3142C VERTICAL Job No. : 4092RF Mode : TX mode

	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	37.81 82.07 144.84 287.99 528.25 818.83		11.87 5.49 8.96 9.27 14.18 19.20	27.33 27.23 26.93 26.43 27.65 27.20	41. 45 45. 58 51. 59 40. 80 33. 47 32. 40	26.59 24.94 34.93 25.49 22.63 27.68	40.00 43.50 46.00 46.00	-13.41 -15.06 -8.57 -20.51 -23.37 -18.32



Report No.: SZEM130700409201 Page: 57 of 98

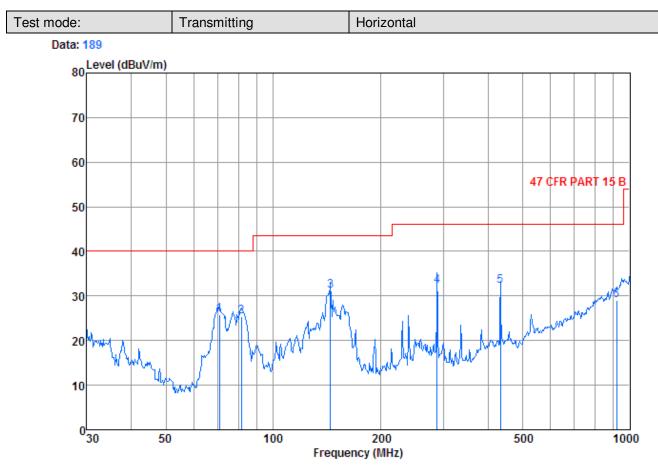

Condition:	47	CFR	PART	15	В	Зm	3142C	HORIZONTAL
Job No. :	40	92RF						
Mode :	ΤX	mode	е					

ouc	. 120 10			_				_
		CableA	ntenna	Preamp	Read		Limit	Over
	Free			Factor			Line	Limi+
	rieq	LUSS	ractor	ractor	LCVCI	Lever	LINE	LIMIU
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	70.58	0.82	4.86	27.25	47.40	25.83	40.00	-14.17
2	81.50	1.10	5.41	27.23	46.04	25 32	40.00	-14 68
3								
3	144.84	1.31	8.96	26.93	47.83	31.17	43.50	-12.33
4	287.99	1.85	9.27	26.43	47.46	32.15	46.00	-13.85
5	434.07	2.35	12.10	27.35	45.14	32.24	46.00	-13.76
6			20.80					
0	919.29	3.62	20.80	26.68	31.35	29.09	40.00	-16.91



Report No.: SZEM130700409201 Page: 58 of 98

Test mode:	802	.11b	Test ch	annel:	Lowest	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4821.757	7.45	34.68	41.64	47.82	48.31	74.00	-25.69	Vertical
5791.646	7.89	35.37	41.10	47.49	49.65	74.00	-24.35	Vertical
7470.558	9.05	35.99	39.64	46.65	52.05	74.00	-21.95	Vertical
8462.975	9.47	36.19	38.78	45.30	52.18	74.00	-21.82	Vertical
9441.913	9.66	37.14	37.94	43.45	52.31	74.00	-21.69	Vertical
11140.850	10.67	38.47	37.92	41.95	53.17	74.00	-20.83	Vertical
3625.669	5.93	33.34	40.76	48.25	46.76	74.00	-27.24	Horizontal
4444.562	7.01	35.06	41.36	47.06	47.77	74.00	-26.23	Horizontal
6172.197	8.03	35.90	40.78	48.88	52.03	74.00	-21.97	Horizontal
7394.878	8.96	35.96	39.71	46.93	52.14	74.00	-21.86	Horizontal
9562.854	9.67	37.27	37.83	43.77	52.88	74.00	-21.12	Horizontal
11457.210	10.90	38.41	38.05	42.39	53.65	74.00	-20.35	Horizontal

#### 5.8.2 Transmitter emission above 1GHz

Test mode:	802	.11b	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3634.910	5.95	33.37	40.77	48.06	46.61	74.00	-27.39	Vertical
4455.890	7.03	35.06	41.37	48.73	49.45	74.00	-24.55	Vertical
5646.079	7.82	35.12	41.22	48.66	50.38	74.00	-23.62	Vertical
7451.566	9.03	35.99	39.66	48.20	53.56	74.00	-20.44	Vertical
9465.979	9.66	37.16	37.91	44.39	53.30	74.00	-20.70	Vertical
11341.140	10.81	38.43	38.00	41.78	53.02	74.00	-20.98	Vertical
4582.422	7.18	35.06	41.47	47.16	47.93	74.00	-26.07	Horizontal
5646.079	7.82	35.12	41.22	46.46	48.18	74.00	-25.82	Horizontal
6544.350	8.16	36.27	40.45	46.26	50.24	74.00	-23.76	Horizontal
7451.566	9.03	35.99	39.66	46.02	51.38	74.00	-22.62	Horizontal
9465.979	9.66	37.16	37.91	44.31	53.22	74.00	-20.78	Horizontal
11112.520	10.64	38.48	37.91	41.95	53.16	74.00	-20.84	Horizontal



Report No.: SZEM130700409201 Page: 59 of 98

Test mode:	802	.11b	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3709.691	6.05	33.45	40.83	46.95	45.62	74.00	-28.38	Vertical
4501.492	7.07	35.20	41.40	46.00	46.87	74.00	-27.13	Vertical
5674.896	7.83	35.18	41.20	46.27	48.08	74.00	-25.92	Vertical
7566.249	9.17	36.00	39.56	45.86	51.47	74.00	-22.53	Vertical
8703.294	9.54	36.36	38.59	44.24	51.55	74.00	-22.45	Vertical
10999.950	10.56	38.50	37.86	42.70	53.90	74.00	-20.10	Vertical
3598.087	5.90	33.32	40.74	47.10	45.58	74.00	-28.42	Horizontal
4594.102	7.18	35.06	41.47	46.34	47.11	74.00	-26.89	Horizontal
6299.178	8.08	36.06	40.66	45.72	49.20	74.00	-24.80	Horizontal
7547.013	9.14	36.00	39.57	45.38	50.95	74.00	-23.05	Horizontal
9370.083	9.65	37.03	37.99	43.27	51.96	74.00	-22.04	Horizontal
11603.960	11.00	38.50	38.11	42.46	53.85	74.00	-20.15	Horizontal

Test mode:	802	.11g	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3634.910	5.95	33.37	40.77	46.85	45.40	74.00	-28.60	Vertical
4629.319	7.22	35.01	41.50	46.59	47.32	74.00	-26.68	Vertical
6283.164	8.07	36.04	40.68	46.49	49.92	74.00	-24.08	Vertical
7880.772	9.29	36.00	39.29	46.24	52.24	74.00	-21.76	Vertical
9441.913	9.66	37.14	37.94	43.69	52.55	74.00	-21.45	Vertical
10778.210	10.41	38.41	37.77	42.24	53.29	74.00	-20.71	Vertical
3316.617	5.50	33.28	40.54	46.42	44.66	74.00	-29.34	Horizontal
4490.048	7.05	35.15	41.40	46.56	47.36	74.00	-26.64	Horizontal
6478.053	8.14	36.26	40.51	47.27	51.16	74.00	-22.84	Horizontal
7643.683	9.23	36.00	39.49	45.97	51.71	74.00	-22.29	Horizontal
9636.161	9.68	37.34	37.76	43.64	52.90	74.00	-21.10	Horizontal
11457.210	10.90	38.41	38.05	42.57	53.83	74.00	-20.17	Horizontal
								1117



Report No.: SZEM130700409201 Page: 60 of 98

Test mode:	802	.11g	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3700.260	6.05	33.45	40.81	46.63	45.32	74.00	-28.68	Vertical
4594.102	7.18	35.06	41.47	45.37	46.14	74.00	-27.86	Vertical
6611.326	8.18	36.20	40.40	46.13	50.11	74.00	-23.89	Vertical
8022.456	9.34	36.01	39.16	45.02	51.21	74.00	-22.79	Vertical
9636.161	9.68	37.34	37.76	43.04	52.30	74.00	-21.70	Vertical
10999.950	10.56	38.50	37.86	42.73	53.93	74.00	-20.07	Vertical
3598.087	5.90	33.32	40.74	46.62	45.10	74.00	-28.90	Horizontal
5191.168	7.62	34.60	41.62	46.75	47.35	74.00	-26.65	Horizontal
6974.358	8.43	35.83	40.08	46.20	50.38	74.00	-23.62	Horizontal
8355.943	9.43	36.14	38.88	45.50	52.19	74.00	-21.81	Horizontal
9346.262	9.65	37.01	38.03	44.70	53.33	74.00	-20.67	Horizontal
11692.920	11.07	38.59	38.15	42.18	53.69	74.00	-20.31	Horizontal

Test mode:	802	.11g	Test ch	annel:	Highest	Remark		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
4444.562	7.01	35.06	41.36	46.01	46.72	74.00	-27.28	Vertical	
6886.154	8.35	35.92	40.15	46.85	50.97	74.00	-23.03	Vertical	
7566.249	9.17	36.00	39.56	45.99	51.60	74.00	-22.40	Vertical	
8527.851	9.49	36.23	38.73	45.50	52.49	74.00	-21.51	Vertical	
9834.406	9.77	37.54	37.60	43.09	52.80	74.00	-21.20	Vertical	
11603.960	11.00	38.50	38.11	41.71	53.10	74.00	-20.90	Vertical	
3747.656	6.11	33.51	40.86	48.45	47.21	74.00	-26.79	Horizontal	
4501.492	7.07	35.20	41.40	48.47	49.34	74.00	-24.66	Horizontal	
6094.137	8.01	35.82	40.84	48.92	51.91	74.00	-22.09	Horizontal	
7470.558	9.05	35.99	39.64	45.77	51.17	74.00	-22.83	Horizontal	
9636.161	9.68	37.34	37.76	42.28	51.54	74.00	-22.46	Horizontal	
11692.920	11.07	38.59	38.15	41.56	53.07	74.00	-20.93	Horizontal	



Report No.: SZEM130700409201 Page: 61 of 98

Test mode:	802	2.11n(HT20)	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
4501.492	7.07	35.20	41.40	46.82	47.69	74.00	-26.31	Vertical
6428.771	8.12	36.20	40.55	46.20	49.97	74.00	-24.03	Vertical
7624.250	9.22	36.00	39.51	45.21	50.92	74.00	-23.08	Vertical
8703.294	9.54	36.36	38.59	44.35	51.66	74.00	-22.34	Vertical
9859.472	9.79	37.56	37.58	42.99	52.76	74.00	-21.24	Vertical
11486.410	10.91	38.40	38.06	41.99	53.24	74.00	-20.76	Vertical
3598.087	5.90	33.32	40.74	47.54	46.02	74.00	-27.98	Horizontal
5674.896	7.83	35.18	41.20	48.25	50.06	74.00	-23.94	Horizontal
7547.013	9.14	36.00	39.57	46.87	52.44	74.00	-21.56	Horizontal
8615.126	9.51	36.29	38.65	44.88	52.03	74.00	-21.97	Horizontal
9935.053	9.82	37.65	37.52	43.35	53.30	74.00	-20.70	Horizontal
11486.410	10.91	38.40	38.06	41.88	53.13	74.00	-20.87	Horizontal

Test mode:	80	2.11n(HT20)	Test ch	annel:	Middle	Remark	:	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n	
3598.087	5.90	33.32	40.74	46.97	45.45	74.00	-28.55	Vertical	
5732.974	7.86	35.26	41.15	47.35	49.32	74.00	-24.68	Vertical	
6696.010	8.21	36.11	40.31	46.03	50.04	74.00	-23.96	Vertical	
8615.126	9.51	36.29	38.65	44.89	52.04	74.00	-21.96	Vertical	
9441.913	9.66	37.14	37.94	43.64	52.50	74.00	-21.50	Vertical	
11112.520	10.64	38.48	37.91	42.16	53.37	74.00	-20.63	Vertical	
4641.118	7.25	34.98	41.51	48.19	48.91	74.00	-25.09	Horizontal	
6561.030	8.17	36.25	40.43	45.81	49.80	74.00	-24.20	Horizontal	
7643.683	9.23	36.00	39.49	45.26	51.00	74.00	-23.00	Horizontal	
8703.294	9.54	36.36	38.59	44.28	51.59	74.00	-22.41	Horizontal	
9562.854	9.67	37.27	37.83	43.33	52.44	74.00	-21.56	Horizontal	
11603.960	11.00	38.50	38.11	42.24	53.63	74.00	-20.37	Horizontal	



Report No.: SZEM130700409201 Page: 62 of 98

Test mode:	802	2.11n(HT20)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3709.691	6.05	33.45	40.83	47.39	46.06	74.00	-27.94	Vertical
4536.000	7.12	35.14	41.43	47.23	48.06	74.00	-25.94	Vertical
5971.290	7.97	35.64	40.94	46.76	49.43	74.00	-24.57	Vertical
7566.249	9.17	36.00	39.56	46.53	52.14	74.00	-21.86	Vertical
9441.913	9.66	37.14	37.94	43.33	52.19	74.00	-21.81	Vertical
11486.410	10.91	38.40	38.06	41.77	53.02	74.00	-20.98	Vertical
3598.087	5.90	33.32	40.74	47.42	45.90	74.00	-28.10	Horizontal
4490.048	7.05	35.15	41.40	49.01	49.81	74.00	-24.19	Horizontal
6428.771	8.12	36.20	40.55	48.78	52.55	74.00	-21.45	Horizontal
7566.249	9.17	36.00	39.56	46.80	52.41	74.00	-21.59	Horizontal
8615.126	9.51	36.29	38.65	45.65	52.80	74.00	-21.20	Horizontal
11140.850	10.67	38.47	37.92	41.68	53.90	74.00	-21.10	Horizontal

Test mode:	80	2.11n(HT40)	Test ch	annel:	Lowest	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3561.636	5.85	33.28	40.72	46.24	44.65	74.00	-29.35	Vertical
4629.319	7.22	35.01	41.50	44.43	45.16	74.00	-28.84	Vertical
6611.326	8.18	36.20	40.40	45.75	49.73	74.00	-24.27	Vertical
7880.772	9.29	36.00	39.29	44.46	50.46	74.00	-23.54	Vertical
9562.854	9.67	37.27	37.83	42.55	51.66	74.00	-22.34	Vertical
11027.980	10.59	38.49	37.88	42.09	53.29	74.00	-20.71	Vertical
3747.656	6.11	33.51	40.86	47.93	46.69	74.00	-27.31	Horizontal
5674.896	7.83	35.18	41.20	45.33	47.14	74.00	-26.86	Horizontal
6478.053	8.14	36.26	40.51	45.70	49.59	74.00	-24.41	Horizontal
7781.104	9.26	36.00	39.38	45.31	51.19	74.00	-22.81	Horizontal
9465.979	9.66	37.16	37.91	42.88	51.79	74.00	-22.21	Horizontal
11027.980	10.59	38.49	37.88	42.12	53.32	74.00	-20.68	Horizontal



Report No.: SZEM130700409201 Page: 63 of 98

Test mode:	80	2.11n(HT40)	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3454.486	5.70	33.22	40.63	47.30	45.59	74.00	-28.41	Vertical
4676.696	7.29	34.92	41.54	45.56	46.23	74.00	-27.77	Vertical
6347.466	8.10	36.12	40.63	45.62	49.21	74.00	-24.79	Vertical
7721.909	9.25	36.00	39.43	44.66	50.48	74.00	-23.52	Vertical
8637.084	9.52	36.31	38.64	44.38	51.57	74.00	-22.43	Vertical
10778.210	10.41	38.41	37.77	42.60	53.65	74.00	-20.35	Vertical
3815.033	6.21	33.59	40.90	47.50	46.40	74.00	-27.60	Horizontal
5393.215	7.72	34.78	41.45	46.19	47.24	74.00	-26.76	Horizontal
6921.301	8.39	35.89	40.12	45.26	49.42	74.00	-24.58	Horizontal
7880.772	9.29	36.00	39.29	45.46	51.46	74.00	-22.54	Horizontal
9346.262	9.65	37.01	38.03	43.24	51.87	74.00	-22.13	Horizontal
11370.050	10.84	38.43	38.02	40.74	53.99	74.00	-22.01	Horizontal

Test mode:	80	2.11n(HT40)	Test ch	annel:	Highest	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
3662.775	5.98	33.41	40.79	45.81	44.41	74.00	-29.59	Vertical
4455.890	7.03	35.06	41.37	45.53	46.25	74.00	-27.75	Vertical
5850.919	7.91	35.45	41.06	46.50	48.80	74.00	-25.20	Vertical
7413.726	8.99	35.97	39.69	46.11	51.38	74.00	-22.62	Vertical
9370.083	9.65	37.03	37.99	44.21	52.90	74.00	-21.10	Vertical
10587.850	10.27	38.33	37.69	42.12	53.03	74.00	-20.97	Vertical
3709.691	6.05	33.45	40.83	46.11	44.78	74.00	-29.22	Horizontal
4629.319	7.22	35.01	41.50	44.79	45.52	74.00	-28.48	Horizontal
6428.771	8.12	36.20	40.55	45.56	49.33	74.00	-24.67	Horizontal
7702.278	9.24	36.00	39.44	44.77	50.57	74.00	-23.43	Horizontal
9322.501	9.65	36.99	38.04	43.12	51.72	74.00	-22.28	Horizontal
10999.950	10.56	38.50	37.86	41.86	53.06	74.00	-20.94	Horizontal



Report No.: SZEM130700409201 Page: 64 of 98

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700409201 Page: 65 of 98

#### 5.9 Band Edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 1	5.209 and 15.205		
Test Method:	ANSI C63.10 2009			
Test Site:	Measurement Distance: 3n	n (Semi-Anechoic Chambe	er)	
Limit:	Frequency	Limit (dBuV/m @3m)	Remark	
	30MHz-88MHz	40.0	Quasi-peak Value	
	88MHz-216MHz	43.5	Quasi-peak Value	
	216MHz-960MHz	46.0	Quasi-peak Value	
	960MHz-1GHz	54.0	Quasi-peak Value	
		54.0	Average Value	
	Above 1GHz	74.0	Peak Value	
Test Setup:				

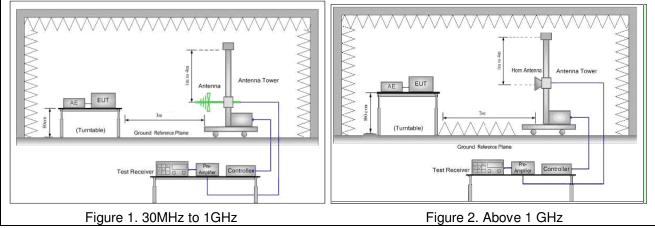



Report No.: SZEM130700409201 Page: 66 of 98


Test Procedure:a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelg. Test the EUT in the lowest channel , the Highest channelh. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case of 802.110; 54Mlops of rate is the worst case of 802.110; 54Mlops of rate is the worst case of 802.110, 115401.Instruments Used:Refer to section 4.10 for detailsTest Results:Pass		
antenna, which was mounted on the top of a variable-height antenna tower.         c.       The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.         d.       For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.         e.       The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.         f.       Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel         g.       Test the EUT in the lowest channel , the Highest channel         h.       The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.         i.       Repeat above procedures until all frequencies measured was complete.         Exploratory Test Mode:       Transmitting mode         Final Test Mode:       Through Pre-scan, 11Mbps of rate is the worst case of 802.11n; HT40).         Instruments Used:       Refer to section 4.10 for details	Test Procedure:	the ground at a 3 meter semi-anechoic camber. The table was rotated
ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelg. Test the EUT in the lowest channel , the Highest channelh. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.i. Repeat above procedures until all frequencies measured was complete.Final Test Mode:Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).Instruments Used:Refer to section 4.10 for details		antenna, which was mounted on the top of a variable-height antenna
and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelg. Test the EUT in the lowest channel , the Highest channelh. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.i. Repeat above procedures until all frequencies measured was complete.Exploratory Test Mode:Trransmitting modeFinal Test Mode:Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).Instruments Used:Refer to section 4.10 for details		ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make
Specified Bandwidth with Maximum Hold Mode.f.Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelg.Test the EUT in the lowest channel , the Highest channelh.The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.i.Repeat above procedures until all frequencies measured was complete.Exploratory Test Mode:Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).Instruments Used:Refer to section 4.10 for details		and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to
Image: state is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).Image: state is the state is the worst case of 802.11n(HT40).Image: state is the state is the worst case of 802.11n(HT40).Image: state is the state is the worst case of 802.11n(HT40).Image: state is the state is the worst case of 802.11n (HT40).Image: state is the state is the worst case of 802.11n (HT40).Image: state is the state is the worst case of 802.11n (HT40).Image: state is the state is the worst case of 802.11n (HT40).Image: state is the state is the worst case of 802.11n (HT40).Image: state is the worst case is the worst case of 802.11n (HT40).Image: state is the worst case is the worst case of 802.11n (HT40).Image: state is the worst case is the worst case of 802.11n (HT40).Image: state is the worst case is the worst case of 802.11n (HT40).Image: state is the worst case is the worst case of 802.11n (HT40).Image: state is the worst case is the worst case of 802.11n (HT40).Image: state is the worst case is the worst case of 802.11n (HT40).		
h.The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.i.Repeat above procedures until all frequencies measured was complete.Exploratory Test Mode:Transmitting modeFinal Test Mode:Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).Instruments Used:Refer to section 4.10 for details		transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for
positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.i. Repeat above procedures until all frequencies measured was complete.Exploratory Test Mode:Transmitting modeFinal Test Mode:Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).Instruments Used:Refer to section 4.10 for details		g. Test the EUT in the lowest channel , the Highest channel
complete.         Exploratory Test Mode:       Transmitting mode         Final Test Mode:       Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).         Instruments Used:       Refer to section 4.10 for details		positioning. And found the X axis positioning which it is worse case,
Final Test Mode:Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).Instruments Used:Refer to section 4.10 for details		
of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n(HT20); 135Mbps of rate is the worst case of 802.11n(HT40).Instruments Used:Refer to section 4.10 for details	Exploratory Test Mode:	Transmitting mode
	Final Test Mode:	of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of
Test Results: Pass	Instruments Used:	Refer to section 4.10 for details
	Test Results:	Pass

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700409201 Page: 67 of 98

# Test plot as follows: Worse case mode: 802.11b Test channel: Lowest Remark: Peak Vertical

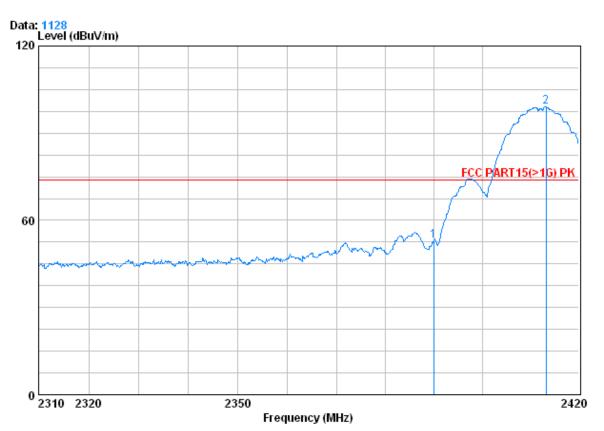

Condition : FCC PART15(>1G) PK 3m VERTICAL

ħ

Job No. : 4092RF


3.4 - 4 -	- 0.4103 A D 4 - 4
Mode	: 2412M Bandedge

1040	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2413.180				57.21 103.28			



Report No.: SZEM130700409201 Page: 68 of 98

Worse case mode:	802.11b	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	---------	---------------	--------	---------	------	------------

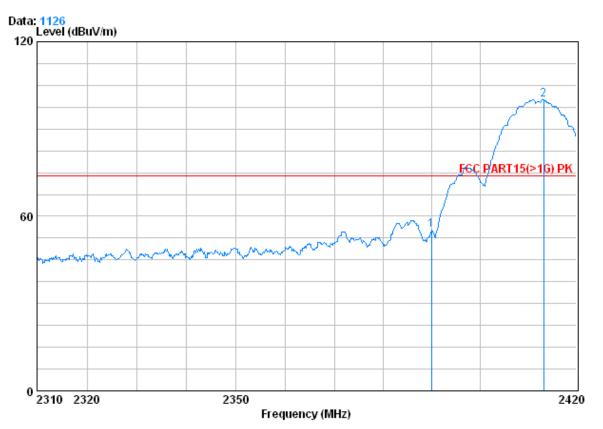

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 4092RF

1 2


Mode : 2412M Bandedge b

-	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
x	2390.000 2413.180							



Report No.: SZEM130700409201 Page: 69 of 98

Worse case mode:   802.11b   Lest channel:   Lowest   Remark:   Average   Vertical	Worse case mode:	802.11b	Test channel:	Lowest	Remark:	Average	Vertical
--	------------------	---------	---------------	--------	---------	---------	----------

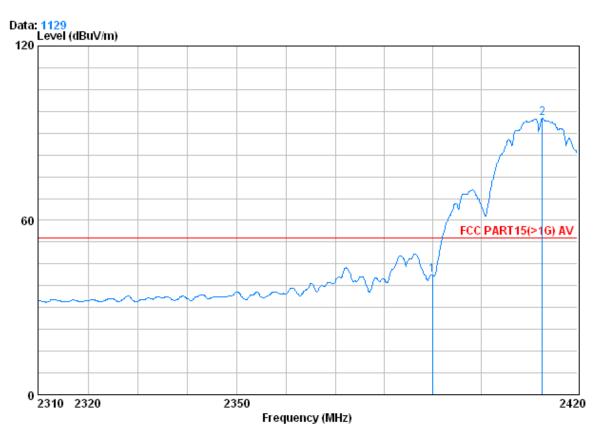

: FCC PART15(>1G) AV 3m VERTICAL Condition Job No. : 4092RF


Mode

Iode	: 2412M Bandedge b								
		CableA	Intenna	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 2 0	2390.000 2412.740	2.98 2.99		39.85 39.86					



Report No.: SZEM130700409201 Page: 70 of 98

Worse case mode:	802.11b	Test channel:	Lowest	Remark:	Average	Horizontal	
------------------	---------	---------------	--------	---------	---------	------------	--

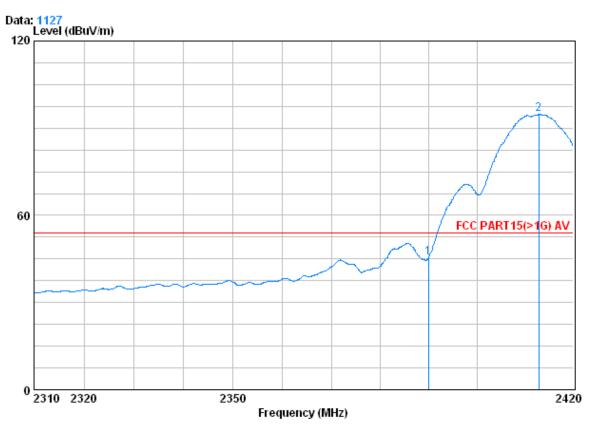

Condition : FCC PART15(>1G) AV 3m HORIZONTAL


Job No. : 4092RF Mode : 2412M Bandedge b

lođe	:24121M Bandedge 6 Freq			Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2412.850			39.85 39.86				-8.48 40.67



Report No.: SZEM130700409201 Page: 71 of 98

Worse case mode:	802.11b	Test channel:	Highest	Remark:	Peak	Vertical	
------------------	---------	---------------	---------	---------	------	----------	--

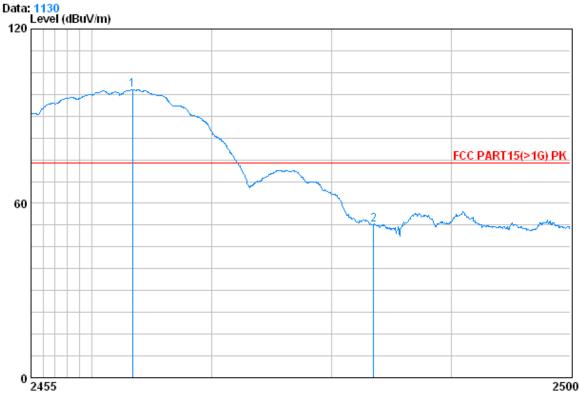

Frequency (MHz)

3.02 32.64 39.91 103.34 99.09

3.03 32.67 39.92 56.91 52.69 74.00 -21.31

Over Limit

dB

74.00 25.09

Condition : FCC PART15(>1G) PK 3m VERTICAL

2463.415

2483.500

Job No. : 4092RF Mo

1 X


2

lode	: 2462M Bandedge b	Cable <i>i</i>	Intenna	Preamp	Read		Limit
	Freq	Loss	Factor	Factor	Level	Level	Line
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m



Report No.: SZEM130700409201 Page: 72 of 98

Worse case mode: 802.11b	Test channel:	Highest	Remark:	Peak	Horizontal
--------------------------	---------------	---------	---------	------	------------

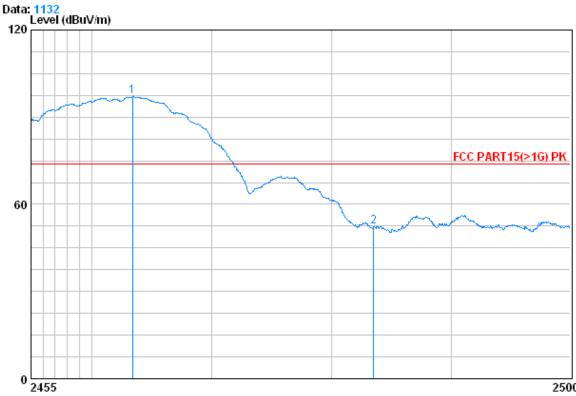

Frequency (MHz)

2500

Condition : FCC PART15(>1G) PK 3m HORIZONTAL


Job No. : 4092RF Mo

Iode	:2462M Bandedge b Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2	2463.415 2483.500			39.91 39.92				



Report No.: SZEM130700409201 Page: 73 of 98

Worse case mode: 802.11b Test channel:	Highest Remark:	Average Vertical	
--	-----------------	------------------	--

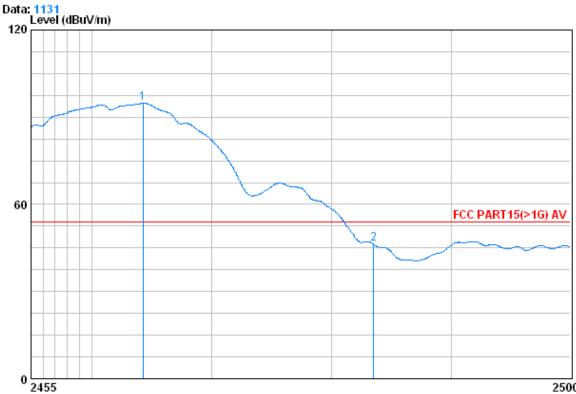

Frequency (MHz)

2500

Condition : FCC PART15(>1G) AV 3m VERTICAL


Job No. : 4092RF Μ

Iode	: 2462M Bandedge b							
		Cablei	lntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2464 270	2 02	22 64	20.01		04 00	F4 00	40.00
10	2464.270	3.02	32.04	39.91	99.07	94.84	54.00	40.82
2	2483.500	3.03	32.67	39.92	50.55	46.33	54.00	-7.67



Report No.: SZEM130700409201 Page: 74 of 98

Worse case mode:	802.11b	Test channel:	Highest	Remark:	Average	Horizontal
------------------	---------	---------------	---------	---------	---------	------------

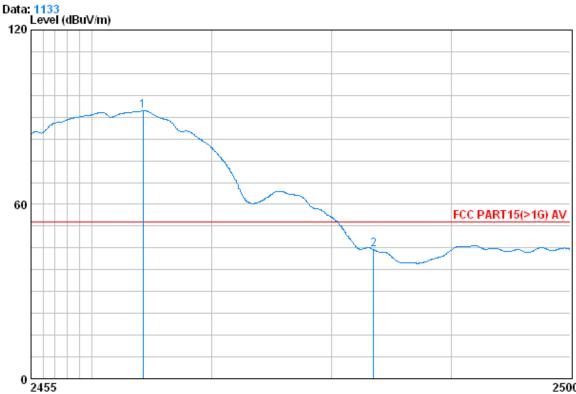

Frequency (MHz)

2500

Condition : FCC PART15(>1G) AV 3m HORIZONTAL


Job No. : 4092RF · 2462NI Dondodas h Mode

lode	: 2462IVI Bandedge b Freq			Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2464.270 2483.500			39.91 39.92				38.20 -9.53



Report No.: SZEM130700409201 Page: 75 of 98

Worse case mode:	802.11g	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	---------	---------------	--------	---------	------	----------

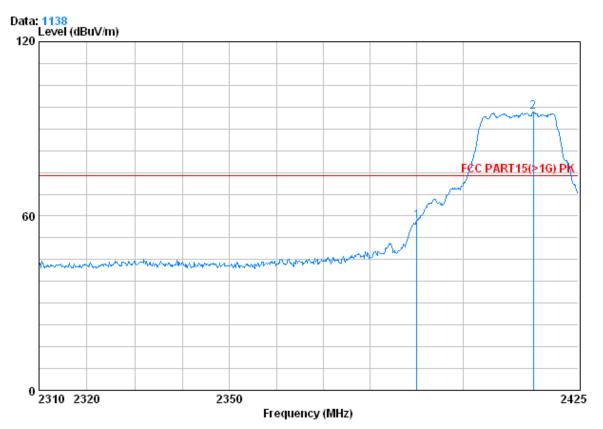

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 4092RF


Mode : 2412M Bandedge g

	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2415.225			39.85 39.86				



Report No.: SZEM130700409201 Page: 76 of 98

Worse case mode:	802.11g	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	---------	---------------	--------	---------	------	------------

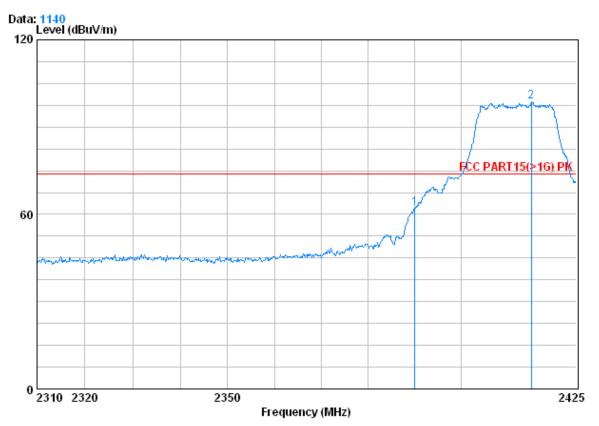

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 4092RF


Mode	: 2412M Bandedge g
------	--------------------

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2415.225			39.85 39.86				



Report No.: SZEM130700409201 Page: 77 of 98

Worse case mode: 802.11g	Test channel:	Lowest	Remark:	Average	Vertical	
--------------------------	---------------	--------	---------	---------	----------	--

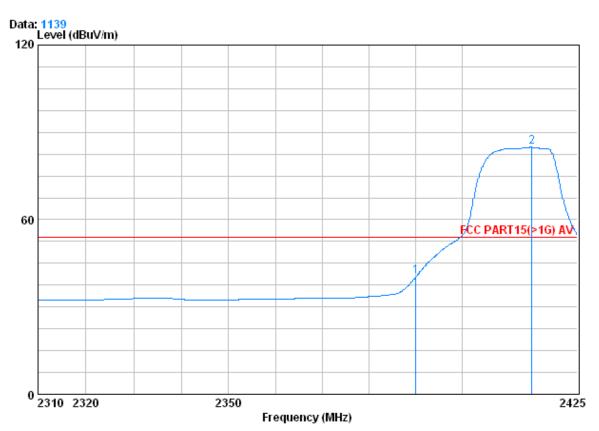

Condition : FCC PART15(>1G) AV 3m VERTICAL


Job No. : 4092RF Mode : 2412M B

lode	: 2412M Bandedge g	Cable <i>l</i>	Intenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 20	2390.000 2415.110			39.85 39.86				



Report No.: SZEM130700409201 Page: 78 of 98

Worse case mode:	802.11g	Test channel:	Lowest	Remark:	Average	Horizontal	1
------------------	---------	---------------	--------	---------	---------	------------	---

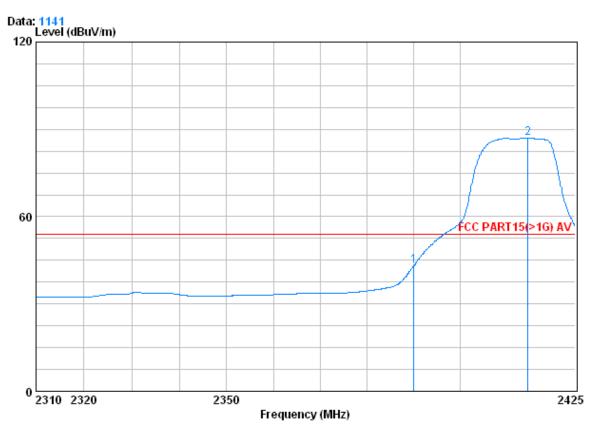

Condition : FCC PART15(>1G) AV 3m HORIZONTAL 4.4


Job No. : 4092RF 241284 10 Mode

lode	: 2412M Bandedge g	Cable	Intenna	Preamp	Read		Limit	Over
	Freq			Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2414.650			39.85 39.86				



Report No.: SZEM130700409201 Page: 79 of 98

Worse case mode:	802.11g	Test channel:	Highest	Remark:	Peak	Vertical
------------------	---------	---------------	---------	---------	------	----------

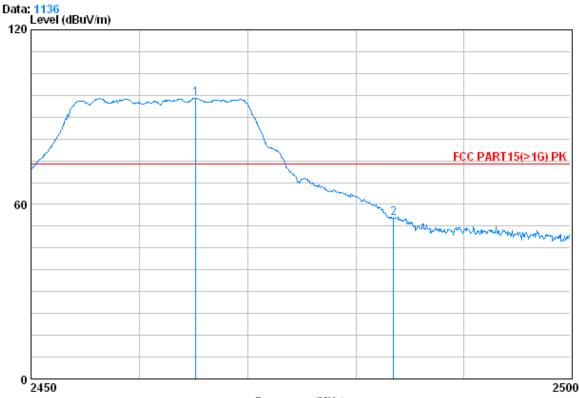

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m VERTICAL


Job No. : 4092RF Mode : 2462M Bandedge g

.oa	e	: 2402IVI Bandedge g		Antenna	-	Read		Limit	Over
		Freq				Level			Limit
		MHz	dB	dB/m		dBuV	•		dB
1	X	2465.150	3.02	32.64	39.91	100.75	96.51	74.00	22.51
2		2483.500	3.03	32.67	39.92	59.39	55.17	74.00	-18.83



Report No.: SZEM130700409201 Page: 80 of 98

Worse case mode:	802.11g	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	---------	---------------	---------	---------	------	------------

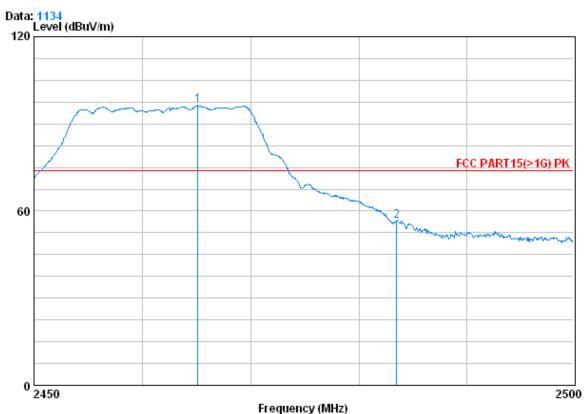

Condition : FCC PART15(>1G) PK 3m HORIZONTAL : 4092RF


Job No. м

/lode	е	: 2462M Bandedge g							
			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	x	2465.100	3.02	32.64	39.91	100.55	96.30	74.00	22.30
2		2483.500	3.03	32.67	39.92	60.93	56.71	74.00	-17.29



Report No.: SZEM130700409201 Page: 81 of 98

Worse case mode: 802.	.11g Test channel:	Highest	Remark:	Average	Vertical	
-----------------------	--------------------	---------	---------	---------	----------	--

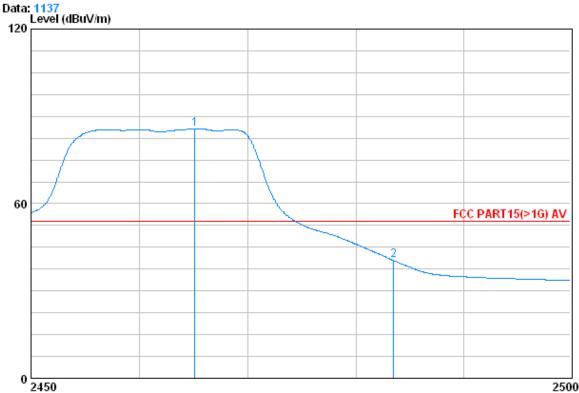

Frequency (MHz)

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 4092RF


Mode	: 2462M Bandedge g
------	--------------------

	Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2465.100 2483.500			39.91 39.92				



Report No.: SZEM130700409201 Page: 82 of 98

Worse case mode:	802.11g	Test channel:	Highest	Remark:	Average	Horizontal
------------------	---------	---------------	---------	---------	---------	------------

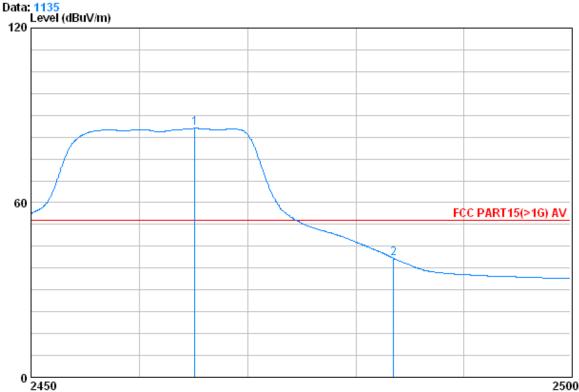

Frequency (MHz)

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 4092RF


			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	0	2465.100	3.02	32.64	39.91	89.77	85.52	54.00	31.52
2		2483.500	3.03	32.67	39.92	45.14	40.92	54.00	-13.08



Report No.: SZEM130700409201 Page: 83 of 98

74.00 19.60

Worse case mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	---------------	---------------	--------	---------	------	----------

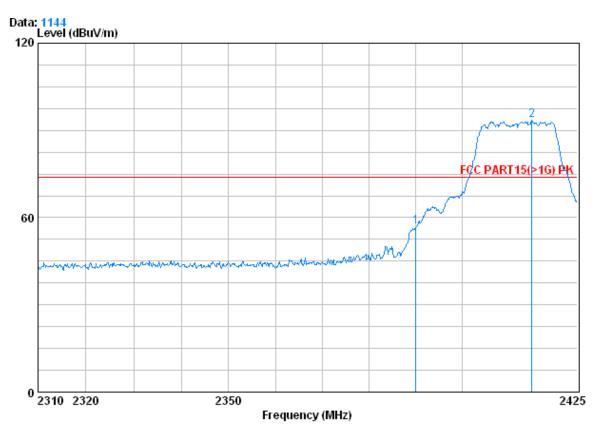

Condition : FCC PART15(>1G) PK 3m VERTICAL Job No. : 4092RF

2415.110

Mode

1

2 X

е	: 2412M Bandedge N 20							
		Cablei	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2390.000	2.98	32.51	39.85	61.16	56.81	74.00	-17.19


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2.99 32.54 39.86 97.93 93.60



Report No.: SZEM130700409201 Page: 84 of 98

Worse case mode: 802.11n (HT20	Test channel: Lowest	Remark: Peak	Horizontal
--------------------------------	----------------------	--------------	------------

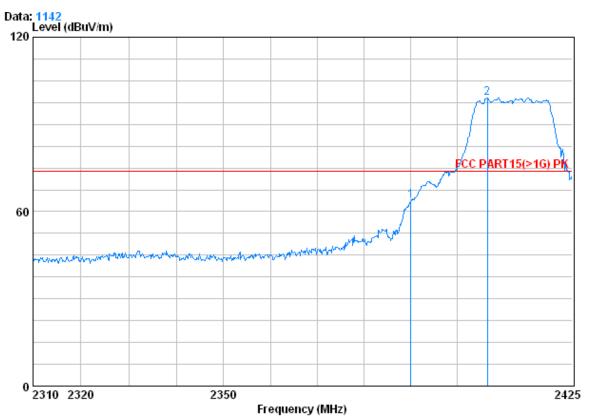

Condition : FCC PART15(>1G) PK 3m HORIZONTAL Job No. : 4092RF

Mode


: 2412M Bandedge N 20

	Freq			Preamp Factor			Limit Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2406.485						74.00 74.00	



Report No.: SZEM130700409201 Page: 85 of 98

Worse case mode:	802.11n (HT20)	Test channel:	Lowest	Remark:	Average	Vertical	
------------------	----------------	---------------	--------	---------	---------	----------	--

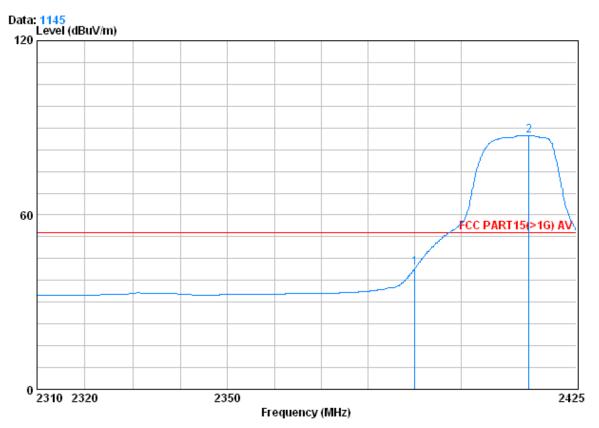

Condition : FCC PART15(>1G) AV 3m VERTICAL

Mode : 2412M Bandedge N 20


	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2414.650			39.85 39.86				

Job No. : 4092RF



Report No.: SZEM130700409201 Page: 86 of 98

Worse case mode: 802	2.11n (HT20) Test channe	el: Lowest Rem	ark: Average	Horizontal
----------------------	--------------------------	----------------	--------------	------------

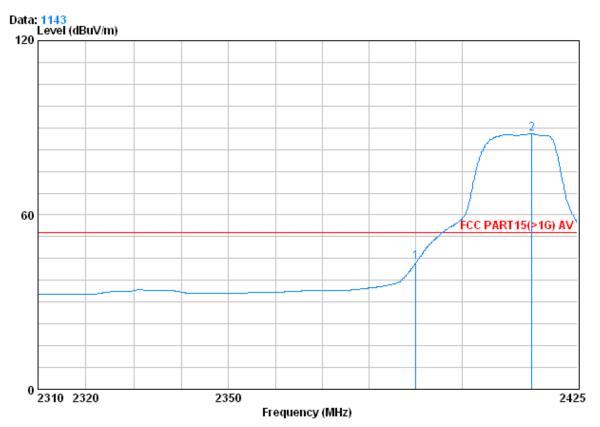

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

ie : 2412M Bandedge N 2	0
-------------------------	---


	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2415.110			39.85 39.86				

Job No. : 4092RF Mod



Report No.: SZEM130700409201 Page: 87 of 98

Worse case mode:	802.11n (HT20)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	----------------	---------------	---------	---------	------	----------

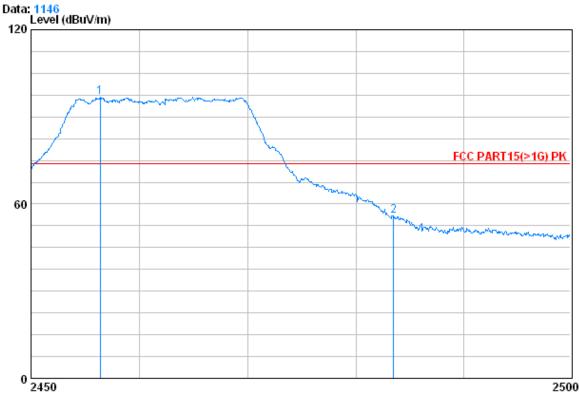

Frequency (MHz)

Condition : FCC PART15(>1G) PK 3m VERTICAL

: 4092RF Job No.


: 2462M Bandedge N 20 Mode

		Freq		Antenna Factor	-			Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	х	2456.350 2483.500		32.64 32.67					



Report No.: SZEM130700409201 Page: 88 of 98

Worse case mode:	802.11n (HT20)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	----------------	---------------	---------	---------	------	------------

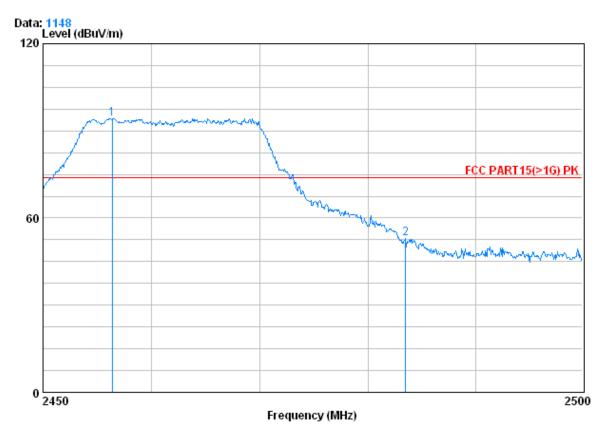

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 4092RF


Mode : 2462M Bandedge N 20

	-	Freq	Cable.		Preamp Factor				
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	Х	2456.350 2483.500			39.91 39.92				



Report No.: SZEM130700409201 Page: 89 of 98

Worse case mode: 80	302.11n (HT20)	Test channel:	Highest	Remark:	Average	Vertical
---------------------	----------------	---------------	---------	---------	---------	----------

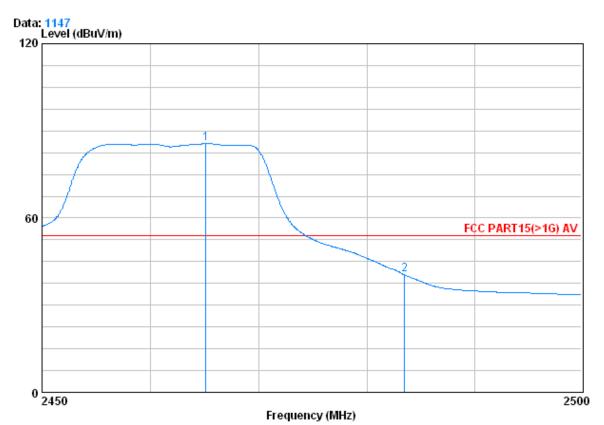

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 4092RF


Mode : 2462M Bandedge N 20

1040	Freq	Cablei		Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2465.100 2483.500			39.91 39.92				



Report No.: SZEM130700409201 Page: 90 of 98

Worse case mode:	802.11n (HT20)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	----------------	---------------	---------	---------	---------	------------

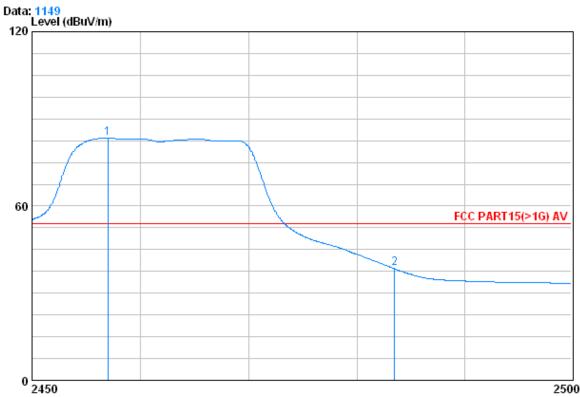

Frequency (MHz)

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

: 4092RF Job No.


Mode	: 2462M Bandedge N 20
------	-----------------------

		Freq			Preamp Factor				
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	-	2456.950 2483.500			39.91 39.92				



Report No.: SZEM130700409201 Page: 91 of 98

Worse case mode:	802.11n (HT40)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	----------------	---------------	--------	---------	------	----------

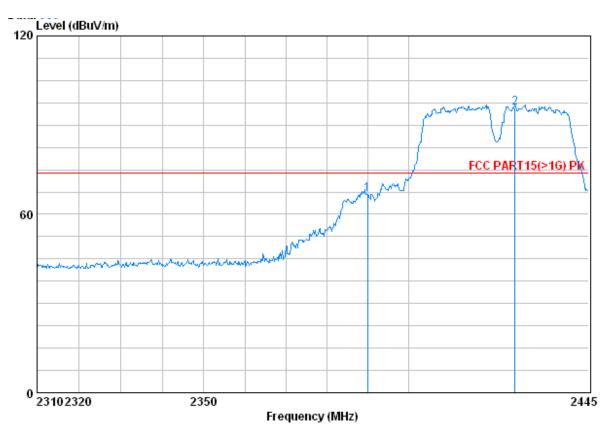


Condition : FCC PART15(>1G) PK 3m VERTICAL Job : 4092RF

model:	: N40 2422 Bandedge
--------	---------------------

	Freq		Antenna Factor	-			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 X	2390.000 2426.505						74.00 74.00	



Report No.: SZEM130700409201 Page: 92 of 98

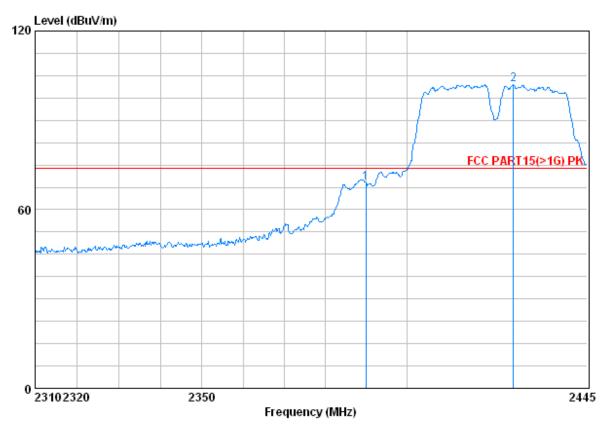


Condition : FCC PART15(>1G) PK 3m HORIZONTAL Job : 4092RF model: : N40 2422 Bandedge

iodel:	: 1440 2422 Bandedge Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2426.505						74.00 74.00	



Report No.: SZEM130700409201 Page: 93 of 98

Worse case mode:	802.11n (HT40)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	----------------	---------------	--------	---------	---------	----------

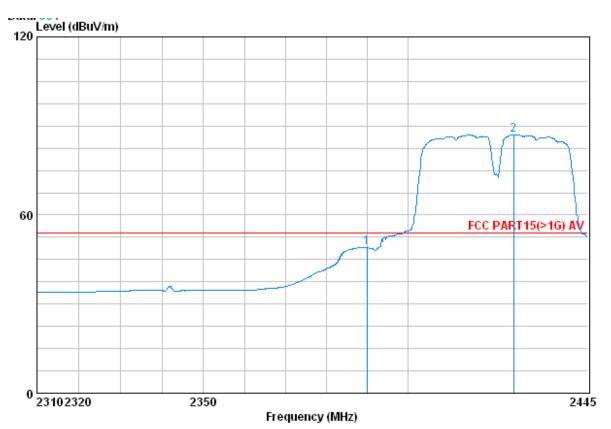


Condition : FCC PART15(>1G) AV 3m VERTICAL : 4092RF Job


model:

							: N40 2422 Bandedge	odel:
Over	Limit		Read	Preamp	lntenna	Cable		
Limit	Line	Level	Level	Factor	Factor	Loss	Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	
-4.93 33.03	54.00 54.00		53.43 91.33	39.85 39.88		2.98 3.00	2390.000 2426.370	1 20



Report No.: SZEM130700409201 Page: 94 of 98



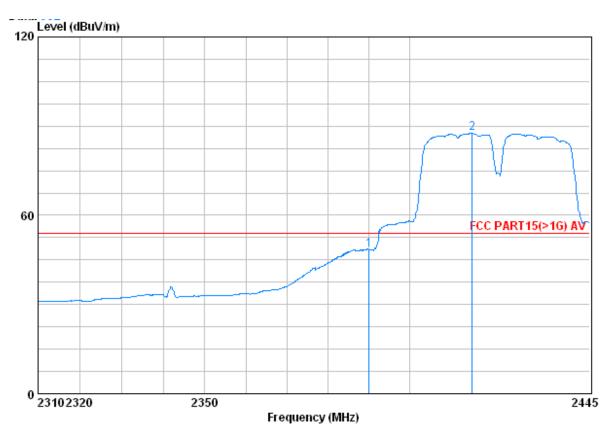



Condition : FCC PART15(>1G) AV 3m HORIZONTAL Job : 4092RF model: : N40 2422 Bandedge

JUEI.	. N40 2422 Bandeuge Freq		Antenna Factor	Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 20	2390.055 2415.570			39.85 39.88				



Report No.: SZEM130700409201 Page: 95 of 98



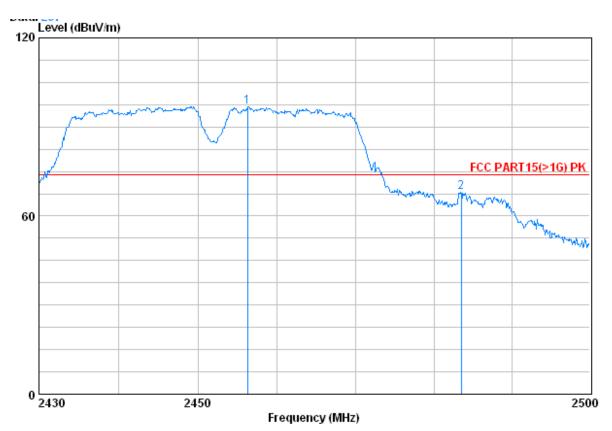

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job : 4092RF


model:	: N40 2452 Bandedge
--------	---------------------

	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2456.250 2483.500						74.00 74.00	



Report No.: SZEM130700409201 Page: 96 of 98



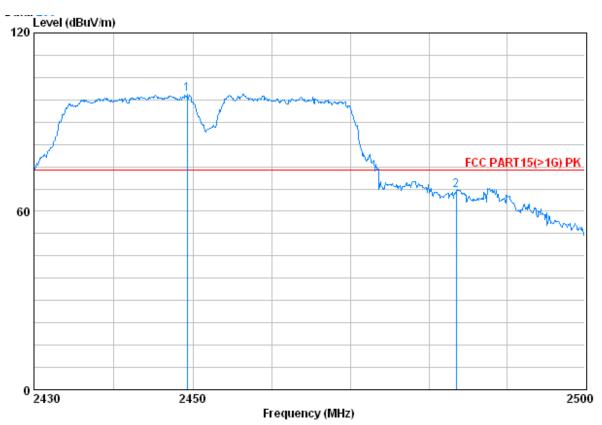


Condition : FCC PART15(>1G) PK 3m HORIZONTAL : 4092RF Job


:N40
:N40

odel:	:N40 2452 Bandedge Freq		Intenna Factor	-	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2449.250 2483.500				103.67 71.36			25.39 -6.86



Report No.: SZEM130700409201 Page: 97 of 98



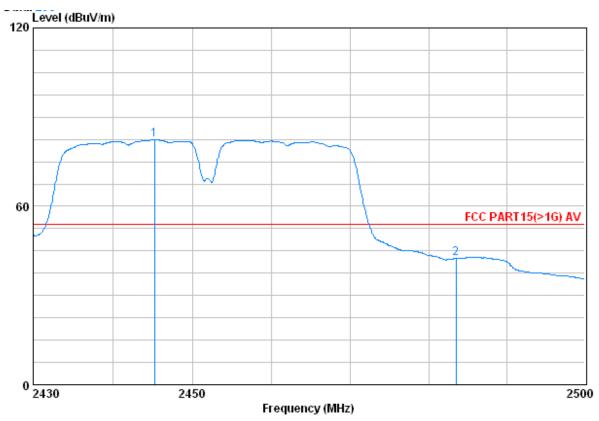


Condition : FCC PART15(>1G) AV 3m VERTICAL Job : 4092RF

model:

Over	Limit		Read	Preamp	Intenna	Cablei	: N40 2452 Bandedge	odel:
Limit	Line	Level	Level	Factor	Factor	Loss	Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	
	54.00 54.00			39.89 39.92		3.01 3.03	2445.260 2483.500	10 2



Report No.: SZEM130700409201 Page: 98 of 98

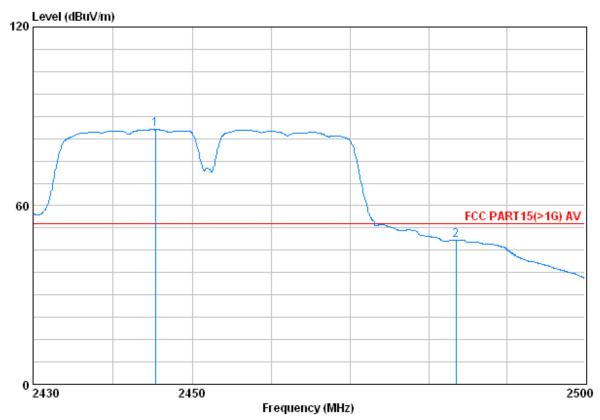

Condition : FCC PART15(>1G) AV 3m HORIZONTAL Job : 4092RF model: : N40 2452 Bandedge

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2445.330 2483.500			39.89 39.92				

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor