




## Device label

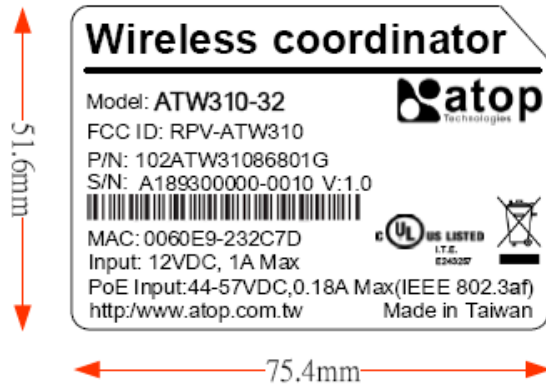

Arial Unicode MS:14p粗體

## Wireless coordinator

Arial Unicode MS:8pt粗體

ATW310-32

Arial Unicode MS:7pt

Model:  
P/N: 102ATW31086801G  
S/N: A189300000-0010  
MAC: 0060E9-232C7D  
Input: 12VDC, 1A Max  
PoE Input: 44-57VDC, 0.18A Max (IEEE 802.3af)  
Made in Taiwan  
<http://www.atop.com.tw>



Arial Unicode MS:14p粗體

## Wireless coordinator

Arial Unicode MS:8pt粗體


ATW310-31

Arial Unicode MS:7pt

Model:  
P/N: 102ATW31086801G  
S/N: A189300000-0010  
MAC: 0060E9-232C7D  
Input: 12VDC, 1A Max  
Made in Taiwan

## Device label location

Front

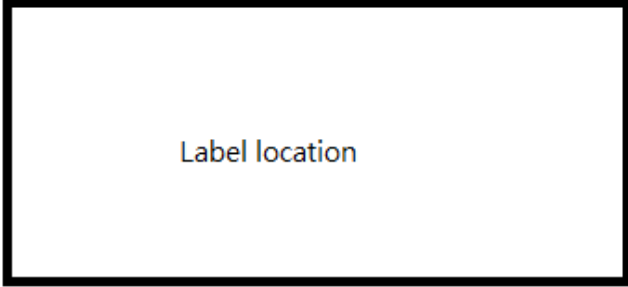A diagram showing a large outer rectangle and a smaller inner rectangle. The inner rectangle is centered within the outer one. The text "Label location" is centered within the inner rectangle.

Label location