



# FCC 47 CFR PART 15 SUBPART C TEST REPORT

For

**Product Name: Mobile Phone**

**Brand Name: HYUNDAI**

**Model No.: D205**

**FCC ID: RQQHLT-D205**

**Test Report Number:**

**C140224R02-RPB**

Issued for

**HYUNDAI CORPORATION**

**140-2, GYE-DONG, JONGNO-GU, SEOUL, 110-793, KOREA**

Issued by

**Compliance Certification Services Inc.**

**Kun shan Laboratory**

**No.10 Weiye Rd., Innovation park, Eco&Tec,  
Development Zone, Kunshan City, Jiangsu, China**

**TEL: 86-512-57355888**

**FAX: 86-512-57370818**



TESTING CERT #2541.01

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.



## TABLE OF CONTENTS

<b>1</b>	<b>TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2</b>	<b>EUT DESCRIPTION .....</b>	<b>5</b>
<b>3</b>	<b>TEST METHODOLOGY .....</b>	<b>6</b>
	3.1 EUT CONFIGURATION .....	6
	3.2 EXERCISEEUT .....	6
	3.3 GENERAL TEST PROCEDURES .....	6
	3.4 TEST MODE.....	7
	3.5 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	8
<b>4</b>	<b>INSTRUMENT CALIBRATION .....</b>	<b>9</b>
<b>5</b>	<b>FACILITIES AND ACCREDITATIONS.....</b>	<b>9</b>
	5.1 FACILITIES.....	9
	5.2 EQUIPMENT.....	9
	5.3 LABORATORY ACCREDITATIONS AND LISTING .....	9
	5.4 TABLE OF ACCREDITATIONS .....	10
	5.5 LIST OF MEASURING EQUIPMENT .....	11
	5.6 SETUP CONFIGURATION .....	12
	5.7 SUPPORT EQUIPMENT .....	12
<b>6</b>	<b>FCC PART 15.247 REQUIREMENTS .....</b>	<b>13</b>
	6.1 PEAK POWER.....	13
	6.2 PEAK POWER SPECTRAL DENSITY .....	18
	6.3 HOPPING CHANNEL BANDWIDTH .....	19
	6.4 HOPPING CHANNEL SEPARATION.....	24
	6.5 NUMBER OF HOPPING FREQUENCY .....	27
	6.6 TIME OF OCCUPANCY (DWELL TIME) .....	30
	6.7 SPURIOUS EMISSION.....	35
	6.8 RADIATED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT .....	42
	6.9 POWERLINE CONDUCTED EMISSIONS .....	53



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(1)	Number of Channels	≥ 15Channels	Pass
3.2	15.247(a)(1)	Hopping Channel Separation	≥2/3 of 20dB BW	Pass
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤0.4sec in 31.6sec period	Pass
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass
3.2	15.247(d)	Peak Output Power	≤ 1W for 1Mbps ≤125mW for 2,3Mbps	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) &15.247(d)	Pass
3.6	15.207	AC Conducted Emission	15.207(a)	Pass
3.7	15.203 &15.247(b)	Antenna Requirement	N/A	Pass



## 1 TEST RESULT CERTIFICATION

<b>Product Name:</b>	Mobile Phone
<b>Trade Name:</b>	HYUNDAI
<b>Model Name.:</b>	D205
<b>Series Model:</b>	N/A
<b>Applicant Discrepancy:</b>	Initial
<b>Device Category:</b>	Production unit
<b>Date of Test:</b>	February 28, 2014
<b>Applicant:</b>	<b>HYUNDAI CORPORATION</b> 140-2, GYE-DONG, JONGNO-GU, SEOUL, 110-793, KOREA
<b>Manufacturer:</b>	<b>WASAM TECHNOLOGY (SHEN ZHEN) CO.,LTD.</b> B,F Building, (Hengqiang Industrial Park), Bogang Taifeng Industrial Zone, Shajing Town, Bao'an District, Shenzhen, China
<b>Application Type:</b>	Certification

### APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

**Tested by:**

Jeff.Fang  
RF Manager  
Compliance Certification Services Inc.

Blent.Wang  
Test Engineer  
Compliance Certification Services Inc.



## 2 EUT DESCRIPTION

<b>Product Name:</b>	Mobile Phone
<b>Trade Name:</b>	HYUNDAI
<b>Model Name.:</b>	D205
<b>Model Discrepancy:</b>	N/A
<b>Power Adapter Power Rating :</b>	Power supply and ADP(rating): Brand:HYUNDAI Model:D205 INPUT:AC100~300V 50/60Hz 0.15A OUTPUT:5.0V --- 500mA Battery(rating): Model:D205 Capacitance:3.7V 800mAh
<b>Frequency Range :</b>	Bluetooth:2402 ~ 2480 MHz
<b>Transmit Power :</b>	7.64dBm(5.81mW)
<b>Modulation Technique :</b>	FHSS
<b>Transmit Data Rate :</b>	GFSK(1 Mbps), $\pi$ /4-DQPSK(2 Mbps),8-DPSK(3 Mbps)
<b>Number of Channels :</b>	79 Channels
<b>Antenna Specification :</b>	PCB Antenna
<b>Antenna Specification:</b>	2.13 dBi

### Remark:

1. This submittal(s) (test report) is intended for **FCC ID: RQQHLT-D205** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



## 3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 3.2 EXERCISE EUT

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 3.3 GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



## 3.4 TEST Mode

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
Peak Output Power	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
Hopping Channel Bandwidth	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
Hopping Channel Separation	GFSK	1 Mbps	38-39	1
	8DPSK	3 Mbps		
Number of Hopping Frequency	GFSK	1 Mbps	0-78	1
	8DPSK	3 Mbps		
Dwell Time	DH1/DH3/DH5	1 Mbps	39	1
	3DH1/3DH3/3DH5	3 Mbps		
Spurious Emission	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
Band Edge Emissions	GFSK	1 Mbps	0/78	1
	8DPSK	3 Mbps		
Radiated Emissions Below 1GHz	GFSK	1 Mbps	78	1
Radiated Emissions Above 1GHz	GFSK	1 Mbps	0/39/78	1
	8DPSK	3 Mbps		
AC Power Conducted Emissions	CTX	-	-	-

Remark: For radiated test cases below 1 GHz, the worst mode data rate channel 78 of 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests.



## 3.5 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.0900 - 0.1100	16.420 - 16.423	399.9 - 410.0	4.50 - 5.15
0.4950 - 0.505 <sup>(1)</sup>	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960.0 - 1240	7.25 - 7.75
4.1250 - 4.1280	25.50 - 25.67	1300 - 1427	8.025 - 8.500
4.17725 - 4.17775	37.50 - 38.25	1435.0 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73.0 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.2150 - 6.2180	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108.00 - 121.94	1718.8 - 1722.2	13.25 - 13.40
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.50
8.2910 - 8.2940	149.90 - 150.05	2310 - 2390	15.35 - 16.20
8.3620 - 8.3660	156.52475 - 156.52525	2483.5 - 2500.0	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.1700	3260 - 3267	23.6 - 24.0
12.2900 - 12.2930	167.72 - 173.20	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345 - 3358	36.43 - 36.5 <sup>(2)</sup>
12.57675 - 12.57725	322.0 - 335.4	3600 - 4400	
13.3600 - 13.4100			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.





## 4 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards, facilities and accreditations

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC5743 for 10m chamber 10m, IC5743 for 10m chamber 3m.



## 5.4 TABLE OF ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

<b>Taiwan</b>	TAF
<b>USA</b>	A2LA

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>Canada</b>	Industry Canada
<b>Japan</b>	VCCI
<b>Taiwan</b>	BSMI
<b>USA</b>	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



## 5.5 LIST OF MEASURING EQUIPMENT

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	RS	FSU26	200789	2014-6-30
Bluetooth Tester	RS	CBT	100189	N.C.R
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2014-3-14
Peak and Avg Power Sensor	Agilent	E9327A	US40441788	2014-3-14
EPM-P Series Power Meter	Agilent	E4416A	GB41292714	2014-3-14
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R
DC POWER SUPPLY	AGILENT	E3632A	MY50340053	2014-3-14
Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	2015-1-23
Test Software	EZ-EMC			

977 Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2014-4-16
Pre-Amplifier	MITEQ	JS41-00101800-32-10P	1675713	2014-10-7
Pre-Amplifier	MITEQ	NSP400-NF	870731	2014-4-26
Bilog Antenna	Sunol Sciences	JB1	A062604	2014-5-2
Horn-antenna	SCHWARZBECK	BBHA9120D	D:267	2014-4-28
Turn Table	CT	CT123	4165	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R
Controller	CT	CT100	95637	N.C.R
Test Software	EZ-EMC			

Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER	R&S	ESCI3	100781	2014-3-14
V (V-LISN)	Schwarzbeck	NNLK 8129	8129-143	2014-3-14
LISN (EUT)	FCC	FCC-LISN-50/250-50-2-02	SN:05012	2014-3-14
TRANSIENT LIMITER	SCHAFFNER	CFL9206	1710	2014-3-14
Test Software	EZ-EMC			

**Remark:** Each piece of equipment is scheduled for calibration once a year.



## 5.6 SETUP CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

## 5.7 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	N/A	N/A	N/A	N/A	N/A

### Remark:

- 1.All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2.Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 6 FCC PART 15.247 REQUIREMENTS

### 6.1 PEAK POWER


#### Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### Test Configuration

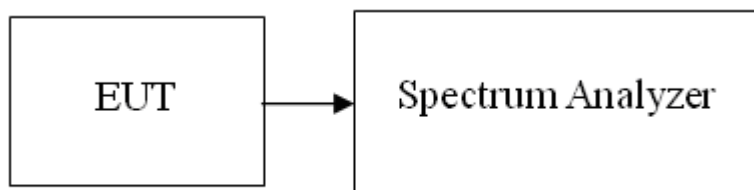

#### Test Procedure

The transmitter output is connected to the spectrum analyzer. Set the RBW = 3MHz , VBW = 3MHz, Detector = Peak, Trace mode = max hold, Sweep = auto couple. Record the max reading.

Repeat the above procedure until the measurements for all frequencies are completed.



## Test Results

*No non-compliance noted*

### Test RESULTS

#### 1M GFSK Modulation mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2402	7.60	5.75	125	PASS
Mid	2441	<b>7.64</b>	5.81		PASS
High	2480	7.41	5.51		PASS

#### 3M 8-DPSK Modulation mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2402	6.74	4.72	125	PASS
Mid	2441	6.84	4.83		PASS
High	2480	6.57	4.54		PASS




## Test Data 1M

### Ch low

Agilent

R T

Mkr1 2.401 983 GHz  
7.60 dBm

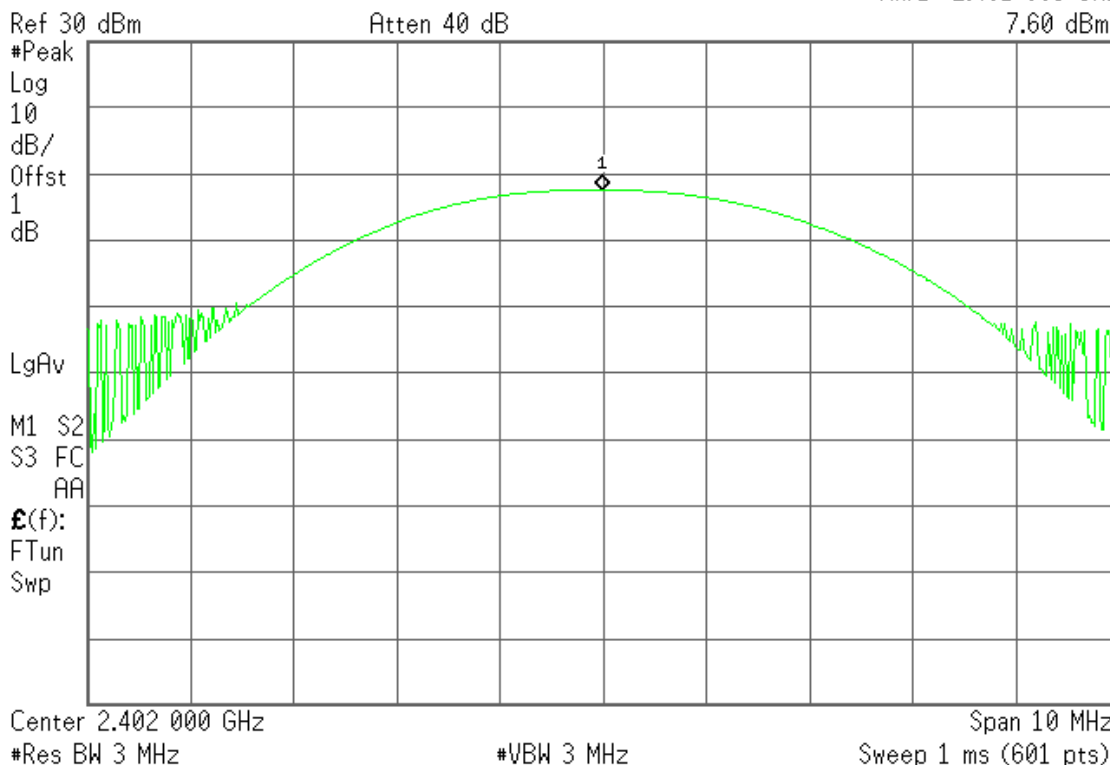


### CH Mid

Agilent

R T

Mkr1 2.441 050 GHz  
7.64 dBm

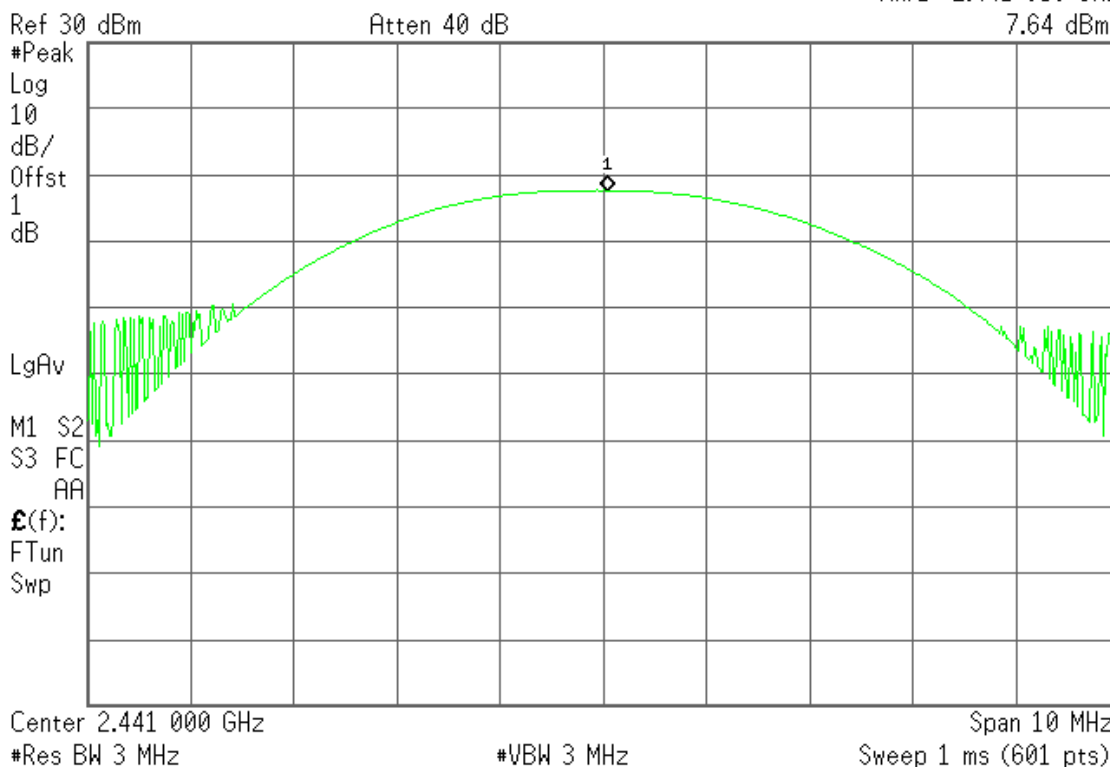




## CH High

Agilent

R T

Mkr1 2.480 000 GHz  
7.41 dBm

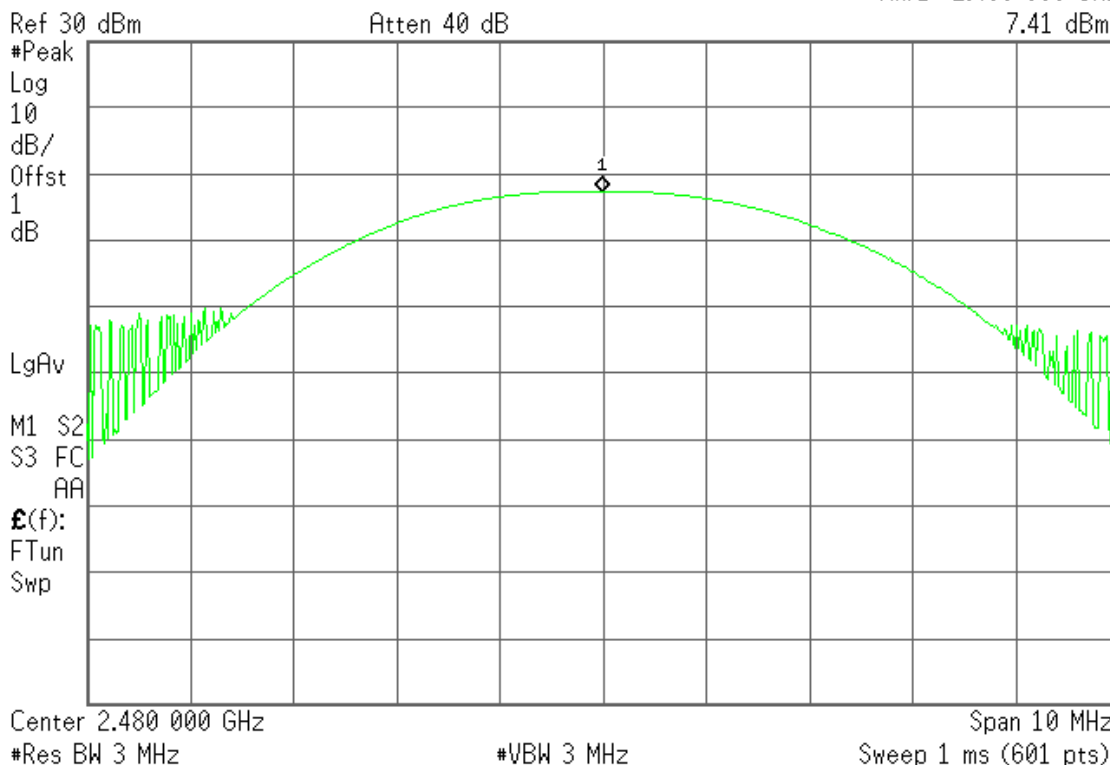


## Test Data 3M

### Ch low

Agilent

R T

Mkr1 2.402 000 GHz  
6.74 dBm

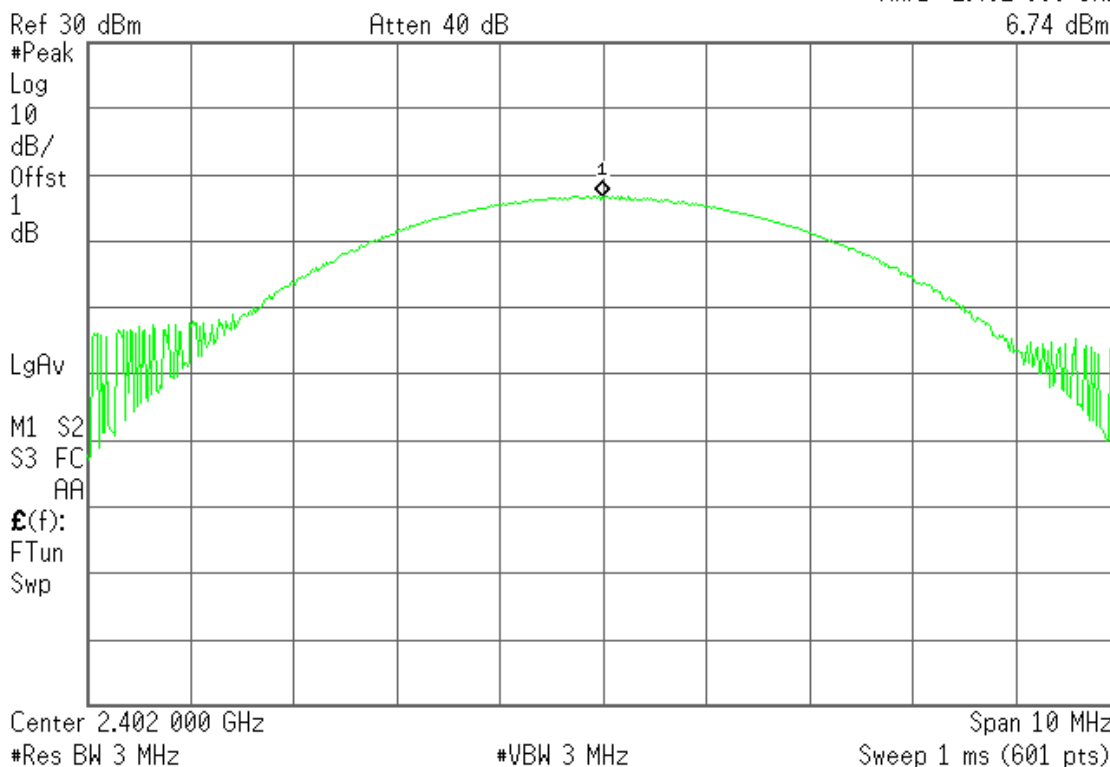






## Ch mid

Agilent

R T

Mkr1 2.440 900 GHz  
6.84 dBm

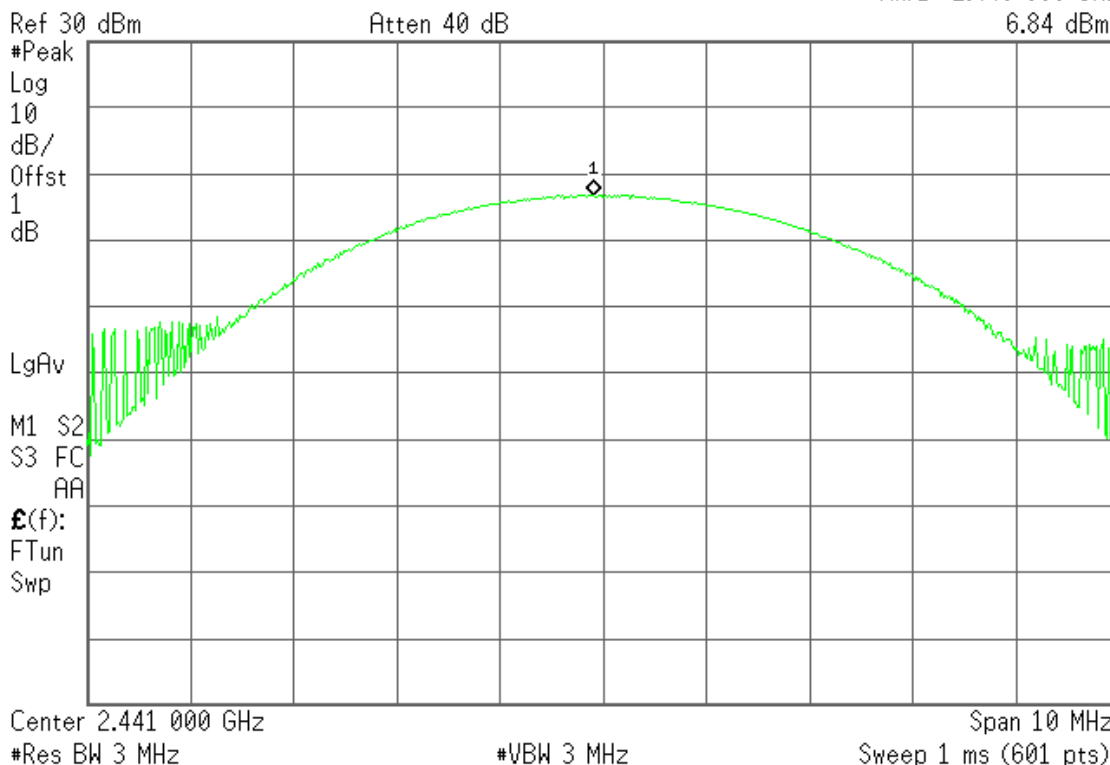


## Ch High

Agilent

R T

Mkr1 2.480 083 GHz  
6.57 dBm

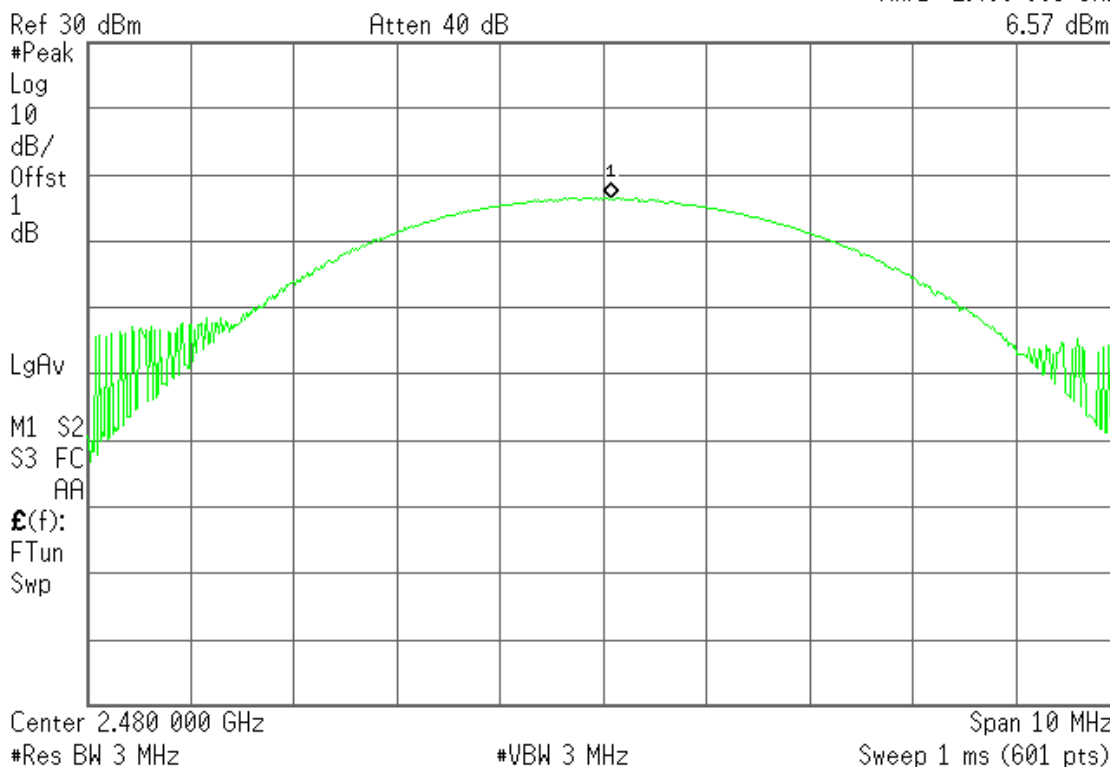




## 6.2 PEAK POWER SPECTRAL DENSITY

### Limit

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration



### Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

### Test Results

NA (this test item is not required for FHSS modulation technical)




## 6.3 HOPPING CHANNEL BANDWIDTH

### Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Configuration



### Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 30kHz, VBW = 300kHz, Span = 2MHz, Sweep = auto.
4. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.



## Test Results of Bandwidth

*No non-compliance noted*

Operation Mode:	1 Mbps	Test Date:	February 28, 2014
Temperature:	24°C	Tested by:	Blent.Wang

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
00	2402	0.833
39	2441	0.829
78	2480	0.840

Operation Mode:	3 Mbps	Test Date:	February 28, 2014
Temperature:	24°C	Tested by:	Blent.Wang

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
00	2402	1.162
39	2441	1.162
78	2480	1.167




## Test Plot

### 1M Channel 00

\* Agilent

R T

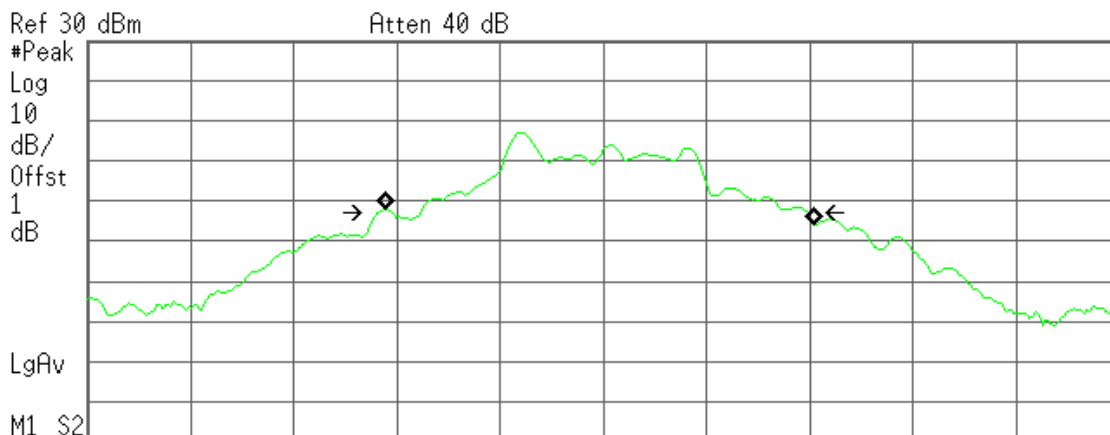

Center 2.402 000 GHz

Span 2 MHz

#Res BW 30 kHz

#VBW 300 kHz

Sweep 2.08 ms (601 pts)

Occupied Bandwidth  
833.7451 kHz


Occ BW % Pwr 99.00 %  
x dB -20.00 dB

Transmit Freq Error -5.563 kHz  
x dB Bandwidth 832.877 kHz

### 1M Channel 39

\* Agilent

R T

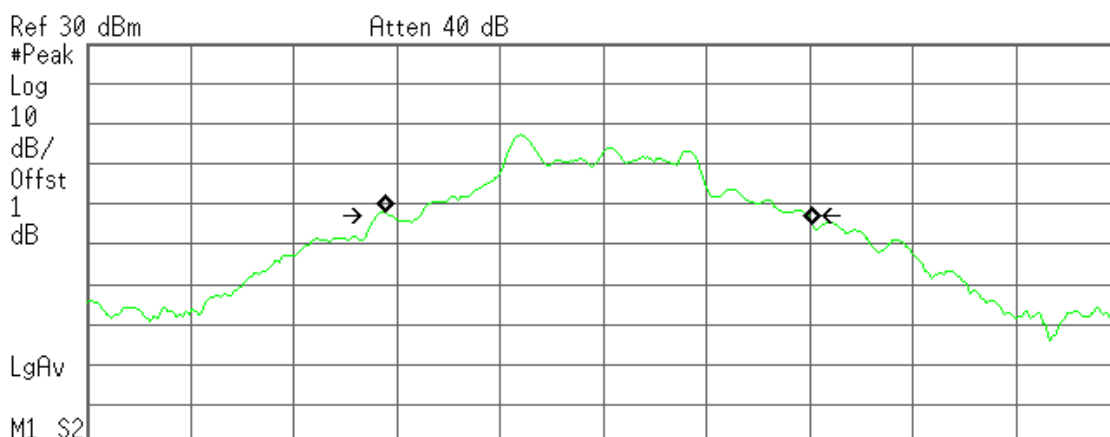

Center 2.441 000 GHz

Span 2 MHz

#Res BW 30 kHz

#VBW 300 kHz

Sweep 2.08 ms (601 pts)

Occupied Bandwidth  
830.6763 kHz

Occ BW % Pwr 99.00 %  
x dB -20.00 dB


Transmit Freq Error -7.491 kHz  
x dB Bandwidth 829.429 kHz



## 1M Channel 78

\* Agilent

R T

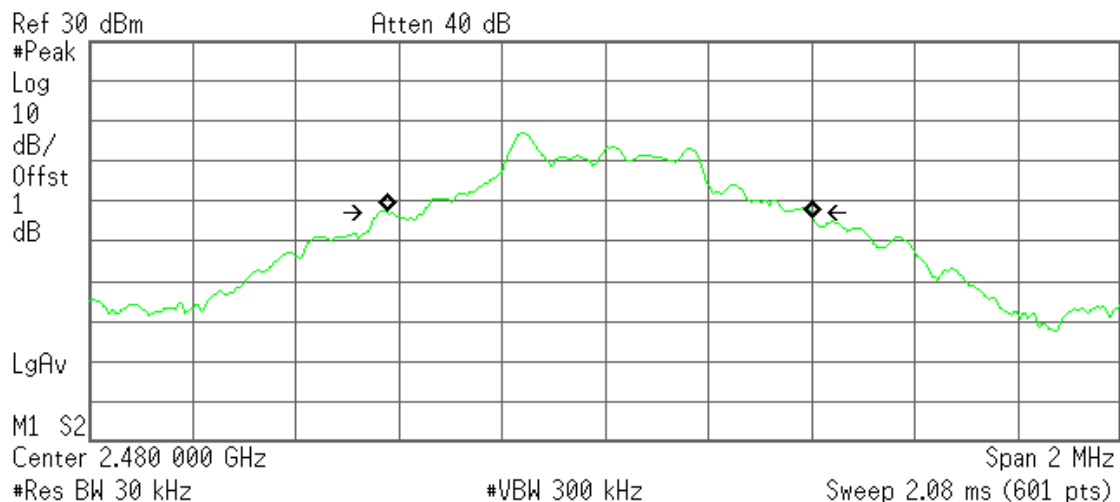

Occupied Bandwidth  
829.1819 kHz


Occ BW % Pwr 99.00 %  
x dB -20.00 dB

Transmit Freq Error -9.799 kHz  
x dB Bandwidth 840.108 kHz

## 3M Channel 00

\* Agilent

R T

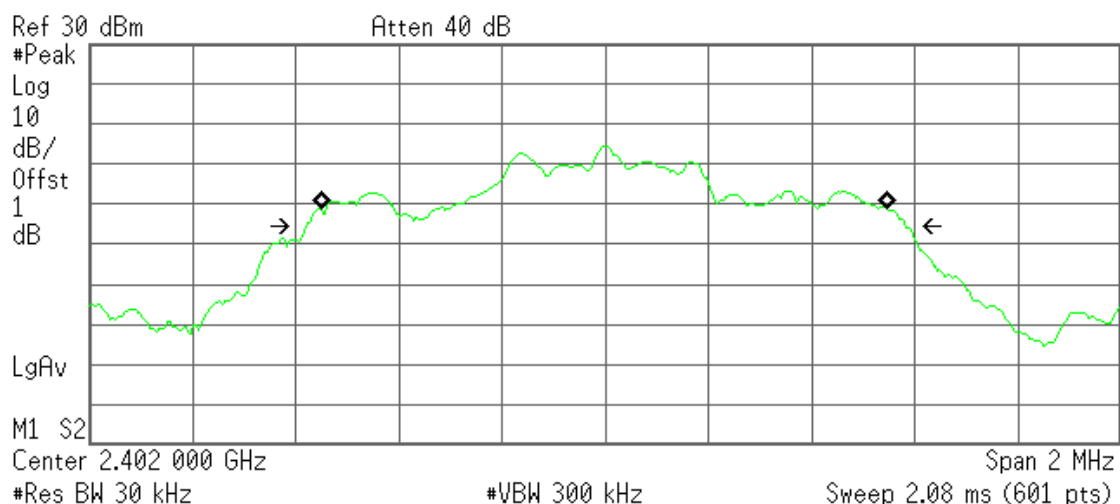

Occupied Bandwidth  
1.0985 MHz

Occ BW % Pwr 99.00 %  
x dB -20.00 dB


Transmit Freq Error -1.566 kHz  
x dB Bandwidth 1.162 MHz



## 3M Channel 39

\* Agilent

R T

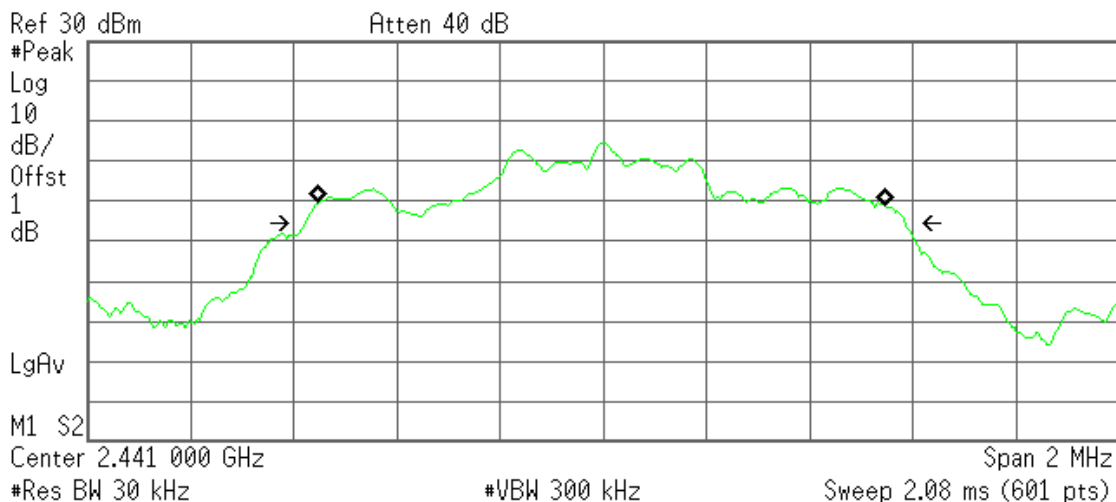

Occupied Bandwidth  
1.1004 MHz


Occ BW % Pwr 99.00 %  
x dB -20.00 dB

Transmit Freq Error -2.141 kHz  
x dB Bandwidth 1.162 MHz

## 3M Channel 78

\* Agilent

R T

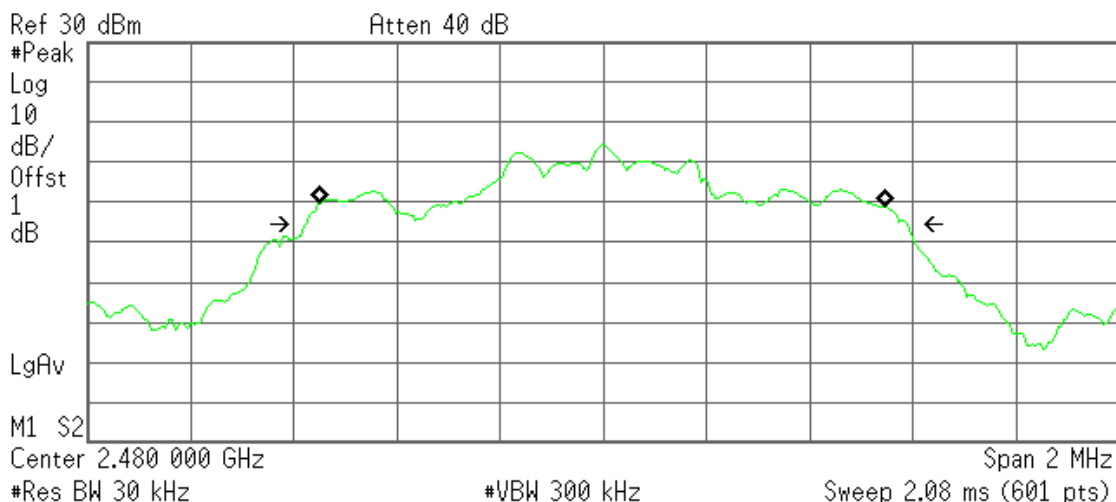

Occupied Bandwidth  
1.0986 MHz

Occ BW % Pwr 99.00 %  
x dB -20.00 dB

Transmit Freq Error -2.098 kHz  
x dB Bandwidth 1.167 MHz




## 6.4 HOPPING CHANNEL SEPARATION

### LIMIT

According to §15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.





## TEST RESULTS

No non-compliance noted


Operation Mode:	1 Mbps	Test Date:	February 28, 2014
Temperature:	24°C	Tested by:	Blent.Wang

Channel	Frequency	Separation	(2/3 of 20dB BW)	Result
	(MHz)	(MHz)	Limits (MHz)	
38~39	2440~2441	1.000	0.553	Pass

Operation Mode:	3 Mbps	Test Date:	February 28, 2014
Temperature:	24°C	Tested by:	Blent.Wang

Channel	Frequency	Separation	(2/3 of 20dB BW)	Result
	(MHz)	(MHz)	Limits (MHz)	
38~39	2440~2441	1.000	0.775	Pass

### 1M Channel Separation Plot on Channel 38-39

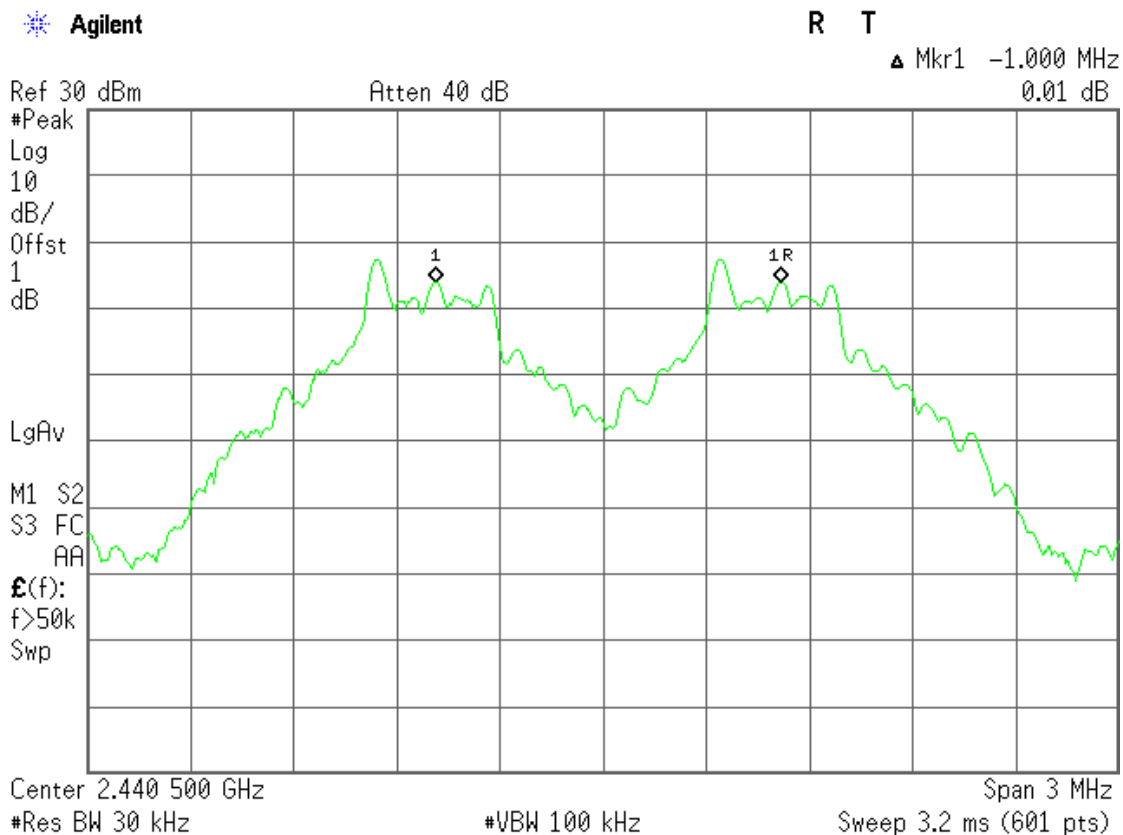



## 3M Channel Separation Plot on Channel 38-39

Agilent

R T

▲ Mkr1 1.000 MHz  
-0.01 dB

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

1

dB

LgAv

M1 S2


S3 FC

AA

E(f):

f>50k

Swp

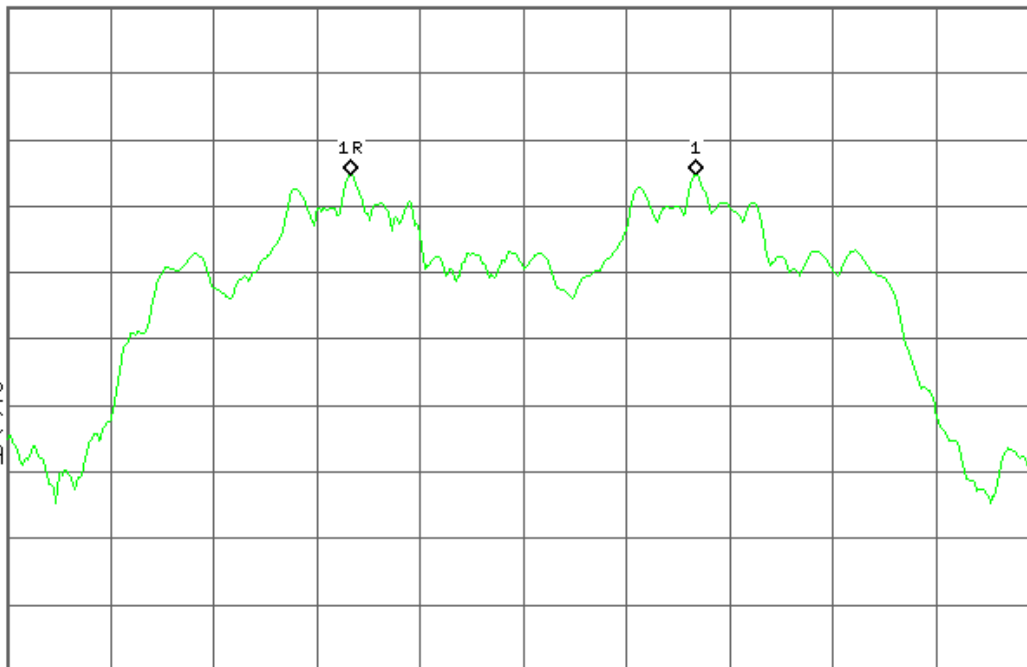

Center 2.440 500 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 3.2 ms (601 pts)



## 6.5 NUMBER OF HOPPING FREQUENCY

### LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441MHz, Sweep = auto and Start=2441MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=1MHz.
5. Max hold, view and count how many channel in the band.

### TEST RESULTS

*No non-compliance noted*

### Test Data

Operation Mode:	1 Mbps	Test Date:	February 28, 2014
Temperature:	24°C	Tested by:	Blent.Wang

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

Operation Mode:	3 Mbps	Test Date:	February 28, 2014
Temperature:	24°C	Tested by:	Blent.Wang

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




## Test Plot:1M

### Channel Number 2.4 GHz – 2.441 GHz

Agilent


R T

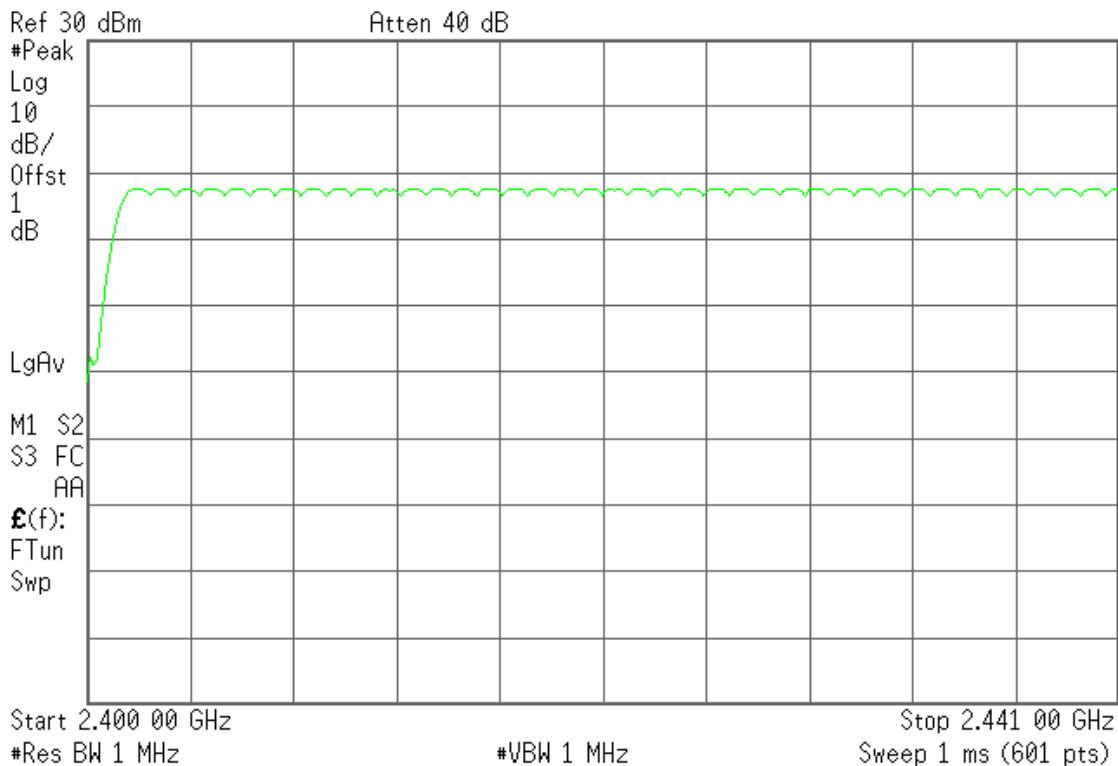

### Channel Number 2.441 GHz – 2.4835 GHz

Agilent

R T

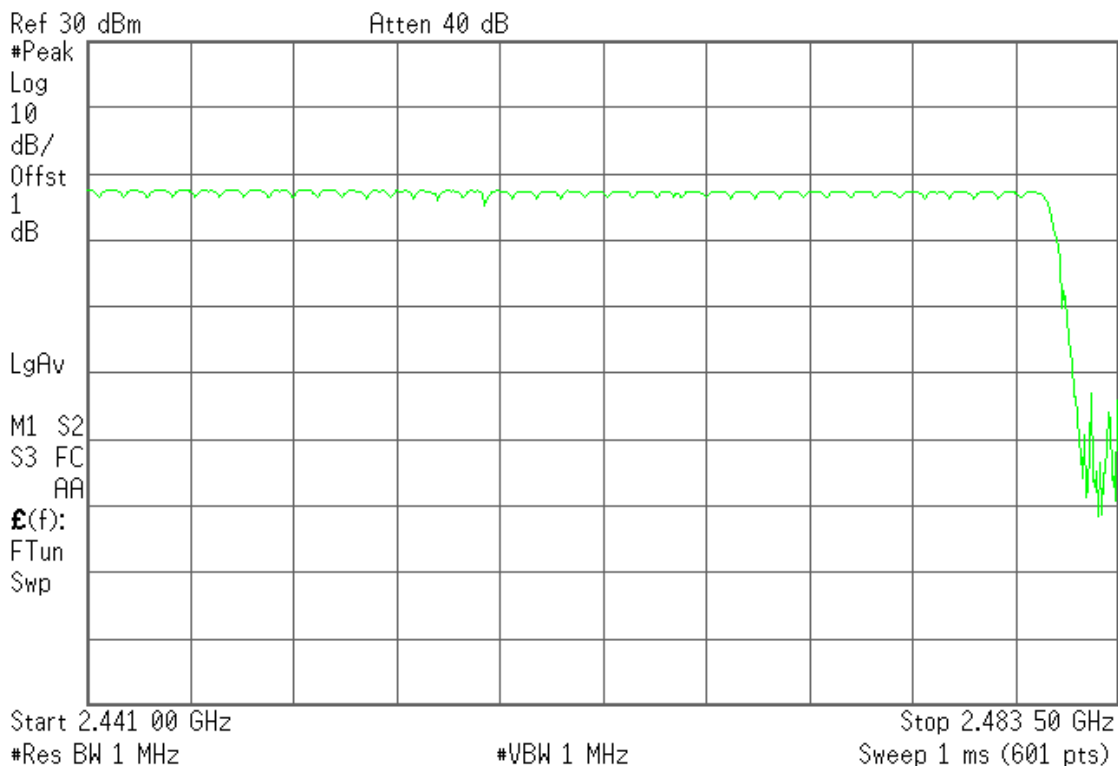




## Test Plot:3M

### Channel Number 2.4 GHz – 2.4415 GHz

Agilent


R T

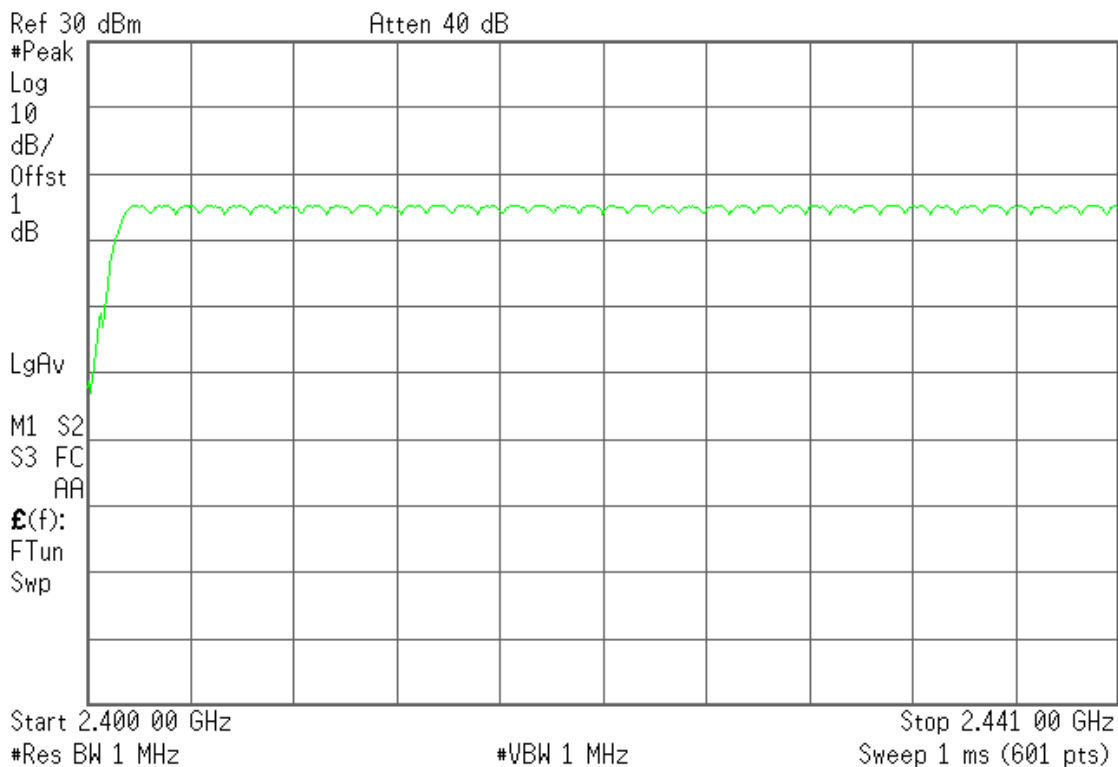

### Channel Number 2.4415 GHz – 2.4835 GHz

Agilent

R T

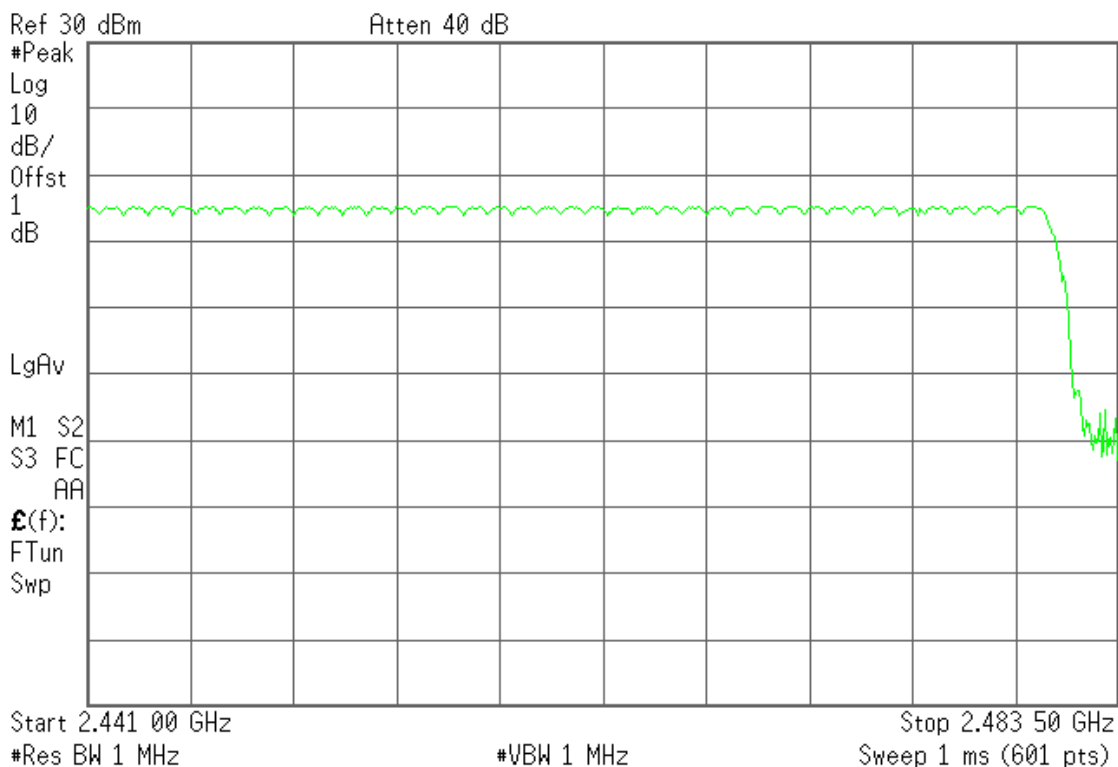




## 6.6 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

*No non-compliance noted*

#### Test Data

1M

DH 1

$$0.382 * (1600/2)/79 * 31.6 = 122.24(\text{ms})$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.382	122.24	31.60	400	PASS

DH 3

$$1.633 * (1600/4)/79 * 31.6 = 261.28 (\text{ms})$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.633	261.28	31.60	400	PASS

DH 5

$$2.883 * (1600/6)/79 * 31.6 = 307.52 (\text{ms})$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.883	307.52	31.60	400	PASS



# Compliance Certification Services Inc.

Report No: C140224R02-RPB

FCC ID: RQQHLT-D205

Date of Issue :March 6, 2014

3M

DH 1

$$0.390 * (1600/2)/79 * 31.6 = 124.80 \text{ (ms)}$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.390	124.80	31.60	400	PASS

DH 3

$$1.642 * (1600/4)/79 * 31.6 = 262.72 \text{ (ms)}$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.642	262.72	31.60	400	PASS

DH 5

$$2.900 * (1600/6)/79 * 31.6 = 309.33 \text{ (ms)}$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.900	309.33	31.60	400	PASS




## 1M-DH1

Agilent

R T

▲ Mkr1 382.2  $\mu$ s  
-1.27 dB

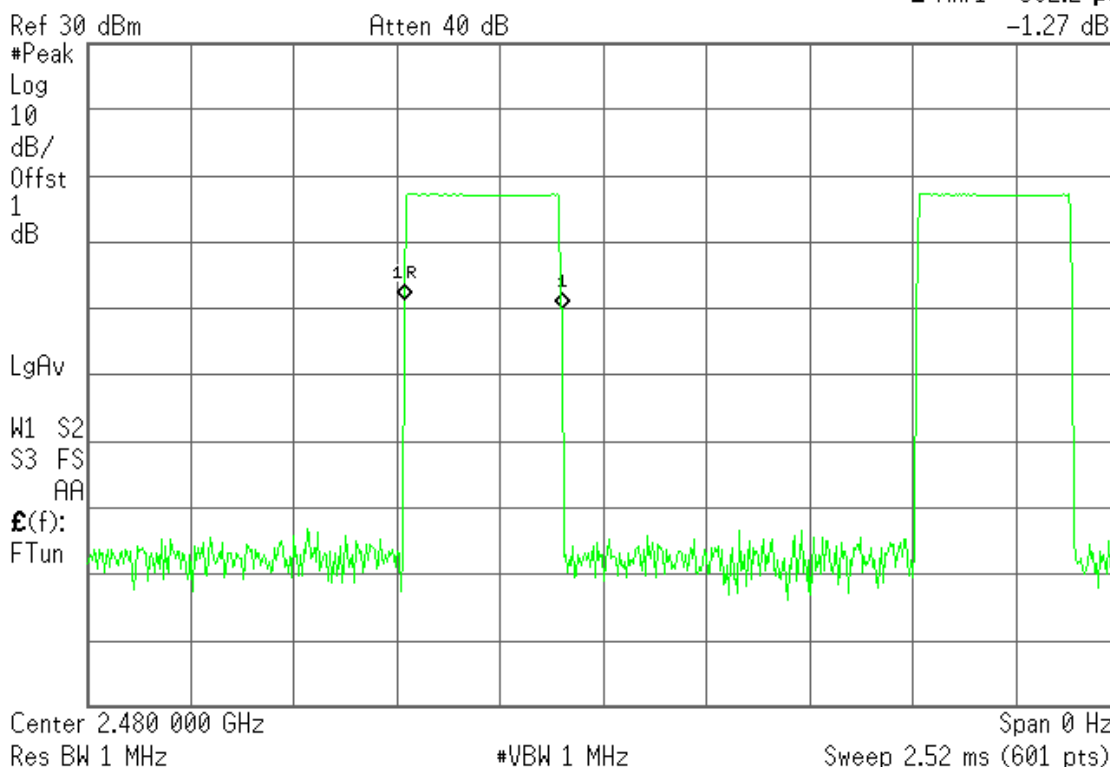


## 1M-DH3

Agilent

R T

▲ Mkr1 1.633 ms  
-16.51 dB

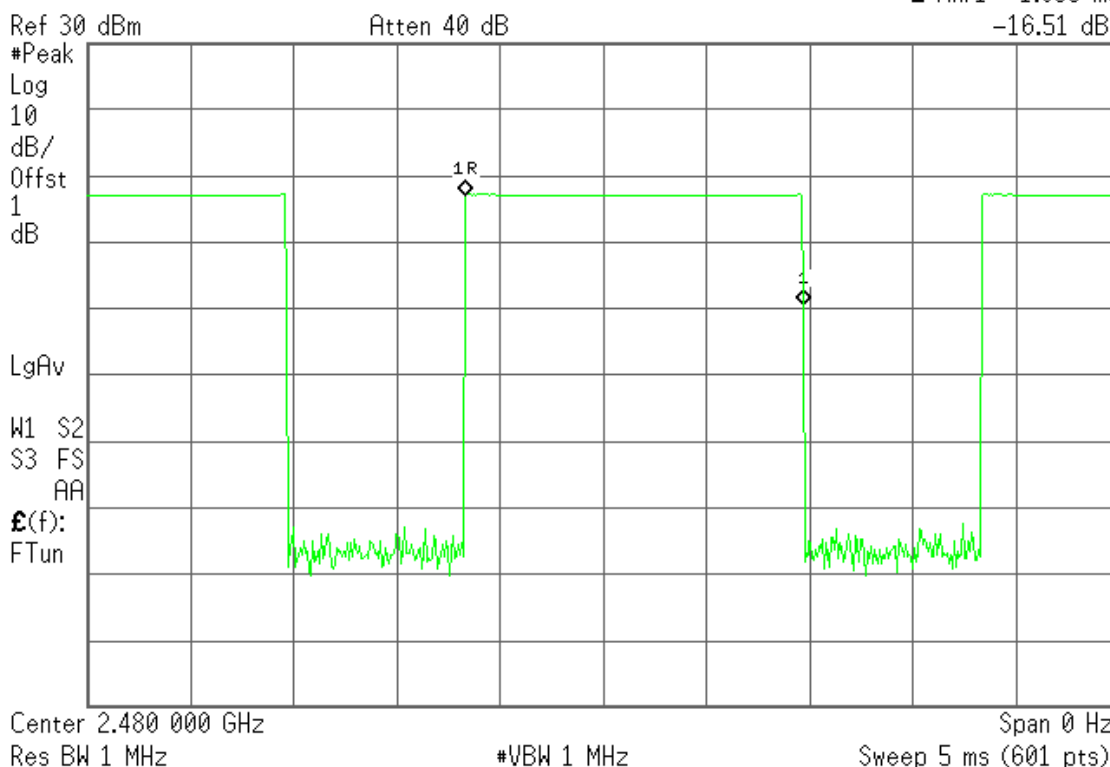






## 1M-DH5

Agilent

R T

▲ Mkr1 2.883 ms  
-17.82 dB

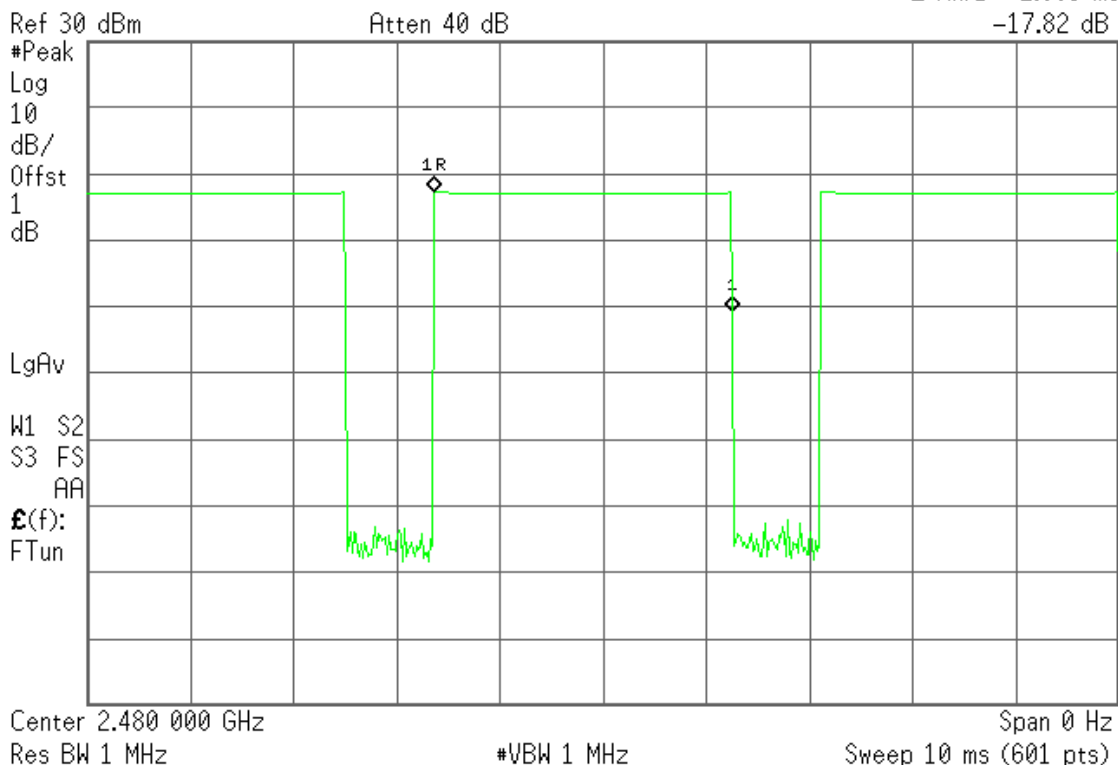


## 3M-DH1

Agilent

R T

▲ Mkr1 390 µs  
12.13 dB

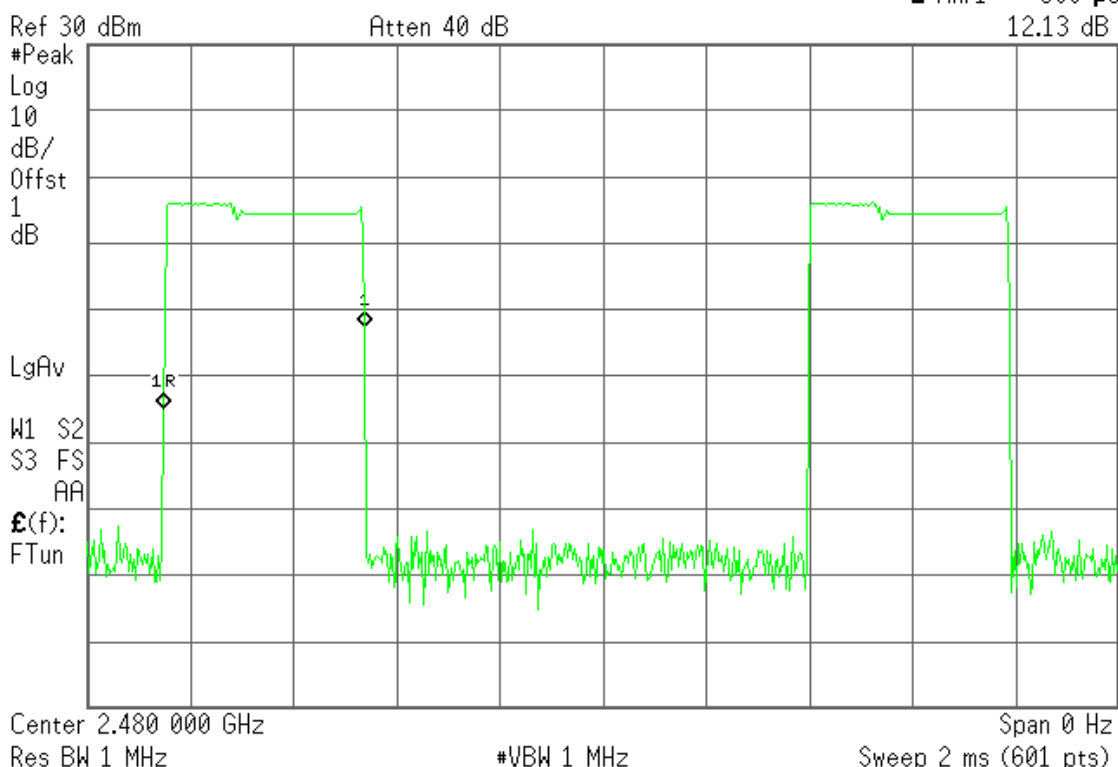




### 3M-DH3

Agilent

R T

▲ Mkr1 1.642 ms  
18.52 dB

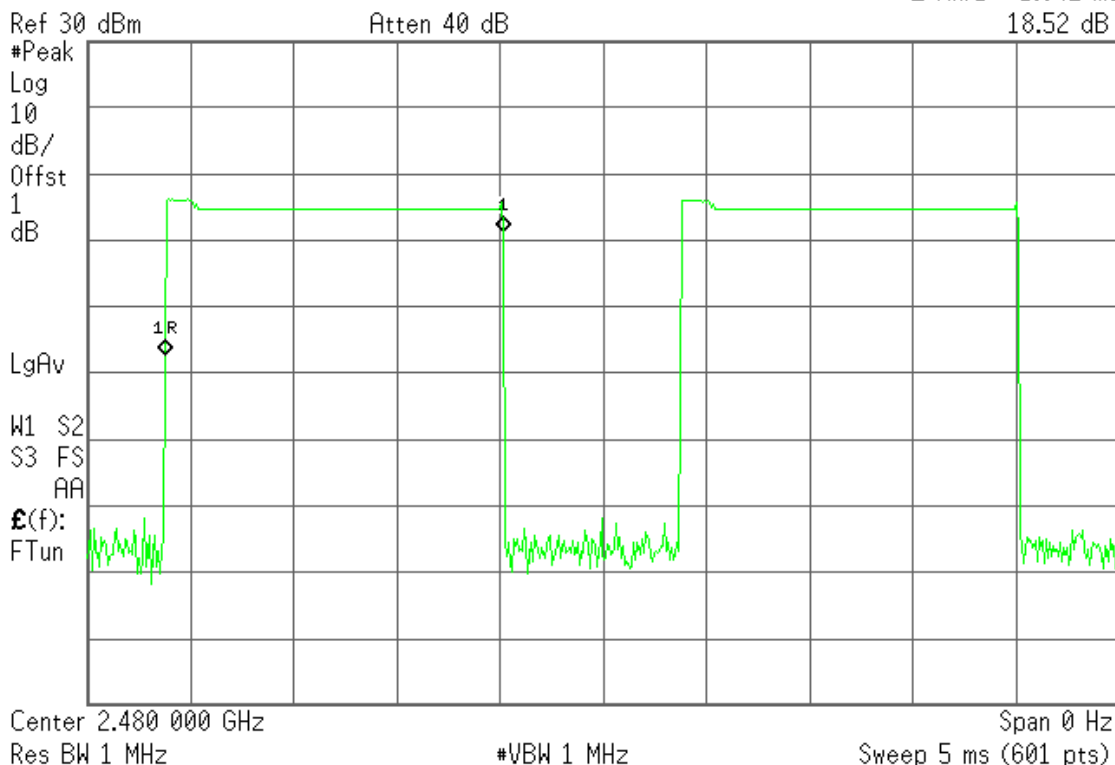


### 3M-DH5

Agilent

R T

▲ Mkr1 2.9 ms  
16.82 dB

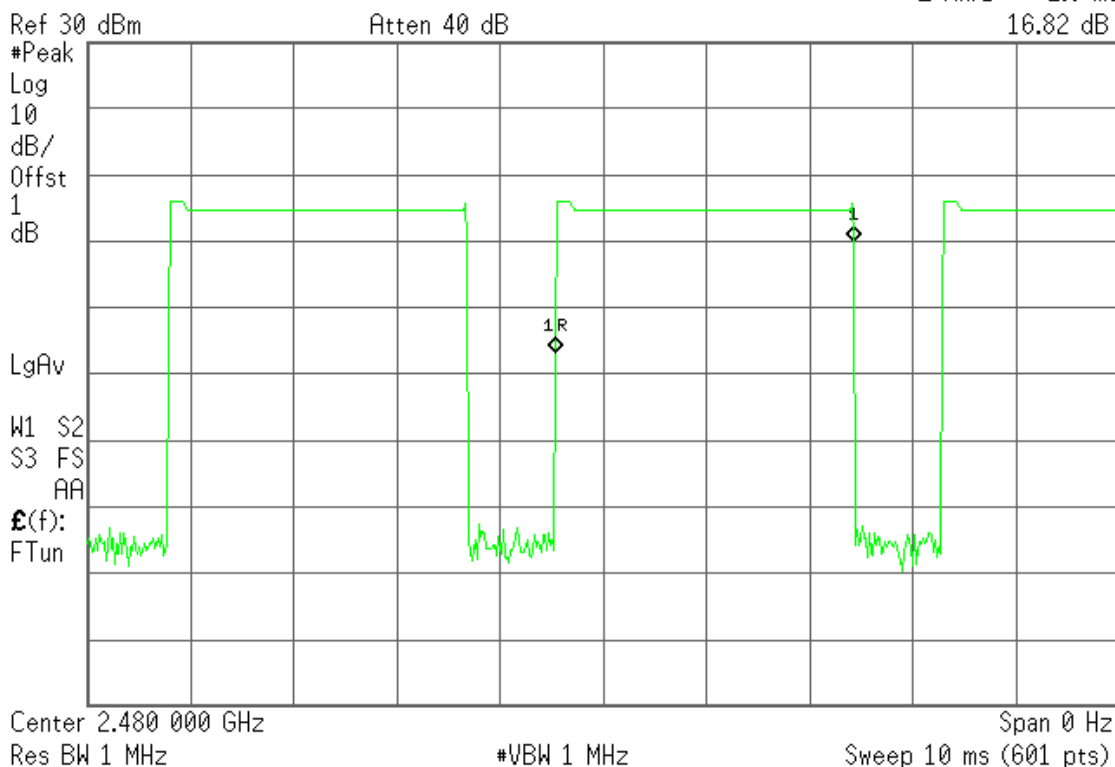



## 6.7 SPURIOUS EMISSION

### Conducted Measurement

#### LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted*



# Compliance Certification Services Inc.

Report No: C140224R02-RPB

FCC ID: RQQHLT-D205


Date of Issue :March 6, 2014

Operation Mode:	1 Mbps	Test Date:	February 28, 2014
Test Channel:	00	Tested by:	Blent.Wang
Humidity:	52 % RH	Temperature:	24°C

Agilent

R T


Mkr1 1.203 15 GHz  
-39.35 dBm

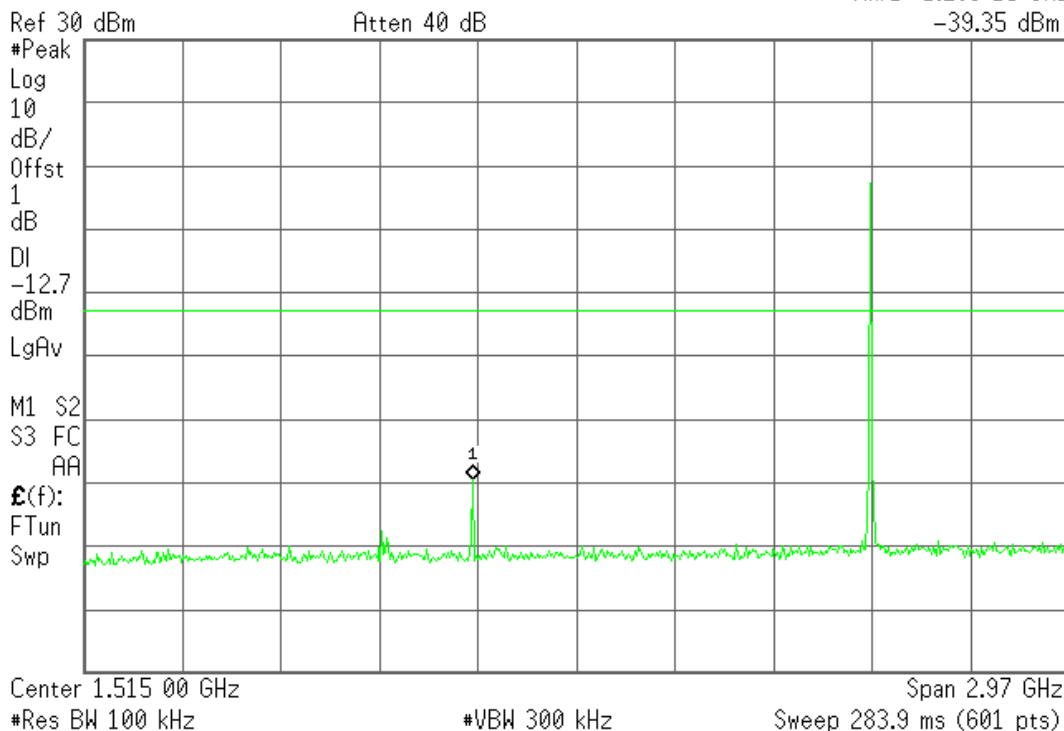

Agilent

R T

Mkr1 7.21 GHz  
-34.38 dBm

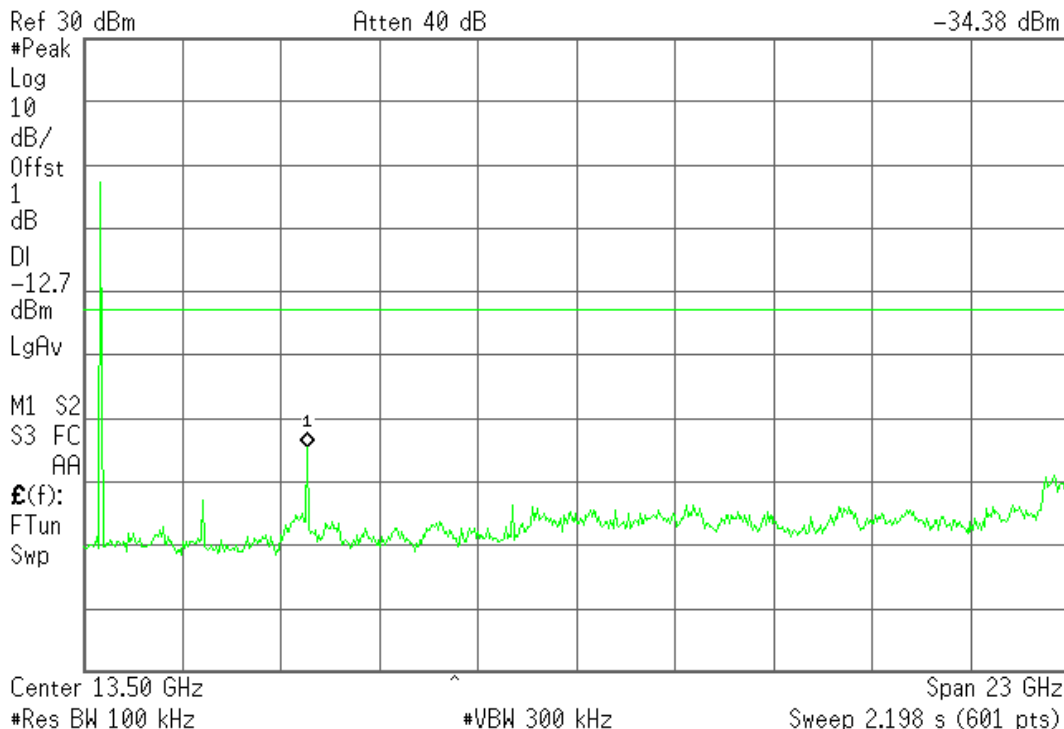



# Compliance Certification Services Inc.

Report No: C140224R02-RPB

FCC ID: RQQHLT-D205


Date of Issue :March 6, 2014

Operation Mode:	1 Mbps	Test Date:	February 28, 2014
Test Channel:	39	Tested by:	Blent.Wang
Humidity:	52 % RH	Temperature:	24°C

Agilent

R T


Mkr1 1.222 95 GHz  
-41.37 dBm

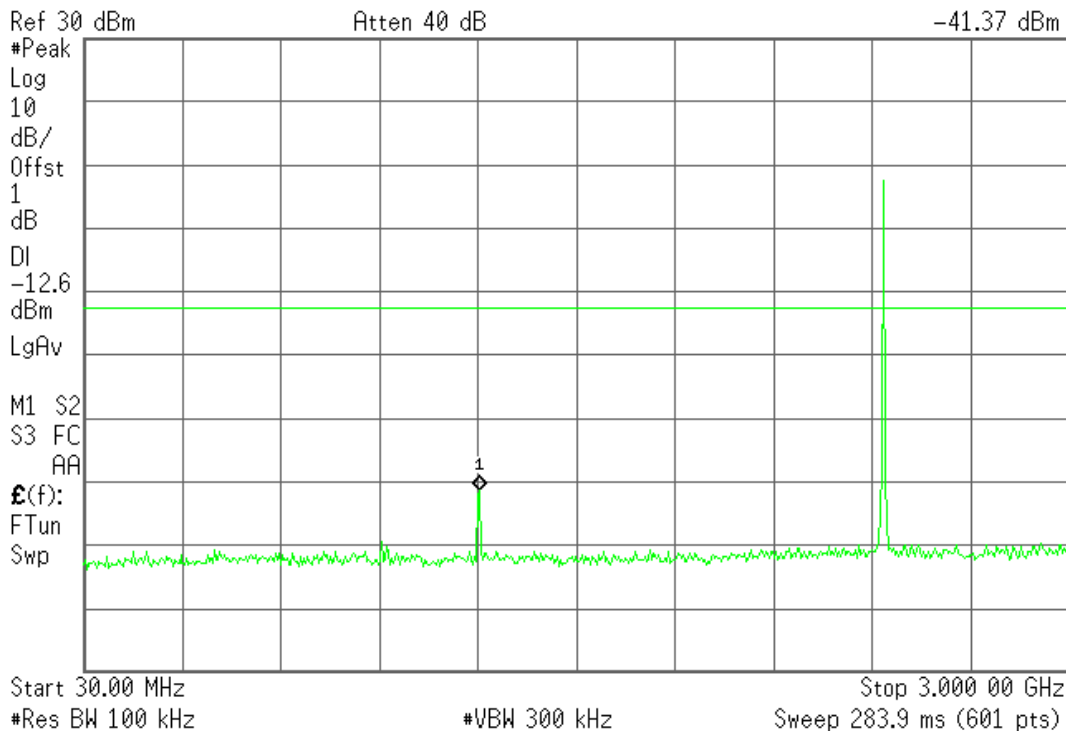

Agilent

R T

Mkr1 7.33 GHz  
-38.36 dBm

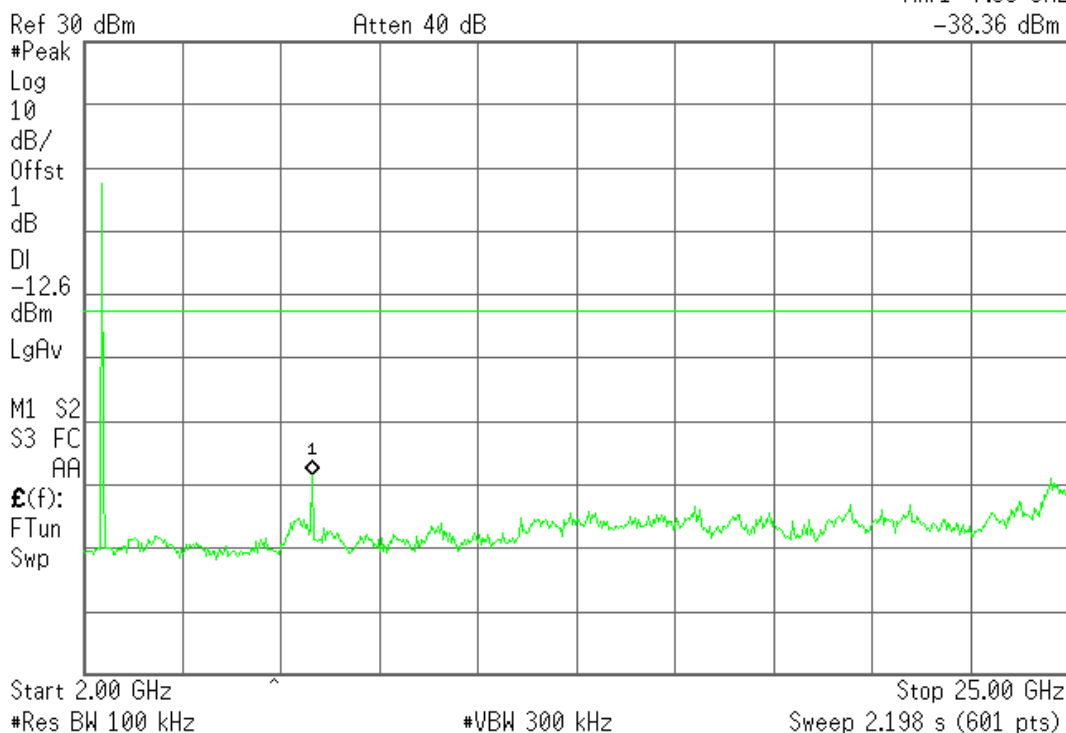



# Compliance Certification Services Inc.

Report No: C140224R02-RPB

FCC ID: RQQHLT-D205


Date of Issue :March 6, 2014

Operation Mode:	1 Mbps	Test Date:	February 28, 2014
Test Channel:	78	Tested by:	Blent.Wang
Humidity:	52 % RH	Temperature:	24°C

Agilent

R T


Mkr1 1.237 80 GHz  
-39.03 dBm

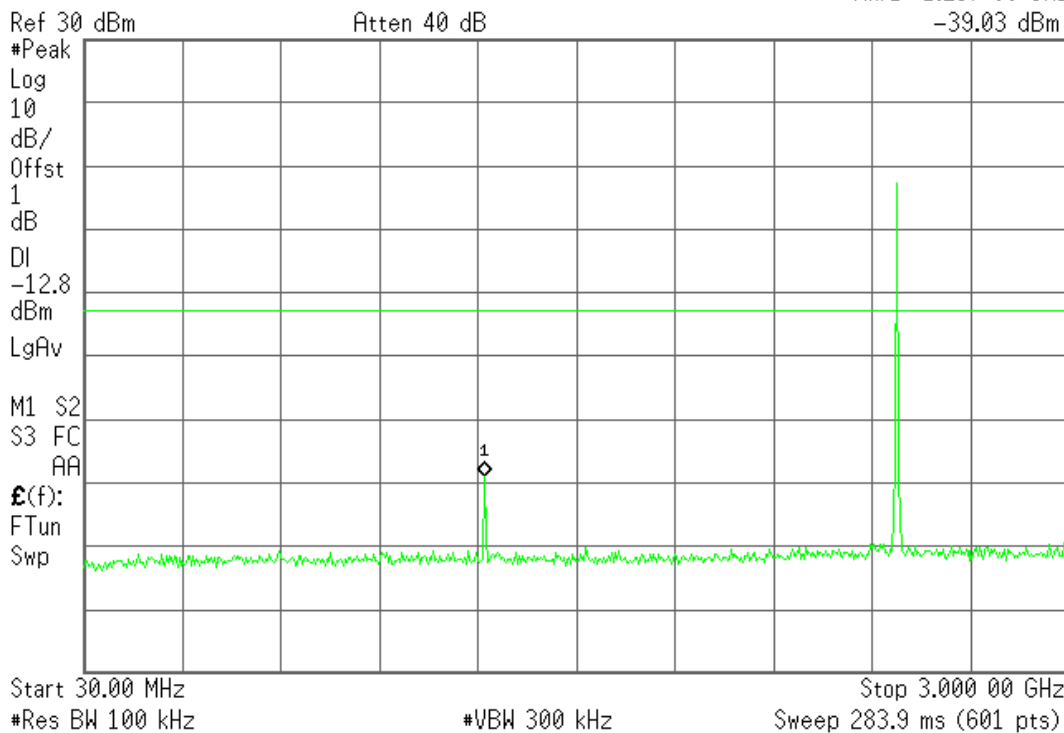

Agilent

R T

Mkr1 4.95 GHz  
-33.19 dBm

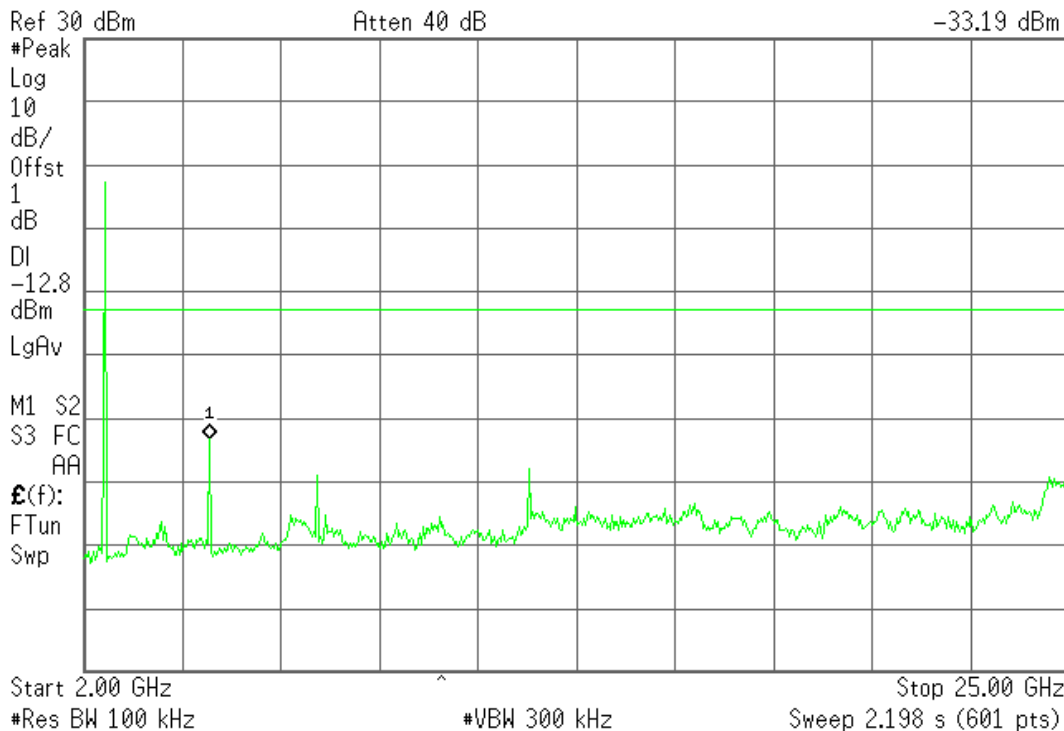



# Compliance Certification Services Inc.

Report No: C140224R02-RPB

FCC ID: RQQHLT-D205


Date of Issue :March 6, 2014

Operation Mode:	3 Mbps	Test Date:	February 28, 2014
Test Channel:	00	Tested by:	Blent.Wang
Humidity:	52 % RH	Temperature:	24°C

Agilent

R T


Mkr1 1.762 50 GHz  
-37.00 dBm

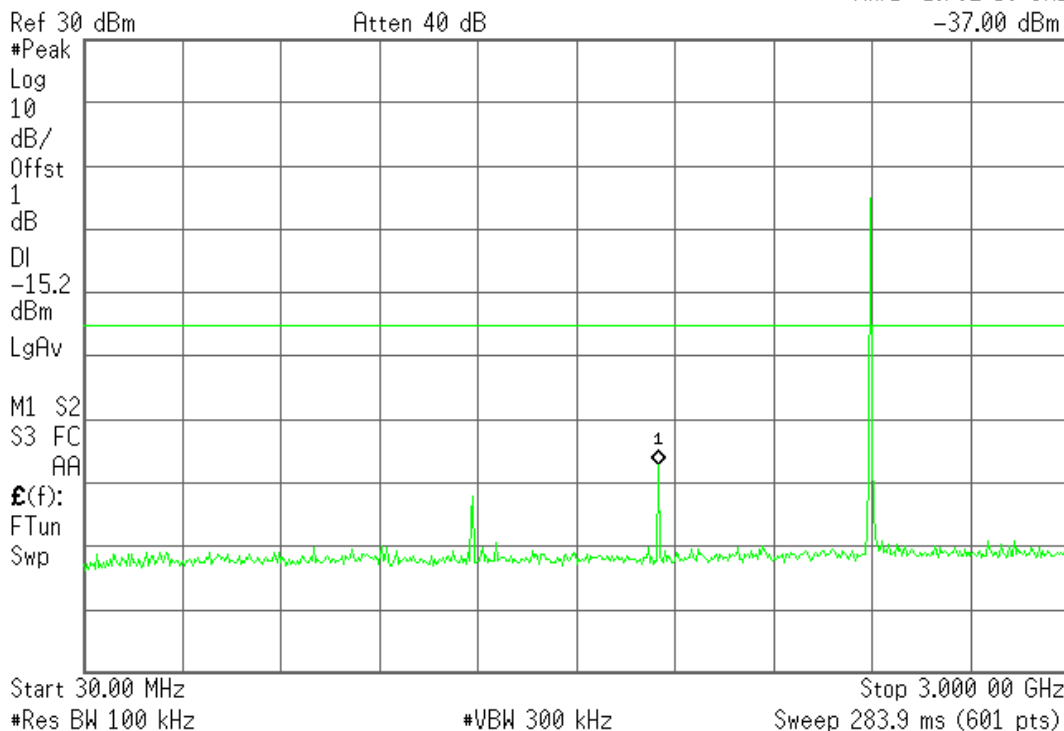

Agilent

R T

Mkr1 7.21 GHz  
-36.83 dBm

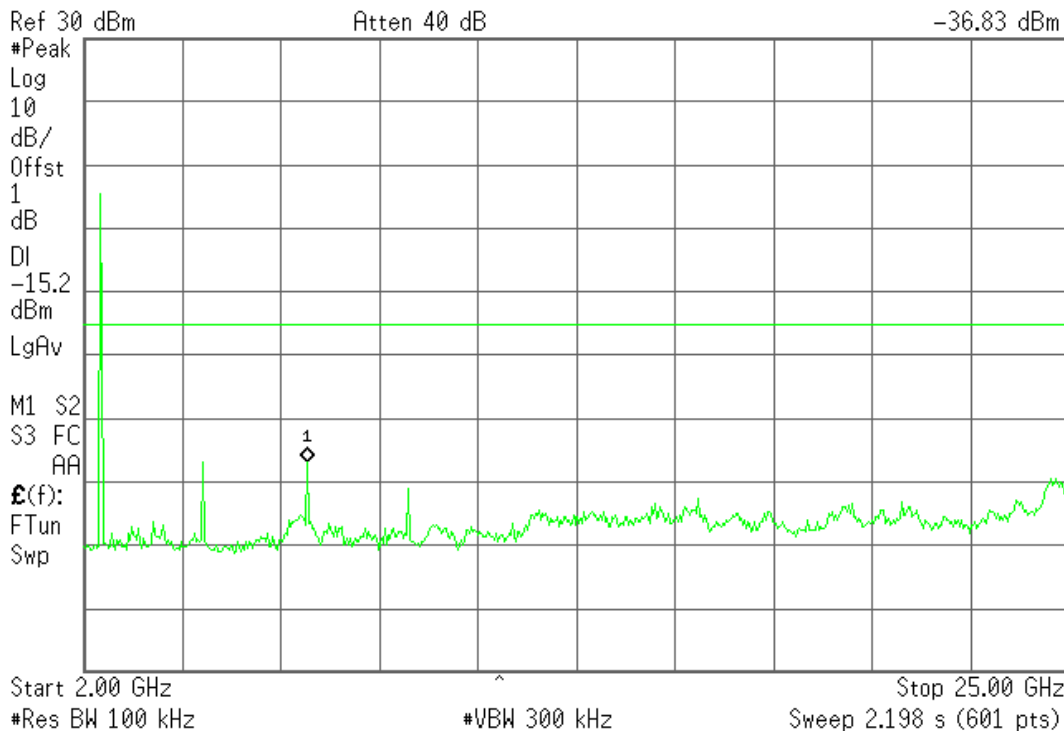



# Compliance Certification Services Inc.

Report No: C140224R02-RPB


FCC ID: RQQHLT-D205

Date of Issue :March 6, 2014

Operation Mode:	3 Mbps	Test Date:	February 28, 2014
Test Channel:	39	Tested by:	Blent.Wang
Humidity:	52 % RH	Temperature:	24°C


Agilent

R T

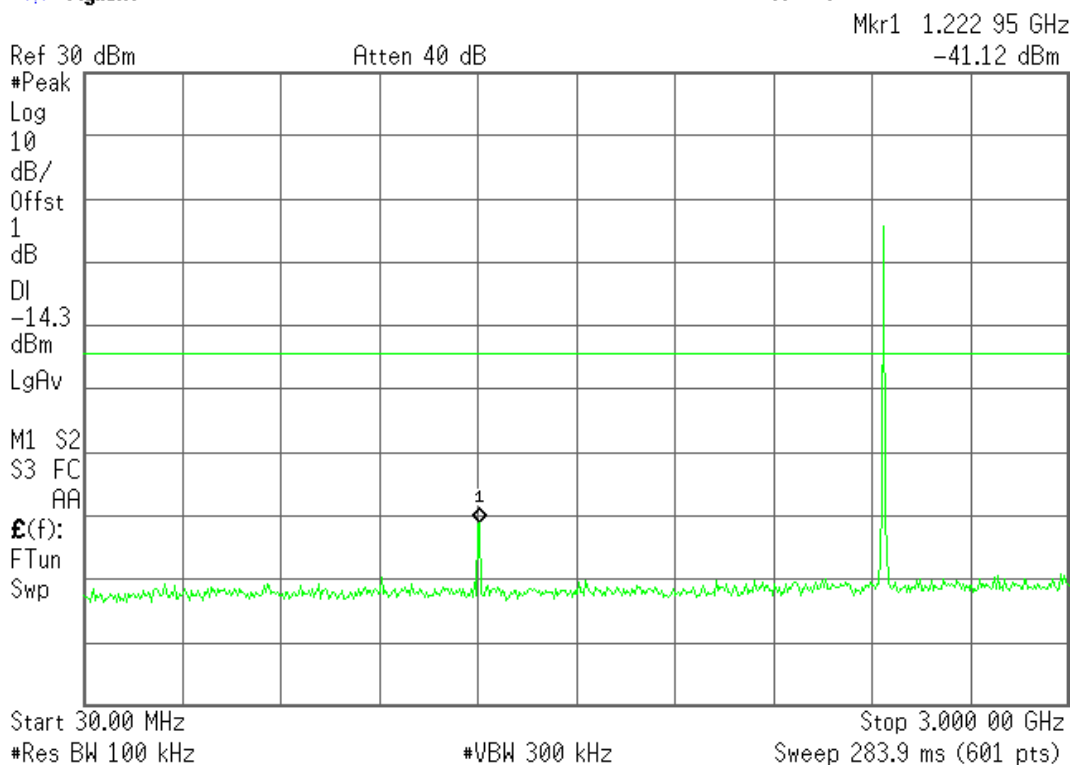

Agilent

R T

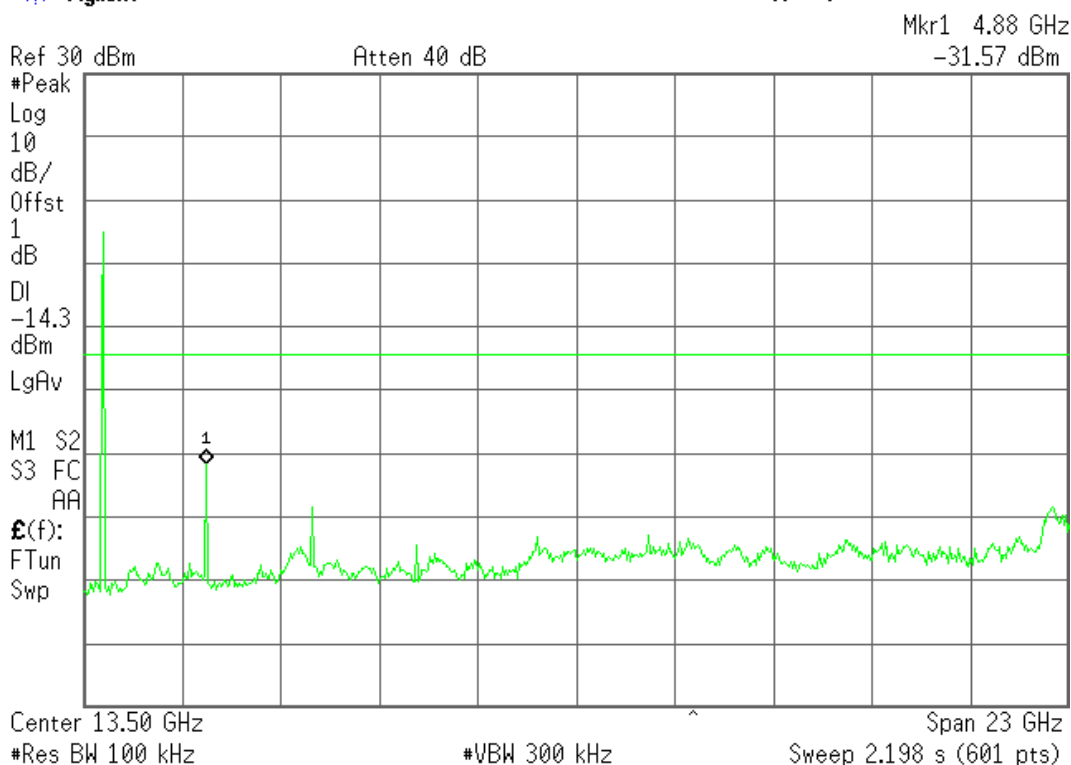





# Compliance Certification Services Inc.

Report No: C140224R02-RPB

FCC ID: RQQHLT-D205


Date of Issue :March 6, 2014

Operation Mode:	3 Mbps	Test Date:	February 28, 2014
Test Channel:	78	Tested by:	Blent.Wang
Humidity:	52 % RH	Temperature:	24°C

Agilent

R T


Mkr1 1.237 80 GHz  
-41.67 dBm

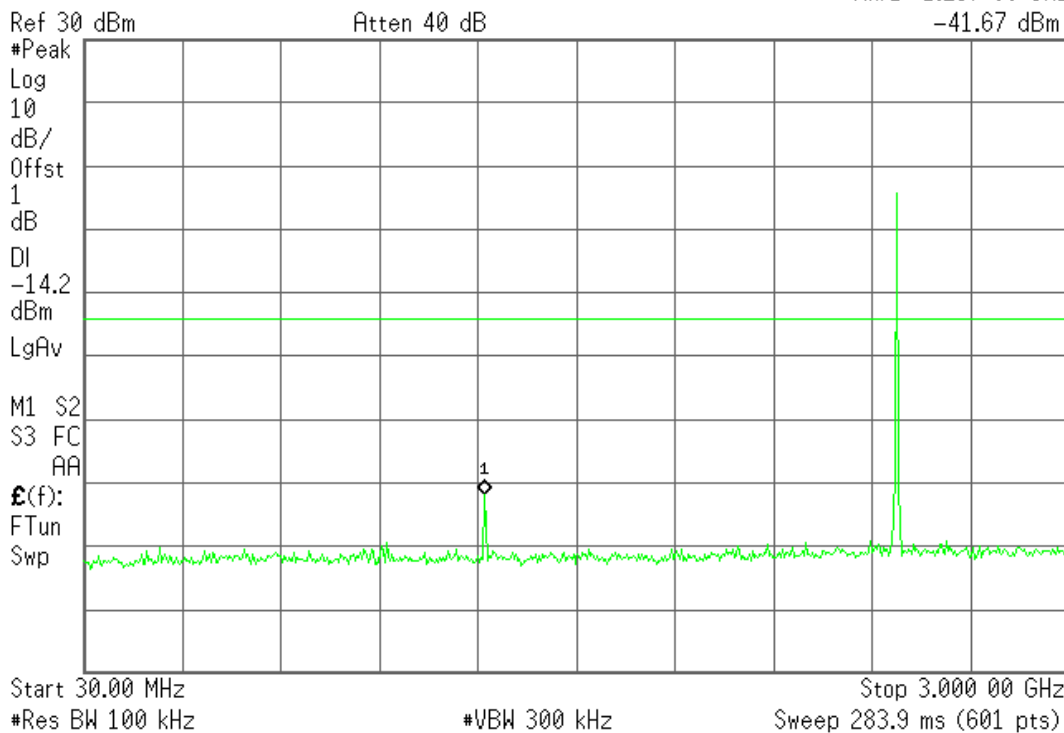

Agilent

R T

Mkr1 4.95 GHz  
-33.21 dBm

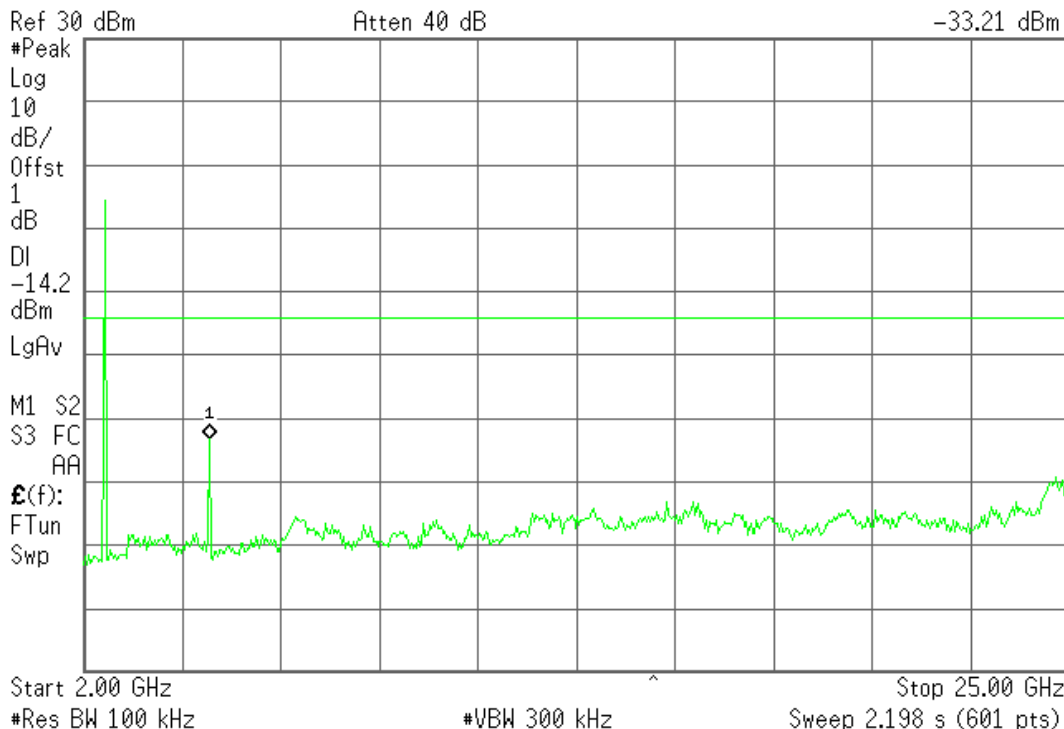



## 6.8 Radiated Band Edge and Spurious Emission Measurement

### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength ( $\text{dB}\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


### Test Configuration

#### Below 30MHz

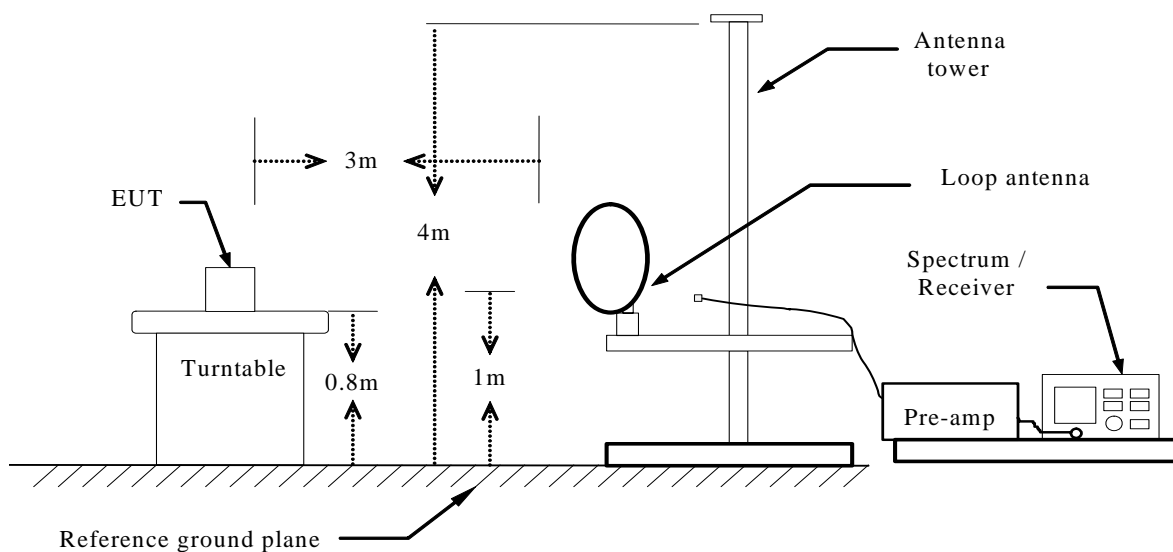




## Below 1 GHz

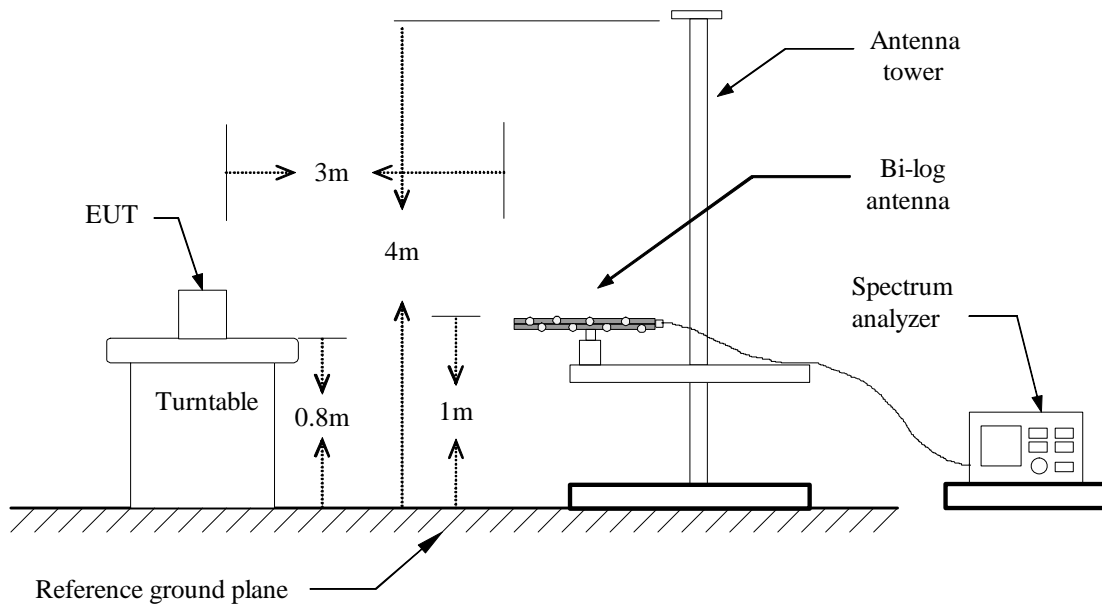

## Above 1 GHz

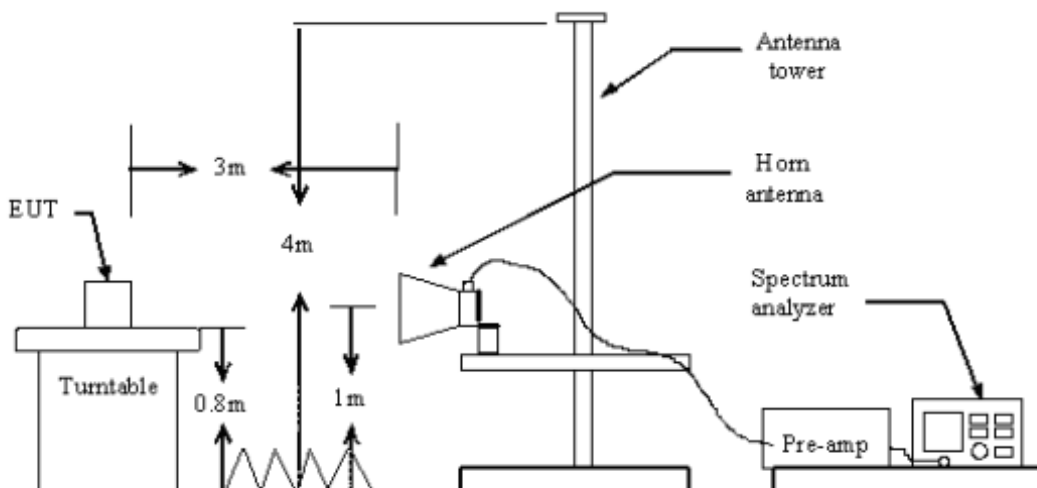



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.




## RESTRICTED BANDEDGE (1Mbps, Low Channel, Horizontal)

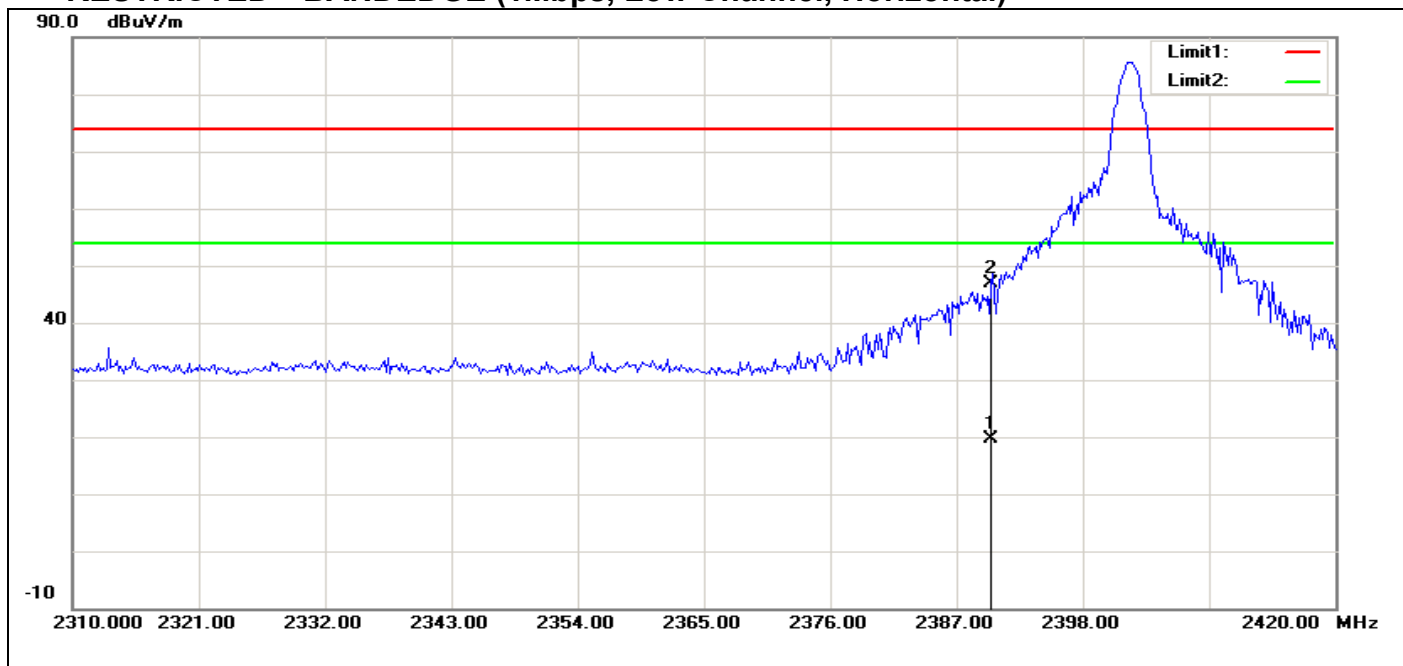

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2389.985	33.91	-14.28	19.63	54.00	-34.37	100	6	AVG
2	2390.000	61.16	-14.28	46.88	74.00	-27.12	100	7	peak


## RESTRICTED BANDEDGE (1Mbps, Low Channel, Vertical)

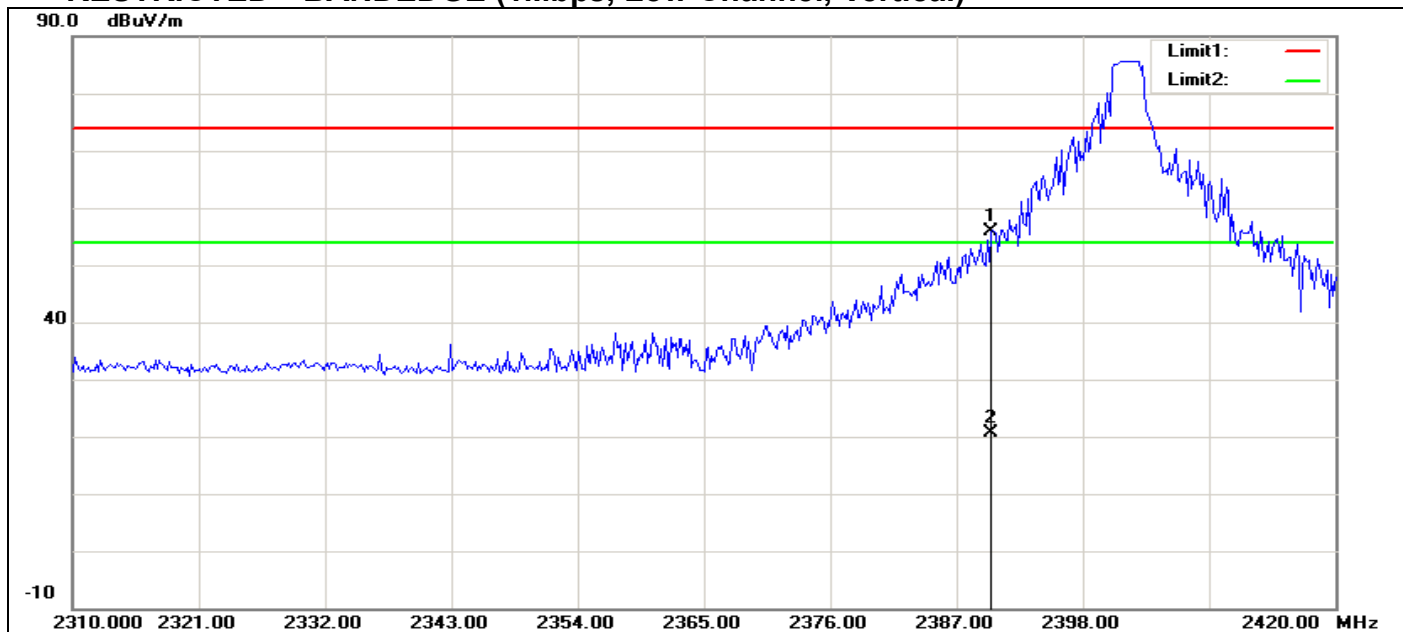

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	70.23	-14.28	55.95	74.00	-18.05	100	281	peak
2	2390.000	34.96	-14.28	20.68	54.00	-33.32	100	280	AVG




## RESTRICTED BANDEDGE (1Mbps Mode, High Channel, Horizontal)

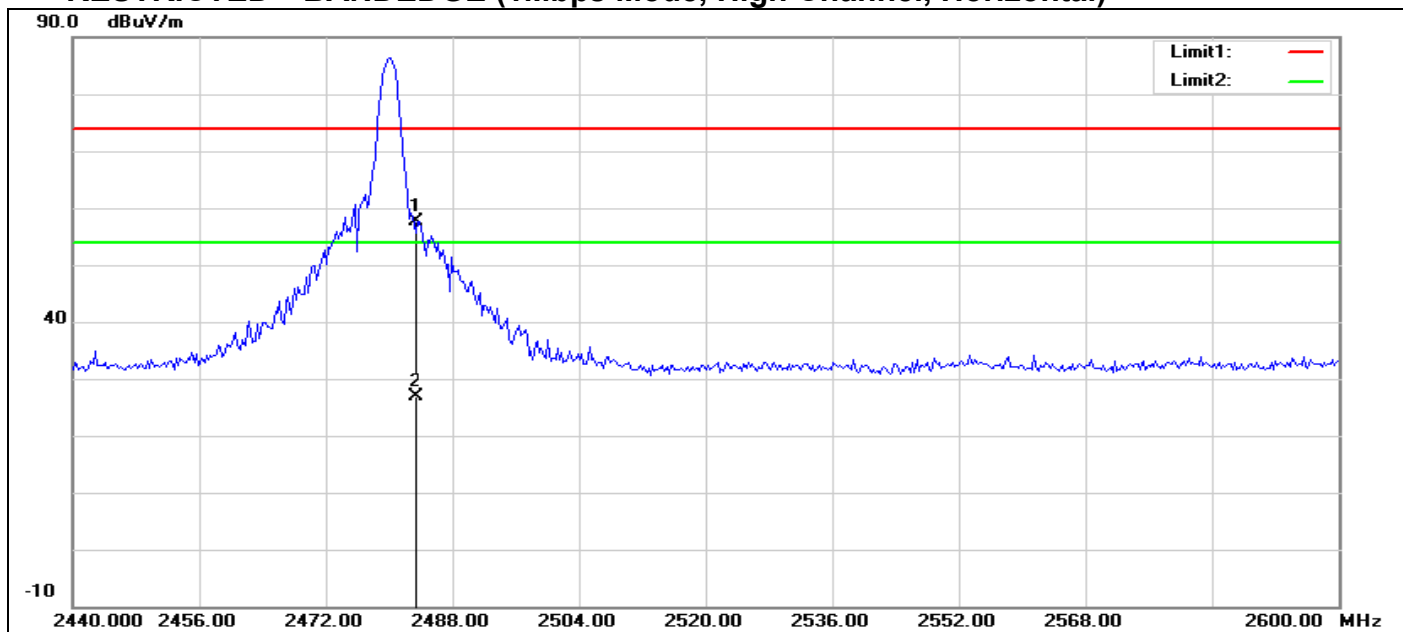

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	71.38	-13.65	57.73	74.00	-16.27	100	7	peak
2	2483.500	40.63	-13.65	26.98	54.00	-27.02	103	6	AVG


## RESTRICTED BANDEDGE (1Mbps, High Channel, Vertical)

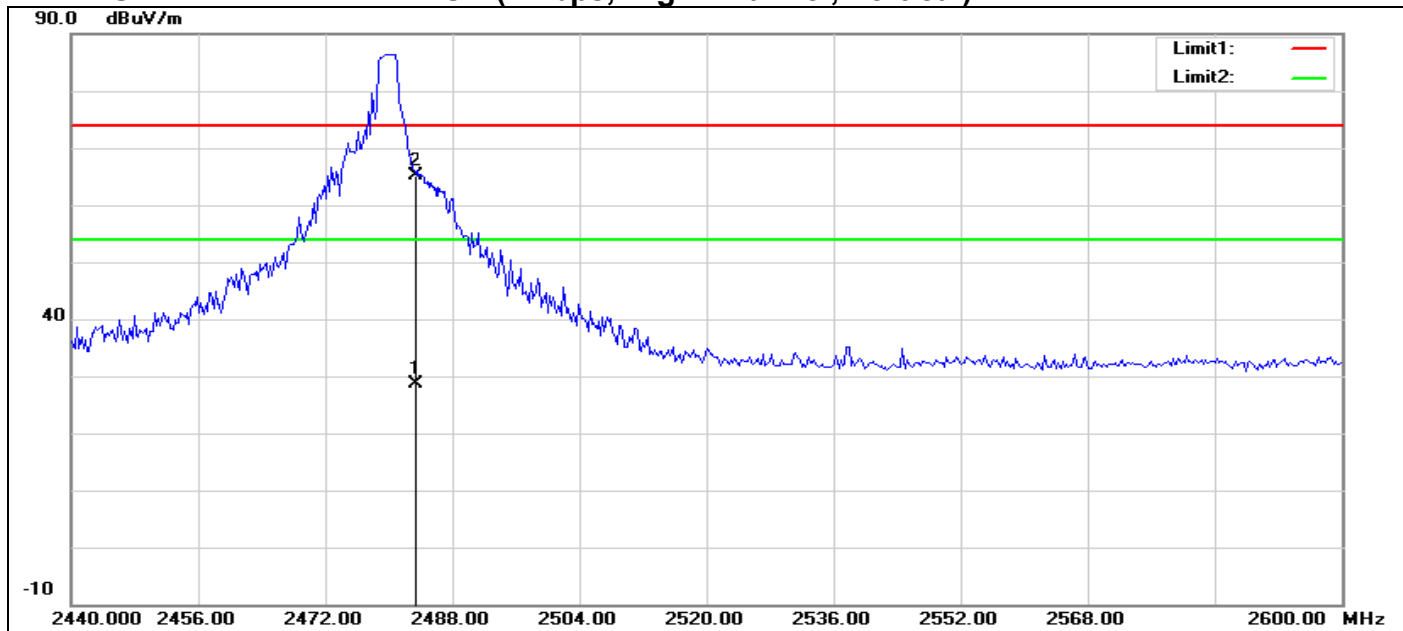

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.400	42.18	-13.65	28.53	54.00	-25.47	103	208	AVG
2	2483.500	78.67	-13.65	65.02	74.00	-8.98	101	208	peak




## RESTRICTED BANDEDGE (3Mbps, Low Channel, Horizontal)

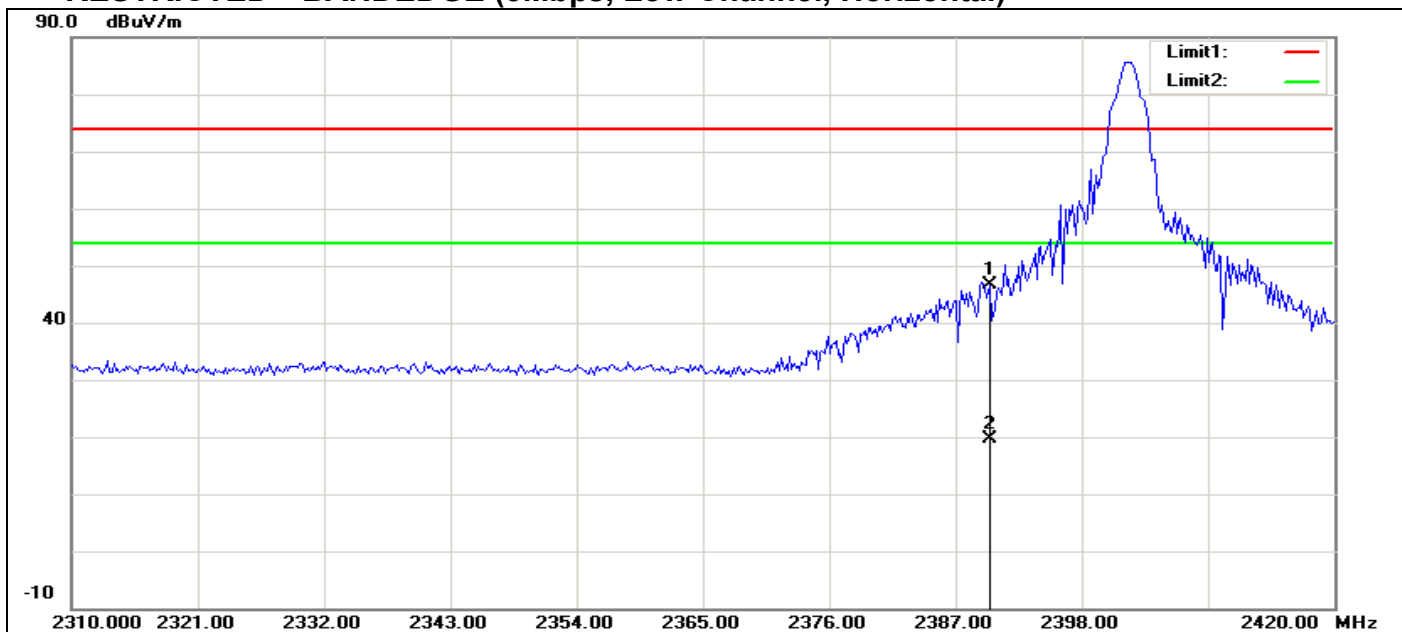

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	60.82	-14.28	46.54	74.00	-27.46	100	336	peak
2	2390.011	33.95	-14.29	19.66	54.00	-34.34	100	336	AVG


## RESTRICTED BANDEDGE (3Mbps, Low Channel, Vertical)

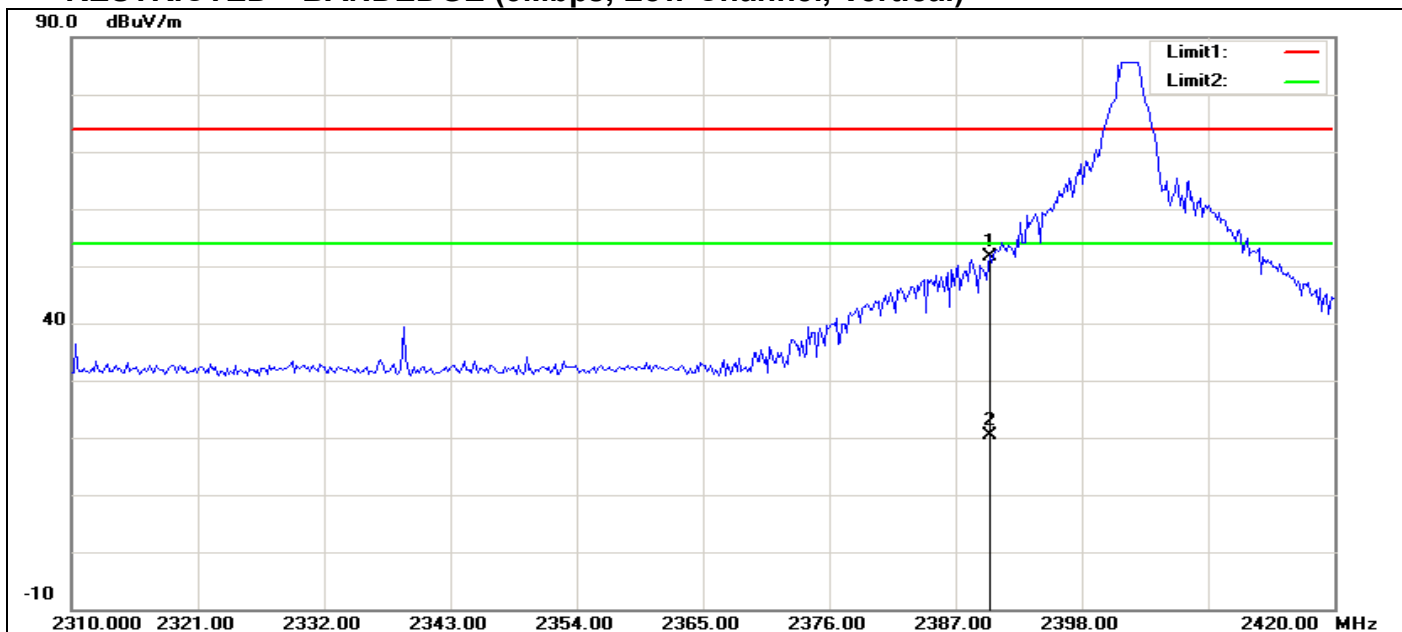

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	66.03	-14.28	51.75	74.00	-22.25	100	262	peak
2	2390.033	34.59	-14.29	20.30	54.00	-33.70	100	261	AVG




## RESTRICTED BANDEDGE (3Mbps, High Channel, Horizontal)

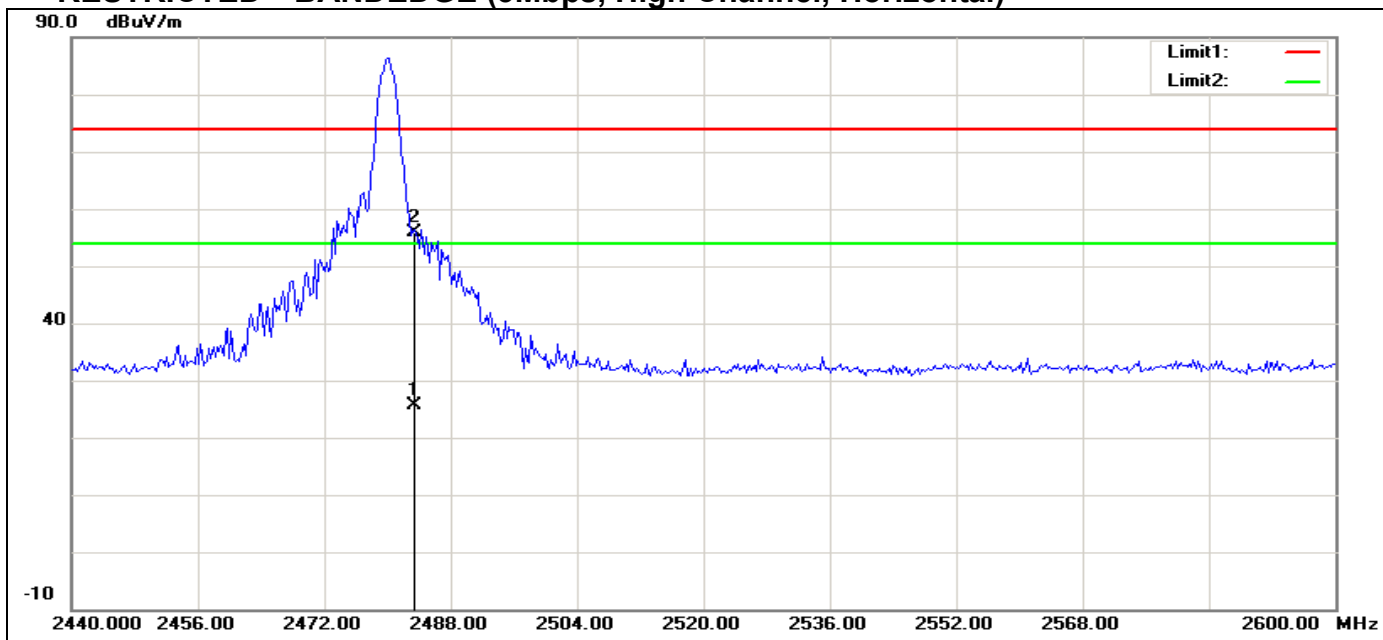

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.400	39.33	-13.65	25.68	54.00	-28.32	103	186	AVG
2	2483.500	69.53	-13.65	55.88	74.00	-18.12	100	186	peak

## RESTRICTED BANDEDGE (3Mbps, High Channel, Vertical)

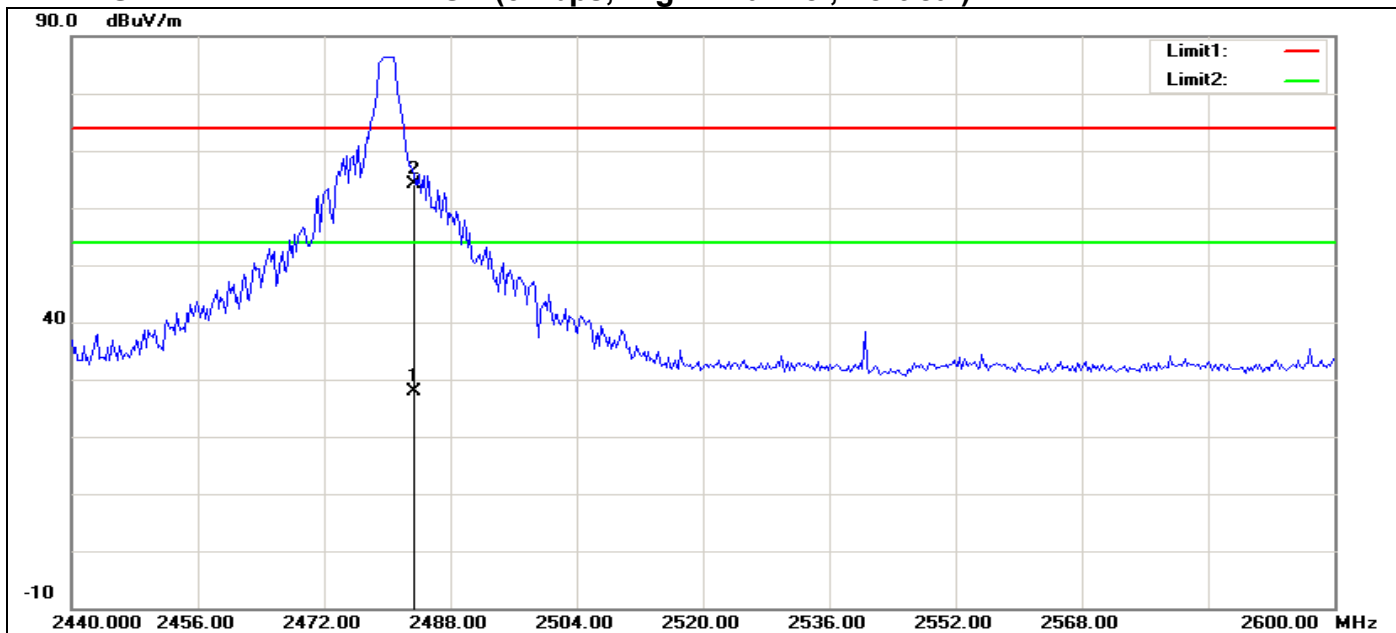

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.400	41.64	-13.65	27.99	54.00	-26.01	100	246	AVG
2	2483.500	77.82	-13.65	64.17	74.00	-9.83	100	246	peak







# Compliance Certification Services Inc.

Report No: C140224R02-RPB

FCC ID: RQQHLT-D205

Date of Issue :March 6, 2014

## Above 1 GHz

**Operation Mode:** 1 Mbps                      **Test Date:** March 5, 2014  
**Test Channel:** CH00                            **Tested by:** Blent.Wang  
**Temperature:** 25°C                            **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4786.859	V	69.03	-8.07	60.96	74.00	-13.04	PEAK
7211.538	V	60.22	-0.59	59.63	74.00	-14.37	PEAK
4786.859	H	63.68	-8.07	55.61	74.00	-18.39	PEAK
7211.538	H	65.15	-0.59	64.56	74.00	-9.44	PEAK

**Operation Mode:** 1 Mbps                      **Test Date:** March 5, 2014  
**Test Channel:** CH39                            **Tested by:** Blent.Wang  
**Temperature:** 25°C                            **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4868.590	V	68.10	-7.72	60.38	74.00	-13.62	PEAK
7320.513	V	53.28	-0.83	52.45	74.00	-21.55	PEAK
4868.590	H	61.92	-7.72	54.20	74.00	-19.80	PEAK
7320.513	H	60.90	-0.83	60.07	74.00	-13.93	PEAK

**Operation Mode:** 1 Mbps                      **Test Date:** March 5, 2014  
**Test Channel:** CH78                            **Tested by:** Blent.Wang  
**Temperature:** 25°C                            **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4950.320	V	64.49	-7.58	56.91	74.00	-17.09	PEAK
7429.487	V	53.18	-0.55	52.63	74.00	-21.37	PEAK
4950.320	H	63.75	-7.58	56.17	74.00	-17.83	PEAK
7429.487	H	61.36	-0.55	60.81	74.00	-13.19	PEAK





**Remark:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
3. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.*
4. *Spectrum setting:*
  - a. *Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.*
  - b. *AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.*



## 6.9 POWERLINE CONDUCTED EMISSIONS


### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

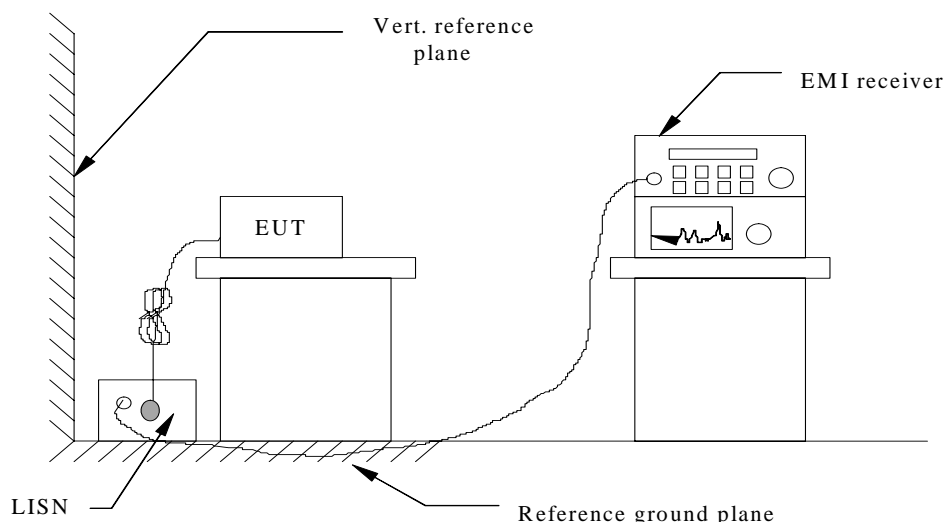

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



# Compliance Certification Services Inc.

Report No: C140224R02-RPB


FCC ID: RQQHLT-D205

Date of Issue :March 6, 2014

## Test Data

<b>Model:</b> D205	<b>Humidity:</b> 51% RH
<b>Temperature:</b> 23°C	<b>Test Results:</b> Pass
<b>Tested by:</b> Blent.Wang	


L1

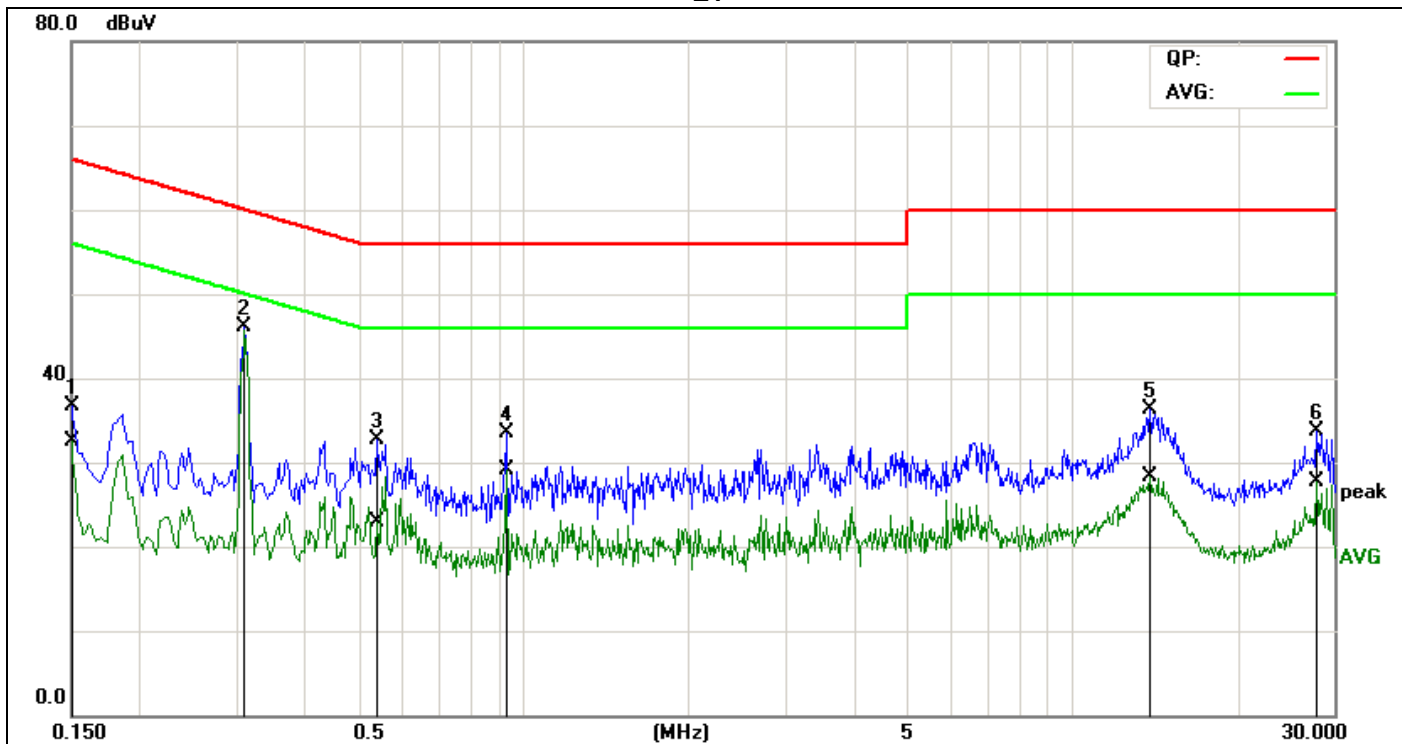

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1500	16.89	12.66	19.81	36.70	32.47	66.00	56.00	-29.30	-23.53	Pass
2*	0.3100	26.49	26.49	19.68	46.17	46.17	59.97	49.97	-13.80	-3.80	Pass
3	0.5420	12.86	2.99	19.83	32.69	22.82	56.00	46.00	-23.31	-23.18	Pass
4	0.9300	13.58	9.31	19.84	33.42	29.15	56.00	46.00	-22.58	-16.85	Pass
5	13.8860	15.52	7.40	20.82	36.34	28.22	60.00	50.00	-23.66	-21.78	Pass
6	27.9260	12.42	6.44	21.32	33.74	27.76	60.00	50.00	-26.26	-22.24	Pass



## L2

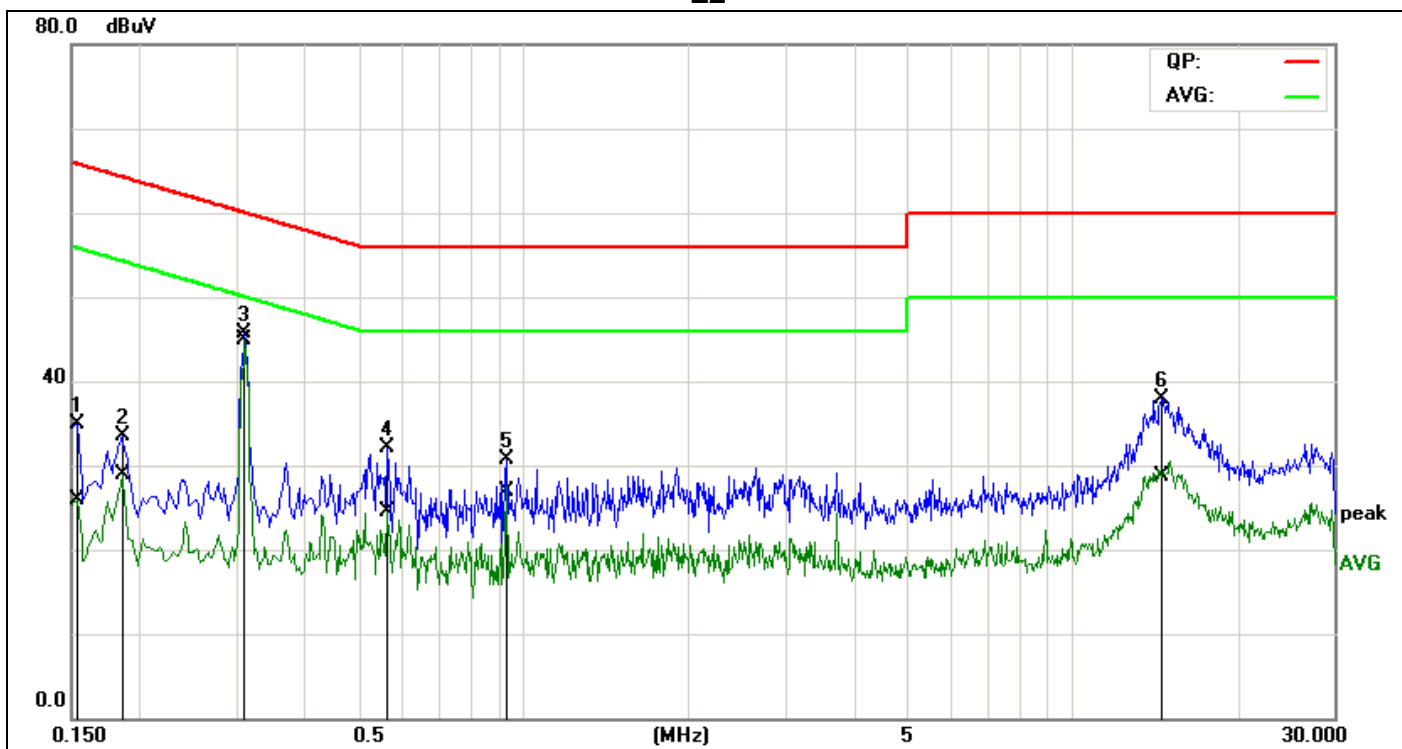

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1540	15.20	6.27	19.72	34.92	25.99	65.78	55.78	-30.86	-29.79	Pass
2	0.1860	13.81	9.14	19.67	33.48	28.81	64.21	54.21	-30.73	-25.40	Pass
3*	0.3100	25.96	25.14	19.72	45.68	44.86	59.97	49.97	-14.29	-5.11	Pass
4	0.5660	12.35	4.56	19.85	32.20	24.41	56.00	46.00	-23.80	-21.59	Pass
5	0.9340	10.84	6.99	19.82	30.66	26.81	56.00	46.00	-25.34	-19.19	Pass
6	14.5420	17.24	8.07	20.69	37.93	28.76	60.00	50.00	-22.07	-21.24	Pass

**Remark:**

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. "—" denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

**END OF REPORT**