



Compliance Certification Services Inc.

Report No: C140224R02-SF

FCC ID: RQQHLT-D205

Date of Issue :March 7, 2014

GSM 850-Right Head Cheek Middle CH190	2
GSM 850-Right Head Tilted Middle CH190	3
GSM 850-Left Head Cheek Middle CH190	4
GSM 850-Left Head Tilted Middle CH190	6
PCS 1900-Right Head Cheek Low CH512	7
PCS 1900-Right Head Tilted Low CH512	9
PCS 1900-Left Head Cheek Low CH512	10
PCS 1900-Left Head Tilted Low CH512	11
GSM 850-Body Up Middle CH190	12
GSM 850-Body Down Middle CH190	13
PCS 1900-Body Up Low CH512	15
PCS 1900-Body Down Low CH512	16



Test Laboratory: Compliance Certification Services Inc.

Date: 2/25/2014

GSM 850-Right Head Cheek Middle CH190

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Right Head Cheek Middle CH190/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.172 W/kg

GSM850/Right Head Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.682 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.201 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

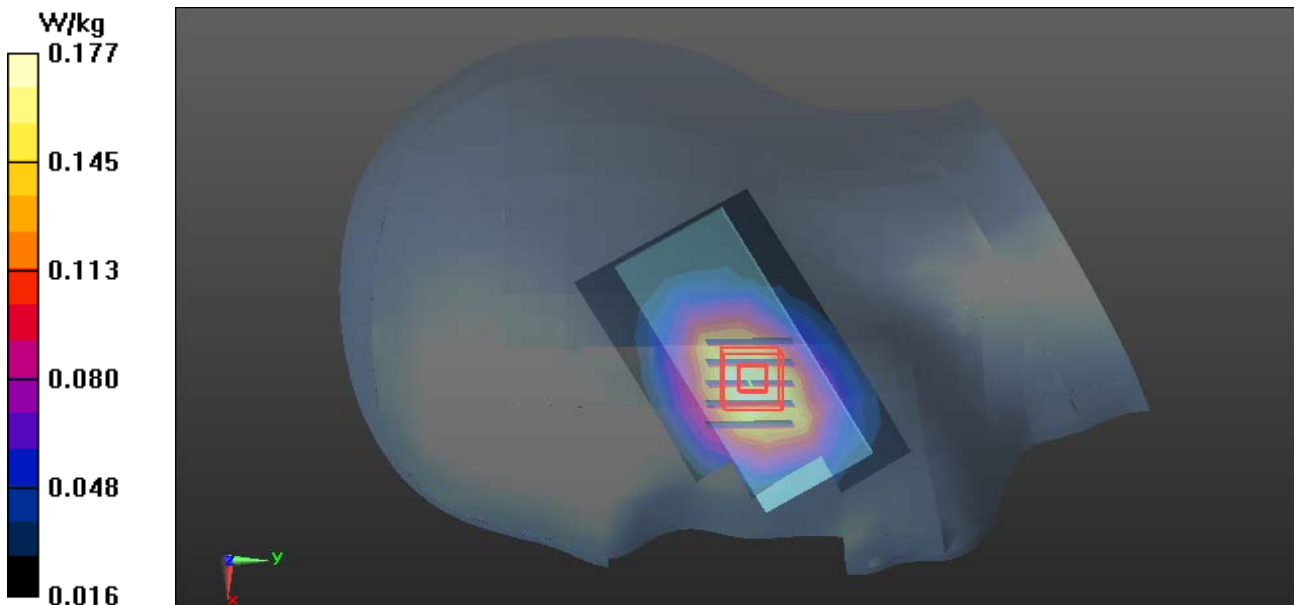



Test Laboratory: Compliance Certification Services Inc.

Date: 2/25/2014

GSM 850-Right Head Tilted Middle CH190

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Right Head Tilted Middle CH190/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0975 W/kg

GSM850/Right Head Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.541 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.0990 W/kg

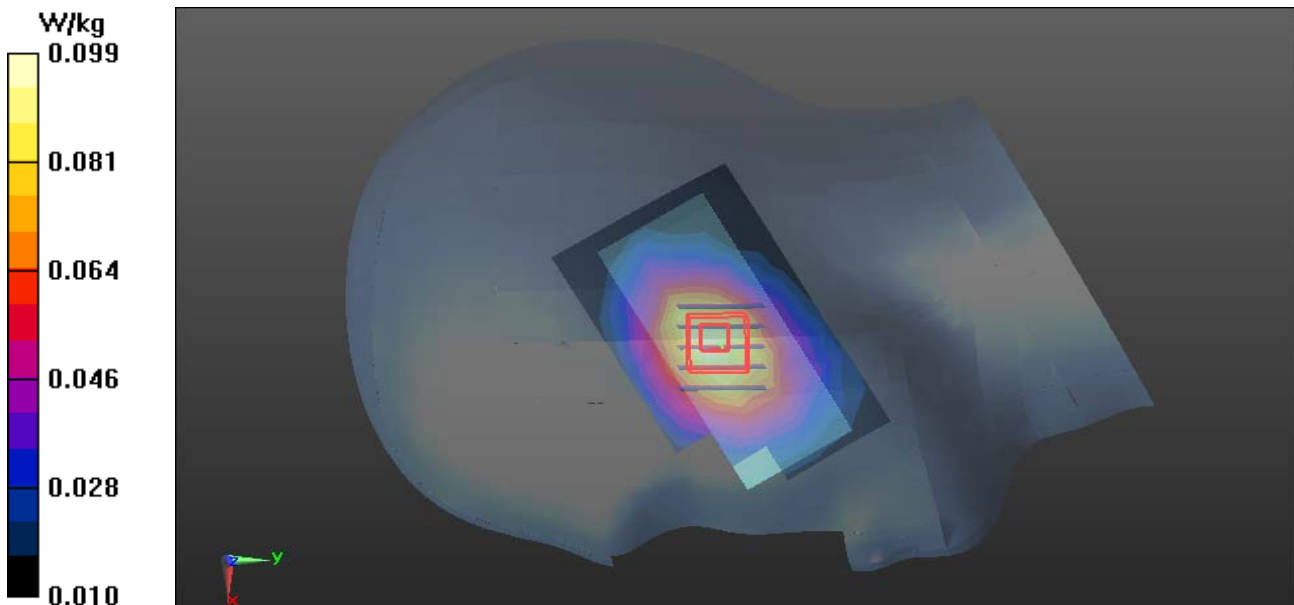



Test Laboratory: Compliance Certification Services Inc.

Date: 2/25/2014

GSM 850-Left Head Cheek Middle CH190

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:8.31764

Medium parameters used: $f = 837$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Left Head Cheek Middle CH190/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.173 W/kg

GSM850/Left Head Cheek Middle CH190/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.349 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

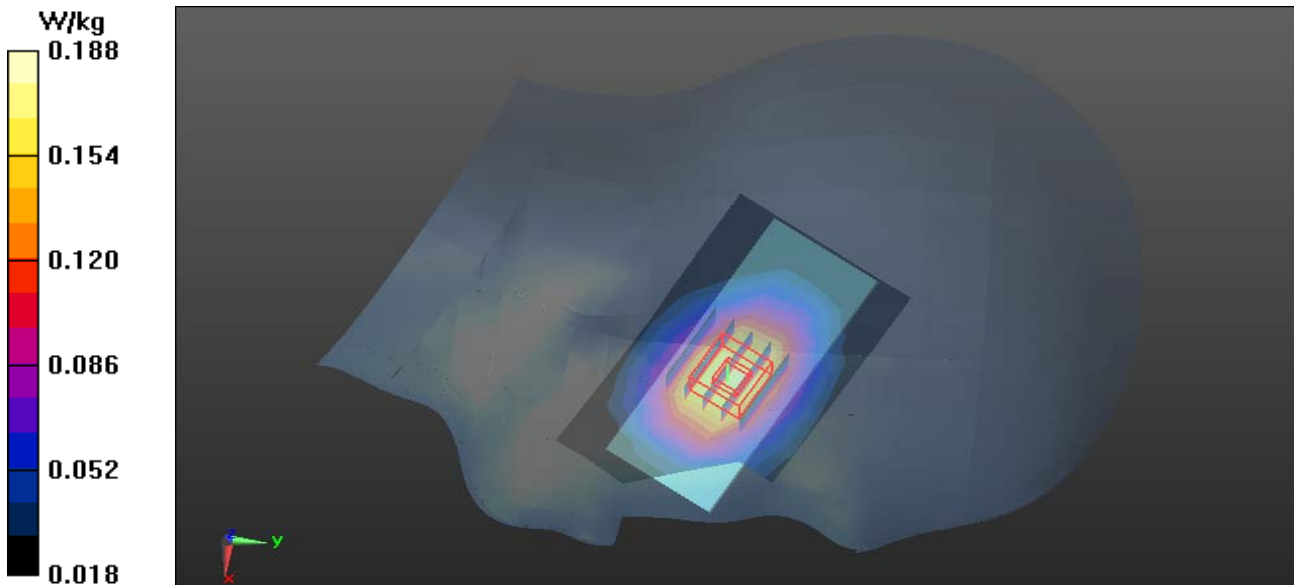

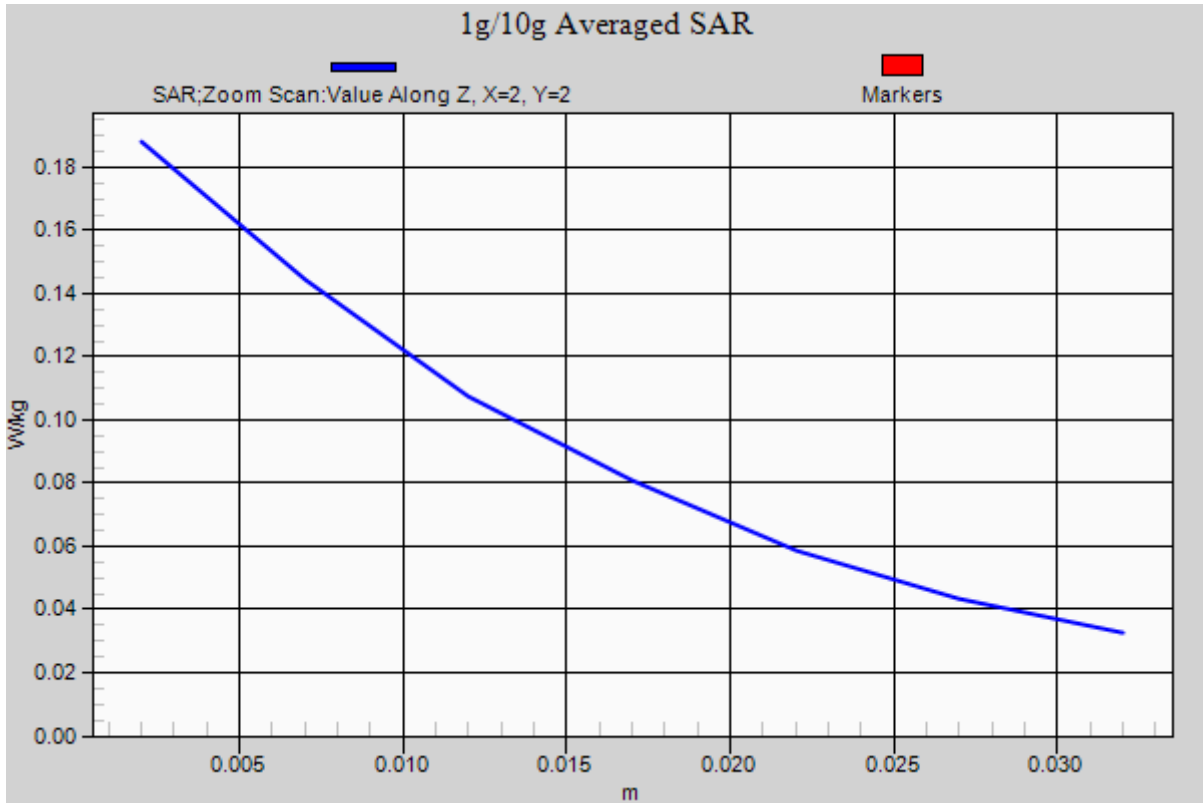



Test Laboratory: Compliance Certification Services Inc.

Date: 2/25/2014

GSM 850-Left Head Tilted Middle CH190

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:8.31764

Medium parameters used: $f = 837$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.072$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.16, 9.16, 9.16); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM850/Left Head Tilted Middle CH190/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0982 W/kg

GSM850/Left Head Tilted Middle CH190/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.795 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

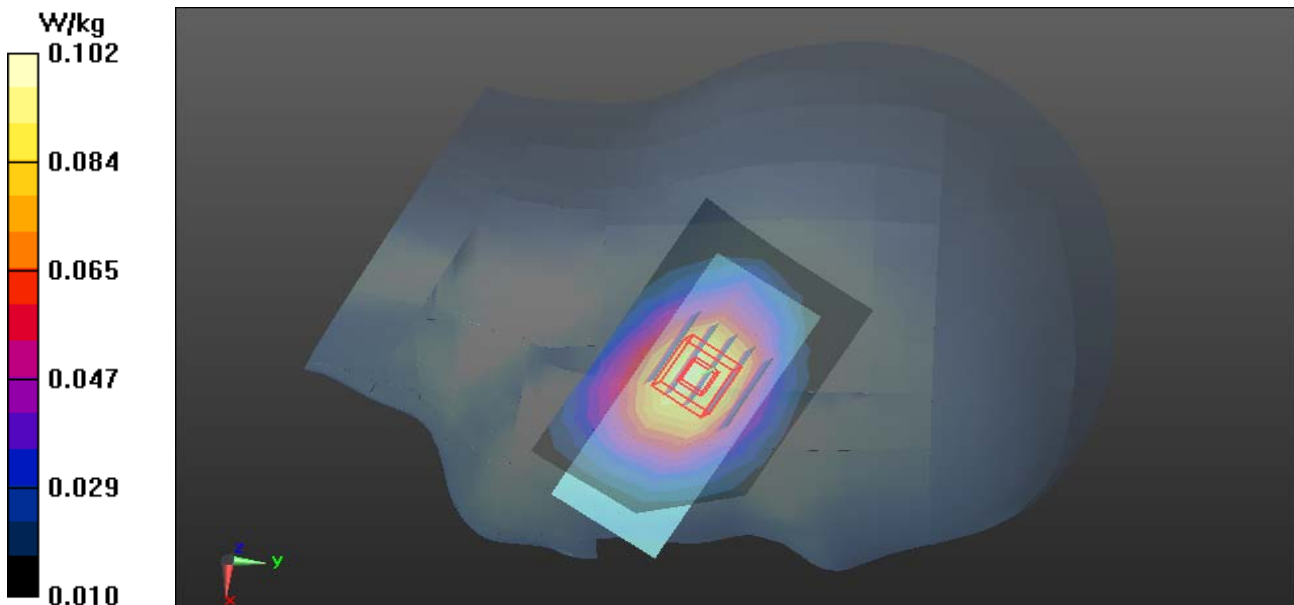



Test Laboratory: Compliance Certification Services Inc.

Date: 2/26/2014

PCS 1900-Right Head Cheek Low CH512

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 38.62$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Right Head Cheek Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.794 W/kg

PCS1900/Right Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.882 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.899 W/kg

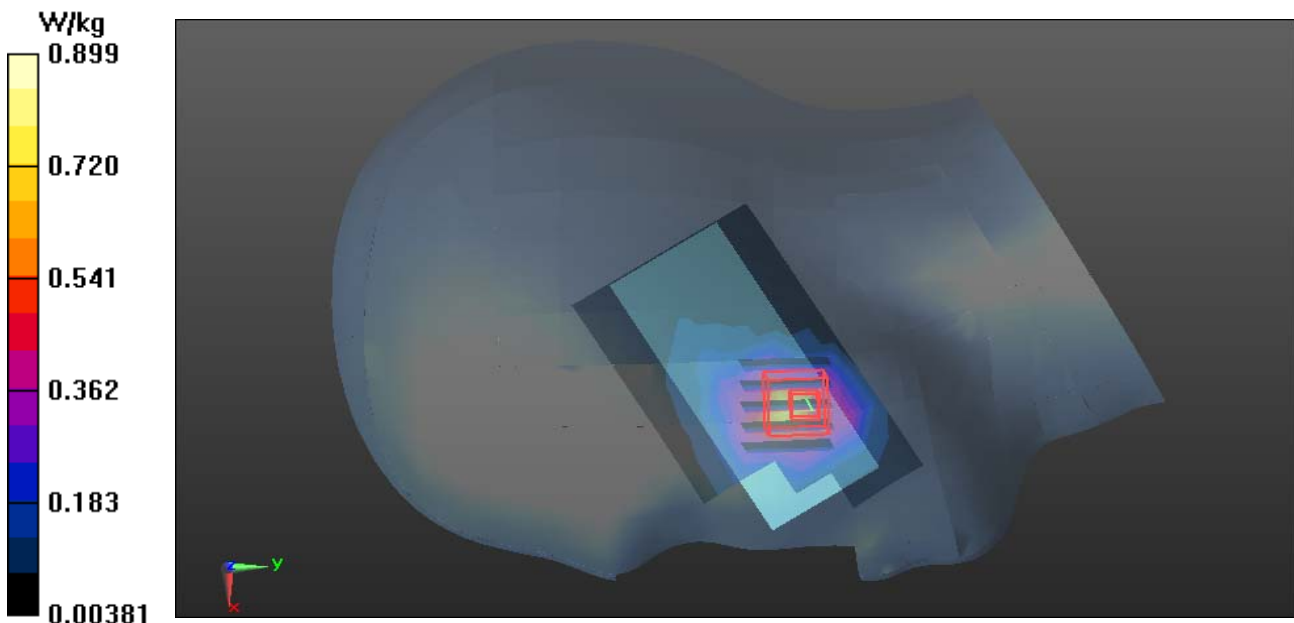

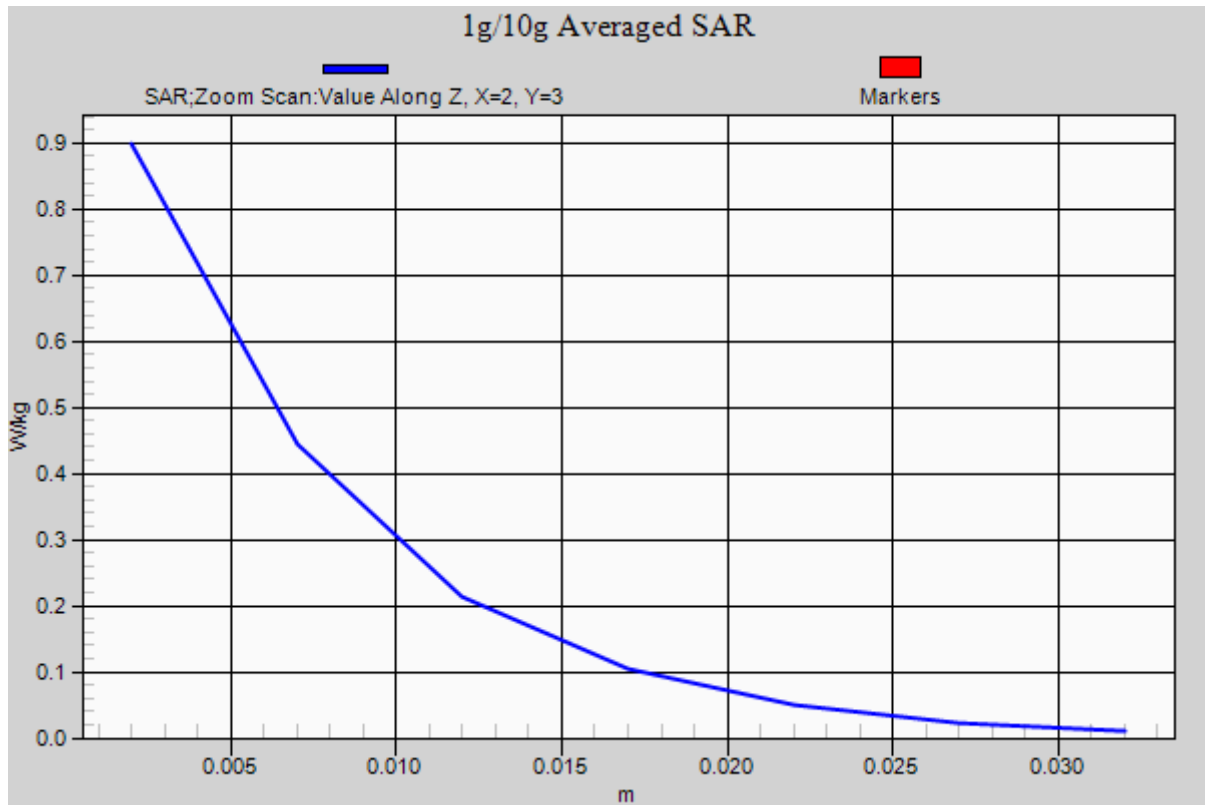



Test Laboratory: Compliance Certification Services Inc.

Date: 2/26/2014

PCS 1900-Right Head Tilted Low CH512

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 38.62$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Right Head Tilted Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.108 W/kg

PCS1900/Right Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.299 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

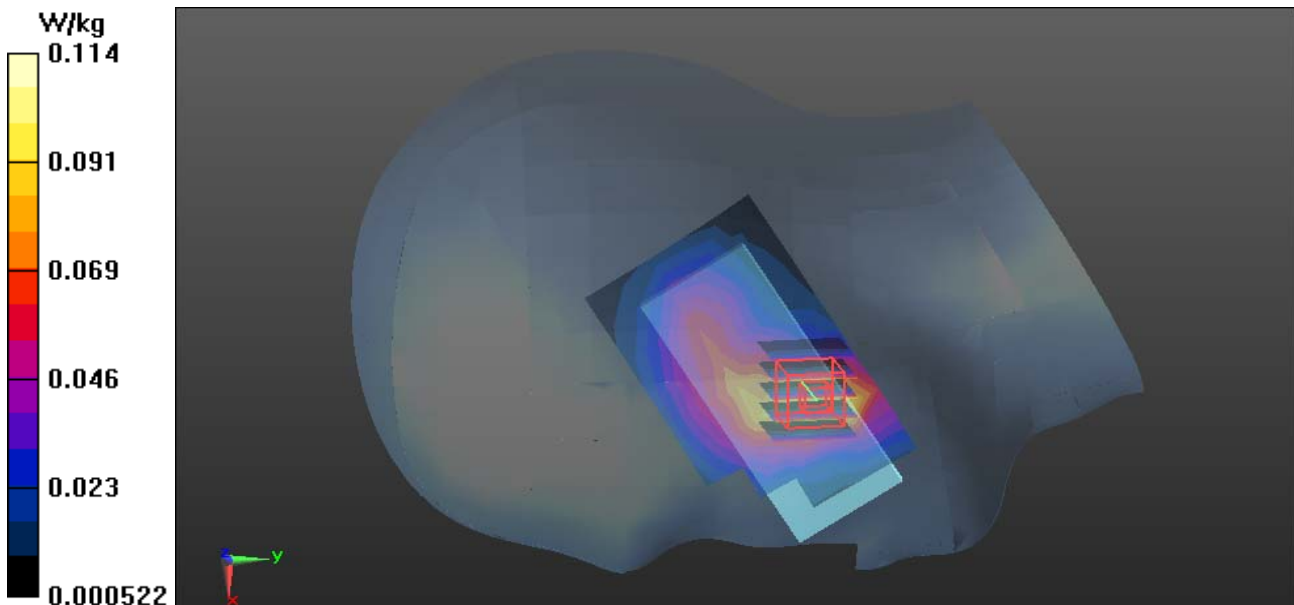



Test Laboratory: Compliance Certification Services Inc.

Date: 2/26/2014

PCS 1900-Left Head Cheek Low CH512

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 38.62$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Left Head Cheek Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.575 W/kg

PCS1900/Left Head Cheek Low CH512/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.550 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.820 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.221 W/kg

Maximum value of SAR (measured) = 0.580 W/kg

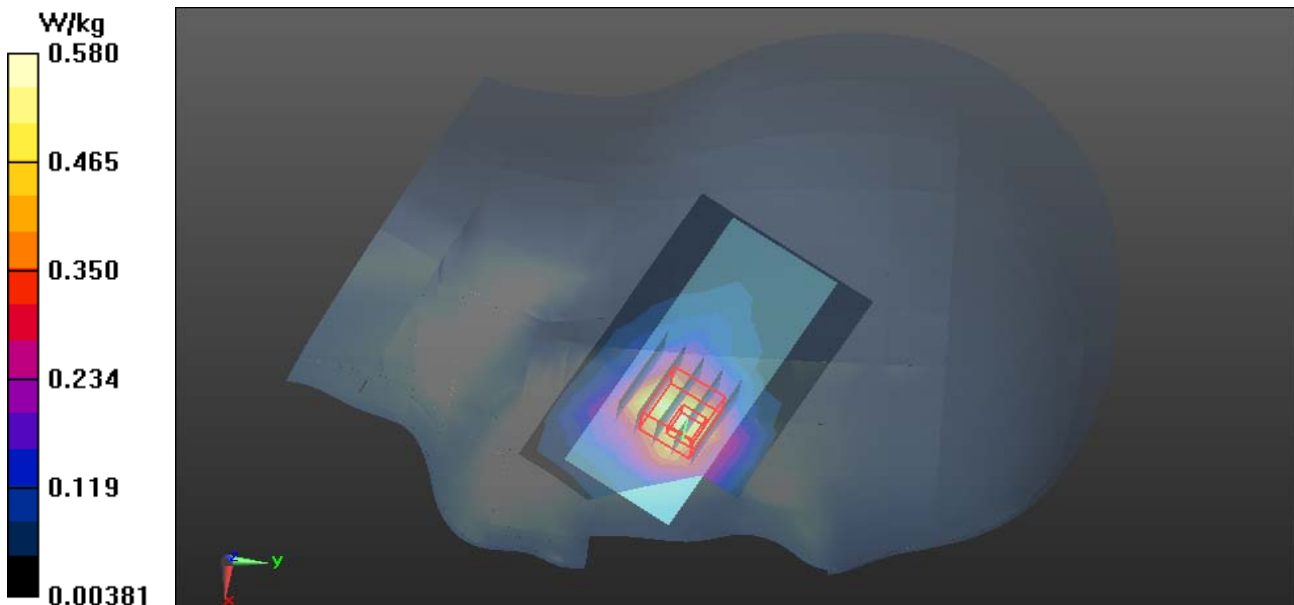



Test Laboratory: Compliance Certification Services Inc.

Date: 2/26/2014

PCS 1900-Left Head Tilted Low CH512

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 38.62$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.73, 7.73, 7.73); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/Left Head Tilted Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0965 W/kg

PCS1900/Left Head Tilted Low CH512/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.120 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.0985 W/kg

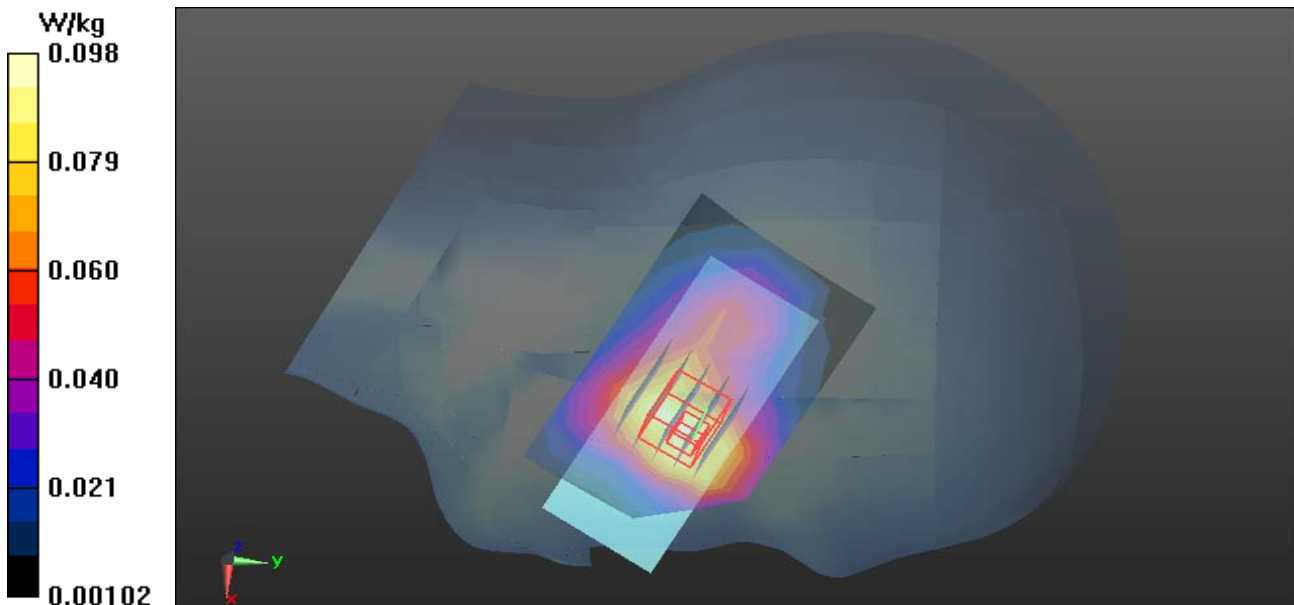



Test Laboratory: Compliance Certification Services Inc.

Date: 2/25/2014

GSM 850-Body Up Middle CH190

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM 850/GSM850 Body Up Middle CH190/Area Scan (10x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.210 W/kg

GSM 850/GSM850 Body Up Middle CH190/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.148 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

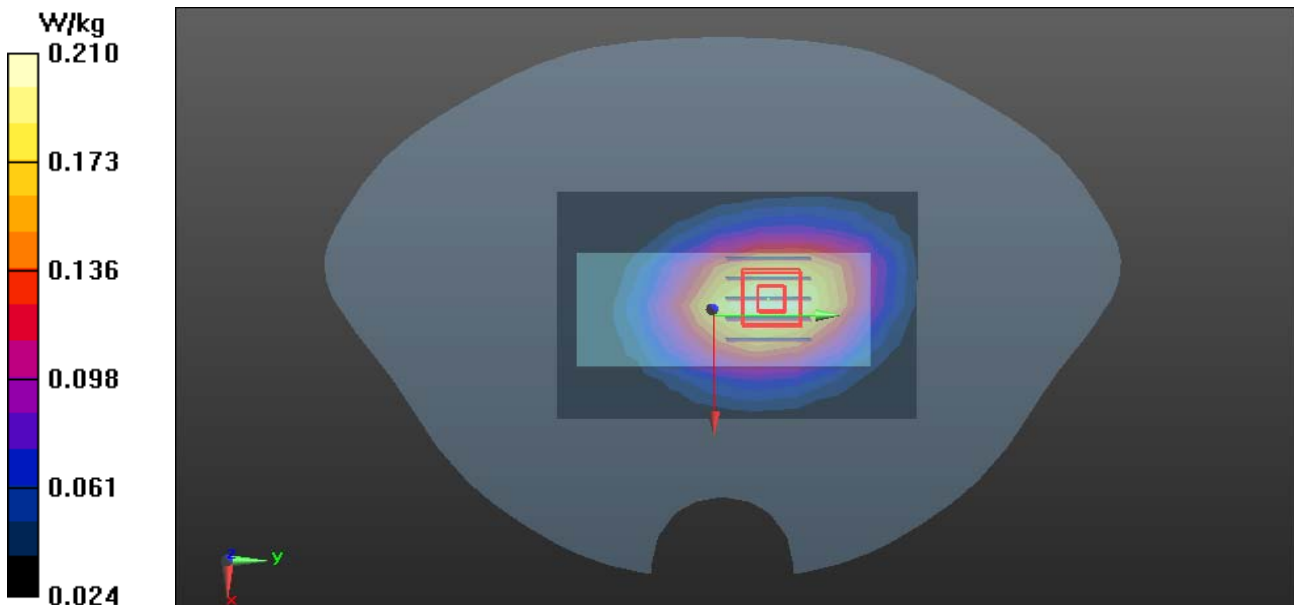



Test Laboratory: Compliance Certification Services Inc.

Date: 2/25/2014

GSM 850-Body Down Middle CH190

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 52.88$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM 850/GSM850 Body Down Middle CH190/Area Scan (10x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.374 W/kg

GSM 850/GSM850 Body Down Middle CH190/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 18.911 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

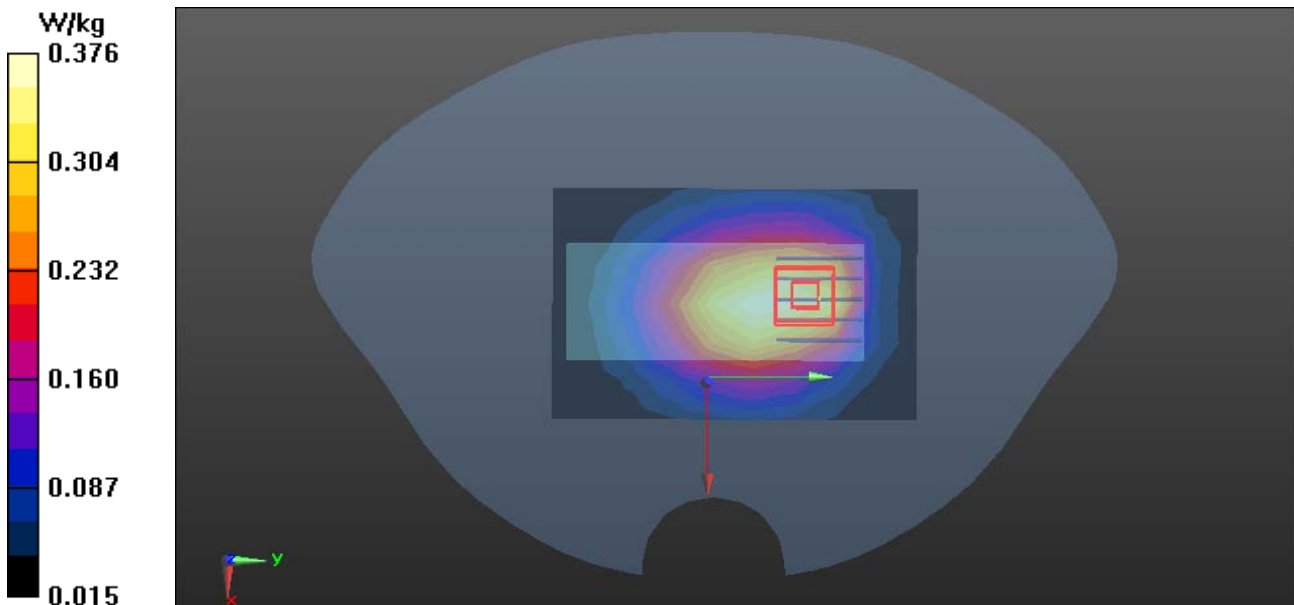

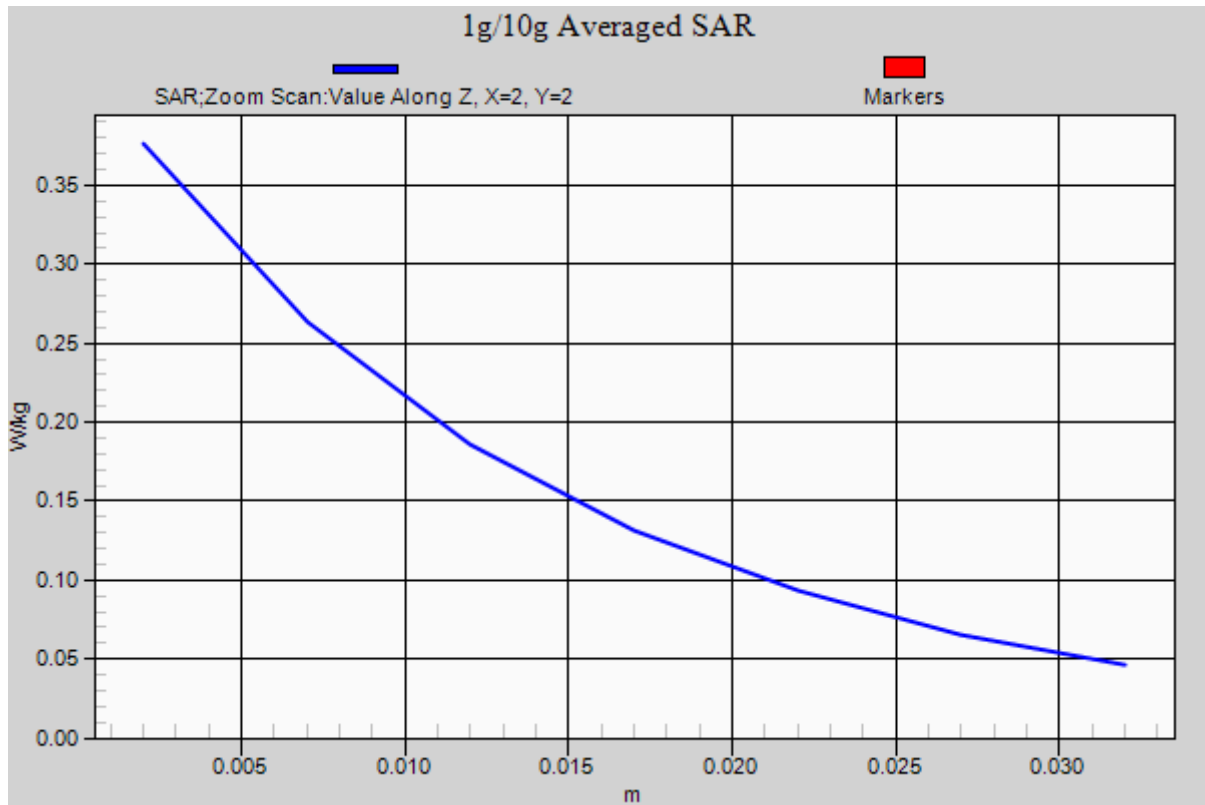



Test Laboratory: Compliance Certification Services Inc.

Date: 2/26/2014

PCS 1900-Body Up Low CH512

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS 1900/Body Up Low CH512/Area Scan (10x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.206 W/kg

PCS 1900/Body Up Low CH512/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.291 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.243 W/kg

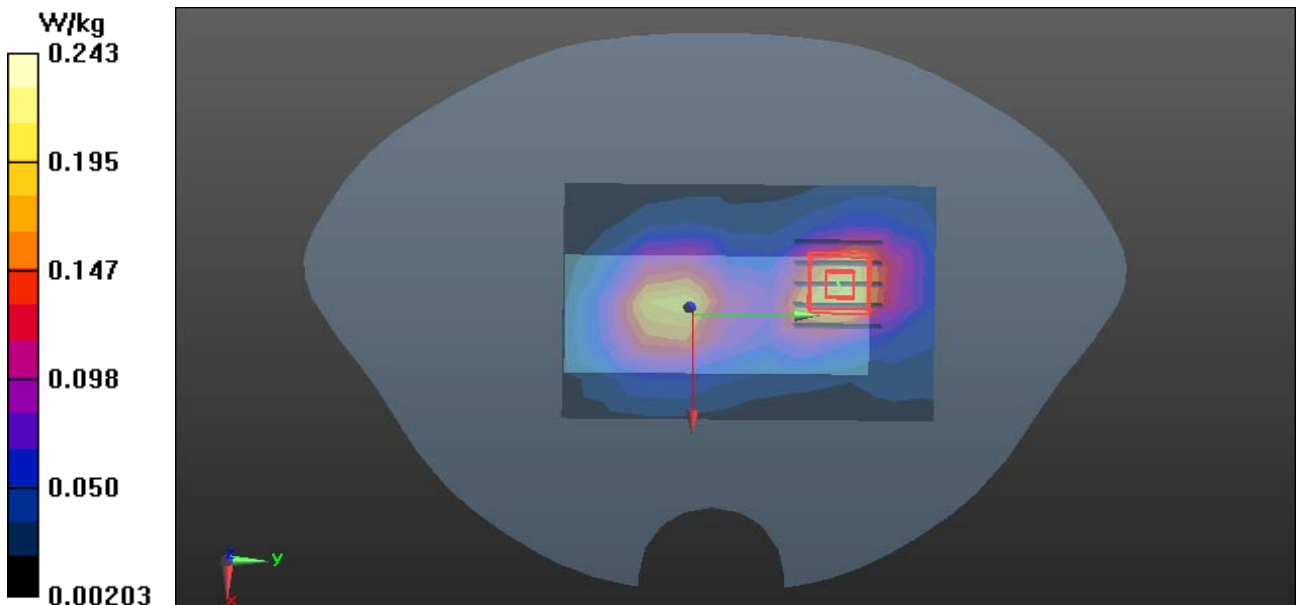



Test Laboratory: Compliance Certification Services Inc.

Date: 2/26/2014

PCS 1900-Body Down Low CH512

DUT: Mobile Phone; Type: D205; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.739$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS 1900/Body Down Low CH512/Area Scan (10x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.549 W/kg

PCS 1900/Body Down Low CH512/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.467 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.564 W/kg

