



FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: MWR1409002905

FCC ID.....: RQQHLT-E415

Compiled by

(position+printed name+signature)....: File administrators Martin Ao

Supervised by

(position+printed name+signature)....: Test Engineer Martin Ao

Approved by

(position+printed name+signature)....: Manager Dixon Hao

Date of issue.....: Sep 28, 2014

Representative Laboratory Name : **Maxwell International Co., Ltd.**

Address: Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China

Testing Laboratory Name: **Shenzhen CTL Testing Technology Co., Ltd.**

Address: Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen, China

Applicant's name.....: **HYUNDAI CORPORATION**

Address: 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

Test specification

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Maxwell International Co., Ltd.

Master TRF.....: Dated 2011-05

Maxwell International Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material.

Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Mobile Phone

Trade Mark: HYUNDAI

Manufacturer.....: **WASAM TECHNOLOGY (SHEN ZHEN) CO.,LTD.**

Model/Type reference.....: E415

Listed Models: /

Modulation Type: DSSS(CCK,DQPSK,DBPSK),OFDM(64QAM,16QAM,QPSK, BPSK)

Operation Frequency.....: From 2412MHz to 2462MHz

Rating: DC 3.70V

Hardware version: HYUNDAI_W407_V1.0

Software version: HYUNDAI_W407_V1.0

Result.....: **PASS**

TEST REPORT

Test Report No. :	MWR1409002905	Sep 28, 2014 Date of issue
--------------------------	----------------------	-------------------------------

Equipment under Test : Mobile Phone

Model /Type : E415

Listed Models : /

Applicant : **HYUNDAI CORPORATION**

Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

Manufacturer : **WASAM TECHNOLOGY (SHEN ZHEN) CO.,LTD.**

Address : B,F Building, (Hengqiang Industrial Park), Bogang Taifeng Industrial Zone, Shajing Town, Bao'an District, Shenzhen, China.

Test Result	PASS
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Description of the test mode	5
2.5.	Short description of the Equipment under Test (EUT)	5
2.6.	EUT operation mode	7
2.7.	EUT configuration	8
2.8.	Internal Identification of AE used during the test	8
2.9.	Related Submittal(s) / Grant (s)	8
2.10.	Modifications	8
2.11.	Test Environments	8
2.12.	NOTE	8
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>10</u>
3.1.	Address of the test laboratory	10
3.2.	Test Facility	10
3.3.	Environmental conditions	10
3.4.	Test Description	10
3.5.	Statement of the measurement uncertainty	10
3.6.	Equipments Used during the Test	11
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
4.1.	AC Power Conducted Emission	12
4.2.	Radiated Emission	14
4.3.	Maximum Peak Output Power	22
4.4.	Power Spectral Density	24
4.5.	Band Edge Compliance of RF Emission	33
4.6.	Spurious RF Conducted Emission	44
4.7.	6dB Bandwidth	107
4.8.	Antenna Requirement	116
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>117</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2 . SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Sep 10, 2014
Testing commenced on	:	Sep 10, 2014
Testing concluded on	:	Sep 28, 2014

2.2. Product Description

The HYUNDAI CORPORATION's Model: E415 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone
Model Number	E415
FCC ID	RQQHLT-E415
Modulation Type	GMSK for GSM/GPRS;QPSK for WCDMA
Antenna Type	Internal
GSM/EDGE/GPRS	Supported GPRS
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.70VDC)
GSM Operation Frequency Band	GSM 850MHz/ PCS 1900MHz
GSM Release Version	R99
GPRS operation mode	Class B
GPRS Multislot Class	12
EGPRS Multislot Class	Only support downlink mode

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/>	120V / 60 Hz	<input type="radio"/>	115V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 3.70V

2.4. Description of the test mode

IEEE 802.11b/g/n: The product support Third channels but only use Eleventh channels in USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.5. Short description of the Equipment under Test (EUT)

2.5.1 General Description

E415 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band II, Band IV; The GSM/GPRS/EDGE (EDGE downlink only) frequency and includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in

this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

2.5.2 EUT Identity

IMEI No.	
SIM 1	135790246811220
SIM 2	135790246811228

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

2.5.3 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, All TX tests are performed at all TX antenna ports of the EUT, and All RX tests are performed at all RX antenna ports of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

2.5.4 Test Modes

Test Case	Test Conditions	
	Configuration	Description
DTS (6 dB) Bandwidth	Measurement Method	FCC KDB 558074 §7.1.1Option2.
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
	Measurement Method	FCC KDB 558074§7.2.1.1
Maximum Peak Conducted Output Power	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
	Measurement Method	FCC KDB 558074 §7.3.1Option 1 (peak PSD).
Maximum Power Spectral Density Level	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
	Measurement Method	FCC KDB 558074§7.4.1, use Peak PSD.
	Test Environment	NTNV
Unwanted Emissions into Non-Restricted Frequency Bands	Test Setup	Test Setup 1
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
	Measurement Method	FCC KDB 558074§7.4.2, Conducted (antenna-port).
	Test Environment	NTNV
Unwanted Emissions into Restricted Frequency Bands (Conducted)	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H
	Measurement Method	FCC KDB 558074§7.4.2,Radiated(cabinet/case
Unwanted Emissions into Restricted		

		emissions with Impedance matching for antenna-port).
	Test Environment	NTNV
	EUT Configuration	11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H 11n HT40_L, 11n HT40_M, 11n HT40_H

Test Case	Test Conditions	
	Configuration	Description
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	EUT Configuration	11g_M (Worst Conf.).

Note: 1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

2. Typical working modes for each IEEE 802.11 mode are selected to perform tests. The manufacturer provide special test software to control TX duty cycle >98% for TX test; recorded worst case at difference data rate as follows:

Test Mode	Test Modes Description
11b	IEEE 802.11b with data rate of 1 Mbps using SISO mode.
11g	IEEE 802.11g with data rate of 6 Mbps using SISO mode.
11n HT20	IEEE 802.11n with data date of MCS0 and bandwidth of 20MHz using SISO mode.
11n HT40	IEEE 802.11n with data date of MCS7 and bandwidth of 40MHz using SISO mode.

2.6. EUT operation mode

Test Mode	RF Ch.	BG Port	TX Freq. [MHz]	RX Freq. [MHz]	Ch. BW [MHz]
11b	L	BG 1	Ch No. 1 / 2412MHz	---	20
		BG2		---	20
	M	BG 1	Ch No. 6 / 2437 MHz	---	20
		BG2		---	20
	H	BG 1	Ch No. 11/ 2462MHz	---	20
		BG2		---	20
11g	L	BG 1	Ch No. 1 / 2412MHz	---	20
		BG2		---	20
	M	BG 1	Ch No. 6 / 2437 MHz	---	20
		BG2		---	20
	H	BG 1	Ch No. 11/ 2462MHz	---	20
		BG2		---	20
11n HT20	L	BG 1	Ch No. 1 / 2412MHz	---	20
		BG2		---	20
	M	BG 1	Ch No. 6 / 2437 MHz	---	20
		BG2		---	20
	H	BG 1	Ch No. 11/ 2462MHz	---	20
		BG2		---	20
11n HT40	L	BG 1	Ch No. 3/ 2422MHz	---	40
		BG2		---	40
	M	BG 1	Ch No. 6 / 2437 MHz	---	40
		BG2		---	40
	H	BG 1	Ch No. 9/ 2452 MHz	---	40
		BG2		---	40

2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

2.8. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger and USB cable

AE1

Model: E415
Capacitance: 1400mAh
Nominal Voltage: 3.70V

AE2:

Model: E415

*AE ID: is used to identify the test sample in the lab internally.

2.9. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: RQQHLT-E415** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.10. Modifications

No modifications were implemented to meet testing criteria.

2.11. Test Environments

NOTE: The values used in the test report maybe stringent than the declared.

Environment Parameter	Selected Values During Tests		
NTNV	Temperature	Voltage	Relative Humidity
	Ambient	3.7VDC	Ambient

2.12. NOTE

1. The EUT is a Mobile Phone with WCDMA/GSM/GPRS,WiFi and Bluetooth fuction,The functions of the EUT listed as below:

	Test Standards	Reference Report
GSM/GPRS	FCC Part 22/FCC Part 24	MWR1409002901
WCDMA	FCC Part 22/FCC Part 24	MWR1409002902
Bluetooth	FCC Part 15 C 15.247	MWR1409002903
BLE	FCC Part 15 C 15.247	MWR1409002904
WiFi	FCC Part 15 C 15.247	MWR1409002905
USB Port	FCC Part 15 B	MWR1409002906
SAR	FCC Part 2 §2.1093	MWR1409002907

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	✓	—	—	—
802.11g	✓	—	—	—
802.11n HT20	✓	—	—	—
802.11n HT40	✓	—	—	—

3. The EUT incorporates a SISO function, Physically, the EUT provides one completed transmitter and one completed receiver.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n HT20	1TX
802.11n HT40	1TX

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, Dec 19, 2013

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Test Description

Test Item	FCC Part No.	Requirements	Verdict
DTS (6 dB) Bandwidth	15.247(a)(2)	$\geq 500 \text{ kHz}$.	PASS
Maximum Peak Conducted Output Power	15.247(b)(3)	For directional gain:< 30dBm – (G[dBi] –6 [dB]), peak; Otherwise :< 30dBm, peak.	PASS
Maximum Power Spectral Density Level	15.247(e)	For directional gain :< 8dBm/3 kHz – (G[dBi] –6[dB]), peak. Otherwise :< 8dBm/3 kHz, peak.	PASS
Band Edges Compliance	15.247(d)	< -20dB/100 kHz if total peak power \leq power limit.	PASS
Unwanted Emissions into Non-Restricted Frequency Bands	15.247(d)	< -20dB/100 kHz if total peak power \leq power limit.	PASS
Unwanted Emissions into Restricted Frequency Bands (Conducted)	15.247(d) 15.209	< -20dB/100 kHz if total peak power \leq power limit.	PASS
Unwanted Emissions into Restricted Frequency Bands (Radiated)	15.247(d) 15.209	FCC Part 15.209 field strength limit;	PASS
AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	PASS

Remark: The measurement uncertainty is not included in the test result.

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may

result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTL Testing Technology Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-12.75 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 9KHz-30MHz	2.88 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

3.6. Equipments Used during the Test

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ENV216	101316	2014/07/02
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	103710	2014/07/02
3	Pulse Limiter	Com-Power	LIT-153	53226	2014/07/01
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2014/07/12
2	EMI TEST Receivcer	Rohde&Schwarz	ESCI3	103710	2014/07/02
3	EMI TEST Software	Audix	E3	N/A	N/A
4	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
5	HORN ANTENNA	Sunol Sciences Corp.	DRH-118	A062013	2014/07/12
6	Amplifier	HP	8447D	3113A07663	2013/10/27
7	Preamplifier	HP	8349B	3155A00882	2014/07/03
8	Amplifier	Compliance Direction systems	PAP1-4060	129	2014/07/03
9	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2014/06/29
10	TURNTABLE	MATURO	TT2.0	---	N/A
11	ANTENNA MAST	MATURO	TAM-4.0-P	---	N/A
12	Horn Antenna	SCHWARZBECK	BBHA9170	25849	2014/06/21
13	Spectrum Analyzer	Rohde&Schwarz	FSU26	201148	2014/07/02


Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde&Schwarz	FSU26	201148	2014/07/02
2	Power Sensor	Rohde&Schwarz	NRR-Z81	256697	2014/07/02
3	MXA Signal Analyzer	Agilent	N9020A	MY53420615	2014/05/12

The Cal.Interval was one year

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

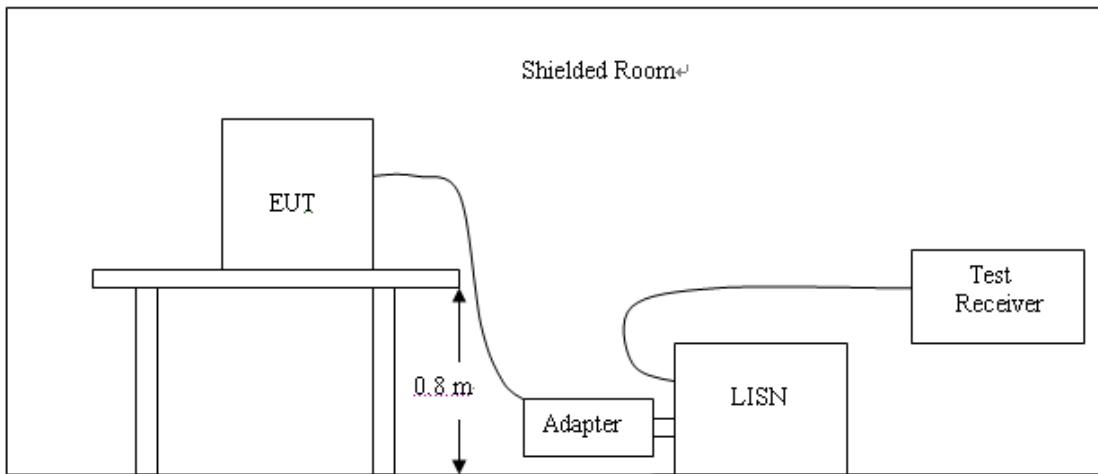

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
2. Support equipment, if needed, was placed as per ANSI C63.10-2009
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit


For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

The AC Power Conducted Emission measurement is performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test modes and channels.

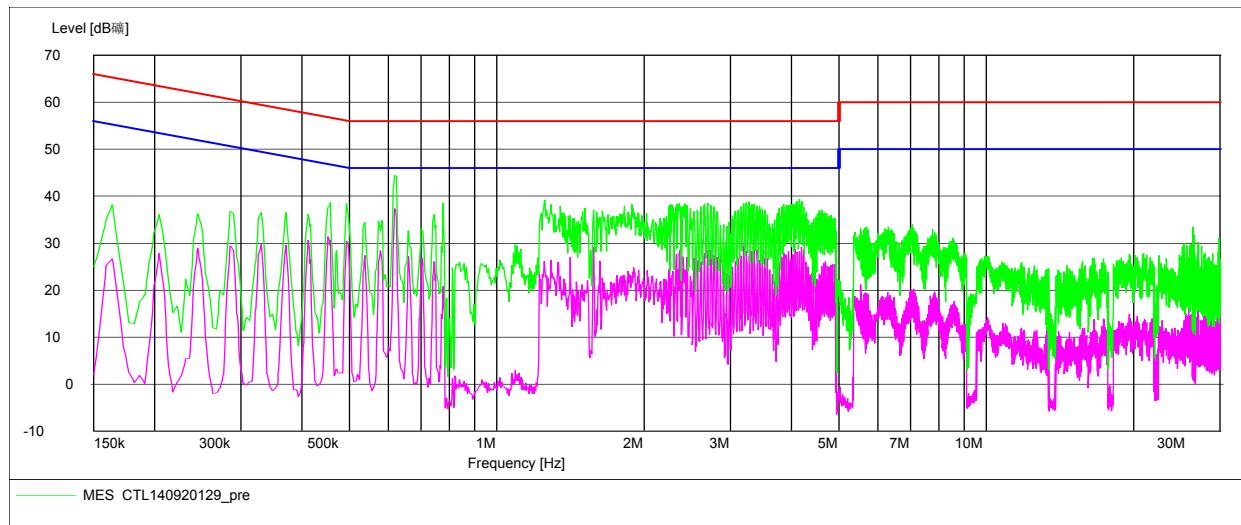

Frequency MHz	Level dB _μ V	Transd dB	Limit dB _μ V	Margin dB	Detector	Line
0.620000	40.70	10.2	56	15.3	QP	L1
1.244000	37.40	10.3	56	18.6	QP	L1
3.272000	36.20	10.4	56	19.8	QP	L1
0.458000	27.10	10.2	47	19.6	AV	L1
0.498000	29.50	10.2	46	16.5	AV	L1
0.608000	23.70	10.2	46	22.3	AV	L1

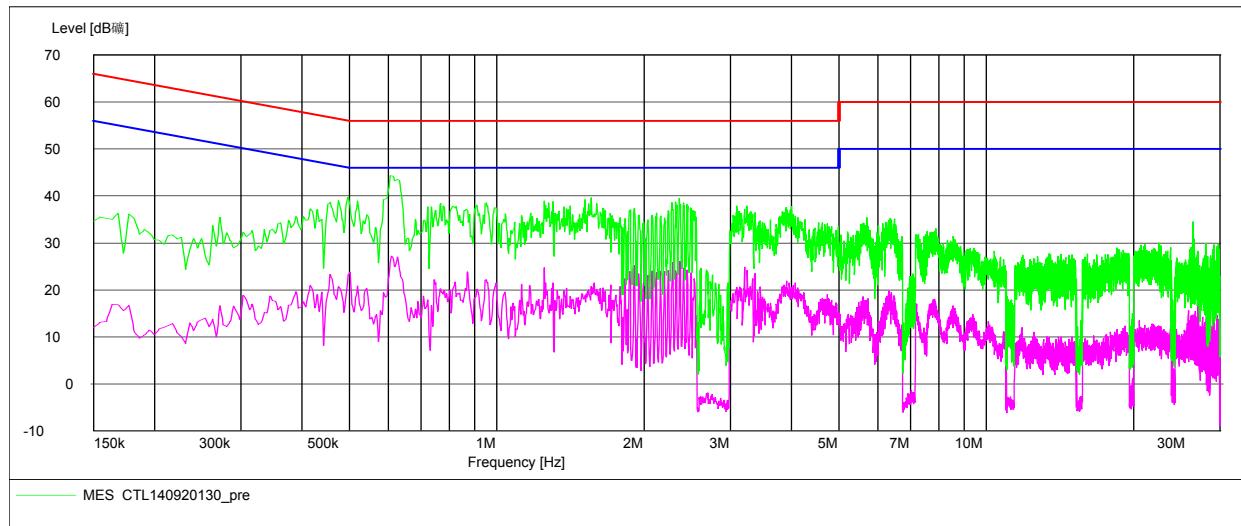


Frequency MHz	Level dB _μ V	Transd dB	Limit dB _μ V	Margin dB	Detector	Line
0.602000	40.00	10.2	56	16.0	QP	N
1.556000	34.50	10.3	56	21.5	QP	N
2.384000	34.20	10.4	56	21.8	QP	N
0.626000	29.10	10.2	46	16.9	AV	N
2.330000	23.10	10.4	46	22.9	AV	N
2.336000	22.60	10.4	46	23.4	AV	N


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9KHz – 30MHz

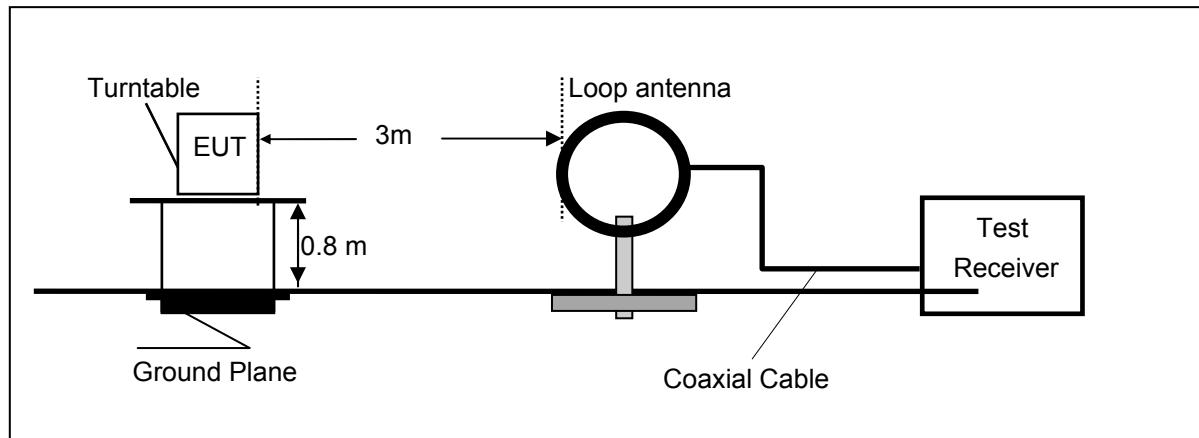

Frequency range 30MHz – 1000MHz

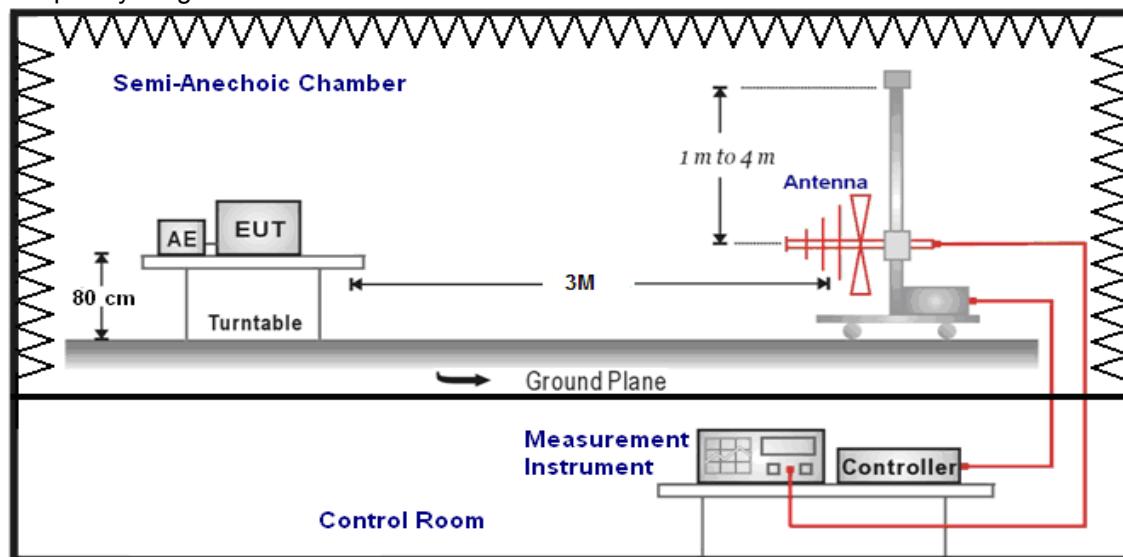

Frequency range above 1GHz-25GHz

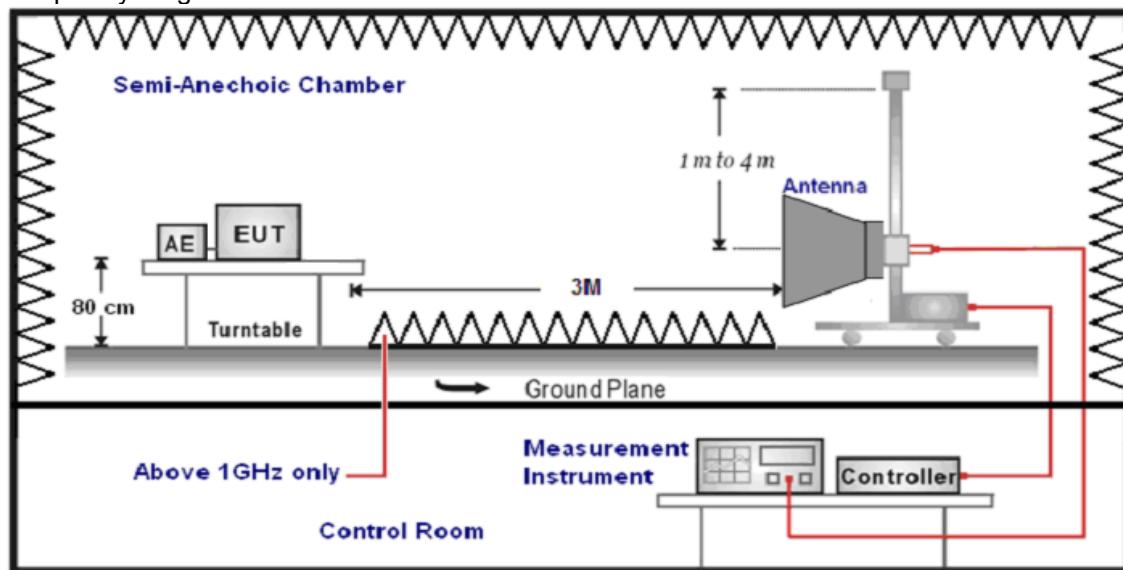

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2462MHz.so radiated emission test frequency band from 9KHz to 25GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{FS} = \text{RA} + \text{AF} - \text{AG}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz,VBW=10Hz for Average Detector,Readings are both peak and average values.

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	300	20log(2400/F(KHz))+80	2400/F(KHz)
0.49-1.705	30	20log(24000/F(KHz))+40	24000/F(KHz)
1.705-30	30	20log(30)+40	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS


Remark:

1. The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. We tested both battery powered and powered by adapter charging mode at three orientate ons, recorded worst case at powered by adapter charging mode.
5. “---” means not recorded as emission levels lower than limit.

For 9KHz to 30MHz

Frequency (MHz)	Corrected Reading (dB μ V/m)@3m	FCC Limit (dB μ V/m) @3m	Margin (dB)	Detector	Result
12.00	44.10	69.54	25.44	QP	PASS
24.00	46.86	69.54	22.68	QP	PASS

For 30MHz to 1000MHz

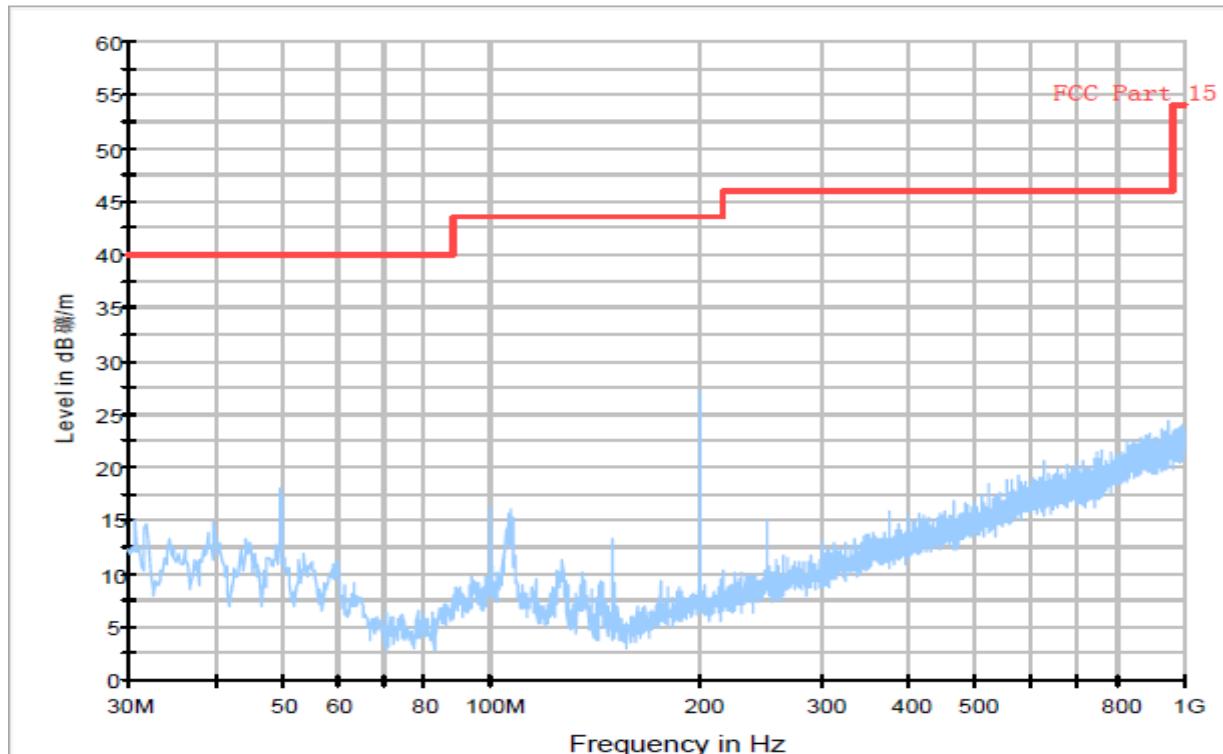

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Ant. Polar. H / V
	---					Peak	H & V

For 1GHz to 25GHz

802.11b Mode(above 1GHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2412MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	57.11	PK	74.00	16.89	1.00	202	55.01	31.60	7.00	36.5	2.10
1	4824.00	43.64	AV	54.00	10.36	1.00	202	41.54	31.60	7.00	36.5	2.10
2	7236.00	59.02	PK	74.00	14.98	1.00	288	48.09	37.33	8.90	35.3	10.93
2	7236.00	42.79	AV	54.00	11.21	1.00	288	31.86	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2412MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	55.08	PK	74.00	18.92	1.00	35	52.98	31.60	7.00	36.5	2.10
1	4824.00	40.96	AV	54.00	13.04	1.00	35	38.86	31.60	7.00	36.5	2.10
2	7236.00	57.71	PK	74.00	16.29	1.00	177	46.78	37.33	8.90	35.3	10.93
2	7236.00	40.32	AV	54.00	13.68	1.00	177	29.39	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2437MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	58.76	PK	74.00	15.24	1.00	199	56.64	31.60	7.00	36.5	2.12
1	4824.00	44.08	AV	54.00	9.92	1.00	199	41.96	31.60	7.00	36.5	2.12
2	7236.00	59.89	PK	74.00	14.11	1.00	27	48.81	37.33	8.90	35.3	11.08
2	7236.00	43.03	AV	54.00	10.97	1.00	27	31.95	37.33	8.90	35.3	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2437MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	56.16	PK	74.00	17.84	1.00	108	54.04	31.02	7.60	36.5	2.12
1	4874.00	42.55	AV	54.00	11.45	1.00	108	40.43	31.02	7.60	36.5	2.12
2	7311.00	57.93	PK	74.00	16.07	1.00	124	46.85	37.28	8.60	34.8	11.08
2	7311.00	41.25	AV	54.00	12.75	1.00	124	30.17	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2462MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	57.91	PK	74.00	16.09	1.00	319	55.53	31.58	7.00	36.2	2.38
1	4924.00	42.85	AV	54.00	11.15	1.00	319	40.47	31.58	7.00	36.2	2.38
2	7386.00	58.77	PK	74.00	15.23	1.00	177	47.06	38.51	8.50	35.3	11.71
2	7386.00	42.72	AV	54.00	11.28	1.00	177	31.01	38.51	8.50	35.3	11.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2462MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	55.16	PK	74.00	18.84	1.00	128	52.78	31.58	7.00	36.2	2.38
1	4924.00	41.99	AV	54.00	12.01	1.00	128	39.61	31.58	7.00	36.2	2.38
2	7386.00	56.87	PK	74.00	17.13	1.00	125	45.16	38.51	8.50	35.3	11.71
2	7386.00	40.31	AV	54.00	13.69	1.00	125	28.60	38.51	8.50	35.3	11.71

REMARKS:

1. Emission level (dBuV/m)=Raw Value(dBuV)+Correction Factor(dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. The other emission levels were very low against the limit.
4. Margin value = Limit value- Emission level.
5. For Wireless 802.11b mode at 1Mbps.

802.11g Mode(above 1GHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2412MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	57.95	PK	74.00	16.05	1.00	79	55.85	31.60	7.00	36.5	2.10
1	4824.00	43.52	AV	54.00	10.48	1.00	79	41.42	31.60	7.00	36.5	2.10
2	7236.00	58.76	PK	74.00	15.24	1.00	166	47.83	37.33	8.90	35.3	10.93
2	7236.00	42.13	AV	54.00	11.87	1.00	166	31.20	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2412MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	54.43	PK	74.00	19.57	1.00	110	52.33	31.6	7.00	36.5	2.10
1	4824.00	40.14	AV	54.00	13.86	1.00	110	38.04	31.6	7.00	36.5	2.10
2	7236.00	57.05	PK	74.00	16.95	1.00	236	46.12	37.33	8.90	35.3	10.93
2	7236.00	40.19	AV	54.00	13.81	1.00	236	29.26	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2437MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	58.02	PK	74.00	15.98	1.00	330	55.90	31.02	7.60	36.5	2.12
1	4874.00	43.91	AV	54.00	10.09	1.00	330	41.79	31.02	7.60	36.5	2.12
2	7311.00	58.76	PK	74.00	15.24	1.00	279	47.68	37.28	8.60	34.8	11.08
2	7311.00	42.58	AV	54.00	11.42	1.00	279	31.50	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2437MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	55.49	PK	74.00	18.51	1.00	164	53.37	31.02	7.60	36.5	2.12
1	4874.00	42.14	AV	54.00	11.86	1.00	164	40.02	31.02	7.60	36.5	2.12
2	7311.00	57.34	PK	74.00	16.66	1.00	108	46.26	37.28	8.60	34.8	11.08
2	7311.00	41.53	AV	54.00	12.47	1.00	108	30.45	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2462MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	57.38	PK	74.00	16.62	1.00	274	55.00	31.58	7.00	36.2	2.38
1	4924.00	42.44	AV	54.00	11.56	1.00	274	40.06	31.58	7.00	36.2	2.38
2	7386.00	58.06	PK	74.00	15.94	1.00	225	46.35	38.51	8.50	35.3	11.71
2	7386.00	42.53	AV	54.00	11.47	1.00	225	30.82	38.51	8.50	35.3	11.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2462MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	54.34	PK	74.00	19.66	1.00	13	51.96	31.58	7.00	36.2	2.38
1	4924.00	41.62	AV	54.00	12.38	1.00	13	39.24	31.58	7.00	36.2	2.38
2	7311.00	56.01	PK	74.00	17.99	1.00	189	44.30	38.51	8.50	35.3	11.71
2	7311.00	40.25	AV	54.00	13.75	1.00	189	28.54	38.51	8.50	35.3	11.71

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value - Emission level.
 5. For Wireless 802.11g mode at 6Mbps.

802.11n HT20 Mode(above 1GHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT20--2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	56.03	PK	74.00	17.97	1.00	345	53.93	31.60	7.00	36.5	2.10
1	4824.00	42.44	AV	54.00	11.56	1.00	345	40.34	31.60	7.00	36.5	2.10
2	7236.00	57.89	PK	74.00	16.11	1.00	199	46.96	37.33	8.90	35.3	10.93
2	7236.00	41.85	AV	54.00	12.15	1.00	199	30.92	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT20--2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	53.91	PK	74.00	20.09	1.00	124	51.81	31.6	7.00	36.5	2.10
1	4824.00	39.85	AV	54.00	14.15	1.00	124	37.75	31.6	7.00	36.5	2.10
2	7236.00	56.28	PK	74.00	17.72	1.00	166	45.35	37.33	8.90	35.3	10.93
2	7236.00	39.93	AV	54.00	14.07	1.00	166	29.00	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT20--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	57.47	PK	74.00	16.53	1.00	26	55.35	31.02	7.60	36.5	2.12
1	4874.00	43.22	AV	54.00	10.78	1.00	26	41.10	31.02	7.60	36.5	2.12
2	7311.00	58.29	PK	74.00	15.71	1.00	301	47.21	37.28	8.60	34.8	11.08
2	7311.00	42.01	AV	54.00	11.99	1.00	301	30.93	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT20--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	54.66	PK	74.00	19.34	1.00	347	52.54	31.02	7.60	36.5	2.12
1	4874.00	41.88	AV	54.00	12.12	1.00	347	39.76	31.02	7.60	36.5	2.12
2	7311.00	56.95	PK	74.00	17.05	1.00	114	45.87	37.28	8.60	34.8	11.08
2	7311.00	41.14	AV	54.00	12.86	1.00	114	30.06	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT20--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	56.76	PK	74.00	17.24	1.00	128	54.38	31.58	7.00	36.2	2.38
1	4924.00	42.03	AV	54.00	11.97	1.00	128	39.65	31.58	7.00	36.2	2.38
2	7311.00	58.95	PK	74.00	15.05	1.00	33	47.24	38.51	8.50	35.3	11.71
2	7311.00	42.68	AV	54.00	11.32	1.00	33	30.97	38.51	8.50	35.3	11.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT20--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	53.94	PK	74	20.06	1.00	200	51.56	31.58	7.00	36.2	2.38
1	4924.00	41.02	AV	54	12.98	1.00	200	38.64	31.58	7.00	36.2	2.38
2	7386.00	56.76	PK	74	17.24	1.00	145	45.05	38.51	8.50	35.3	11.71
2	7386.00	40.55	AV	54	13.45	1.00	145	28.84	38.51	8.50	35.3	11.71

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
 3. The other emission levels were very low against the limit.

4. Margin value = Limit value - Emission level.
 5. For Wireless 802.11n HT20 mode at 6.5Mbps.

802.11n HT40MHz Mode(above 1GHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT40--2422MHz)												
No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844.00	56.34	PK	74.00	17.66	1.00	122	54.23	31.01	7.30	36.2	2.11
1	4844.00	42.61	AV	54.00	11.39	1.00	122	40.50	31.01	7.30	36.2	2.11
2	7266.00	58.42	PK	74.00	15.58	1.00	246	47.62	36.70	8.90	34.8	10.80
2	7266.00	41.88	AV	54.00	12.12	1.00	246	31.08	36.70	8.90	34.8	10.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT40--2422MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844.00	54.42	PK	74.00	19.58	1.00	108	52.31	31.01	7.30	36.2	2.11
1	4844.00	40.11	AV	54.00	13.89	1.00	108	38.00	31.01	7.30	36.2	2.11
2	7266.00	56.97	PK	74.00	17.03	1.00	212	46.17	36.70	8.90	34.8	10.80
2	7266.00	40.05	AV	54.00	13.95	1.00	212	29.25	36.70	8.90	34.8	10.80

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT40--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	57.98	PK	74.00	16.02	1.00	138	55.86	31.02	7.60	36.5	2.12
1	4874.00	43.34	AV	54.00	10.66	1.00	138	41.22	31.02	7.60	36.5	2.12
2	7311.00	58.76	PK	74.00	15.24	1.00	312	47.68	37.28	8.60	34.8	11.08
2	7311.00	42.11	AV	54.00	11.89	1.00	312	31.03	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT40--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	54.32	PK	74.00	19.68	1.00	68	52.20	31.02	7.60	36.5	2.12
1	4874.00	41.62	AV	54.00	12.38	1.00	68	39.50	31.02	7.60	36.5	2.12
2	7311.00	56.57	PK	74.00	17.43	1.00	91	45.49	37.28	8.60	34.8	11.08
2	7311.00	41.05	AV	54.00	12.95	1.00	91	29.97	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n HT40--2452MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	56.03	PK	74.00	17.97	1.00	108	53.76	31.47	7.00	36.2	2.27
1	4904.00	41.64	AV	54.00	12.36	1.00	108	39.37	31.47	7.00	36.2	2.27
2	7356.00	58.28	PK	74.00	15.72	1.00	124	46.63	38.45	8.50	35.3	11.65
2	7356.00	42.19	AV	54.00	11.81	1.00	124	30.54	38.45	8.50	35.3	11.65


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n HT40--2452MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	53.57	PK	74.00	20.43	1.00	128	51.30	31.47	7.00	36.2	2.27
1	4904.00	40.83	AV	54.00	13.17	1.00	128	38.56	31.47	7.00	36.2	2.27
2	7356.00	56.04	PK	74.00	17.96	1.00	124	44.39	38.45	8.50	35.3	11.65
2	7356.00	40.30	AV	54.00	13.70	1.00	124	28.65	38.45	8.50	35.3	11.65

- REMARKS:**
- 1. Emission level (dB_{UV}/m) = Raw Value (dB_{UV}) + Correction Factor (dB/m)
 - 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
 - 3. The other emission levels were very low against the limit.
 - 4. Margin value = Limit value - Emission level.
 - 5. For Wireless 802.11n HT40MHz mode at 13.5Mbps.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Meas Guidance v03:

PKPM1 Peak power meter method: The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power: As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

1. The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
2. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Remark: We measured output power at difference data rate for each mode and recorded worst case for each mode.

4.3.1 802.11b Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
1	2412	22.51	30	PASS
6	2437	22.16	30	PASS
11	2462	22.72	30	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable lose.

4.3.2 802.11g Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
1	2412	21.70	30	PASS
6	2437	21.32	30	PASS
11	2462	21.95	30	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable lose.

4.3.3 802.11n HT20 Test Mode**A. Test Verdict**

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
1	2412	21.81	30	PASS
6	2437	22.00	30	PASS
11	2462	22.22	30	PASS

Note: 1. For 802.11n HT20 mode at finial test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable lose.


4.3.4 802.11n HT40 Test Mode**A. Test Verdict**

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
3	2422	20.61	30	PASS
6	2437	20.43	30	PASS
9	2452	20.76	30	PASS

Note: 1. For 802.11n HT40 mode at finial test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable lose.

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 Method PKPSD (peak PSD) this procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

4.4.1 802.11b Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Report PSD (dBm/30kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
1	2412	4.455	Plot 4.4.1 A	8	PASS
6	2437	2.121	Plot 4.4.1 B	8	PASS
11	2462	1.545	Plot 4.4.1 C	8	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.

B. Test Plots



(Plot 4.4.1 A: Channel 1: 2412MHz @ 802.11b)



(Plot 4.4.1 B: Channel 6: 2437MHz @ 802.11b)



(Plot 4.4.1 C: Channel 11: 2462MHz @ 802.11b)

4.4.2 802.11g Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Report PSD (dBm/30kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
1	2412	-4.662	Plot 4.4.2 A	8	PASS
6	2437	-3.283	Plot 4.4.2 B	8	PASS
11	2462	-3.636	Plot 4.4.2 C	8	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
 2. The test results including the cable loss.


B. Test Plots



(Plot 4.4.2 A: Channel 1: 2412MHz @ 802.11g)



(Plot 4.4.2 B: Channel 6: 2437MHz @ 802.11g)

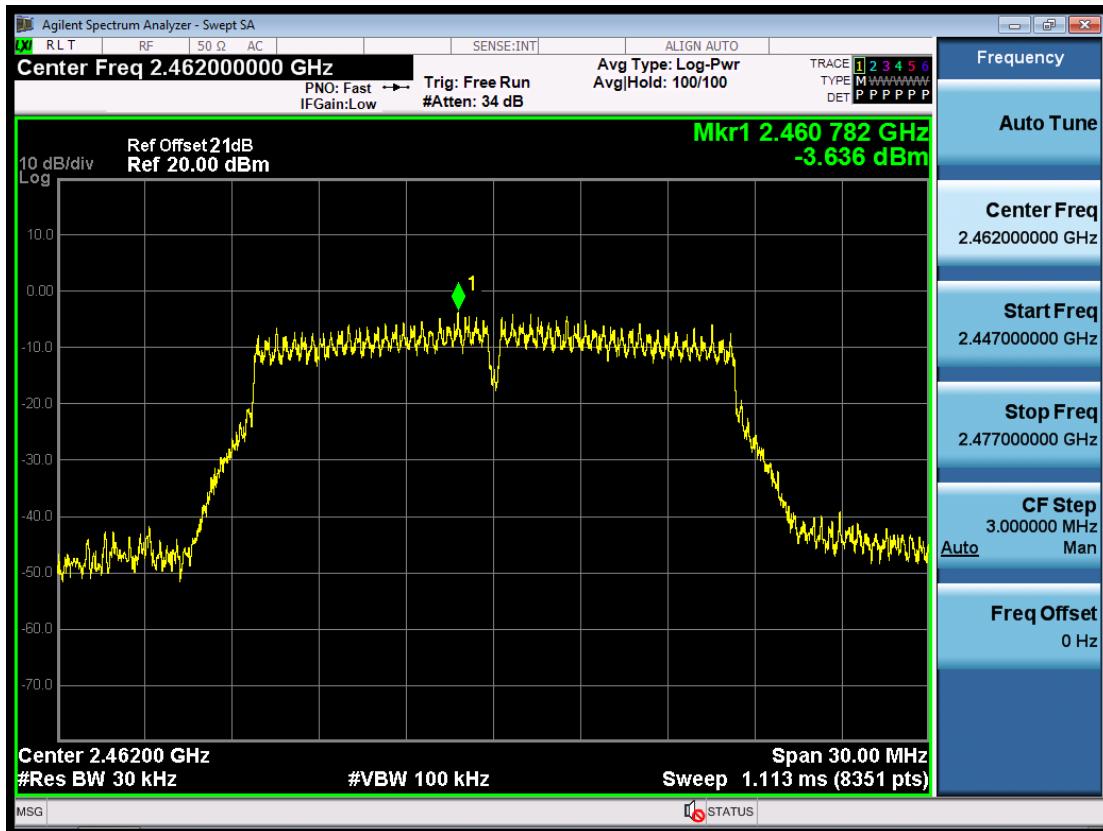

(Plot 4.4.2 C: Channel 11: 2462MHz @ 802.11g)


4.4.3 802.11n HT20 Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Report PSD (dBm/30kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
1	2412	-3.030	Plot 4.4.3 A	8	PASS
6	2437	-2.262	Plot 4.4.3 B	8	PASS
11	2462	-3.537	Plot 4.4.3 C	8	PASS

Note: 1. For 802.11n HT20 mode at finial test to get the worst-case emission at 6.5Mbps.
 2. The test results including the cable lose.


B. Test Plots

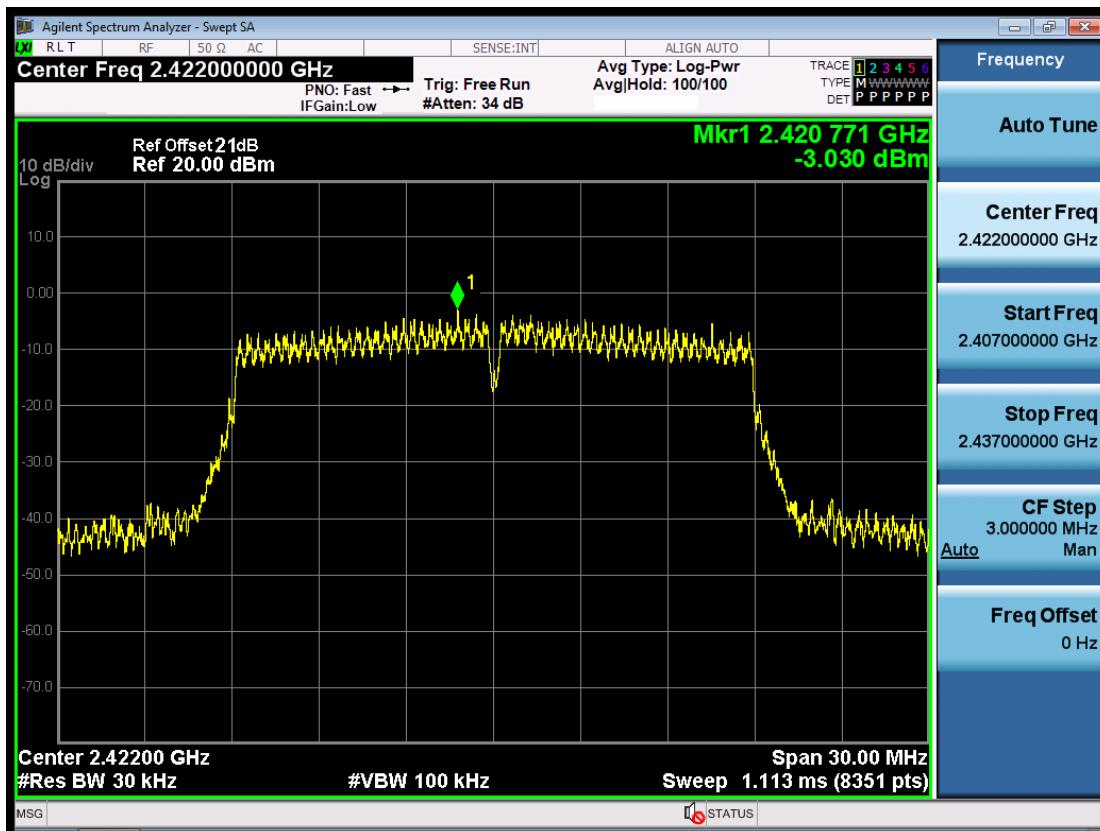

(Plot 4.4.3 A: Channel 1: 2412MHz @ 802.11n HT20)

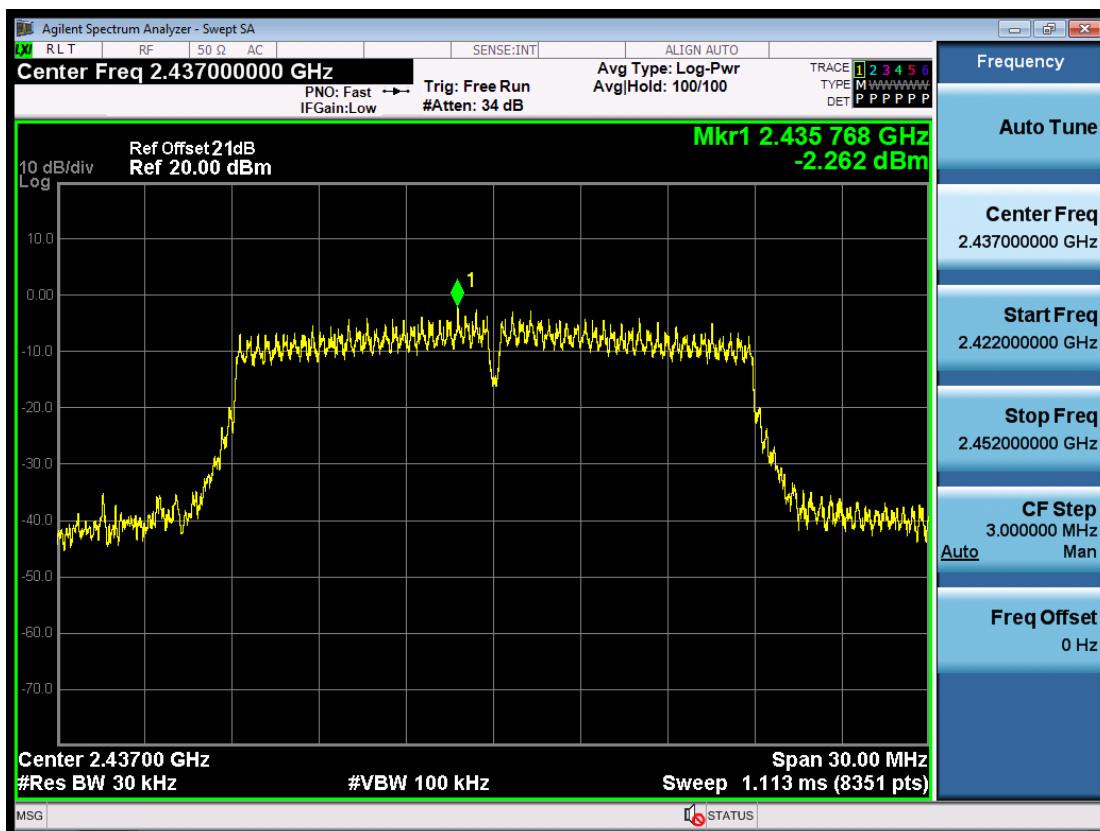

(Plot 4.4.3 B: Channel 6: 2437MHz @ 802.11n HT20)

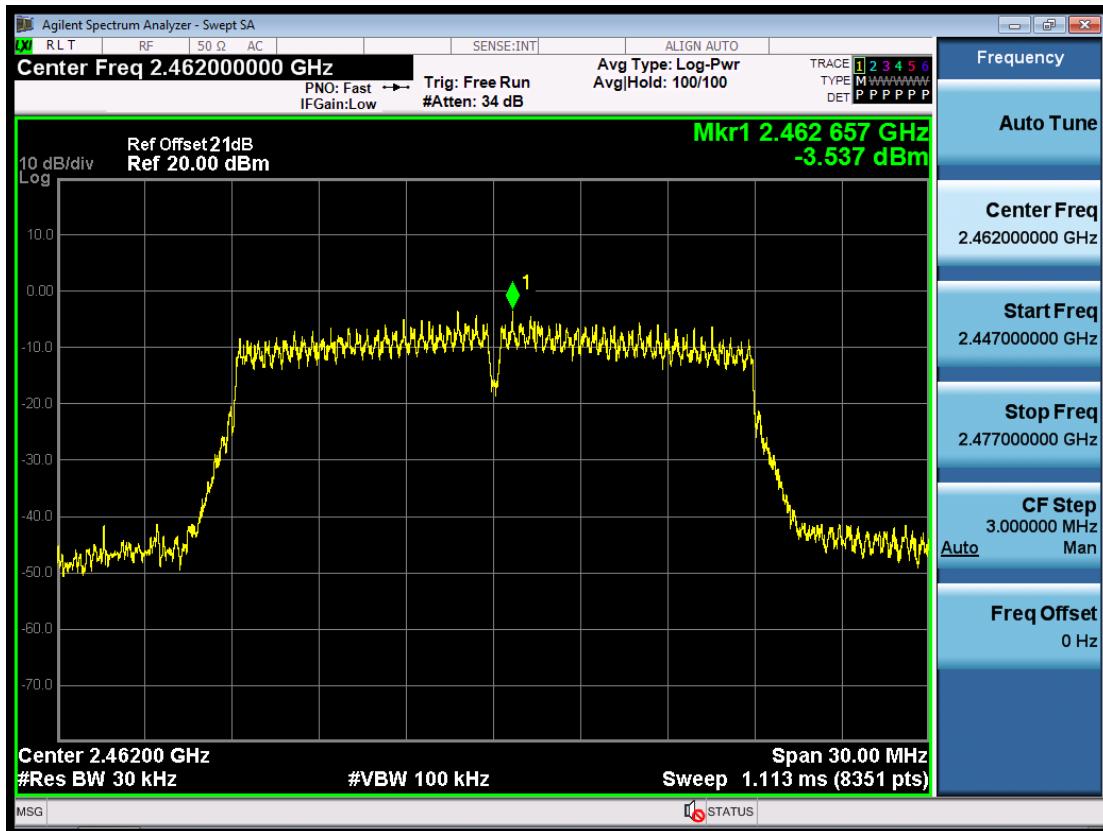

(Plot 4.4.3 C: Channel 11: 2462MHz @ 802.11n HT20)


4.4.4 802.11n HT40 Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Report PSD (dBm/30kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
3	2422	-9.962	Plot 4.4.4 A	8	PASS
6	2437	-7.632	Plot 4.4.4 B	8	PASS
9	2452	-10.249	Plot 4.4.4 C	8	PASS

Note: 1. For 802.11n HT40 mode at finial test to get the worst-case emission at 13.5Mbps.
 2. The test results including the cable lose.


B. Test Plots

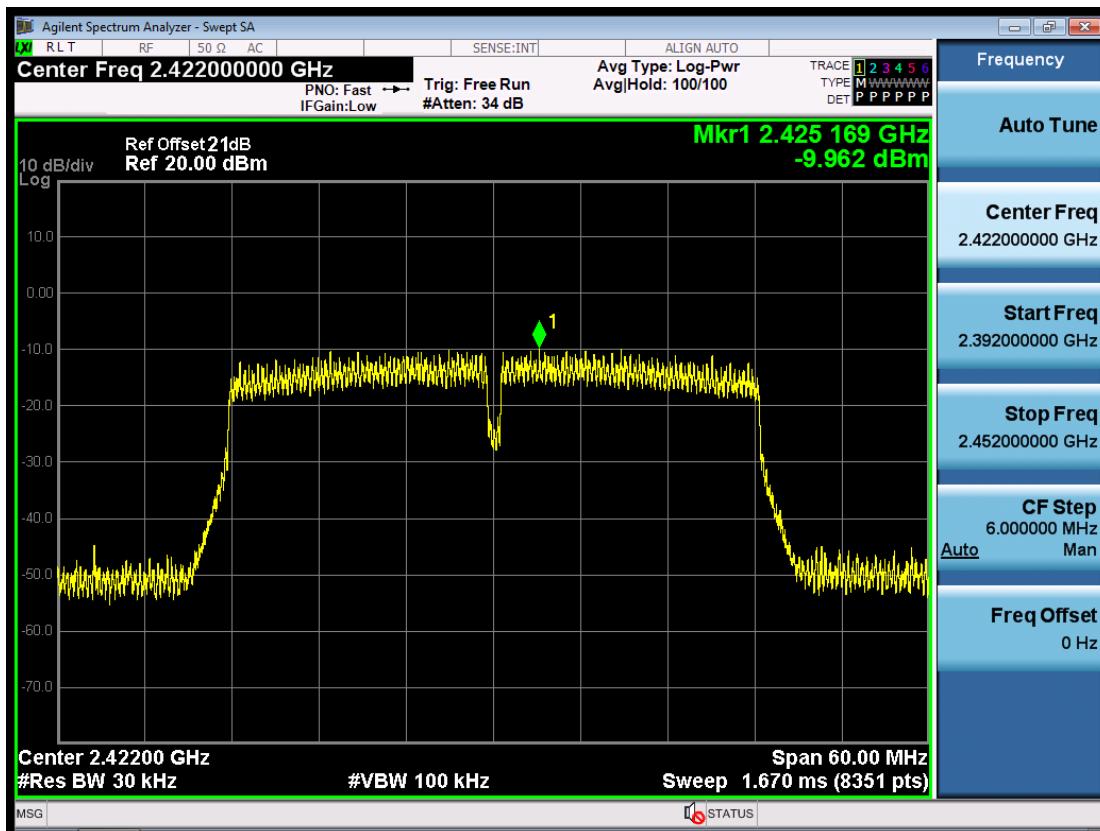

(Plot 4.4.4 A: Channel 3: 2422MHz @ 802.11n HT40))

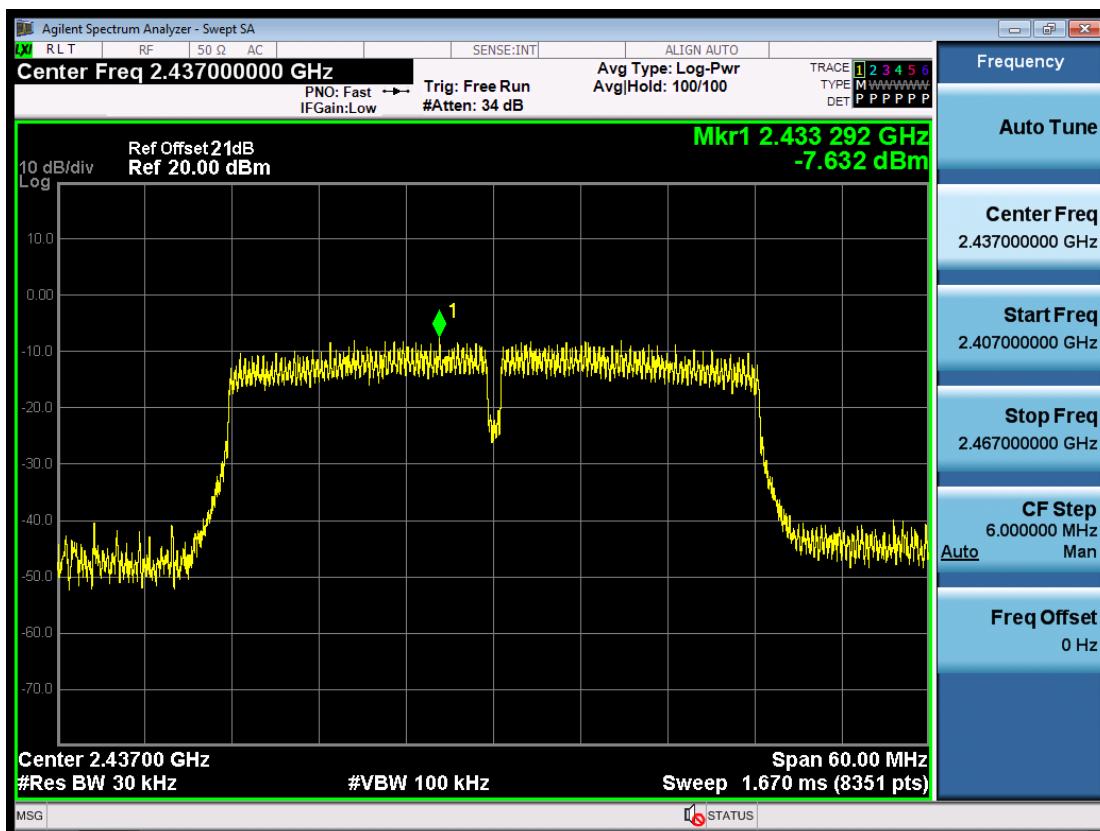

(Plot 4.4.4 B: Channel 6: 2437MHz @ 802.11n HT40))

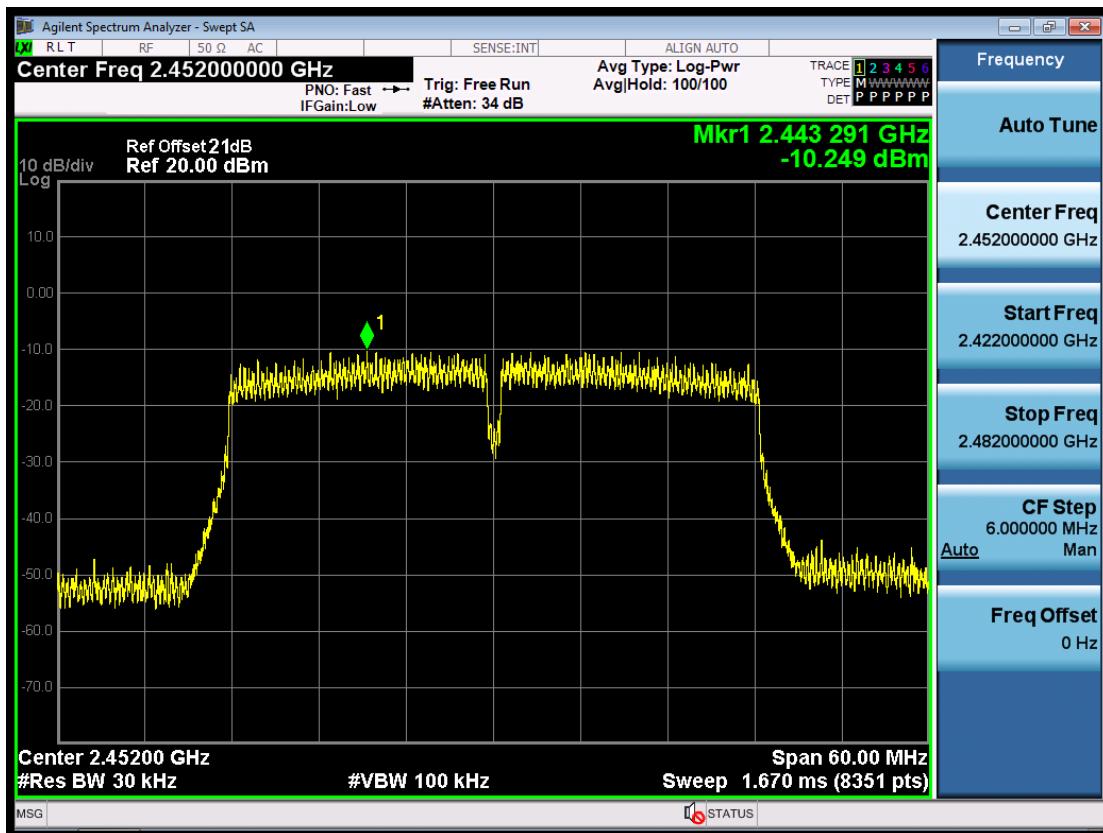

(Plot 4.4.4 C: Channel 6: 2452MHz @ 802.11n HT40)

4.5. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

According to KDB 558074 D01 V03 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies \leq 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies $>$ 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
$$E = EIRP - 20\log D + 104.8$$

where:

E = electric field strength in $\text{dB}\mu\text{V/m}$,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test dures until all measured frequencies were complete.

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply

with the radiated emission limits specified in § 15.209(a)

TEST RESULTS

Remark: The Bandedge was measured at difference data rate for each mode and recorded worst case for each mode.


4.5.1 802.11b Test Mode

A. Test Verdict

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Refer to Plot
2390.00	-45.079	2.00	0.00	52.181	Peak	74.00	Plot 4.5.1 A1
2390.00	-53.069	2.00	0.00	44.191	AV	54.00	Plot 4.5.1 A2
2413.08	9.542	2.00	0.00	106.802	Peak	---	Plot 4.5.1 A1
2411.28	5.675	2.00	0.00	102.935	AV	---	Plot 4.5.1 A2
2463.05	8.991	2.00	0.00	106.251	Peak	---	Plot 4.5.1 A3
2461.25	5.494	2.00	0.00	102.754	AV	---	Plot 4.5.1 A4
2483.50	-45.317	2.00	0.00	51.943	Peak	74.00	Plot 4.5.1 A3
2483.50	-56.326	2.00	0.00	40.934	AV	54.00	Plot 4.5.1 A4

Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
 2. The test results including the cable loss.
 3. “---” means that the fundamental frequency not for 15.209 limits requirement.


B. Test Plots

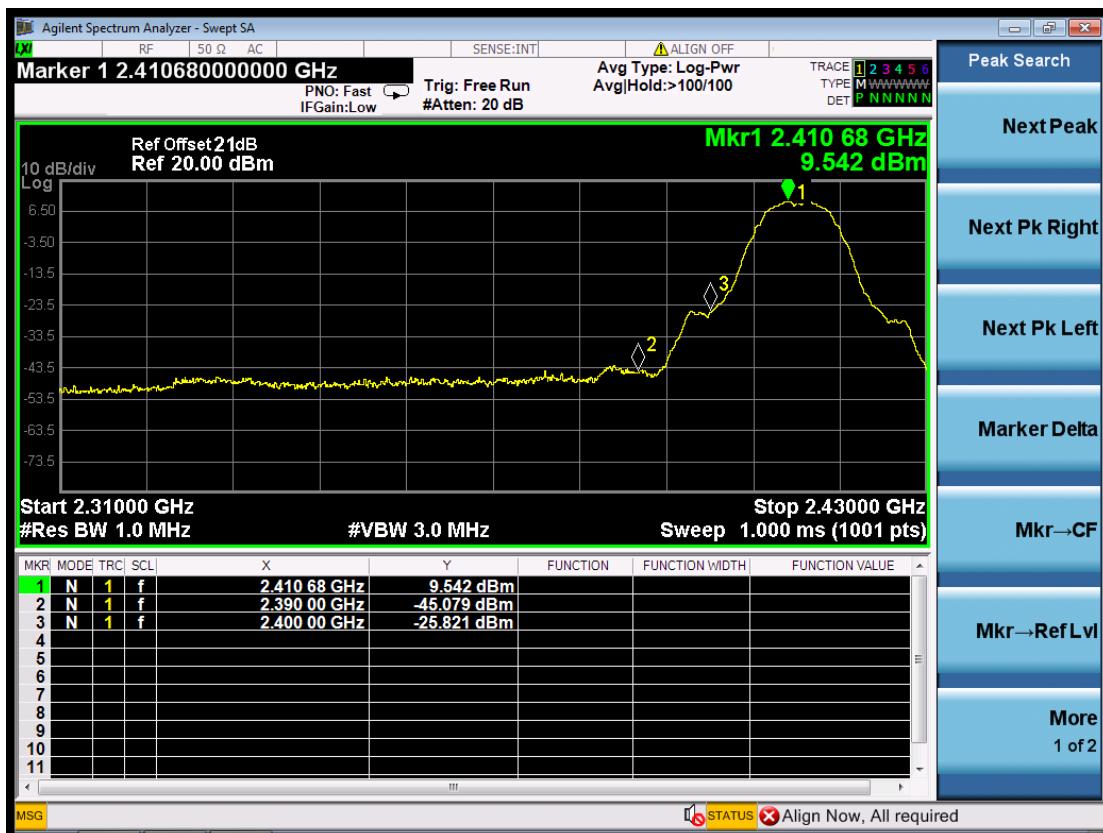


(Plot 4.5.1 A1: Channel 1: 2412MHz @ 802.11b)



(Plot 4.5.1 A2: Channel 1: 2412MHz @ 802.11b)

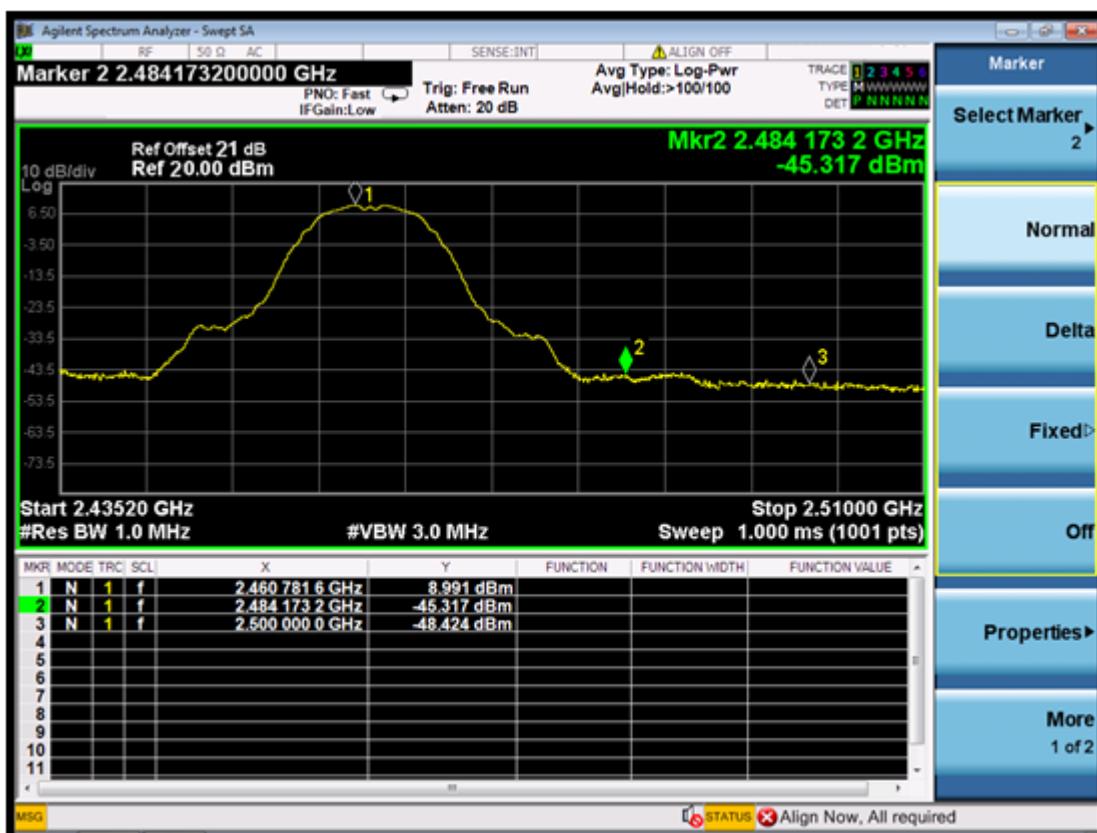

(Plot 4.5.1 A3: Channel 11: 2462MHz @ 802.11b)

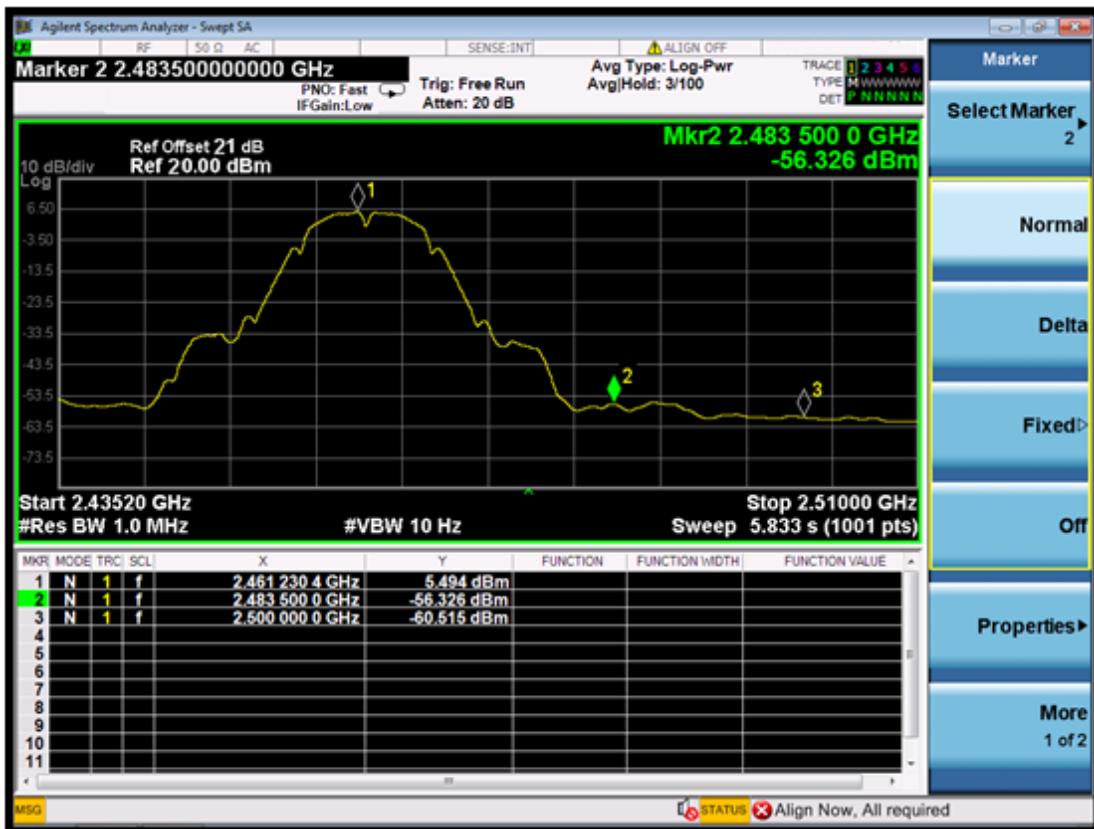

(Plot 4.5.1 A4: Channel 11: 2462MHz @ 802.11b)


4.5.2 802.11g Test Mode

A. Test Verdict

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Refer to Plot
2390.00	-28.554	2.00	0.00	68.706	Peak	74.00	Plot 4.5.2 A1
2390.00	-47.061	2.00	0.00	50.199	AV	54.00	Plot 4.5.2 A2
2415.24	9.360	2.00	0.00	106.62	Peak	---	Plot 4.5.2 A1
2415.48	-0.400	2.00	0.00	96.86	AV	---	Plot 4.5.2 A2
2465.20	9.225	2.00	0.00	106.485	Peak	---	Plot 4.5.2 A3
2465.40	-0.453	2.00	0.00	96.807	AV	---	Plot 4.5.2 A4
2483.50	-26.786	2.00	0.00	70.474	Peak	74.00	Plot 4.5.2 A3
2483.50	-48.573	2.00	0.00	48.687	AV	54.00	Plot 4.5.2 A4

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
 2. The test results including the cable loss.
 3. “---” means that the fundamental frequency not for 15.209 limits requirement.

B. Test Plots

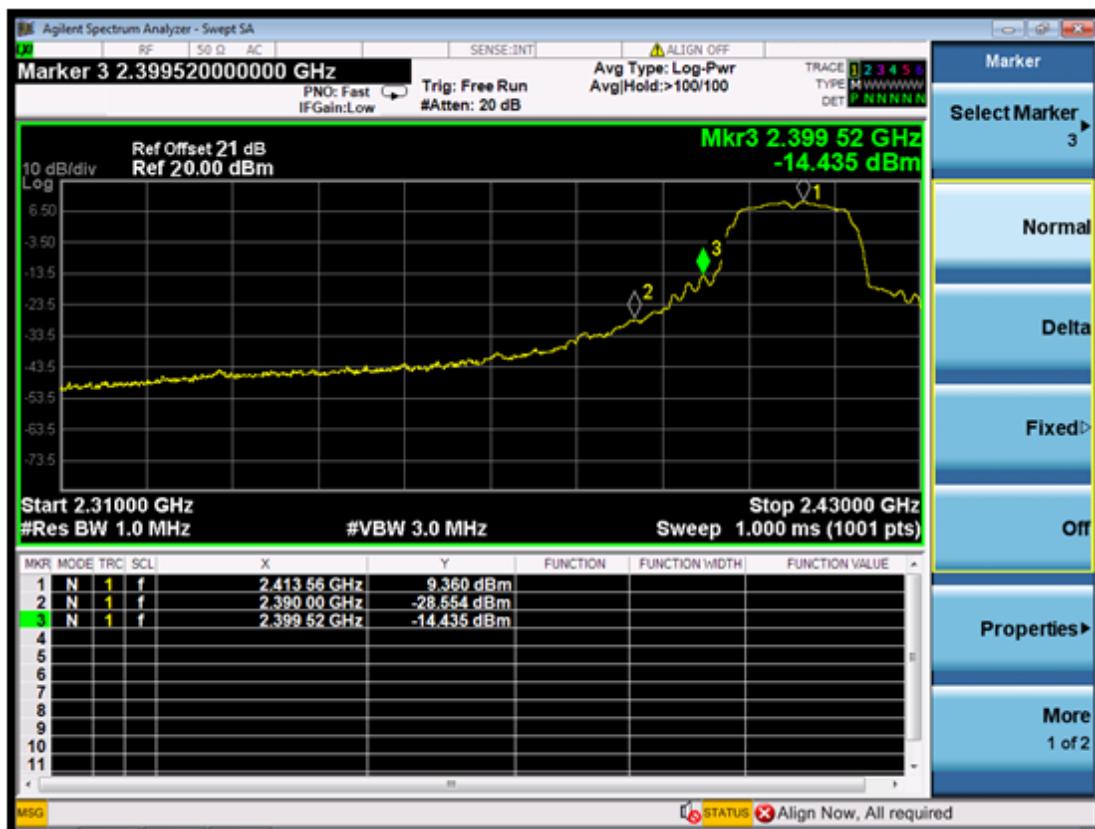


(Plot 4.5.2 A1: Channel 1: 2412MHz @ 802.11g)



(Plot 4.5.2 A2: Channel 1: 2412MHz @ 802.11g)



(Plot 4.5.2 A3: Channel 11: 2462MHz @ 802.11g)

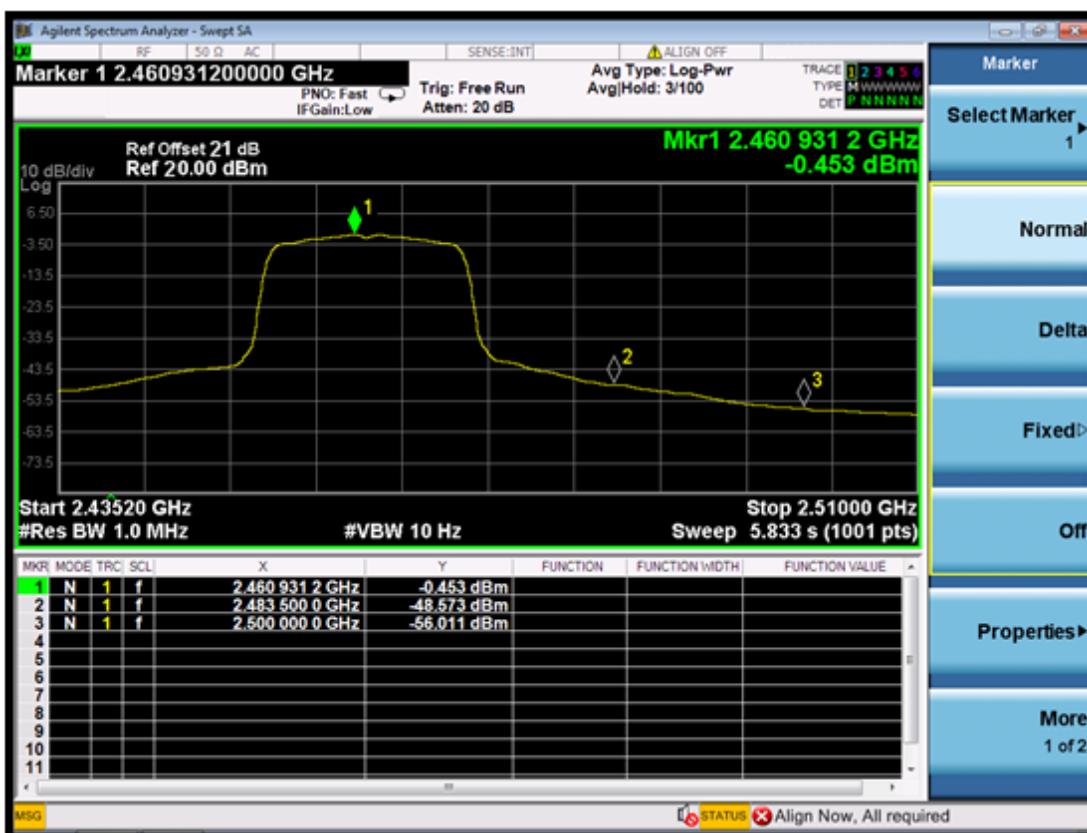

(Plot 4.5.2 A4: Channel 11: 2462MHz @ 802.11g)


4.5.3 802.11n HT20MHz Test Mode

A. Test Verdict


Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Refer to Plot
2390.00	-25.50	2.00	0.00	72.06	Peak	74.00	Plot 4.5.3 A1
2390.00	-46.37	2.00	0.00	51.19	AV	54.00	Plot 4.5.3 A2
2410.08	11.29	2.00	0.00	108.85	Peak	---	Plot 4.5.3 A1
2410.80	2.25	2.00	0.00	99.81	AV	---	Plot 4.5.3 A2
2463.40	11.20	2.00	0.00	108.76	Peak	---	Plot 4.5.3 A3
2460.50	2.44	2.00	0.00	100.00	AV	---	Plot 4.5.3 A4
2483.50	-24.65	2.00	0.00	72.91	Peak	74.00	Plot 4.5.3 A3
2483.50	-48.45	2.00	0.00	49.11	AV	54.00	Plot 4.5.3 A4

Note: 1. For 802.11n HT20MHz mode at final test to get the worst-case emission at 6.5Mbps.
 2. The test results including the cable loss.
 3. “---” means that the fundamental frequency not for 15.209 limits requirement.


B. Test Plots

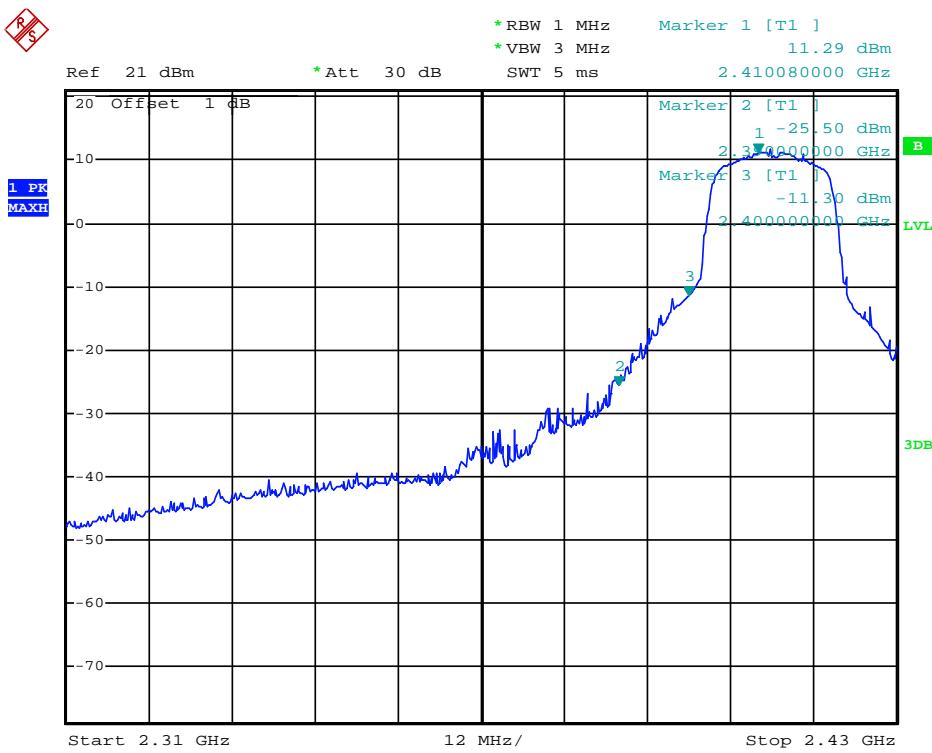


(Plot 4.5.3 A1: Channel 1: 2412MHz @ 802.11n HT20MHz)

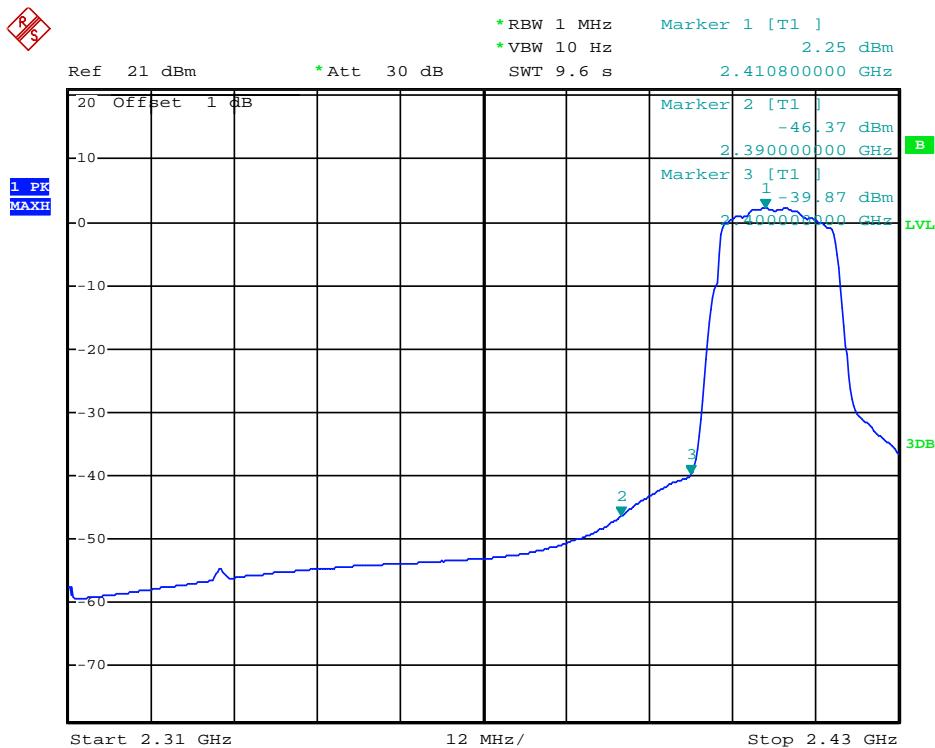

(Plot 4.5.3 A2: Channel 1: 2412MHz @ 802.11n HT20MHz)

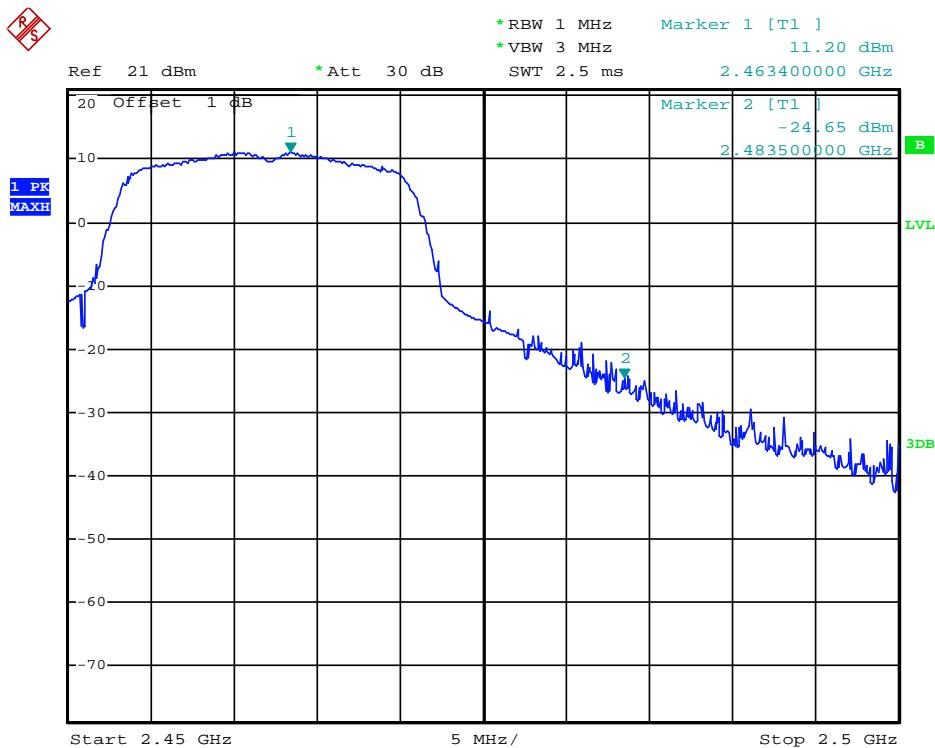

(Plot 4.5.3 A3: Channel 11: 2462MHz @ 802.11n HT20MHz)

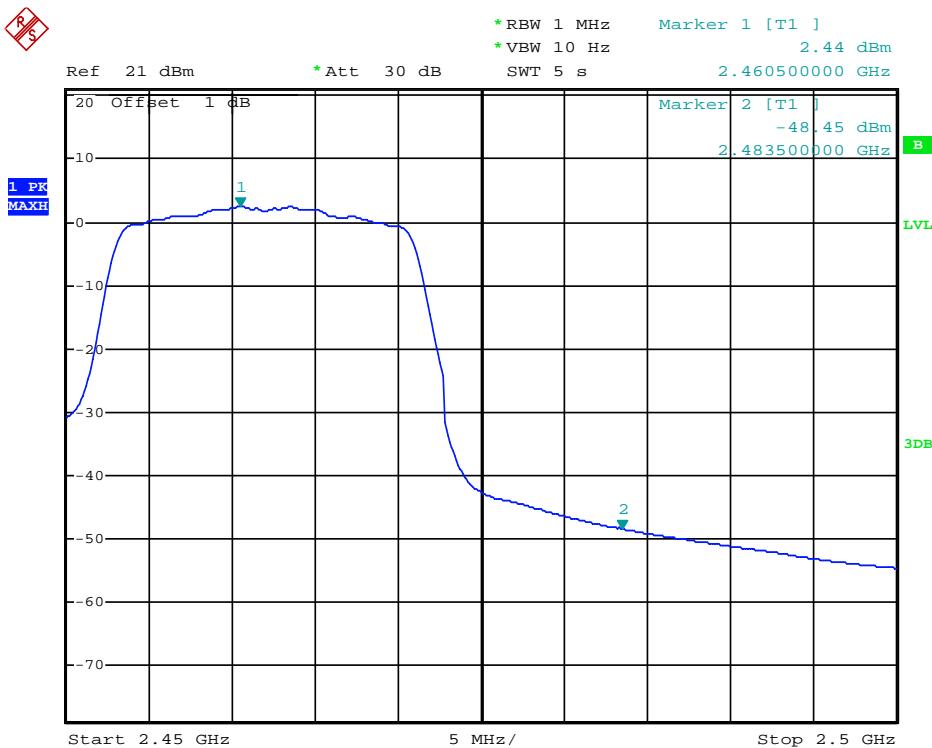

(Plot 4.5.3 A4: Channel 11: 2462MHz @ 802.11n HT20MHz)

4.5.4 802.11n HT40MHz Test Mode


A. Test Verdict

Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Cover Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Refer to Plot
2388.18	-36.828	2.00	0.00	60.432	Peak	74.00	Plot 4.5.4 A1
2388.18	-55.314	2.00	0.00	41.946	AV	54.00	Plot 4.5.4 A2
2423.68	7.543	2.00	0.00	104.803	Peak	---	Plot 4.5.4 A1
2423.54	-2.657	2.00	0.00	94.603	AV	---	Plot 4.5.4 A2
2453.23	7.263	2.00	0.00	104.523	Peak	---	Plot 4.5.4 A3
2450.46	-3.004	2.00	0.00	94.256	AV	---	Plot 4.5.4 A4
2485.59	-38.616	2.00	0.00	58.644	Peak	74.00	Plot 4.5.4 A3
2483.50	-55.613	2.00	0.00	41.647	AV	54.00	Plot 4.5.4 A4


Note:

1. For 802.11n HT40 mode at final test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable loss.
3. “---”means that the fundamental frequency not for 15.209 limits requirement.

B. Test Plots

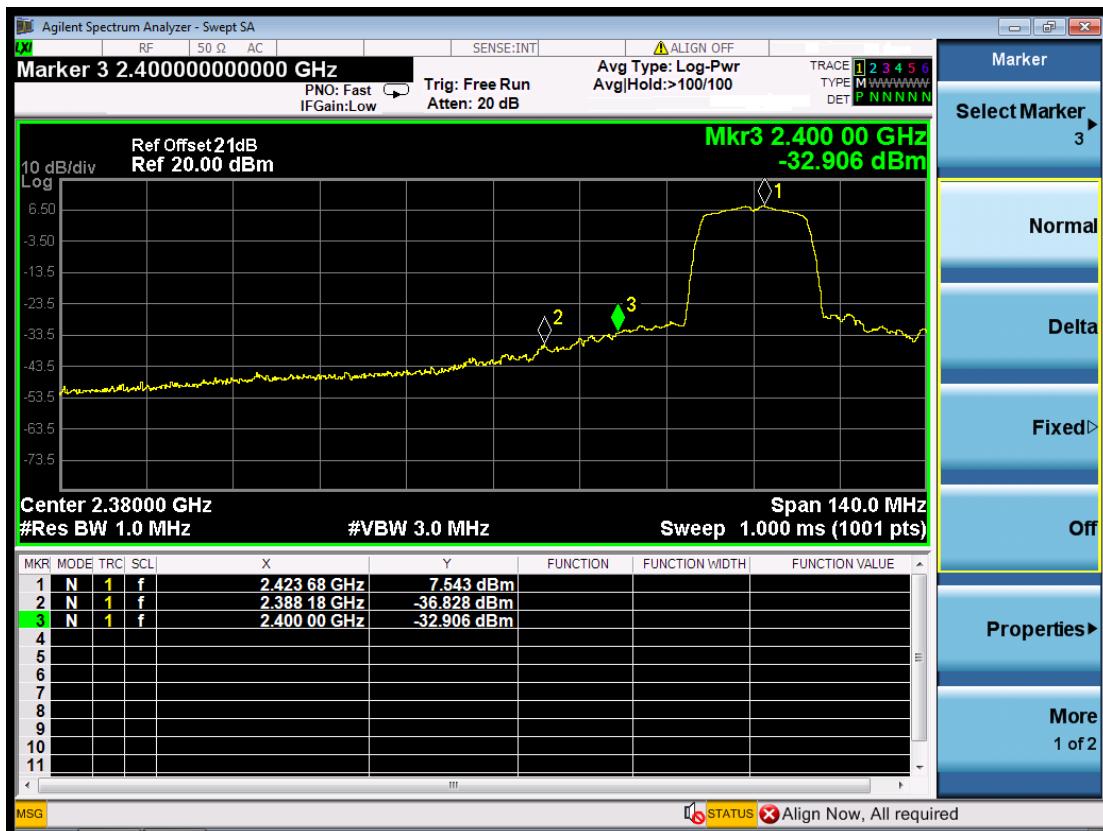


(Plot 4.5.4 A1: Channel 3: 2422MHz @ 802.11n HT40MHz)

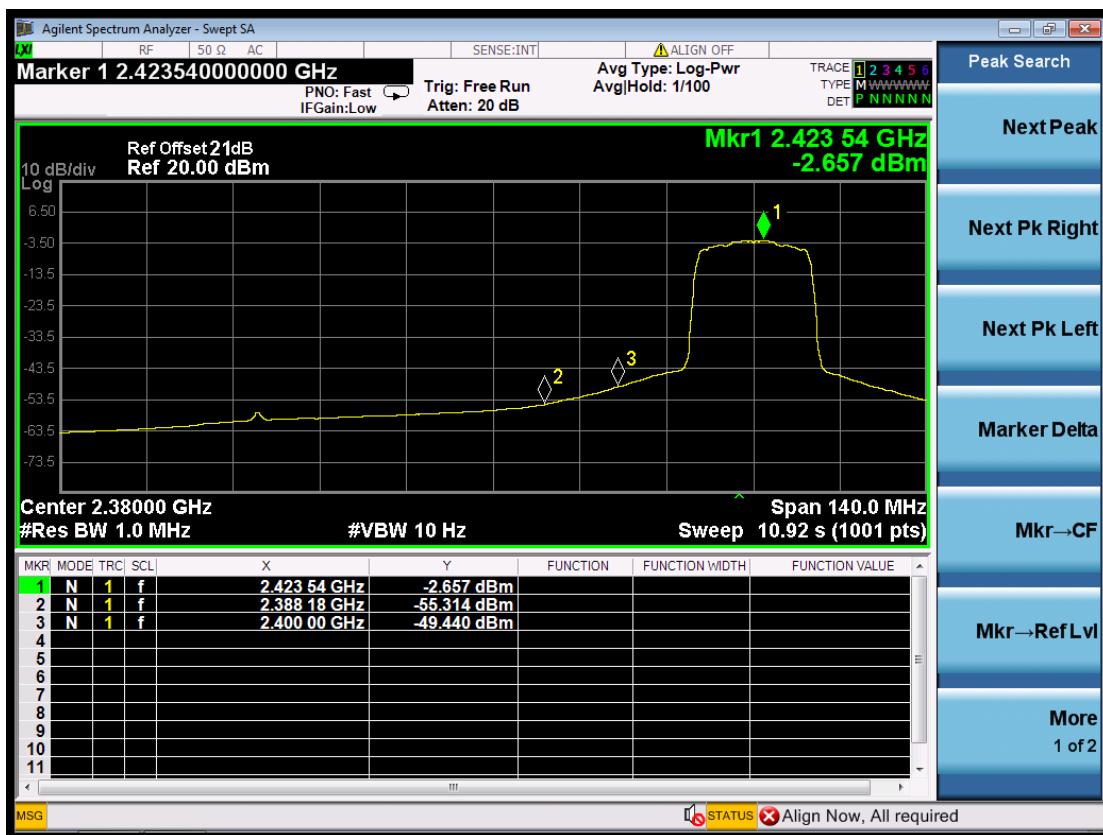

(Plot 6.5.4 A2: Channel 3: 2422MHz @ 802.11n HT40MHz)




(Plot 6.5.4 A3: Channel 9: 2452MHz @ 802.11n HT40MHz)

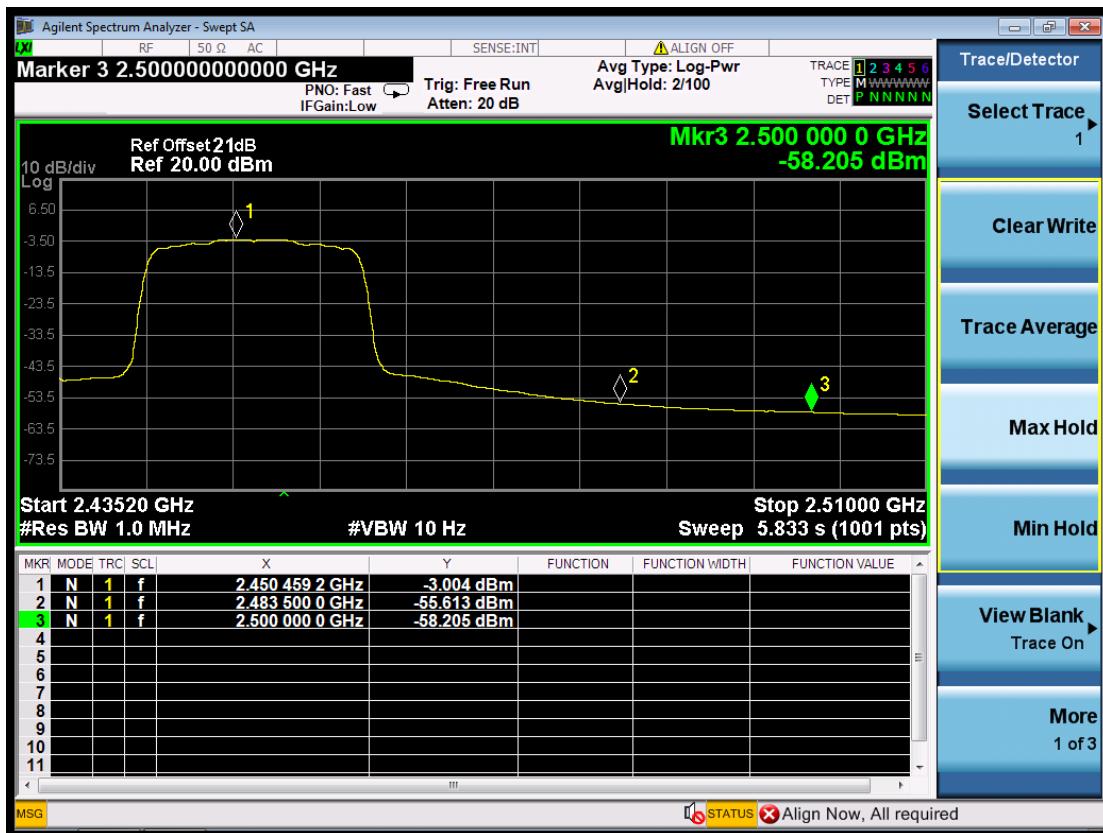

(Plot 6.5.4 A4: Channel 9: 2452MHz @ 802.11n HT40MHz)

4.6. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100 kHz and VBW= 300 KHz to measure the peak field strength, and measure frequency range from 9 KHz to 26.5GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS

Remark: The measurement frequency range is from 9 KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.


4.6.1 802.11b Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
1	2412	2.412 GHz	Plot 4.6.1 A1	---	PASS
		9KHz-30MHz	Plot 4.6.1 A2	-20	PASS
		30MHz-1GHz	Plot 4.6.1 A3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.1 A4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.1 A5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.1 A6	-20	PASS
		10GHz-15GHz	Plot 4.6.1 A7	-20	PASS
		15GHz-20GHz	Plot 4.6.1 A8	-20	PASS
		20GHz-26GHz	Plot 4.6.1 A9	-20	PASS
6	2437	2.437 GHz	Plot 4.6.1 B1	---	PASS
		9KHz-30MHz	Plot 4.6.1 B2	-20	PASS
		30MHz-1GHz	Plot 4.6.1 B3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.1 B4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.1 B5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.1 B6	-20	PASS
		10GHz-15GHz	Plot 4.6.1 B7	-20	PASS
		15GHz-20GHz	Plot 4.6.1 B8	-20	PASS
		20GHz-26GHz	Plot 4.6.1 B9	-20	PASS
11	2462	2.462 GHz	Plot 4.6.1 C1	---	PASS
		9KHz-30MHz	Plot 4.6.1 C2	-20	PASS
		30MHz-1GHz	Plot 4.6.1 C3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.1 C4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.1 C5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.1 C6	-20	PASS
		10GHz-15GHz	Plot 4.6.1 C7	-20	PASS
		15GHz-20GHz	Plot 4.6.1 C8	-20	PASS
		20GHz-26GHz	Plot 4.6.1 C9	-20	PASS

Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-49.74	Peak	-20	Plot 4.6.1 D	PASS
2483.50	-52.86	Peak	-20	Plot 4.6.1 E	PASS


Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
 2. The test results including the cable loss.

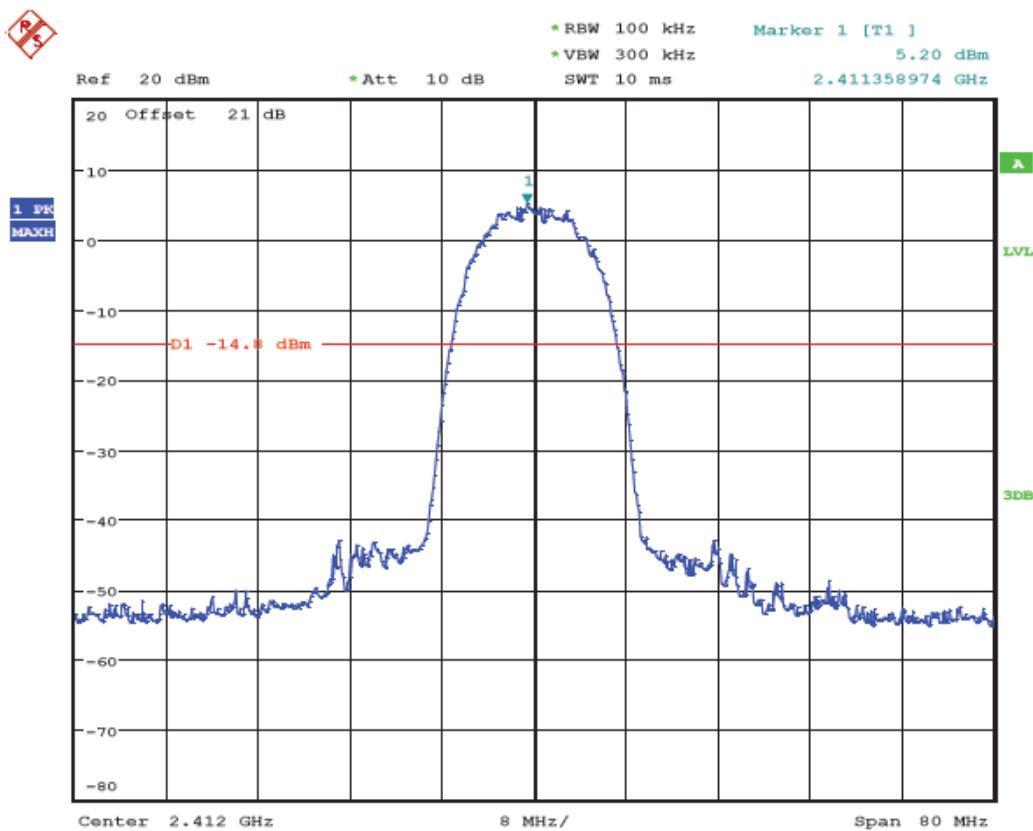


(Plot 4.6.1 A1: Channel 1: 2412MHz @ 802.11b)

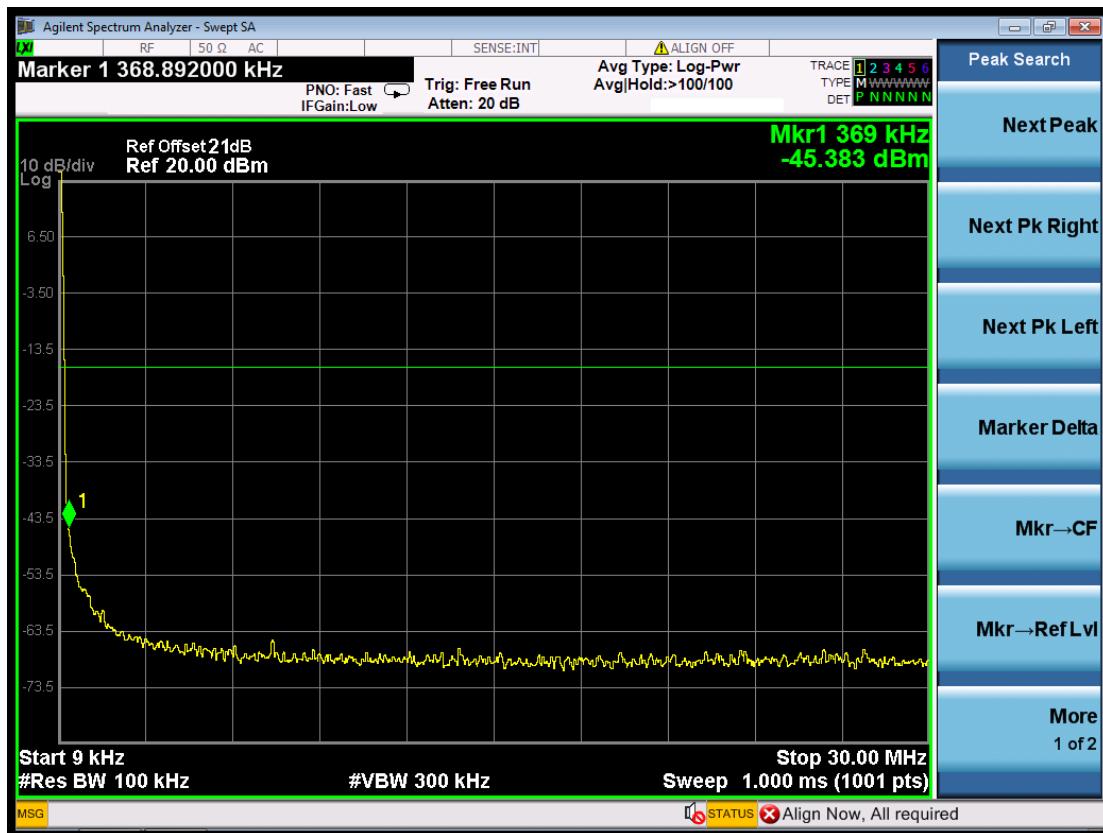


(Plot 4.6.1 A2: Channel 1: 2412MHz @ 802.11b)

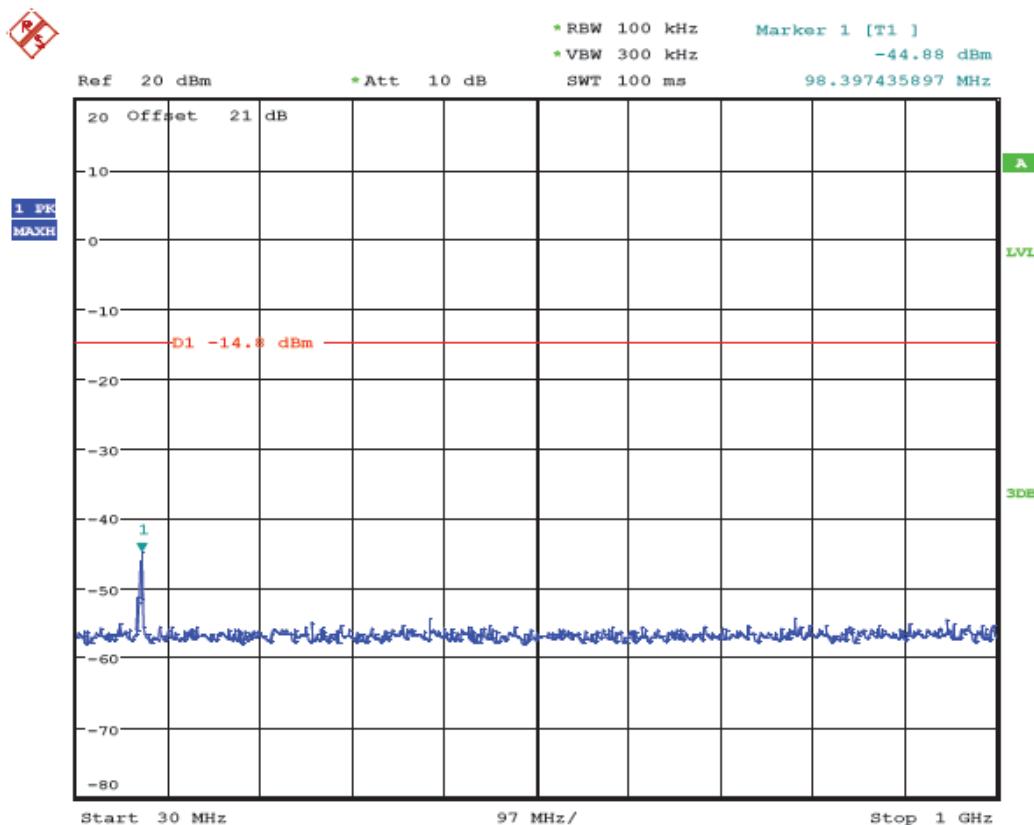


(Plot 6.6.1 A3: Channel 1: 2412MHz @ 802.11b)

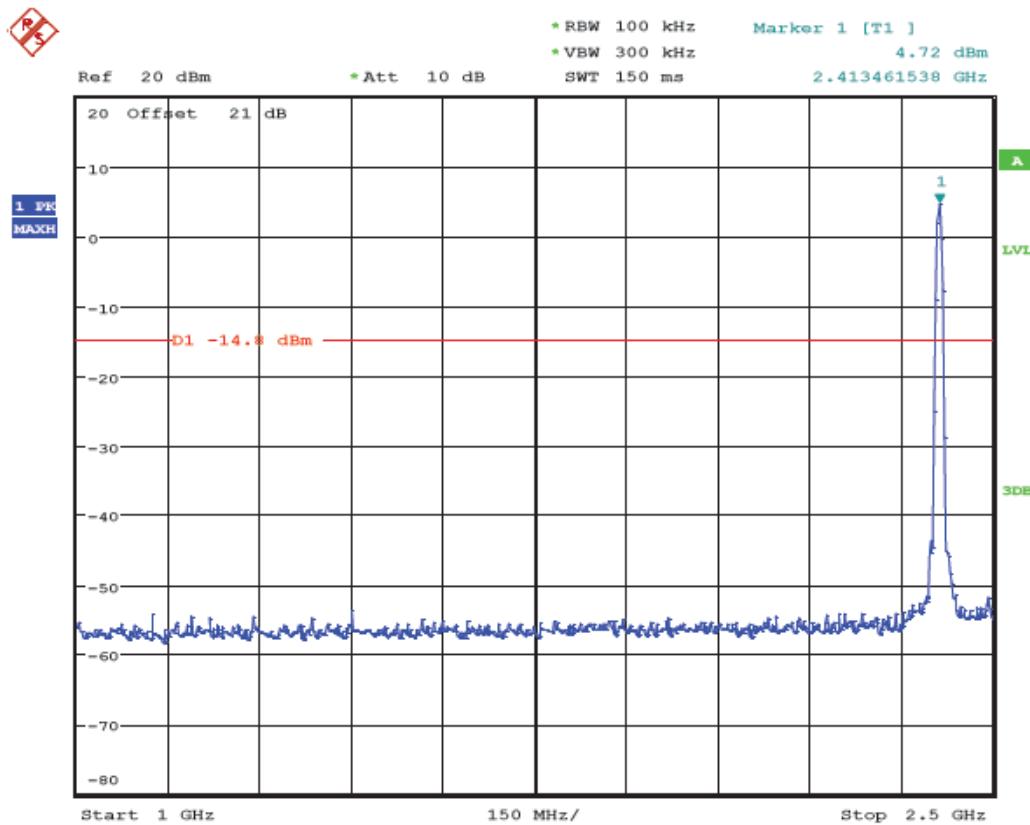


(Plot 4.6.1 A4: Channel 1: 2412MHz @ 802.11b)

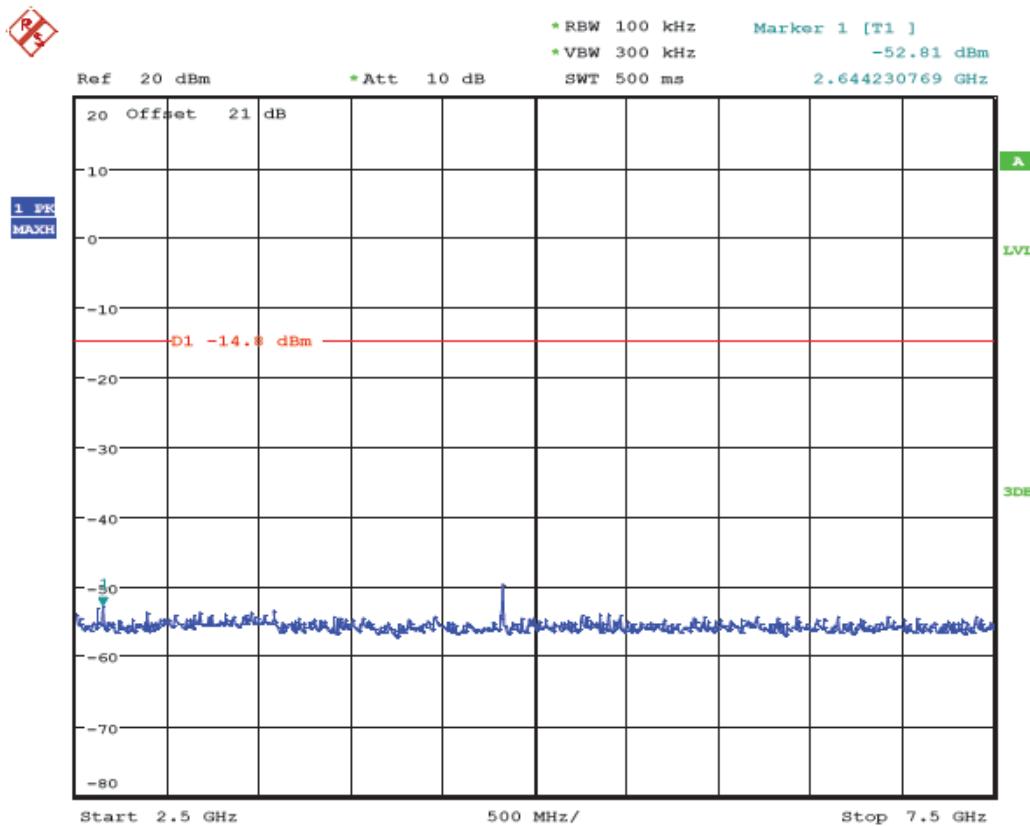



(Plot 4.6.1 A5: Channel 1: 2412MHz @ 802.11b)

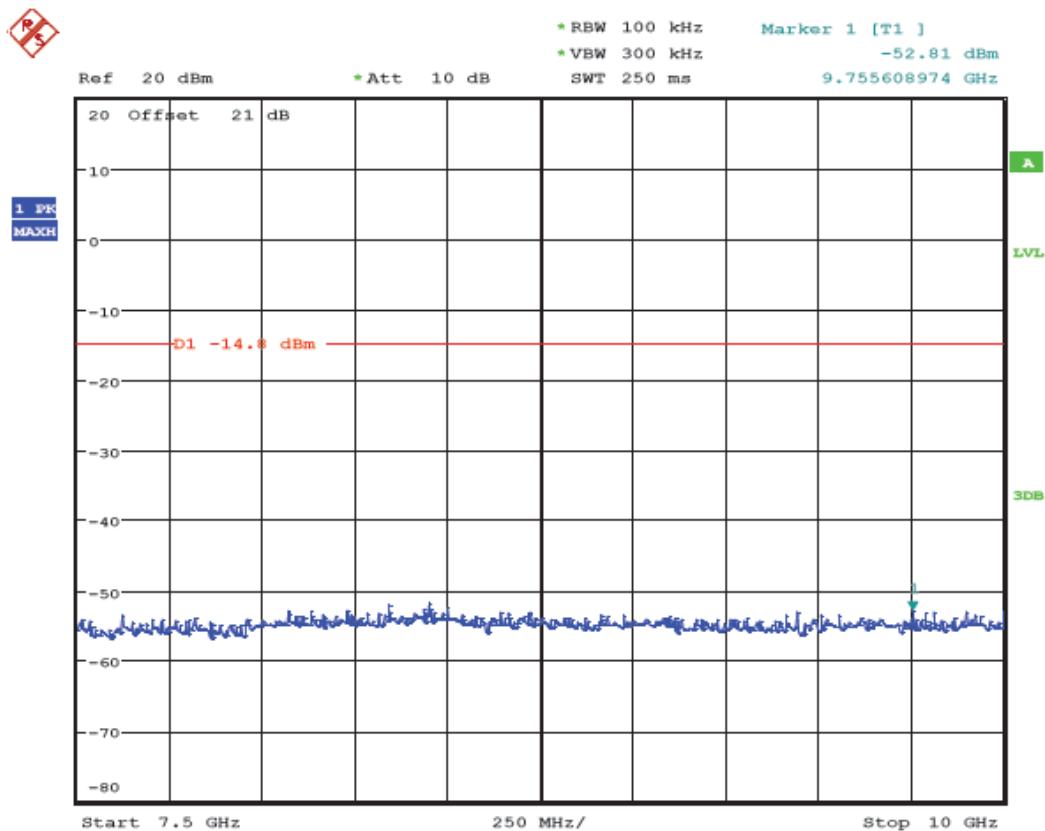


(Plot 4.6.1 A6: Channel 1: 2412MHz @ 802.11b)

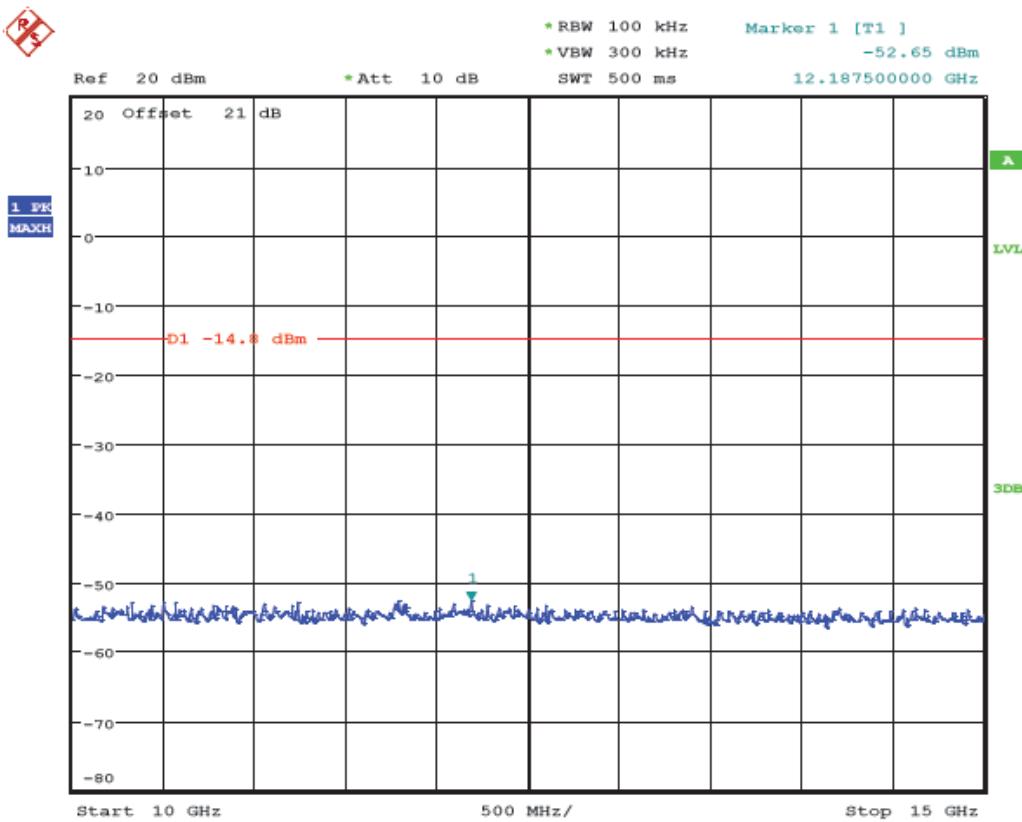


(Plot 4.6.1 A7: Channel 1: 2412MHz @ 802.11b)

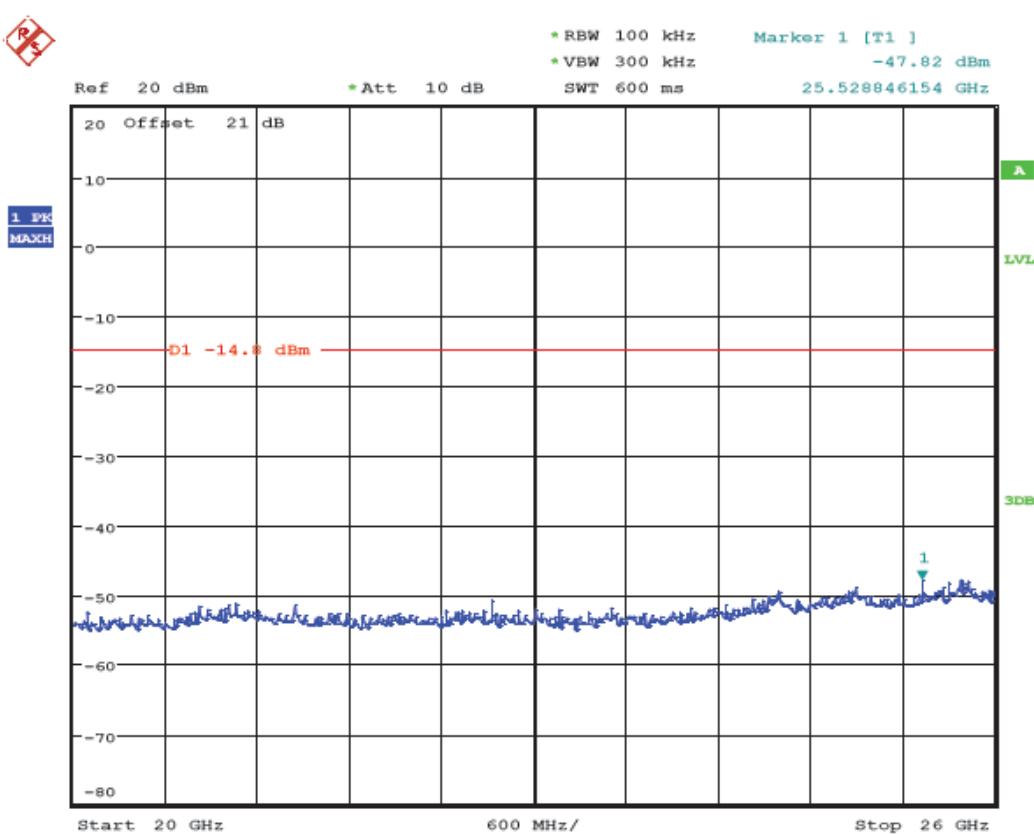
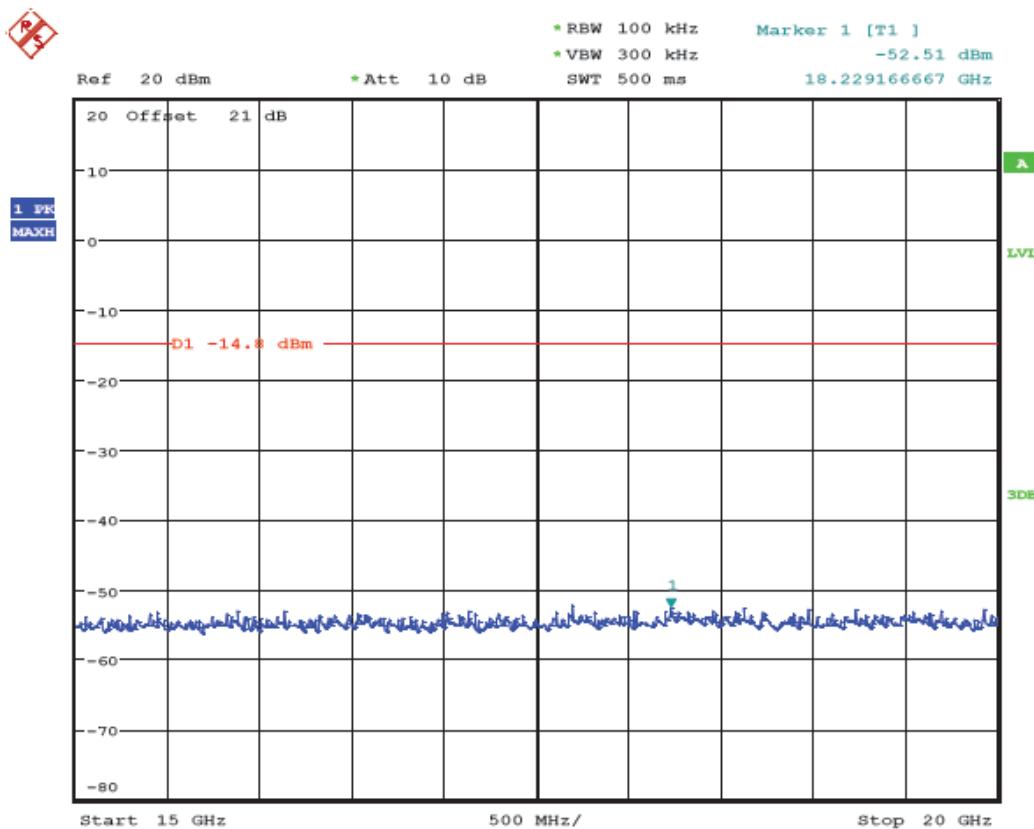


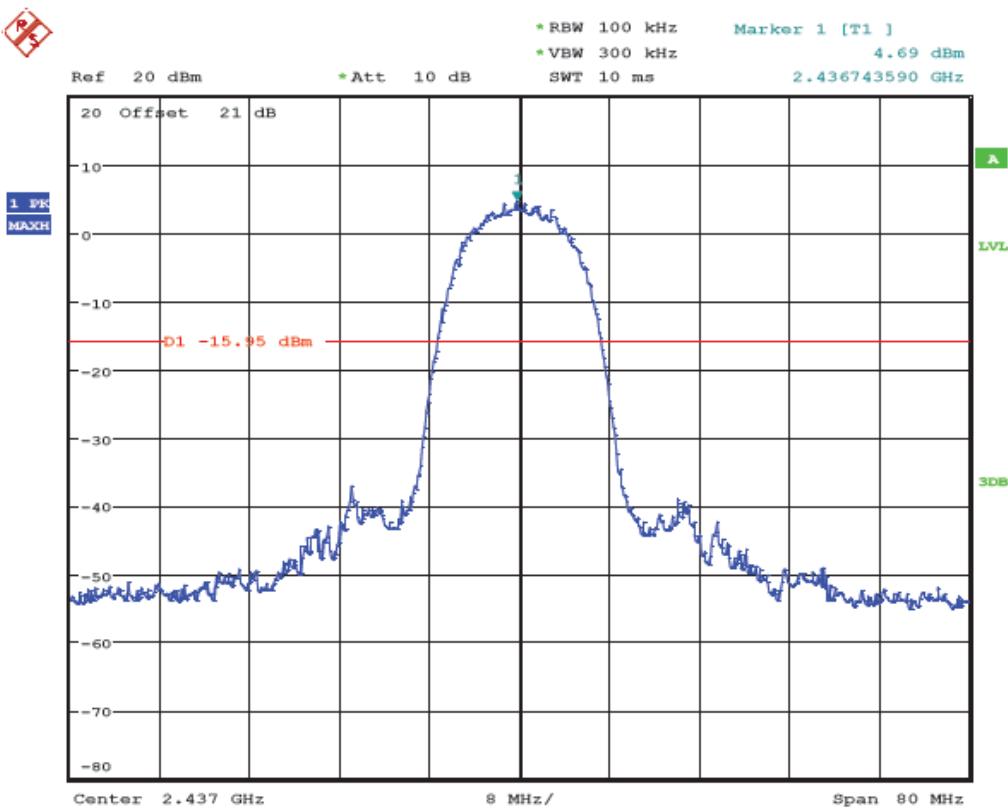


(Plot 4.6.1 B1: Channel 6: 2437MHz @ 802.11b)

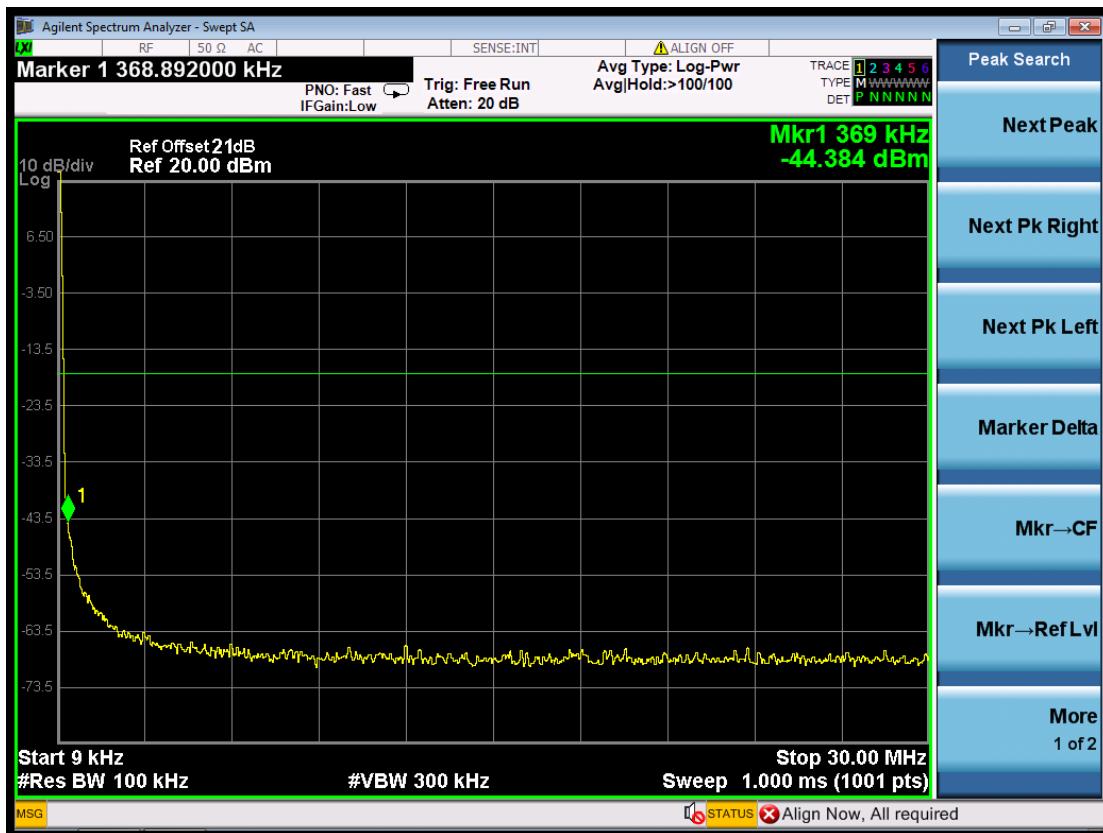


(Plot 4.6.1 B2: Channel 6: 2437MHz @ 802.11b)

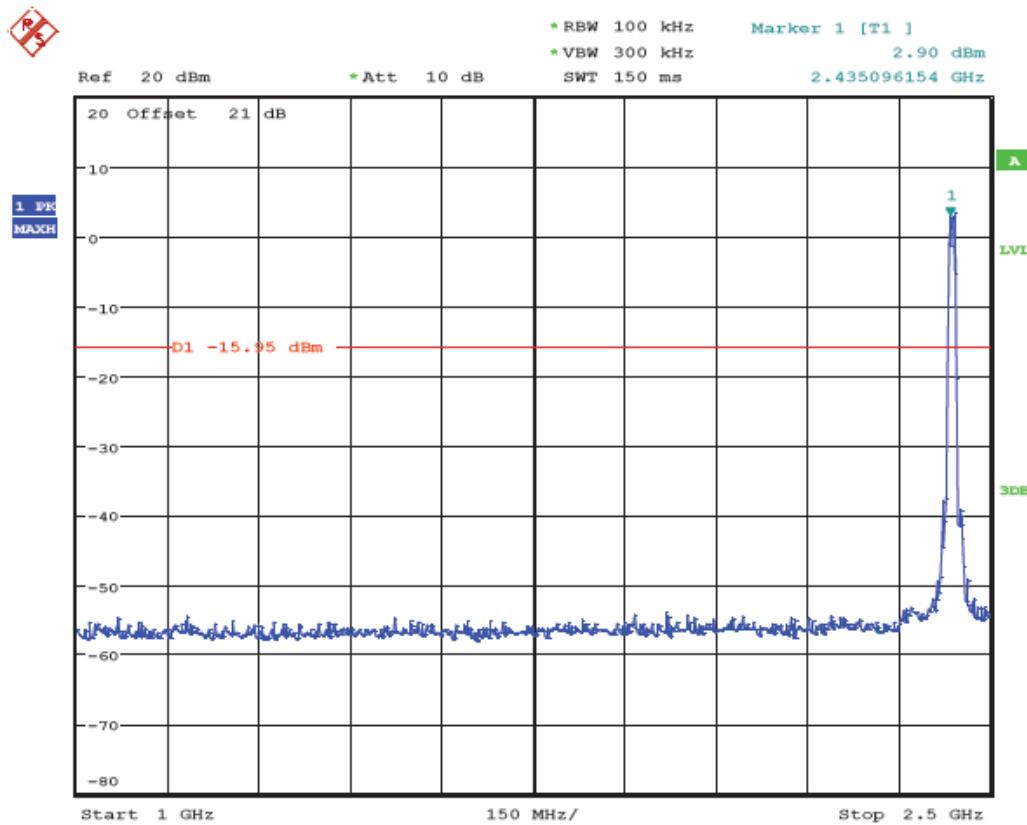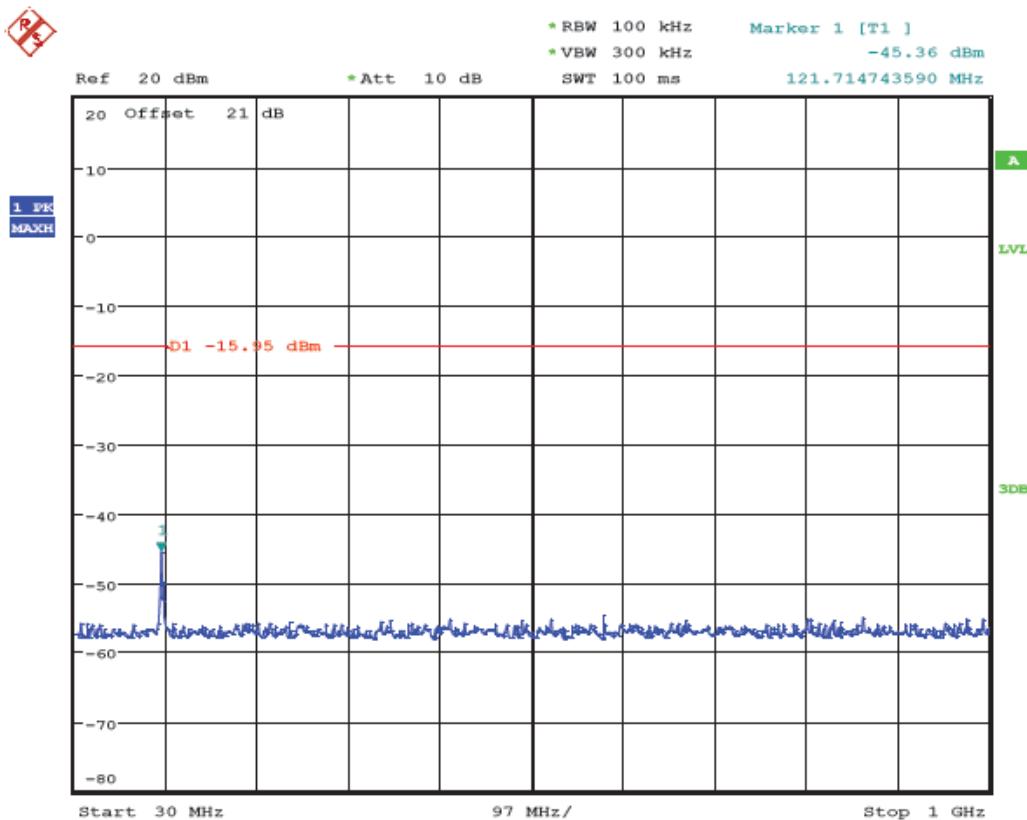


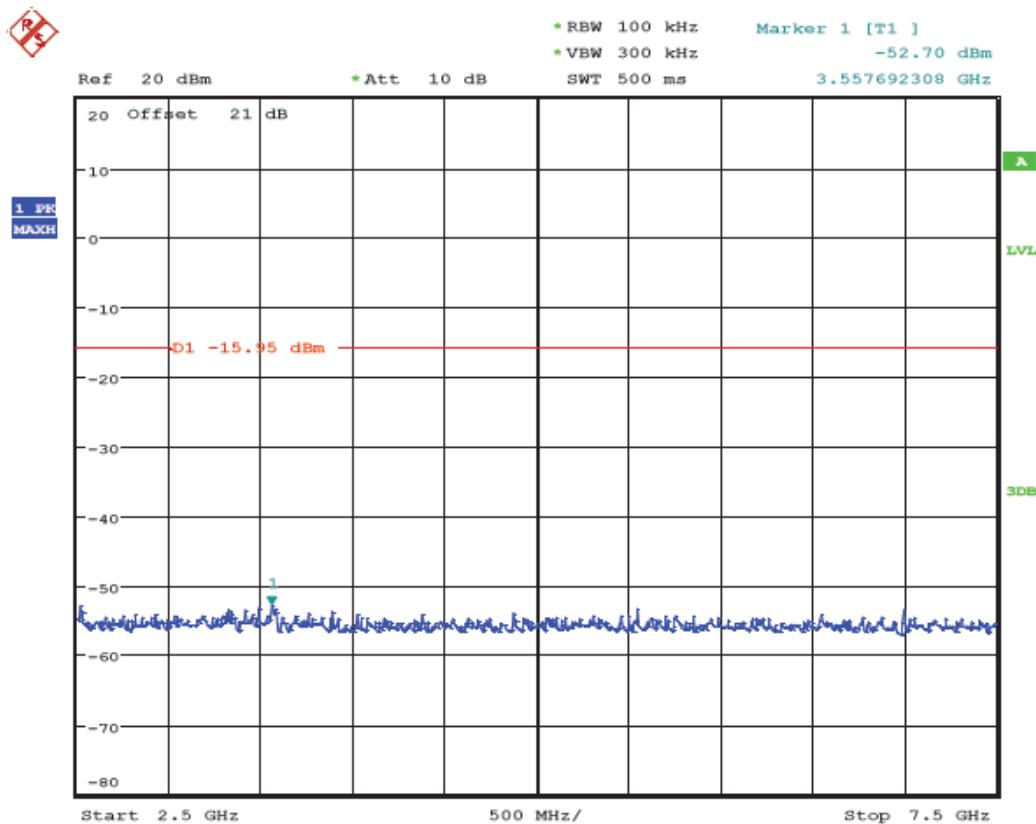


(Plot 4.6.1 B5: Channel 6: 2437MHz @ 802.11b)

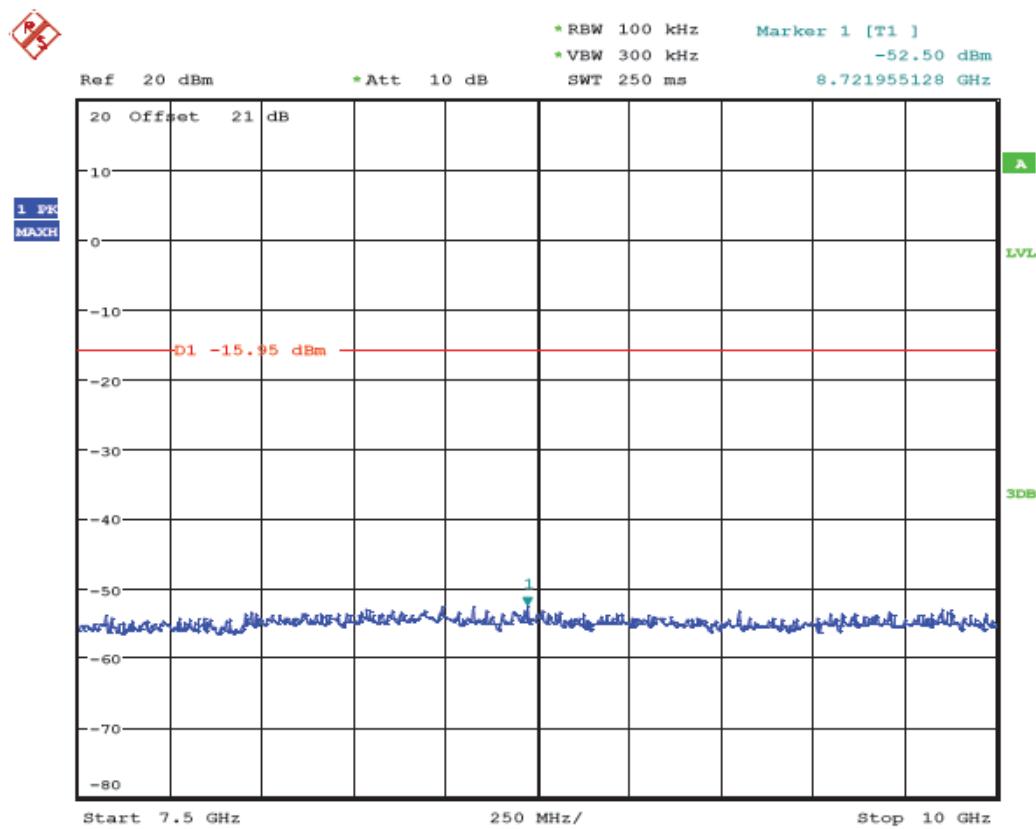


(Plot 4.6.1 B6: Channel 6: 2437MHz @ 802.11b)

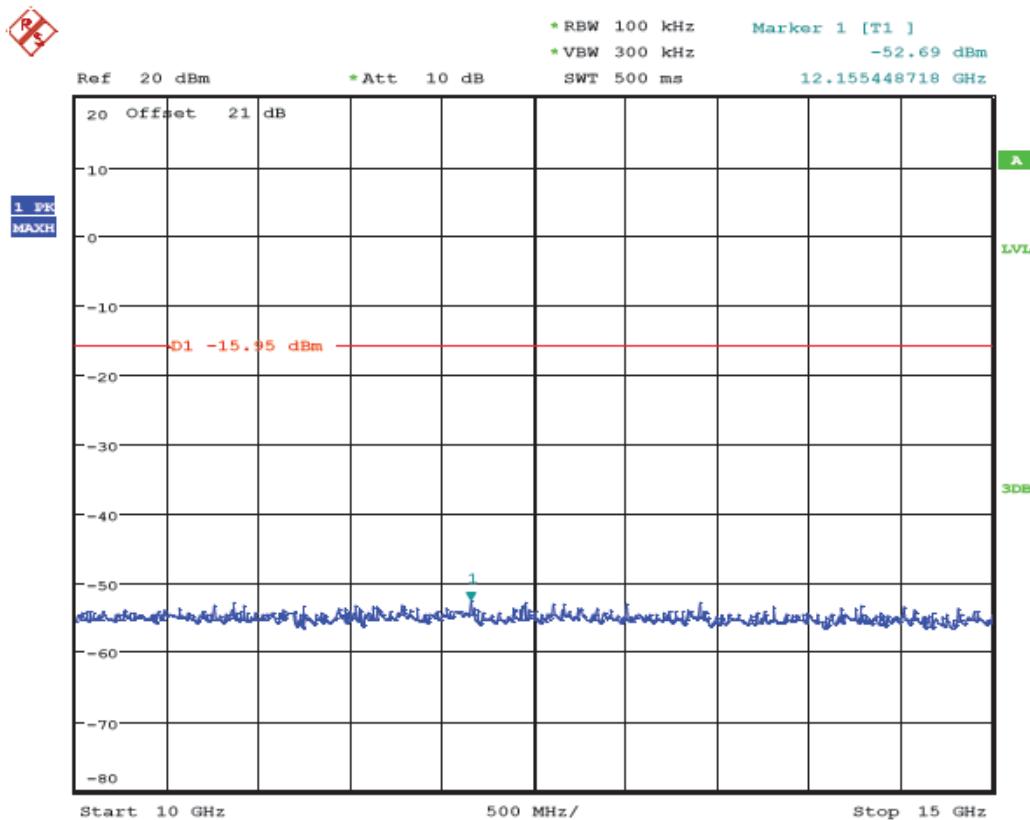


(Plot 4.6.1 B7: Channel 6: 2437MHz @ 802.11b)

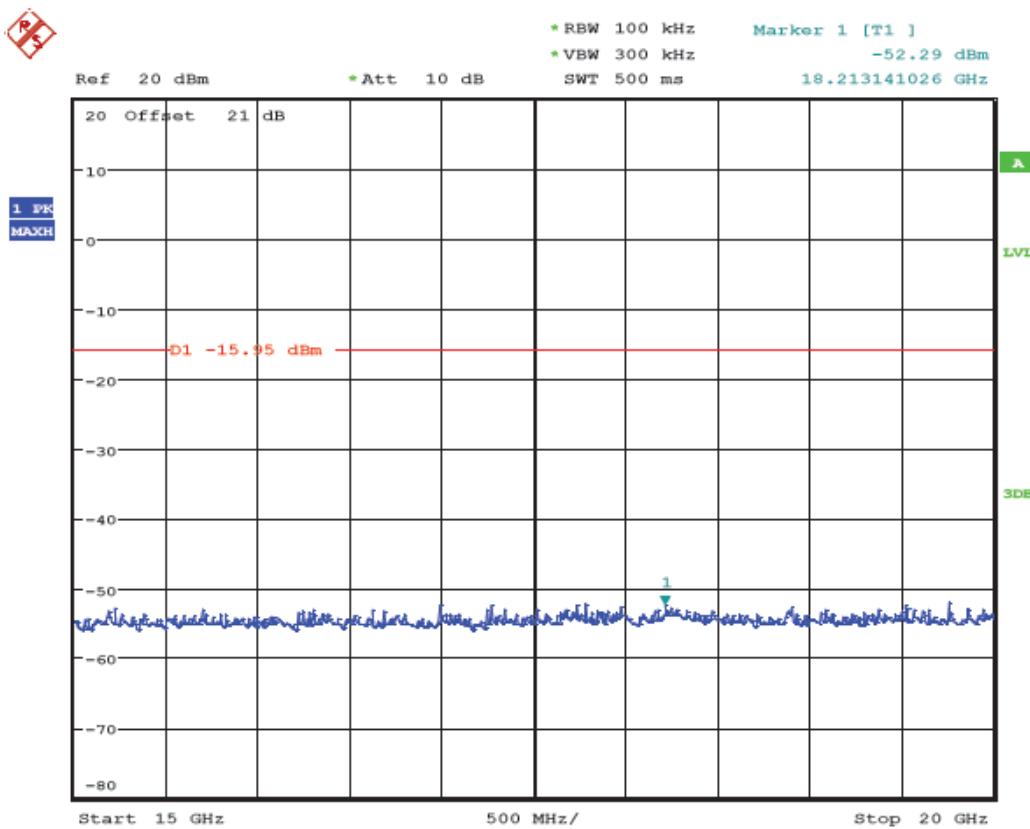


(Plot 4.6.1 B8: Channel 6: 2437MHz @ 802.11b)

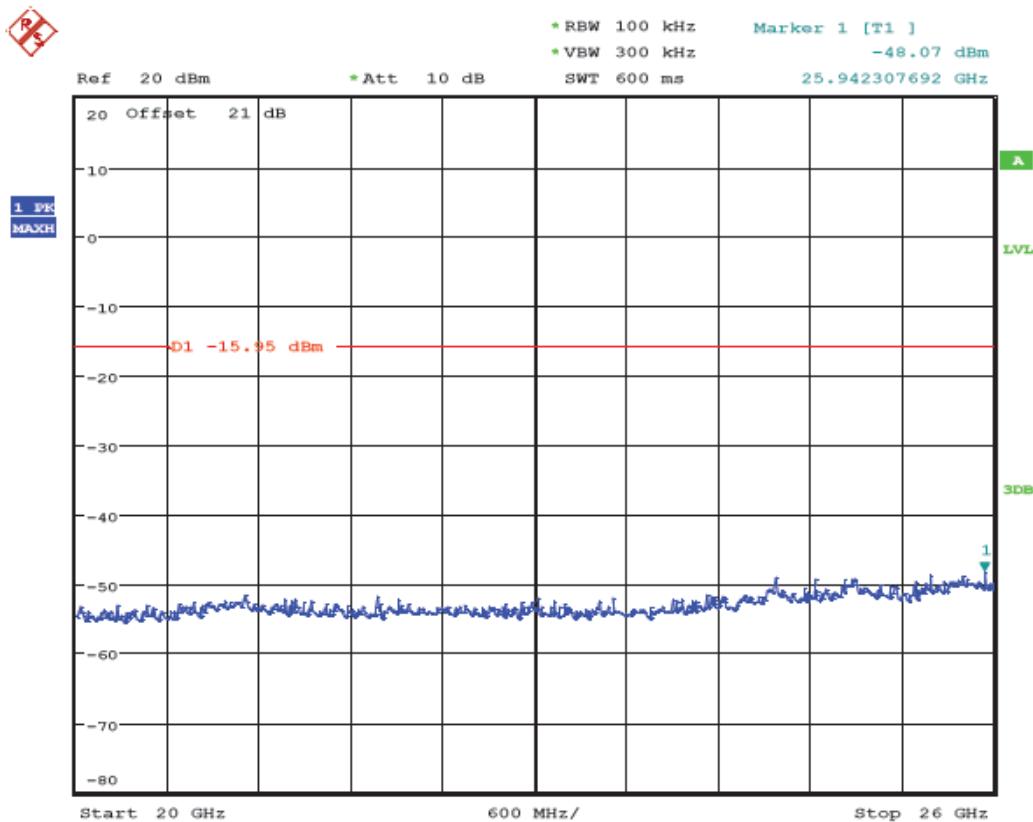


(Plot 4.6.1 B9: Channel 6: 2437MHz @ 802.11b)

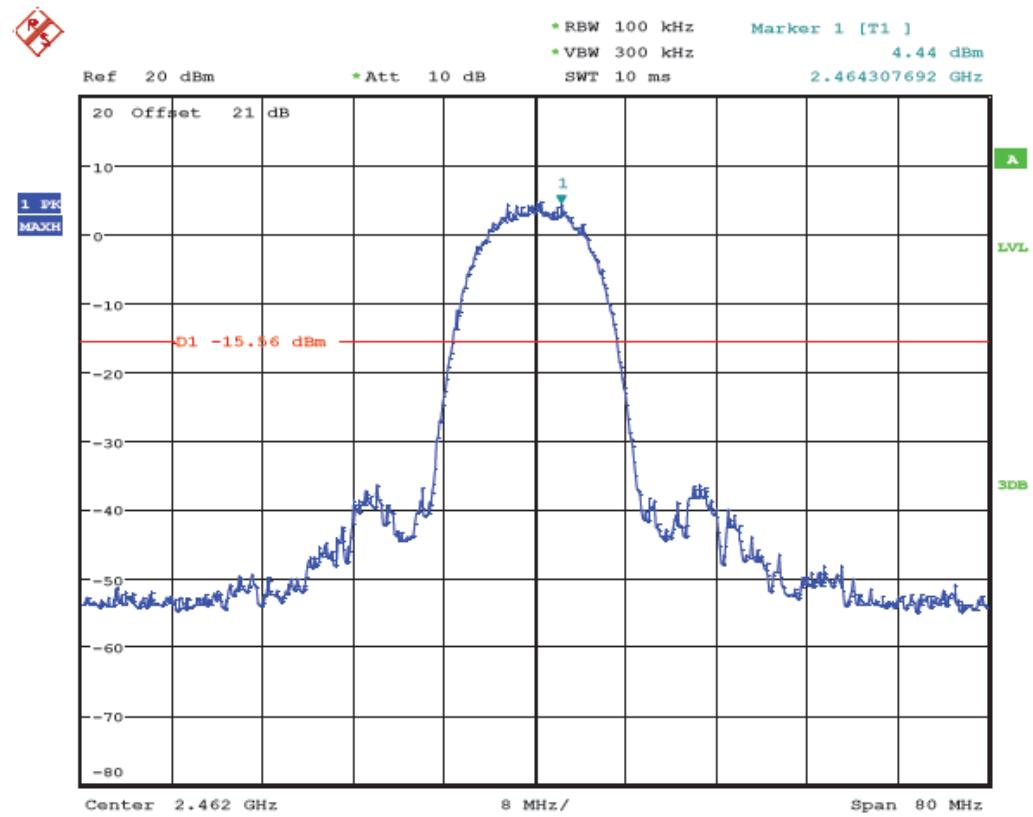


(Plot 4.6.1 C1: Channel 11: 2462MHz @ 802.11b)

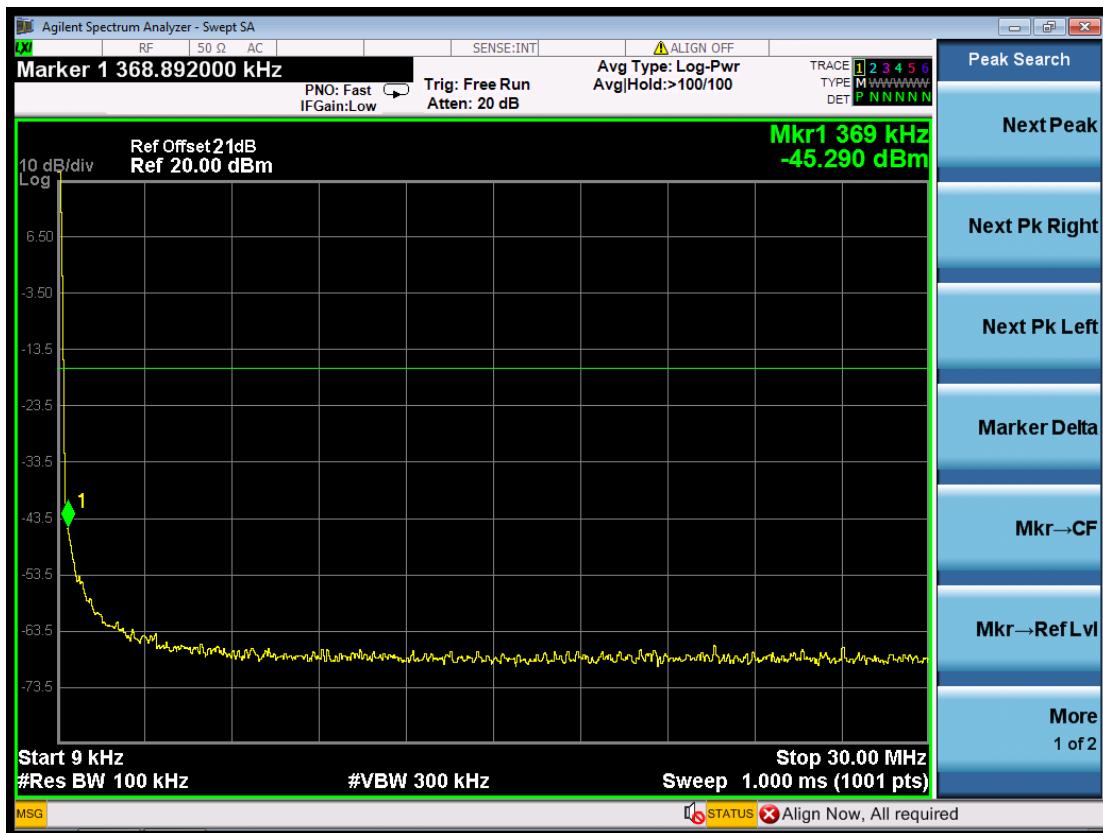


(Plot 4.6.1 C2: Channel 11: 2462MHz @ 802.11b)

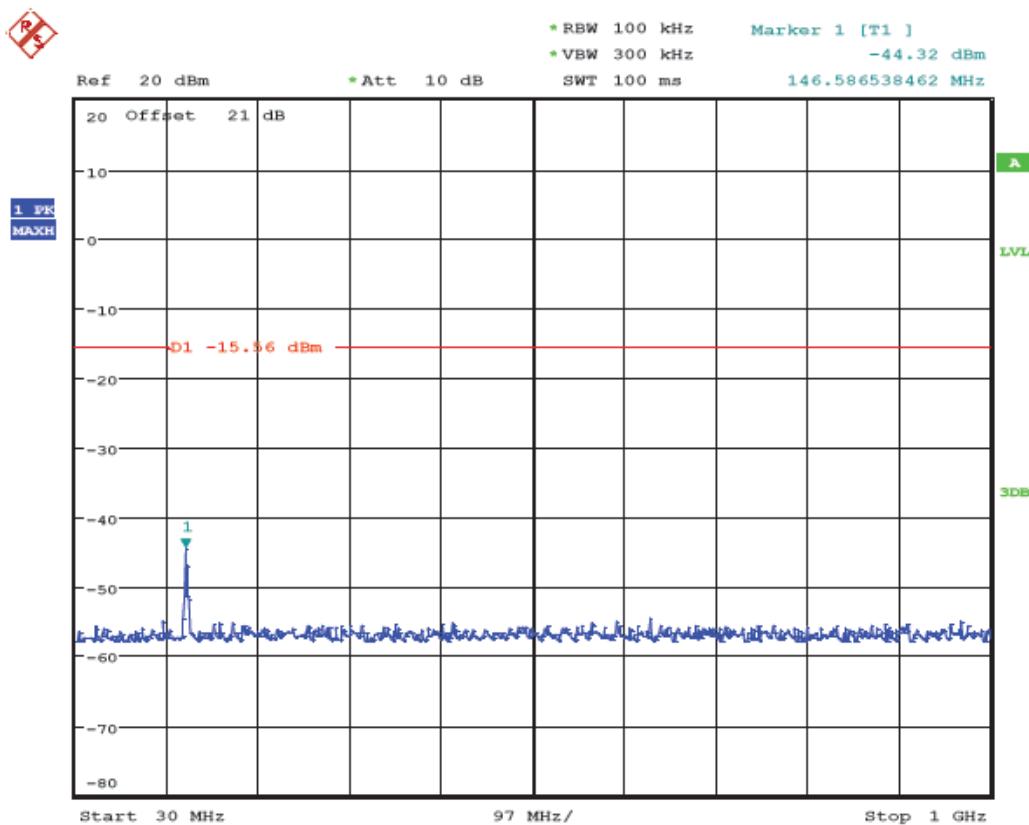


(Plot 4.6.1 C3: Channel 11: 2462MHz @ 802.11b)

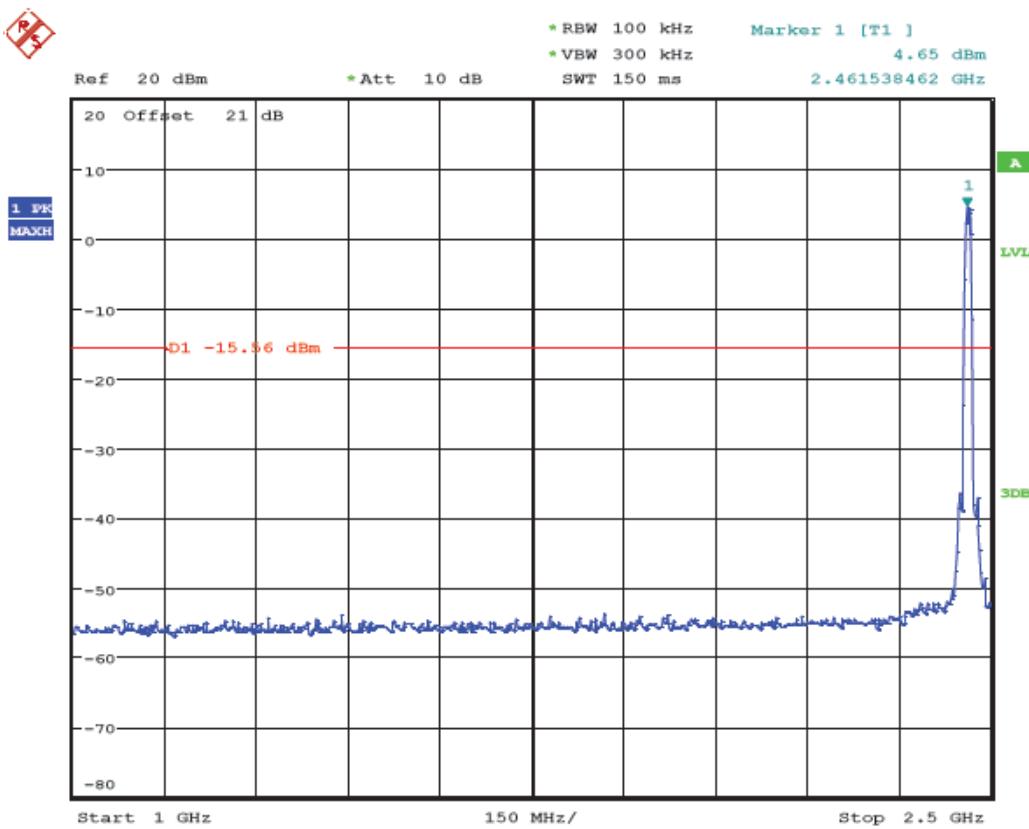


(Plot 4.6.1 C4: Channel 11: 2462MHz @ 802.11b)

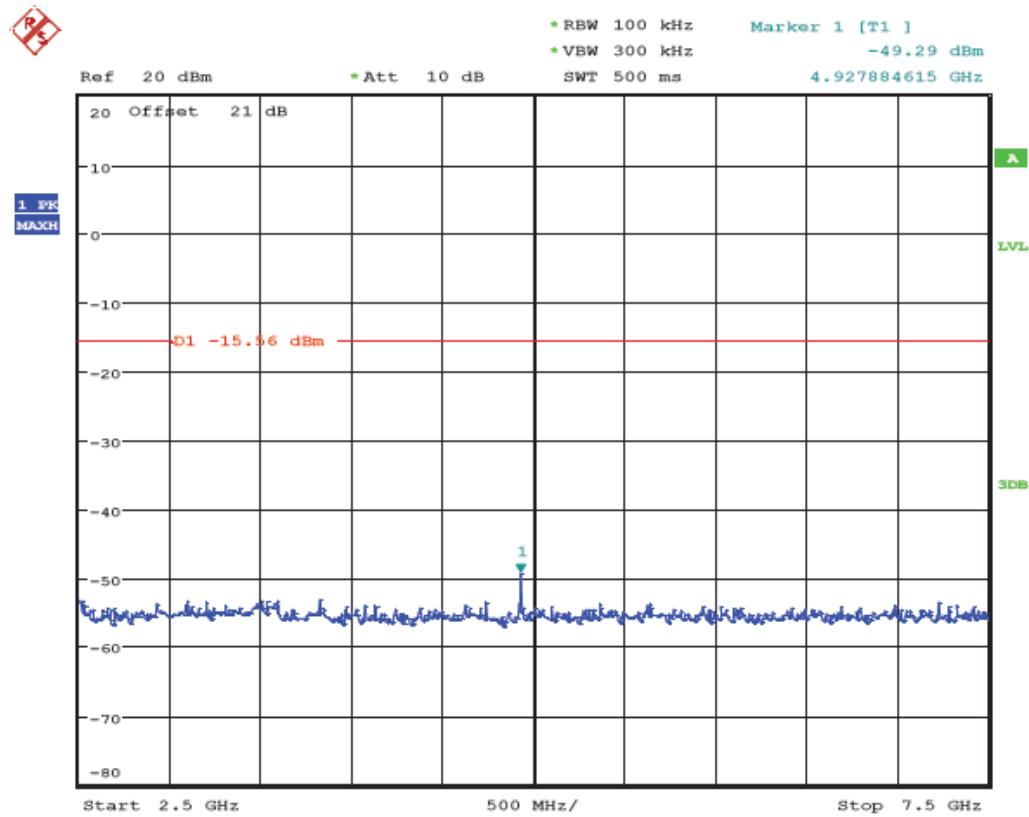


(Plot 4.6.1 C5: Channel 11: 2462MHz @ 802.11b)

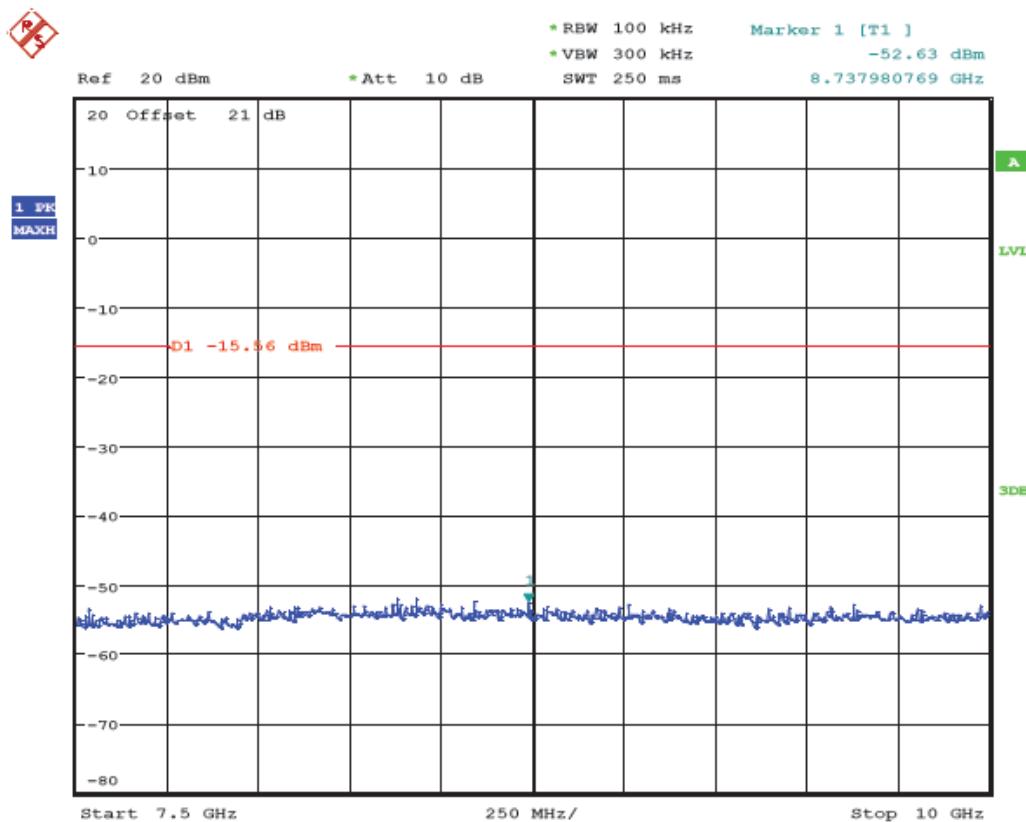


(Plot 4.6.1 C6: Channel 11: 2462MHz @ 802.11b)

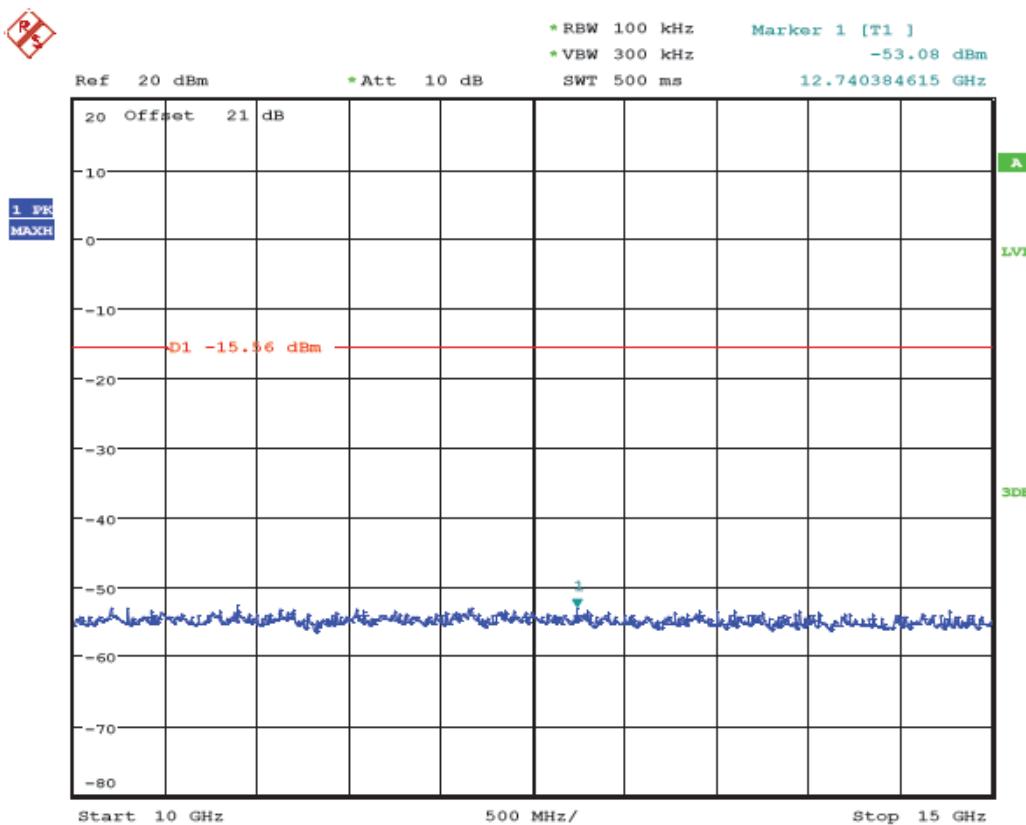


(Plot 4.6.1 C7: Channel 11: 2462MHz @ 802.11b)

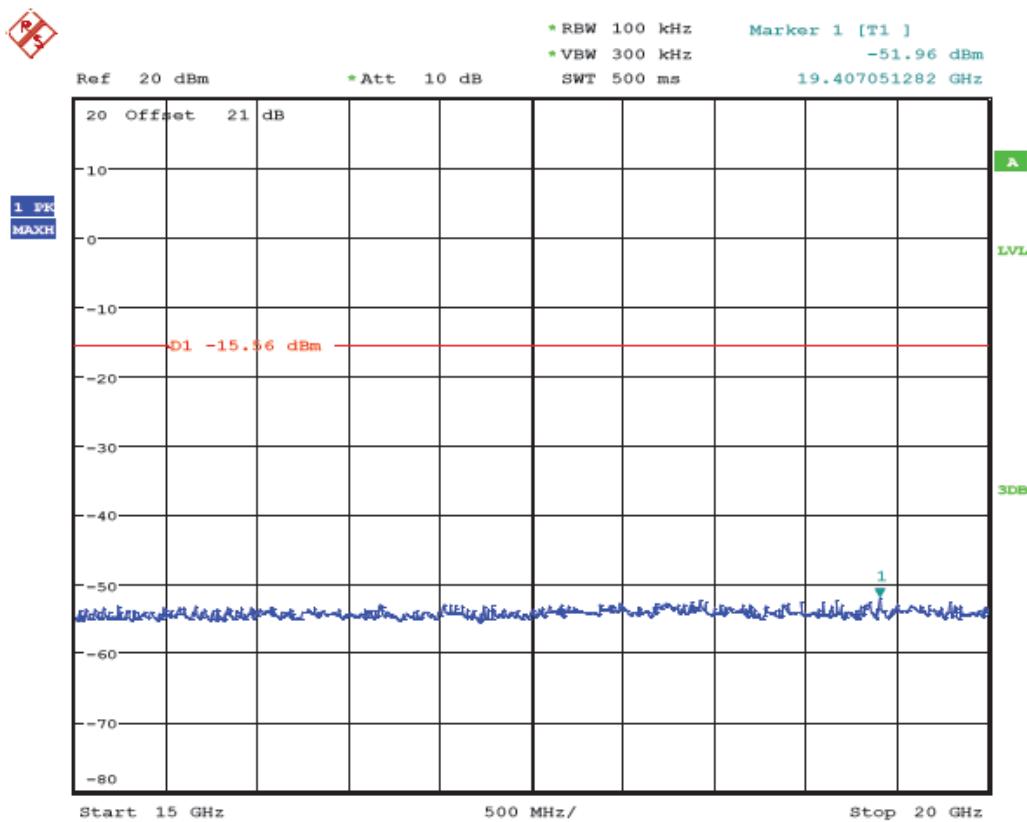


(Plot 4.6.1 C8: Channel 11: 2462MHz @ 802.11b)

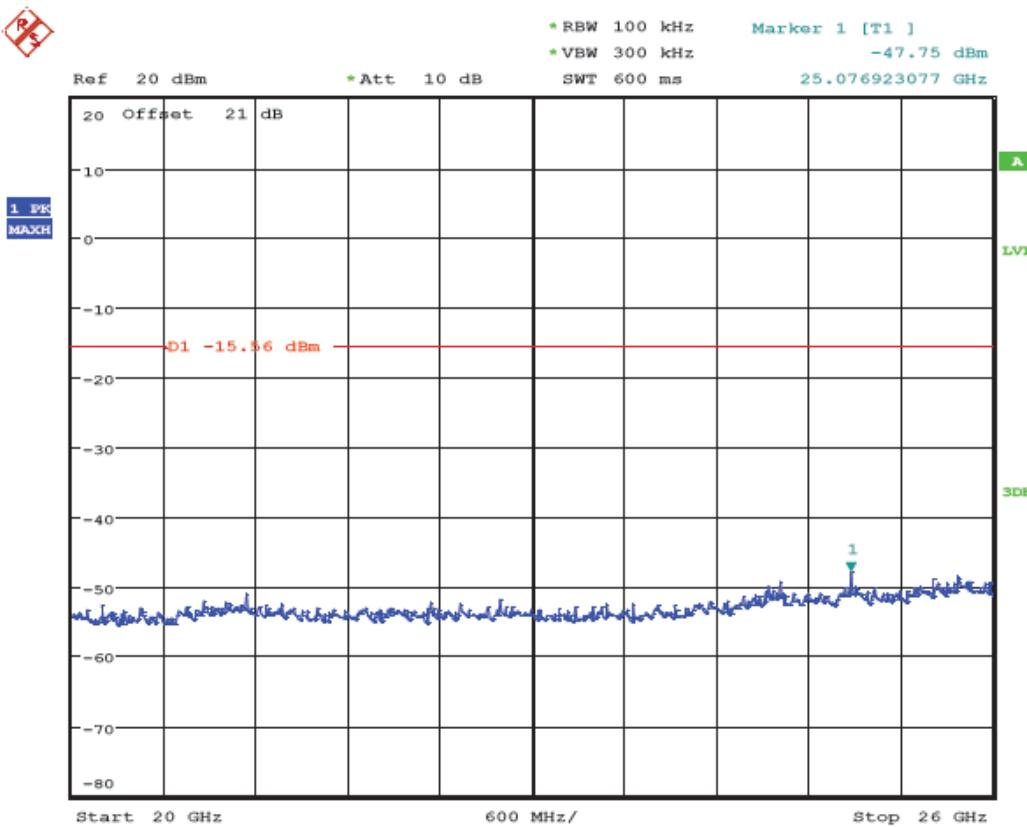

(Plot 4.6.1 C9: Channel 11: 2462MHz @ 802.11b)

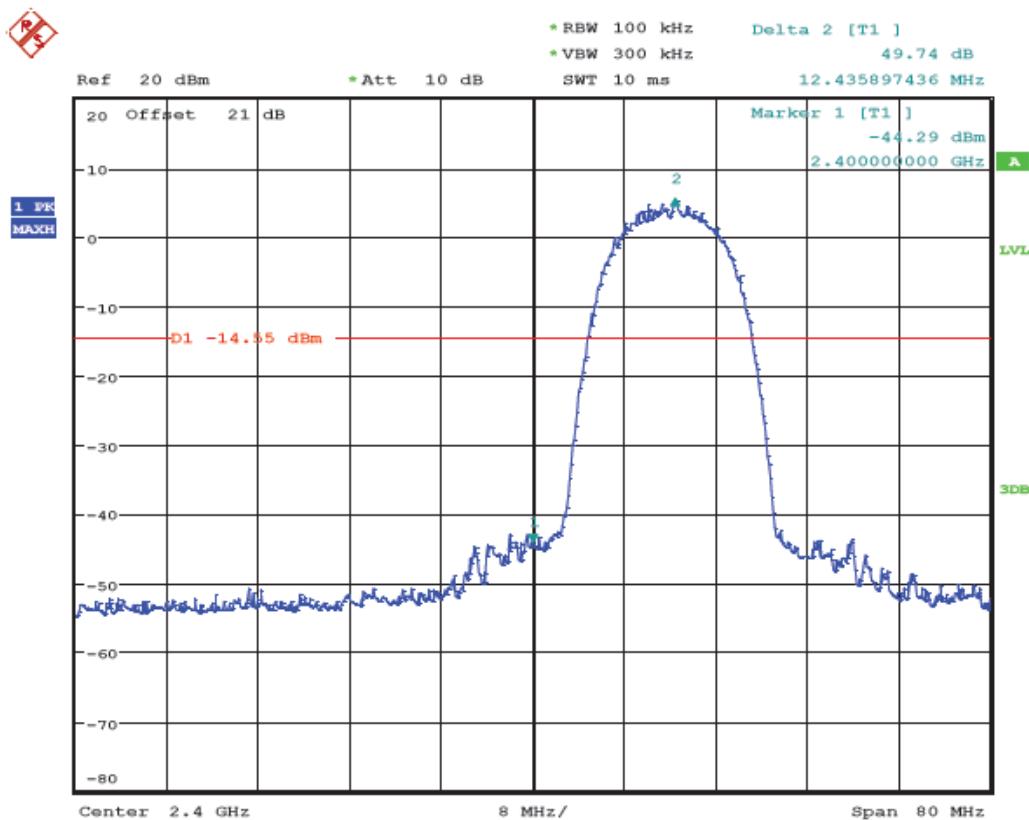

(Plot 6.6.1 D: Channel 1: 2412MHz @ 802.11b)

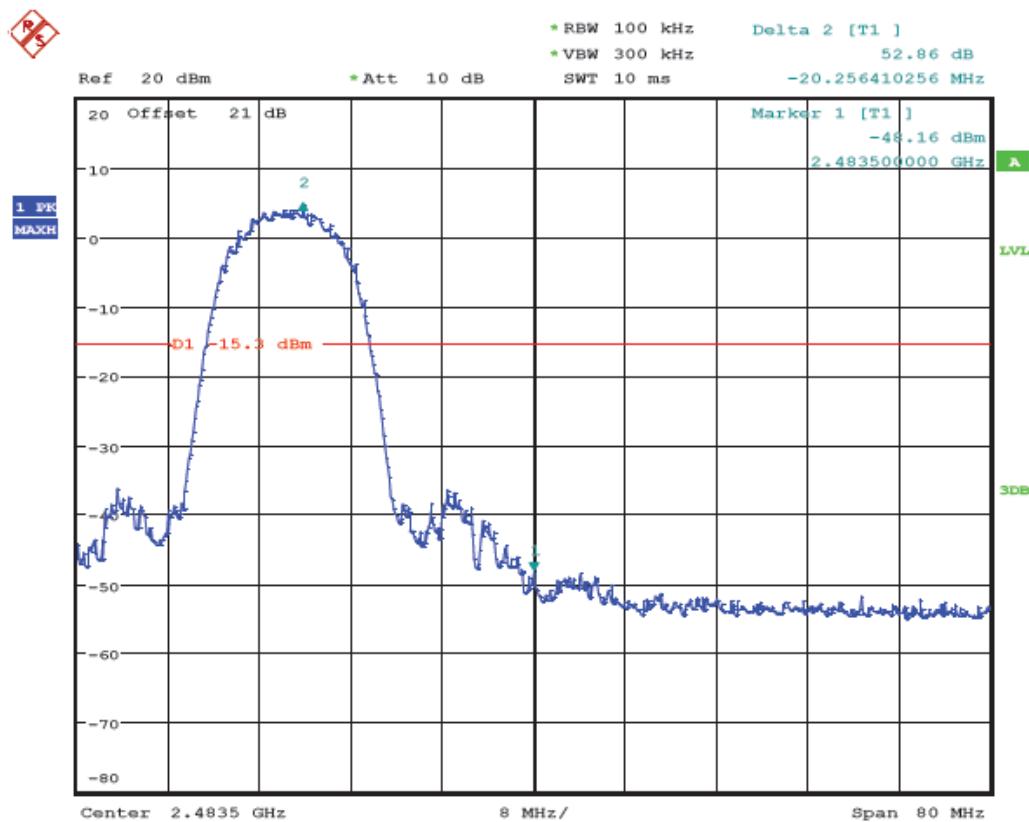

(Plot 6.6.1 E: Channel 11: 2462MHz @ 802.11b)

4.6.2 802.11g Test Mode


A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
1	2412	2.412 GHz	Plot 4.6.2 A1	---	PASS
		9KHz-30MHz	Plot 4.6.2 A2	-20	PASS
		30MHz-1GHz	Plot 4.6.2 A3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.2 A4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.2 A5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.2 A6	-20	PASS
		10GHz-15GHz	Plot 4.6.2 A7	-20	PASS
		15GHz-20GHz	Plot 4.6.2 A8	-20	PASS
		20GHz-26GHz	Plot 4.6.2 A9	-20	PASS
6	2437	2.437 GHz	Plot 4.6.2 B1	---	PASS
		9KHz-30MHz	Plot 4.6.2 B2	-20	PASS
		30MHz-1GHz	Plot 4.6.2 B3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.2 B4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.2 B5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.2 B6	-20	PASS
		10GHz-15GHz	Plot 4.6.2 B7	-20	PASS
		15GHz-20GHz	Plot 4.6.2 B8	-20	PASS
		20GHz-26GHz	Plot 4.6.2 B9	-20	PASS
11	2462	2.462 GHz	Plot 4.6.2 C1	---	PASS
		9KHz-30MHz	Plot 4.6.2 C2	-20	PASS
		30MHz-1GHz	Plot 4.6.2 C3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.2 C4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.2 C5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.2 C6	-20	PASS
		10GHz-15GHz	Plot 4.6.2 C7	-20	PASS
		15GHz-20GHz	Plot 4.6.2 C8	-20	PASS
		20GHz-26GHz	Plot 4.6.2 C9	-20	PASS


Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-41.36	Peak	-20	Plot 4.6.2 D	PASS
2483.50	-42.18	Peak	-20	Plot 4.6.2 E	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable loss.


B. Test Plots

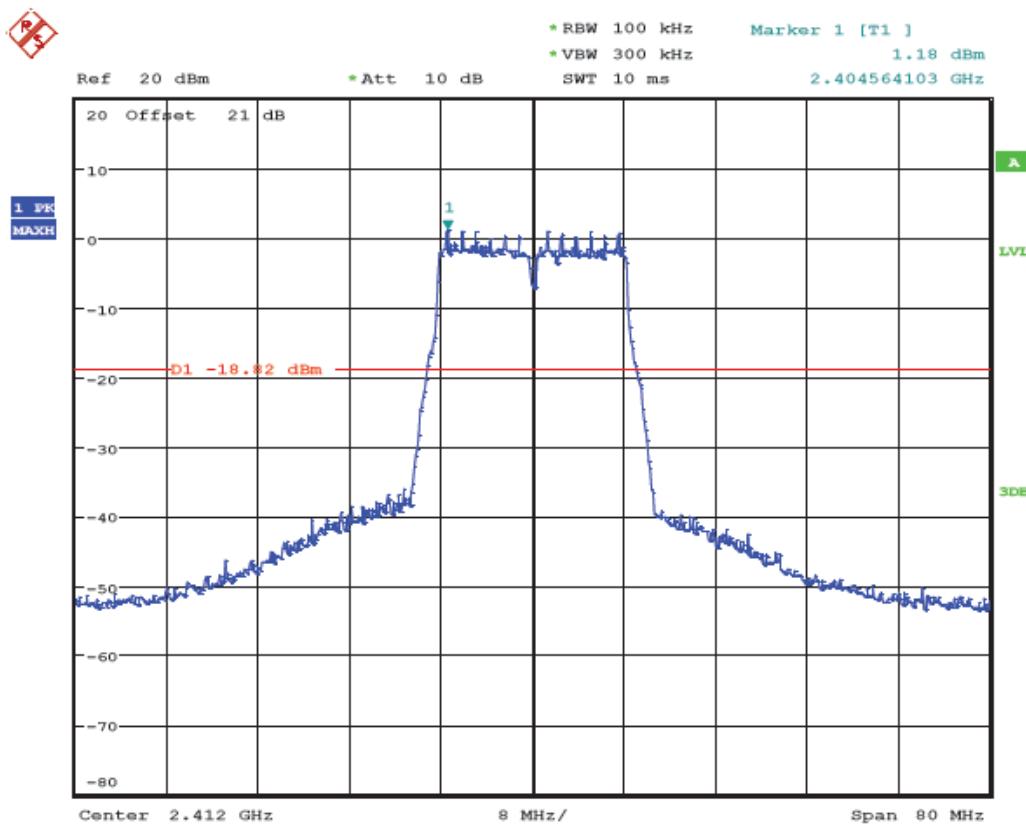


(Plot 4.6.2 A1: Channel 1: 2412MHz @ 802.11g)

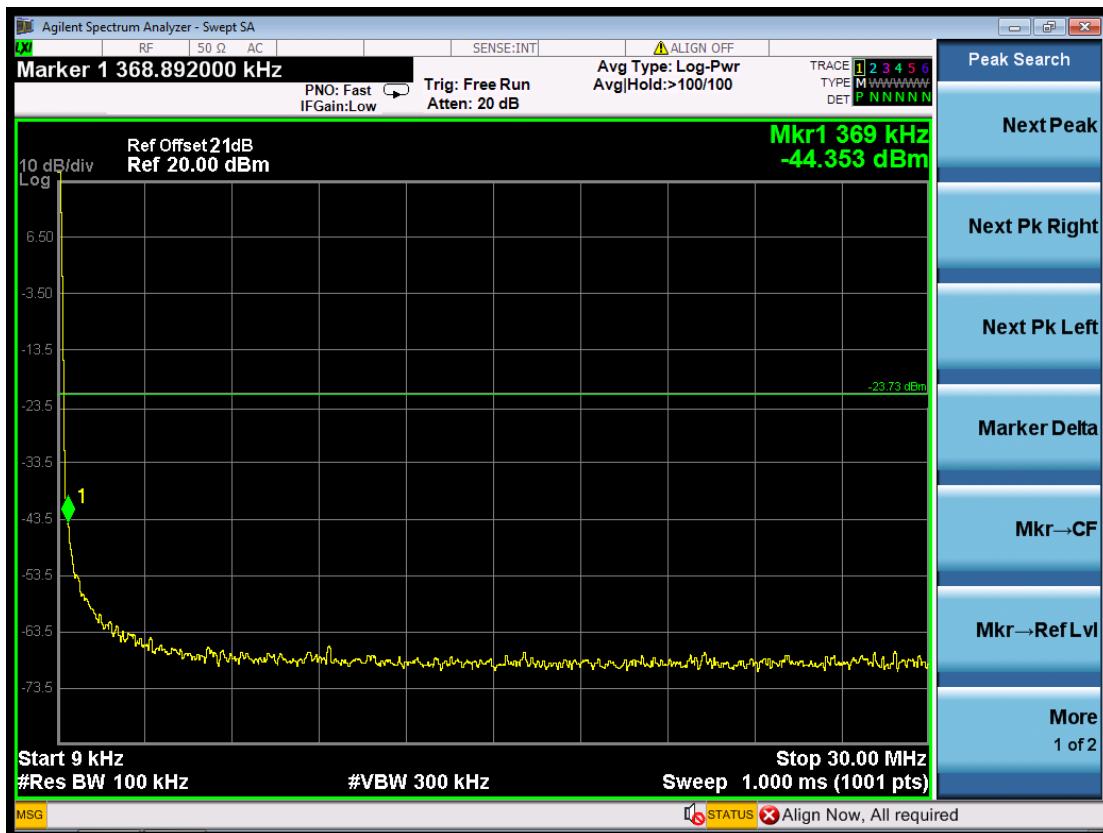


(Plot 4.6.2 A2: Channel 1: 2412MHz @ 802.11g)

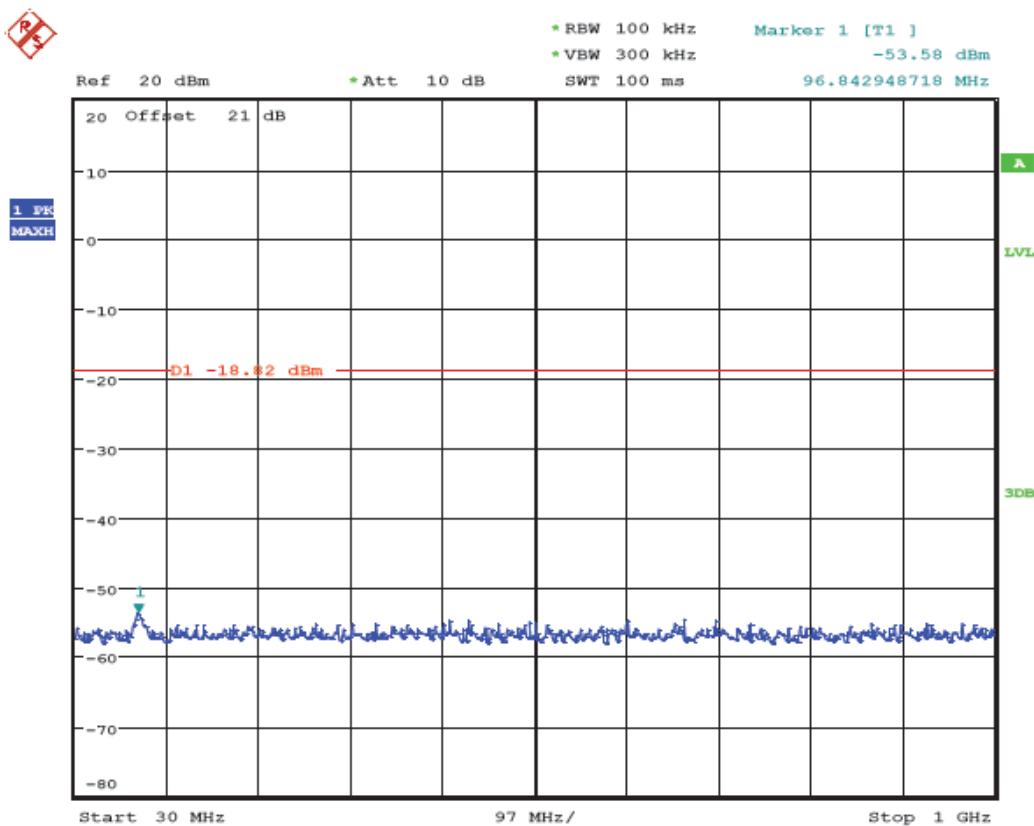


(Plot 4.6.2 A3: Channel 1: 2412MHz @ 802.11g)

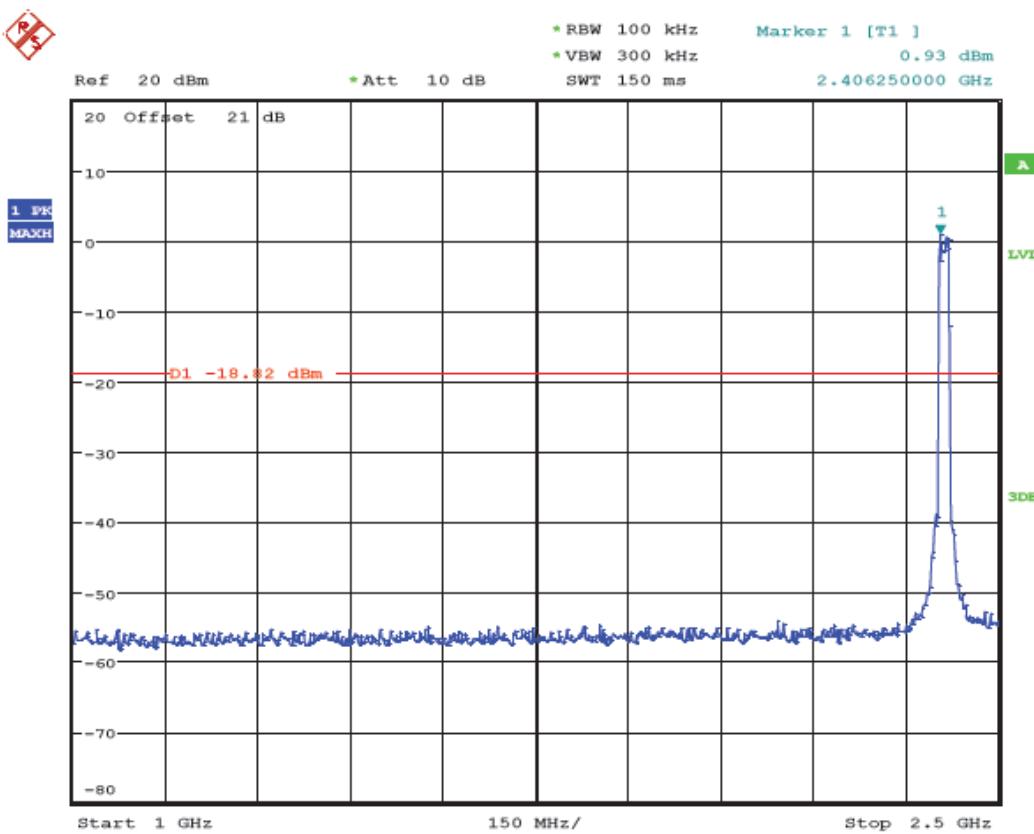


(Plot 4.6.2 A4: Channel 1: 2412MHz @ 802.11g)

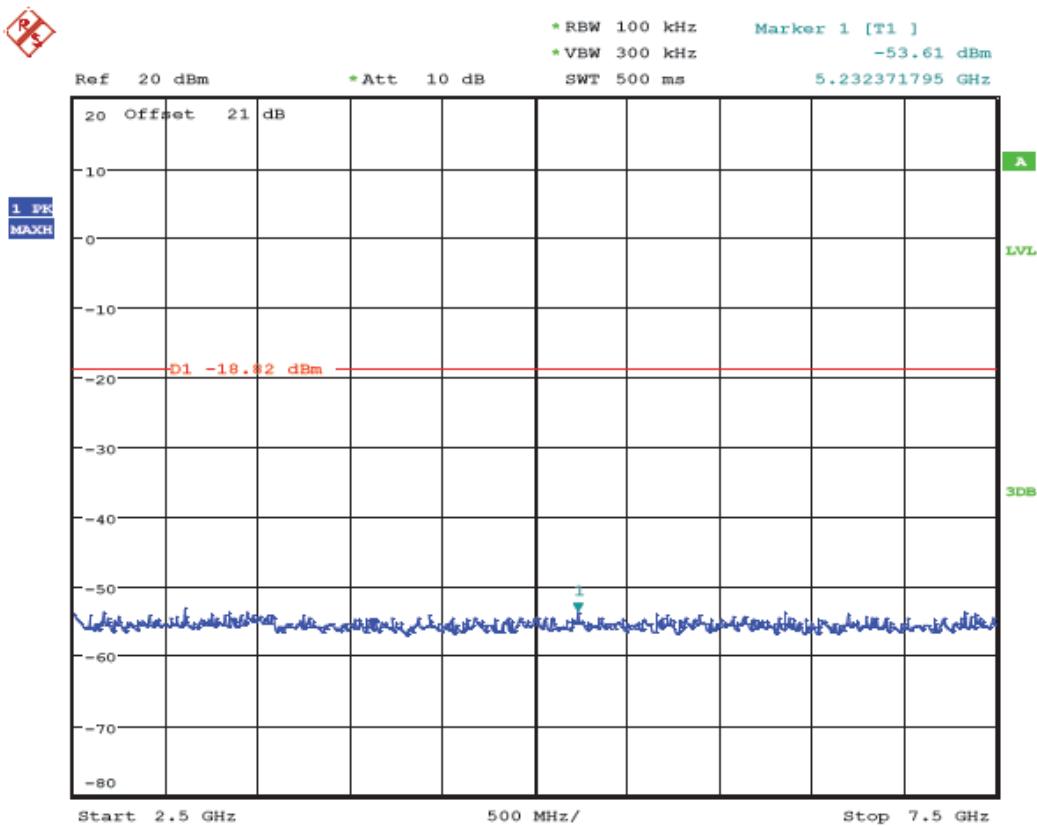


(Plot 4.6.2 A5: Channel 1: 2412MHz @ 802.11g)

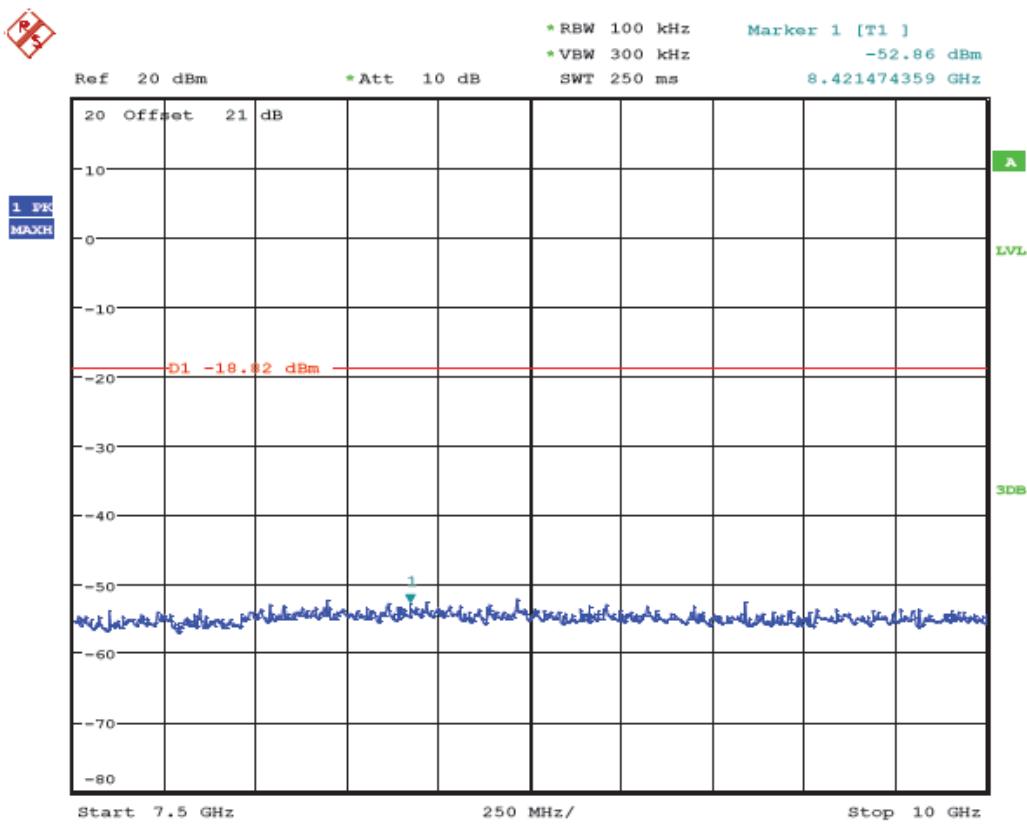



(Plot 4.6.2 A6: Channel 1: 2412MHz @ 802.11g)

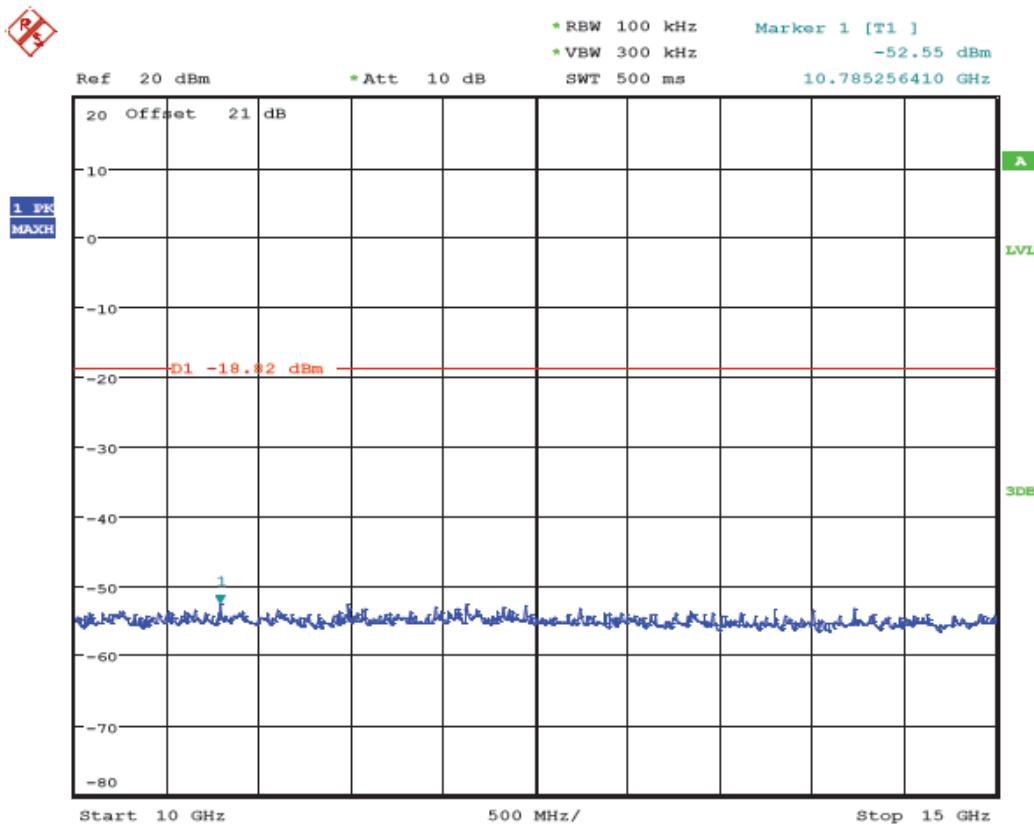


(Plot 4.6.2 A7: Channel 1: 2412MHz @ 802.11g)

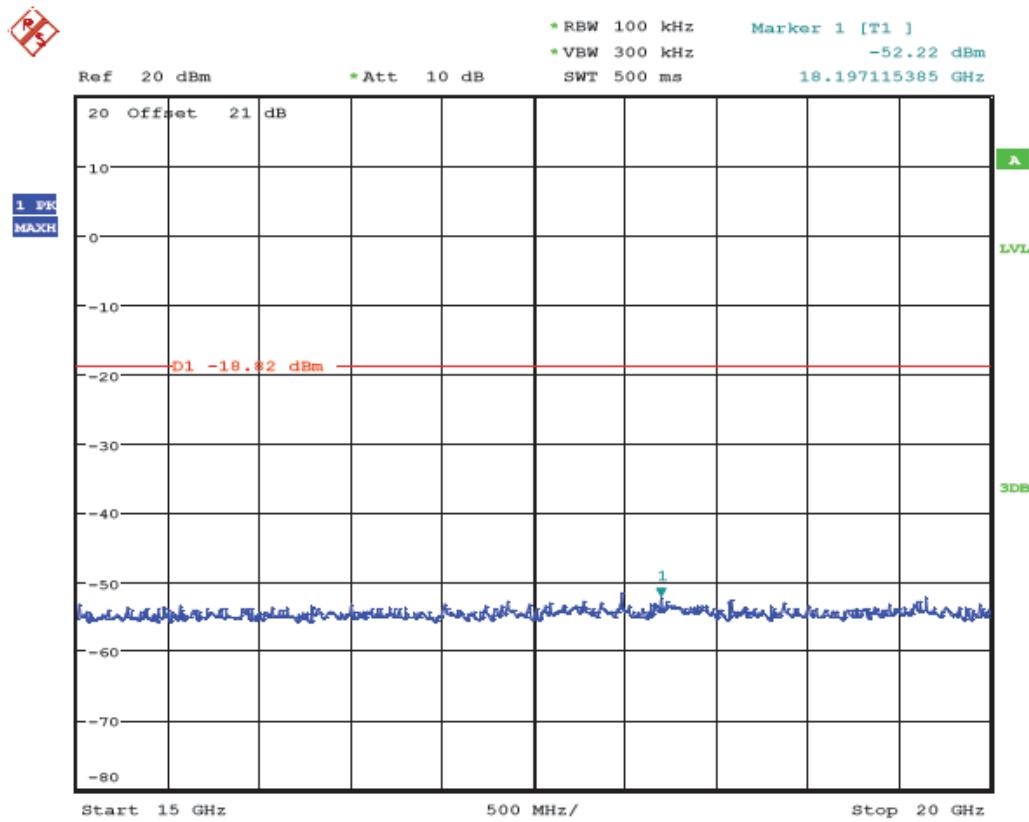


(Plot 4.6.2 A8: Channel 1: 2412MHz @ 802.11g)

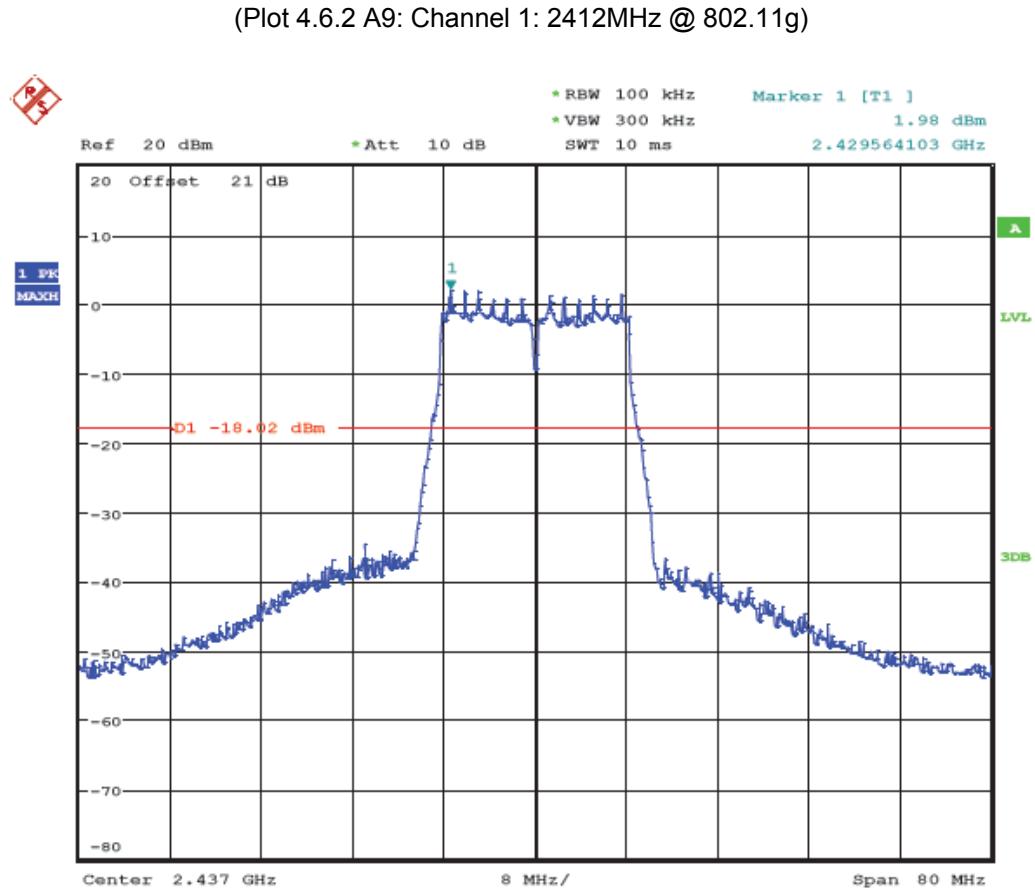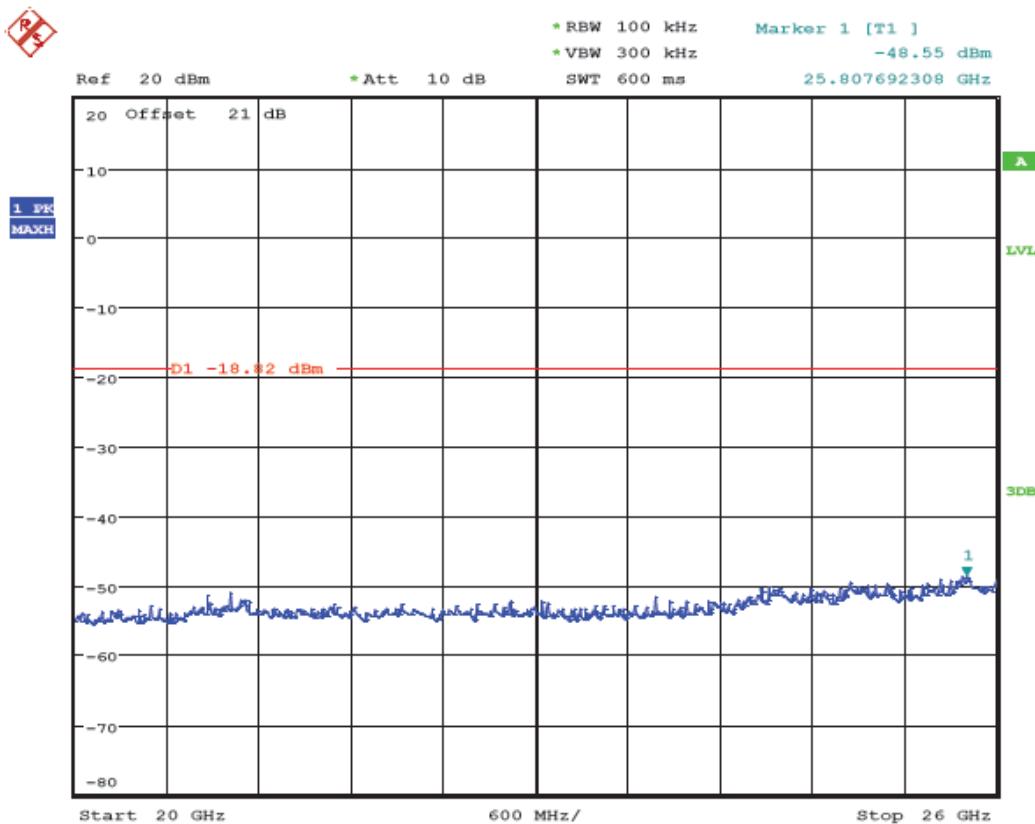


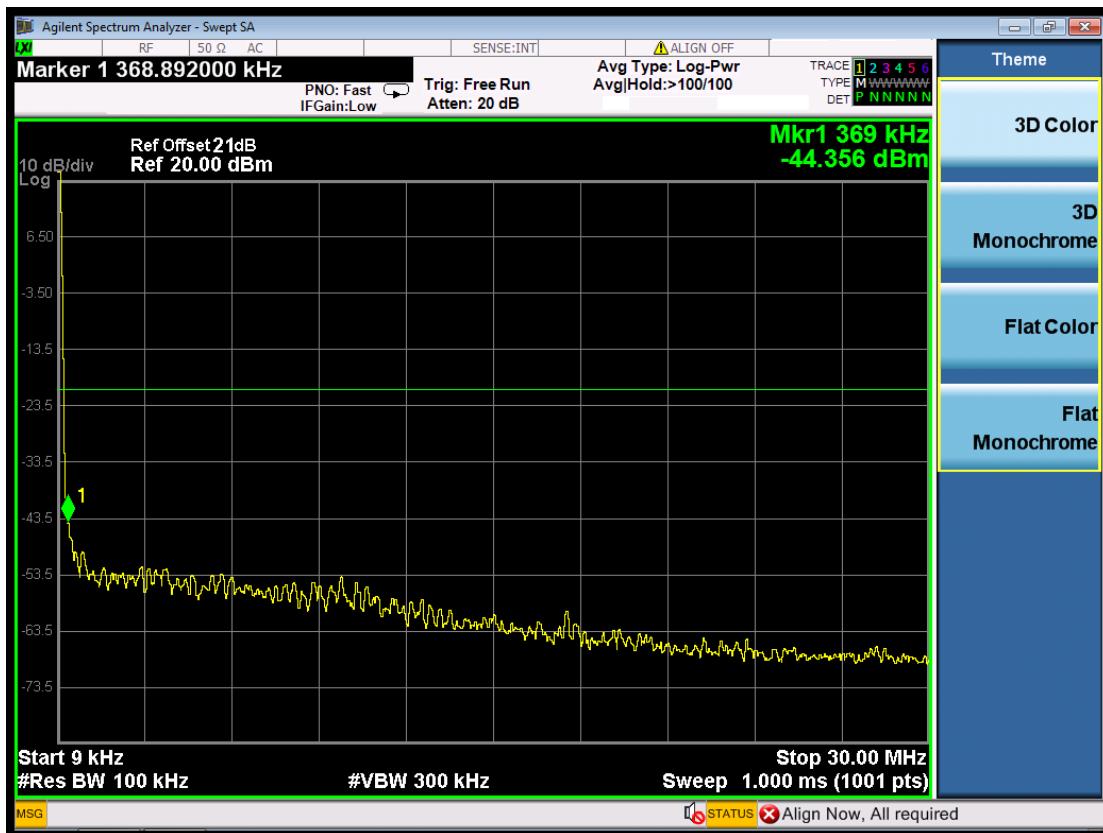


(Plot 4.6.2 B2: Channel 6: 2437MHz @ 802.11g)

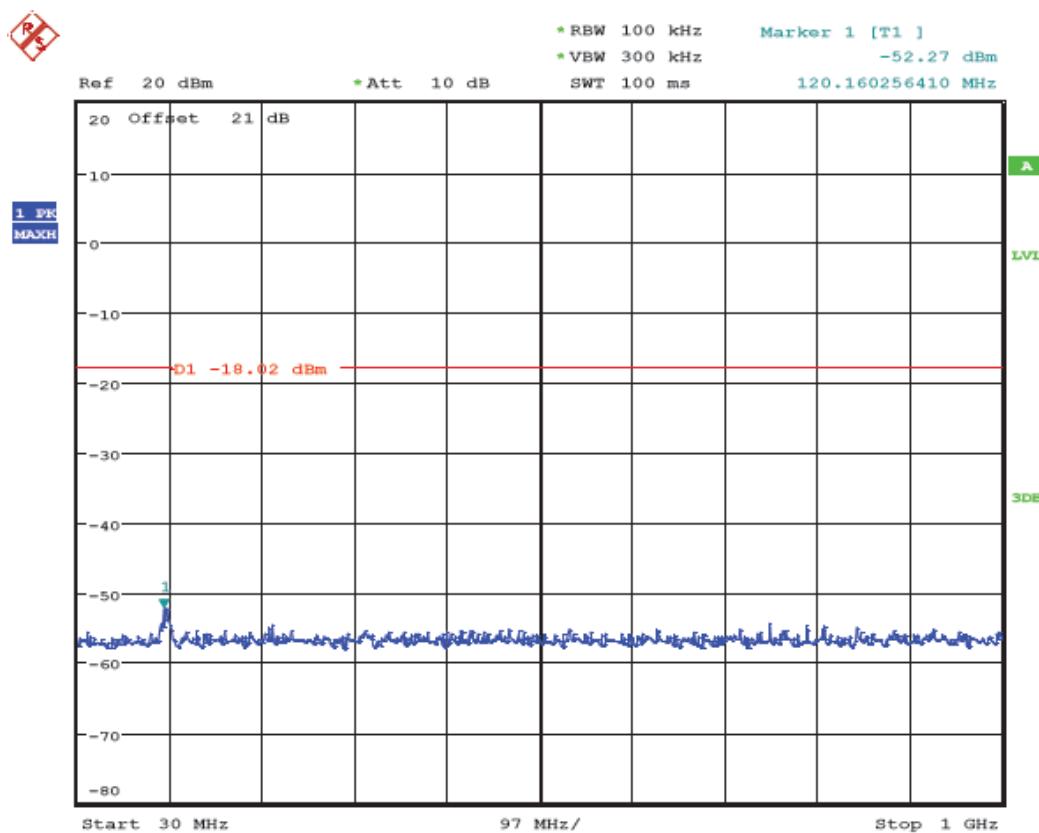


(Plot 4.6.2 B3: Channel 6: 2437MHz @ 802.11g)

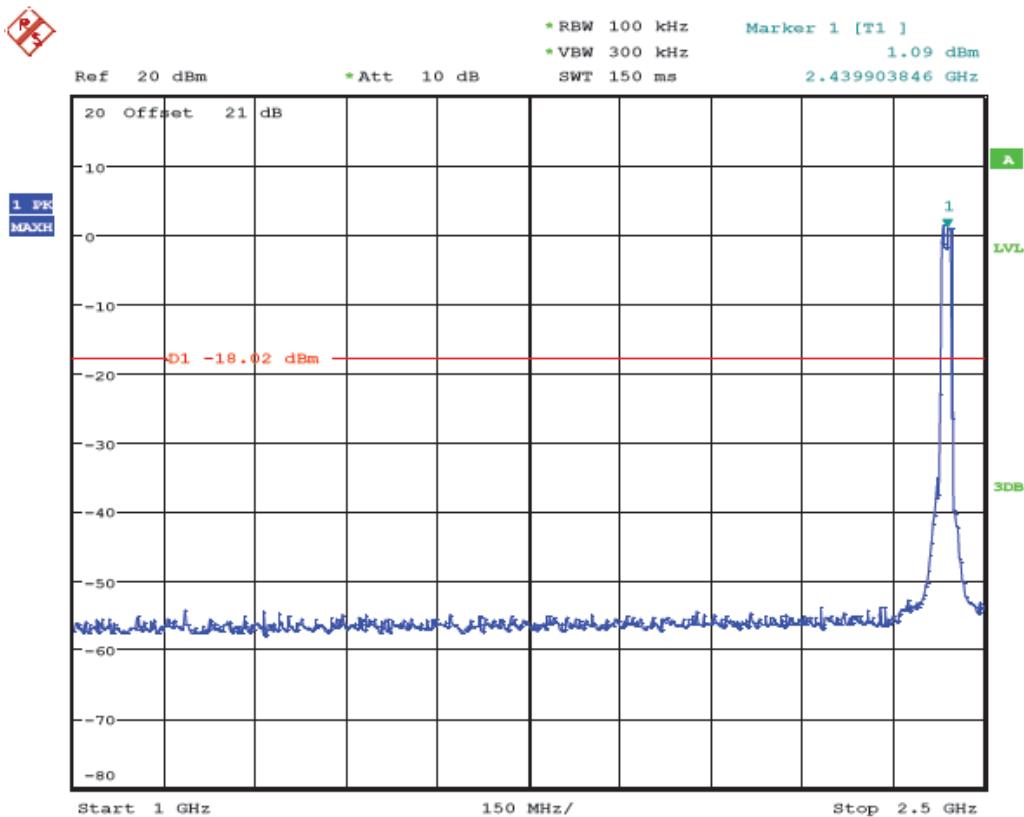


(Plot 4.6.2 B4: Channel 6: 2437MHz @ 802.11g)

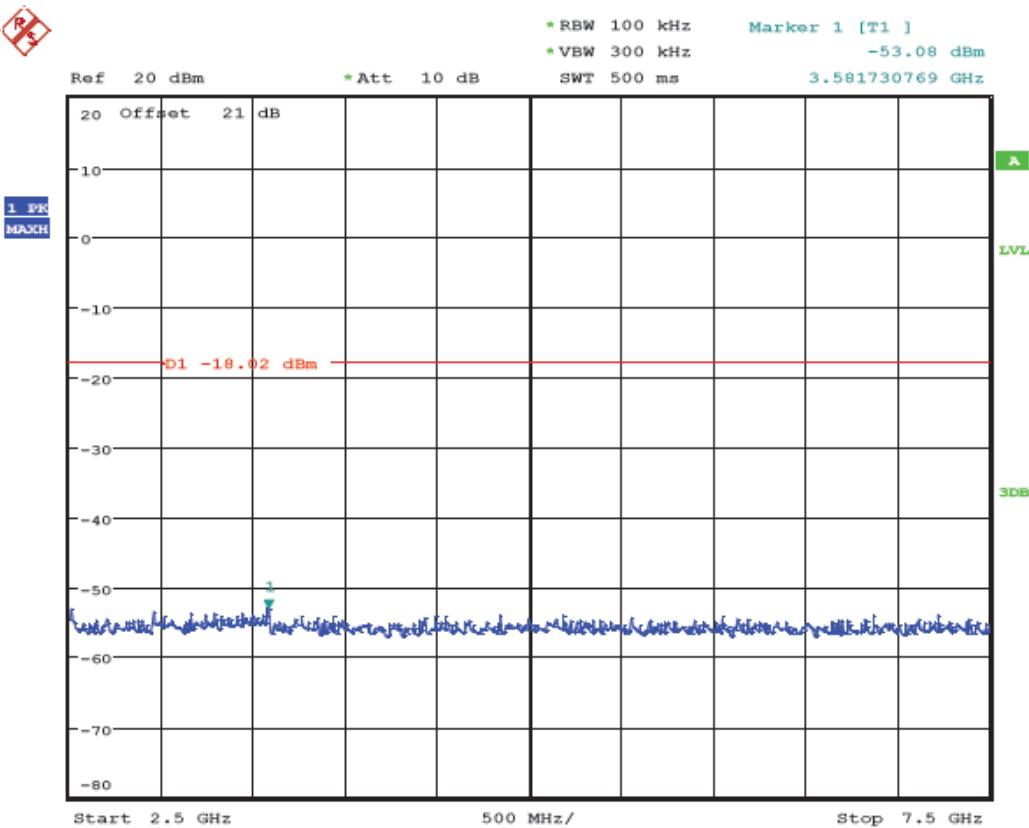


(Plot 4.6.2 B5: Channel 6: 2437MHz @ 802.11g)

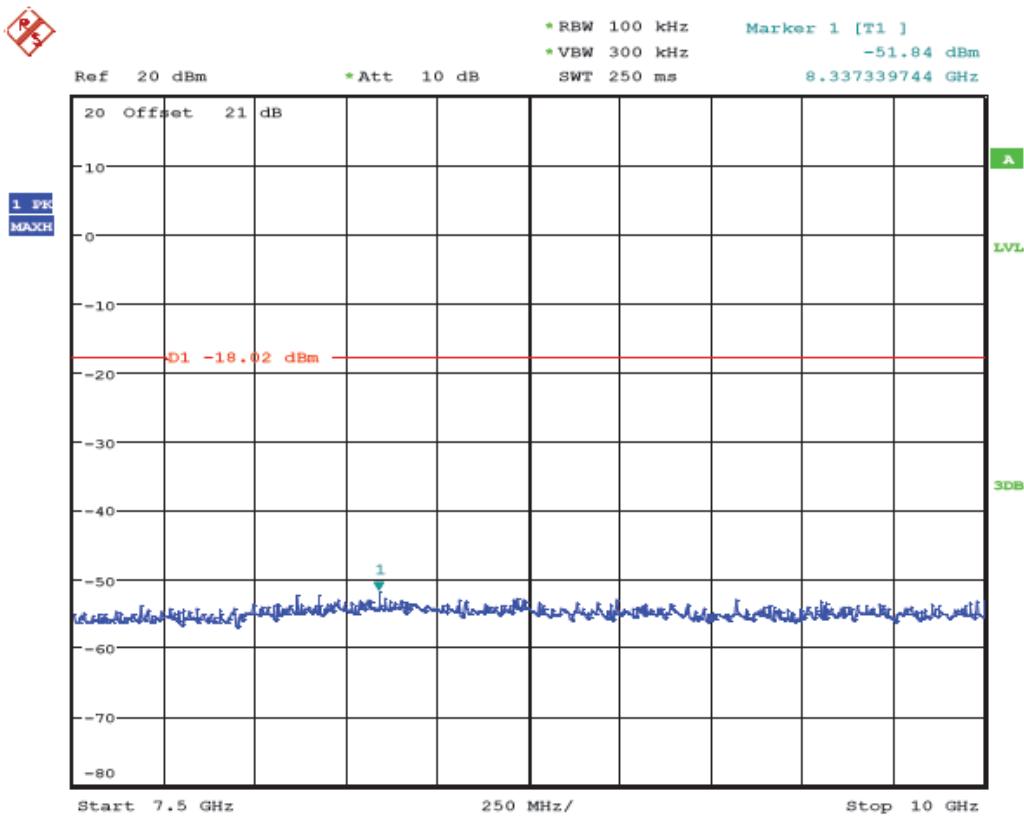


(Plot 4.6.2 B6: Channel 6: 2437MHz @ 802.11g)

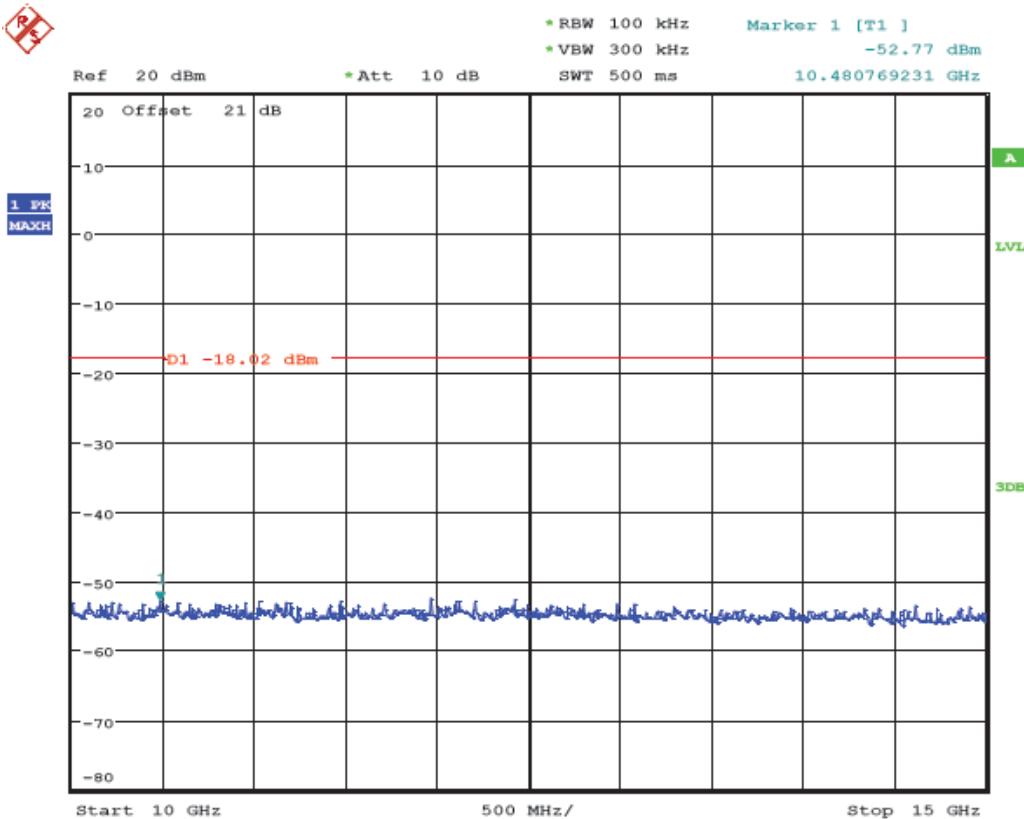


(Plot 4.6.2 B7: Channel 6: 2437MHz @ 802.11g)

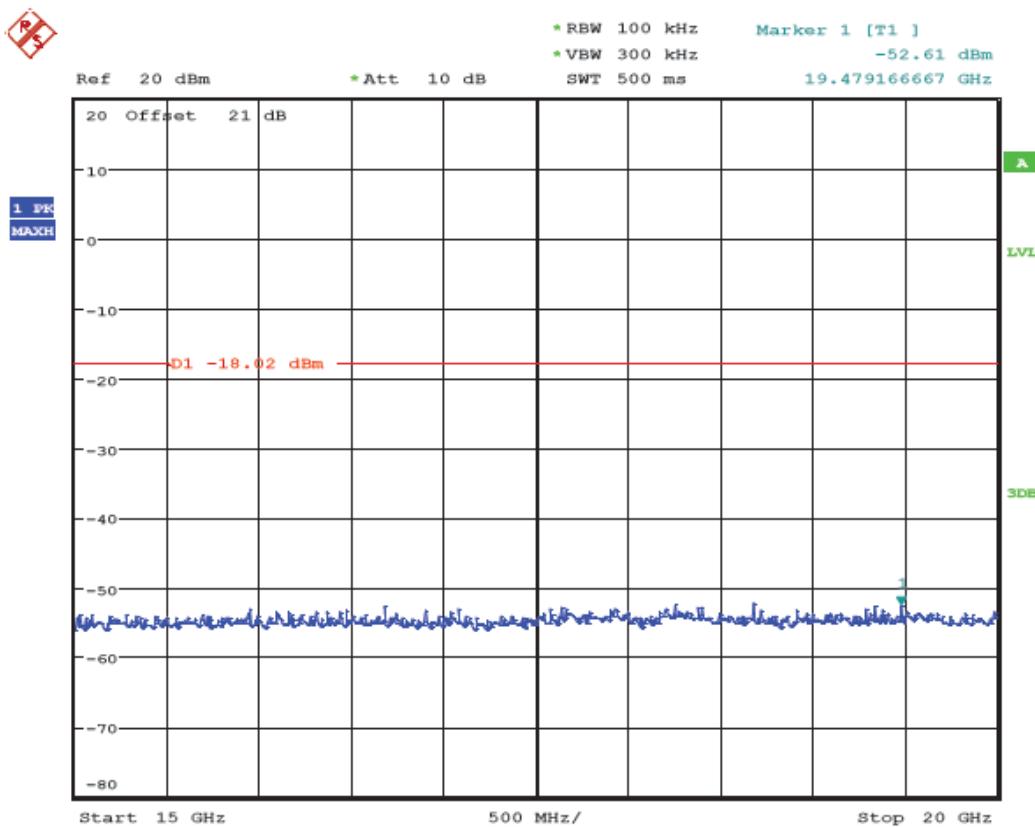


(Plot 4.6.2 B8: Channel 6: 2437MHz @ 802.11g)

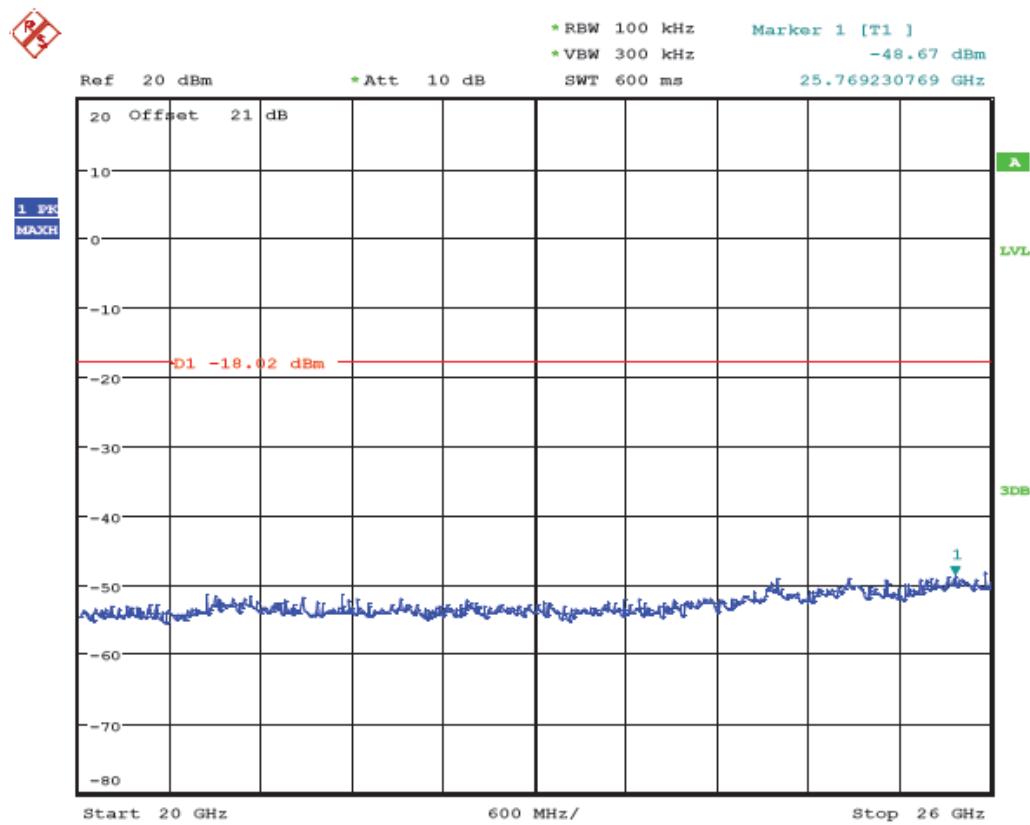


(Plot 4.6.2 B9: Channel 6: 2437MHz @ 802.11g)

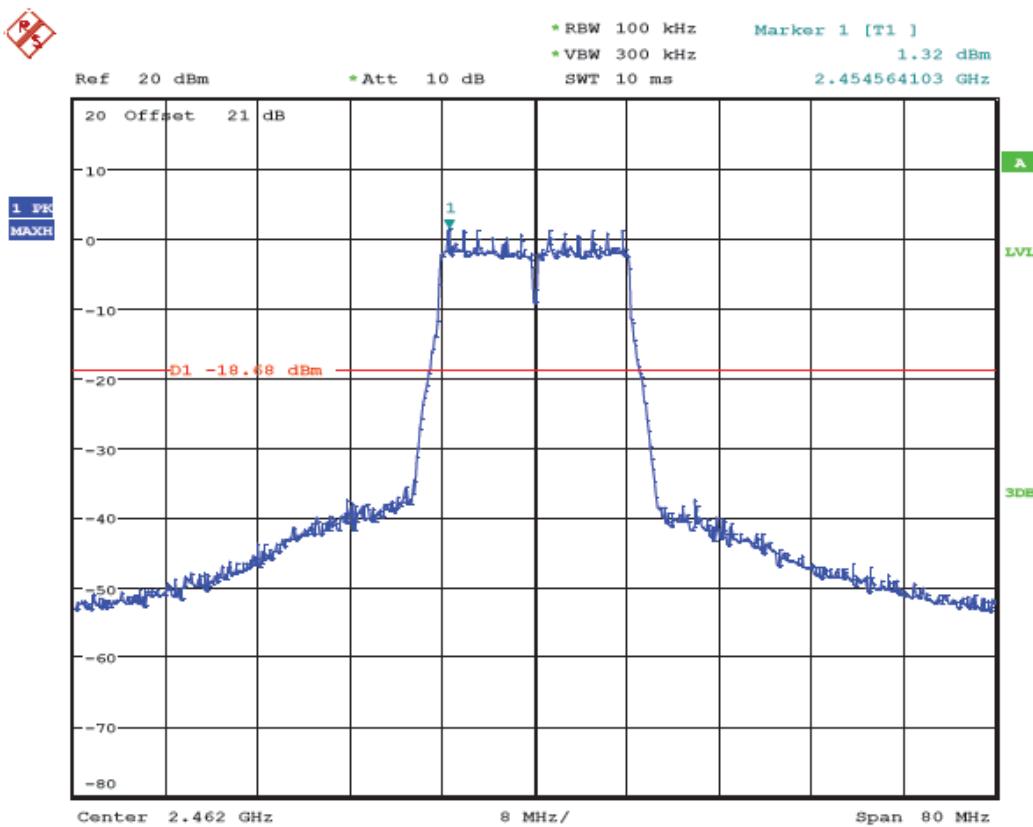


(Plot 4.6.2 C1: Channel 11: 2462MHz @ 802.11g)

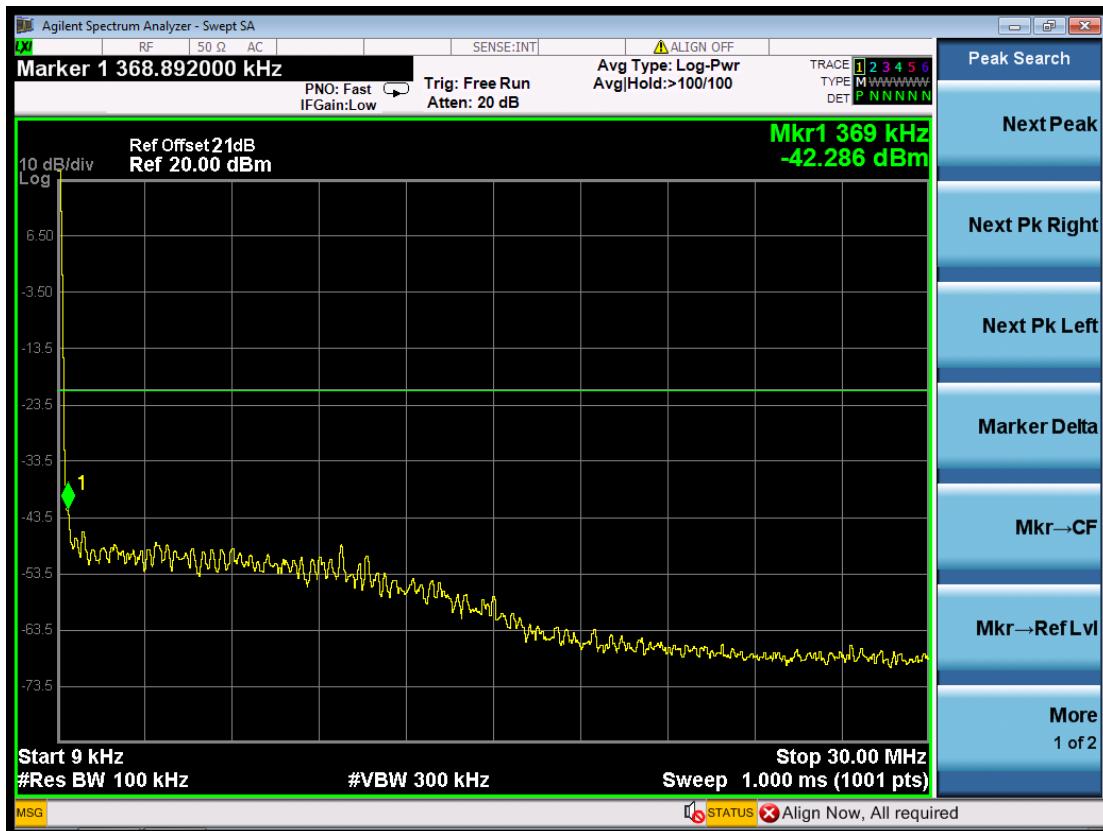


(Plot 4.6.2 C2: Channel 11: 2462MHz @ 802.11g)

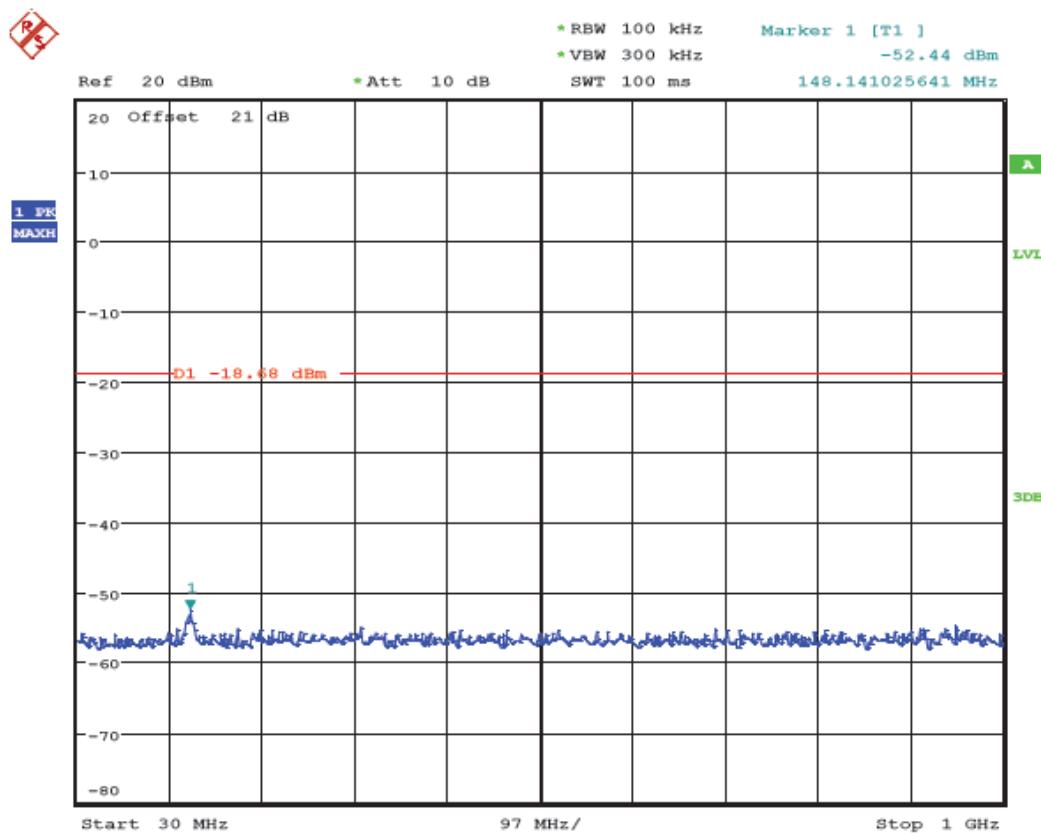


(Plot 4.6.2 C3: Channel 11: 2462MHz @ 802.11g)

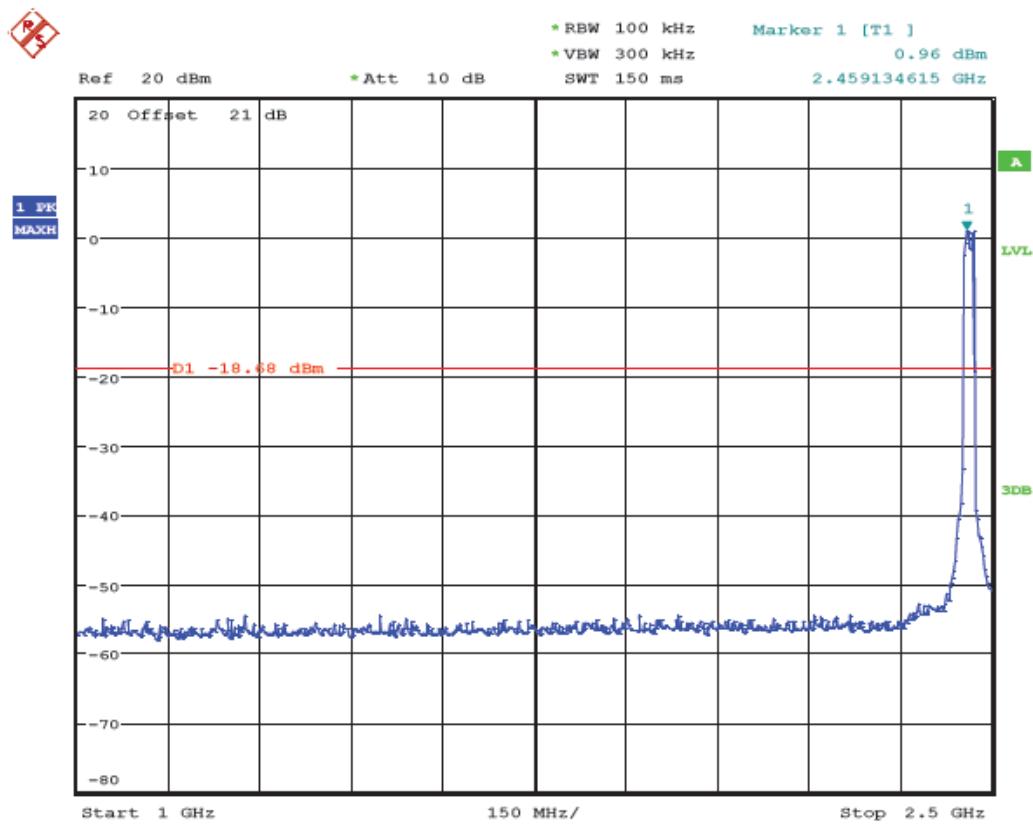


(Plot 4.6.2 C4: Channel 11: 2462MHz @ 802.11g)

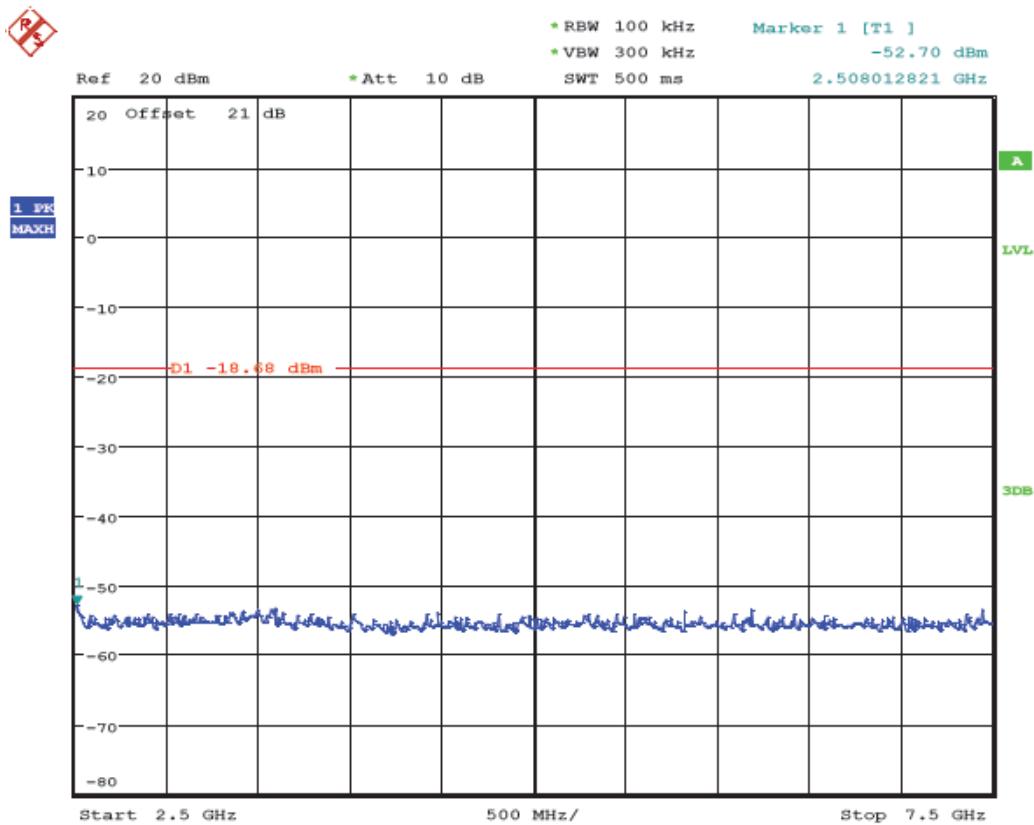


(Plot 4.6.2 C5: Channel 11: 2462MHz @ 802.11g)

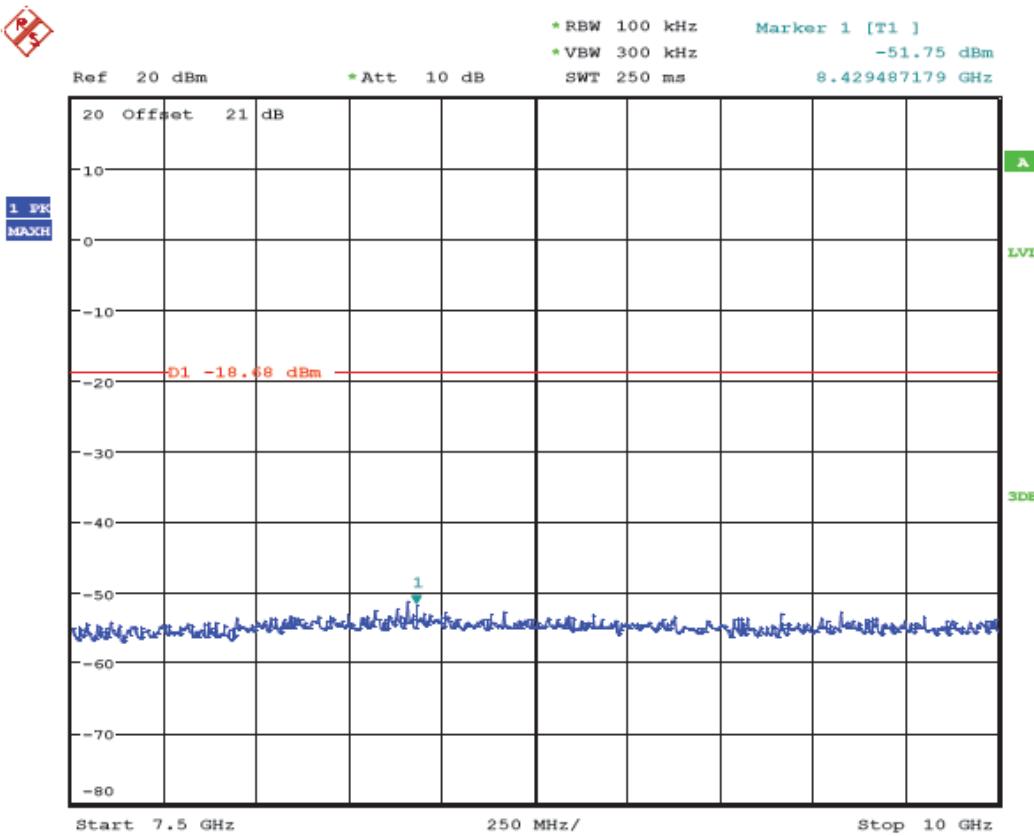



(Plot 4.6.2 C6: Channel 11: 2462MHz @ 802.11g)

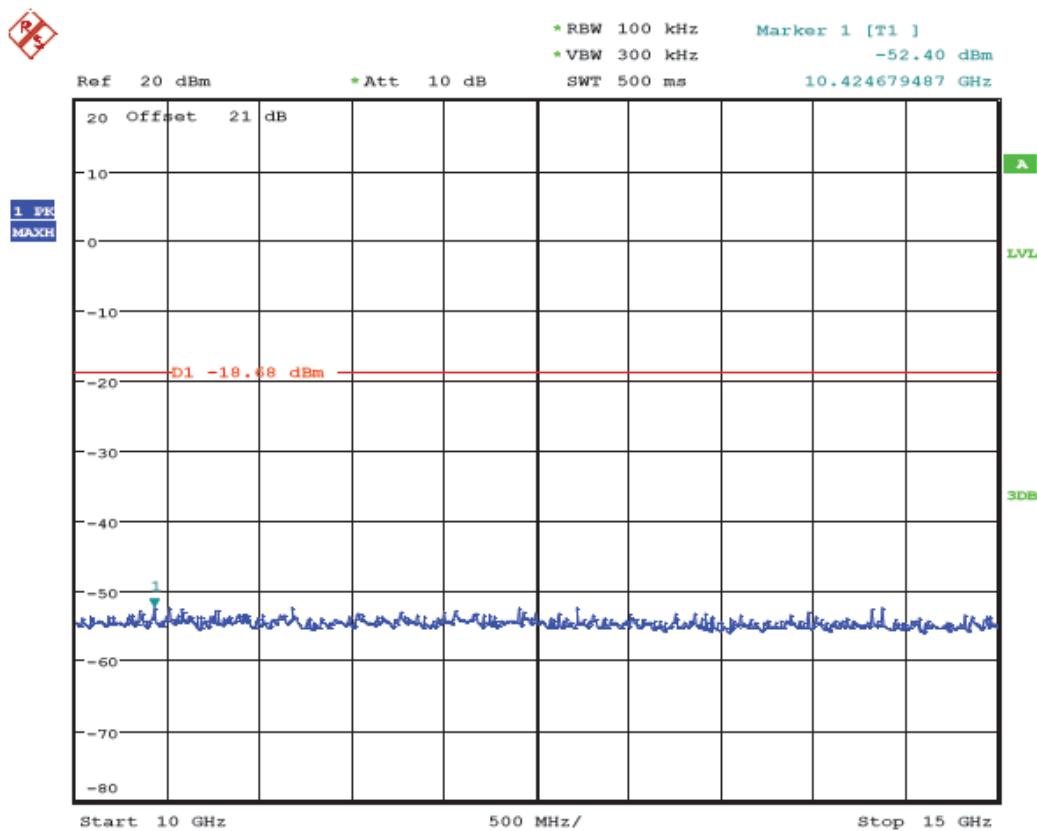


(Plot 4.6.2 C7: Channel 11: 2462MHz @ 802.11g)

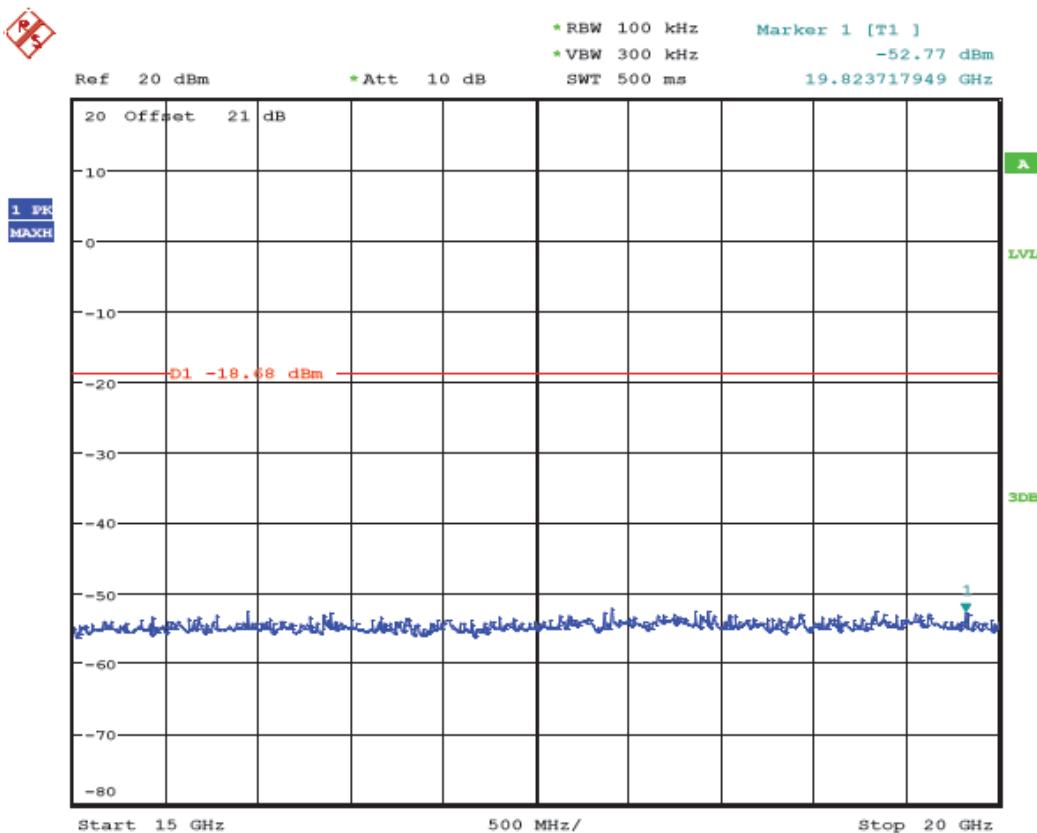

(Plot 4.6.2 C8: Channel 11: 2462MHz @ 802.11g)

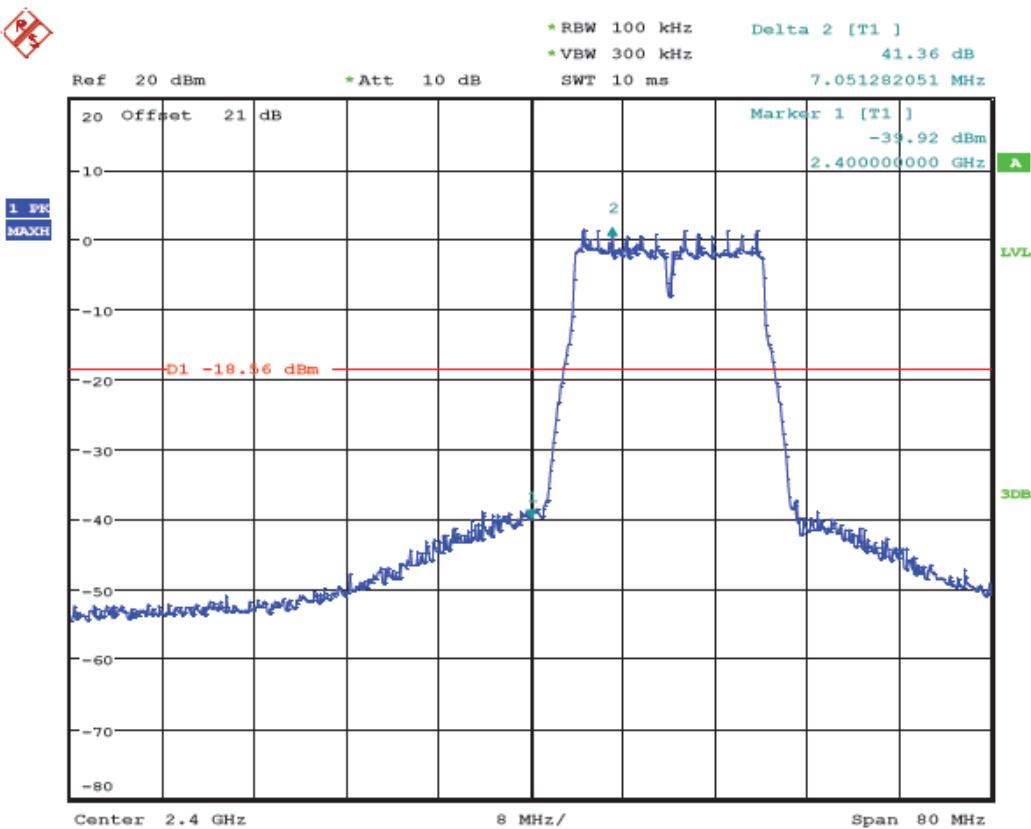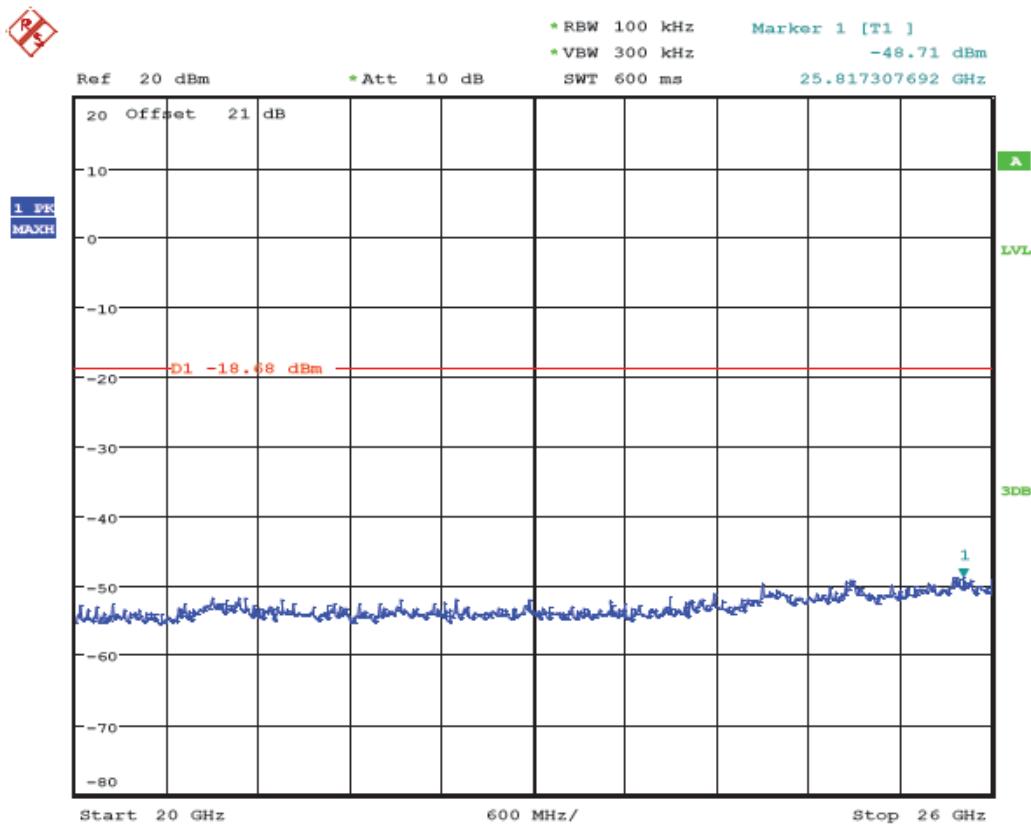

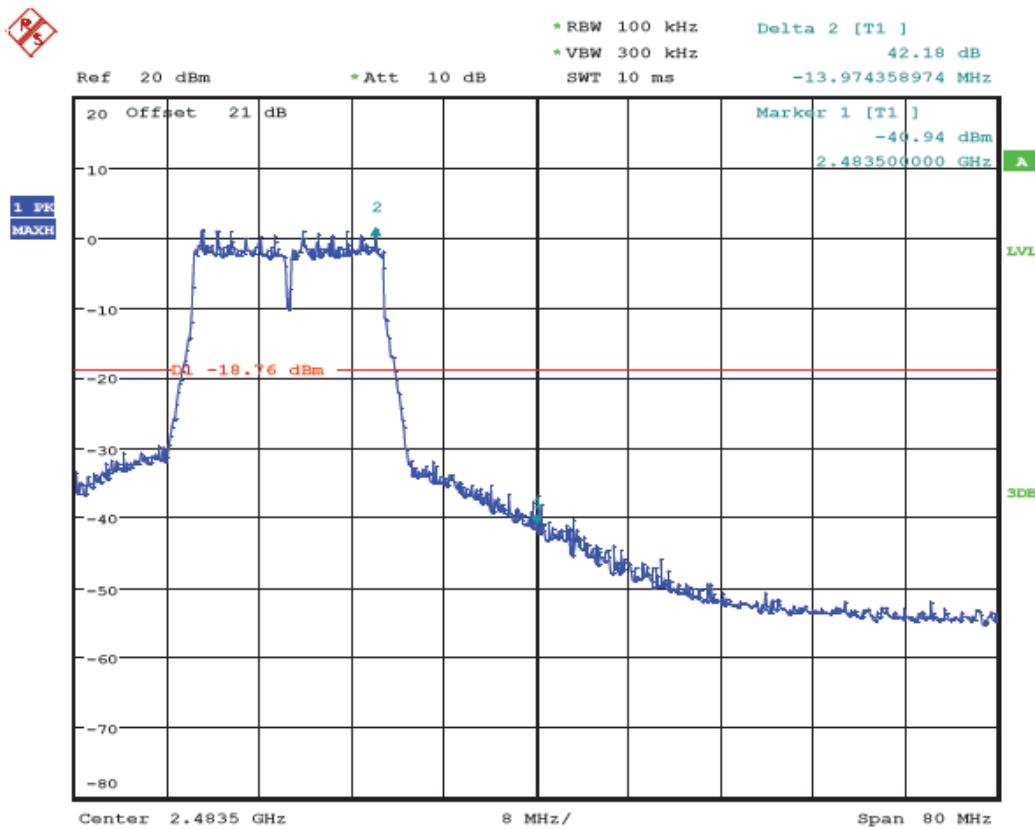

(Plot 4.6.2 E: Channel 11: 2462MHz @ 802.11g)

4.6.3 802.11n HT20MHz Test Mode


A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
1	2412	2.412 GHz	Plot 4.6.3 A1	---	PASS
		9KHz-30MHz	Plot 4.6.3 A2	-20	PASS
		30MHz-1GHz	Plot 4.6.3 A3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.3 A4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.3 A5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.3 A6	-20	PASS
		10GHz-15GHz	Plot 4.6.3 A7	-20	PASS
		15GHz-20GHz	Plot 4.6.3 A8	-20	PASS
		20GHz-26GHz	Plot 4.6.3 A9	-20	PASS
6	2437	2.437 GHz	Plot 4.6.3 B1	---	PASS
		9KHz-30MHz	Plot 4.6.3 B2	-20	PASS
		30MHz-1GHz	Plot 4.6.3 B3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.3 B4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.3 B5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.3 B6	-20	PASS
		10GHz-15GHz	Plot 4.6.3 B7	-20	PASS
		15GHz-20GHz	Plot 4.6.3 B8	-20	PASS
		20GHz-26GHz	Plot 4.6.3 B9	-20	PASS
11	2462	2.462 GHz	Plot 4.6.3 C1	---	PASS
		9KHz-30MHz	Plot 4.6.3 C2	-20	PASS
		30MHz-1GHz	Plot 4.6.3 C3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.3 C4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.3 C5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.3 C6	-20	PASS
		10GHz-15GHz	Plot 4.6.3 C7	-20	PASS
		15GHz-20GHz	Plot 4.6.3 C8	-20	PASS
		20GHz-26GHz	Plot 4.6.3 C9	-20	PASS


Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-42.38	Peak	-20	Plot 4.6.3 D	PASS
2483.50	-41.74	Peak	-20	Plot 4.6.3 E	PASS

Note: 1. For 802.11n HT20MHz mode at final test to get the worst-case emission at 6.5Mbps.
 2. The test results including the cable loss.


B. Test Plots

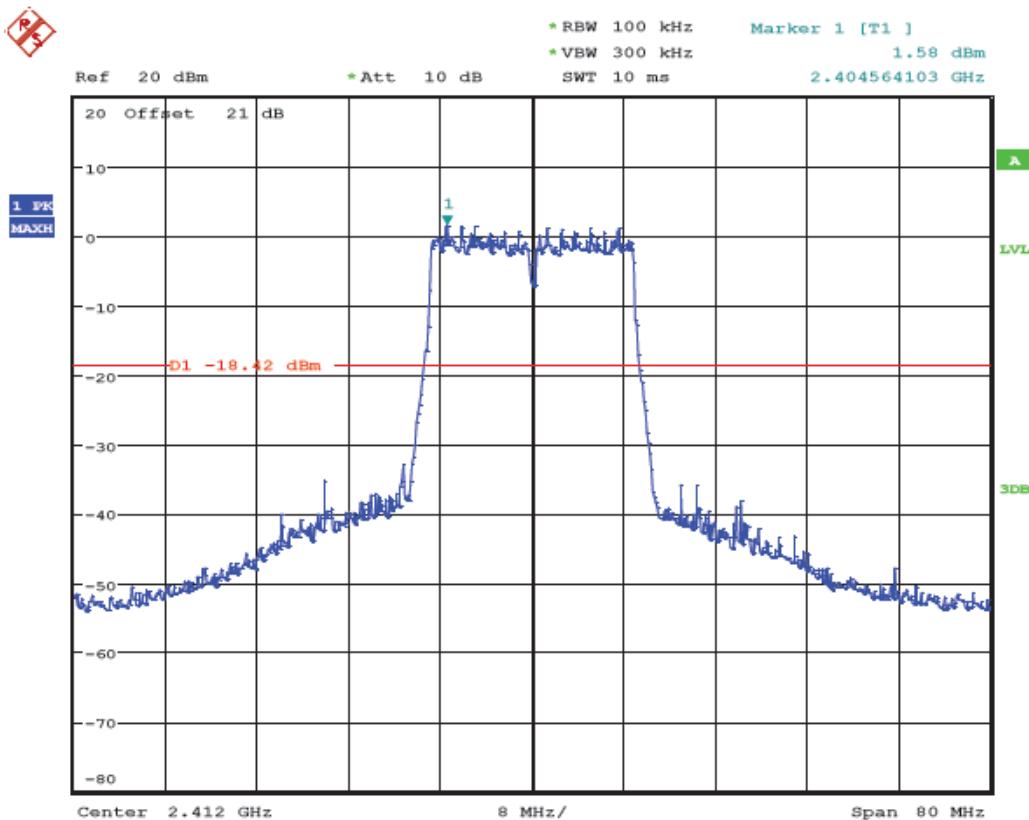


(Plot 4.6.3 A1: Channel 1: 2412MHz @ 802.11n HT20)

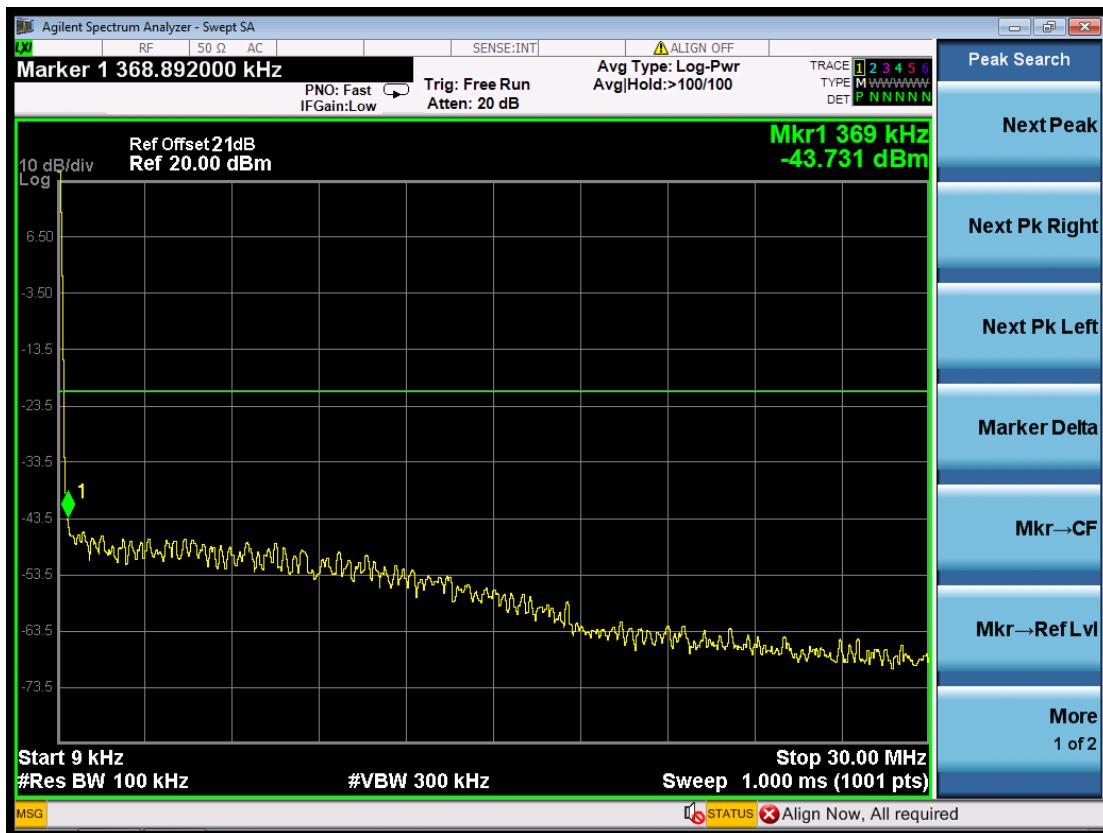


(Plot 4.6.3 A2: Channel 1: 2412MHz @ 802.11n HT20)

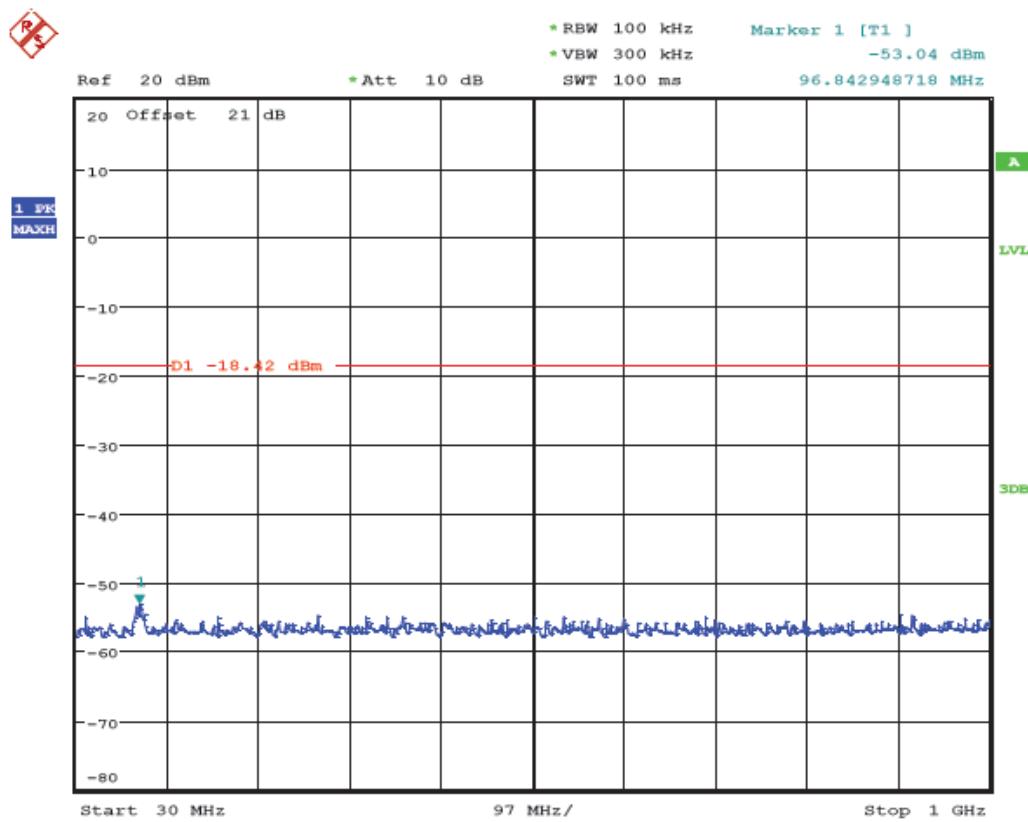


(Plot 4.6.3 A3: Channel 1: 2412MHz @ 802.11n HT20)

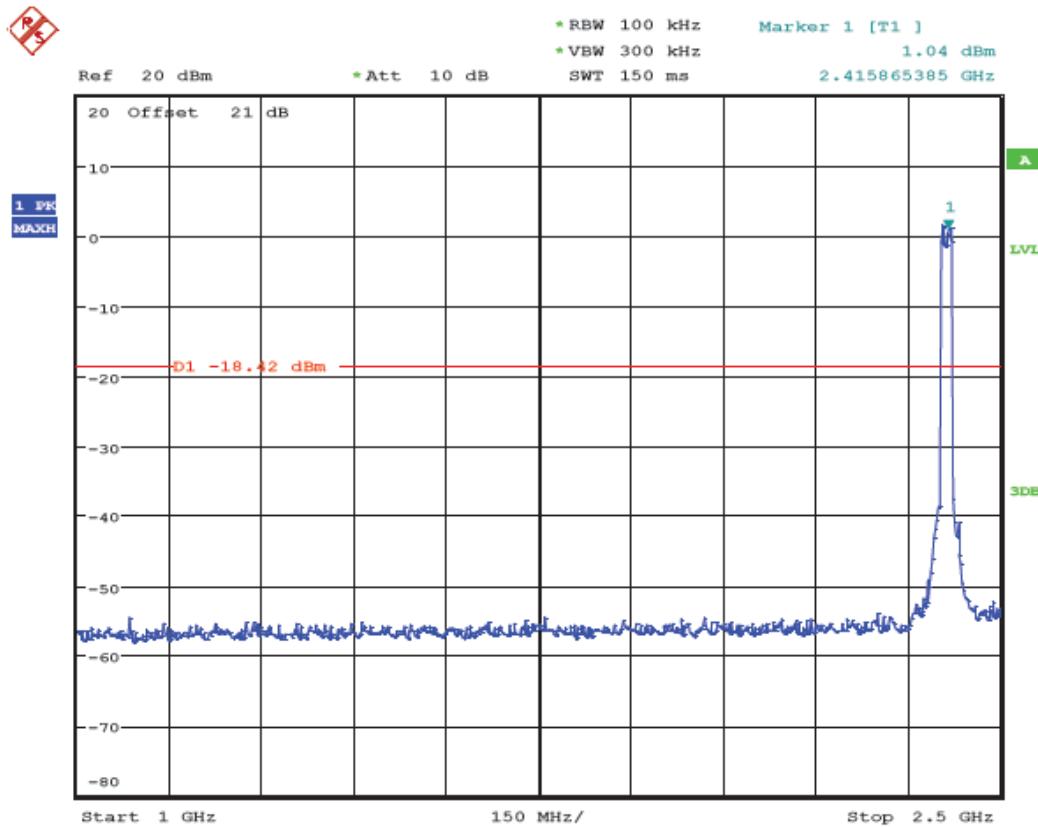


(Plot 4.6.3 A4: Channel 1: 2412MHz @ 802.11n HT20)

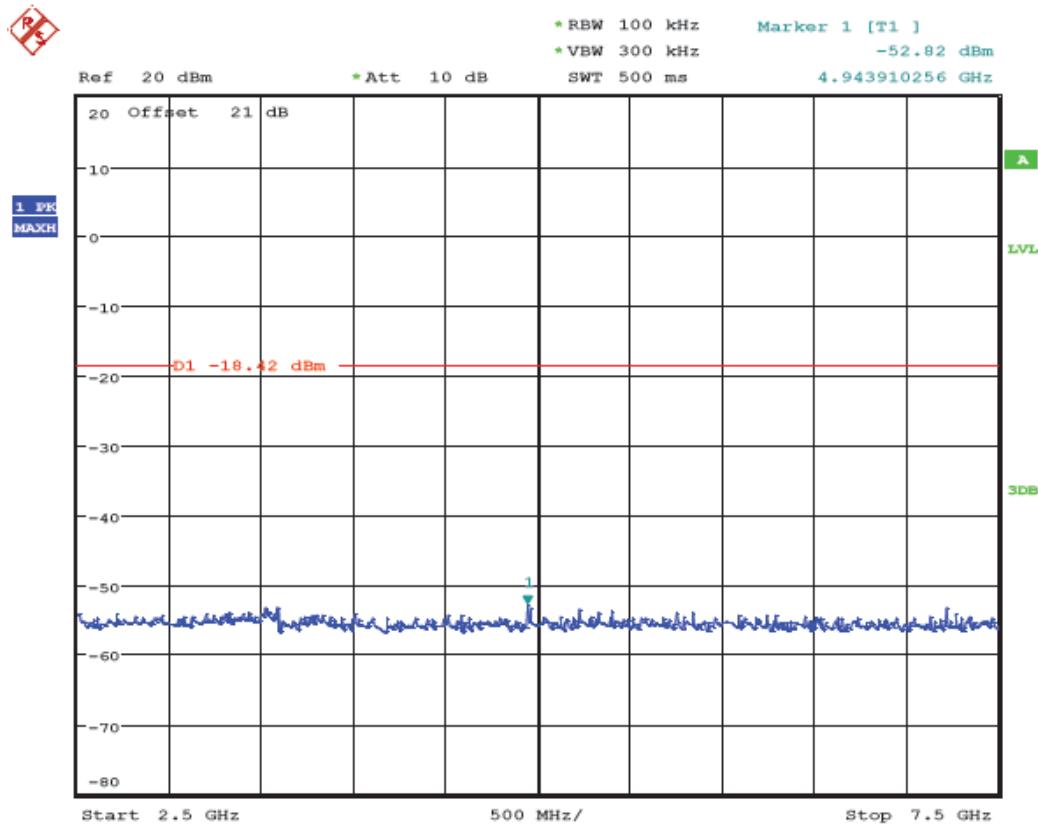


(Plot 4.6.3 A5: Channel 1: 2412MHz @ 802.11n HT20)

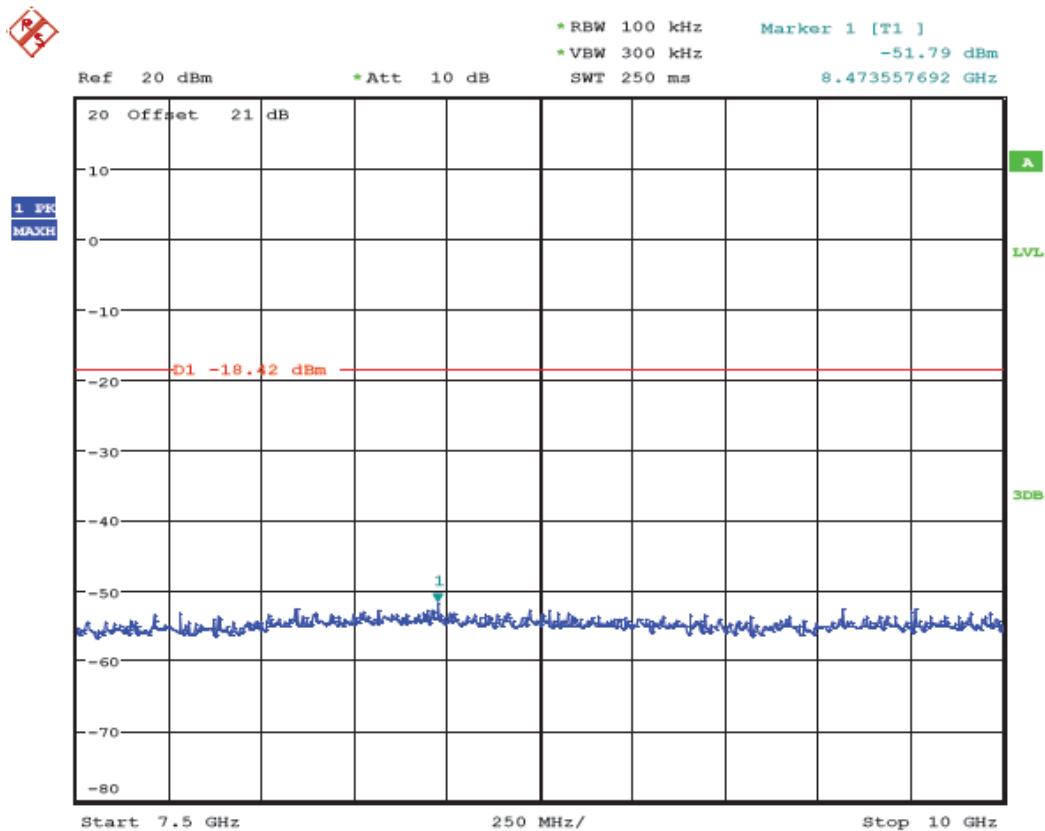


(Plot 4.6.3 A6: Channel 1: 2412MHz @ 802.11n HT20)

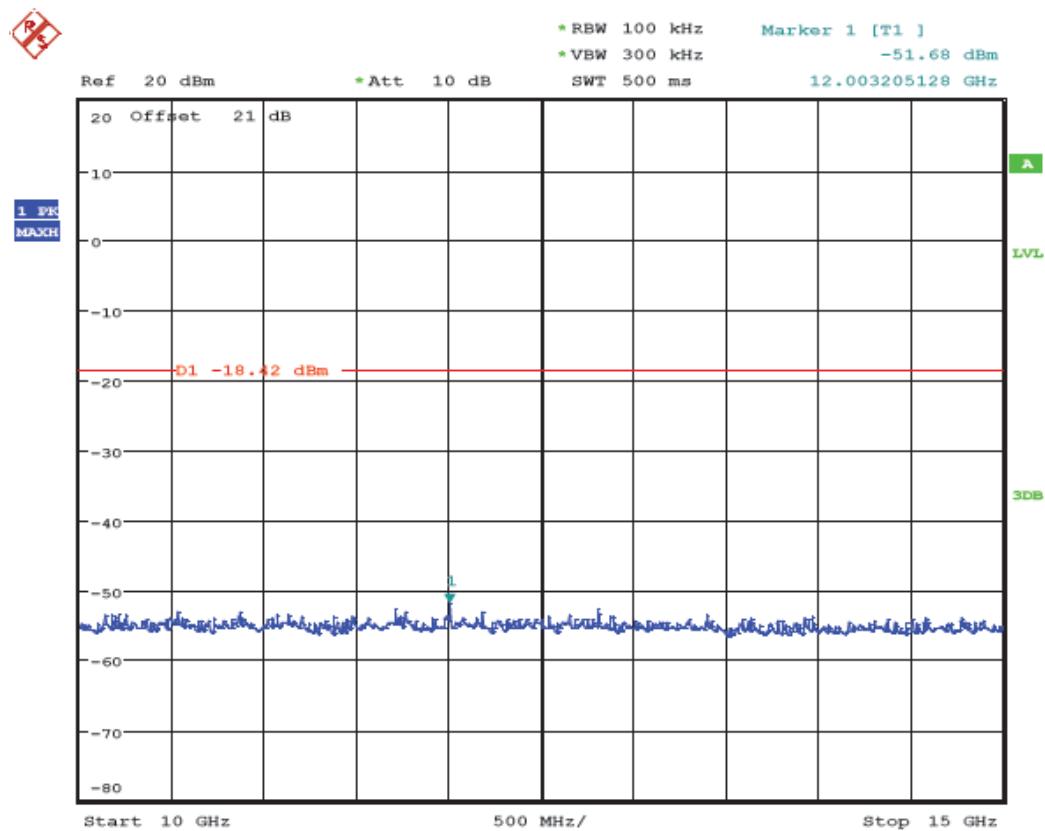


(Plot 4.6.3 A7: Channel 1: 2412MHz @ 802.11n HT20)

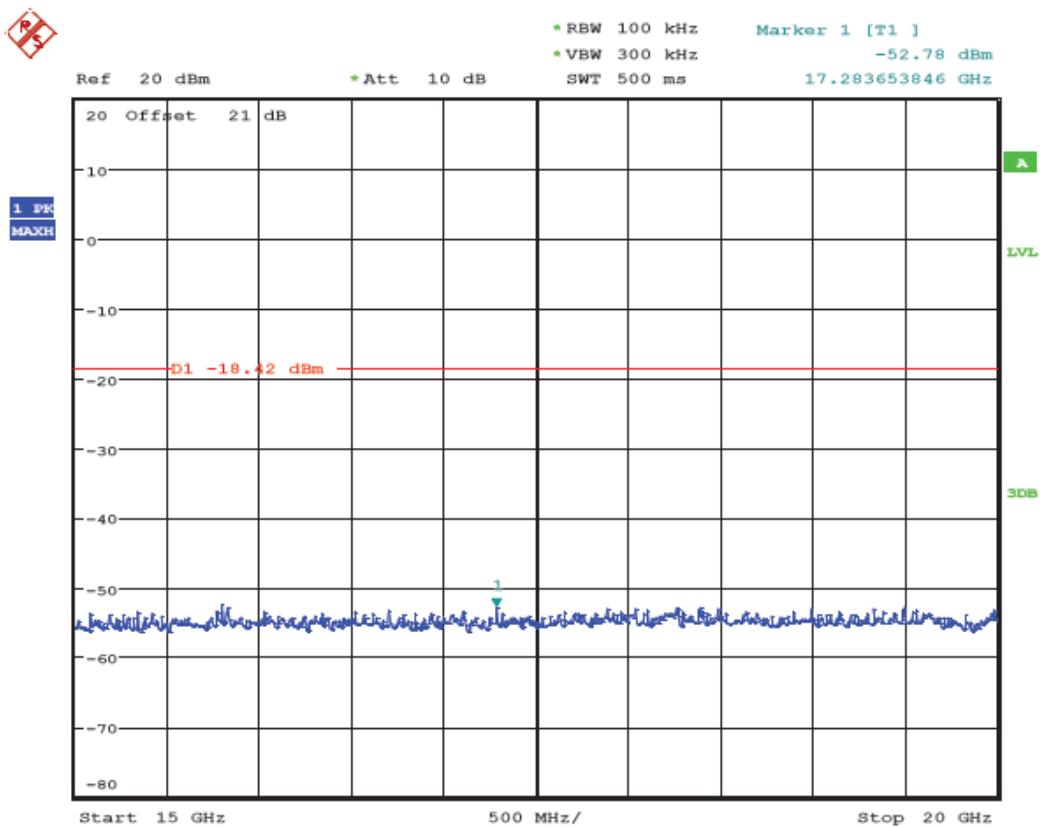


(Plot 4.6.3 A8: Channel 1: 2412MHz @ 802.11n HT20)

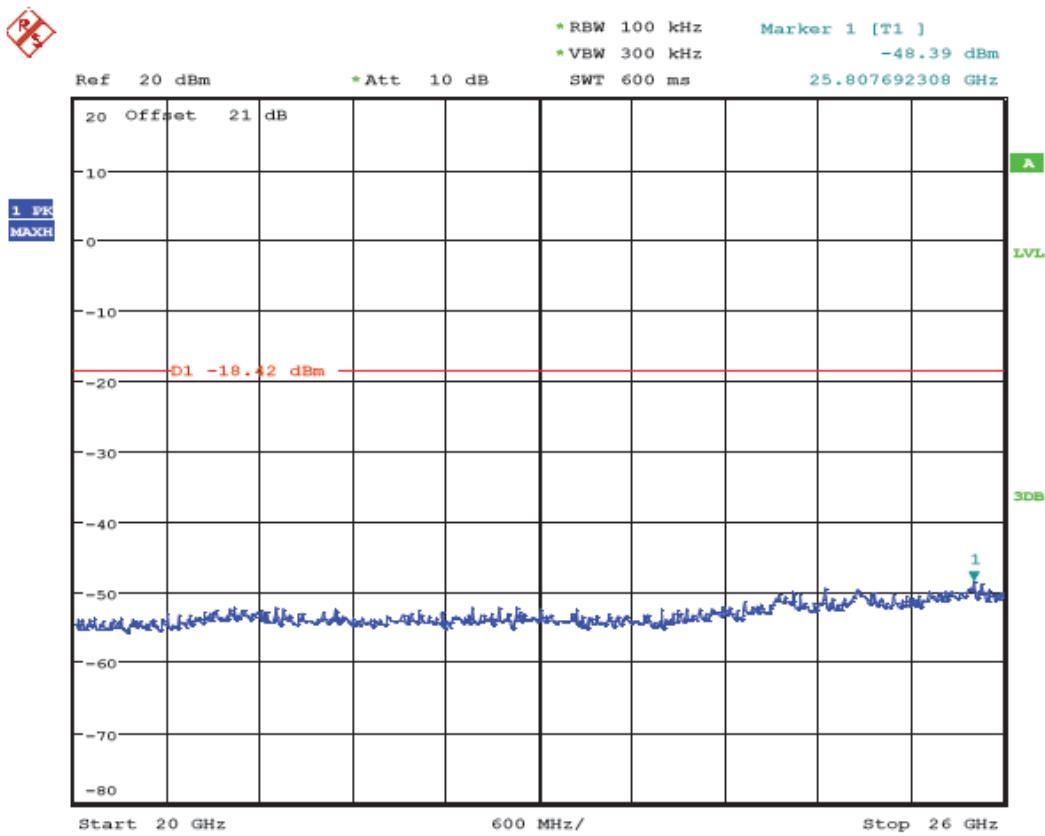


(Plot 4.6.3 A9: Channel 1: 2412MHz @ 802.11n HT20)

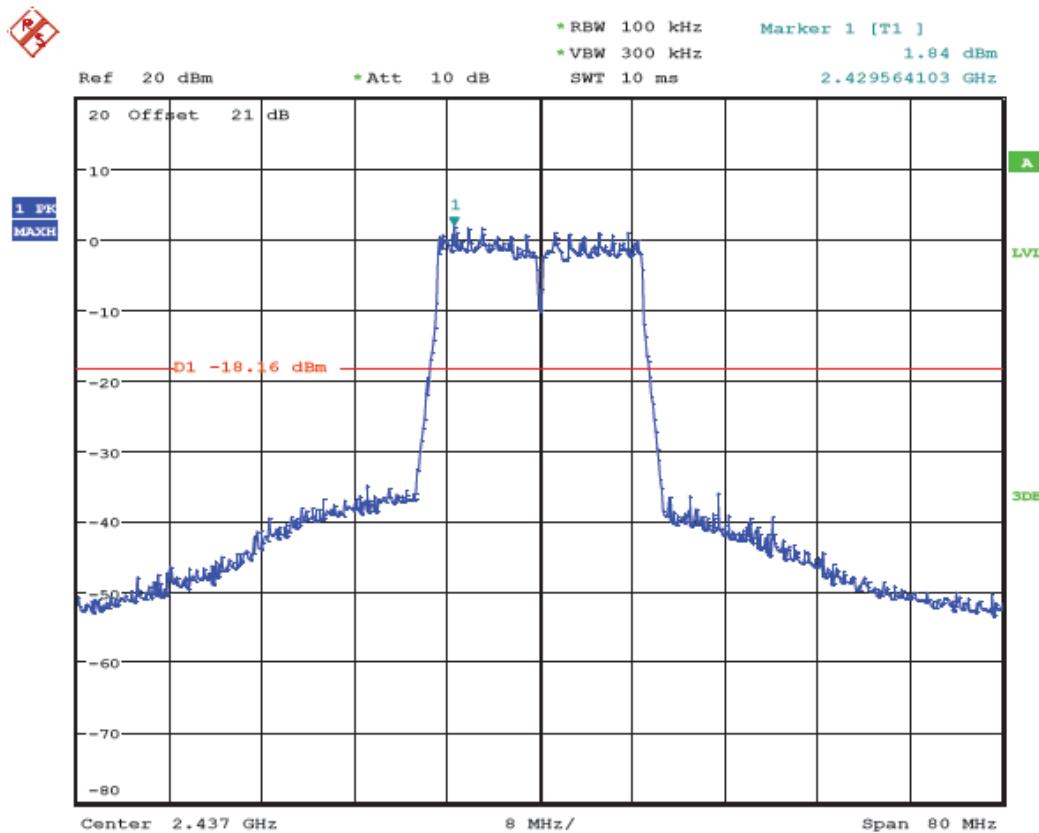


(Plot 4.6.3 B1: Channel 6: 2437MHz @ 802.11n HT20)

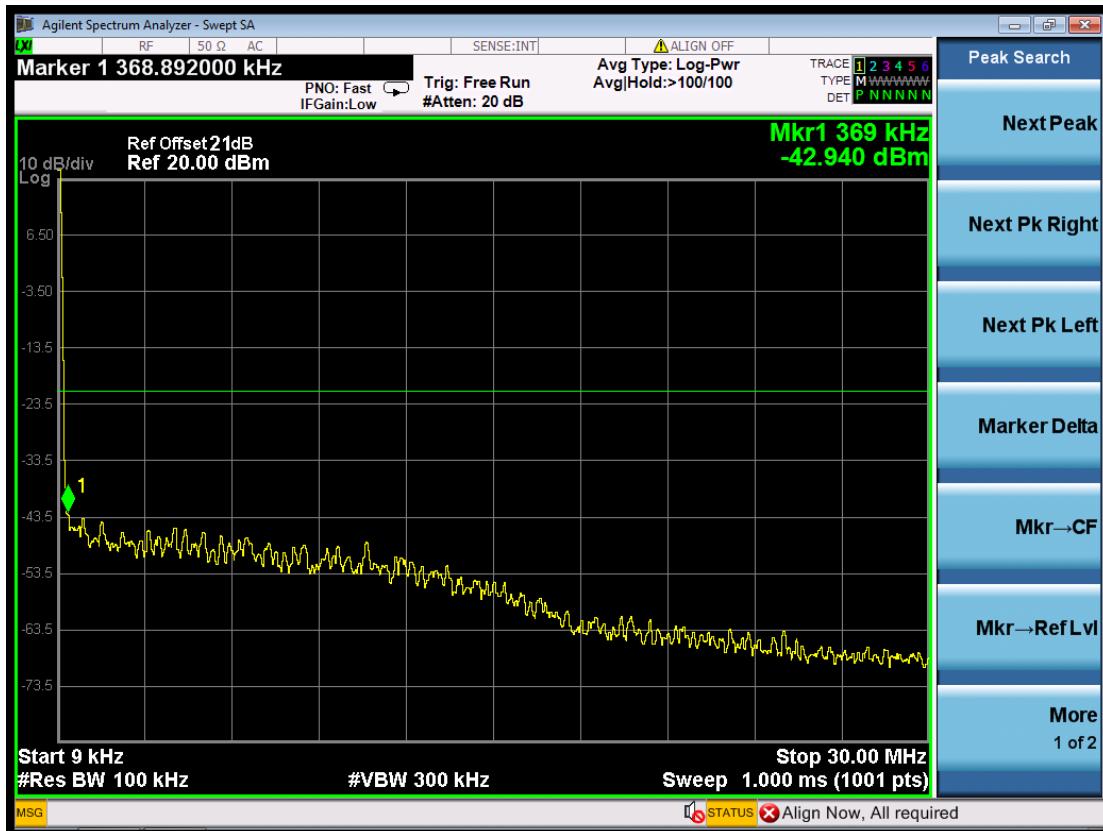


(Plot 4.6.3 B2: Channel 6: 2437MHz @ 802.11n HT20)

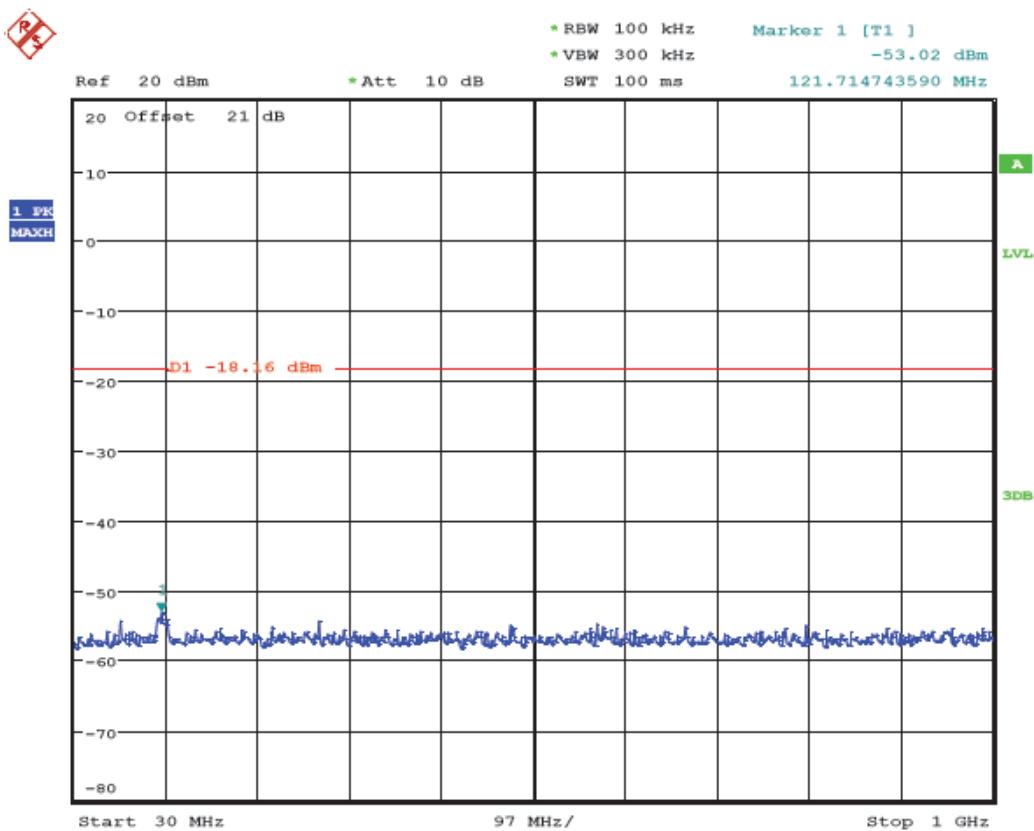


(Plot 4.6.3 B3: Channel 6: 2437MHz @ 802.11n HT20)

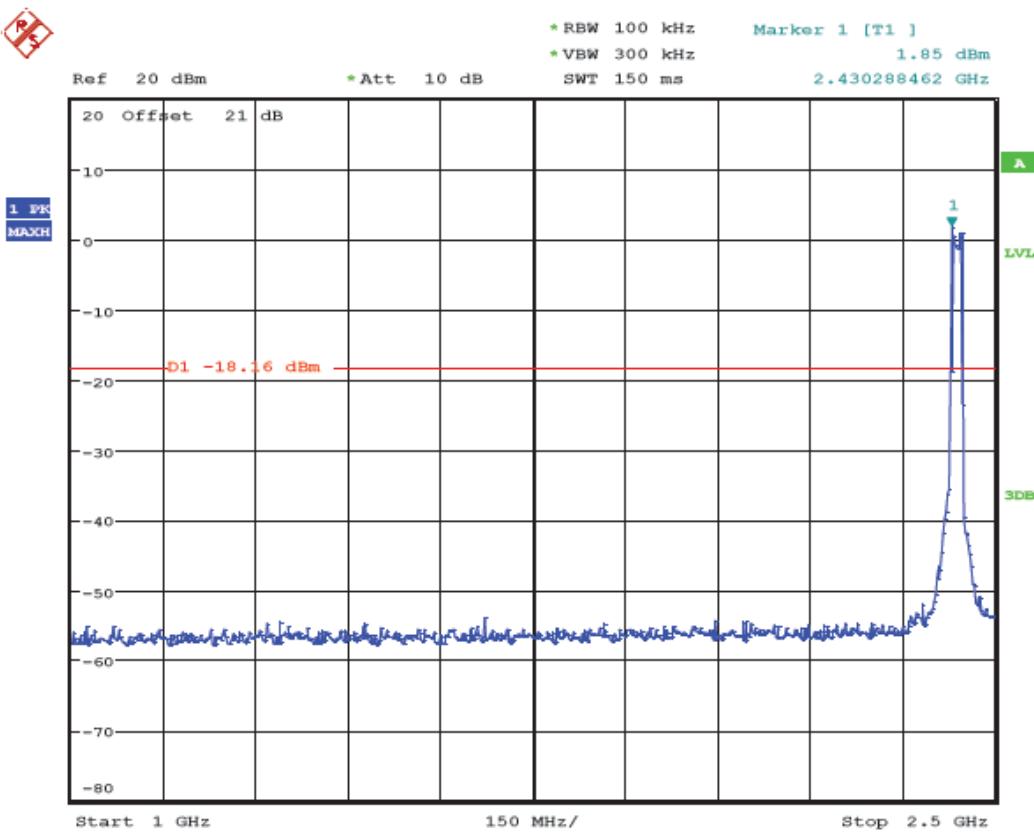


(Plot 4.6.3 B4: Channel 6: 2437MHz @ 802.11n HT20)

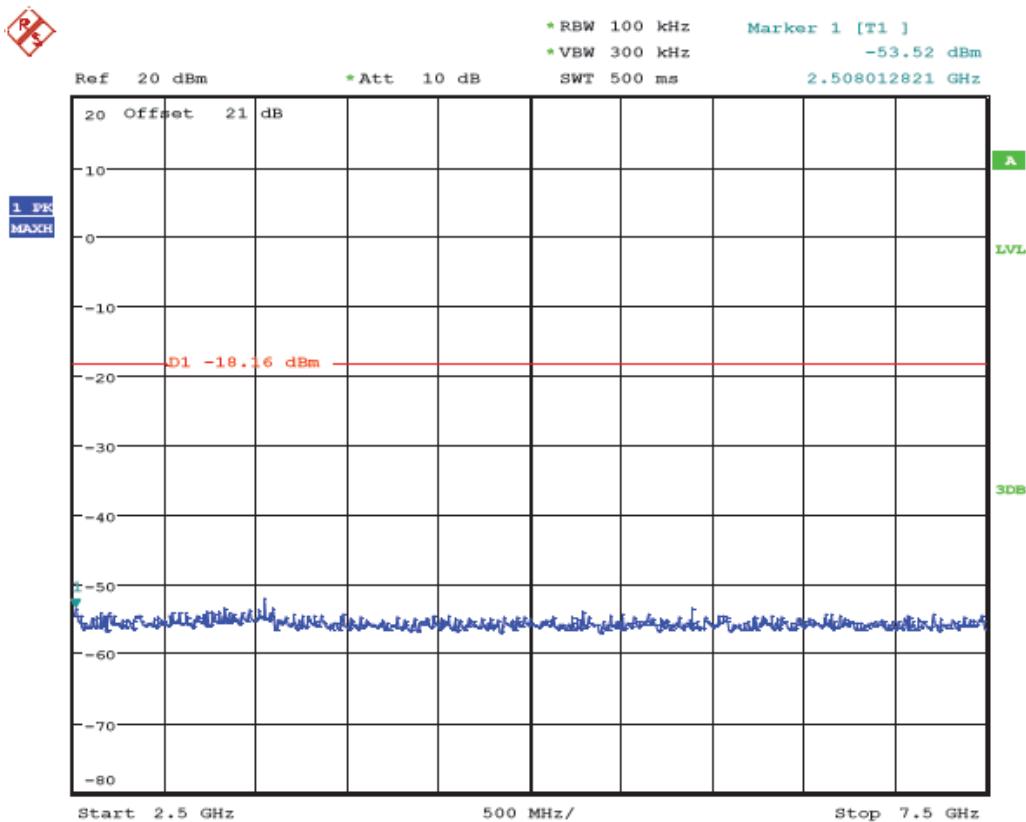


(Plot 4.6.3 B5: Channel 6: 2437MHz @ 802.11n HT20)

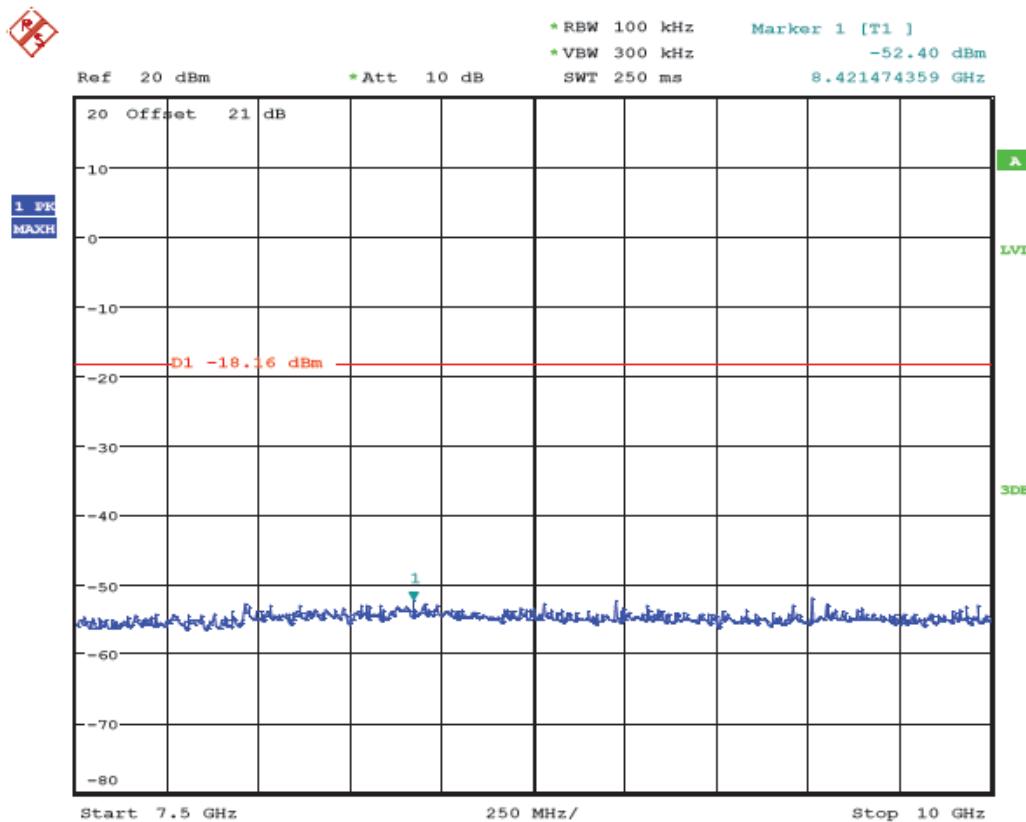


(Plot 4.6.3 B6: Channel 6: 2437MHz @ 802.11n HT20)

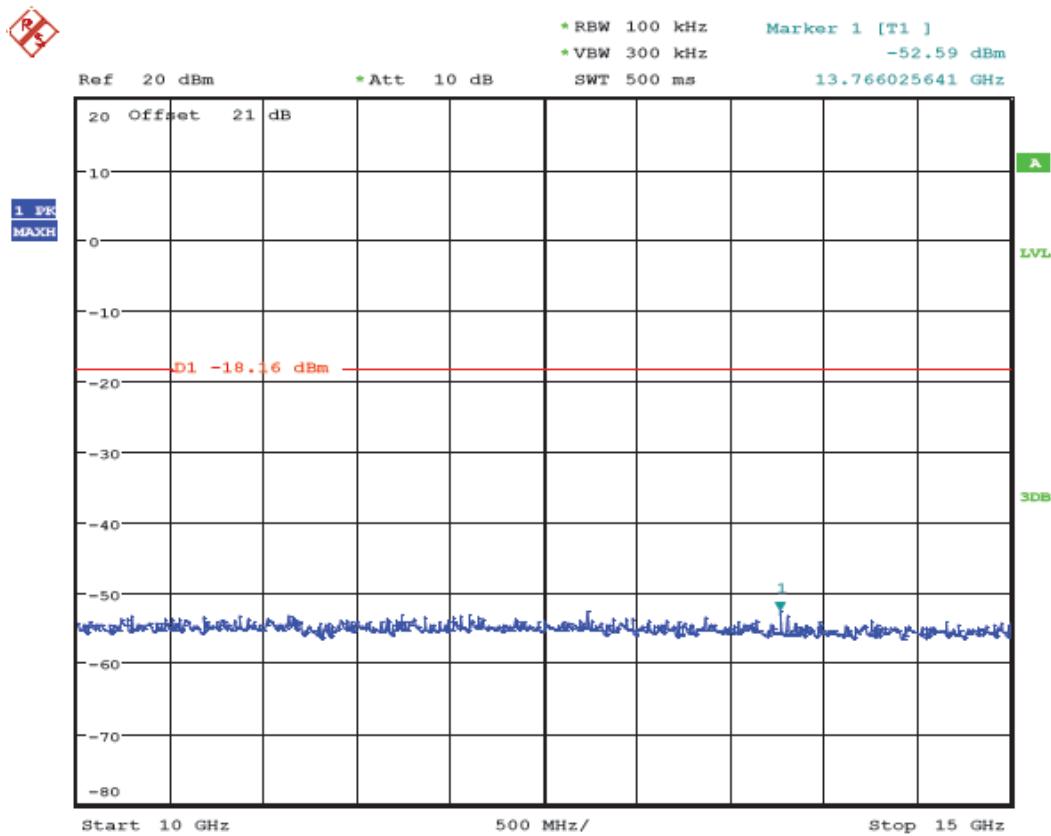


(Plot 4.6.3 B7: Channel 6: 2437MHz @ 802.11n HT20)

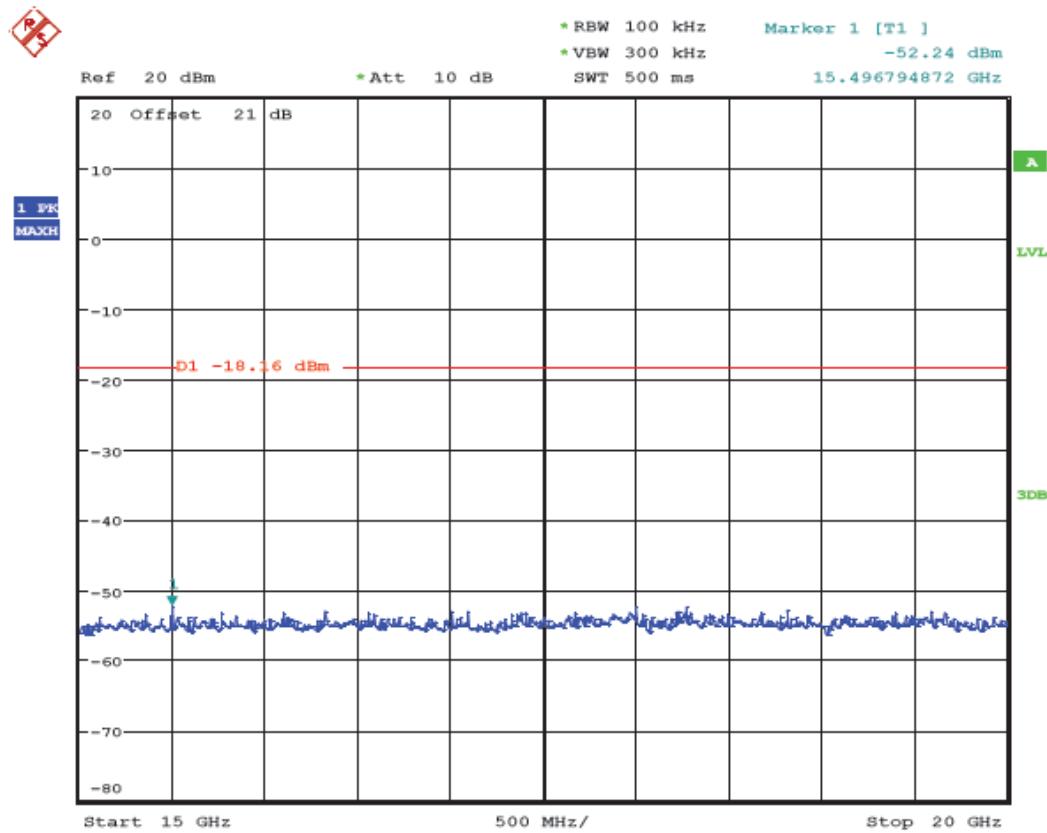


(Plot 4.6.3 B8: Channel 6: 2437MHz @ 802.11n HT20)

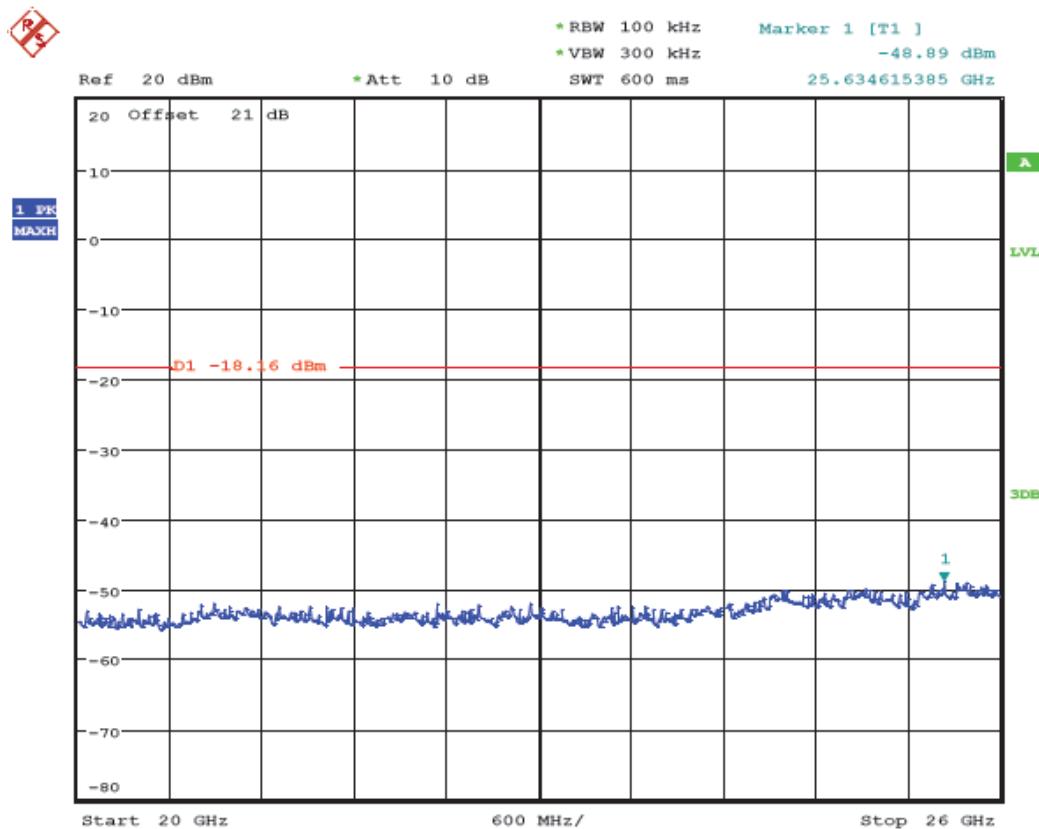


(Plot 4.6.3 B9: Channel 6: 2437MHz @ 802.11n HT20)

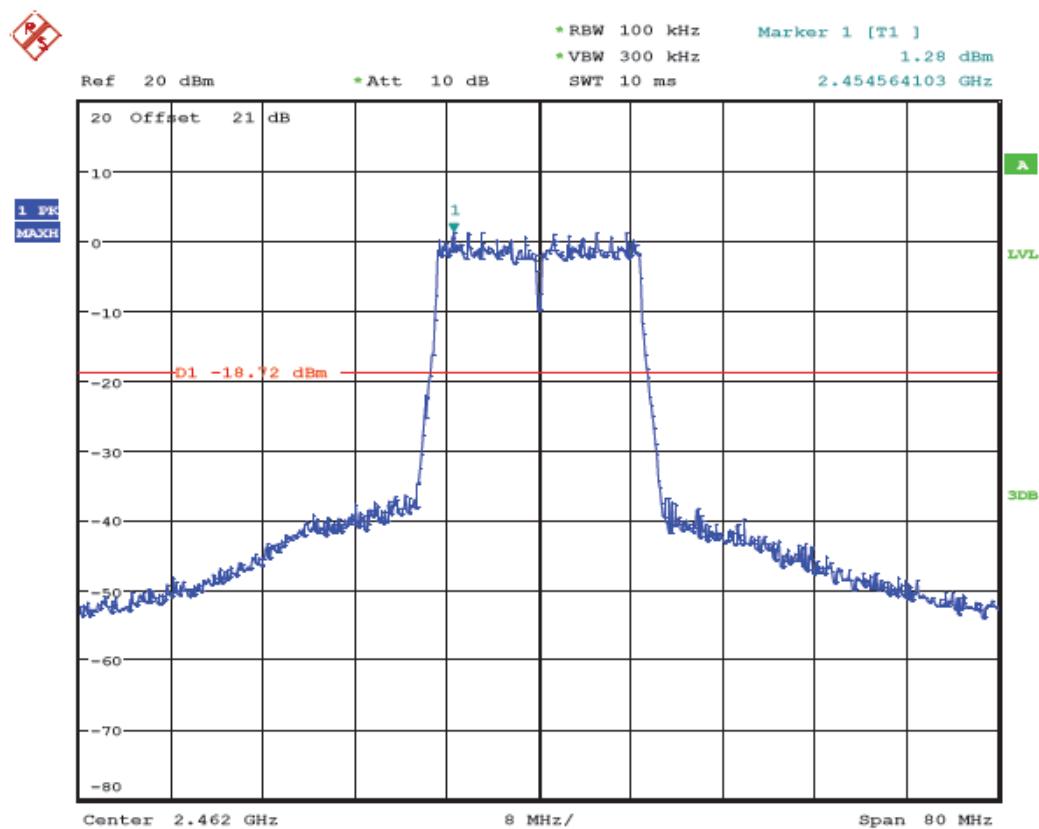


(Plot 4.6.3 C1: Channel 11: 2462MHz @ 802.11n HT20)

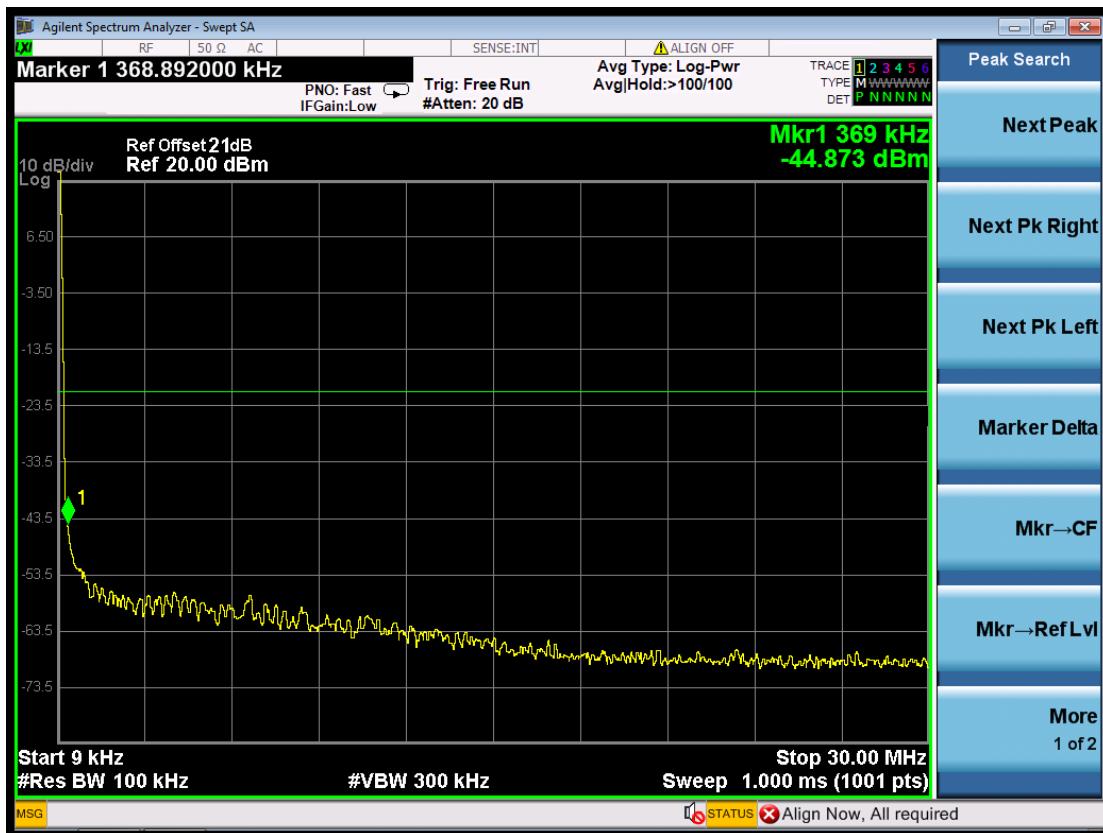


(Plot 4.6.3 C2: Channel 11: 2462MHz @ 802.11n HT20)

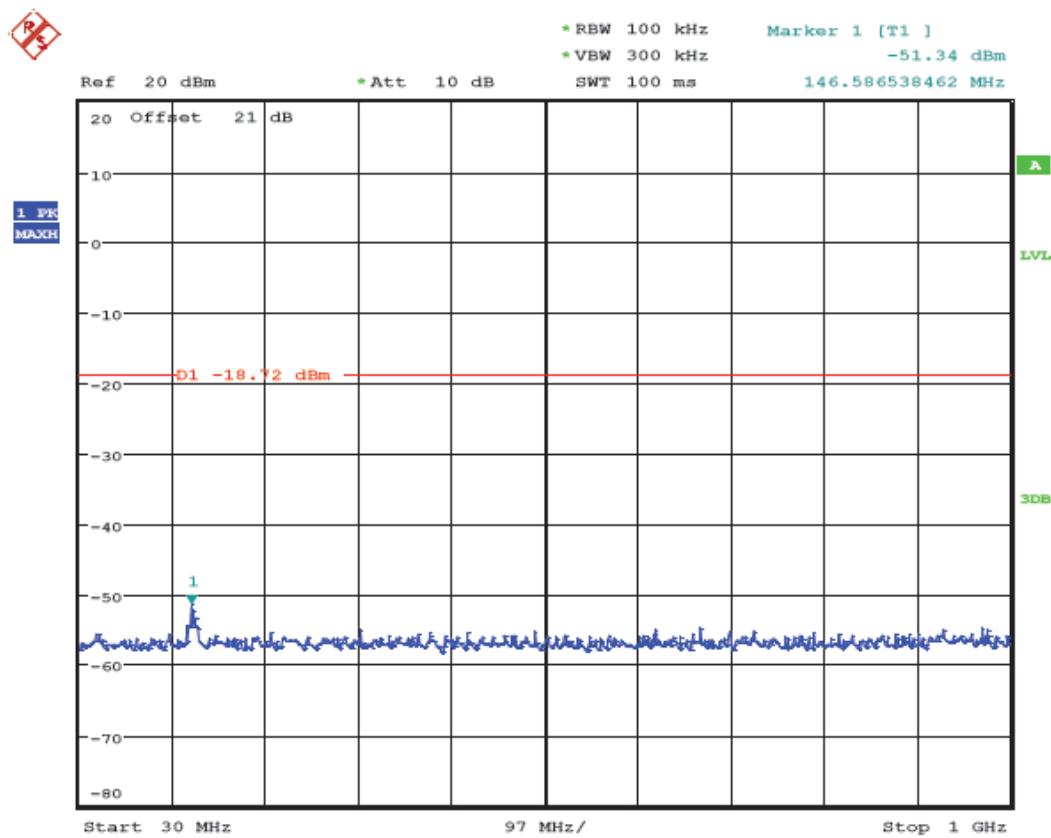


(Plot 4.6.3 C3: Channel 11: 2462MHz @ 802.11n HT20)

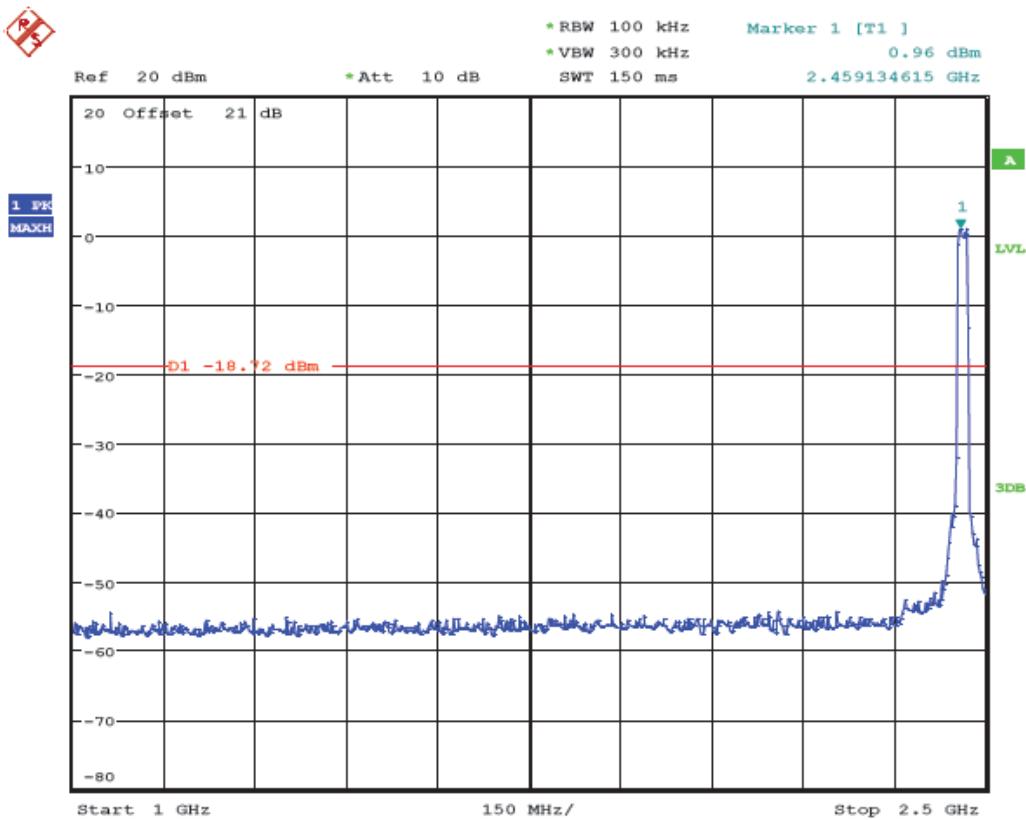


(Plot 4.6.3 C4: Channel 11: 2462MHz @ 802.11n HT20)

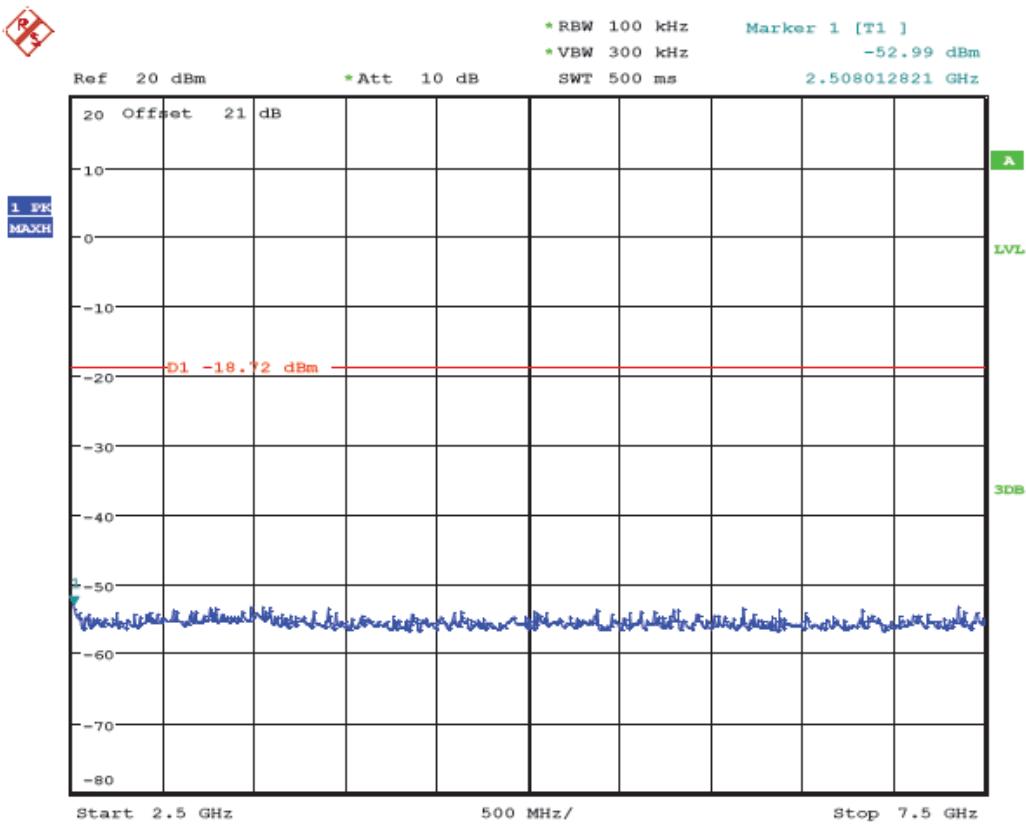


(Plot 4.6.3 C5: Channel 11: 2462MHz @ 802.11n HT20)

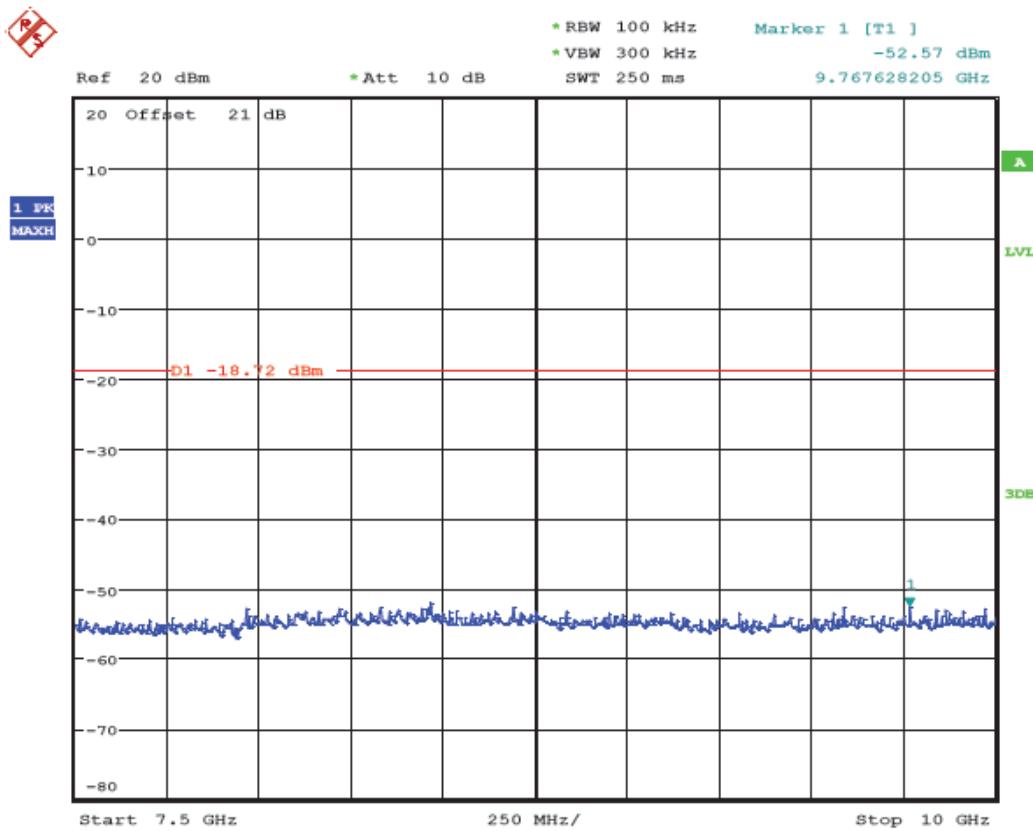


(Plot 4.6.3 C6: Channel 11: 2462MHz @ 802.11n HT20)

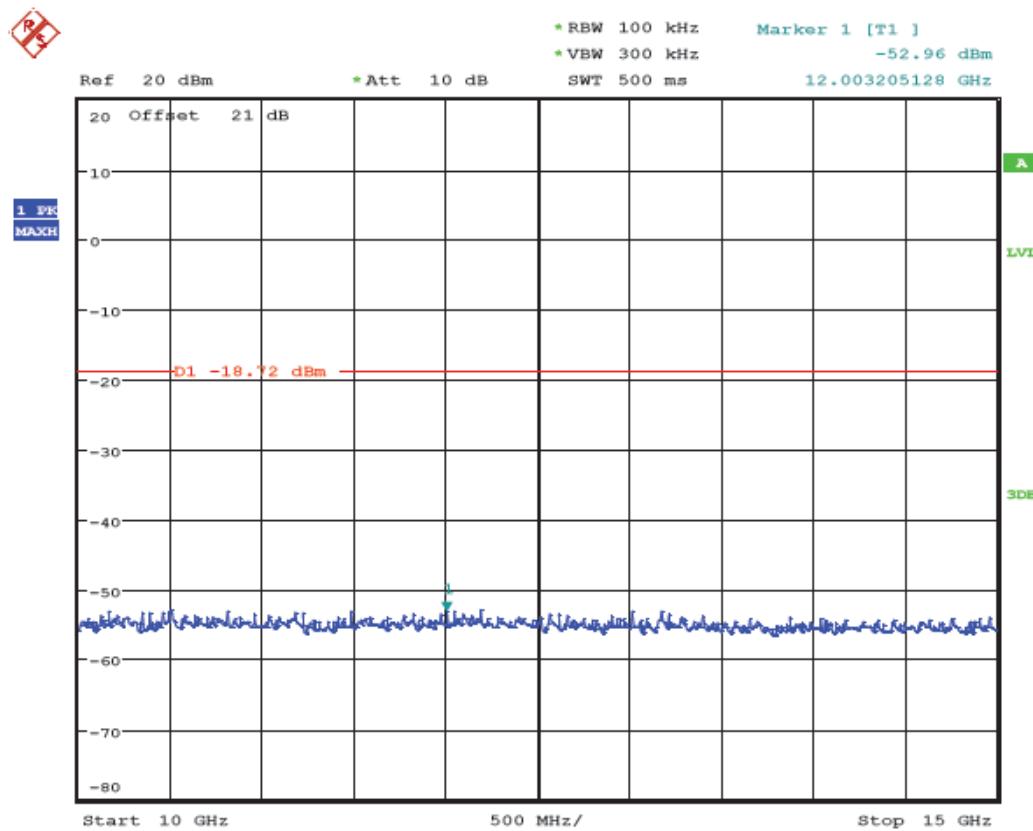


(Plot 4.6.3 C7: Channel 11: 2462MHz @ 802.11n HT20)

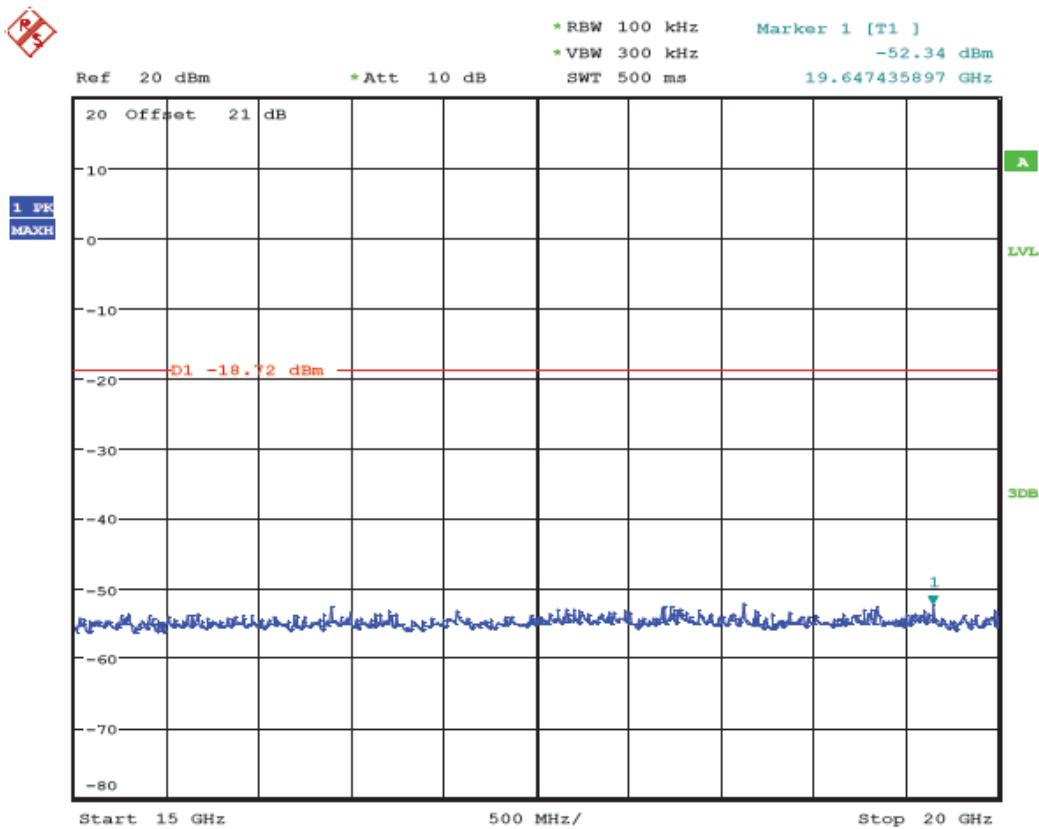


(Plot 4.6.3 C8: Channel 11: 2462MHz @ 802.11n HT20)

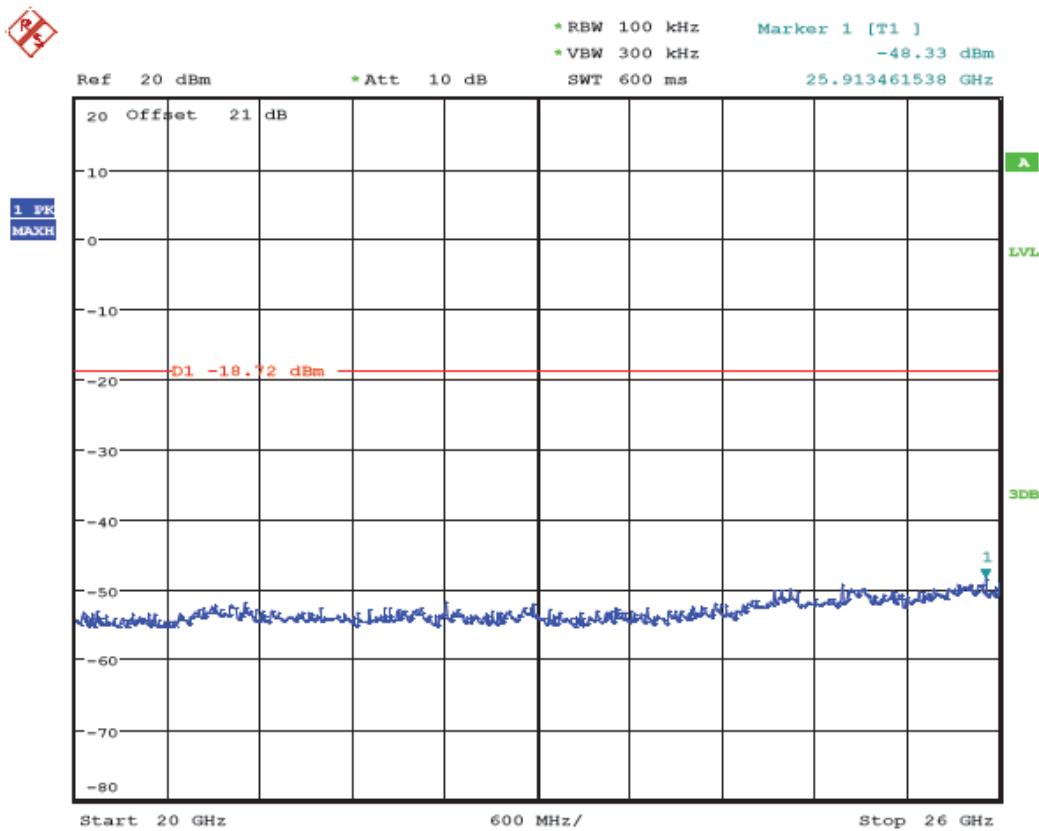

(Plot 4.6.3 C9: Channel 11: 2462MHz @ 802.11n HT20)

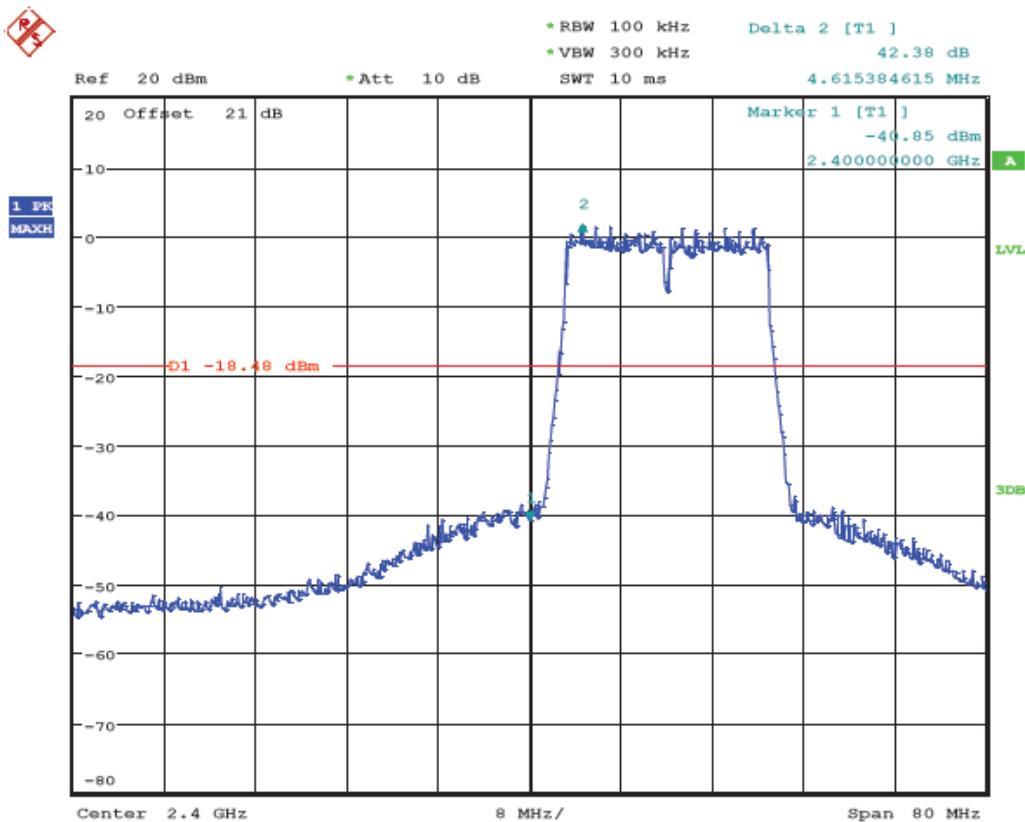

(Plot 4.6.3 D: Channel 1: 2412MHz @ 802.11n HT20)

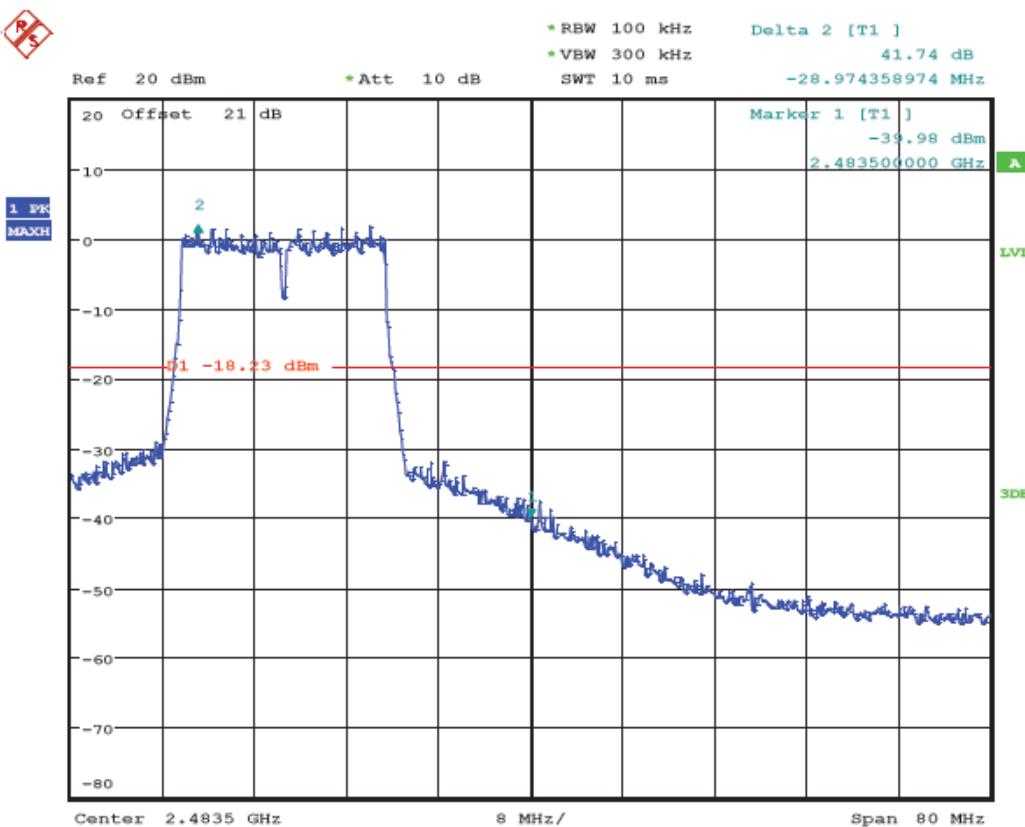

(Plot 4.6.3 E: Channel 11: 2462MHz @ 802.11n HT20)

4.6.4 802.11n HT40MHz Test Mode


A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
3	2422	2.422 GHz	Plot 4.6.4 A1	---	PASS
		9KHz-30MHz	Plot 4.6.4 A2	-20	PASS
		30MHz-1GHz	Plot 4.6.4 A3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.4 A4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.4 A5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.4 A6	-20	PASS
		10GHz-15GHz	Plot 4.6.4 A7	-20	PASS
		15GHz-20GHz	Plot 4.6.4 A8	-20	PASS
		20GHz-26GHz	Plot 4.6.4 A9	-20	PASS
6	2437	2.437 GHz	Plot 4.6.4 B1	---	PASS
		9KHz-30MHz	Plot 4.6.4 B2	-20	PASS
		30MHz-1GHz	Plot 4.6.4 B3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.4 B4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.4 B5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.4 B6	-20	PASS
		10GHz-15GHz	Plot 4.6.4 B7	-20	PASS
		15GHz-20GHz	Plot 4.6.4 B8	-20	PASS
		20GHz-26GHz	Plot 4.6.4 B9	-20	PASS
9	2452	2.452 GHz	Plot 4.6.4 C1	---	PASS
		9KHz-30MHz	Plot 4.6.3 C2	-20	PASS
		30MHz-1GHz	Plot 4.6.3 C3	-20	PASS
		1GHz-2.5GHz	Plot 4.6.4 C4	-20	PASS
		2.5GHz-7.5GHz	Plot 4.6.4 C5	-20	PASS
		7.5GHz-10GHz	Plot 4.6.4 C6	-20	PASS
		10GHz-15GHz	Plot 4.6.4 C7	-20	PASS
		15GHz-20GHz	Plot 4.6.4 C8	-20	PASS
		20GHz-26GHz	Plot 4.6.4 C9	-20	PASS


Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-36.20	Peak	-20	Plot 4.6.4 D	PASS
2483.50	-36.38	Peak	-20	Plot 4.6.4 E	PASS

Note: 1. For 802.11n HT40MHz mode at final test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable loss.


B. Test Plots

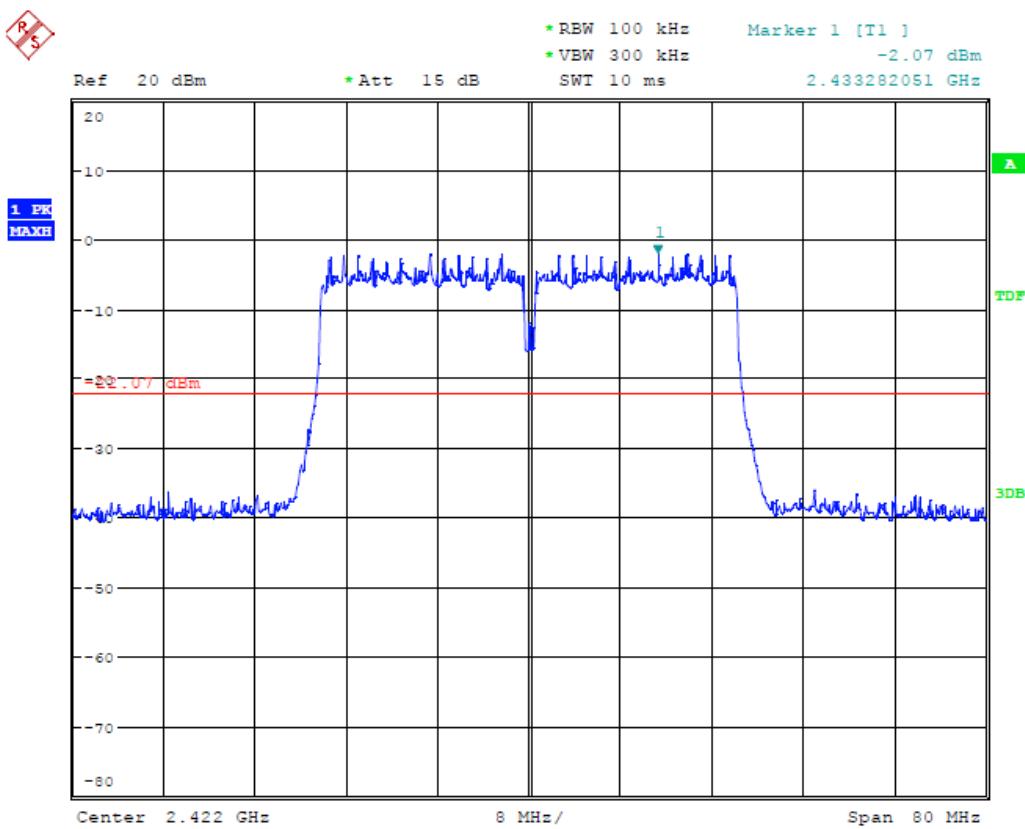


(Plot 4.6.4 A1: Channel 3: 2422MHz @ 802.11n HT40)

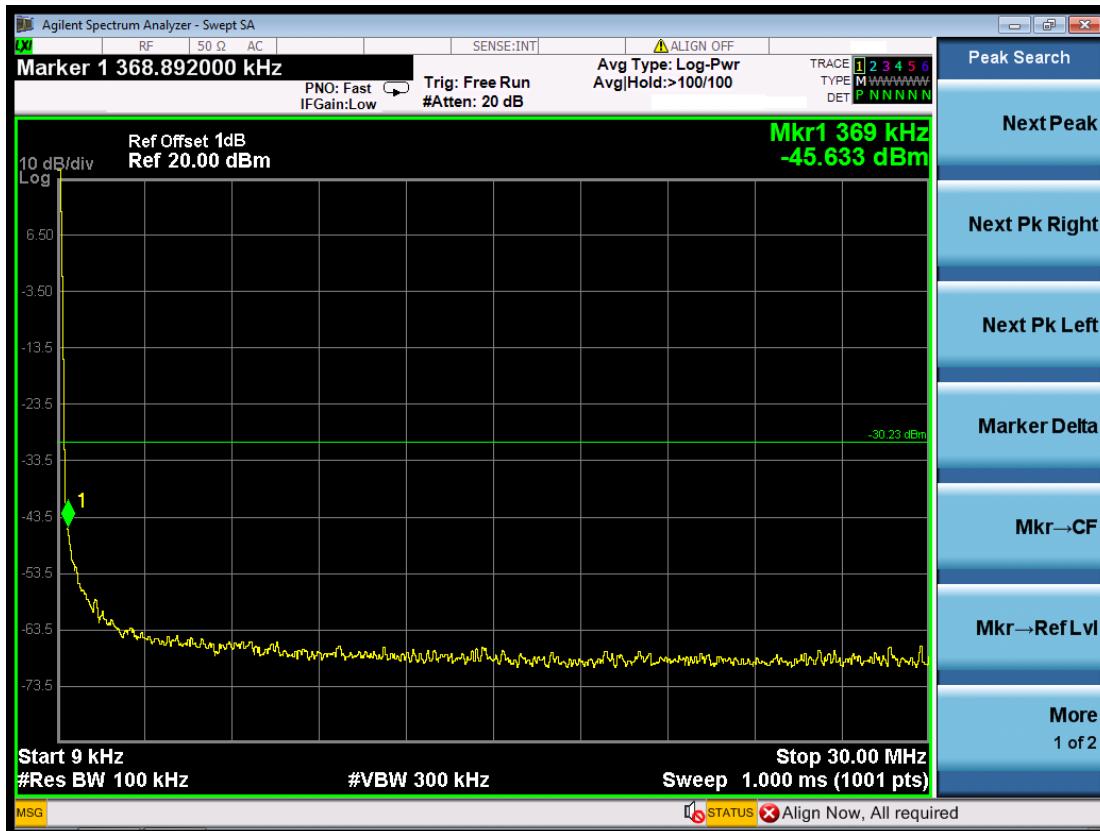


(Plot 4.6.4 A2: Channel 3: 2422MHz @ 802.11n HT40)

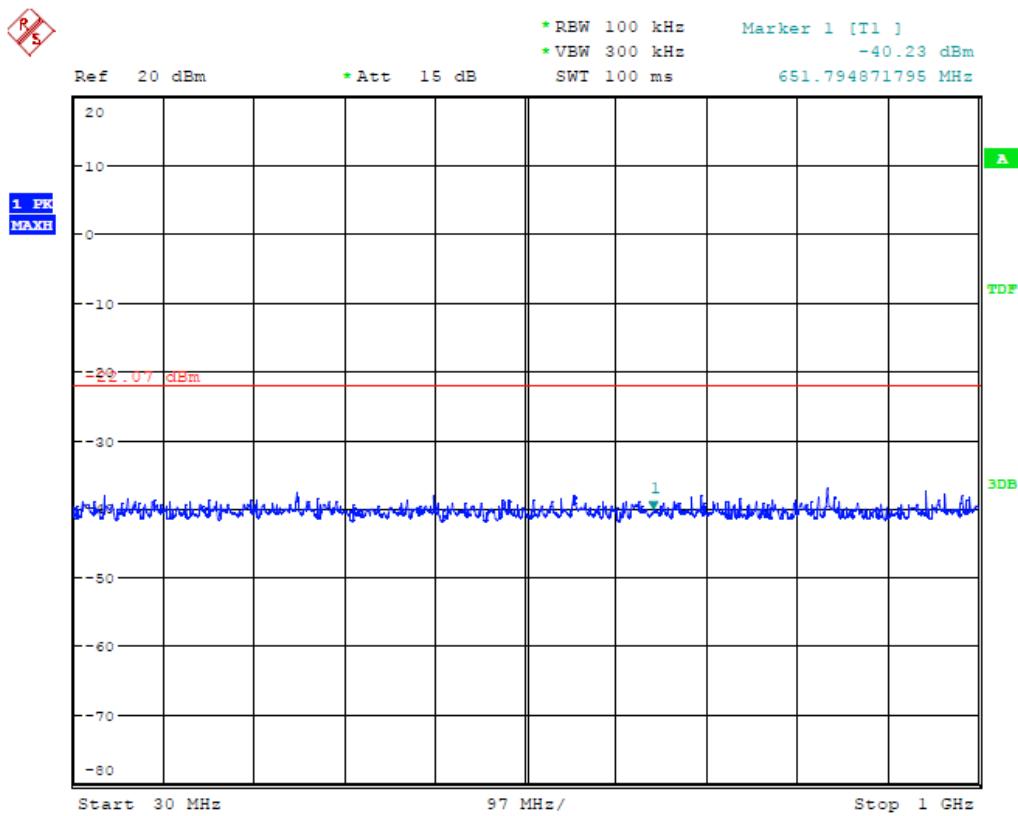


(Plot 4.6.4 A3: Channel 3: 2422MHz @ 802.11n HT40)

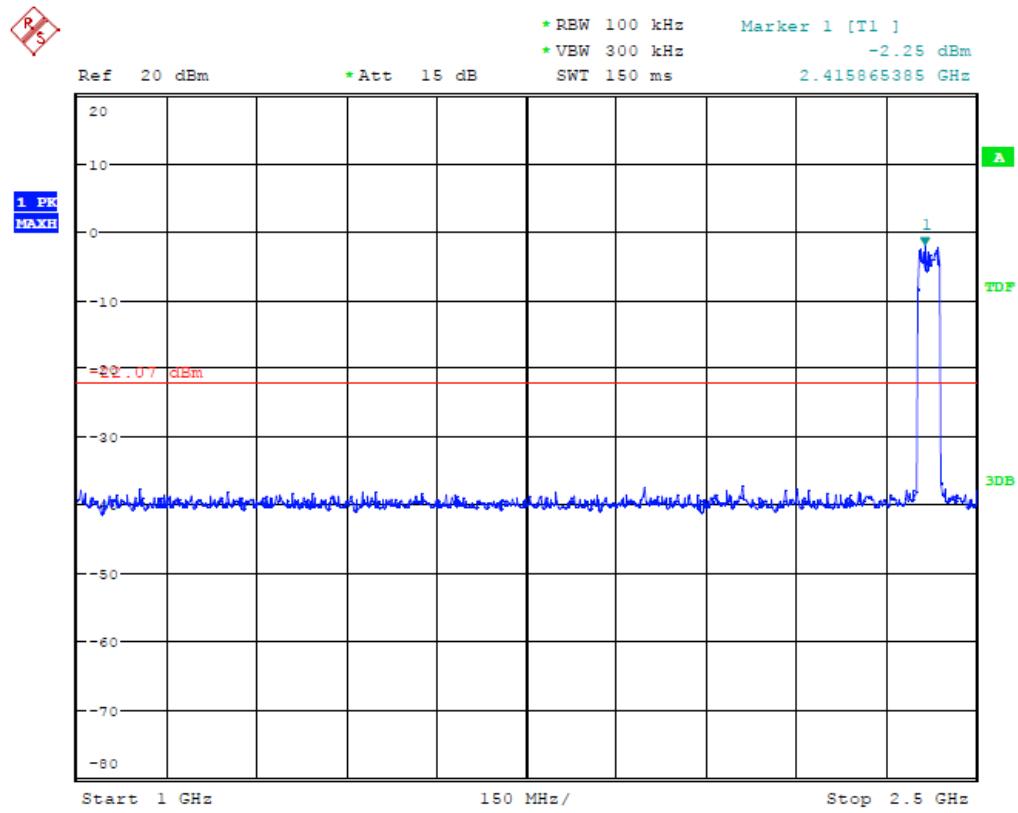


(Plot 4.6.4 A4: Channel 3: 2422MHz @ 802.11n HT40)

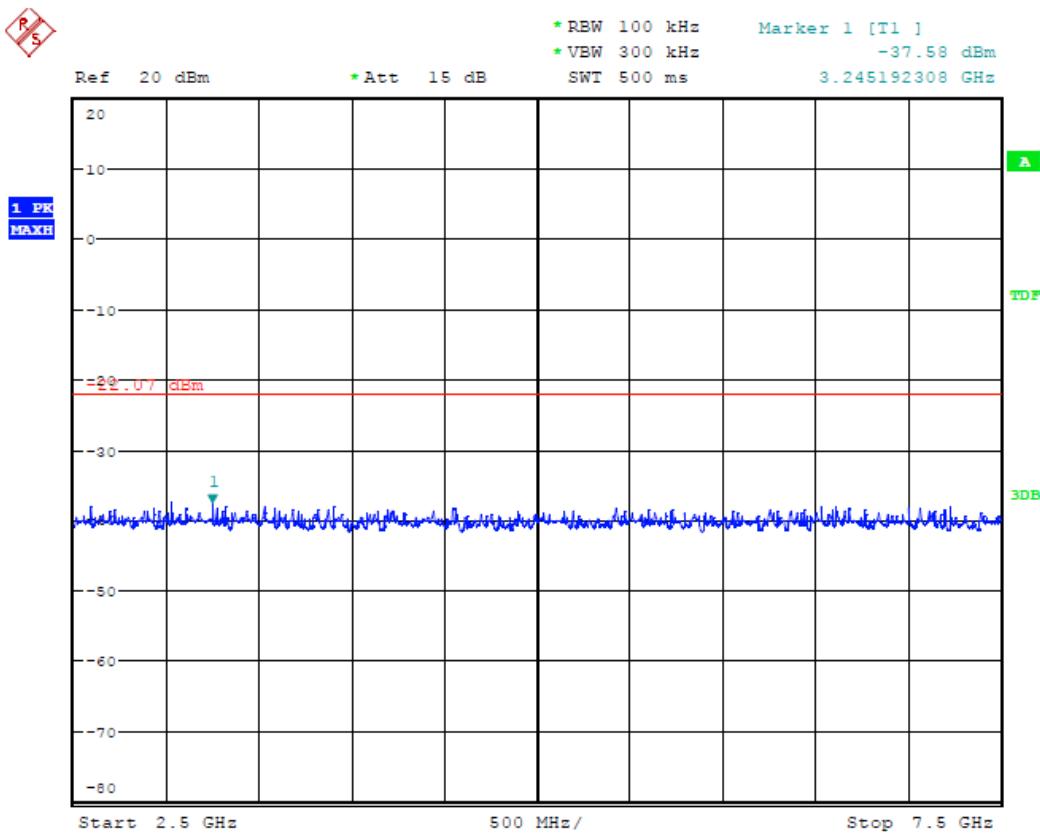


(Plot 4.6.4 A5: Channel 3: 2422MHz @ 802.11n HT40)

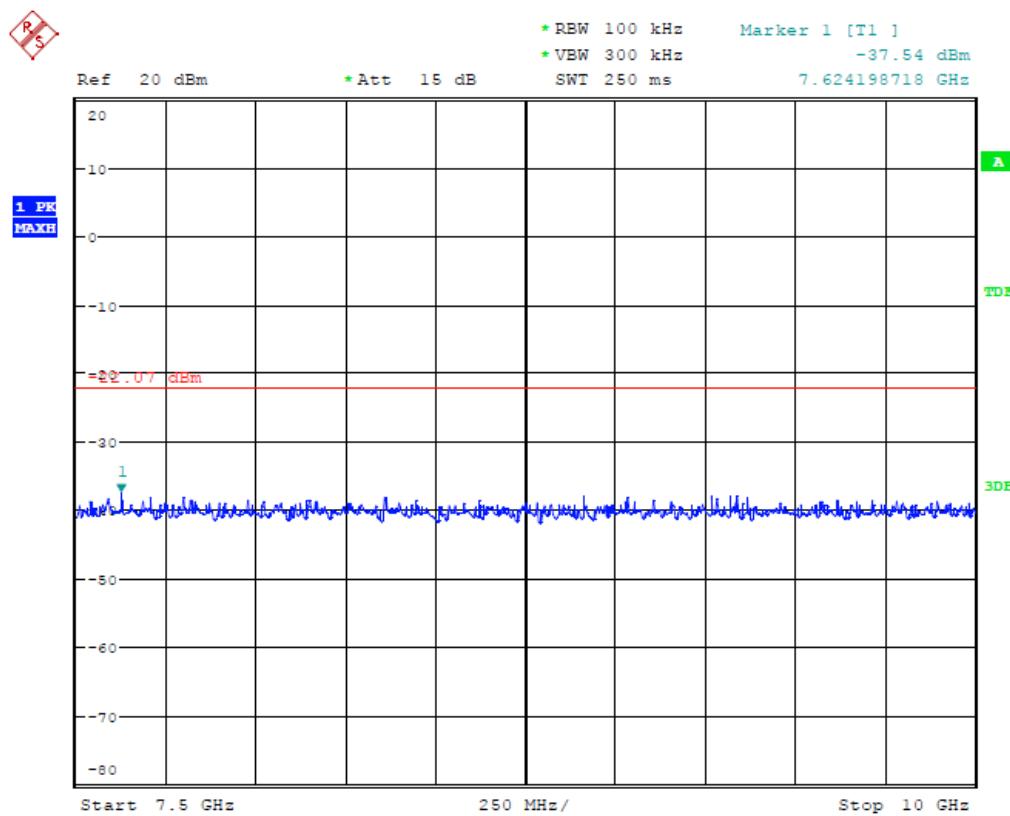


(Plot 4.6.4 A6: Channel 3: 2422MHz @ 802.11n HT40)

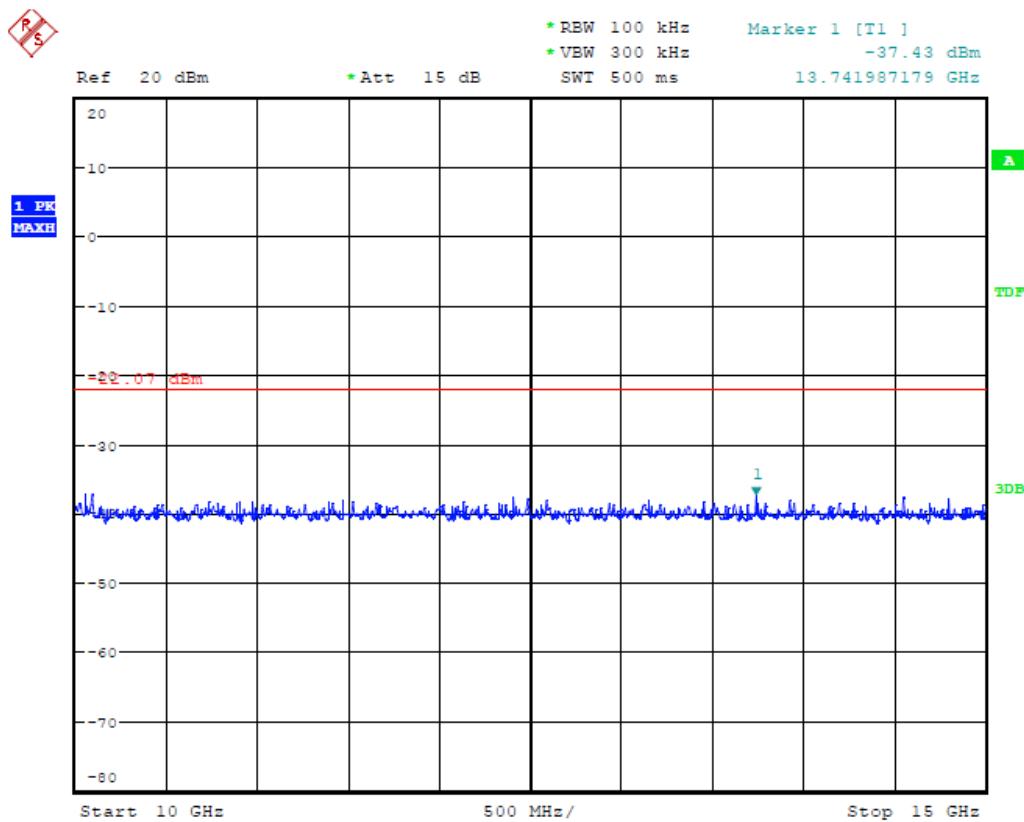


(Plot 4.6.4 A7: Channel 3: 2422MHz @ 802.11n HT40)

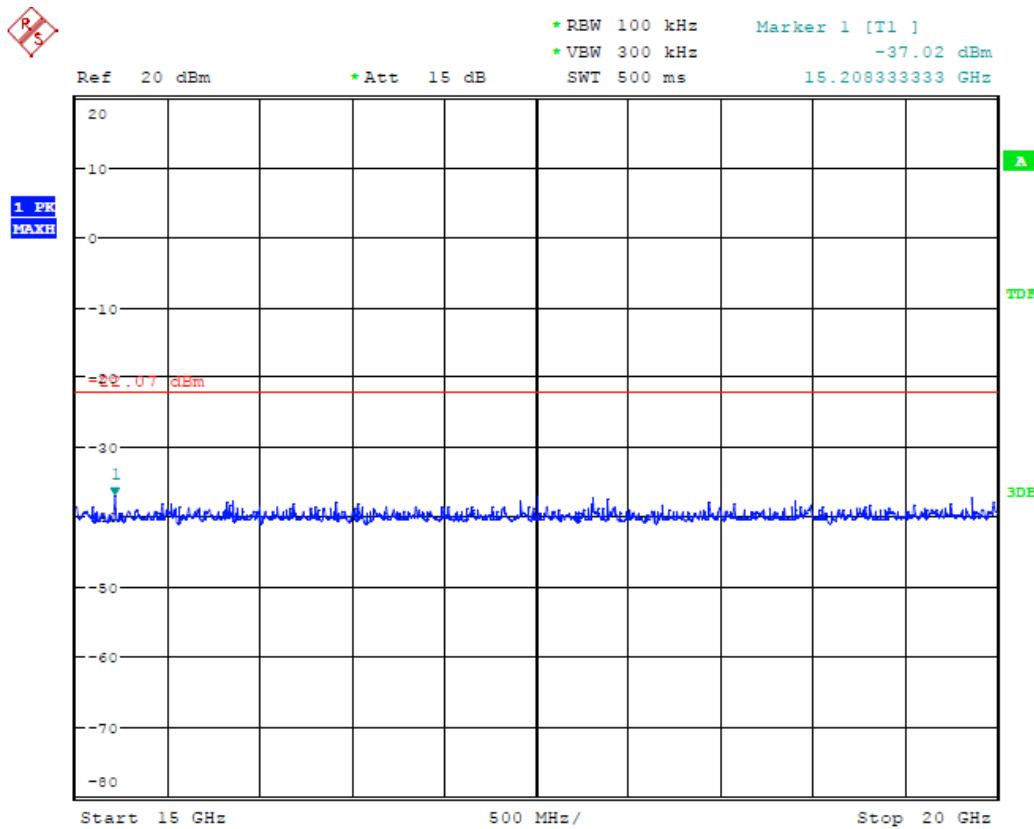


(Plot 4.6.4 A8: Channel 3: 2422MHz @ 802.11n HT40)

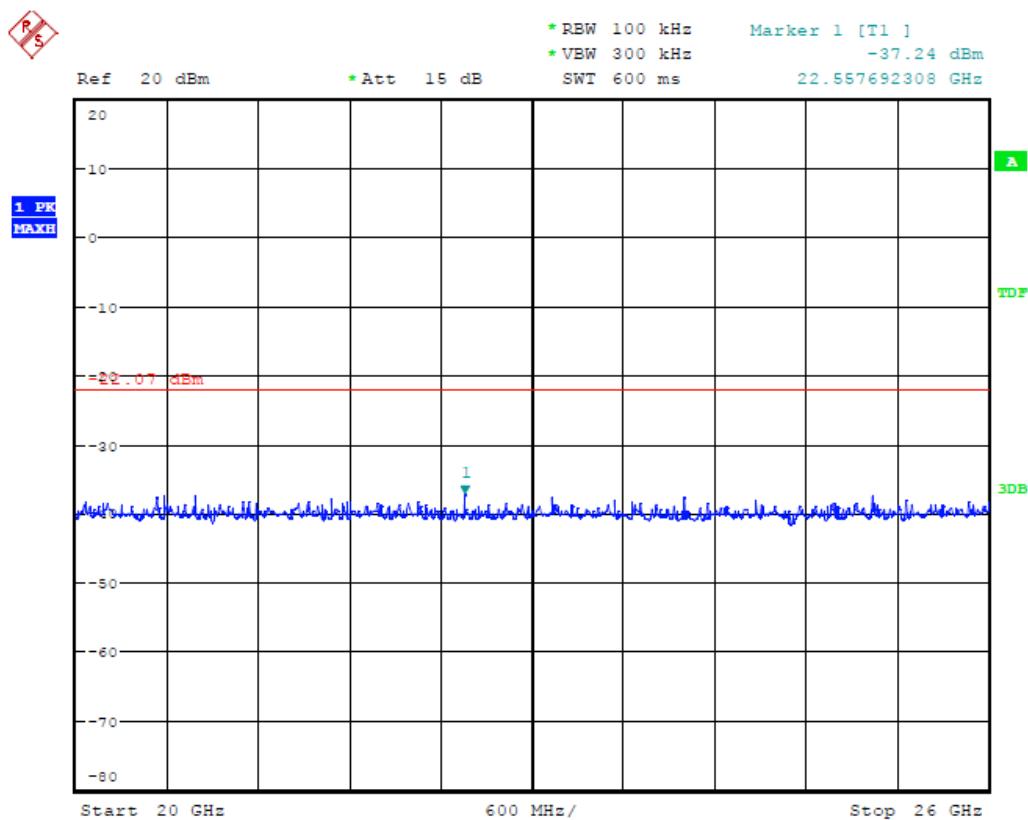


(Plot 4.6.4 A9: Channel 3: 2422MHz @ 802.11n HT40)

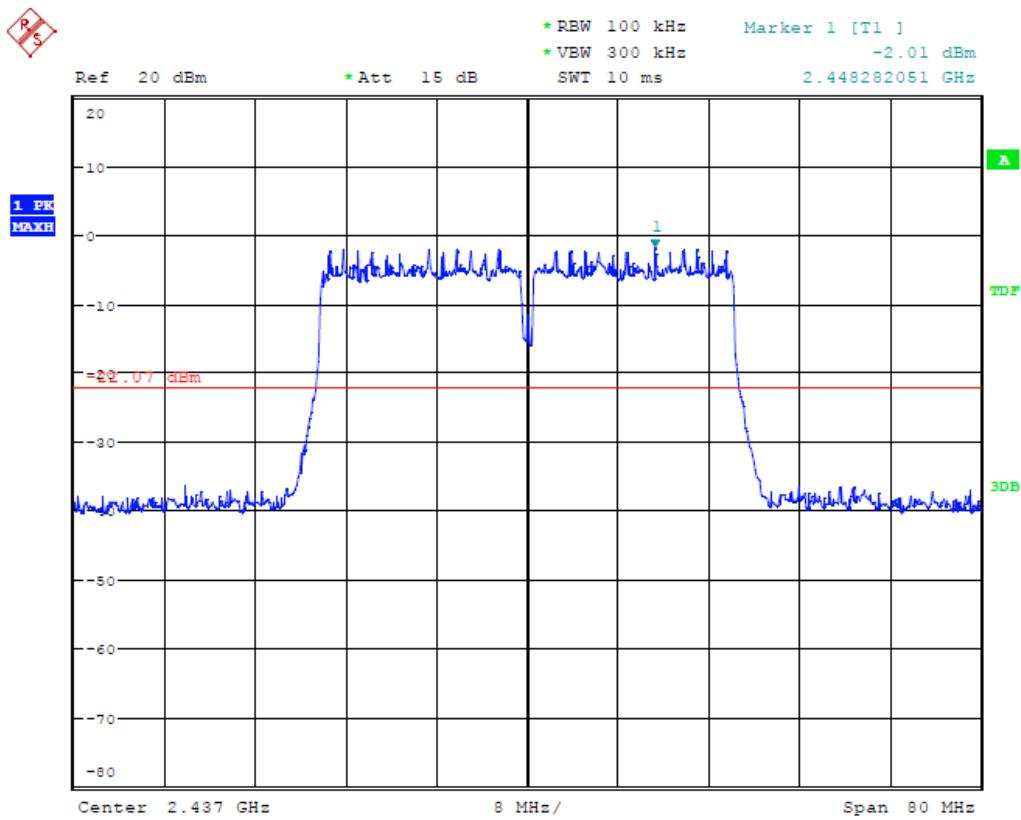


(Plot 4.6.4 B1: Channel 6: 2437MHz @ 802.11n HT40)

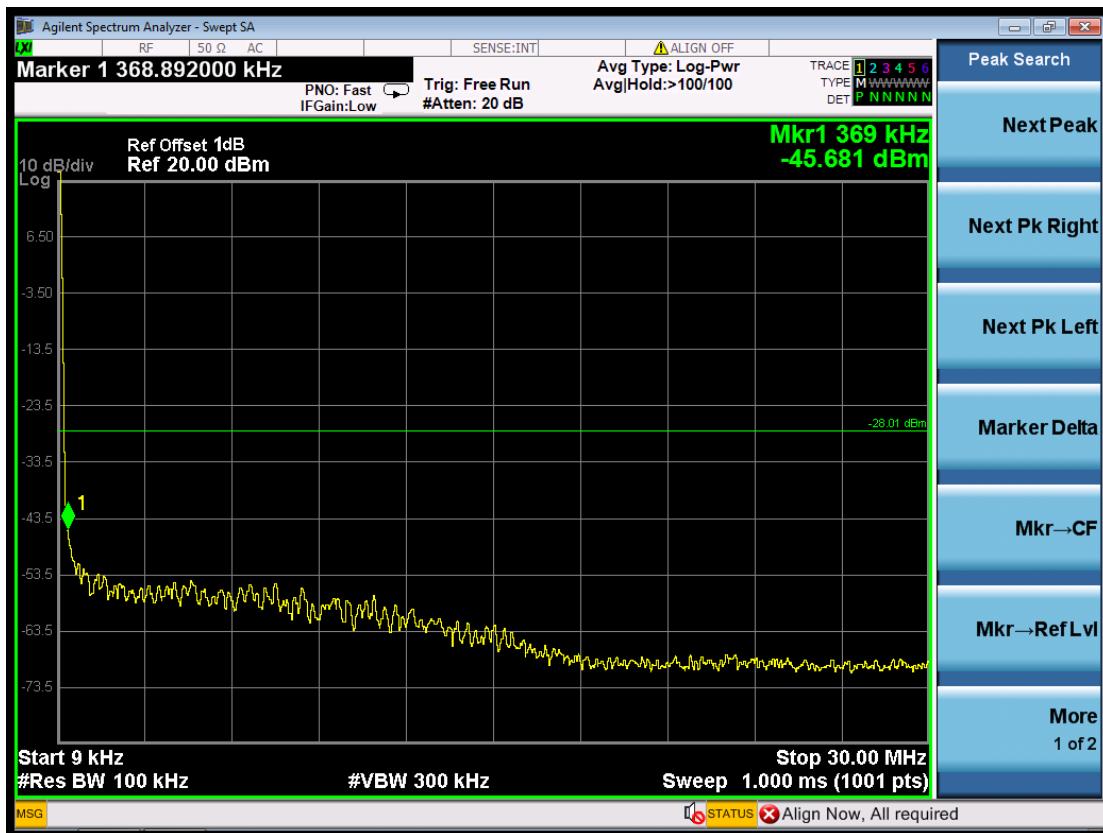


(Plot 4.6.4 B2: Channel 6: 2437MHz @ 802.11n HT40)

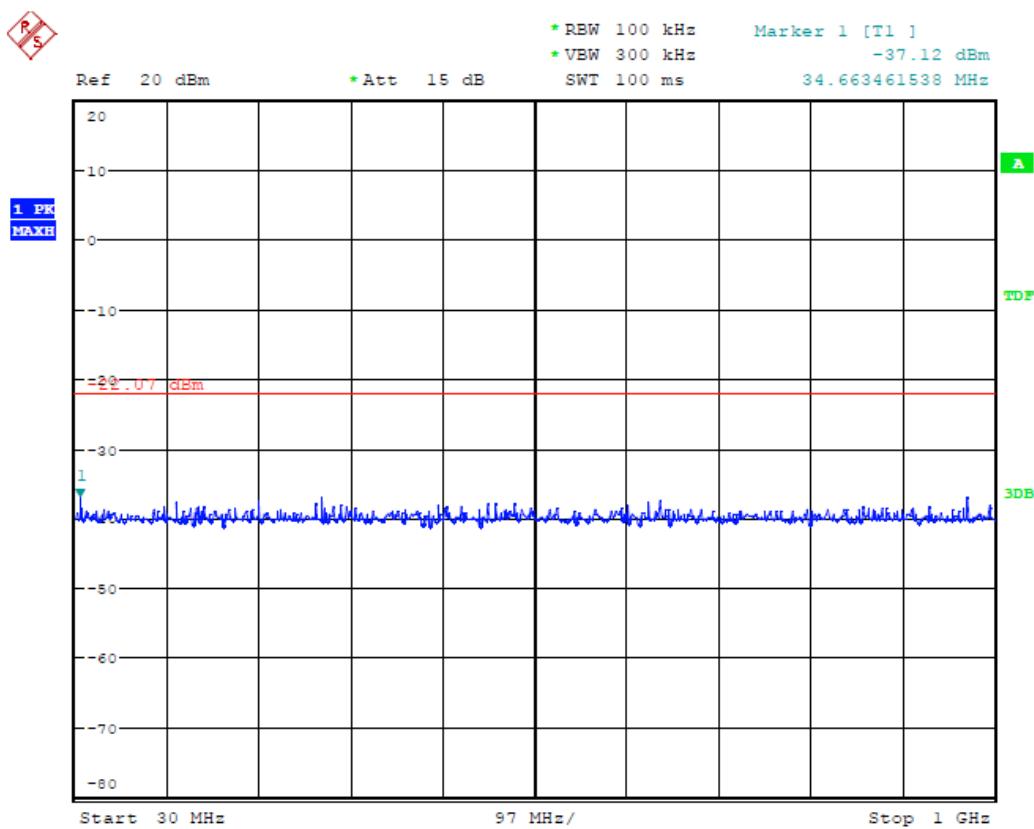


(Plot 4.6.4 B3: Channel 6: 2437MHz @ 802.11n HT40)

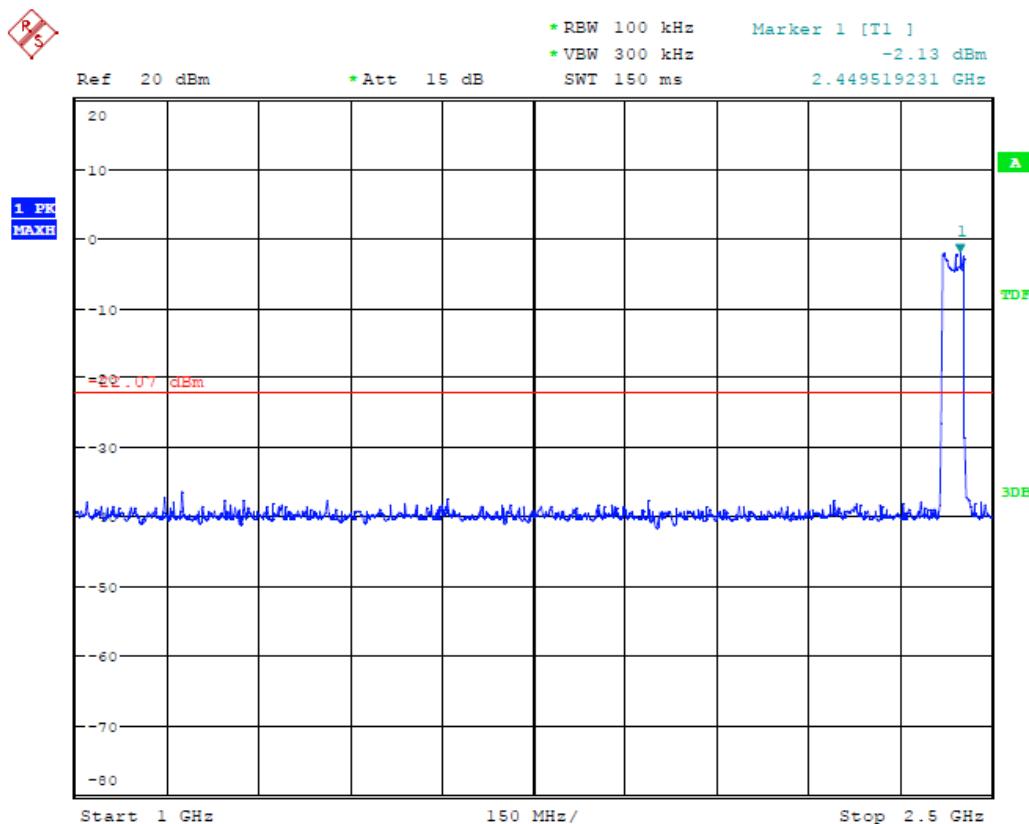


(Plot 4.6.4 B4: Channel 6: 2437MHz @ 802.11n HT40)

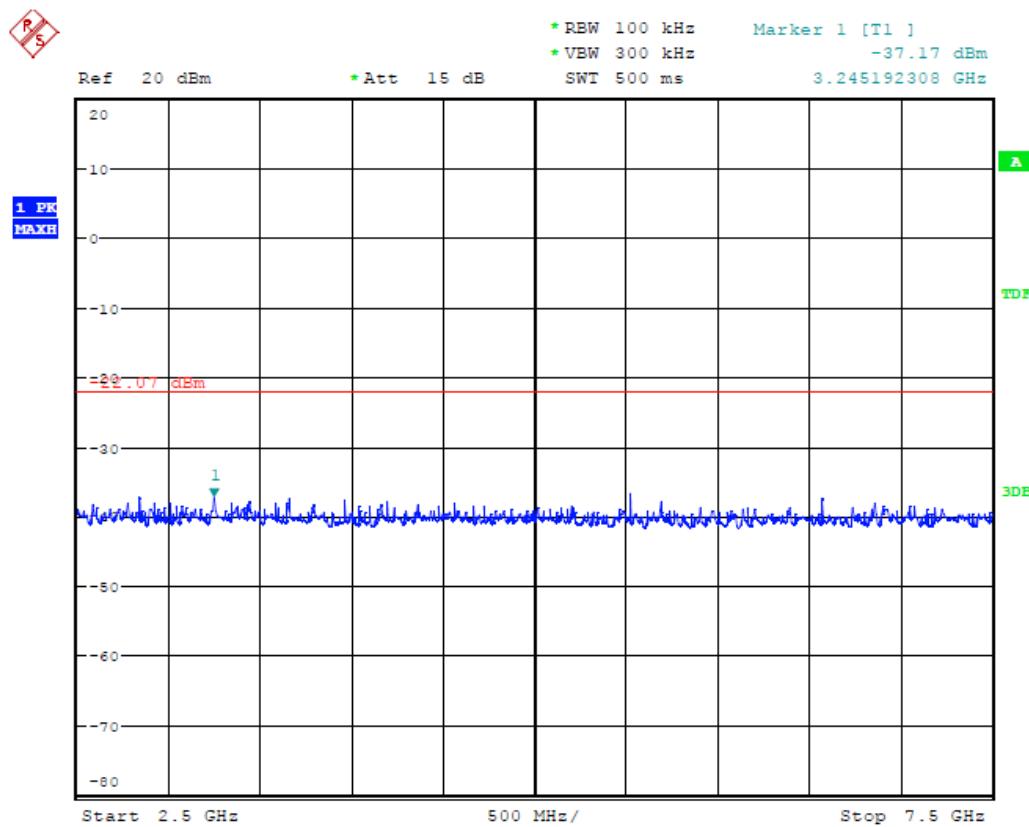


(Plot 4.6.4 B5: Channel 6: 2437MHz @ 802.11n HT40)

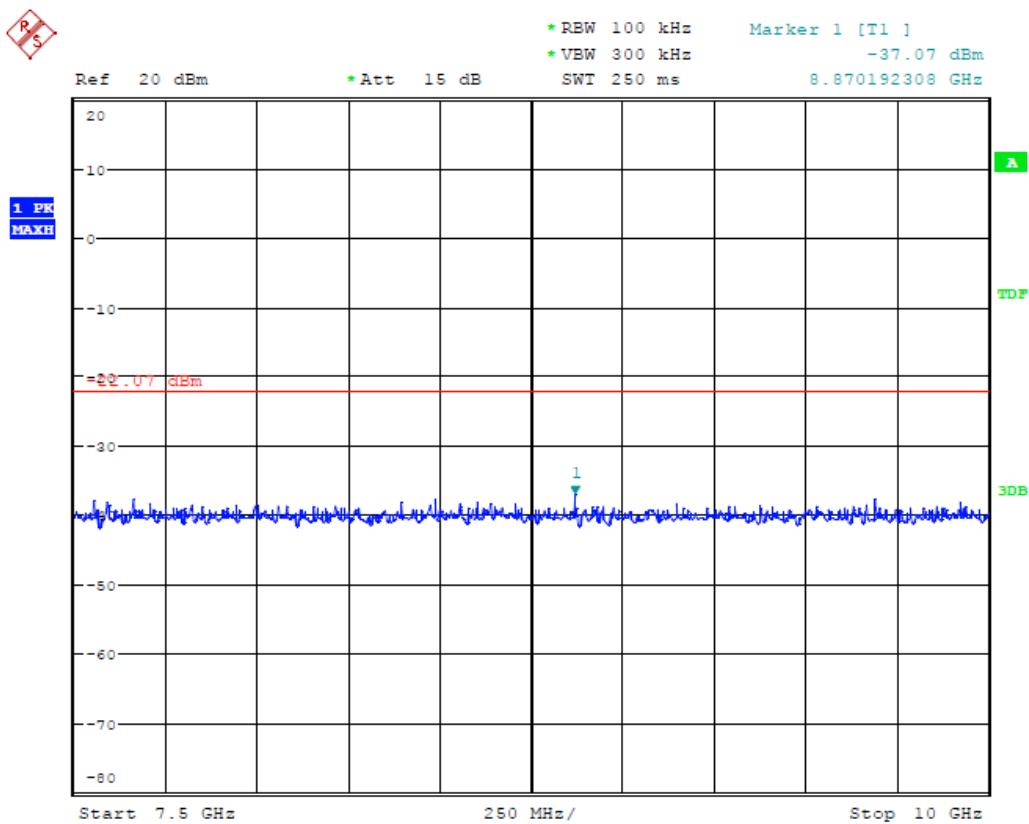


(Plot 4.6.4 B6: Channel 6: 2437MHz @ 802.11n HT40)

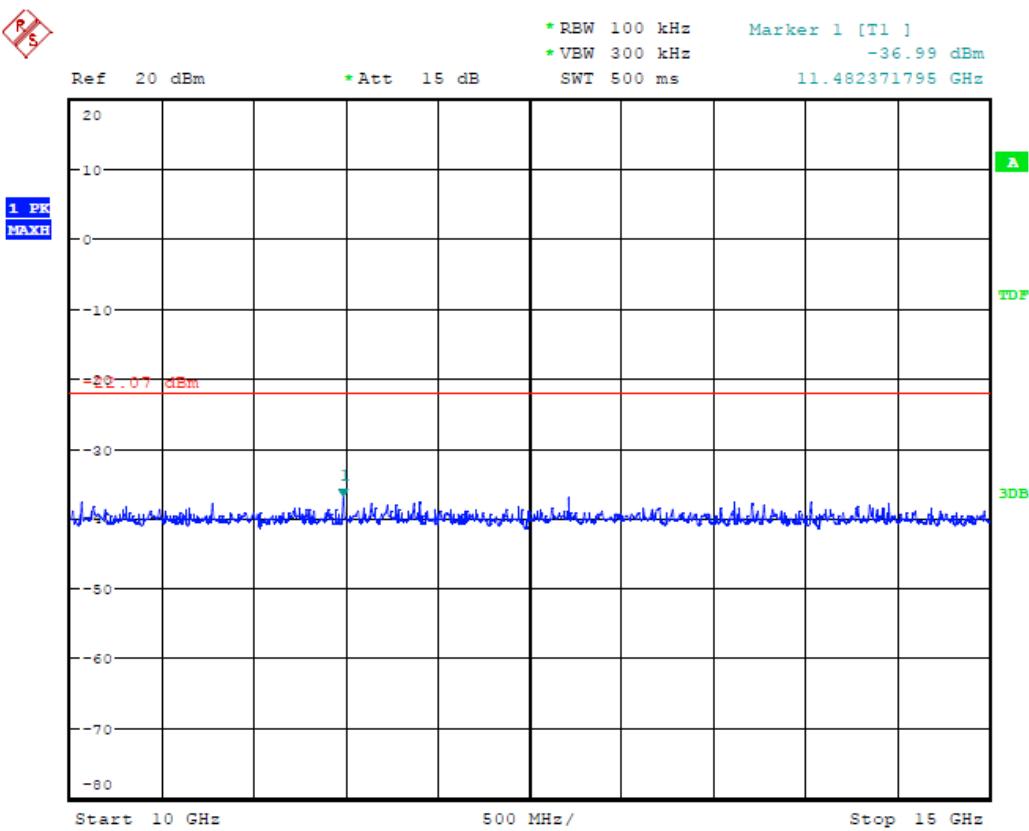


(Plot 4.6.4 B7: Channel 6: 2437MHz @ 802.11n HT40)

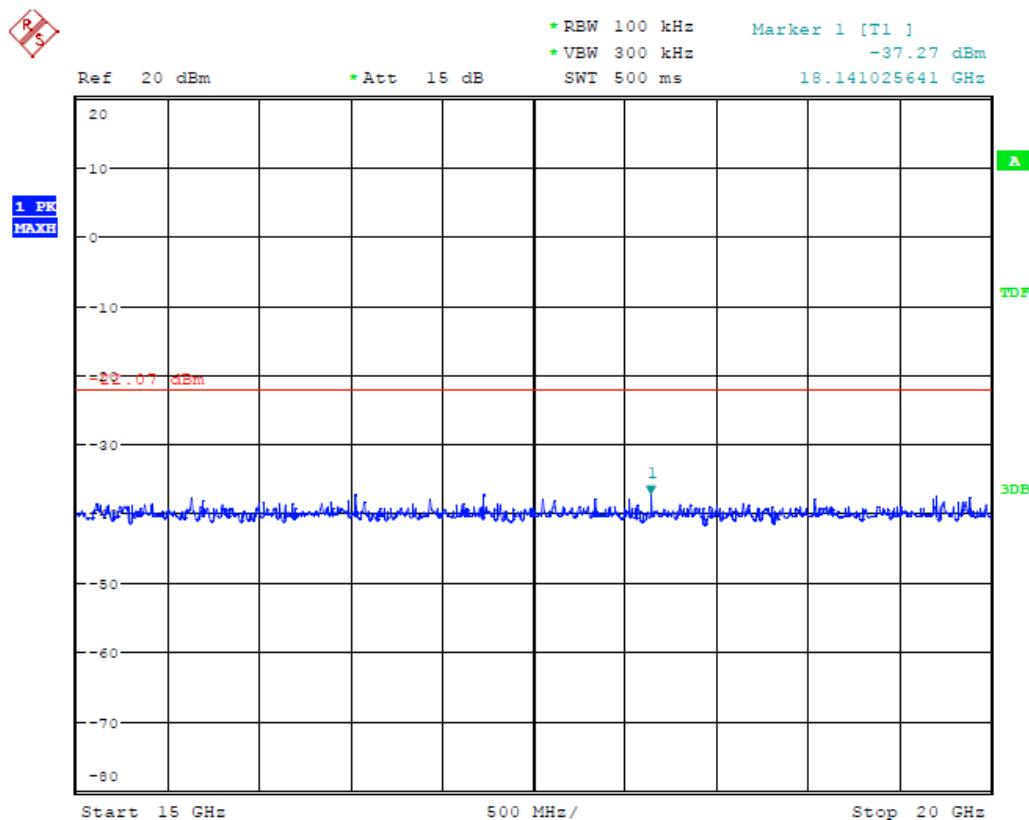


(Plot 4.6.4 B8: Channel 6: 2437MHz @ 802.11n HT40)

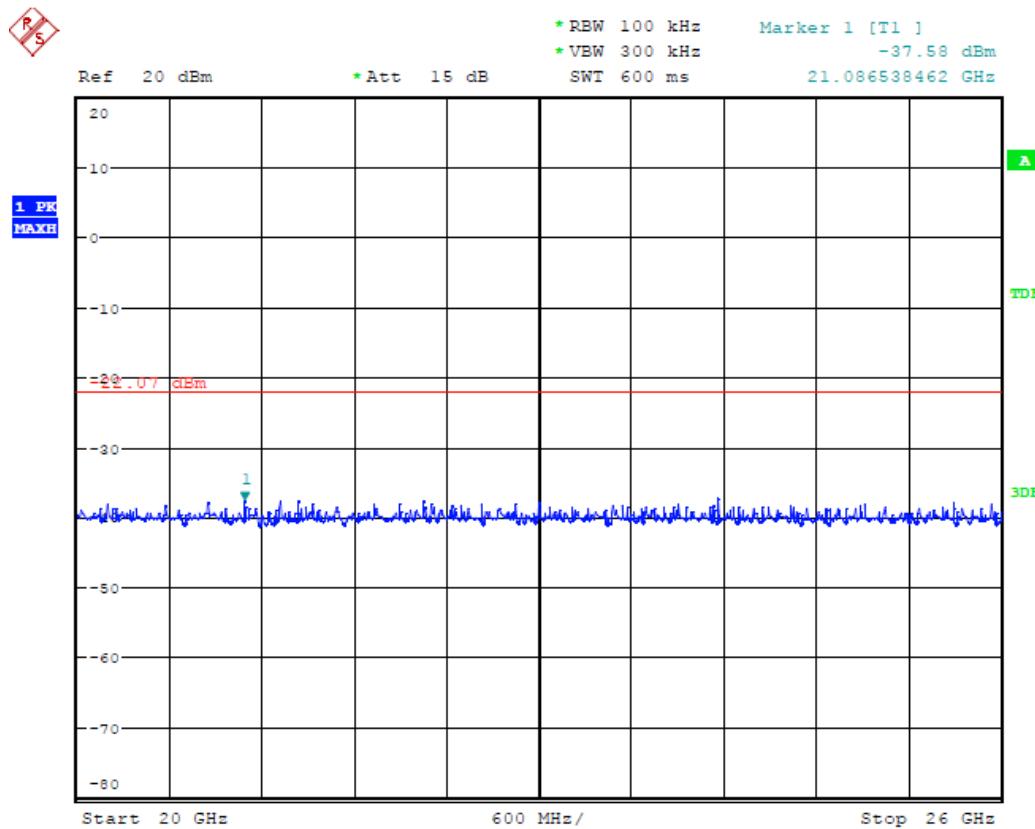


(Plot 4.6.4 B9: Channel 6: 2437MHz @ 802.11n HT40)

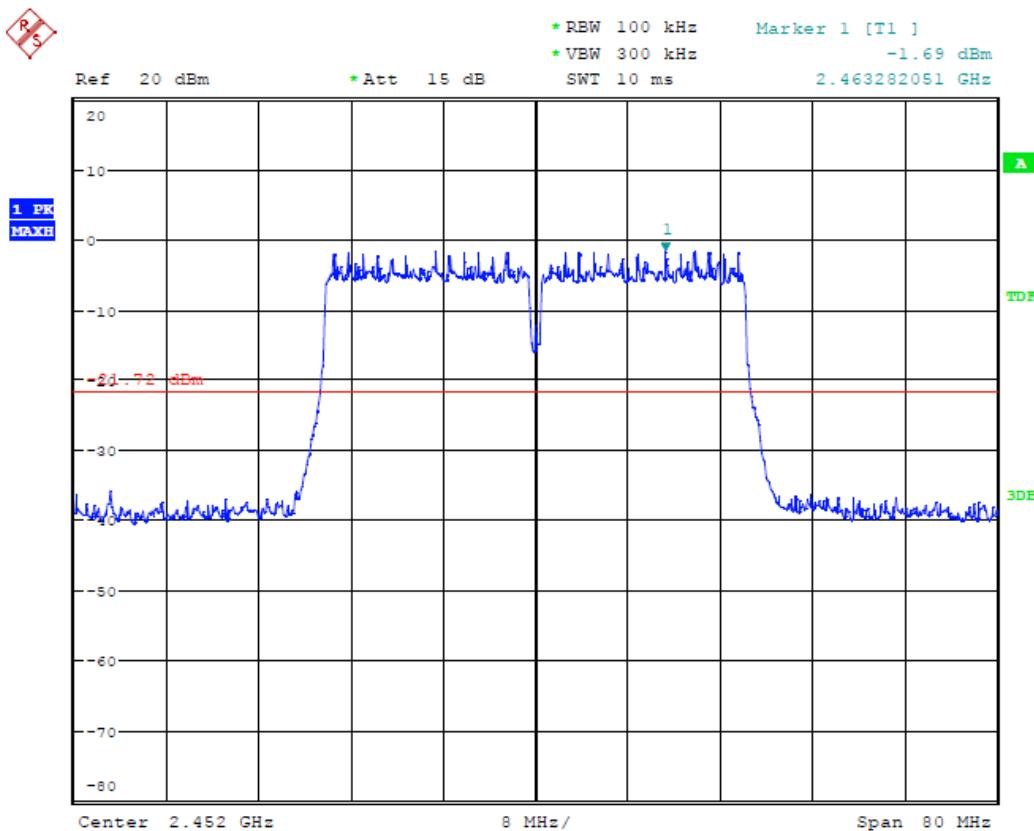


(Plot 4.6.4 C1: Channel 11: 2462MHz @ 802.11n HT40)

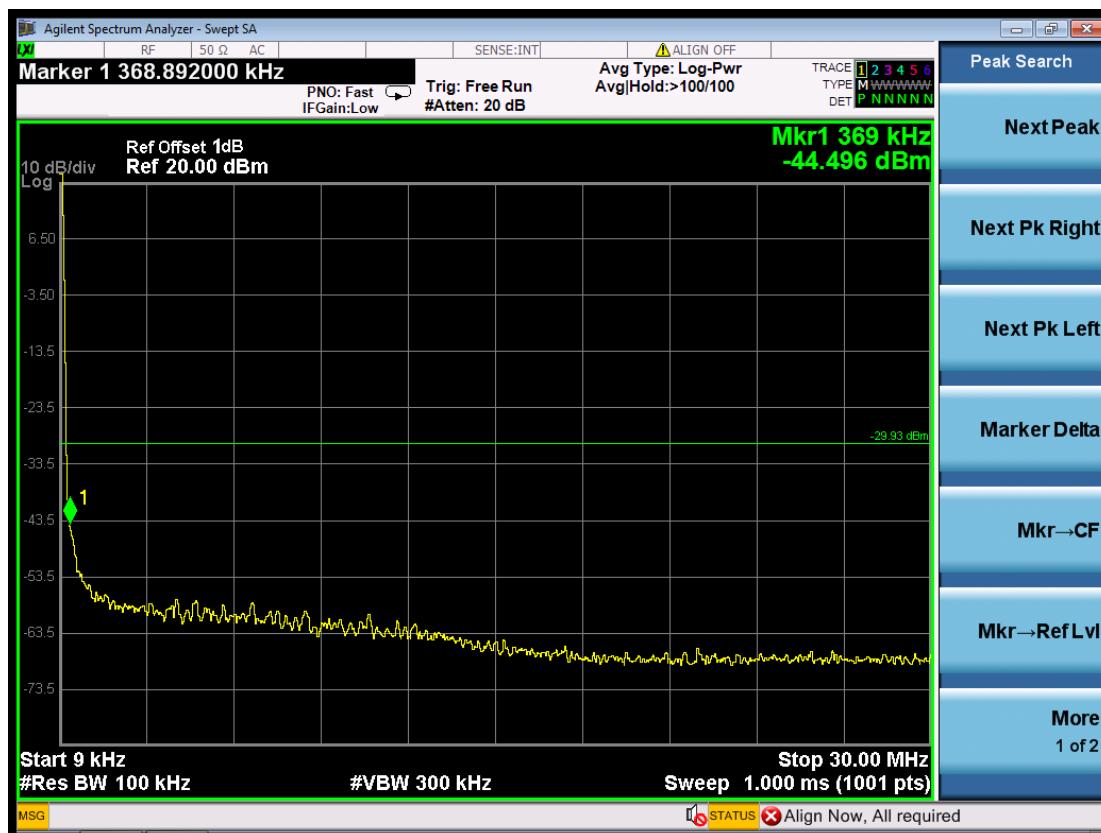


(Plot 4.6.4 C2: Channel 11: 2462MHz @ 802.11n HT40)

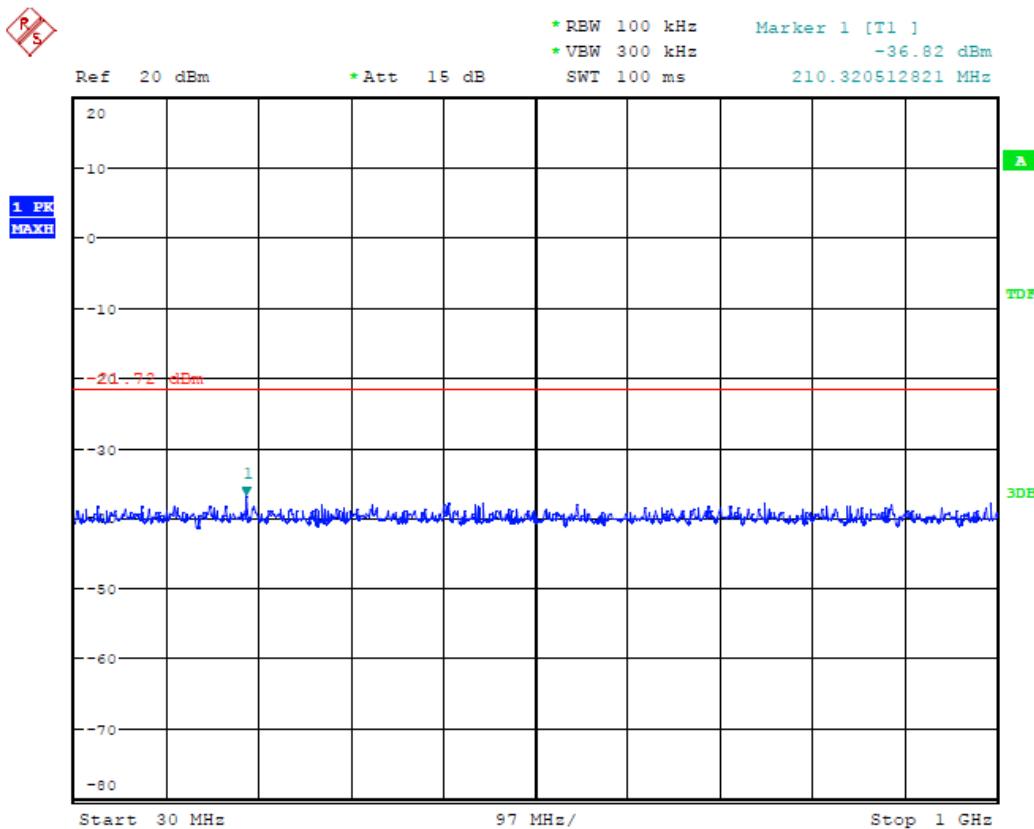


(Plot 4.6.4 C3: Channel 11: 2462MHz @ 802.11n HT40)

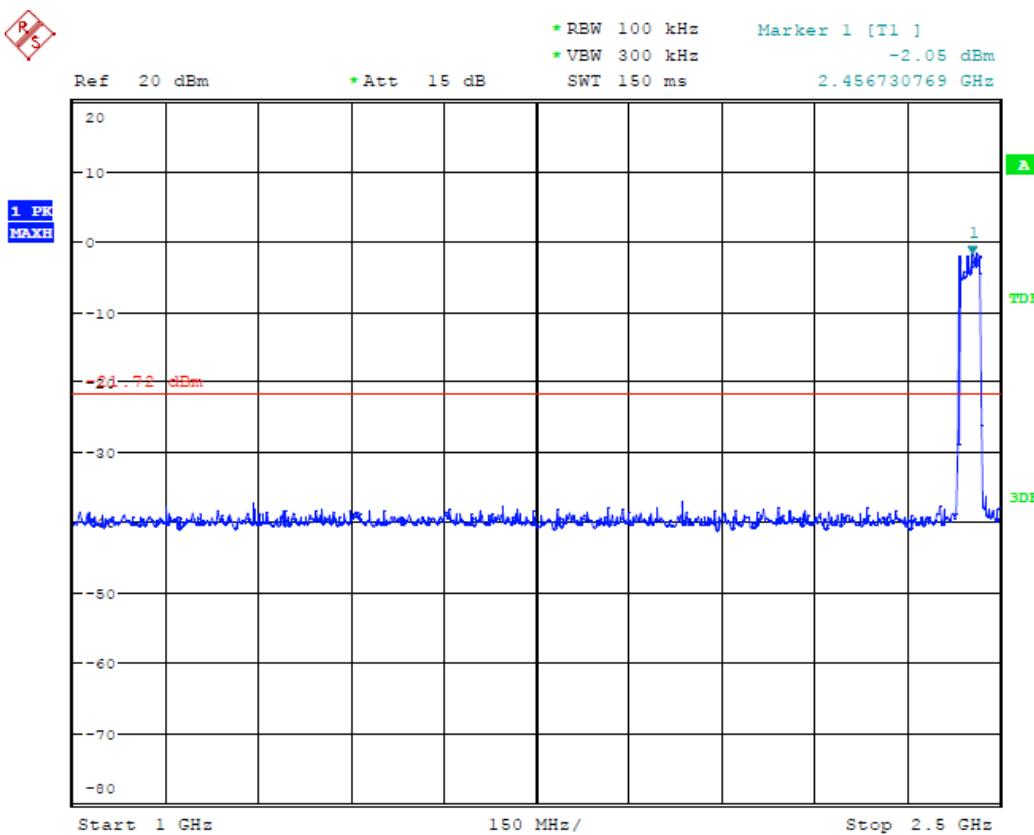


(Plot 4.6.4 C4: Channel 11: 2462MHz @ 802.11n HT40)

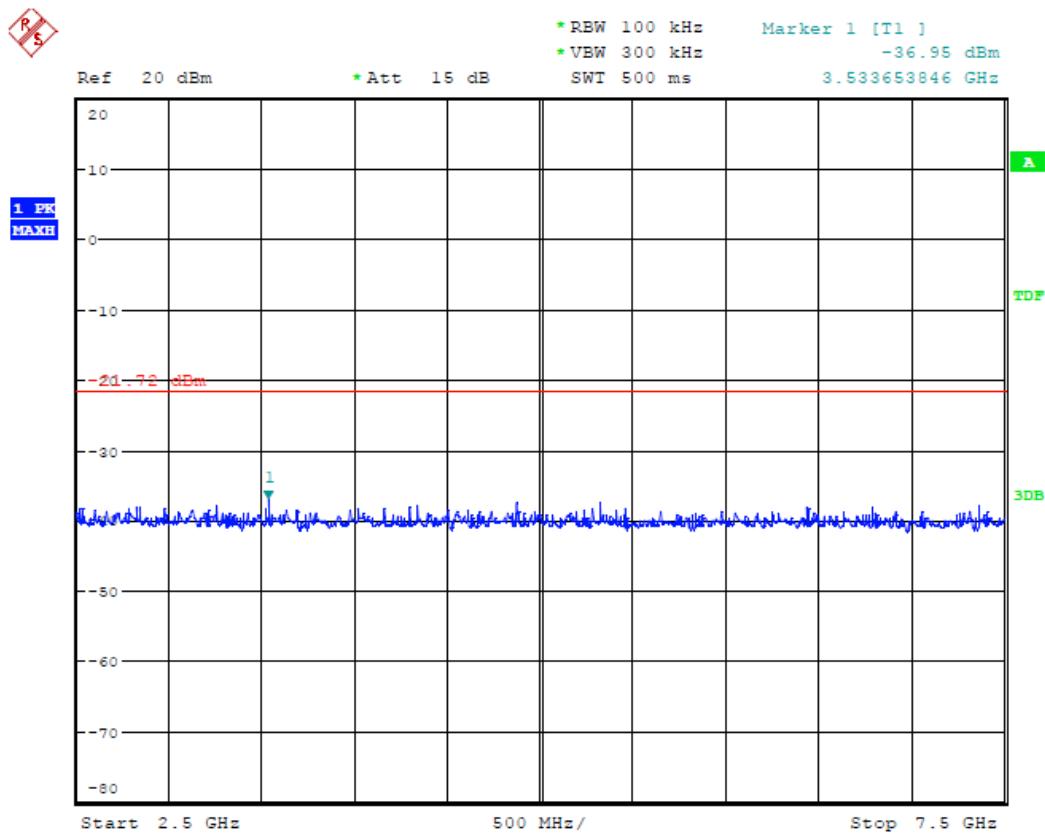


(Plot 4.6.4 C5: Channel 11: 2462MHz @ 802.11n HT40)

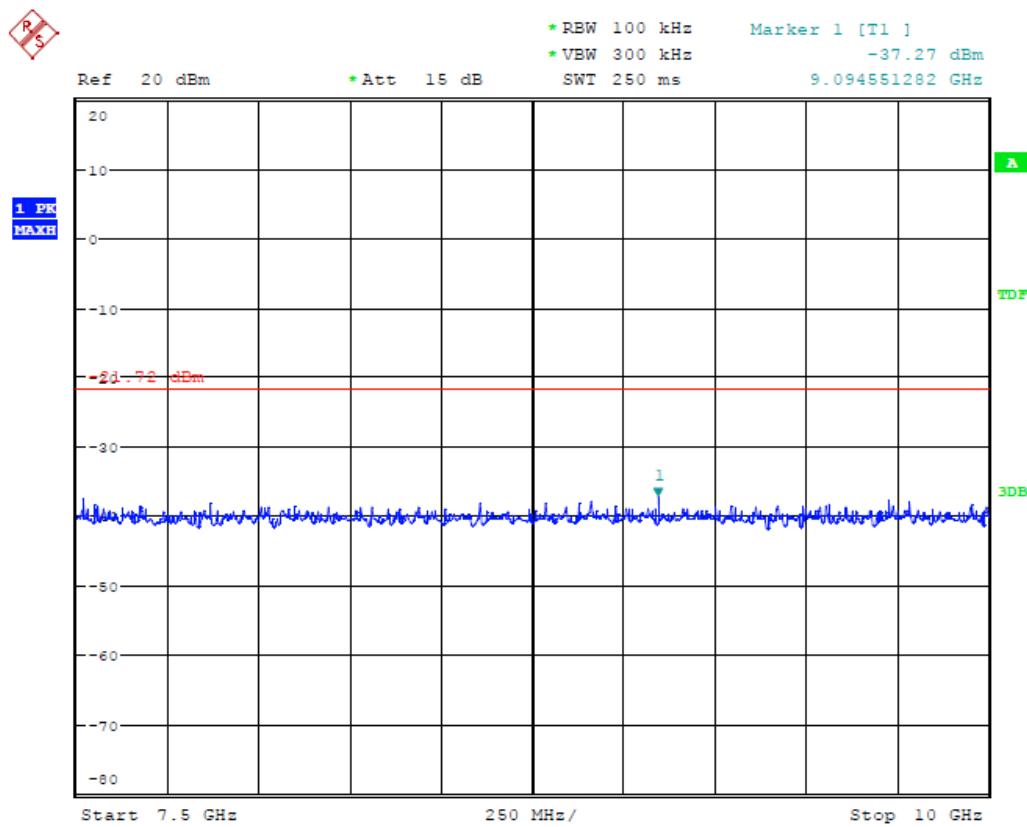


(Plot 4.6.4 C6: Channel 11: 2462MHz @ 802.11n HT40)

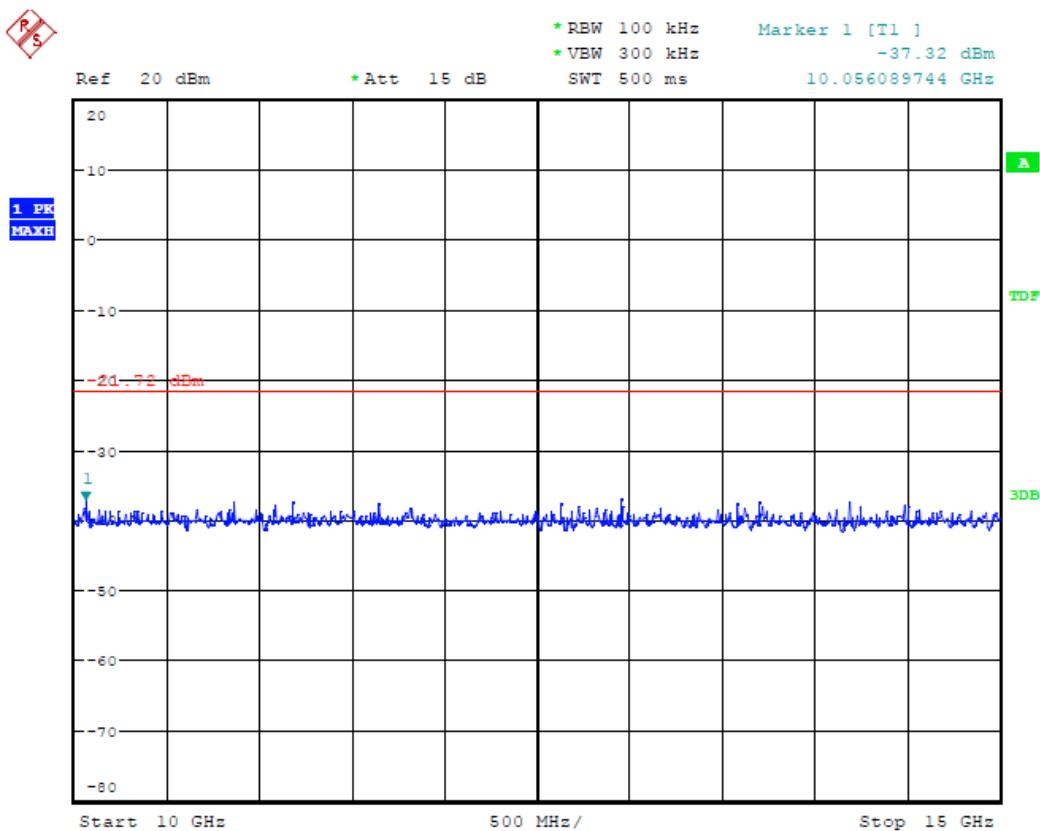


(Plot 4.6.4 C7: Channel 11: 2462MHz @ 802.11n HT40)

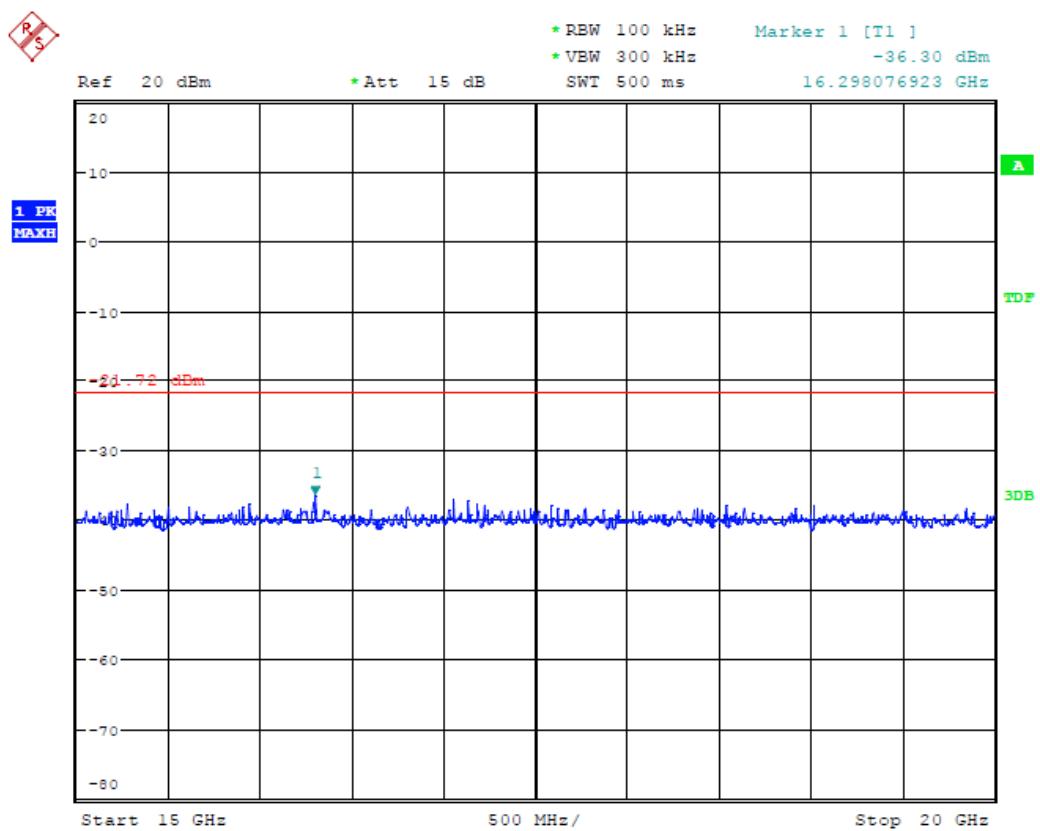


(Plot 4.6.4 C8: Channel 11: 2462MHz @ 802.11n HT40)

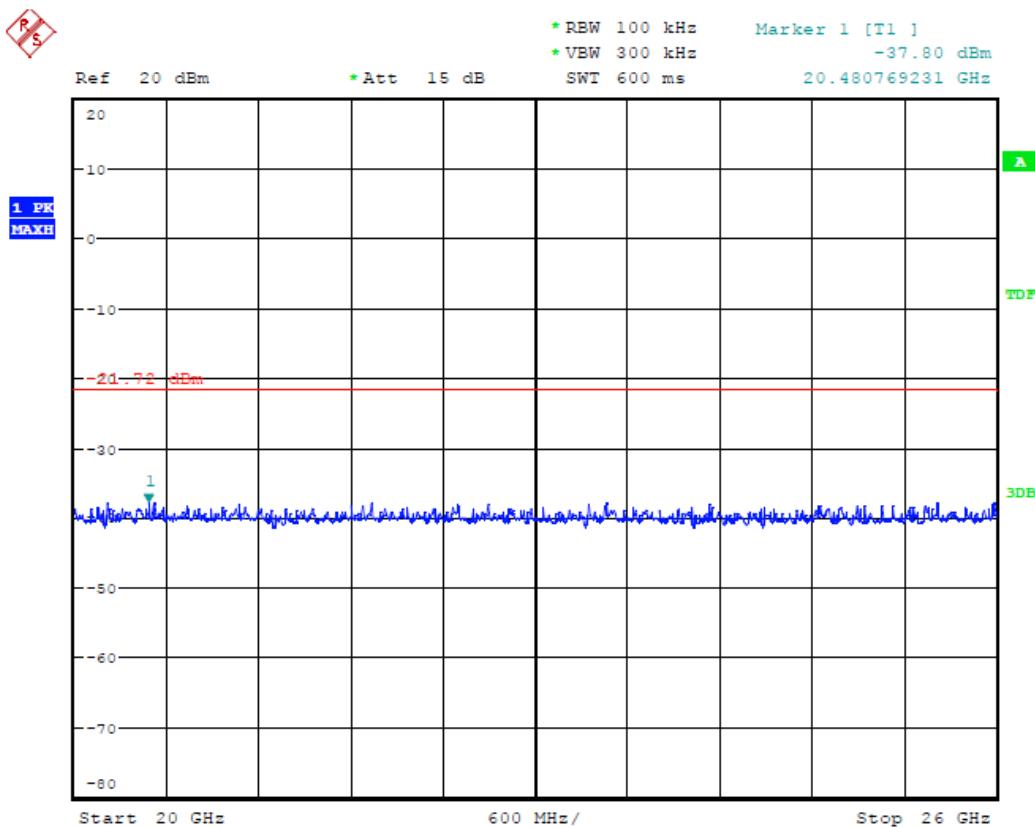

(Plot 4.6.4 C9: Channel 11: 2462MHz @ 802.11n HT40)

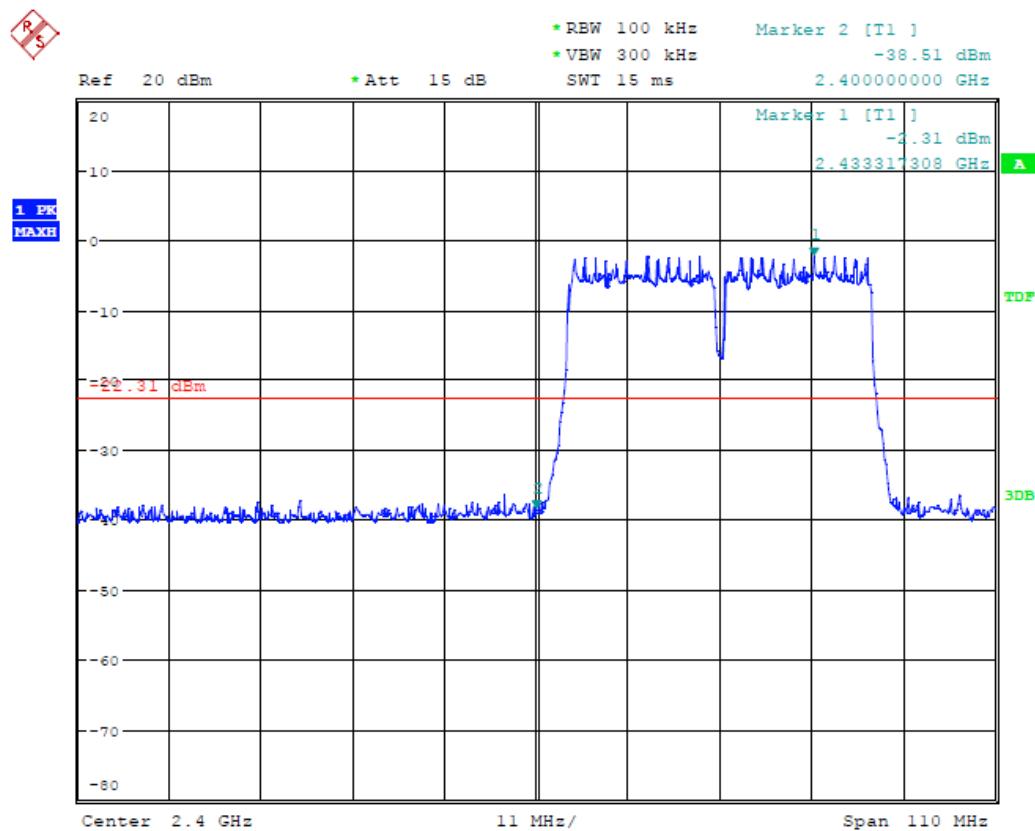


(Plot 4.6.4 D: Channel 1: 2412MHz @802.11n HT40)

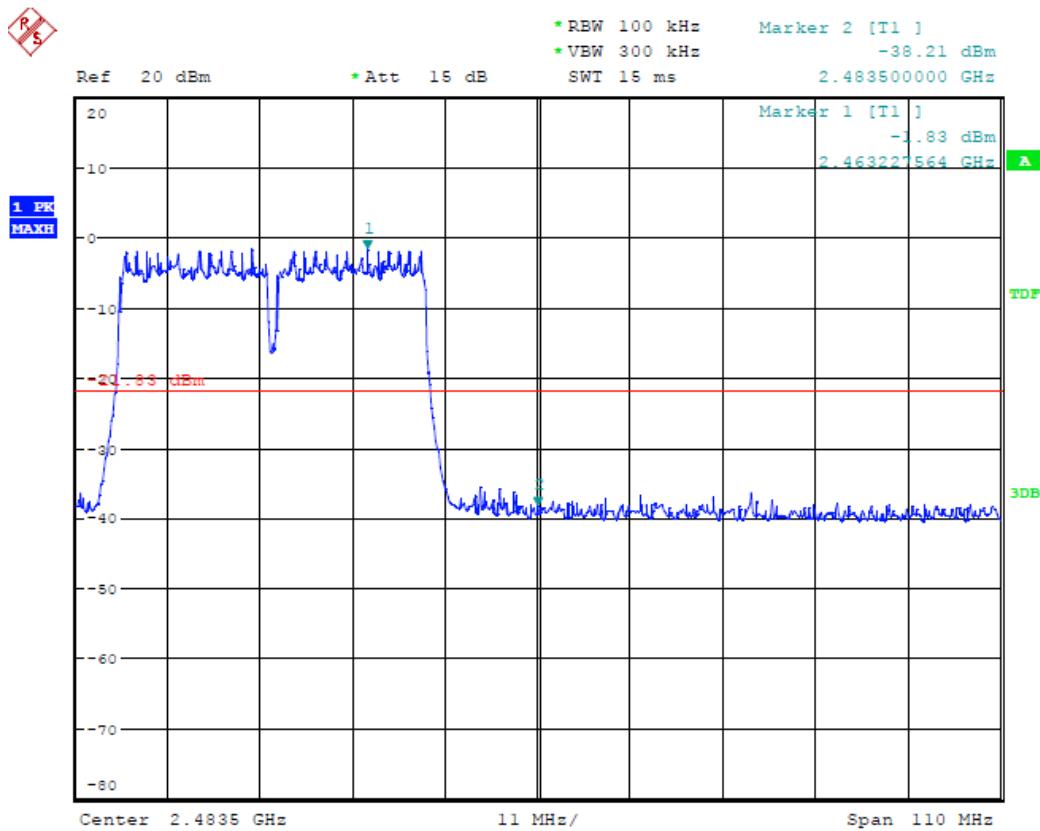

(Plot 4.6.4 E: Channel 11: 2462MHz @ 802.11n HT40)

4.7. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 V03 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS


4.7.1 801.11b Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	10.705	Plot 4.7.1 A	≥ 500	PASS
6	2437	9.872	Plot 4.7.1 B	≥ 500	PASS
11	2462	9.615	Plot 4.7.1 C	≥ 500	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.


B. Test Plots

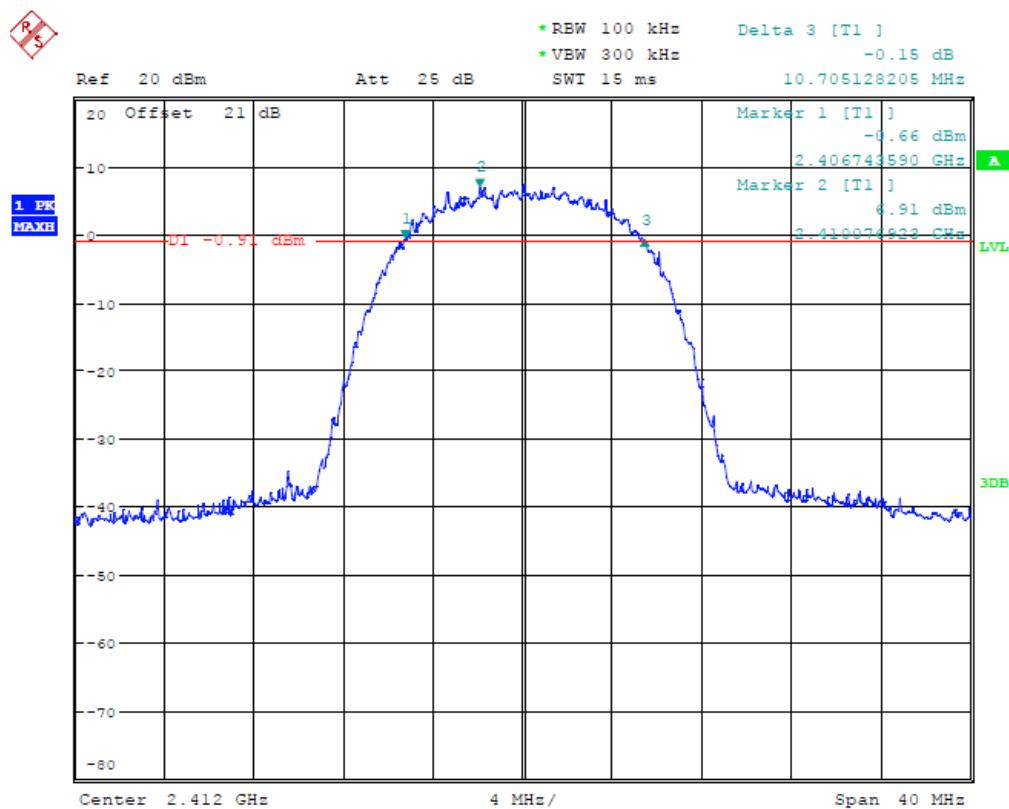

(Plot 4.7.1 A: Channel 1: 2412MHz @ 802.11b)

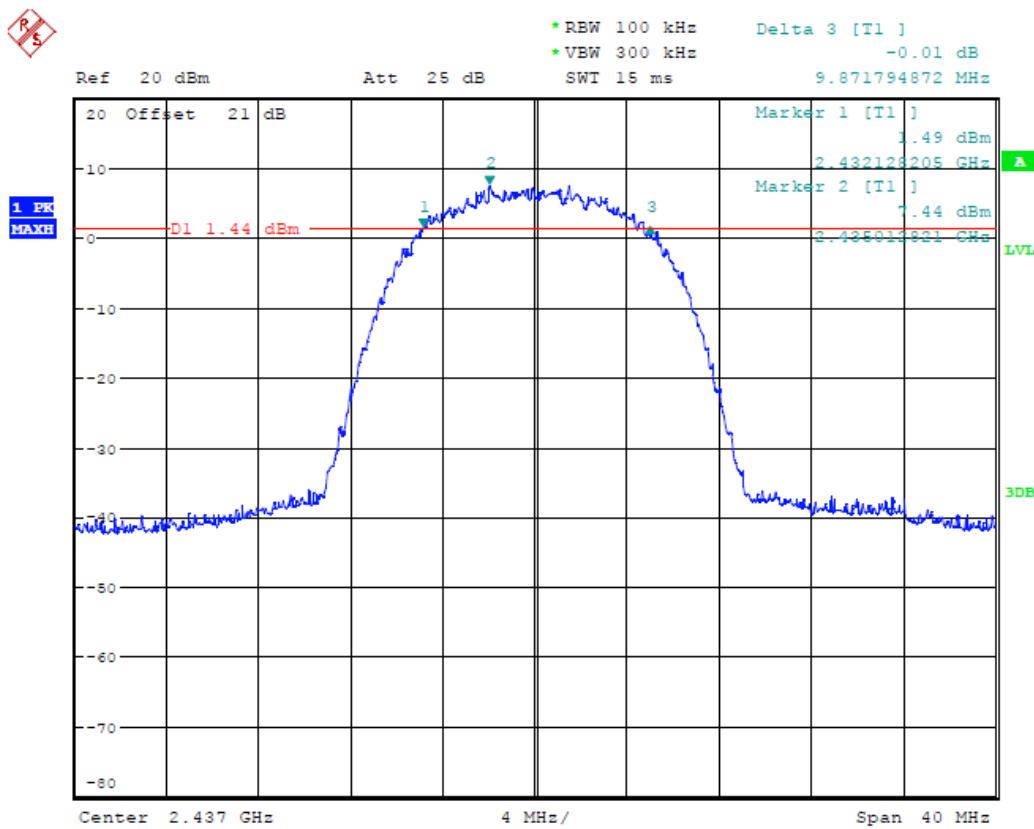

(Plot 4.7.1 B: Channel 6: 2437MHz @ 802.11b)

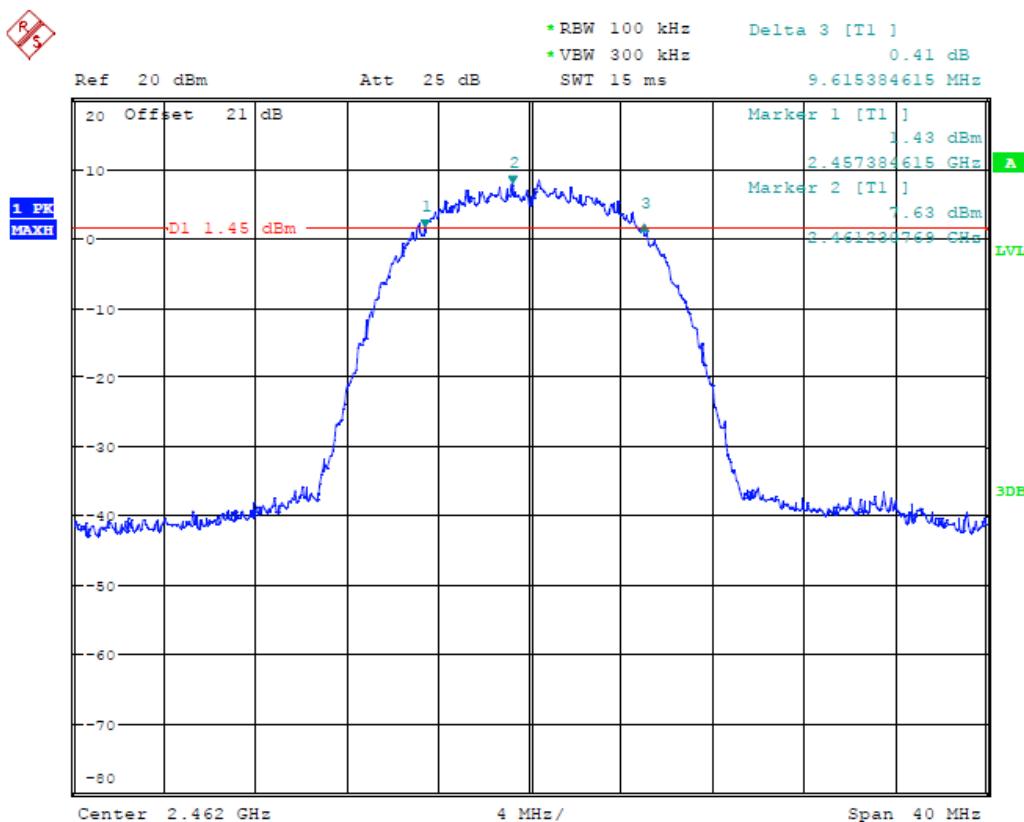

(Plot 4.7.1 C: Channel 11: 2462MHz @ 802.11b)


4.7.2 801.11g Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	16.603	Plot 4.7.2 A	≥500	PASS
6	2437	16.603	Plot 4.7.2 B	≥500	PASS
11	2462	16.538	Plot 4.7.2 C	≥500	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
 2. The test results including the cable loss.


B. Test Plots

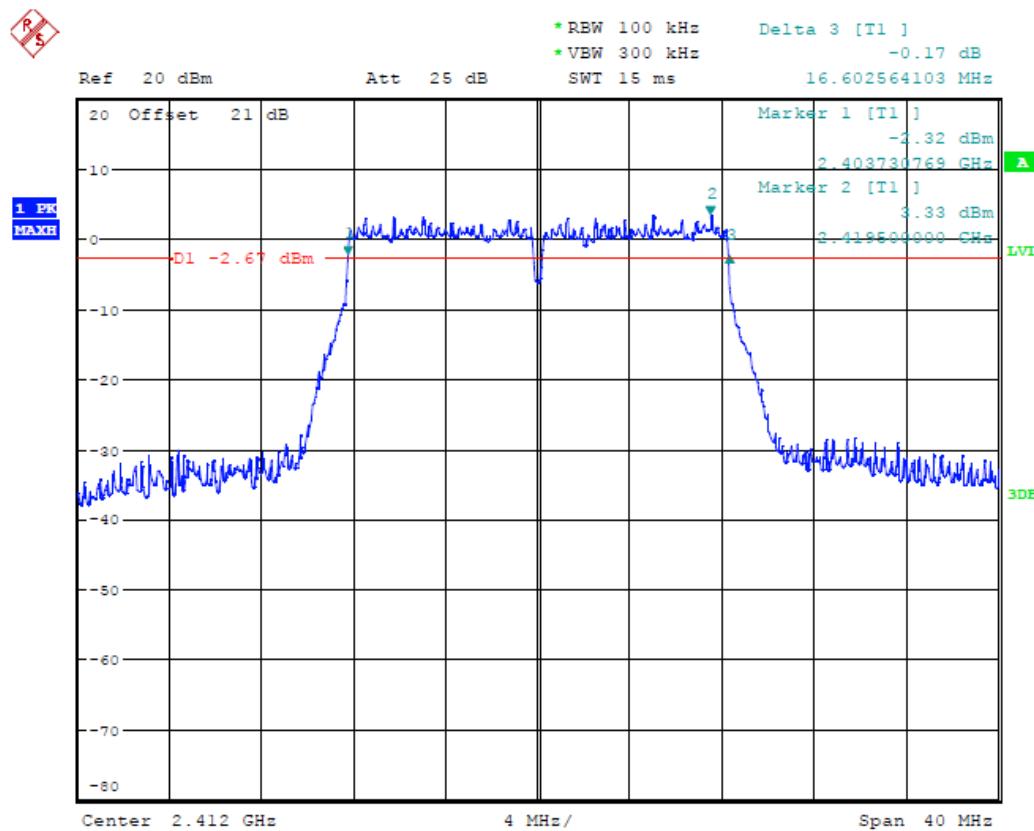

(Plot 4.7.2 A: Channel 1: 2412MHz @ 802.11g)

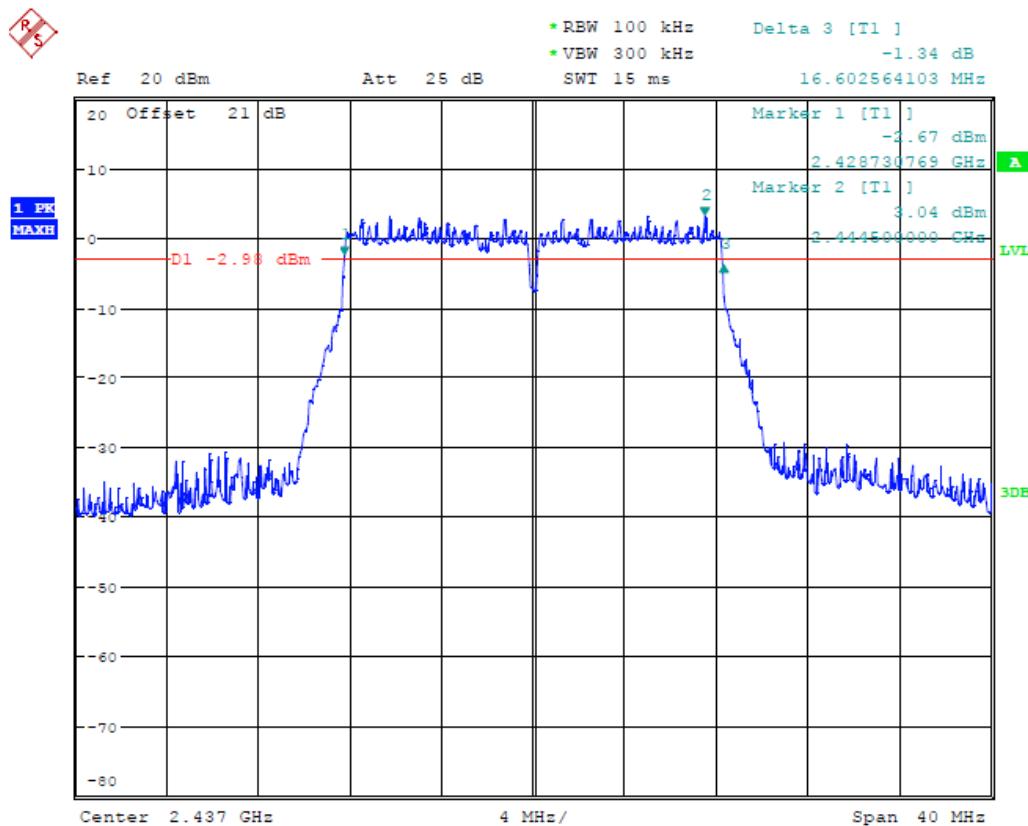

(Plot 4.7.2 B: Channel 6: 2437MHz @ 802.11g)

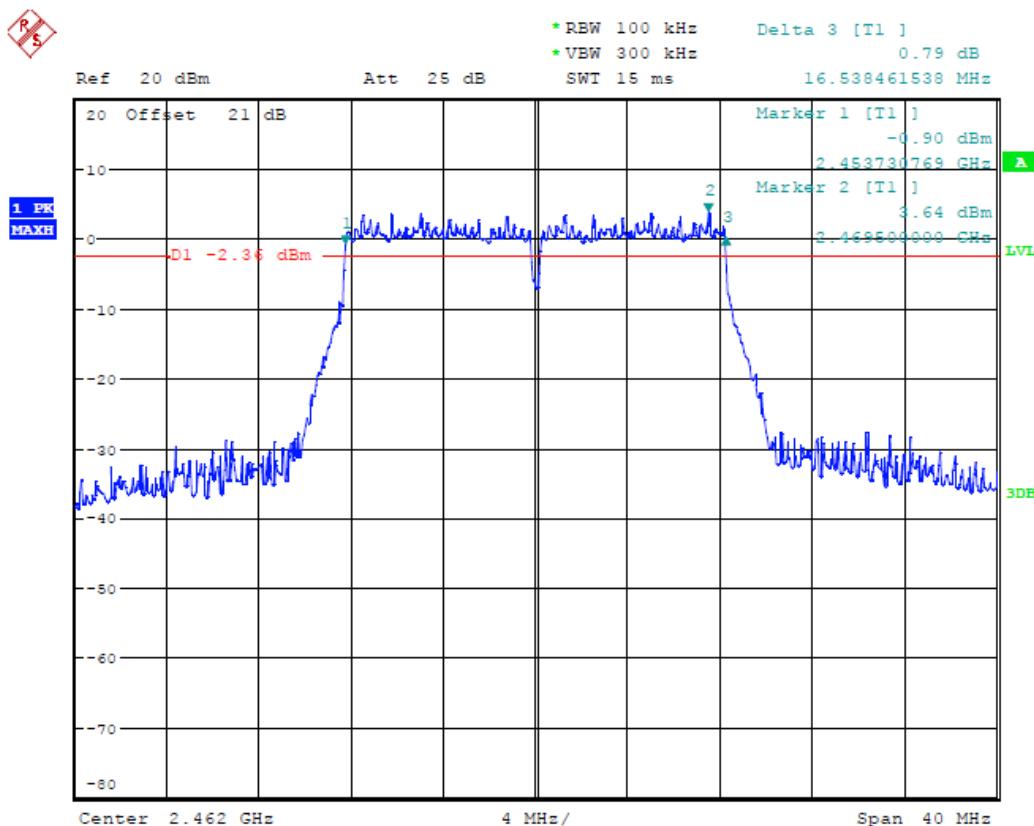

(Plot 4.7.2 C: Channel 11: 2462MHz @ 802.11g)


4.7.3 801.11n HT20MHz Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	17.821	Plot 4.7.3 A	≥500	PASS
6	2437	17.821	Plot 4.7.3 B	≥500	PASS
11	2462	17.821	Plot 4.7.3 C	≥500	PASS

Note: 1. For 802.11n HT20MHz mode at final test to get the worst-case emission at 6.5Mbps.
 2. The test results including the cable loss.


B. Test Plots

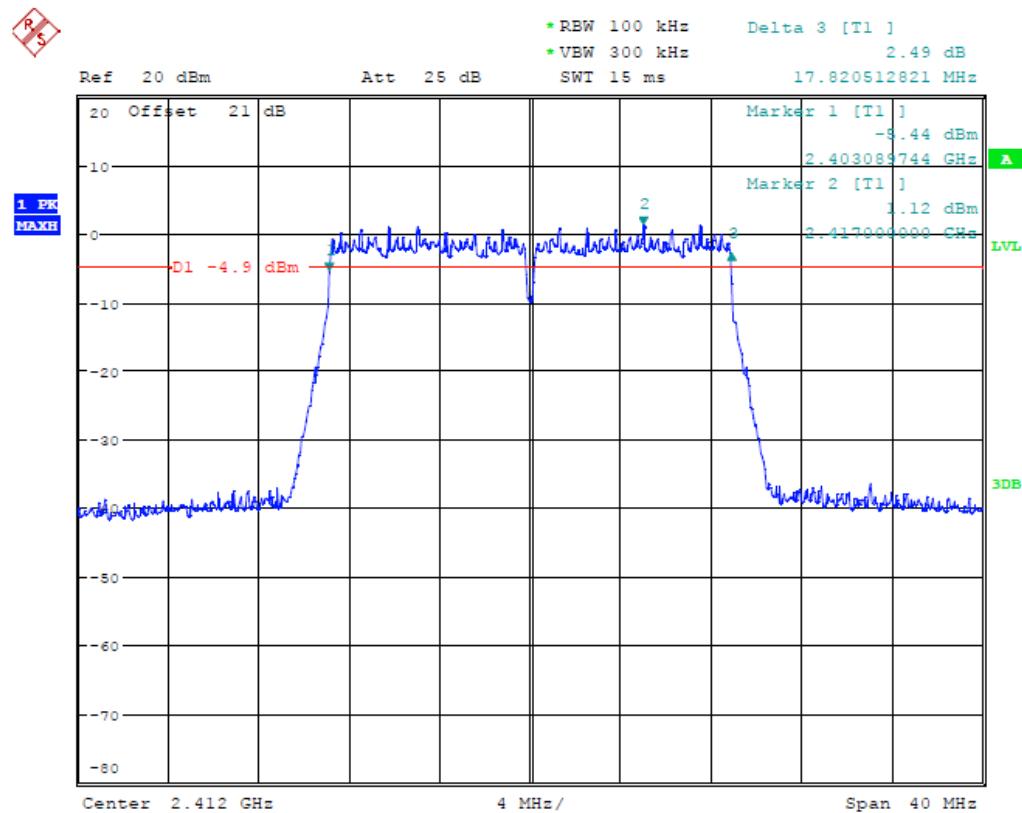

(Plot 4.7.3 A: Channel 1: 2412MHz @ 802.11n HT20)

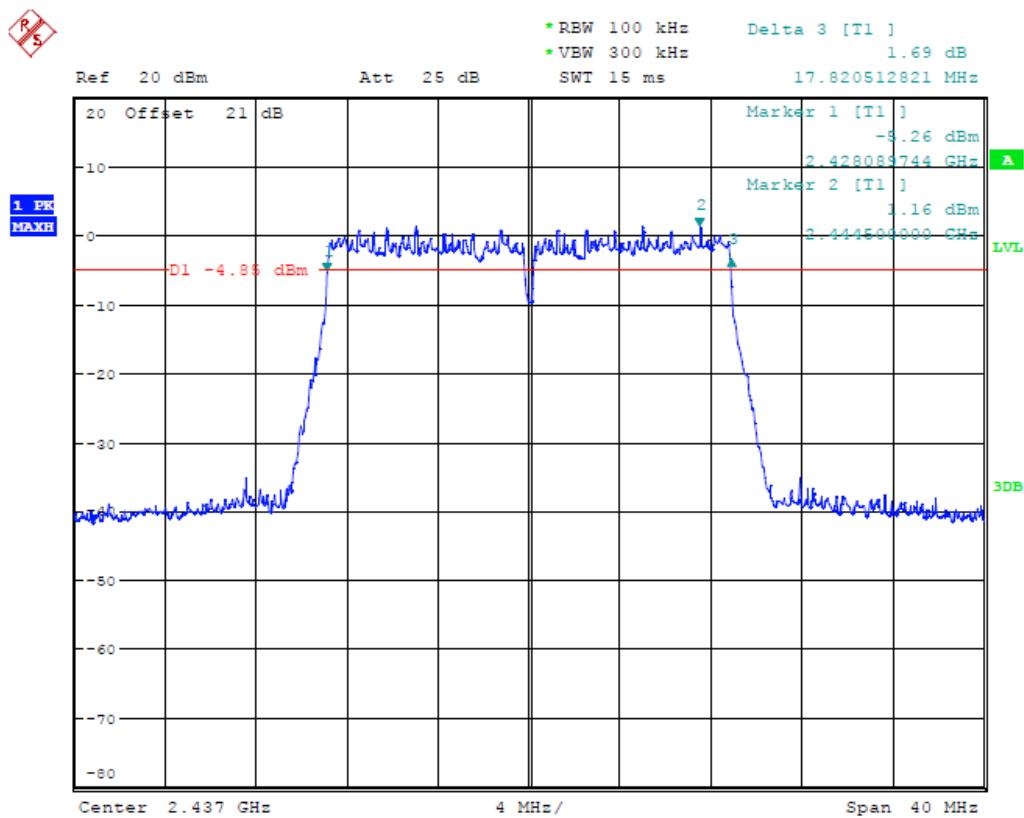

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n HT20)

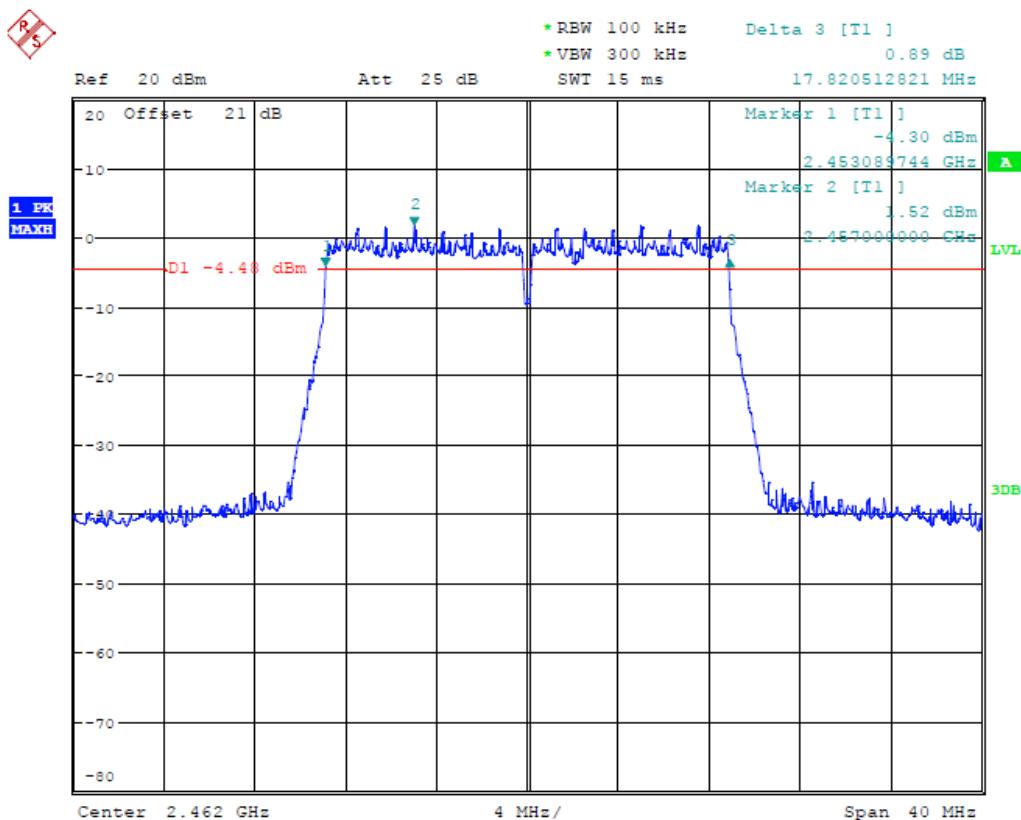

(Plot 4.7.3 C: Channel 11: 2462MHz @ 802.11n HT20MHz)


4.7.4 801.11n HT40MHz Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
3	2422	36.667	Plot 4.7.4 A	≥500	PASS
6	2437	36.667	Plot 4.7.4 B	≥500	PASS
9	2452	36.538	Plot 4.7.4 C	≥500	PASS

Note: 1. For 802.11n HT40MHz mode at final test to get the worst-case emission at 13.5Mbps.
 2. The test results including the cable loss.


B. Test Plots

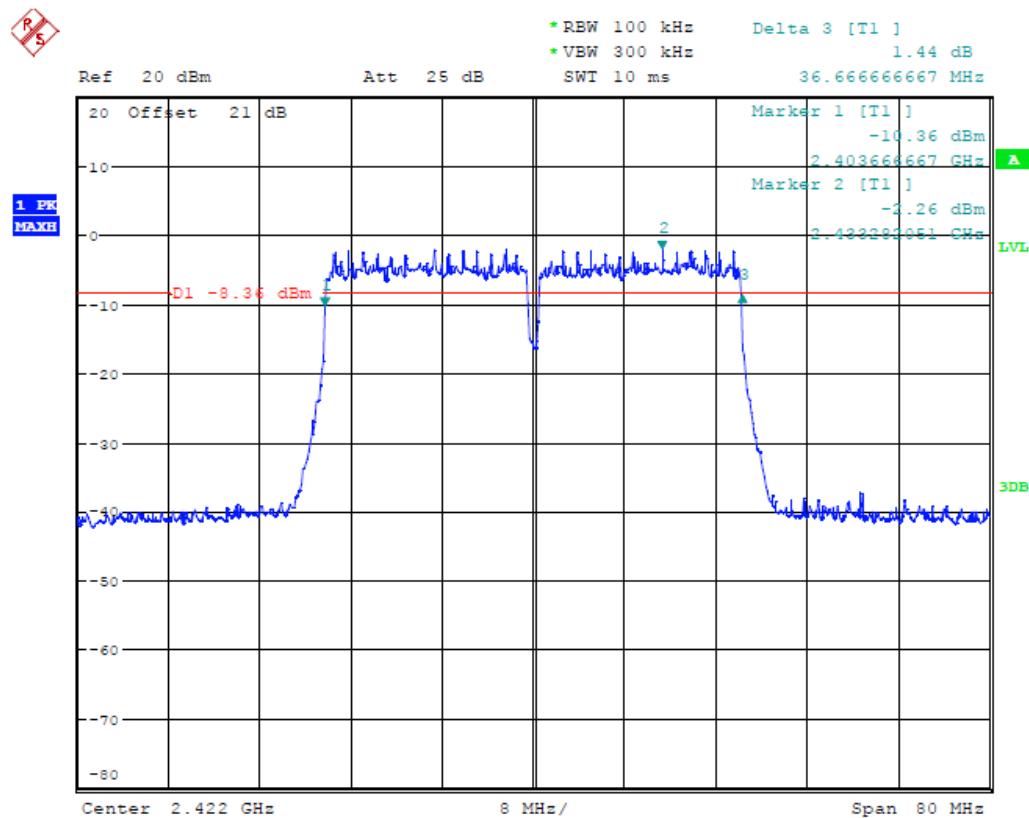

(Plot 4.7.4 A: Channel 3: 2422MHz @ 802.11n HT40MHz)

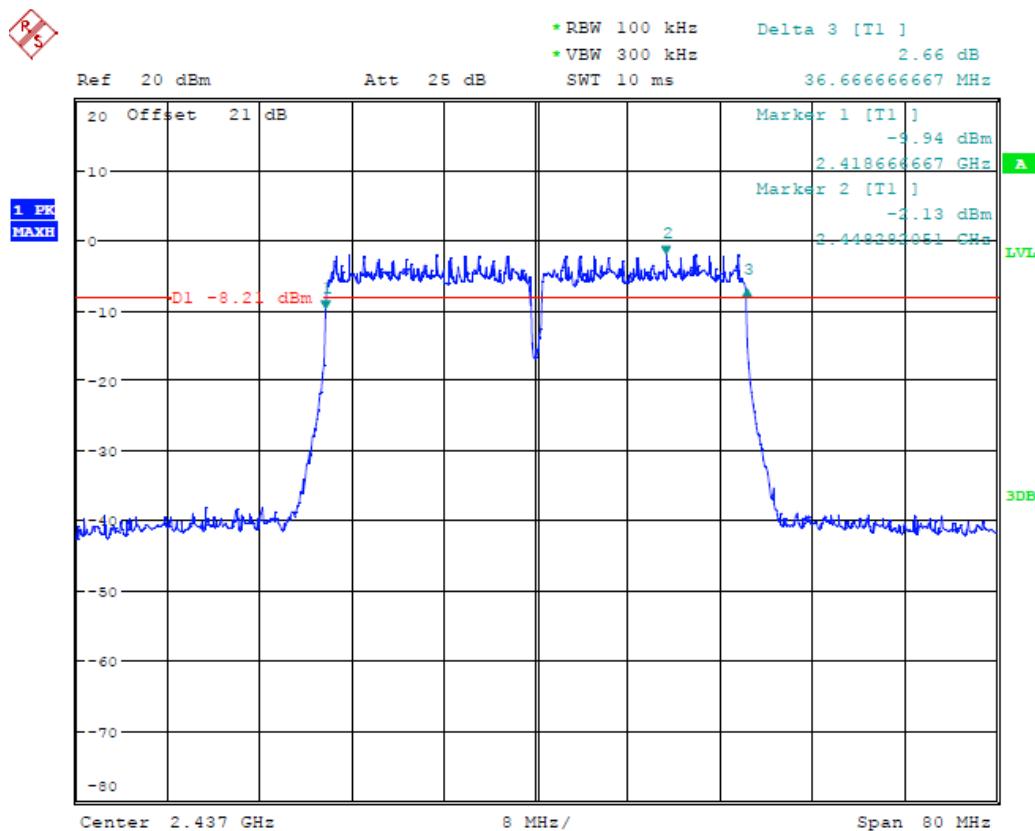

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n HT40MHz)

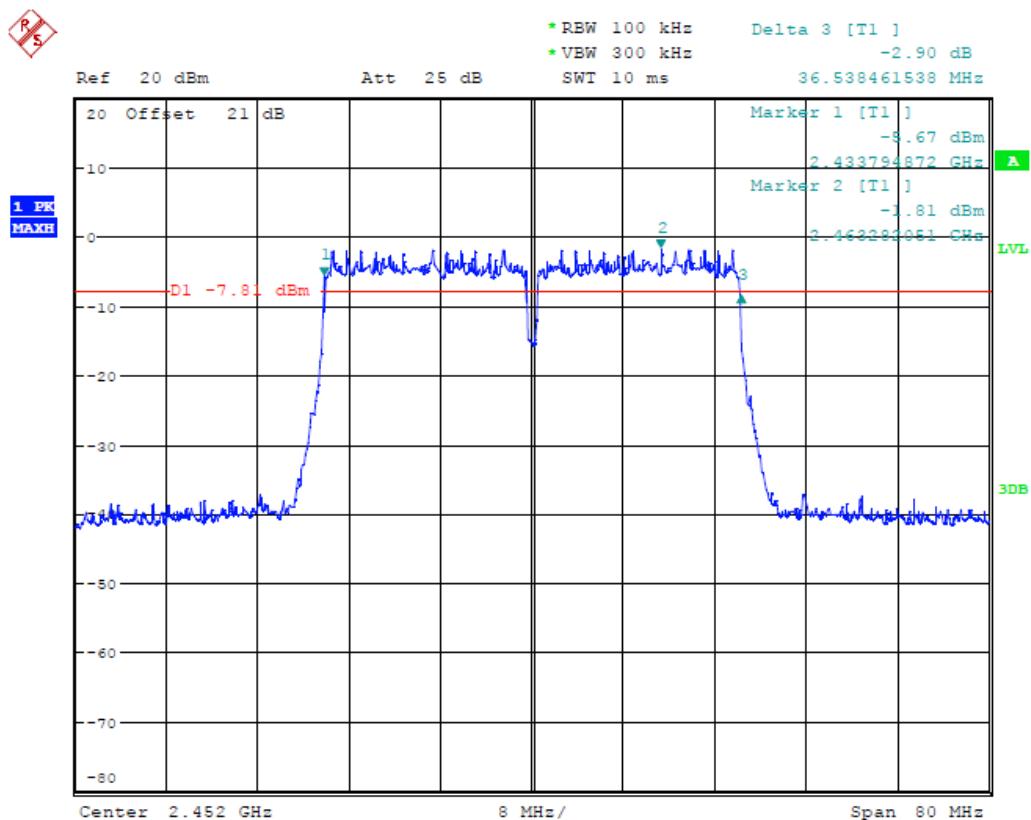

(Plot 4.7.4 C: Channel 9: 2452MHz @ 802.11n HT40MHz)

4.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The WLAN and Bluetooth sharing same antenna and the maximum antenna gain of WLAN uesed was 0.00 dBi

5. Test Setup Photos of the EUT

.....**End of Report**.....