



FCC Test Report

FCC ID:RQQHLT-E5DAZA

Product : smartphone
Trade Name : HYUNDAI
Model Number : E535
Serial Model : E555
Report No. : NTEK-2015NT05271838R1

Prepared for

Hyundai Corporation

140-2,Kye-dong,Chongro-ku,Seoul,South Korea 110-793

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name : Hyundai Corporation

Address : 140-2,Kye-dong,Chongro-ku,Seoul,South Korea 110-793

Manufacturer's Name : DAZA ELECTRONICS COMPANY

Address : Bldg G,XinMuSheng Low Carbon Industrial Park,No.6 of XinMu
Road,PingHu Town, LongGang, ShenZhen, China

Product description

Product name : smartphone

Model and/or type reference : E535

FCC Part15B:01 Oct.2014

Standards : ANSI C63.4:2014

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : 27 May 2015 ~11 Jun. 2015

Date of Issue..... : 11 Jun. 2015

Test Result..... : **Pass**

Testing Engineer : 

Denny Huang

Technical Manager : 

(Brown Lu)

Authorized Signatory : 

(Bill Yao)

Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST SETUP	8
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.4 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION	12
3.1.2 TEST PROCEDURE	13
3.1.3 TEST SETUP	13
3.1.4 EUT OPERATING CONDITIONS	13
3.1.5 TEST RESULTS	14
3.2 RADIATED EMISSION MEASUREMENT	18
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	18
3.2.2 TEST PROCEDURE	18
3.2.3 TEST SETUP	19
3.2.4 TEST RESULTS	20
3.2.5 TEST RESULTS(1000~12400MHz)	22
4 . EUT TEST PHOTO	23

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B:2014 ANSI C63.4: 2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration Number:238937; IC Registration Number:9270A-1

CNAS Registration Number:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~12.4GHz	5.0	

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	smartphone	
Model Name	E535	
Additional Model Number(s)	E555	
Model Difference	All the model are the same circuit and RF module, except the model name and colour.	
Product Description	The EUT is a smartphone.	
	Connecting I/O port:	USB, DC in
	Operation Frequency:	BT:2402~2480 MHz WIFI: 802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz GSM: 824.2-848.8MHz/1850.2-1909.8MHz WCDMA: 826.4-846.6MHz/ 1852.4-1907.6MHz
Modulation Type:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK IEEE 802.11b : DSSS (CCK, QPSK, DBPSK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK) GSM / DCS: GMSK WCDMA:QPSK	
Power Source	DC Voltage	
Adapter	Mode: PS10E050K2000UU Input: 100-240V~, 50/60Hz, 0.35A Output: 5.0V $\overline{=}$, 2000mA	
Battery	DC 3.8V,2100mAh	

2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Data Exchange Mode
Mode 2	REC Mode
Mode 3	TF Card Playing Mode+Charging
Mode 4	GPS


For Conducted Test	
Final Test Mode	Description
Mode 1	Data Exchange Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	Data Exchange Mode


Note: Final Test Mode: Through Pre-scan, find the mode 1 is the worse case.
Only the worst case mode is recorded in the report.

2.2 DESCRIPTION OF TEST SETUP

RE

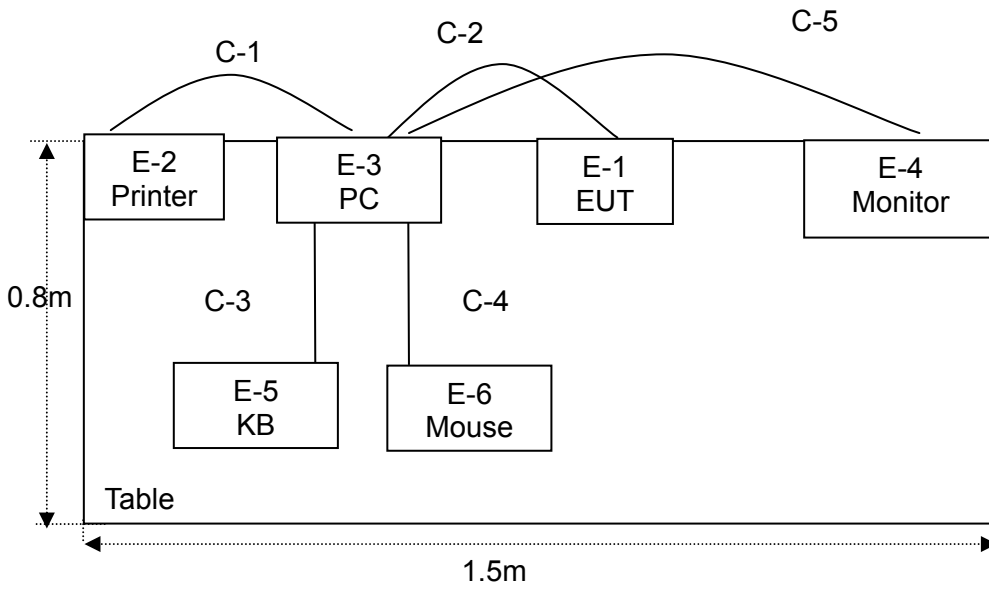

CE

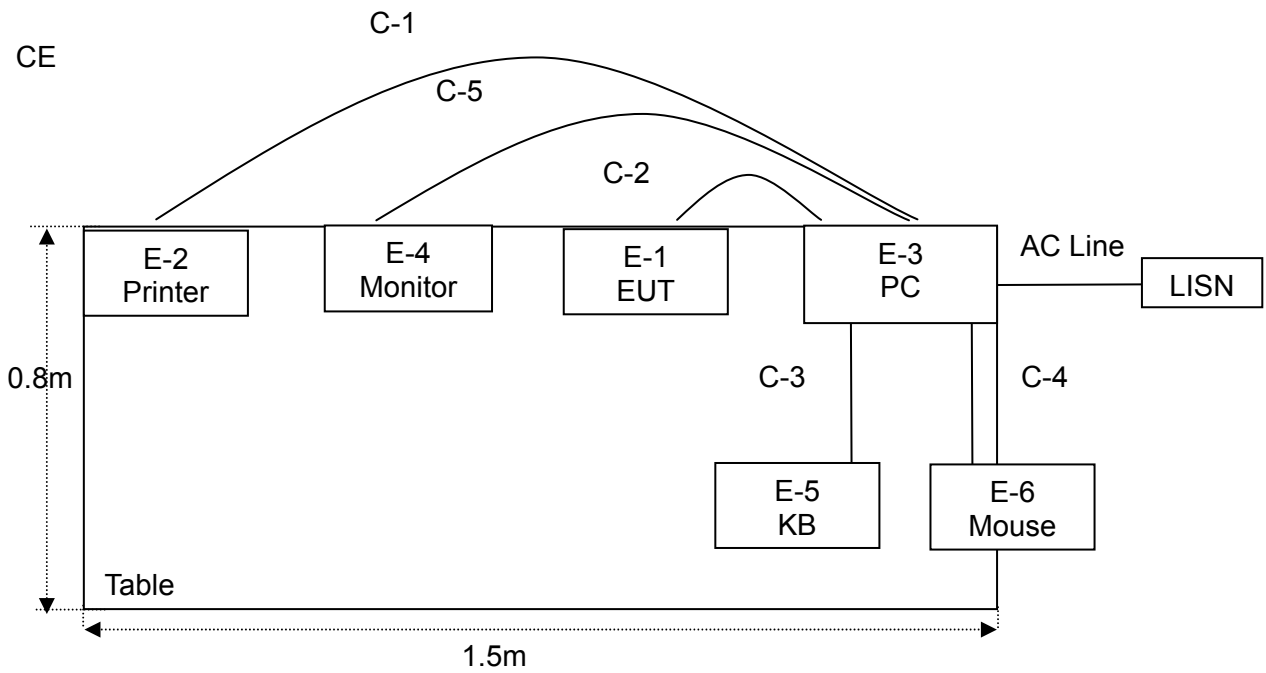

2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	smartphone	HYUNDAI	E535	N/A	EUT
E-2	Printer	Canon	L11121E	LBP2900	
E-3	Personal computer	DELL	FT4Y23X	34413561645	
E-4	Monitor	DELL	IN2020MB	cn-0y6mhx-74261-11f-67es	
E-5	Keyboard	DELL	SK-8185	OY526KUS	
E-6	Mouse	DELL	MS111-P	cn-011d3v-71581-11e-1th7	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	
C-2	NO	NO	1.0m	
C-3	NO	NO	1.0m	
C-4	NO	NO	1.0m	
C-5	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

2.4 MEASUREMENT INSTRUMENTS LIST

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2015.06.07	2016.06.06	1 year
2*	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.06.07	2016.06.06	1 year
4*	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2015.06.07	2016.06.06	1 year
5*	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.08	2016.06.07	1 year
9*	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2014.07.06	2015.07.05	1 year
12	Test Cable	N/A	R-01	N/A	2014.07.06	2015.07.05	1 year
13	Test Cable	N/A	R-02	N/A	2014.07.06	2015.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2015.06.06	2016.06.05	1 year
1*	Test Receiver	R&S	ESCI	101160	2014.06.06	2015.06.05	1 year
2	LISN	R&S	ENV216	101313	2014.08.24	2015.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2014.08.24	2015.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.07	2016.06.06	1 year
4*	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2014.06.07	2015.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2015.06.07	2016.06.06	1 year
5*	Passive Voltage Probe	R&S	ESH2-Z3	100196	2014.06.07	2015.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2015.06.08	2016.06.07	1 year
6*	Absorbing clamp	R&S	MOS-21	100423	2014.06.08	2015.06.07	1 year

7	Test Cable	N/A	C01	N/A	2015.06.08	2016.06.07	1 year
7*	Test Cable	N/A	C01	N/A	2014.06.08	2015.06.07	1 year
8	Test Cable	N/A	C02	N/A	2015.06.08	2016.06.07	1 year
8*	Test Cable	N/A	C02	N/A	2014.06.08	2015.06.07	1 year
9	Test Cable	N/A	C03	N/A	2015.06.08	2016.06.07	1 year
9*	Test Cable	N/A	C03	N/A	2014.06.08	2015.06.07	1 year

1	Attenuation	MCE	24-10-34	BN9258	2015.06.08	2016.06.07	1 year
1	Attenuation	MCE	24-10-34	BN9258	2014.06.08	2015.06.07	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

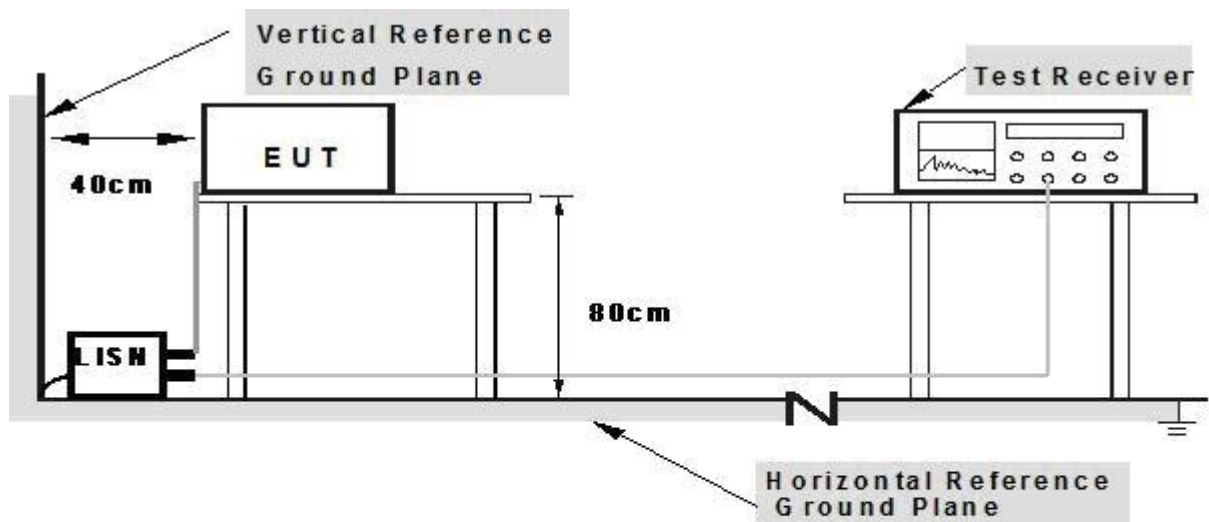

- Note: 1. Support units were connected to second LISN.**
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


3.1.5 TEST RESULTS

EUT :	smartphone	Model Name. :	E535
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Phase :	L
Test Voltage :	DC 5V From PC AC 120V/60Hz		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1819	29.21	9.61	38.82	64.39	-25.57	QP
0.1819	26.09	9.61	35.70	54.39	-18.69	AVG
0.2660	26.03	9.70	35.73	61.24	-25.51	QP
0.2660	25.53	9.70	35.23	51.24	-16.01	AVG
0.8580	26.11	9.75	35.86	56.00	-20.14	QP
0.8580	16.37	9.75	26.12	46.00	-19.88	AVG
1.9220	23.10	9.66	32.76	56.00	-23.24	QP
1.9220	16.84	9.66	26.50	46.00	-19.50	AVG
2.7980	23.37	9.67	33.04	56.00	-22.96	QP
2.7980	16.15	9.67	25.82	46.00	-20.18	AVG
3.9140	23.72	9.70	33.42	56.00	-22.58	QP
3.9140	19.09	9.70	28.79	46.00	-17.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

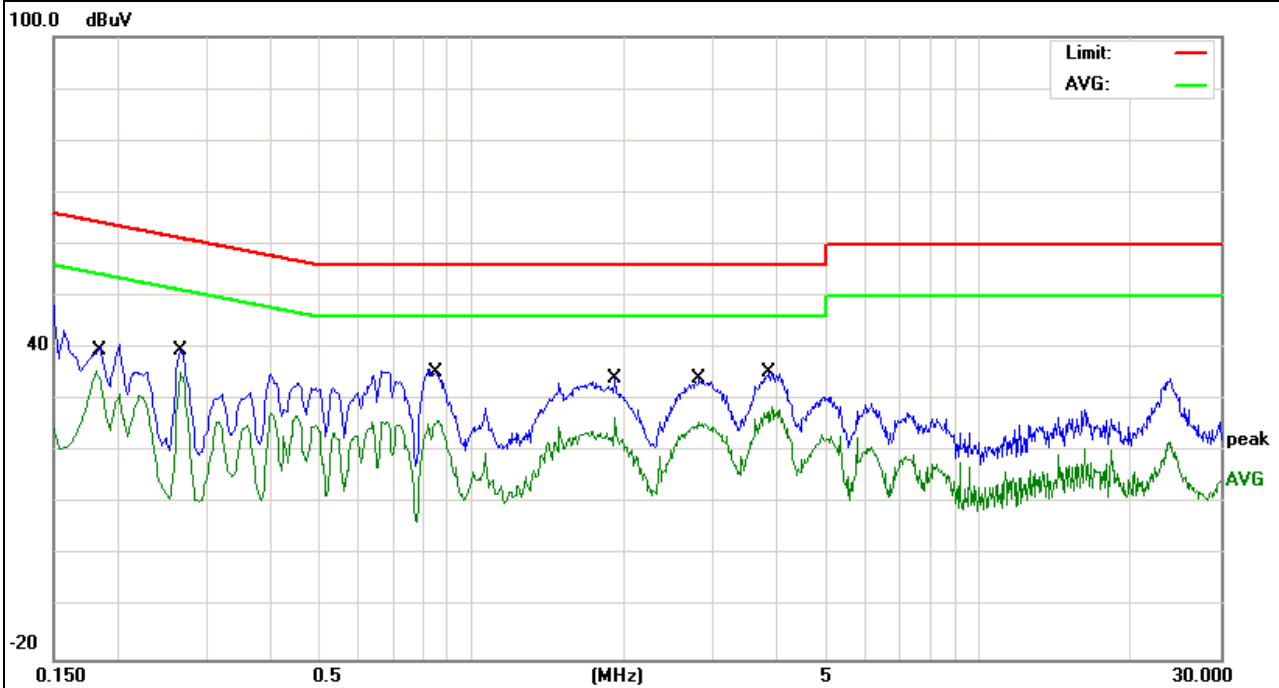


EUT :	smartphone	Model Name. :	E535
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Phase :	N
Test Voltage :	DC 5V From PC AC 120V/60Hz		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1819	29.27	9.61	38.88	64.39	-25.51	QP
0.1819	26.00	9.61	35.61	54.39	-18.78	AVG
0.2660	26.63	9.62	36.25	61.24	-24.99	QP
0.2660	25.17	9.62	34.79	51.24	-16.45	AVG
0.8540	26.32	9.62	35.94	56.00	-20.06	QP
0.8540	16.79	9.62	26.41	46.00	-19.59	AVG
1.9220	23.19	9.55	32.74	56.00	-23.26	QP
1.9220	16.65	9.55	26.20	46.00	-19.80	AVG
3.9140	23.93	9.51	33.44	56.00	-22.56	QP
3.9140	18.81	9.51	28.32	46.00	-17.68	AVG
23.7380	20.60	9.92	30.52	60.00	-29.48	QP
23.7380	11.19	9.92	21.11	50.00	-28.89	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

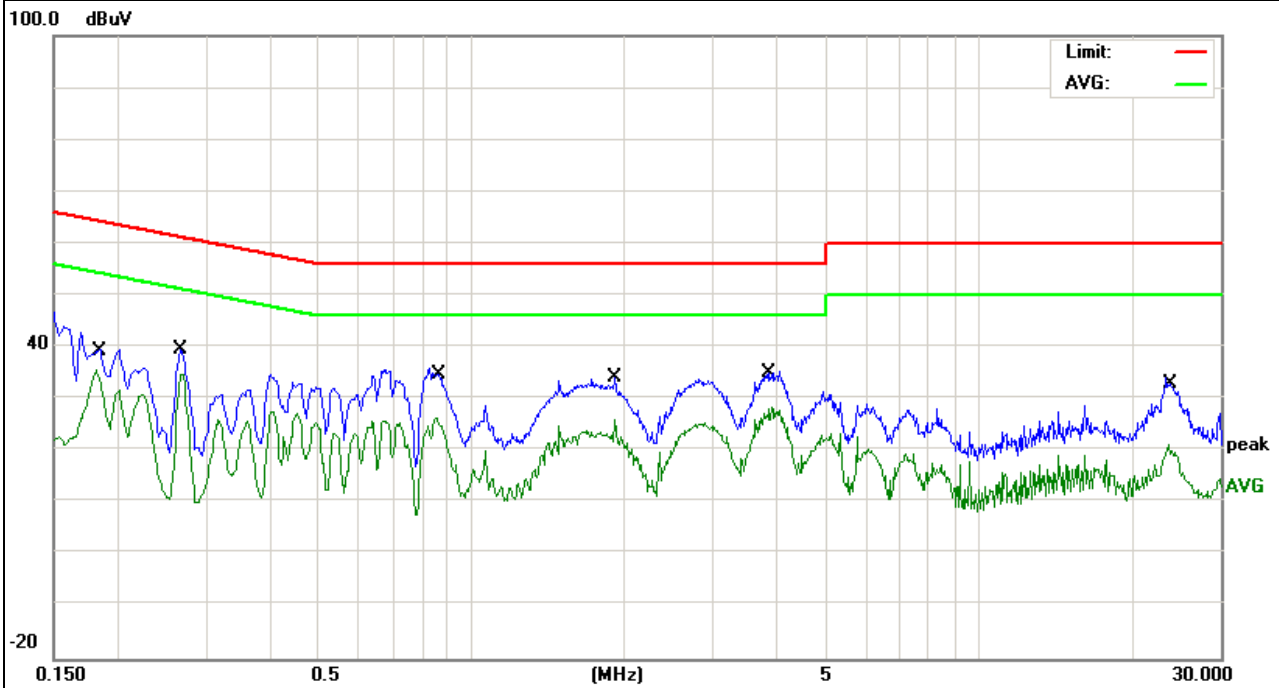


EUT :	smartphone	Model Name. :	E535
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-26
Test Mode :	Mode 1	Phase :	L
Test Voltage :	DC 5V From PC AC 240V/60Hz		

(MHz)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	Detector
0.1539	32.19	9.82	42.01	65.78	-23.77	QP
0.1539	6.69	9.82	16.51	55.78	-39.27	AVG
0.378	20.38	10.02	30.4	58.32	-27.92	AVG
0.378	17.94	10.02	27.96	48.32	-20.36	QP
1.61	18.56	10.21	28.77	56	-27.23	QP
1.61	11.82	10.21	22.03	46	-23.97	AVG
3.338	16.58	10.31	26.89	56	-29.11	QP
3.338	9.02	10.31	19.33	46	-26.67	AVG
5.5499	14.7	10.4	25.1	60	-34.9	AVG
5.5499	6.07	10.4	16.47	50	-33.53	QP
15.8739	15.56	10.54	26.1	60	-33.9	QP
15.8739	5.62	10.54	16.16	50	-33.84	AVG

Remark:

Factor = Insertion Loss + Cable Loss.

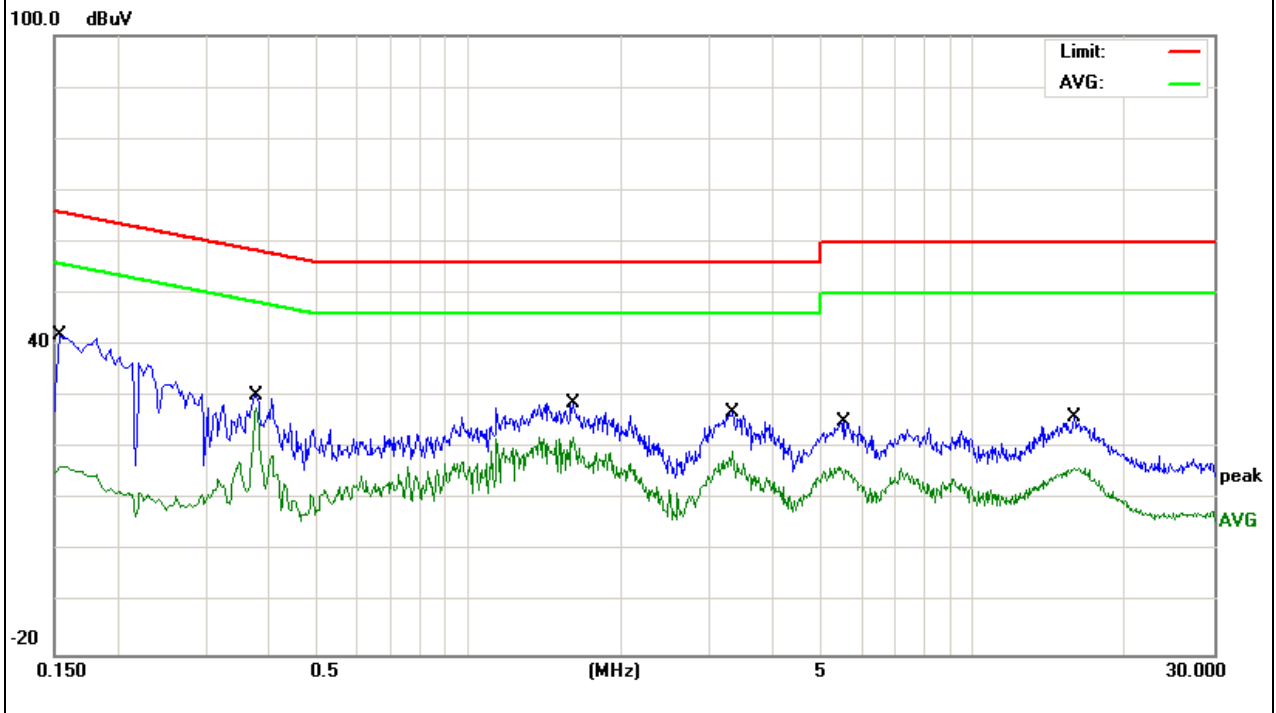


EUT :	smartphone	Model Name. :	E535
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-26
Test Mode :	Mode 1	Phase :	N
Test Voltage :	DC 5V From PC AC 240V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.158	34.52	9.81	44.33	65.56	-21.23	QP
0.158	7.97	9.81	17.78	55.56	-37.78	AVG
0.378	20.75	10.02	30.77	58.32	-27.55	QP
0.378	16.82	10.02	26.84	48.32	-21.48	AVG
2.066	20.97	10.25	31.22	56	-24.78	AVG
2.066	9.31	10.25	19.56	46	-26.44	QP
3.358	17.56	10.31	27.87	56	-28.13	QP
3.358	8.97	10.31	19.28	46	-26.72	AVG
5.4019	15.85	10.39	26.24	60	-33.76	QP
5.4019	7.06	10.39	17.45	50	-32.55	AVG
15.7419	15.24	10.54	25.78	60	-34.22	AVG
15.7419	4.92	10.54	15.46	50	-34.54	QP

Remark:

Factor = Insertion Loss + Cable Loss.

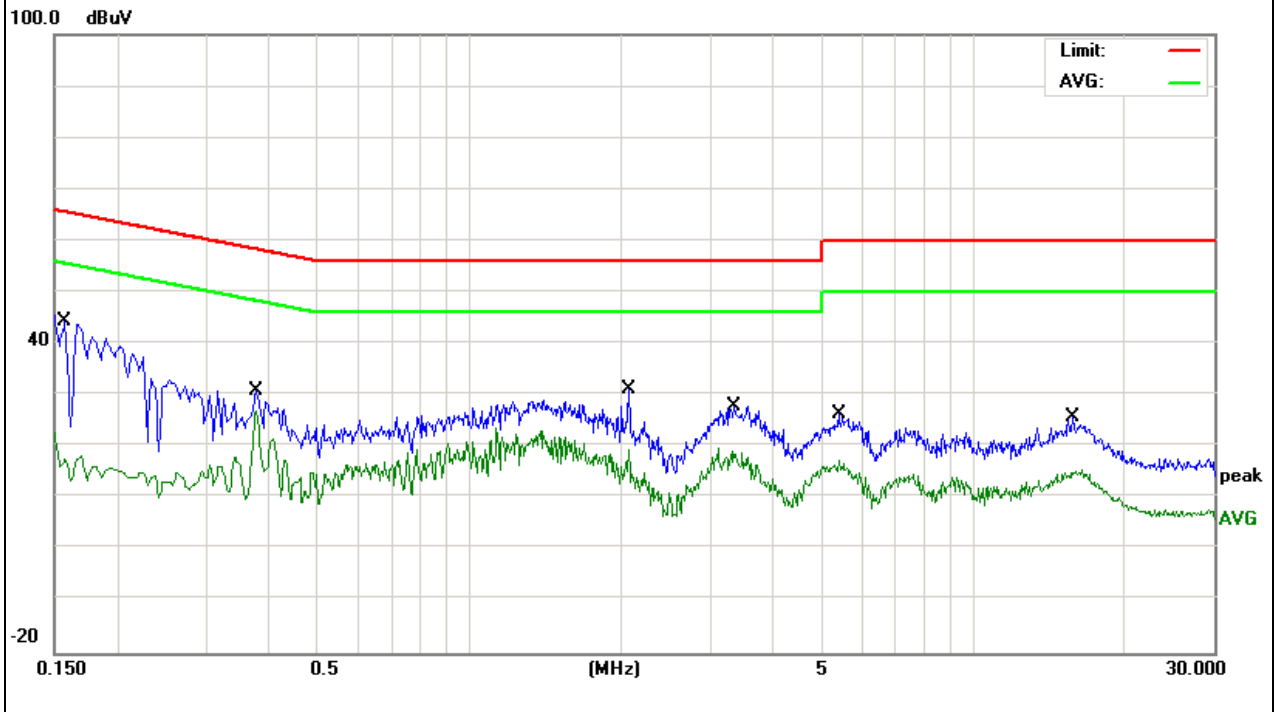

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE

Test Arrangement for Radiated Emissions up to 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

Test Arrangement for Radiated Emissions above 1 GHz.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength.Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.


Note: For the hand-held device, the EUT should be measured for all 3 axes and only the worst

case is recorded in the report
 During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Peak	1 MHz	10 Hz

3.2.3 TEST SETUP

For Radiated Emission 30~1000MHz

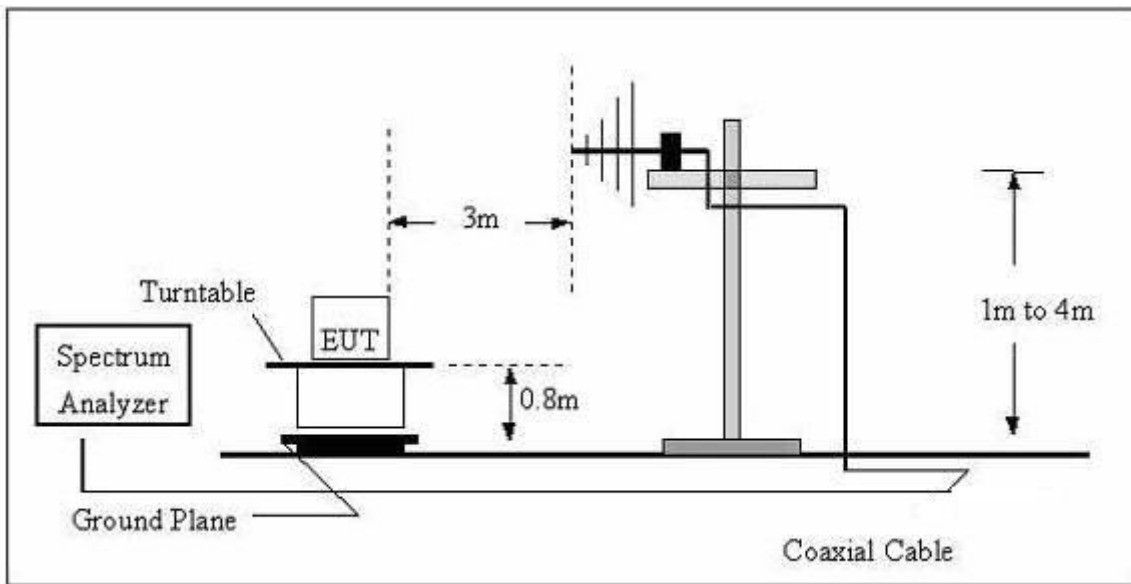

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

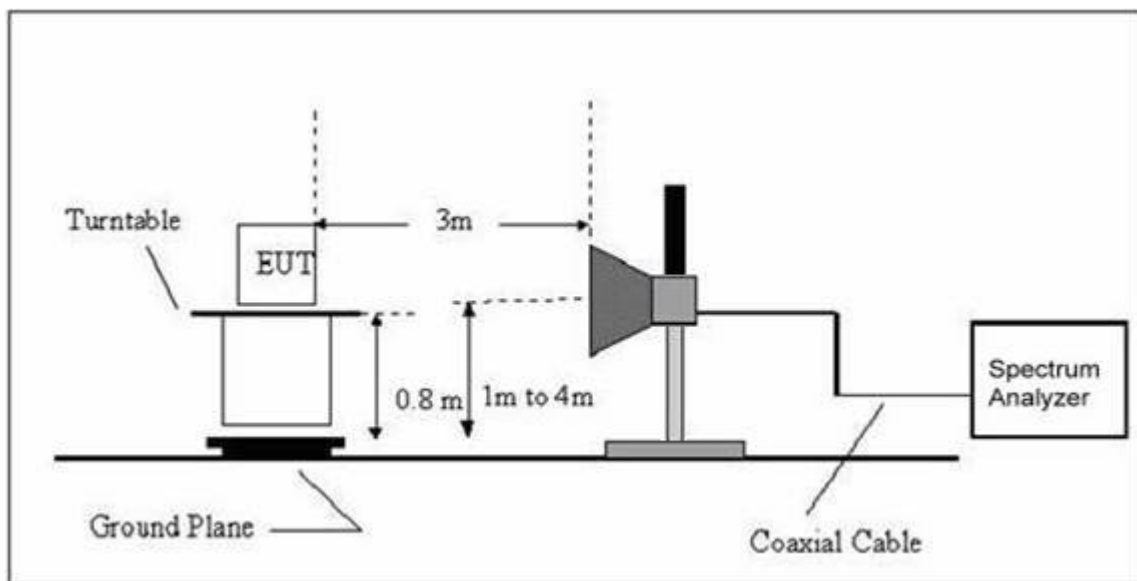


3.2.4 TEST RESULTS

TEST RESULTS (30~1000 MHz)

EUT :	smartphone	Model Name :	E535
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC 5V From PC AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
65.8031	26.61	6.52	33.13	40.00	-6.87	QP
195.822	27.93	10.75	38.68	43.50	-4.82	QP
360.4476	25.76	16.67	42.43	46.00	-3.57	QP
480.5276	21.13	19.91	41.04	46.00	-4.96	QP
668.1422	16.50	23.91	40.41	46.00	-5.59	QP
962.1621	16.25	27.38	43.63	54.00	-10.37	QP

Remark:
Factor = Antenna Factor + Cable Loss - Amplifier.

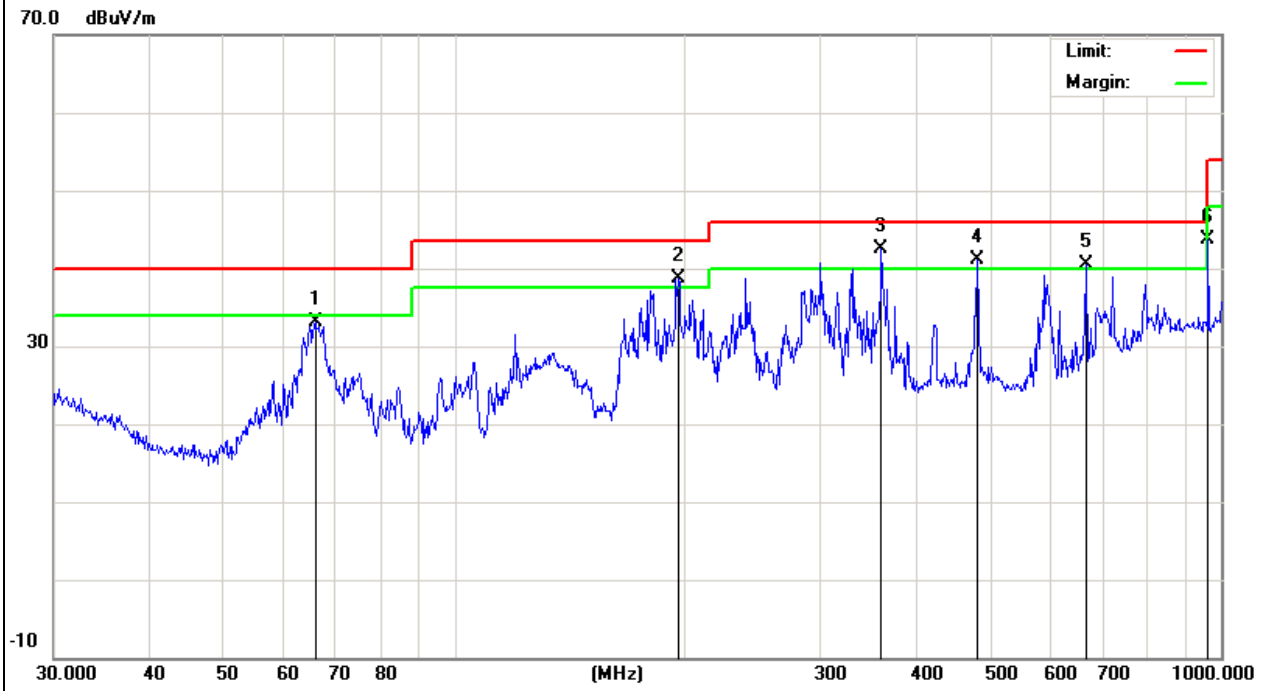


EUT :	smartphone	Model Name :	E535
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC 5V From PC AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
67.4381	26.62	6.15	32.77	40.00	-7.23	QP
195.8220	26.37	10.75	37.12	43.50	-6.38	QP
360.4476	26.45	16.67	43.12	46.00	-2.88	QP
480.5276	21.96	19.91	41.87	46.00	-4.13	QP
721.7259	15.28	25.36	40.64	46.00	-5.36	QP
962.1621	14.72	27.38	42.10	54.00	-11.90	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

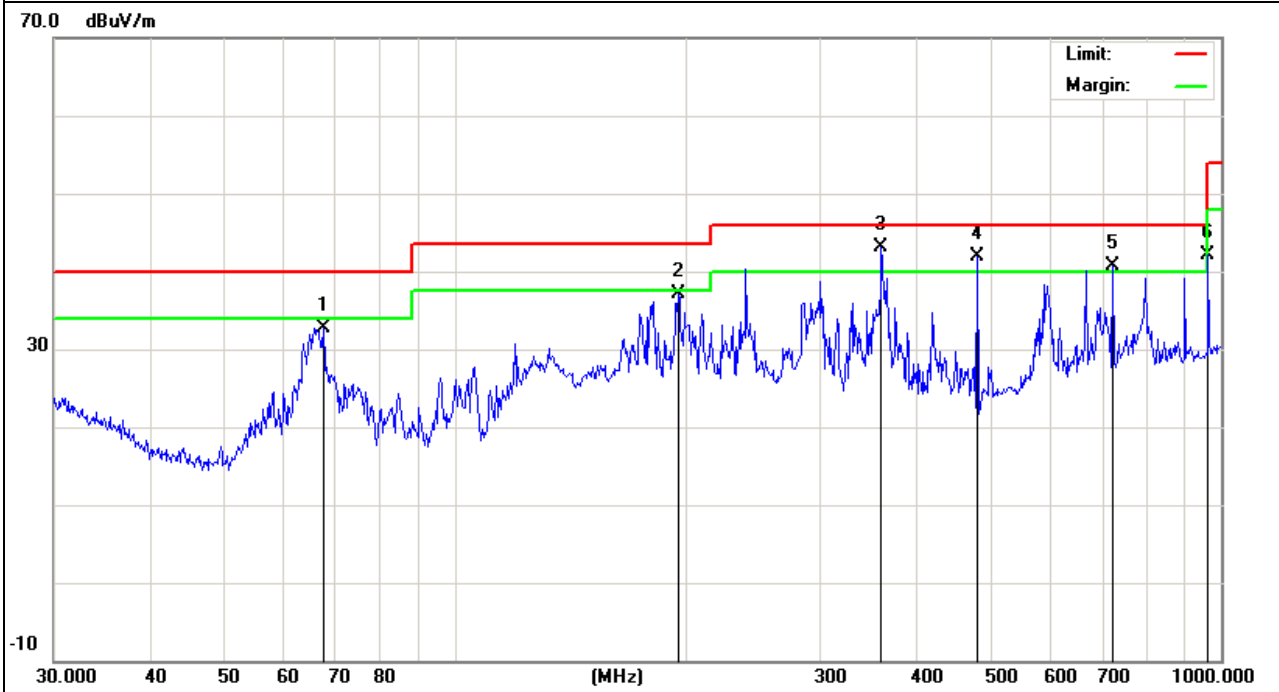

3.2.5 TEST RESULTS(1000~12400MHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1178.632	65.46	-18.01	47.45	74	-26.55	peak
V	1178.632	43.06	-18.01	25.05	54	-28.95	AVG
V	1990.723	63.73	-13.04	50.69	74	-23.31	peak
V	1990.723	42.28	-13.04	29.24	54	-24.76	AVG
V	2316.109	63.27	-12.79	50.48	74	-23.52	peak
V	2316.109	40.68	-12.79	27.89	54	-26.11	AVG
V	2715.916	63.39	-11.52	51.87	74	-22.13	peak
V	2715.916	41.03	-11.52	29.51	54	-24.49	AVG
V	2916.004	62.68	-11.7	50.98	74	-23.02	peak
V	2916.004	42.64	-11.7	30.94	54	-23.06	AVG
V	4040.818	59.47	-5.72	53.75	74	-20.25	peak
V	4040.818	38.07	-5.72	32.35	54	-21.65	AVG
H	1379.122	60.29	-17.17	43.12	74	-30.88	peak
H	1379.122	40.12	-17.17	22.95	54	-31.05	AVG
H	1578.748	60.68	-16.24	44.44	74	-29.56	peak
H	1578.748	40.87	-16.24	24.63	54	-29.37	AVG
H	1990.637	59.09	-13.04	46.05	74	-27.95	peak
H	1990.637	38.48	-13.04	25.44	54	-28.56	AVG
H	2766.016	58.89	-11.35	47.54	74	-26.46	peak
H	2766.016	37.61	-11.35	26.26	54	-27.74	AVG
H	3853.801	55.53	-6.96	48.57	74	-25.43	peak
H	3853.801	33.93	-6.99	26.94	54	-27.06	AVG
H	4828.645	53.39	-3.27	50.12	74	-23.88	peak
H	4828.645	32.33	-3.29	29.04	54	-24.96	AVG

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

4. EUT TEST PHOTO

Radiated Measurement Photos



Conducted Measurement Photos

