

# FCC Part 22H & 24E Measurement and Test Report

For

Hyundai Corporation

25, Yulgok-ro 2-Gil, Jongno-gu, Seoul, South Korea

**FCC ID: RQQHLT-FS40401**

**FCC Rules:** FCC Part 22H, FCC Part 24E

**Product Description:** 4G Smart Phone

**Tested Model:** L465

**Report No.:** STR18108061I-1

**Sample Receipt Date:** 2018-10-11

**Tested Date:** 2018-10-12 to 2018-11-02

**Issued Date:** 2018-11-02

**Tested By:** Jason Su / Engineer



**Reviewed By:** Silin Chen / EMC Manager



**Approved & Authorized By:** Jandy So / PSQ Manager



**Prepared By:**

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	8
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>3. RF EXPOSURE.....</b>	<b>11</b>
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT.....	11
<b>4. RF OUTPUT POWER.....</b>	<b>12</b>
4.1 STANDARD APPLICABLE.....	12
4.2 TEST PROCEDURE.....	12
4.3 SUMMARY OF TEST RESULTS/PLOTS.....	12
<b>5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....</b>	<b>17</b>
5.1 STANDARD APPLICABLE.....	17
5.2 TEST PROCEDURE.....	17
5.3 SUMMARY OF TEST RESULTS.....	17
<b>6. EMISSION BANDWIDTH.....</b>	<b>19</b>
6.1 STANDARD APPLICABLE.....	19
6.2 TEST PROCEDURE.....	19
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
<b>7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....</b>	<b>34</b>
7.1 STANDARD APPLICABLE.....	34
7.2 TEST PROCEDURE.....	34
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	34
<b>8. SPURIOUS RADIATED EMISSIONS.....</b>	<b>67</b>
8.1 STANDARD APPLICABLE.....	67
8.2 TEST PROCEDURE.....	67
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	67
<b>9. FREQUENCY STABILITY.....</b>	<b>78</b>
9.1 STANDARD APPLICABLE.....	78
9.2 TEST PROCEDURE.....	78
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	78

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Hyundai Corporation  
Address of applicant: 25, Yulgok-ro 2-Gil, Jongno-gu, Seoul, South Korea

Manufacturer: Guizhou Fortuneship Technology Co., Ltd  
Address of manufacturer: 2nd Floor, Factory Building 4, Hi-Tech Industrial Park, Xinpu Economic Development Zone, Xinpu New District, Zunyi City, Guizhou Province, P. R. China

General Description of EUT:	
Product Name:	4G Smart Phone
Brand Name:	HYUNDAI
Model No.:	L465
Adding Model(s):	L465S
Rated Voltage:	DC3.7V
Battery:	1400mAh
Adapter Model:	HY-C700 Input:AC100-240V 50/60Hz Output::DC5V 700mA
Software Version:	FS272_CF13_DRV_ONLY_MS410_O24574M_ 20180920_WVGA_VOLTE__W1245_L234728B_CTP_ UDC_debug_165948
Hardware Version:	FS272-M
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The main-test model L465 has two SIM card slots, adding model L465S has only one SIM card slots, but the circuit and the electronic construction do not change, declared by the manufacturer. The two models are test and only the worst case model is showed in the test report.</i>	

<b>Technical Characteristics of EUT:</b>	
<b>2G</b>	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 33.03dBm, GSM1900: 30.13dBm EDGE850: 26.18dBm, EDGE1900: 26.76dBm
Type of Emission:	GSM850: 247KGXW, GSM1900: 243KGXW EDGE850: 250KG7W, EDGE1900: 248KG7W
Type of Modulation:	GMSK , 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: 0.7dBi; GSM1900: 1.3dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 21.35dBm, WCDMA Band 5: 21.39dBm
Type of Emission:	WCDMA Band 2: 4M17F9W WCDMA Band 5: 4M16F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 1.3dBi, WCDMA Band 5: 0.7dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 2:** FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

**FCC Rules Part 22:** PRIVATE LAND MOBILE RADIO SERVICES.

**FCC Rules Part 24:** PUBLIC MOBILE SERVICES

**TIA/EIA 603 E March 2016:** Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

**ANSI C63.26-2015:** American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

**KDB 971168 D01 Power Meas License Digital Systems v03r01:** MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM. Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency(MHz)	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2	128
		836.6	190
		848.8	251
PCS 1900	GSM/GPRS/EDGE	1850.2	512
		1880.0	661
		1909.8	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4	4132
		836.6	4183
		846.6	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4	9262
		1880.0	9400
		1907.6	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.2	Unshielded	Without Ferrite
Earphone Cable	1.2	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2018-05-22	2019-05-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2018-05-22	2019-05-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2018-05-22	2019-05-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2018-05-22	2019-05-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2018-05-22	2019-05-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2018-05-22	2019-05-21
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18



---

---

SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 1.1307, § 2.1093	RF Exposure	Compliant
§ 22.913 (a), § 24.232 (c), § 24.51	RF Output Power Peak-to-average Ratio (PAR) of Transmitter	Compliant
§ 22.917 (b), § 24.238 (b)	Emission Bandwidth	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Radiation Emissions	Compliant
§ 22.917 (a), § 24.238 (a)	Out of Band Emissions	Compliant
§ 22.355, § 24.235	Frequency Stability	Compliant

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR report.

## 4. RF Output Power

---


### 4.1 Standard Applicable

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

### 4.2 Test Procedure

- Conducted output power test method:

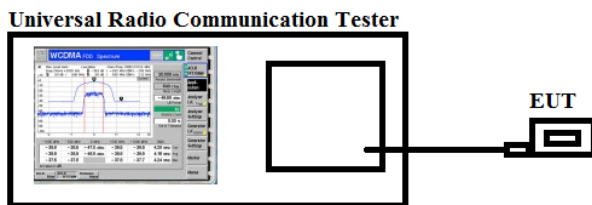

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

### 4.3 Summary of Test Results/Plots

## &gt; Max. Radiated Power

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	30.32	<38.45	Pass
		H	30.17		
	190	V	30.28		
		H	30.61		
	251	V	30.71		
		H	30.43		
GPRS850	128	V	30.28	<38.45	Pass
		H	30.02		
	190	V	30.74		
		H	29.98		
	251	V	29.72		
		H	30.14		
EGPRS850	128	V	24.35	<38.45	Pass
		H	24.14		
	190	V	24.25		
		H	24.28		
	251	V	24.12		
		H	24.08		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	28.74	<33.00	Pass
		H	28.61		
	661	V	28.48		
		H	28.26		
	810	V	28.41		
		H	28.53		
GPRS1900	512	V	28.71	<33.00	Pass
		H	28.63		
	661	V	28.48		
		H	28.35		
	810	V	28.45		
		H	28.36		
EGPRS1900	512	V	24.32	<33.00	Pass
		H	24.17		
	661	V	24.25		
		H	24.03		
	810	V	24.11		
		H	24.16		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	20.35	<38.45	Pass
		H	20.47		
	4183	V	20.22		
		H	20.25		
	4233	V	20.47		
		H	20.21		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.32	<33.00	Pass
		H	20.41		
	9400	V	20.32		
		H	20.41		
	9538	V	20.26		
		H	20.47		

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

➤ **Max. Conducted Power (Average power)**

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	32.89	33.03	33.00	30.03	29.74	29.51
GPRS(1Slot)	32.92	32.99	32.95	30.13	29.72	29.50
EGPRS(1Slot)	25.84	26.18	25.84	25.98	26.76	25.95

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	21.26	21.35	21.28	21.39	21.39	21.32
HSDPA Subtest-1	20.51	21.26	21.06	21.20	21.18	20.99
HSDPA Subtest-2	20.48	21.25	21.03	21.18	21.17	20.96
HSDPA Subtest-3	20.47	21.23	21.04	21.18	21.16	20.94
HSDPA Subtest-4	20.49	21.23	21.03	21.19	21.16	20.95
HSUPA Subtest-1	20.48	20.94	21.07	21.28	21.18	21.12
HSUPA Subtest-2	20.45	20.93	21.05	21.25	21.17	21.1
HSUPA Subtest-3	20.46	20.91	21.05	21.25	21.16	21.1
HSUPA Subtest-4	20.46	20.92	21.03	21.26	21.16	21.11
HSUPA Subtest-5	20.47	20.92	21.03	21.25	21.16	21.09



## 5. Peak-to-average Ratio (PAR) of Transmitter

### 5.1 Standard Applicable


According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 5.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

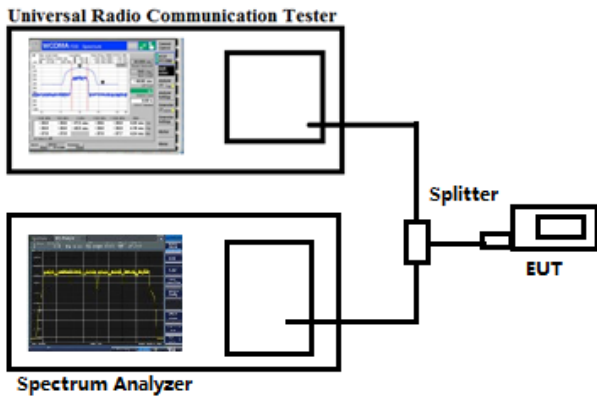

### 5.3 Summary of Test Results

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	6.02	13
GPRS(1 Slot)	661	1850.2	4.98	13
EDGE(1 Slot)	661	1850.2	5.85	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	5.98	13
	9400	1880.0	5.21	13
	9538	1907.6	6.26	13

Note: Only the worst case was selected to record.

## 6. Emission Bandwidth

### 6.1 Standard Applicable


According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

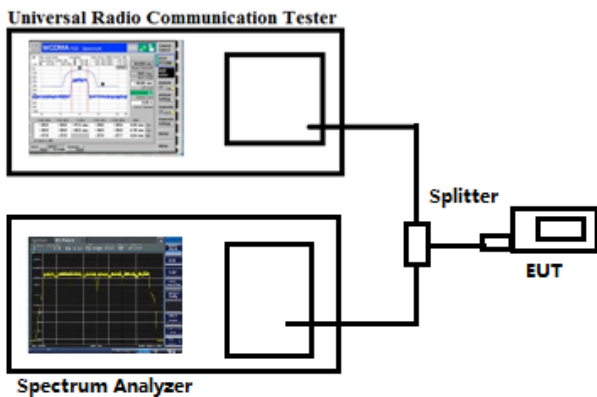

### 6.3 Summary of Test Results/Plots


EUT Mode	Channel	Frequency (MHz)	99% Occupancy bandwidth (kHz)	-26dB bandwidth (kHz)

GSM 850 (GMSK)	128	824.20	247.0020	321.656
	190	836.60	245.7429	318.971
	251	848.80	245.0955	316.926
GPRS850 (GMSK,1Slot)	128	824.20	246.5797	313.551
	190	836.60	245.4889	316.146
	251	848.80	246.6042	309.207
EGPRS850 (8PSK,1Slot)	128	824.20	249.3097	324.323
	190	836.60	248.4641	323.730
	251	848.80	250.9000	319.502
PCS1900 (GMSK)	512	1850.20	241.7692	322.117
	661	1880.00	242.8044	322.073
	810	1909.80	242.3417	308.536
GPRS1900 (GMSK,1Slot)	512	1850.20	242.9915	304.636
	661	1880.00	241.9205	307.129
	810	1909.80	239.9422	310.545
EGPRS1900 (8PSK,1Slot)	512	1850.20	242.5913	311.249
	661	1880.00	240.0160	309.283
	810	1909.80	248.0291	307.810


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (MHz)	-26dB bandwidth (MHz)
WCDMA Band V	4132	826.40	4162.5	4690
	4183	836.60	4156.1	4683
	4233	846.60	4150.1	4688
HSDPA	4132	826.40	4164.4	4693
	4183	836.60	4158.5	4700
	4233	846.60	4160.9	4698
HSUPA	4132	826.40	4151.6	4684
	4183	836.60	4154.1	4695
	4233	846.60	4158.4	4676
WCDMA Band II	9262	1852.40	4152.6	4670
	9400	1880.00	4165.1	4663
	9538	1907.60	4148.0	4679
HSDPA	9262	1852.40	4154.2	4678
	9400	1880.00	4155.8	4690
	9538	1907.60	4150.0	4675
HSUPA	9262	1852.40	4160.2	4662
	9400	1880.00	4153.0	4666
	9538	1907.60	4148.7	4667

## GSM850


Low Channel

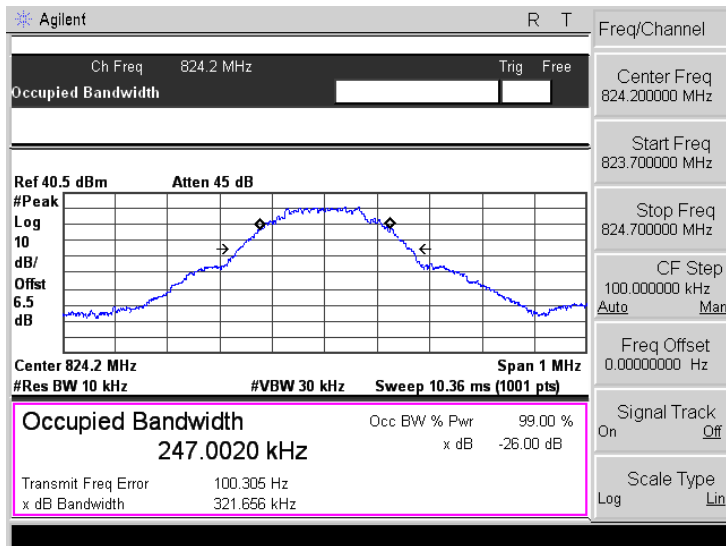

Middle Channel

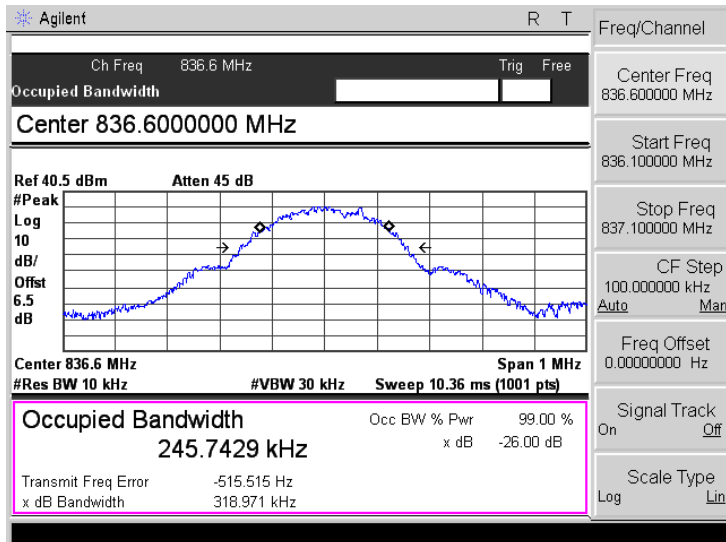


High Channel

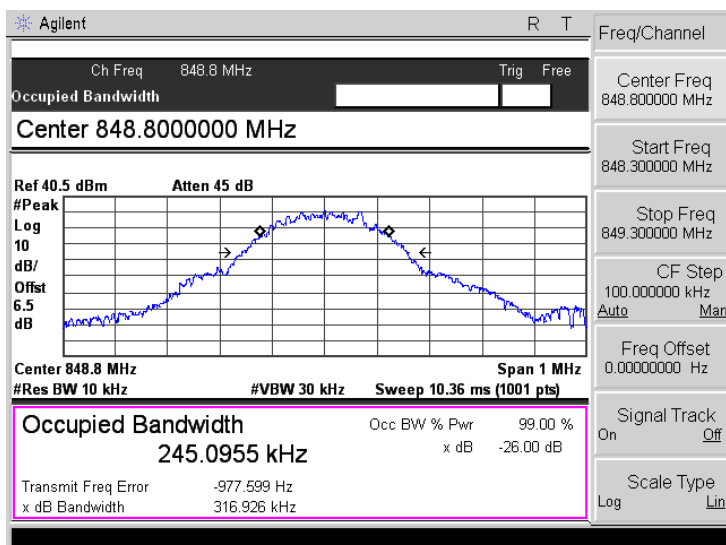


## GPRS850


Low Channel

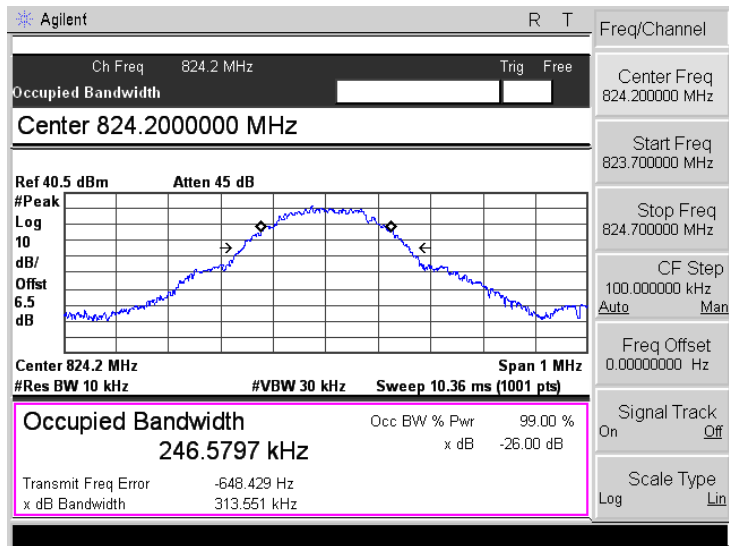

Middle Channel

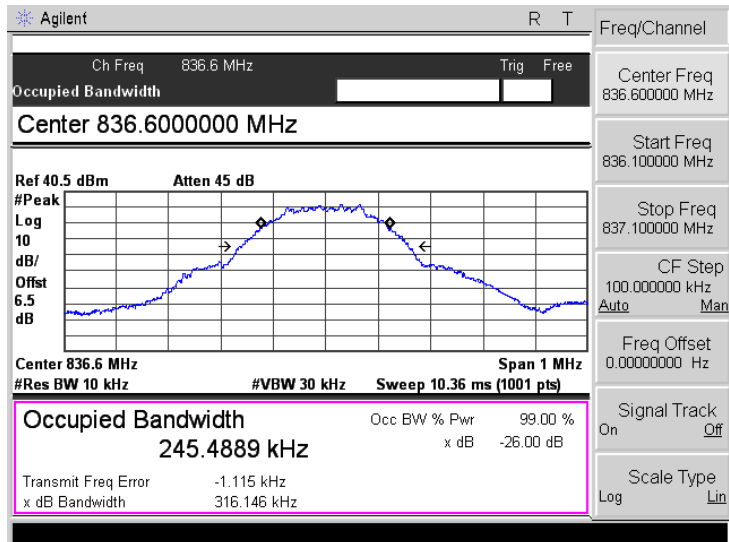


High Channel

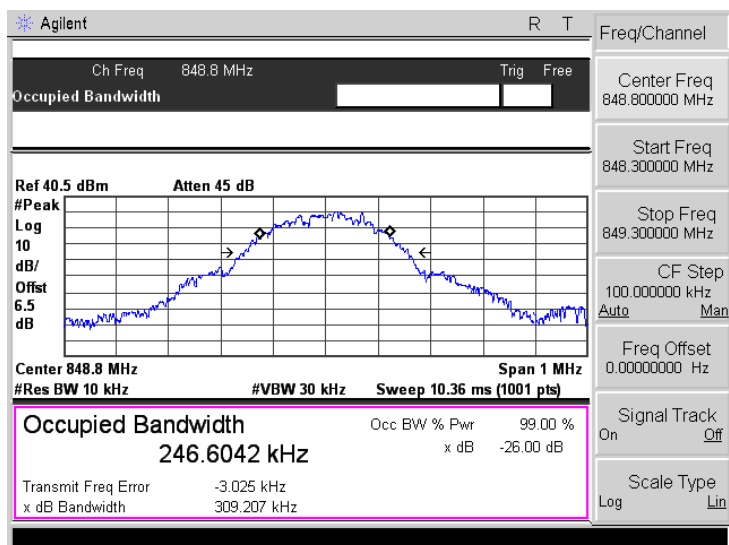


EGPRS850


Low Channel

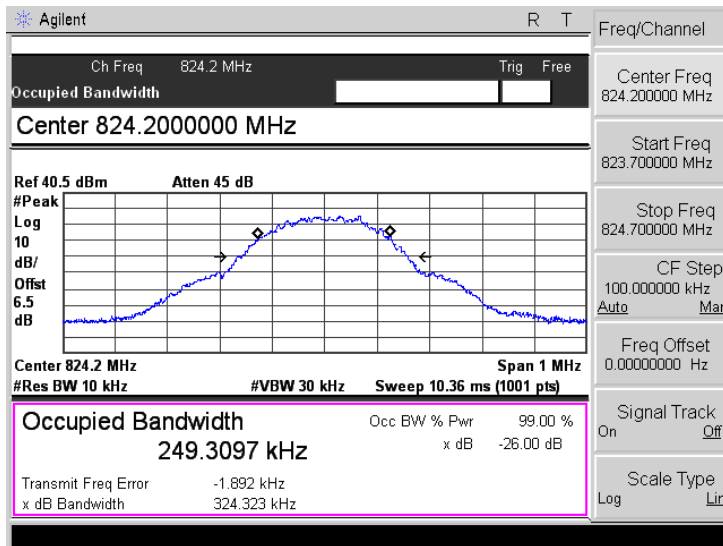

Middle Channel

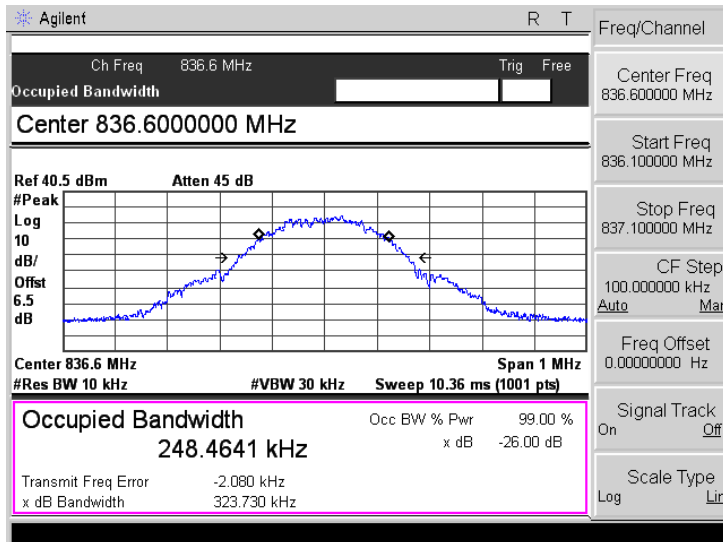


High Channel

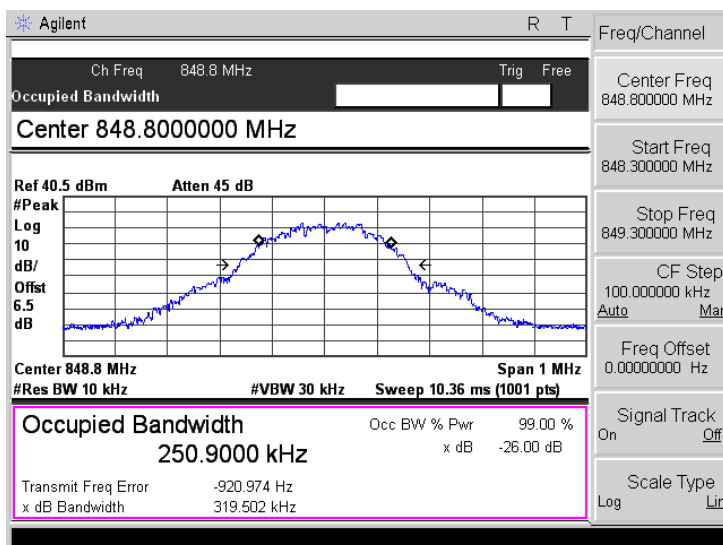




PCS1900


Low Channel

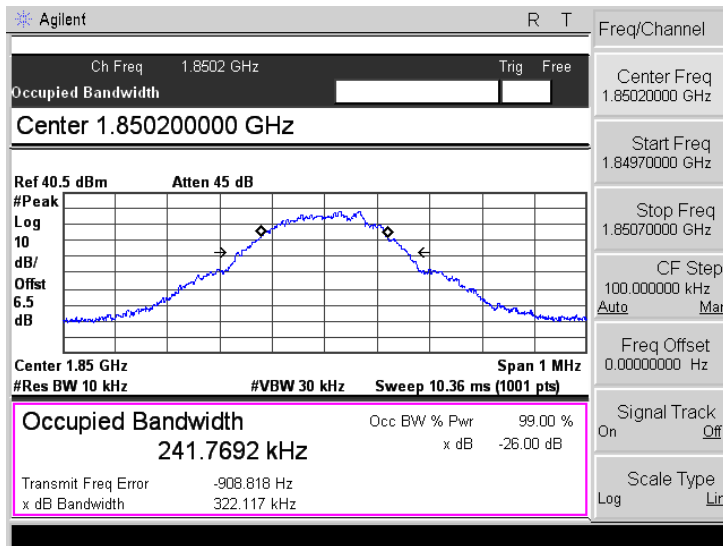

Middle Channel

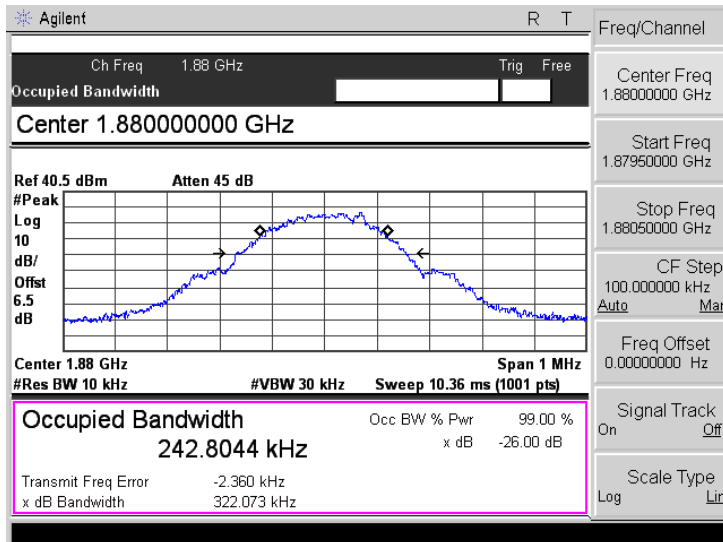


High Channel

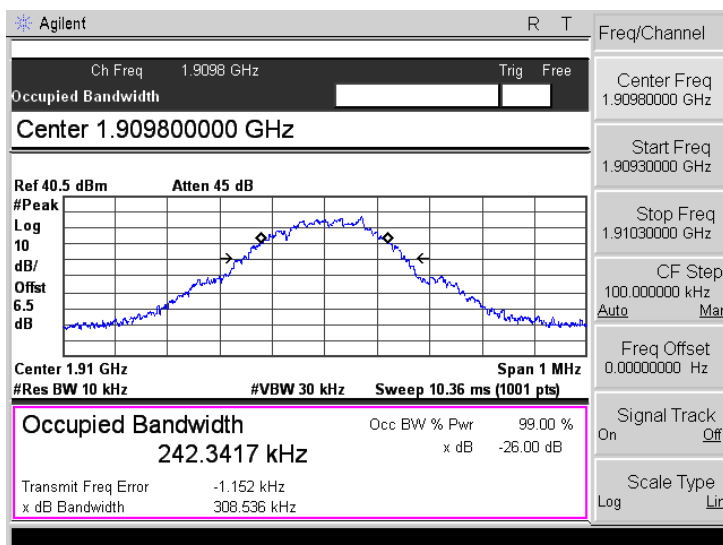


## GPRS1900


Low Channel

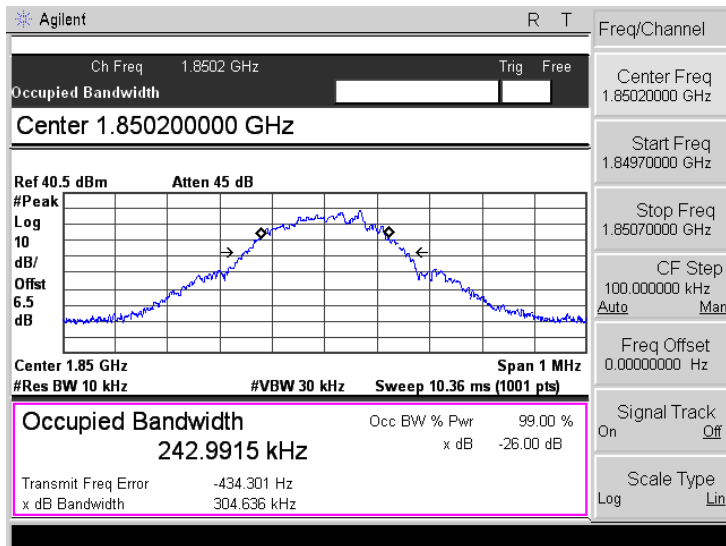

Middle Channel

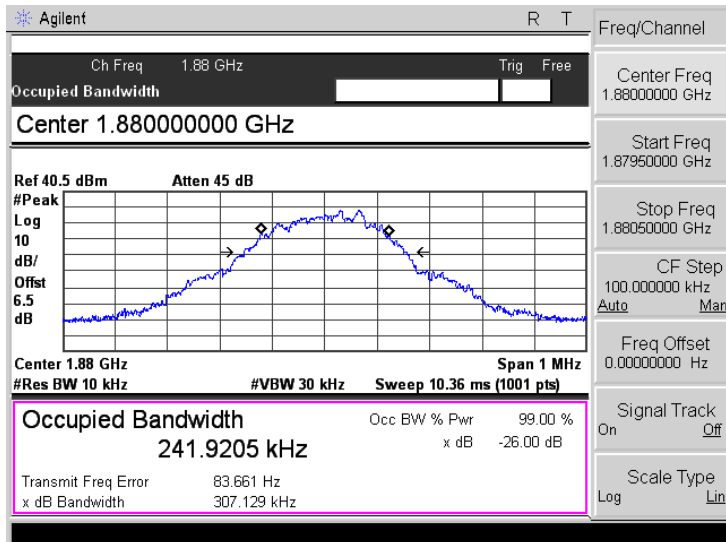


High Channel

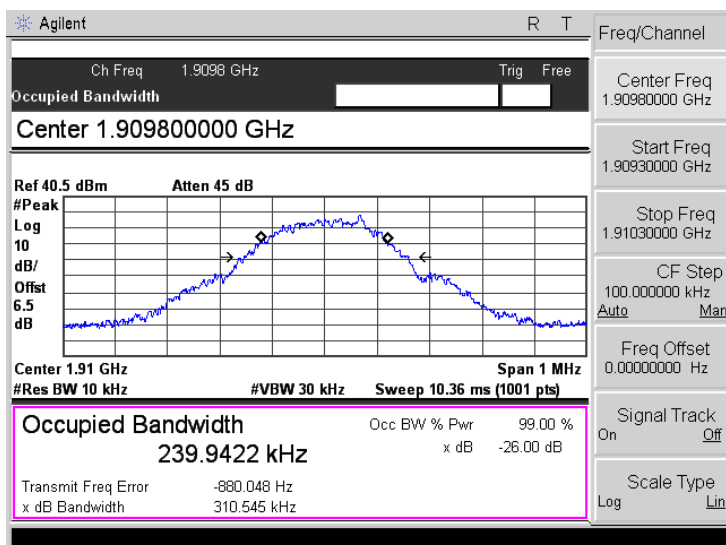


EGPRS1900


Low Channel

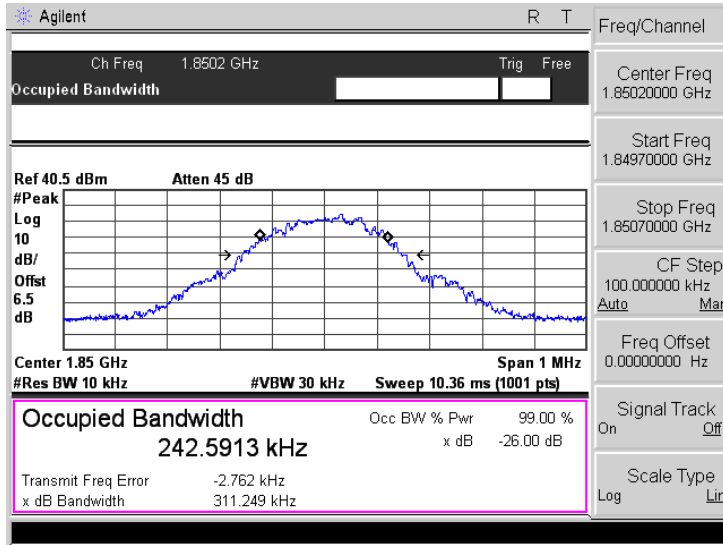

Middle Channel

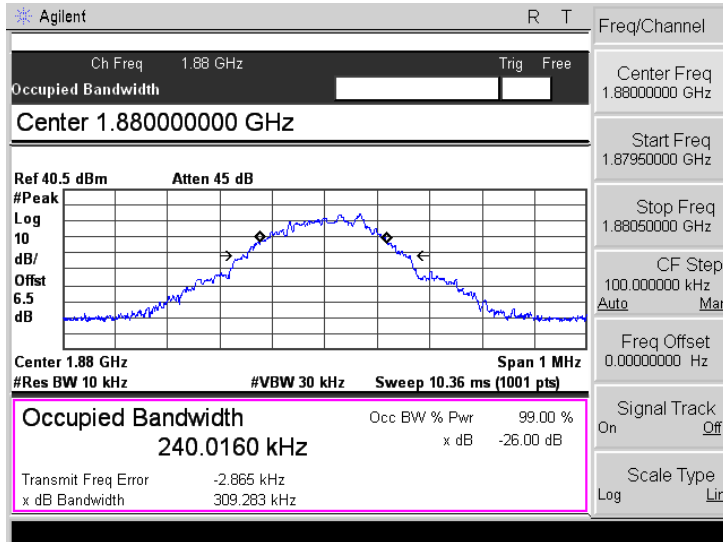


High Channel

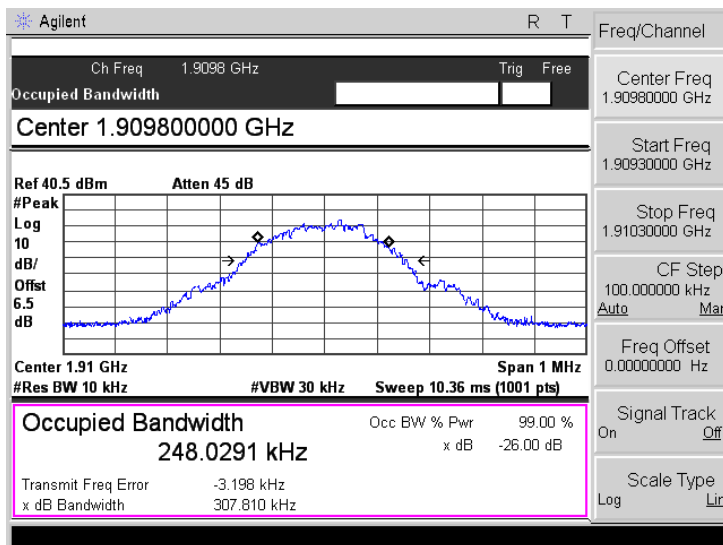


## WCDMA Band V


Low Channel

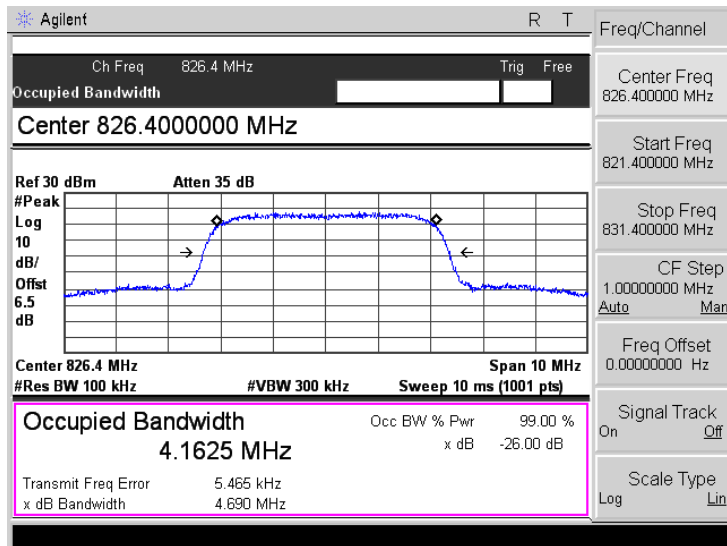

Middle Channel

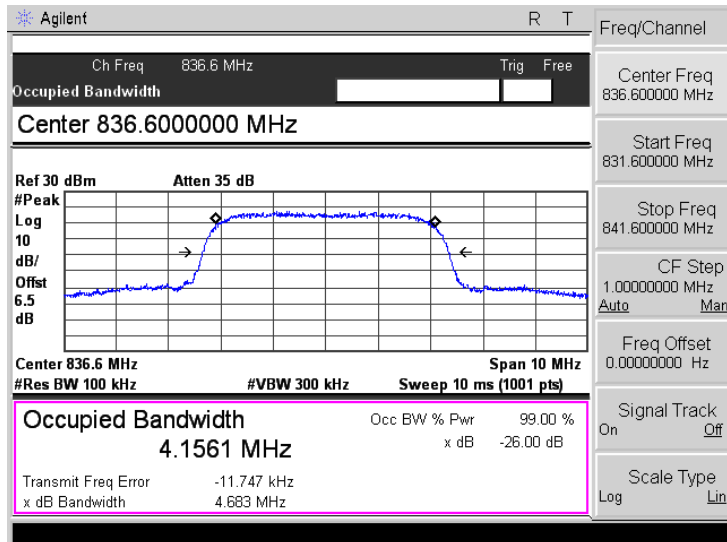


High Channel

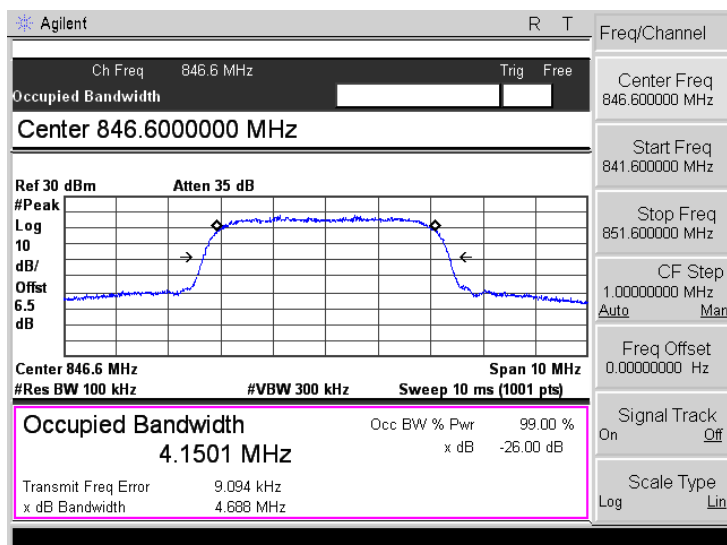


## WCDMA Band V- HSDPA


Low Channel

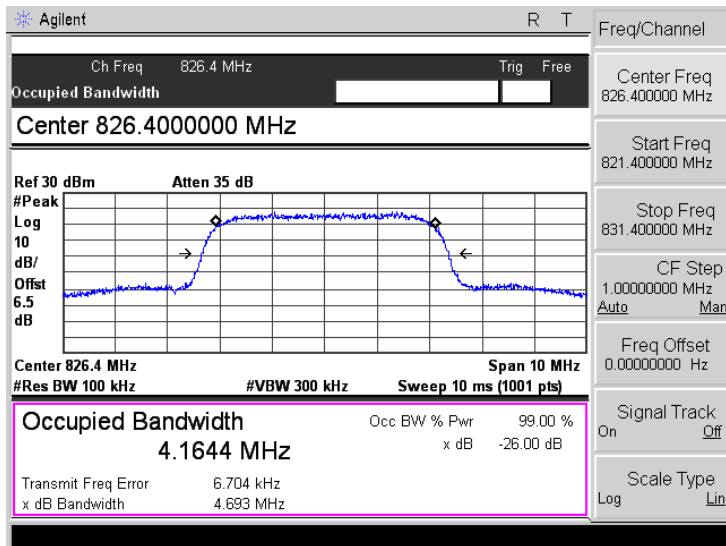

Middle Channel

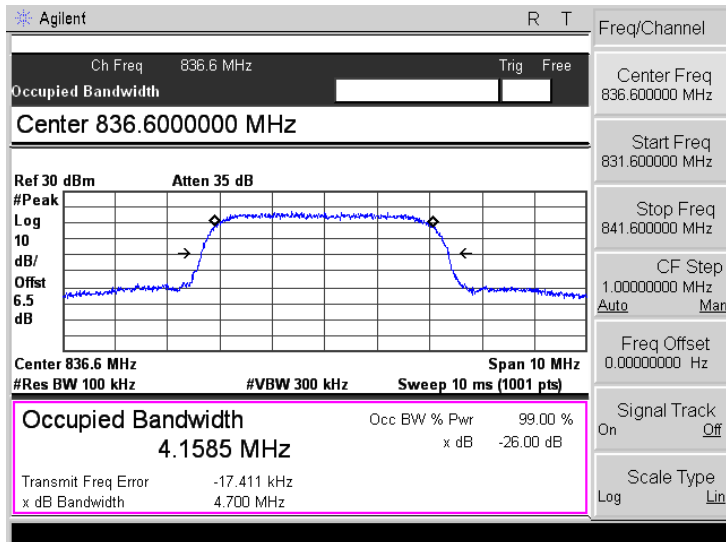


High Channel

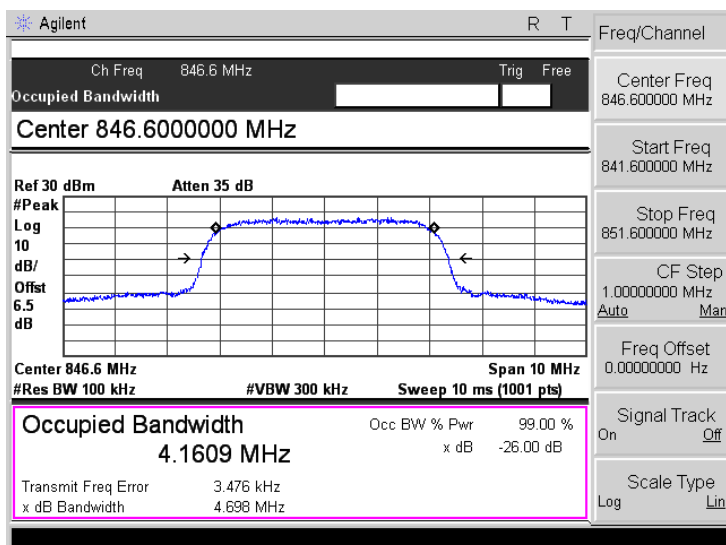


WCDMA Band V- HSUPA


Low Channel

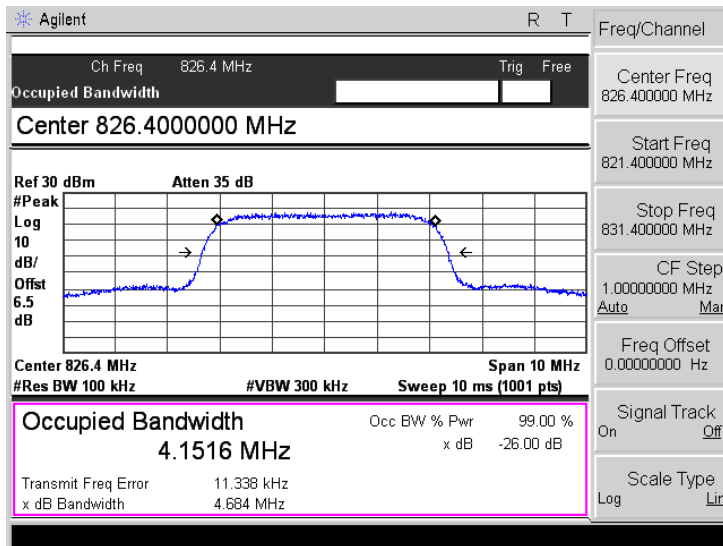

Middle Channel

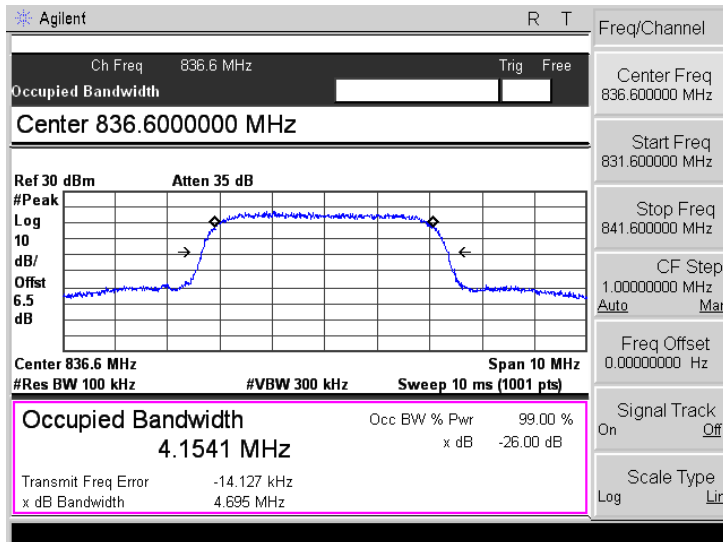


High Channel

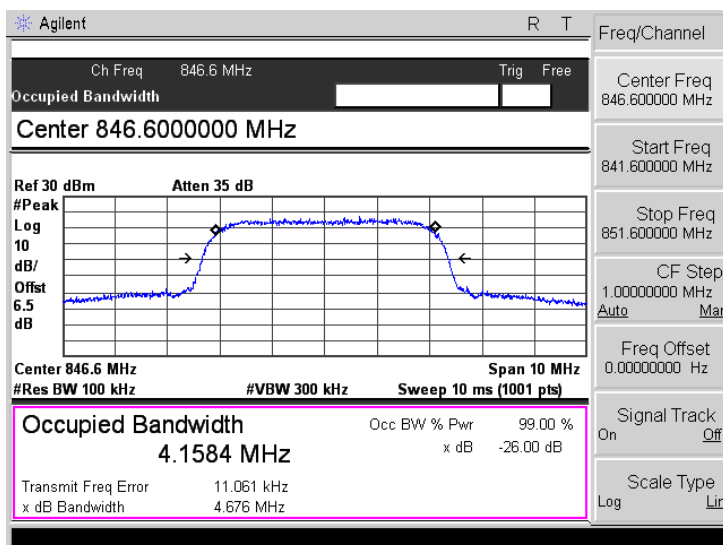


## WCDMA Band II


Low Channel

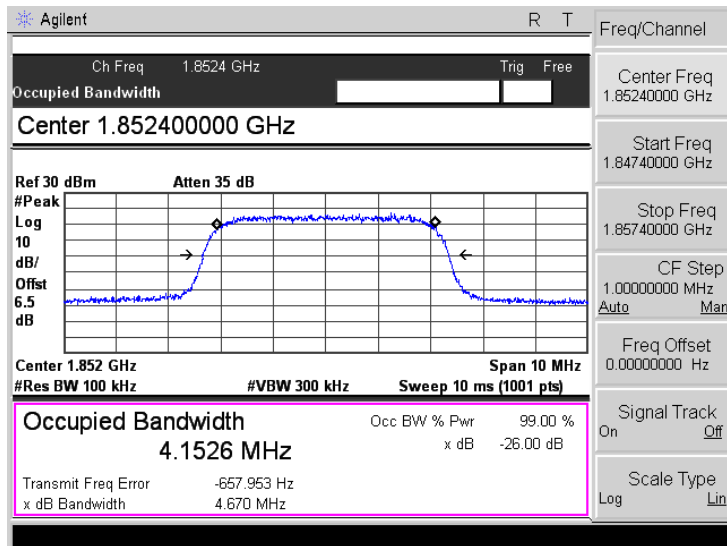

Middle Channel

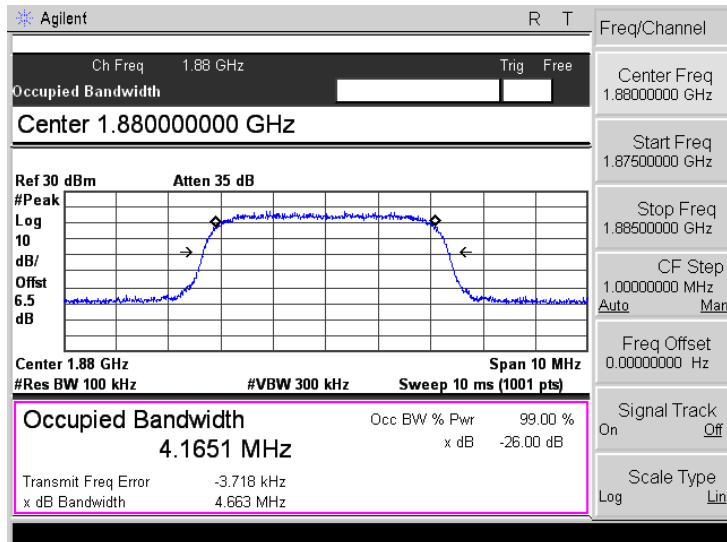


High Channel

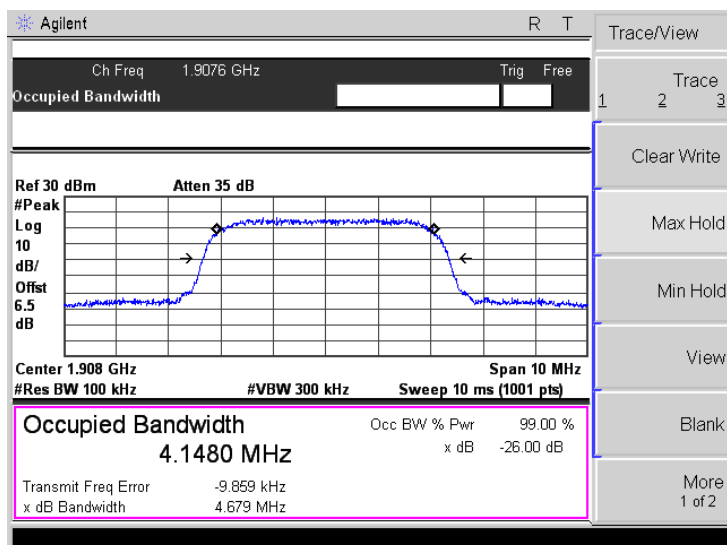


## WCDMA Band II- HSDPA


Low Channel

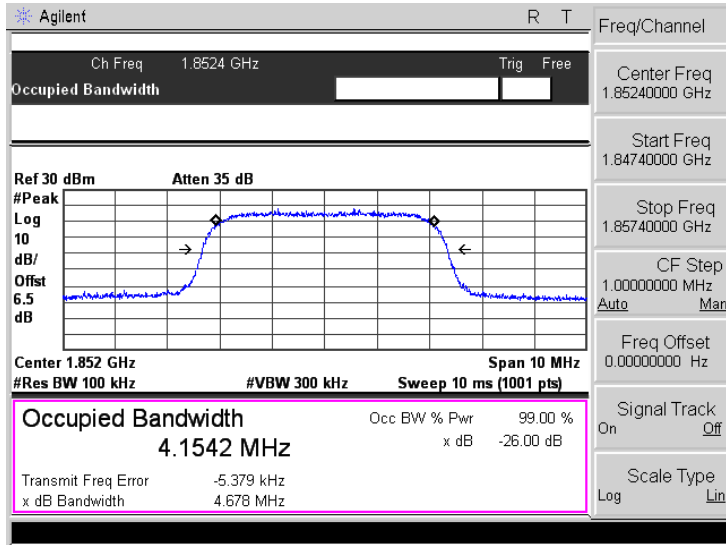

Middle Channel

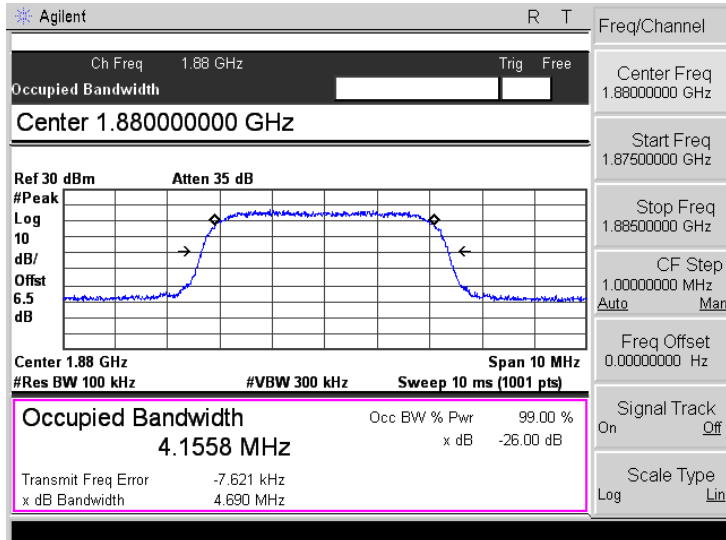


High Channel

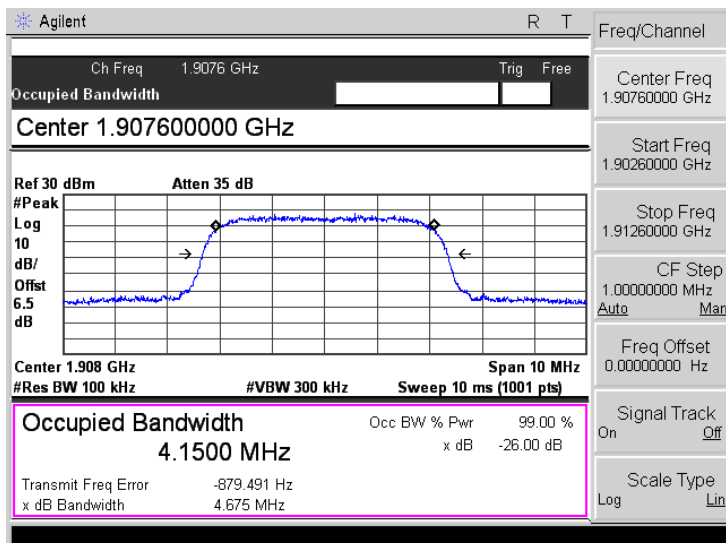




## WCDMA Band II- HSUPA


Low Channel

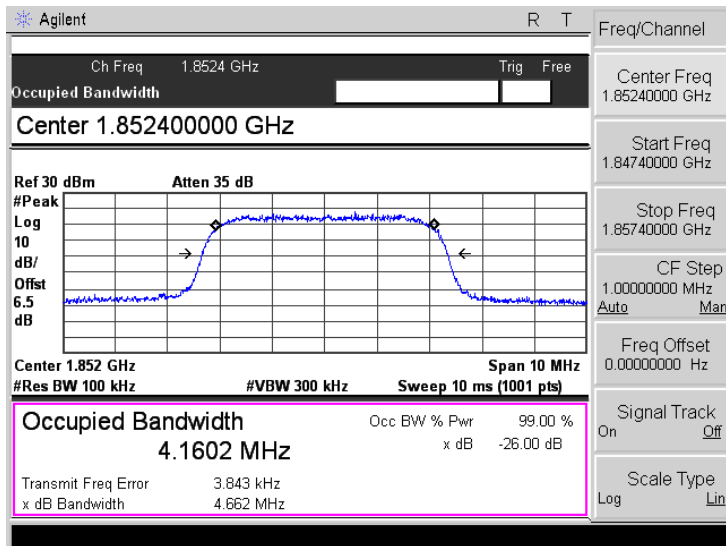

Middle Channel

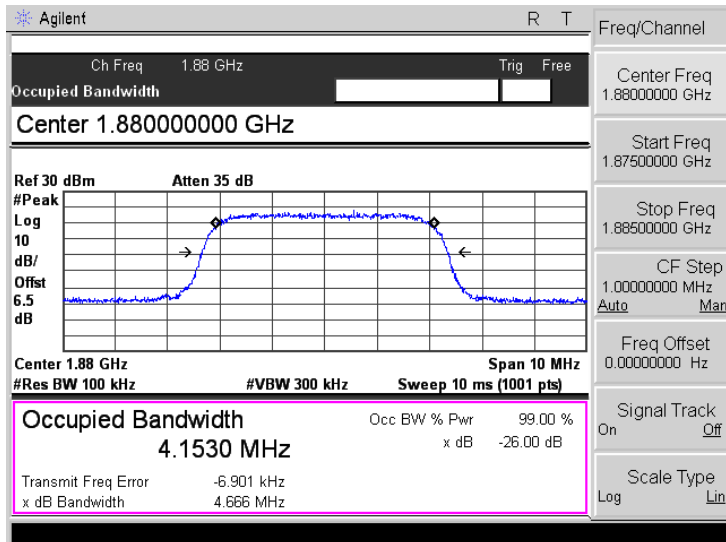

High Channel

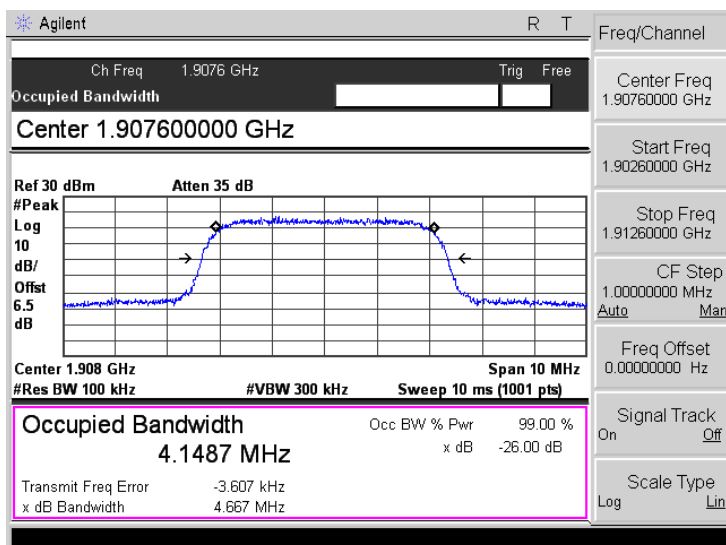

## 7. Out of Band Emissions at Antenna Terminal

### 7.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

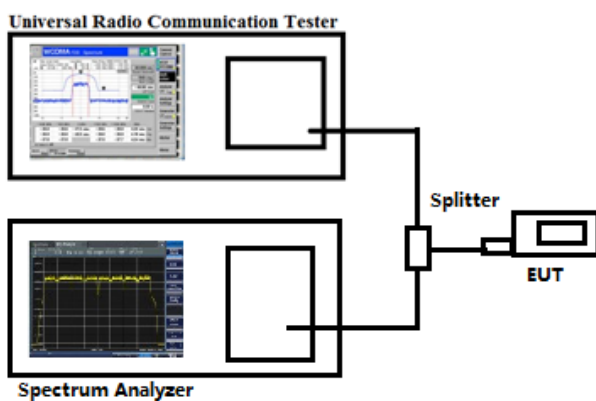



### 7.3 Summary of Test Results/Plots

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

Please refer to the following test plots



GSM850

Low Channel

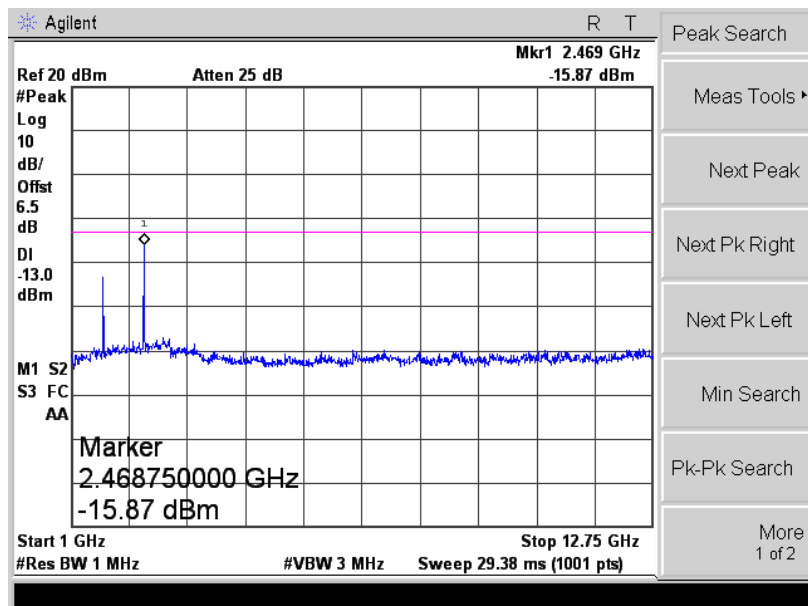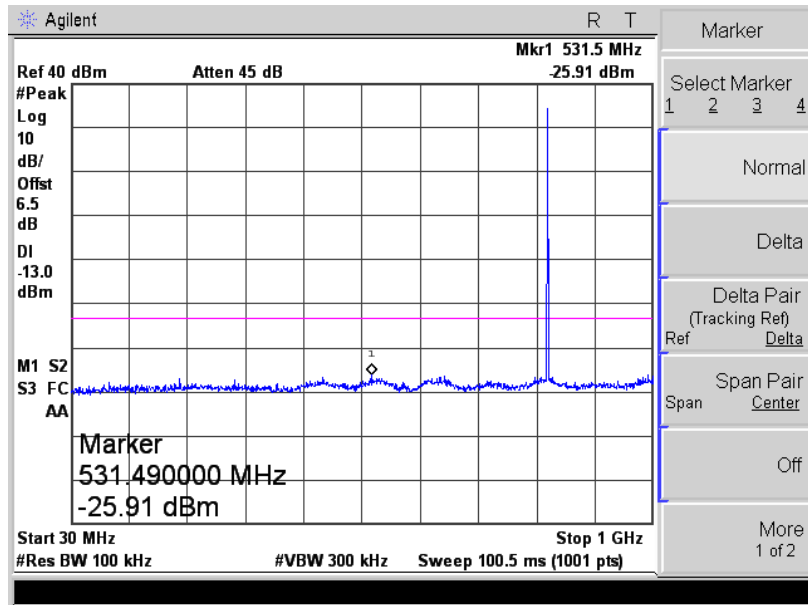



GSM850

Middle Channel

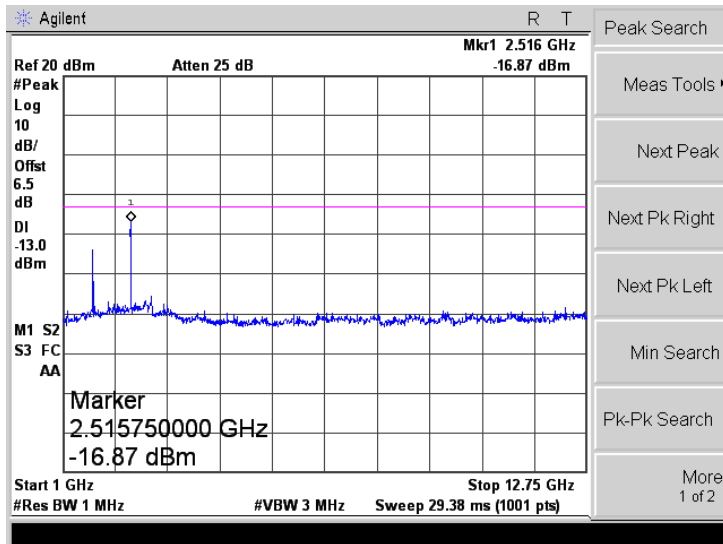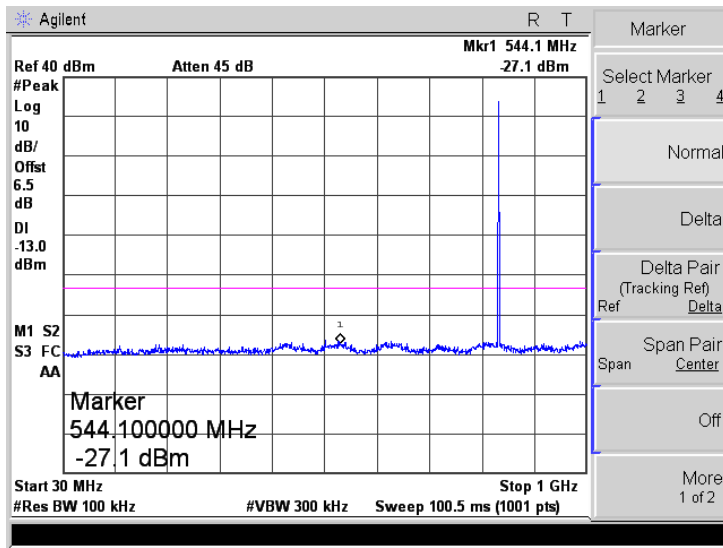


GSM850

High Channel

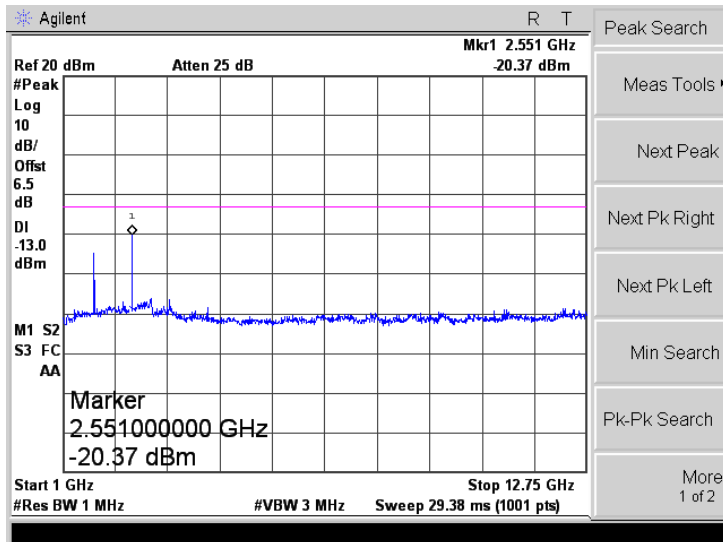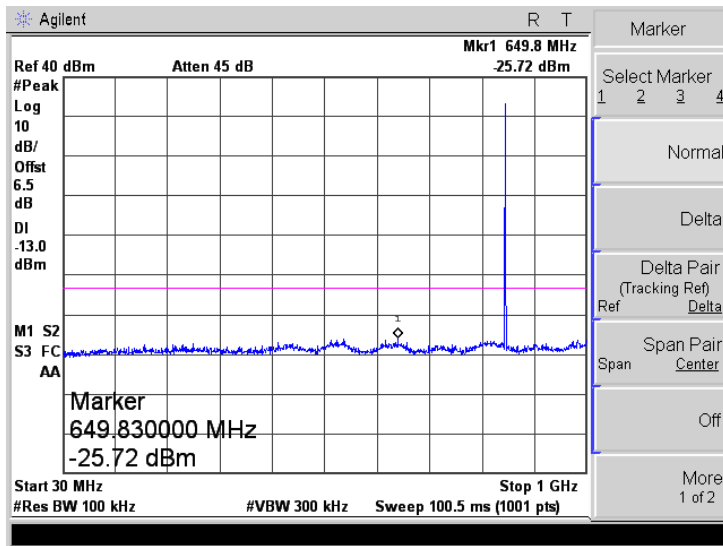


GSM850

Low Band Emission


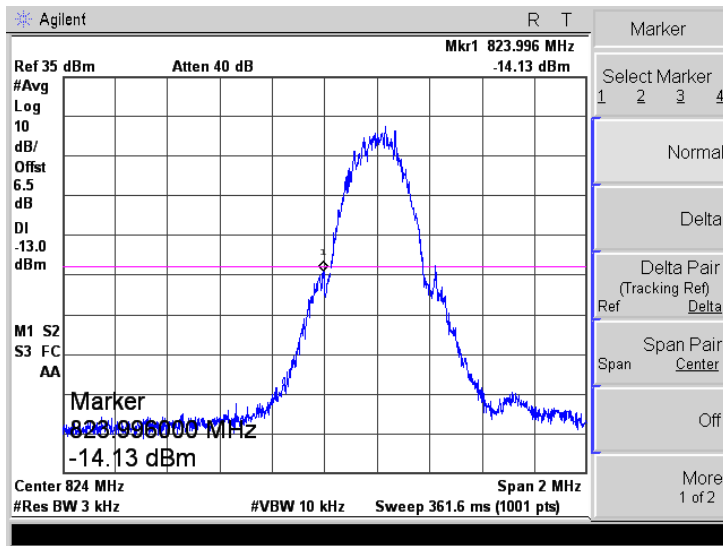


High Band Emission

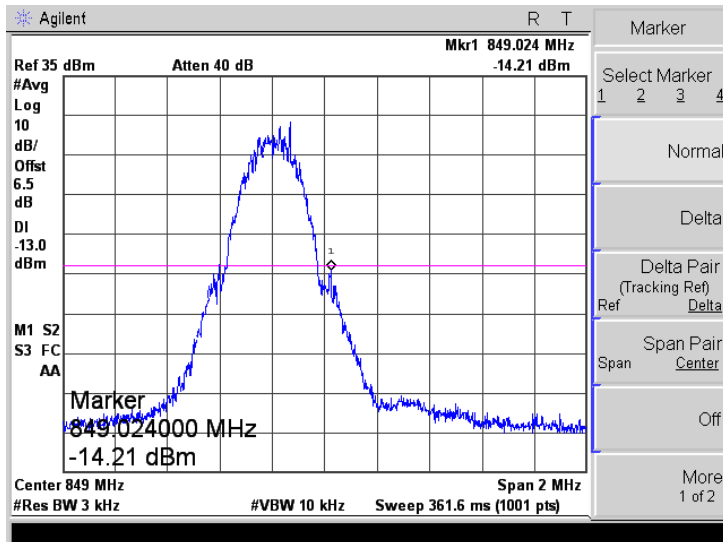



GPRS850

GPRS Low Channel

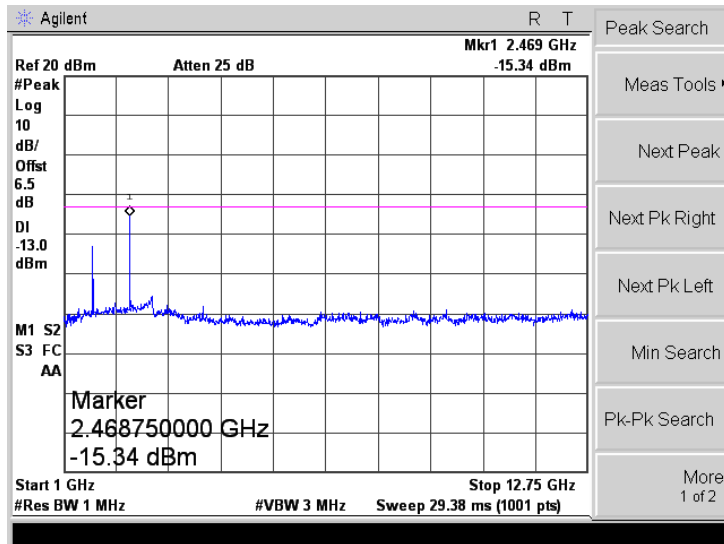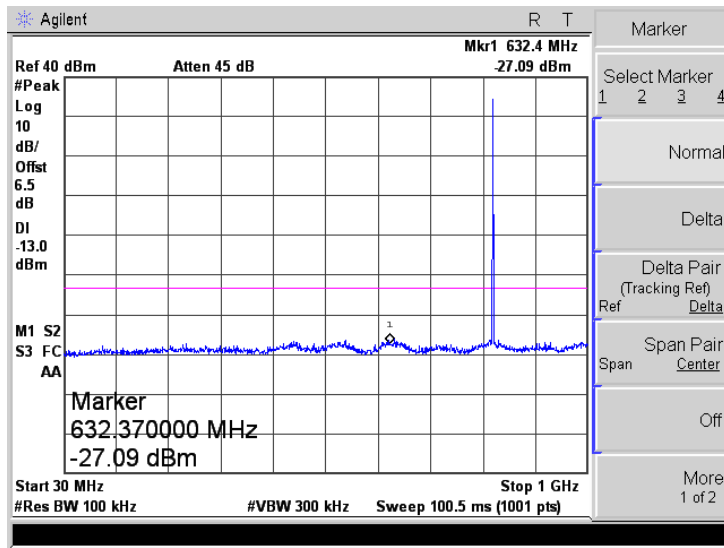

GPRS850



Middle Channel

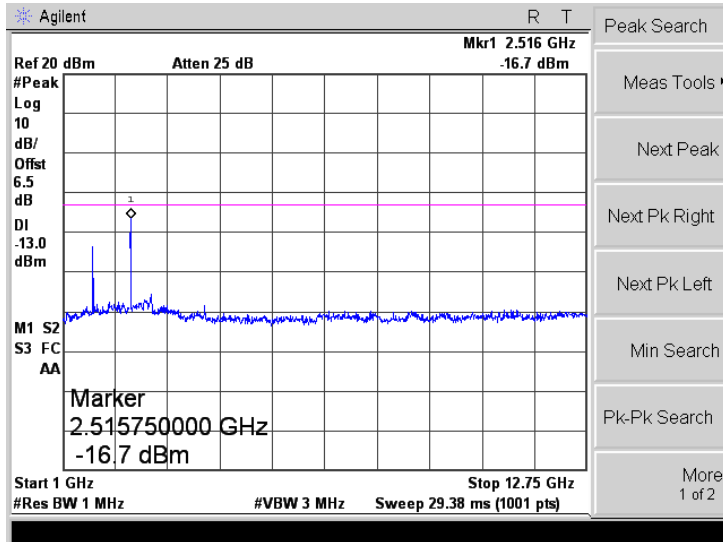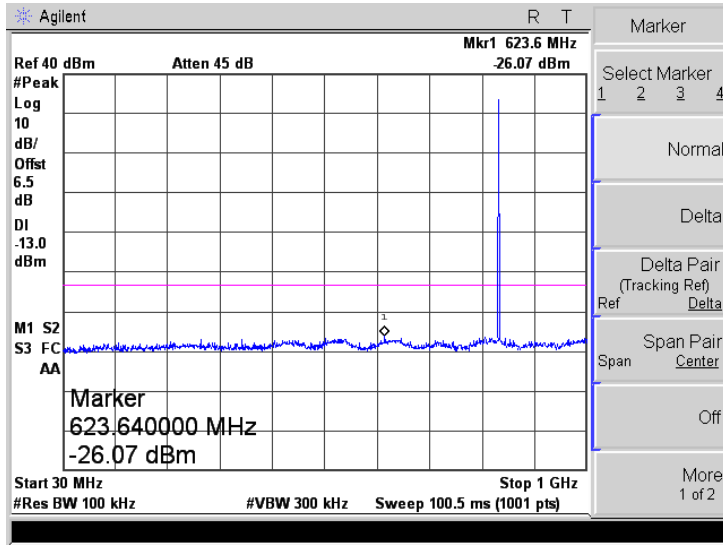




GPRS850

High Channel

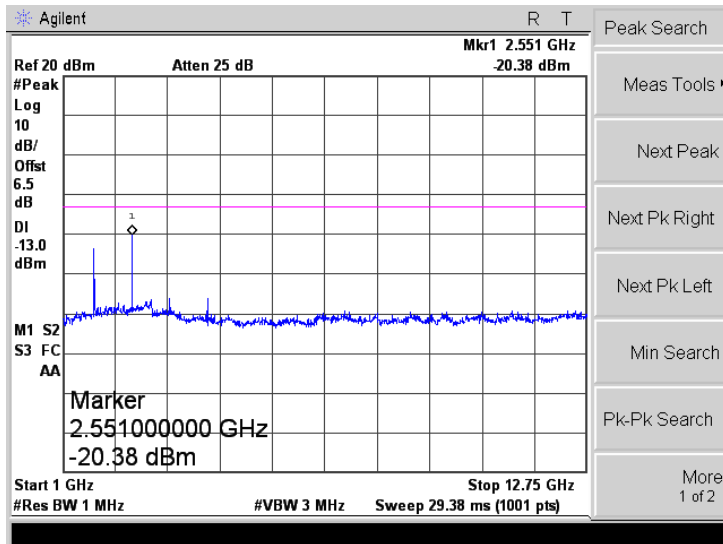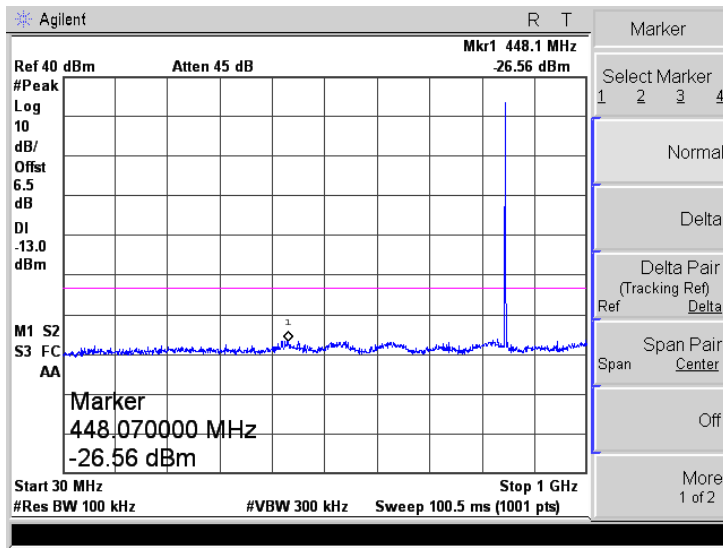


GPRS850

Low Band Emission


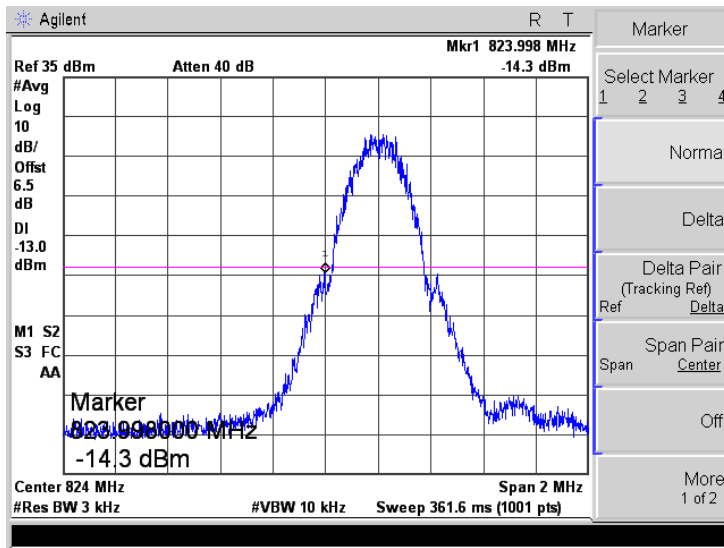


High Band Emission

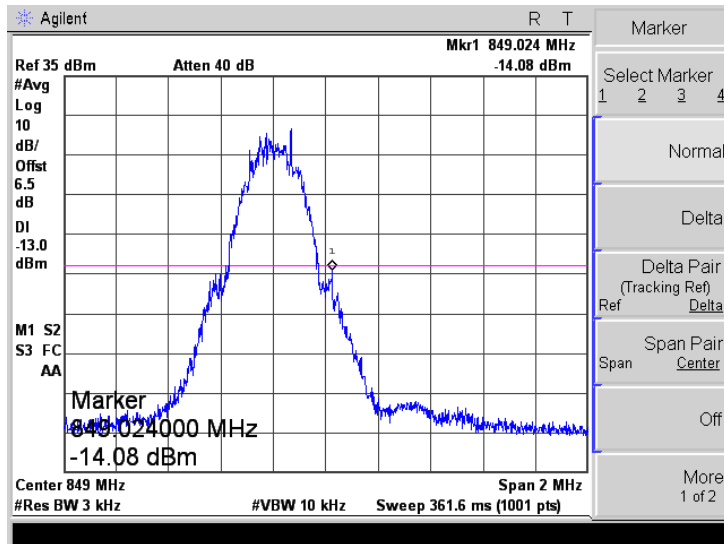



EGPRS850

Low Channel

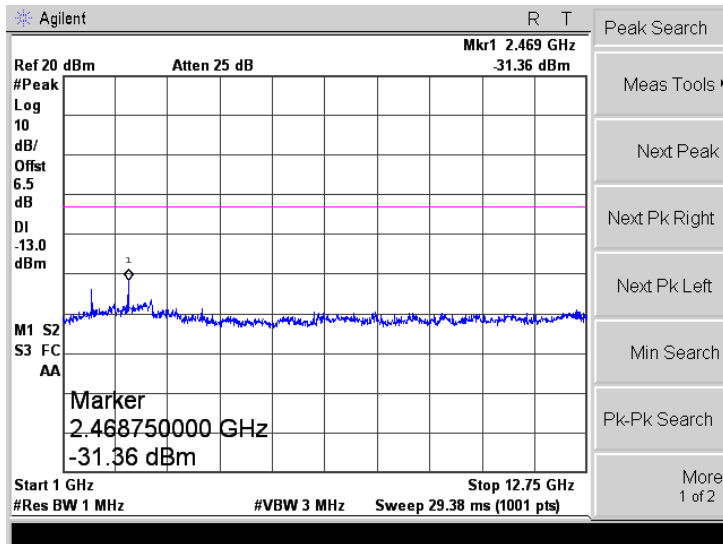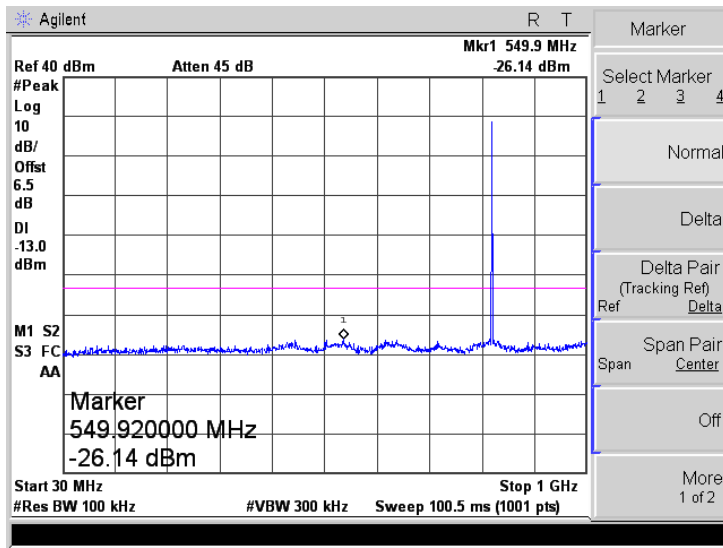



EGPRS850

Middle Channel

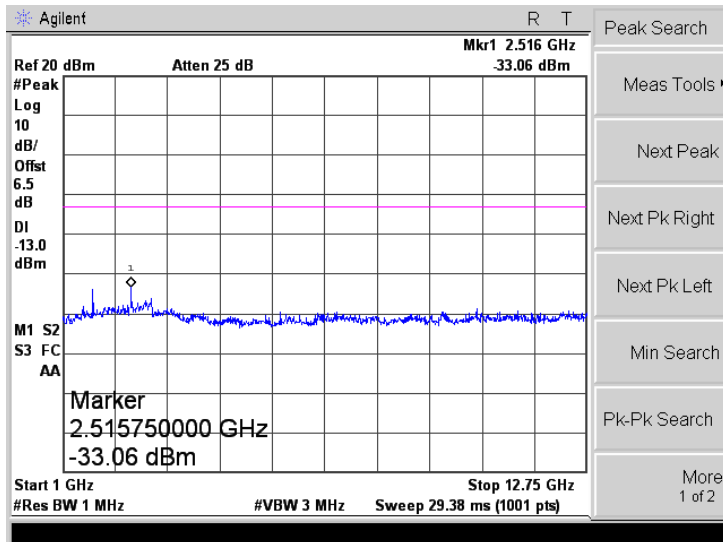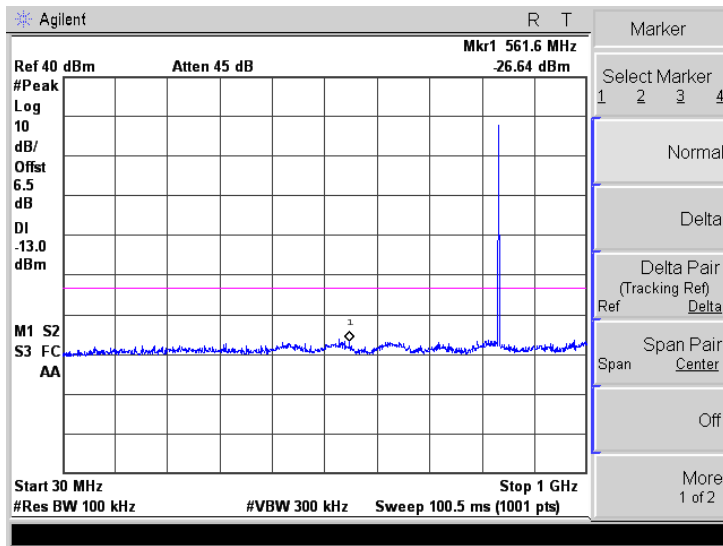

EGPRS850


High Channel

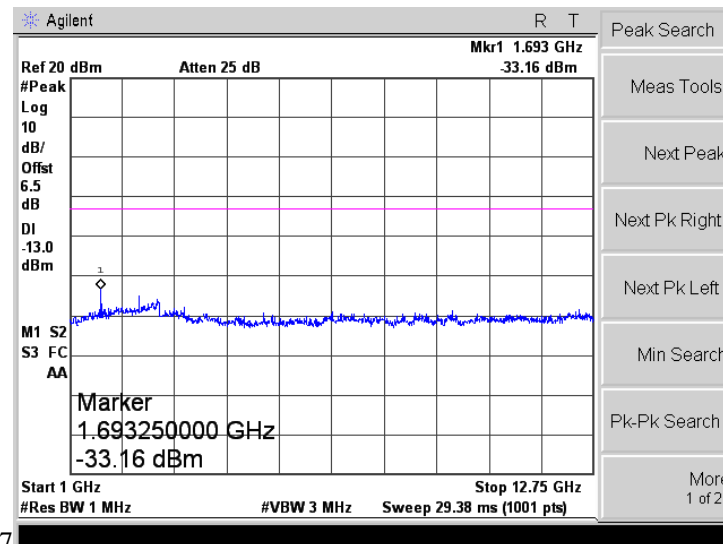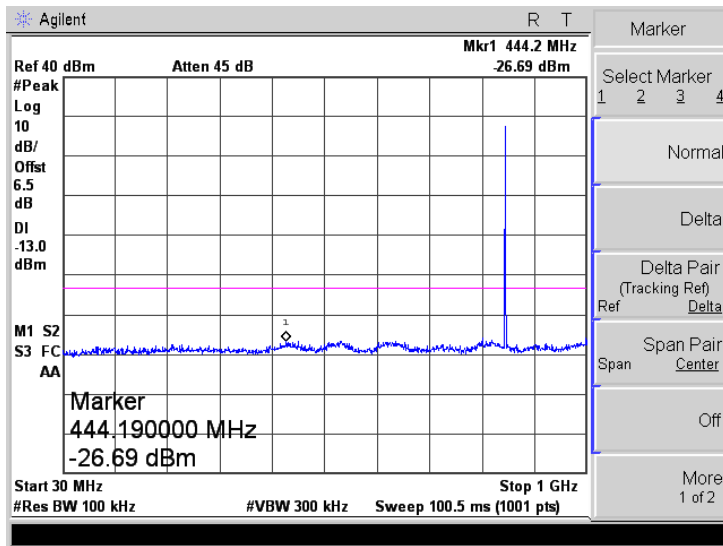


7

EGPRS850

Low Band Emission



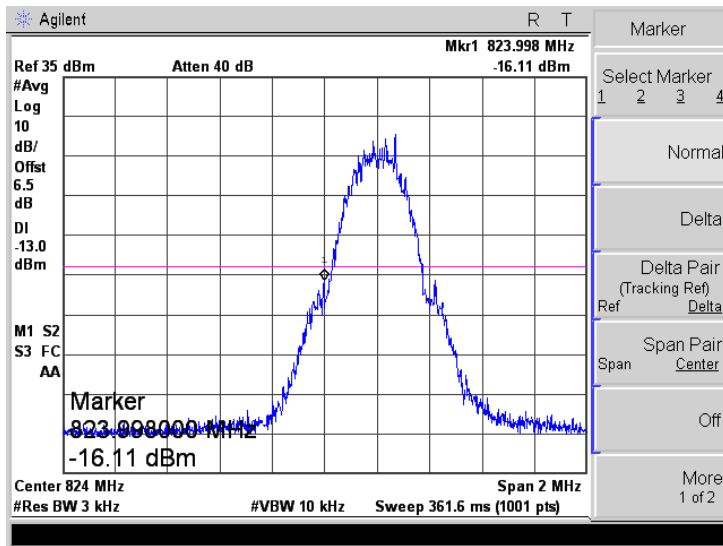


High Band Emission

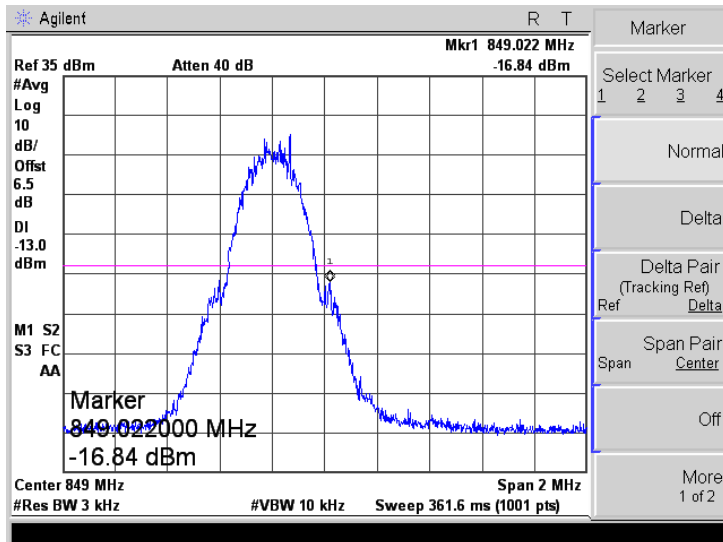




PCS1900

Low Channel

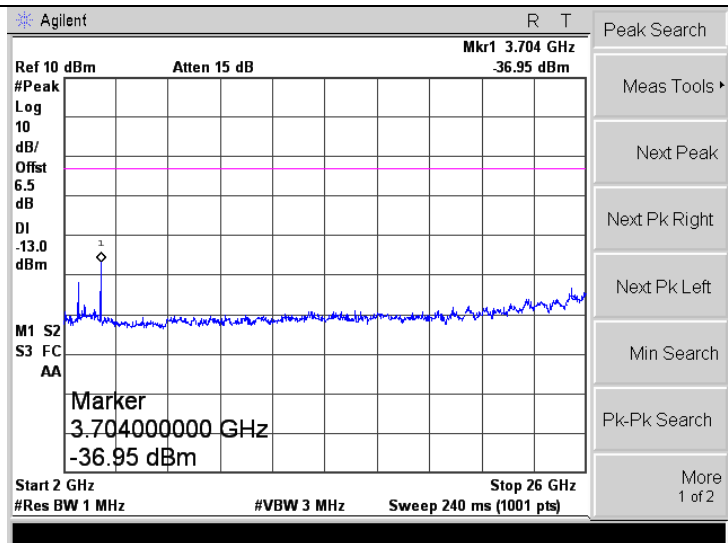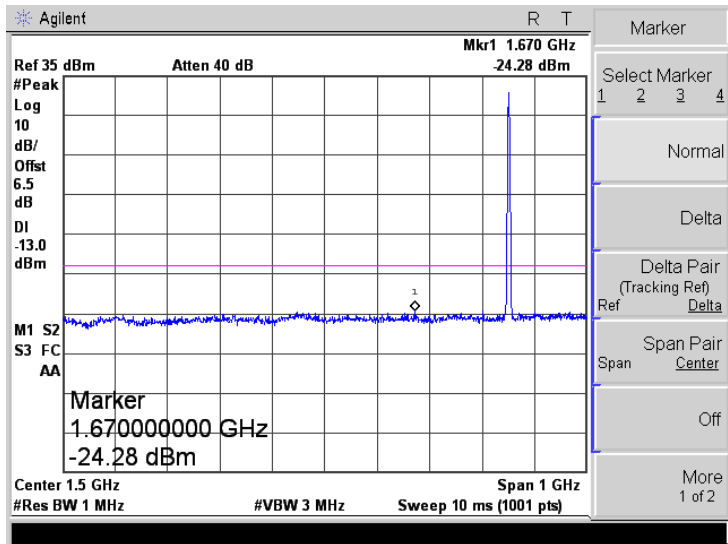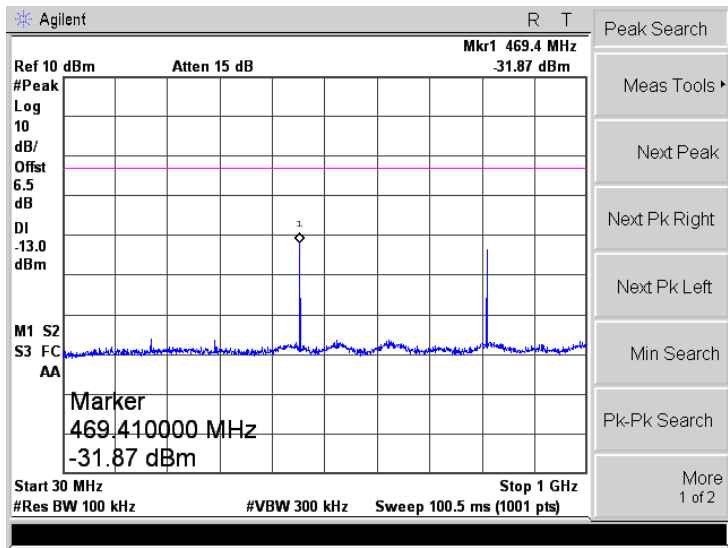

PCS1900




Middle Channel

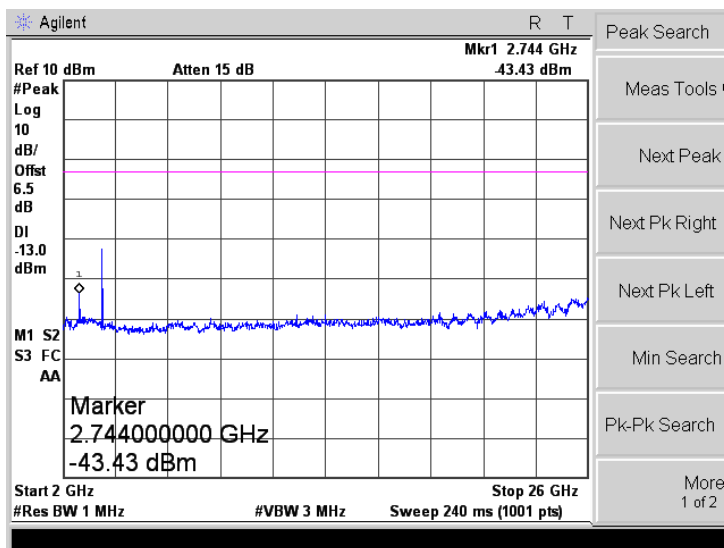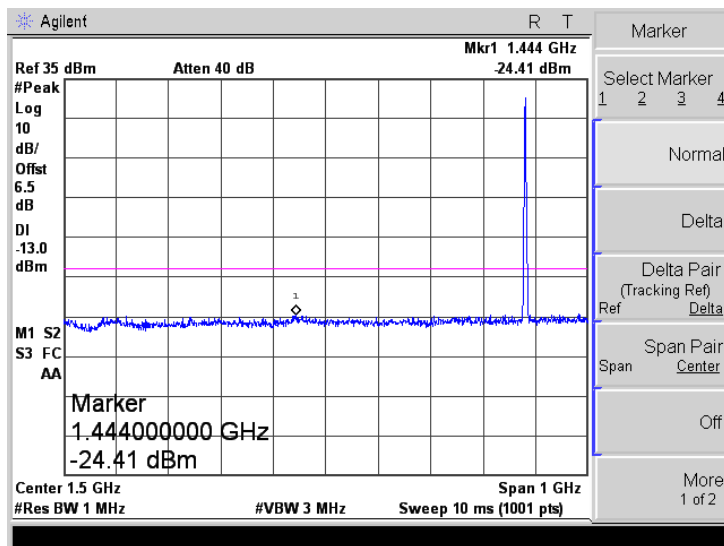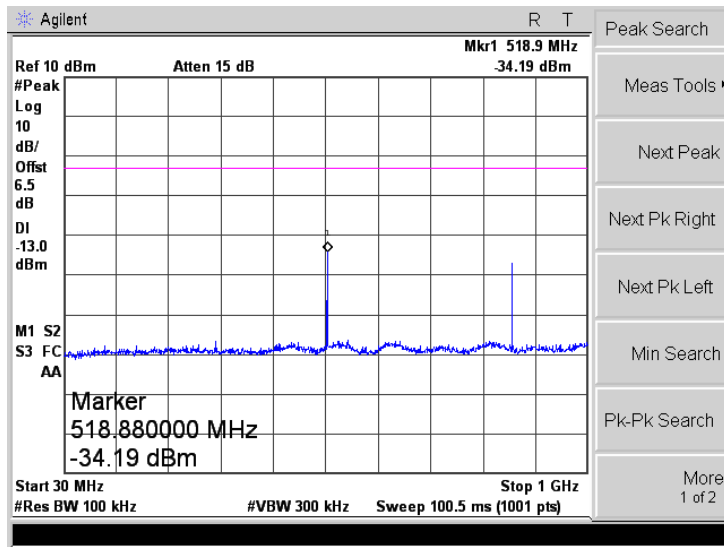




PCS1900

High Channel

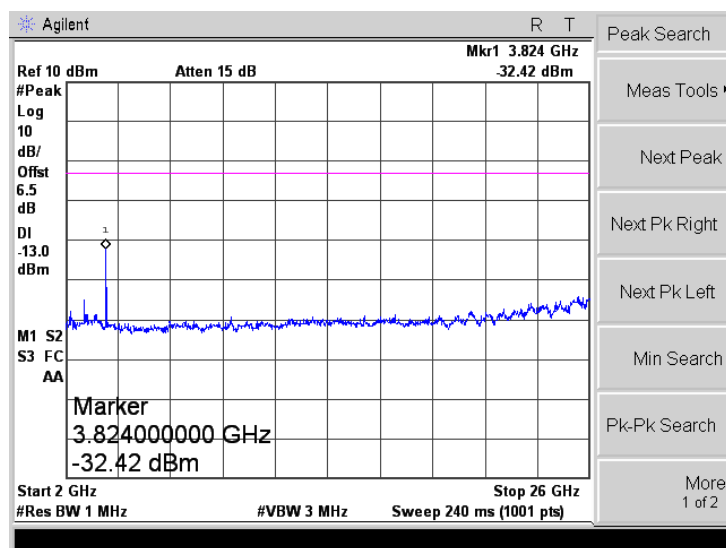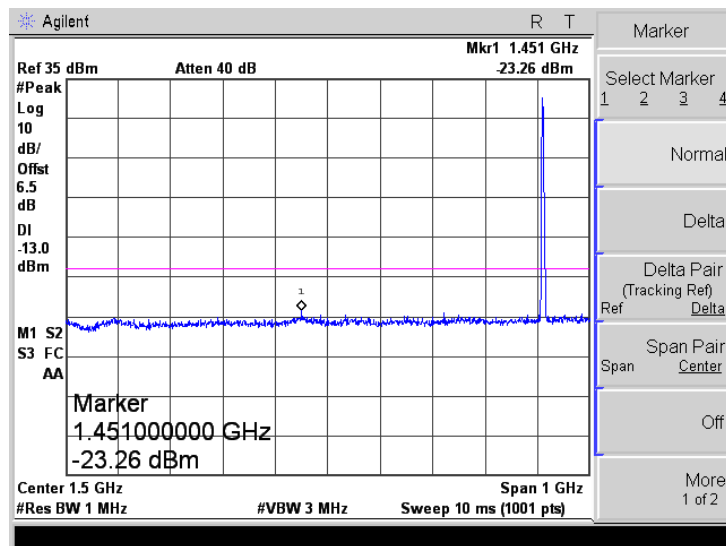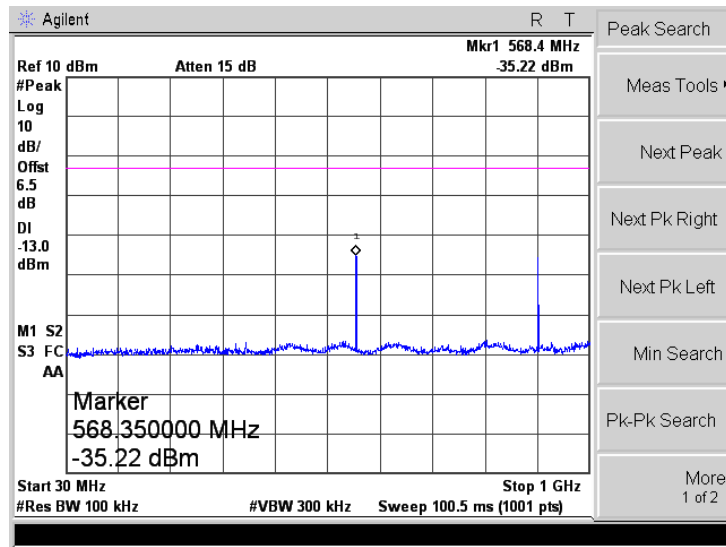


PCS1900

Low Band Emission



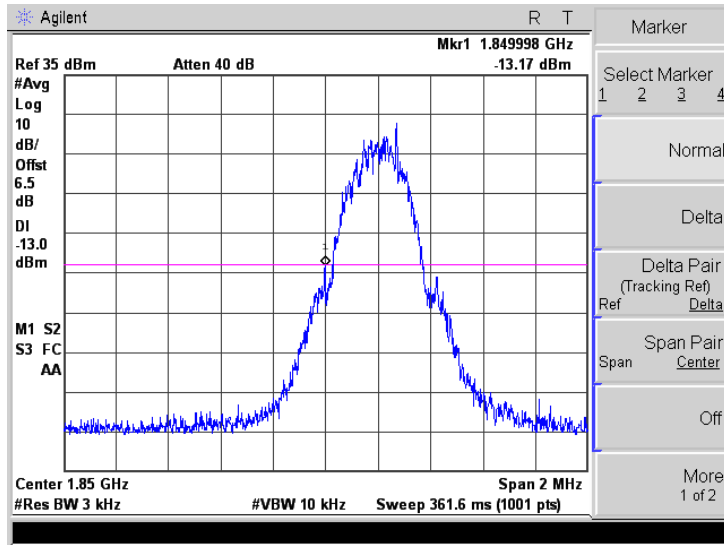


High Band Emission

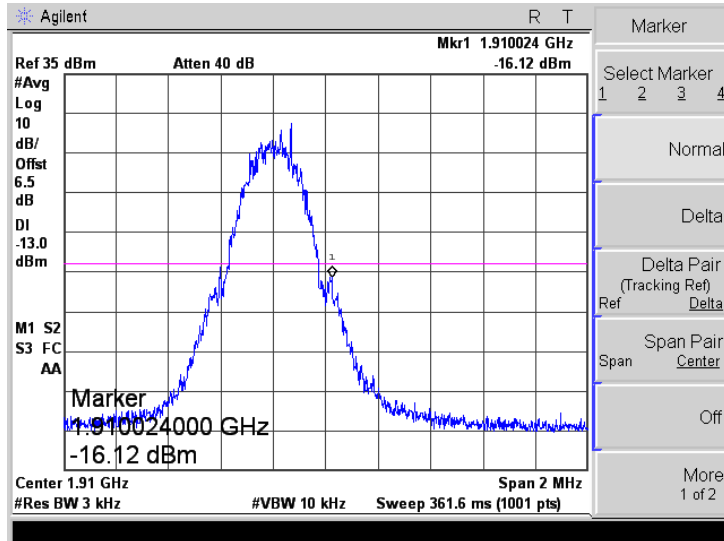




GPRS1900

Low Channel

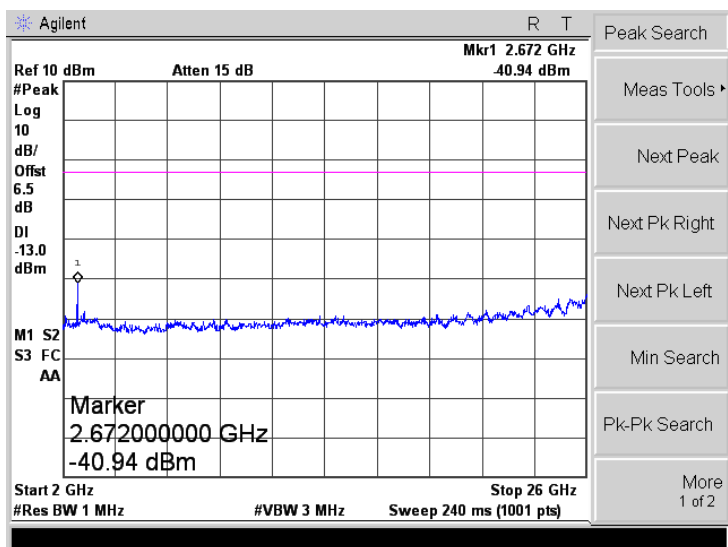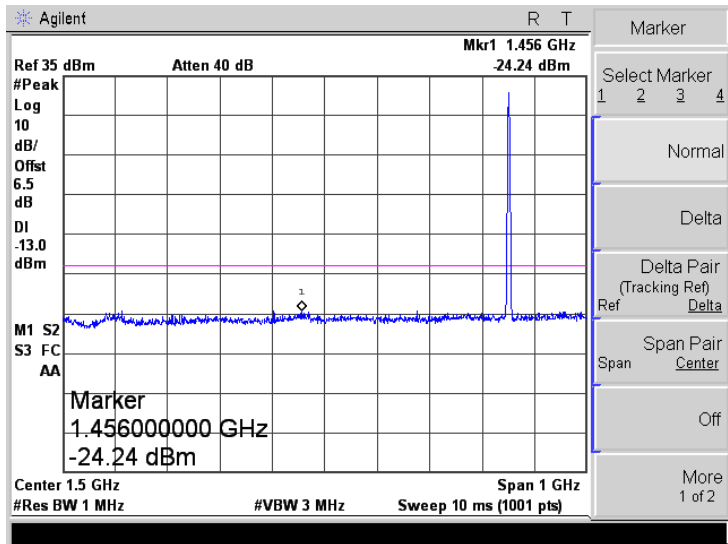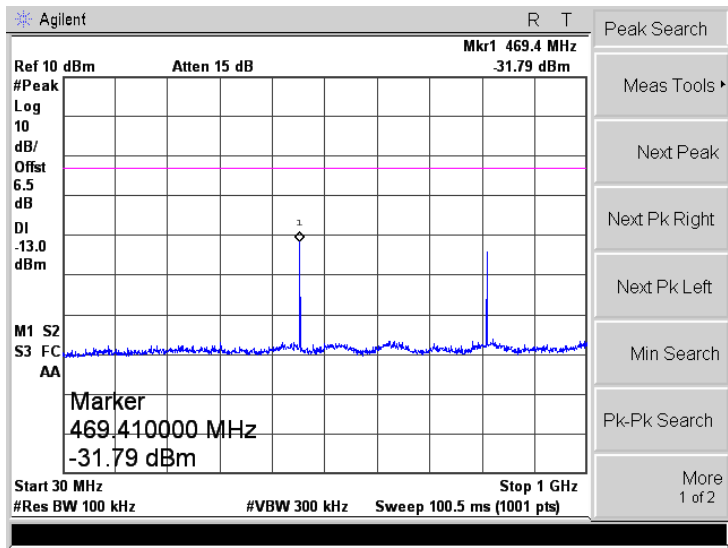




GPRS1900

Middle Channel

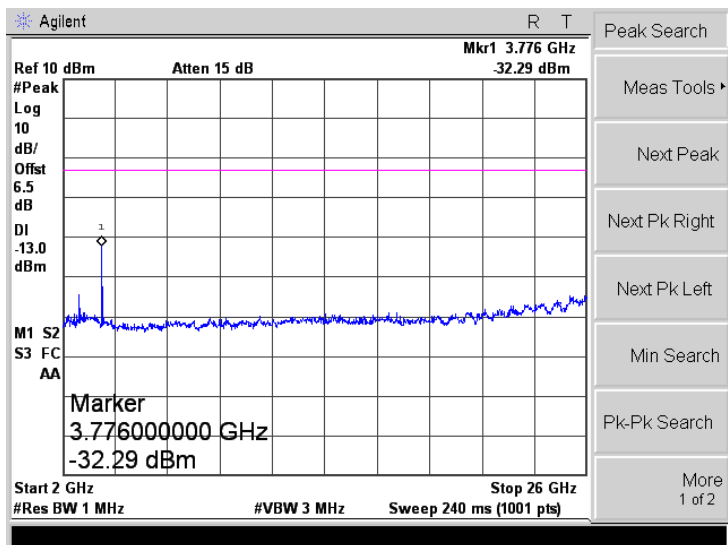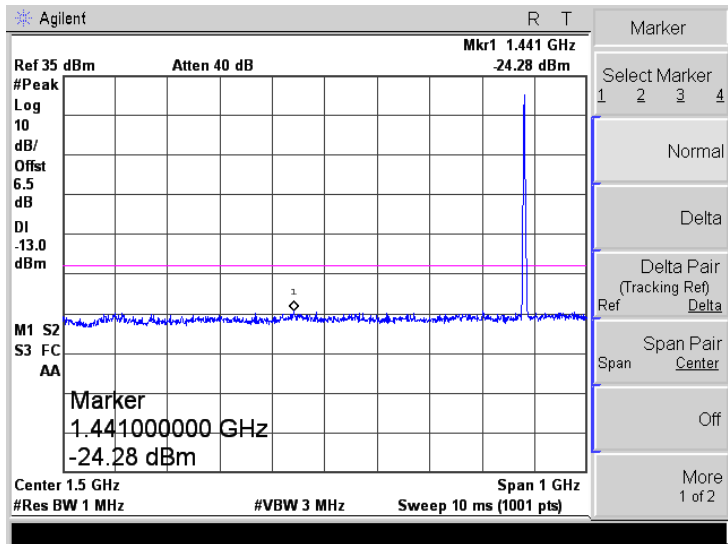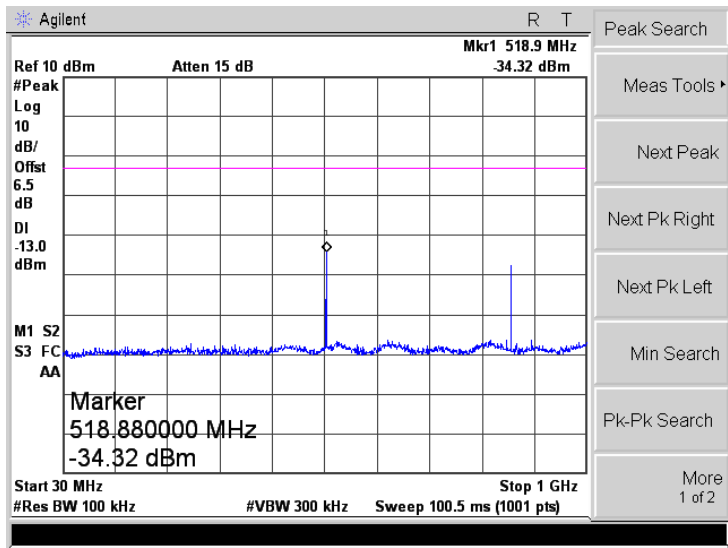


GPRS1900

High Channel

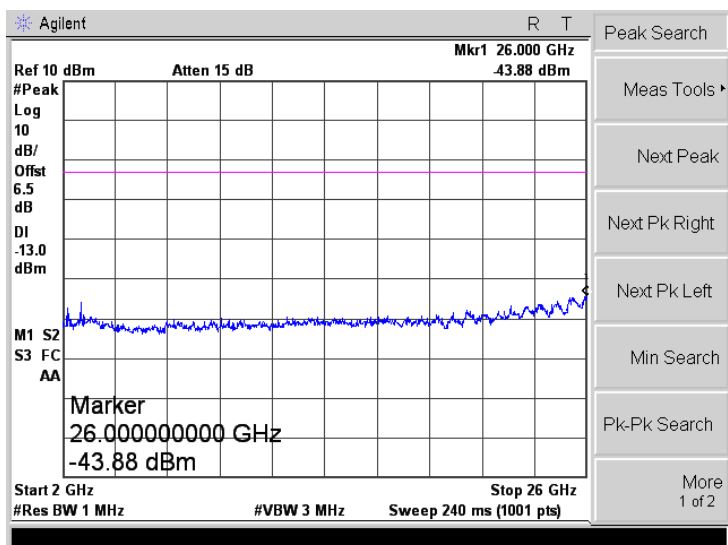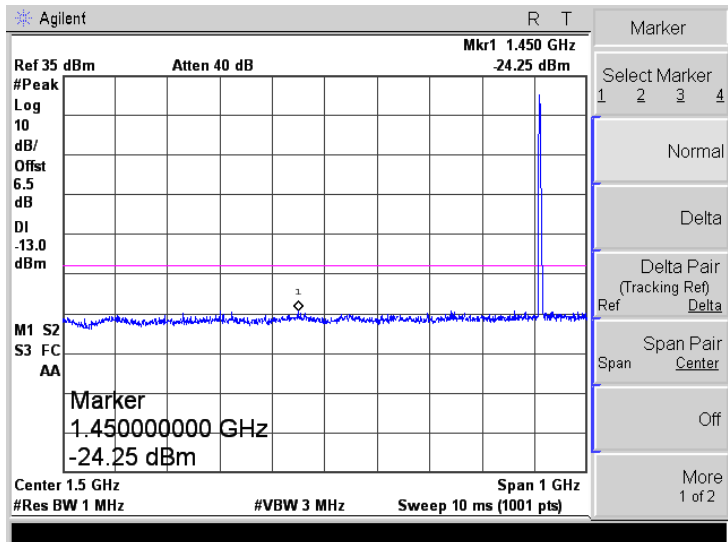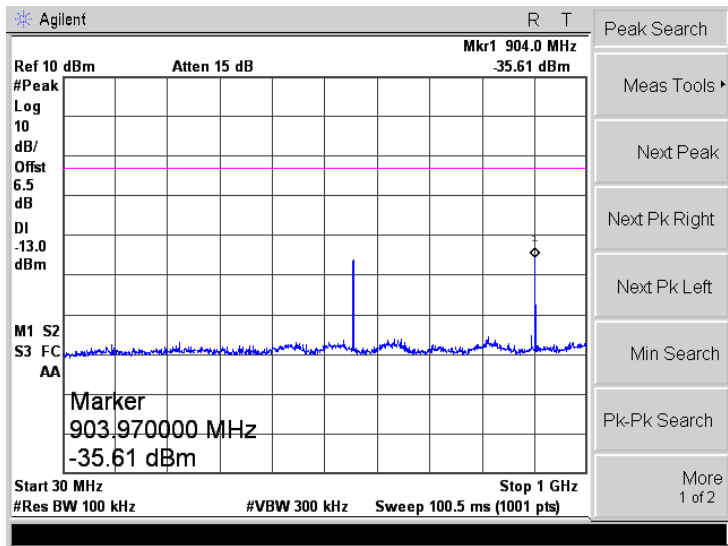


GPRS1900

Low Band Emission



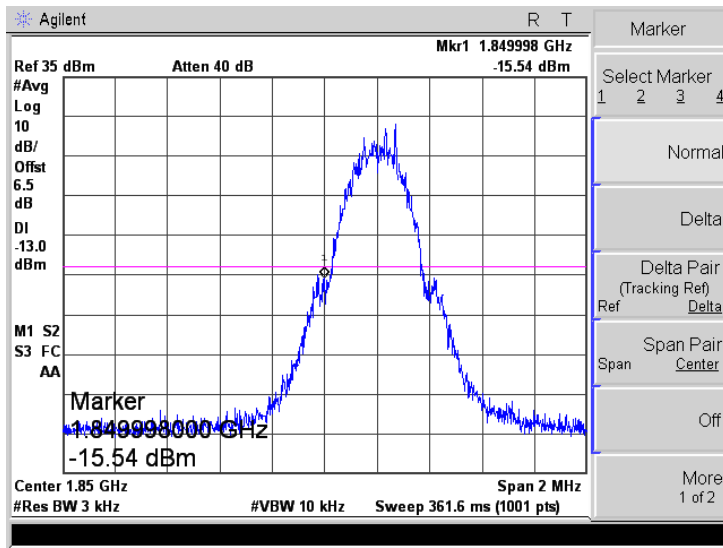


High Band Emission

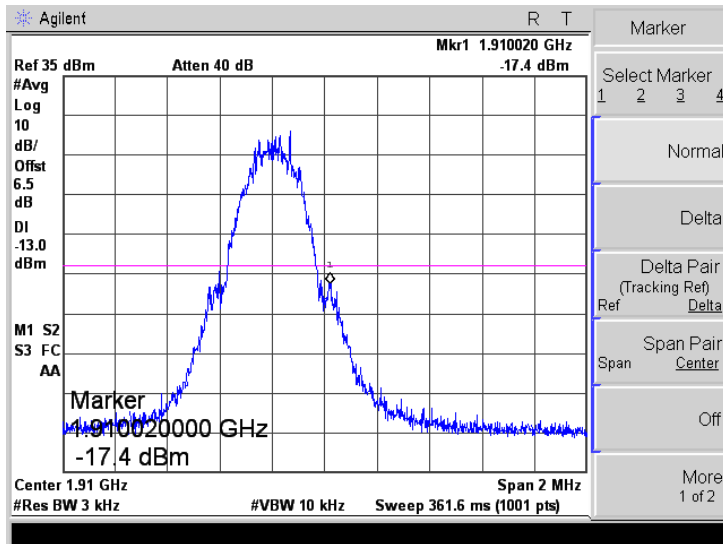




EGPRS1900

Low Channel

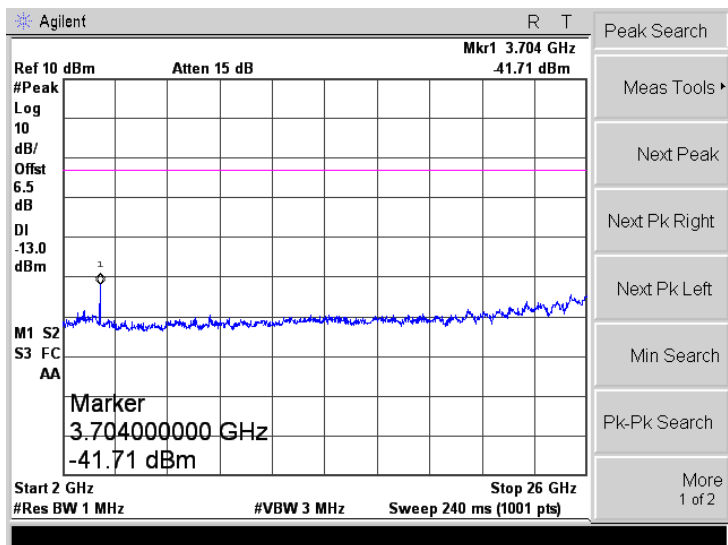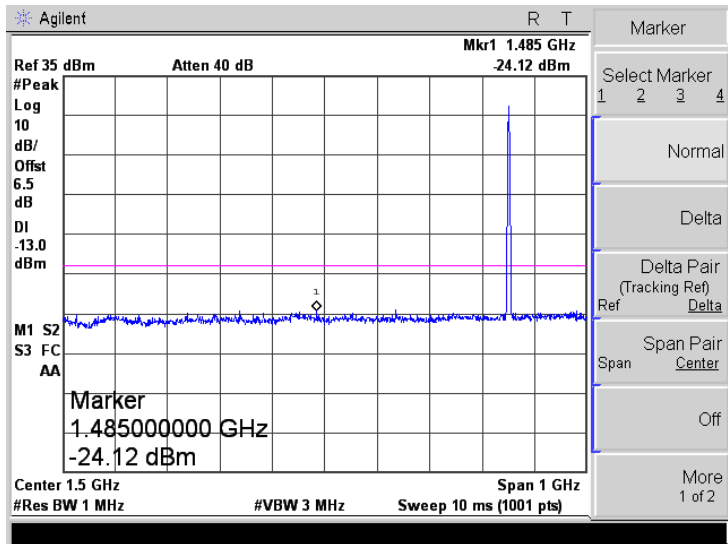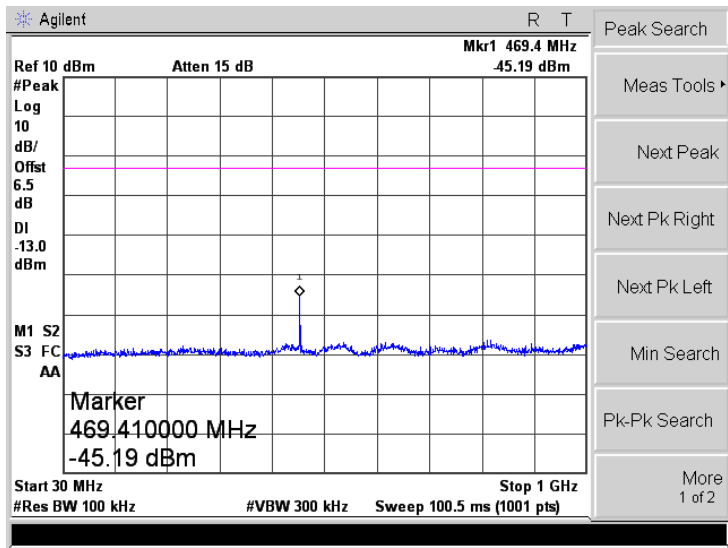

EGPRS1900




Middle Channel

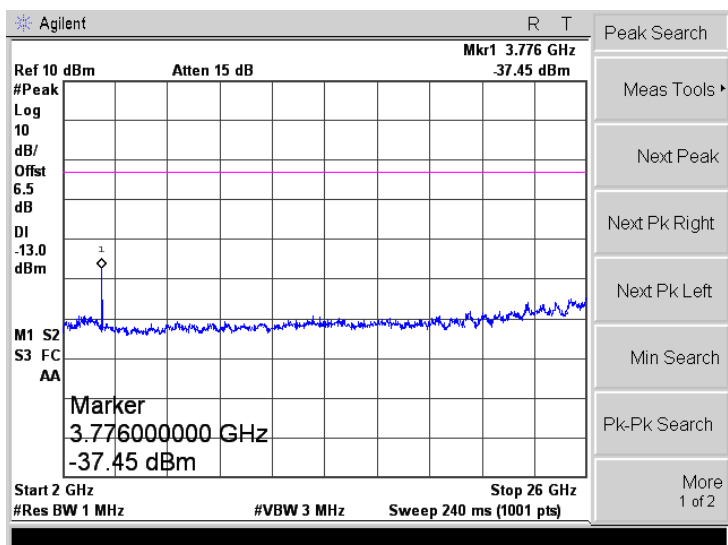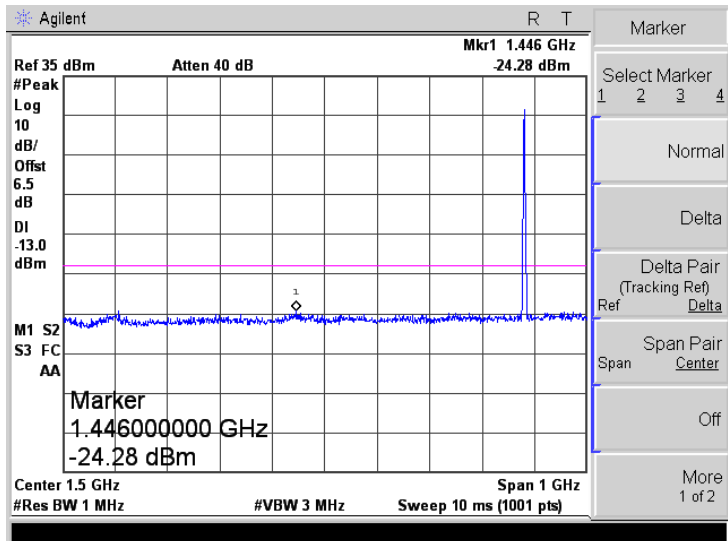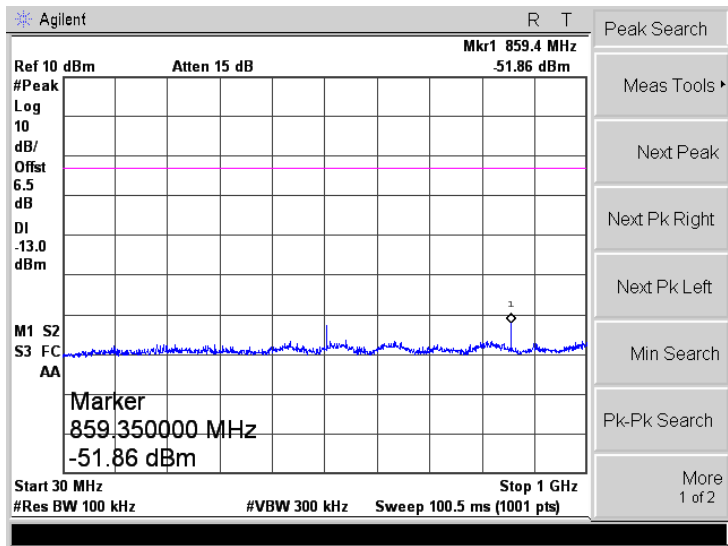




EGPRS1900

High Channel

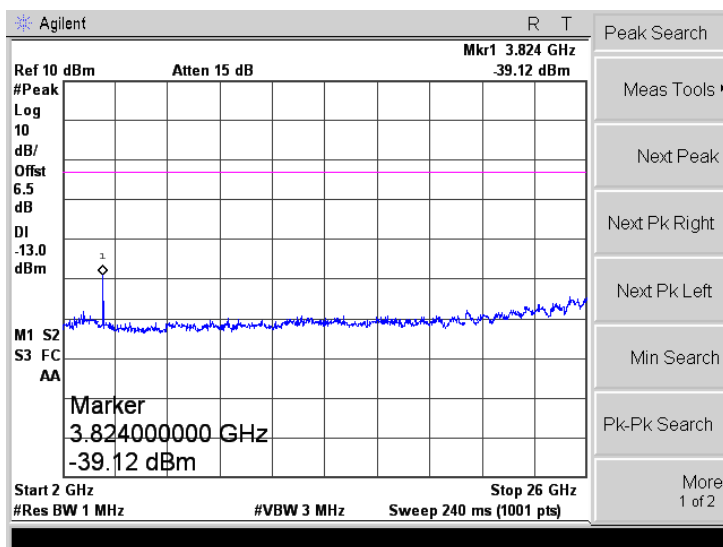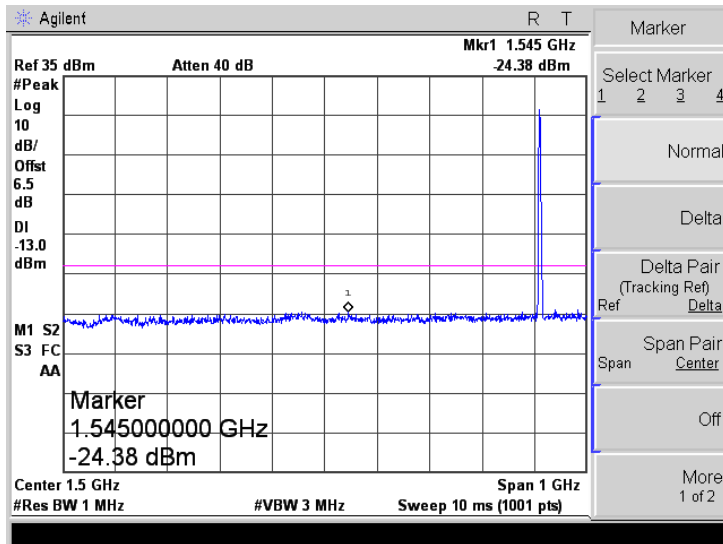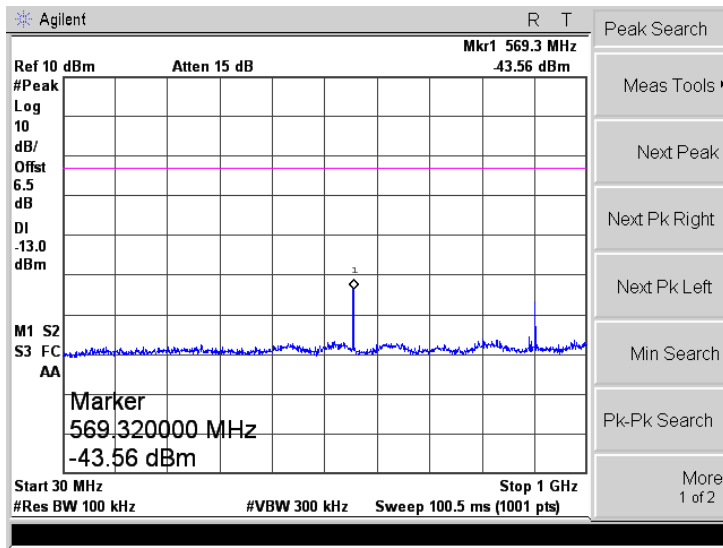


EGPRS1900

Low Band Emission


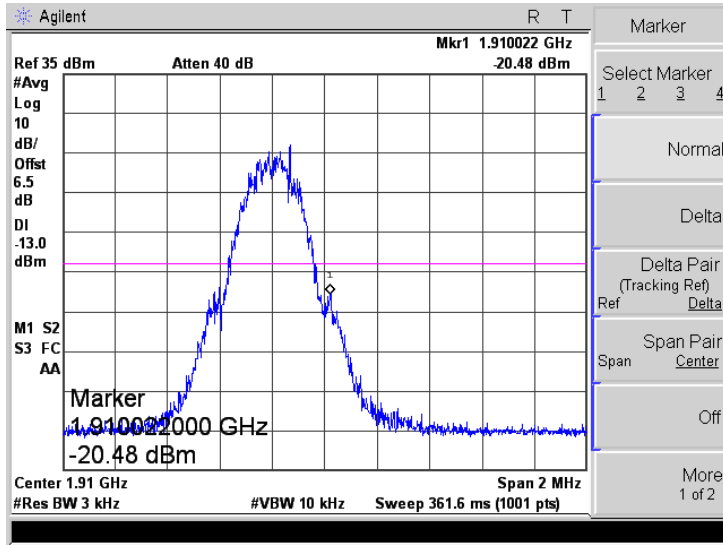


High Band Emission

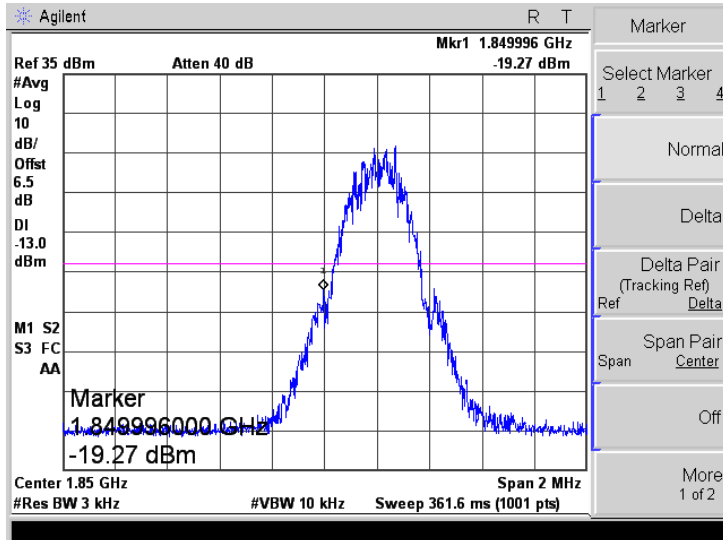



WCDMA Band V

Low Channel

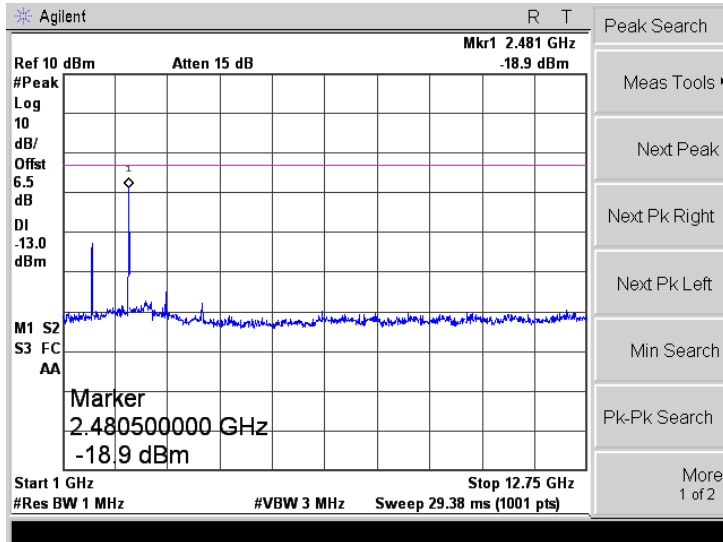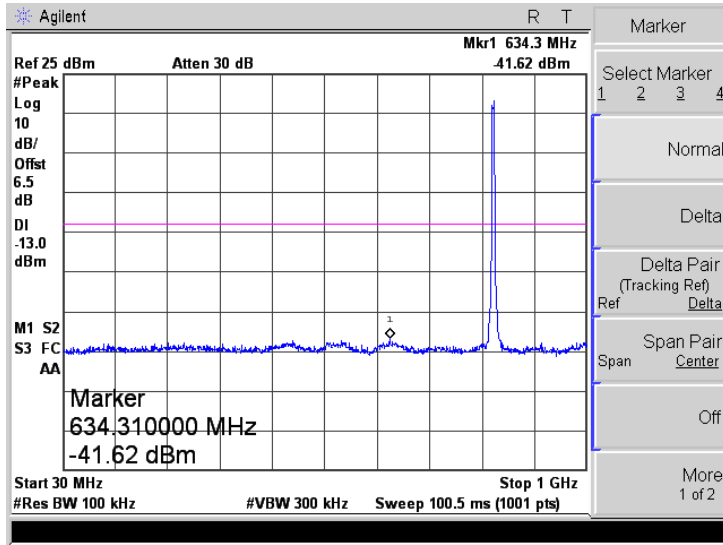



WCDMA Band V

Middle Channel

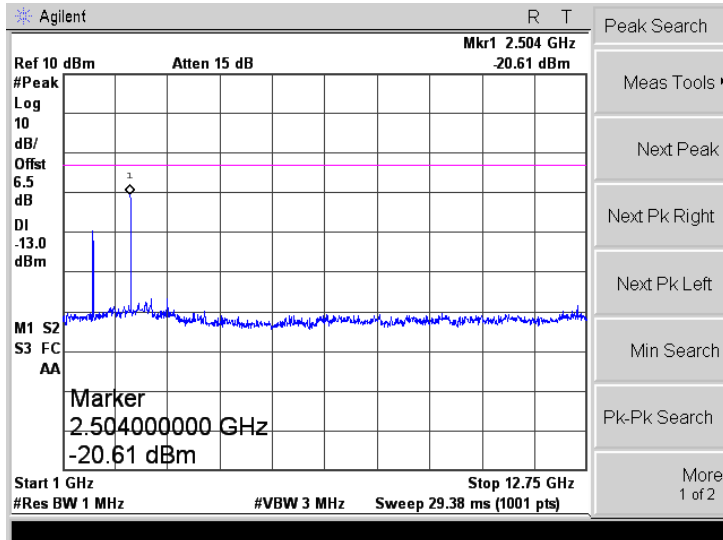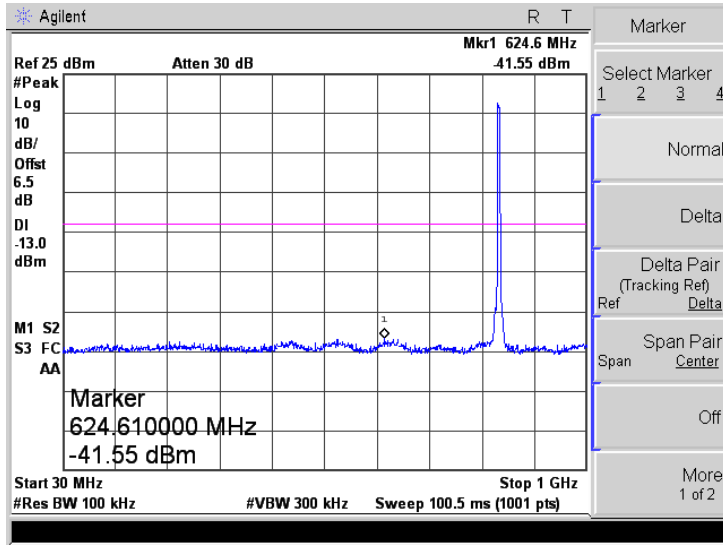


WCDMA Band V

High Channel

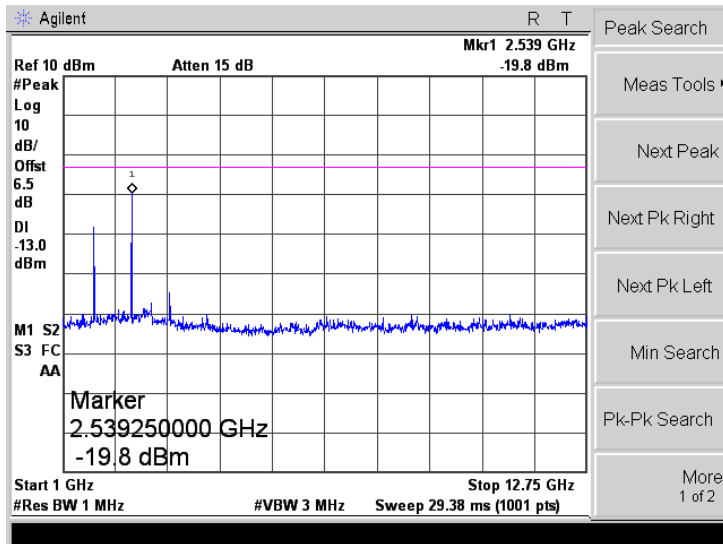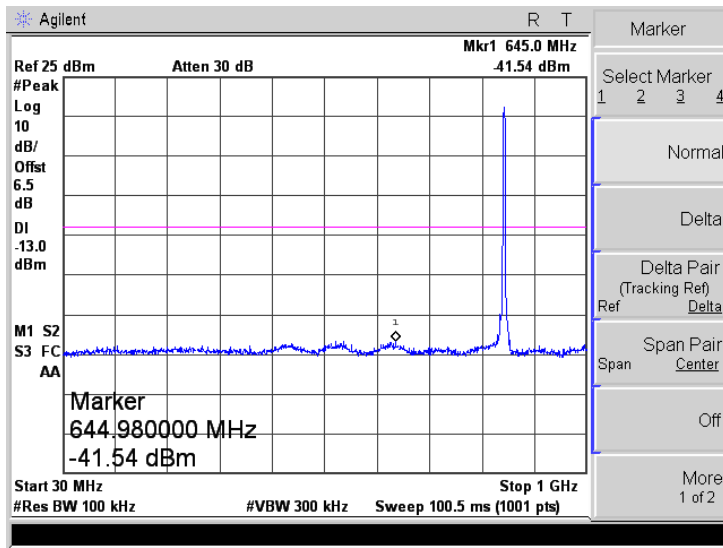


WCDMA Band V

Low Band Emission



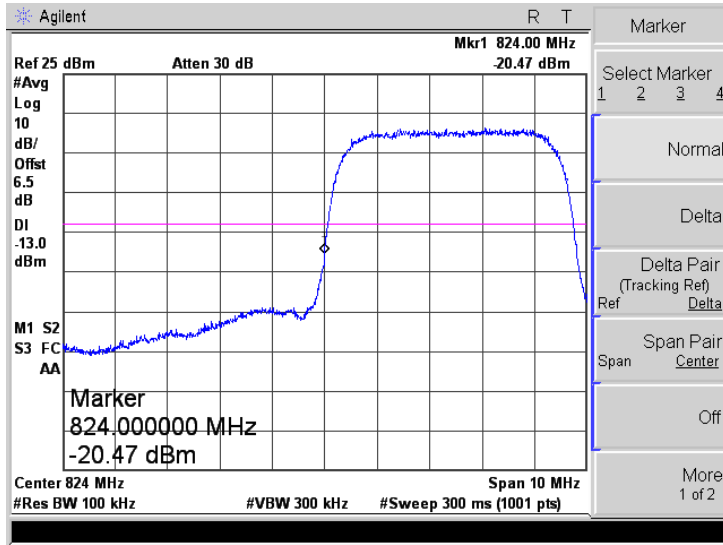


High Band Emission

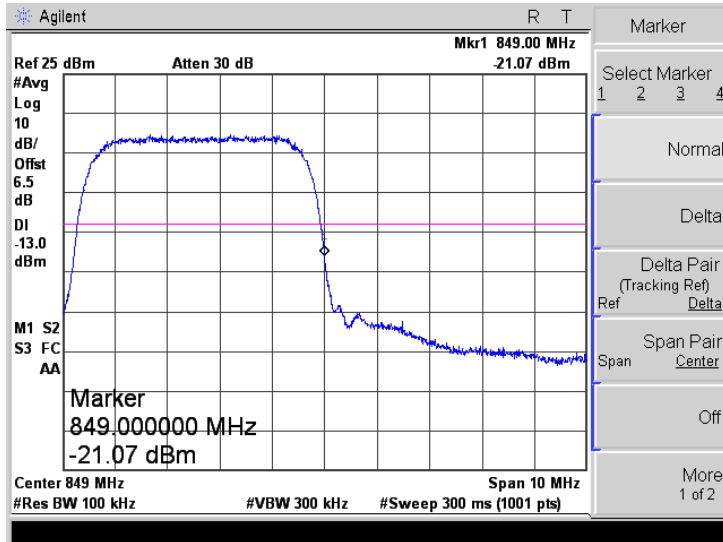




WCDMA Band II

Low Channel

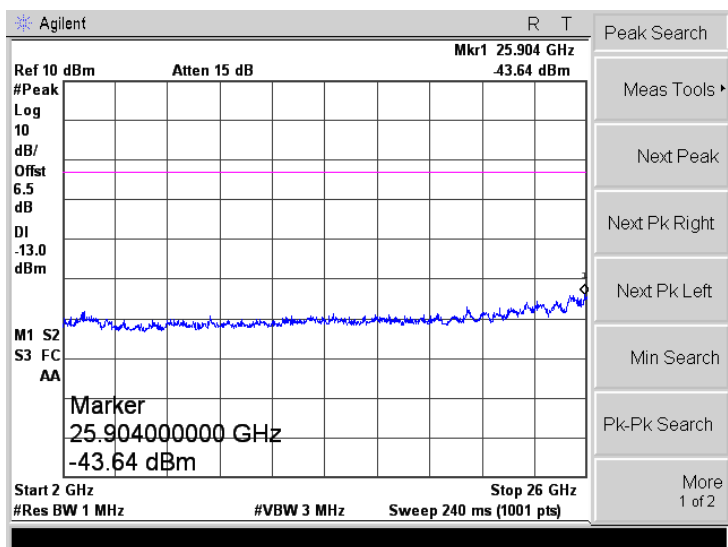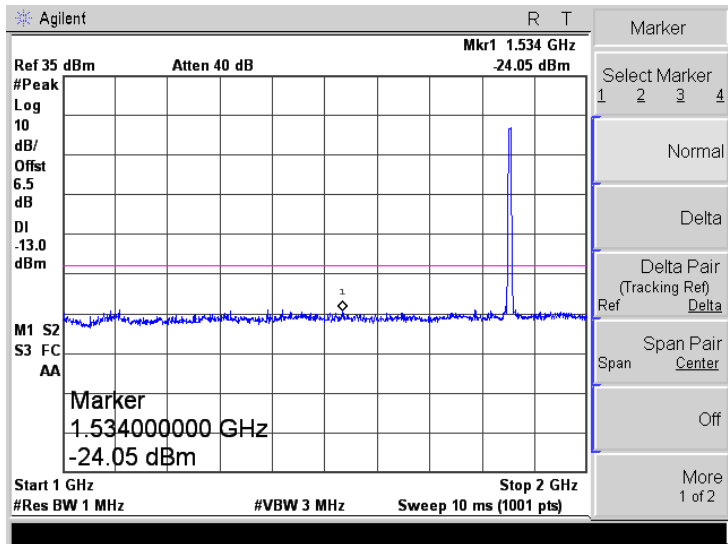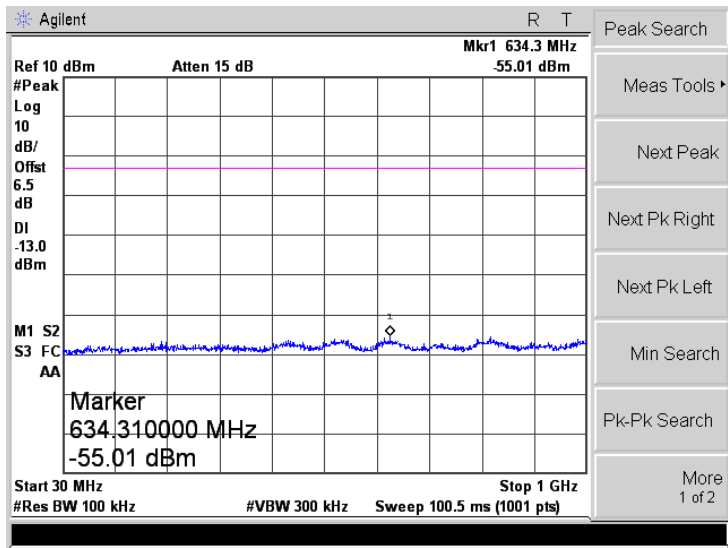

WCDMA Band II




Middle Channel

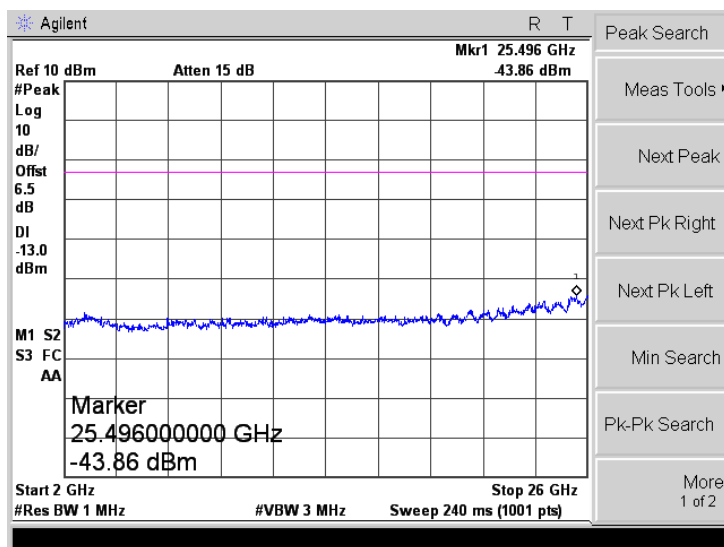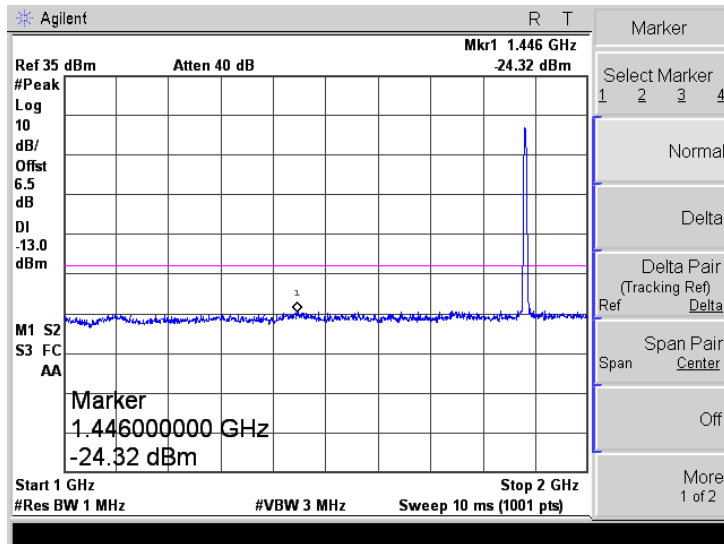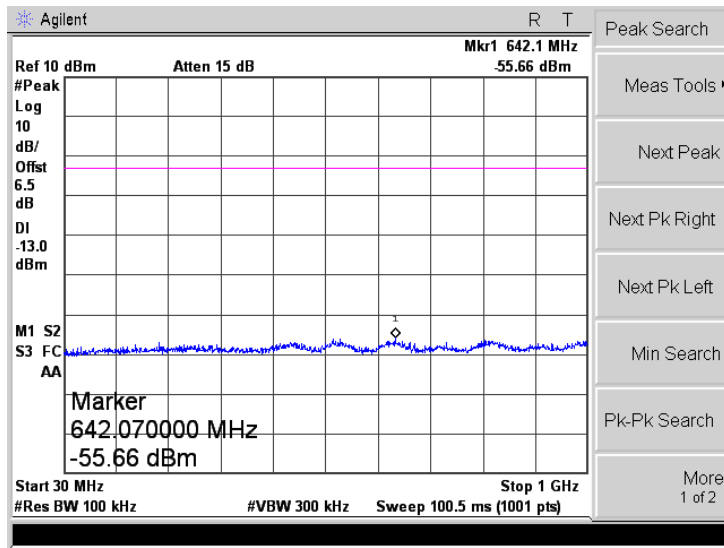




WCDMA Band II

High Channel

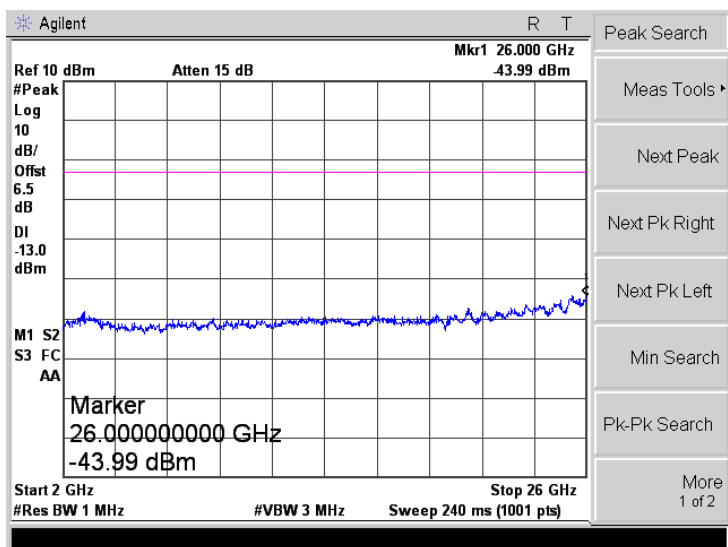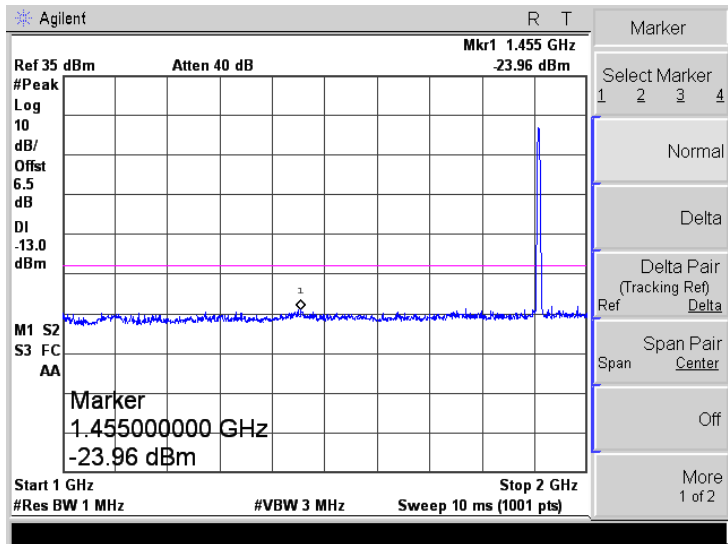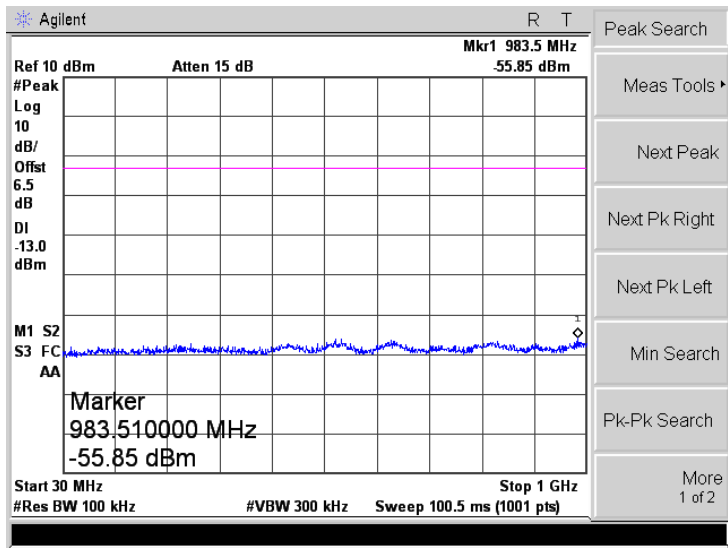


WCDMA Band II

Low Band Emission

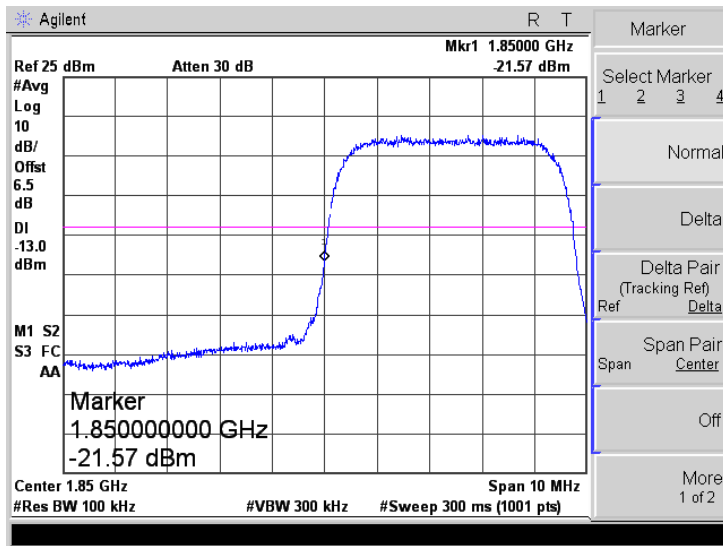

High Band Emission

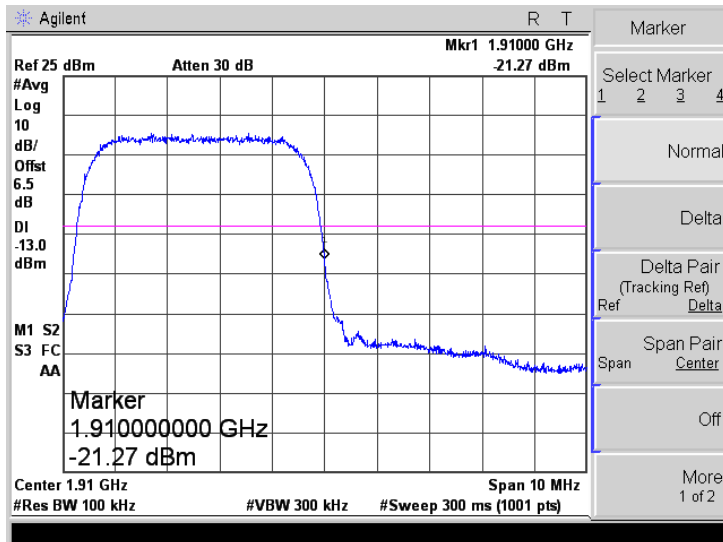

---

## 8. Spurious Radiated Emissions

---

### 8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


$$\text{Spurious attenuation limit in dB} = 43 + 10 \log_{10}(\text{power out in Watts})$$

### 8.3 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

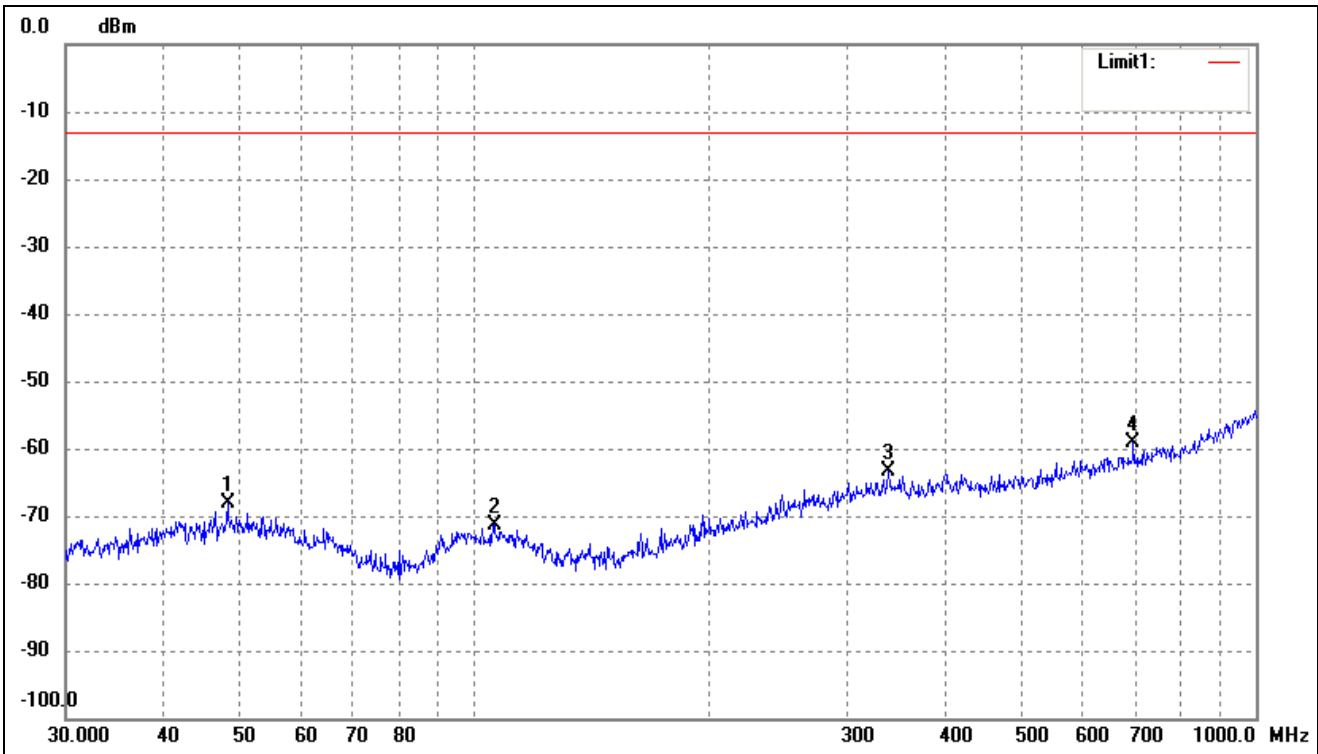


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.3318	-67.15	-0.99	-68.14	-13.00	-55.14	207	100	peak
2	106.0126	-69.13	-2.21	-71.34	-13.00	-58.34	97	100	peak
3	338.4001	-68.54	5.24	-63.30	-13.00	-50.30	112	100	peak
4	696.8567	-68.23	9.14	-59.09	-13.00	-46.09	99	100	peak

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

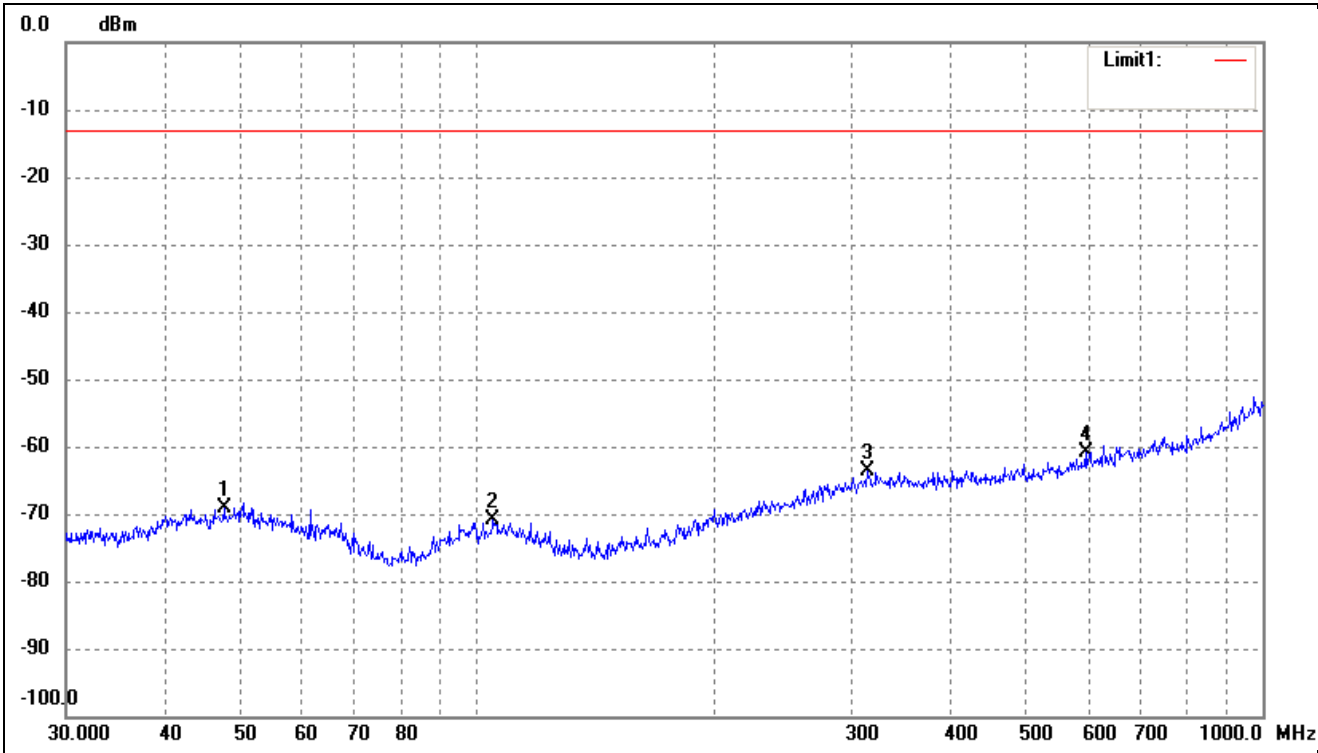


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.6586	-68.23	-1.00	-69.23	-13.00	-56.23	265	100	peak
2	104.9033	-68.62	-2.25	-70.87	-13.00	-57.87	97	100	peak
3	314.3765	-68.31	4.64	-63.67	-13.00	-50.67	70	100	peak
4	595.1329	-68.59	7.81	-60.78	-13.00	-47.78	120	100	peak

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

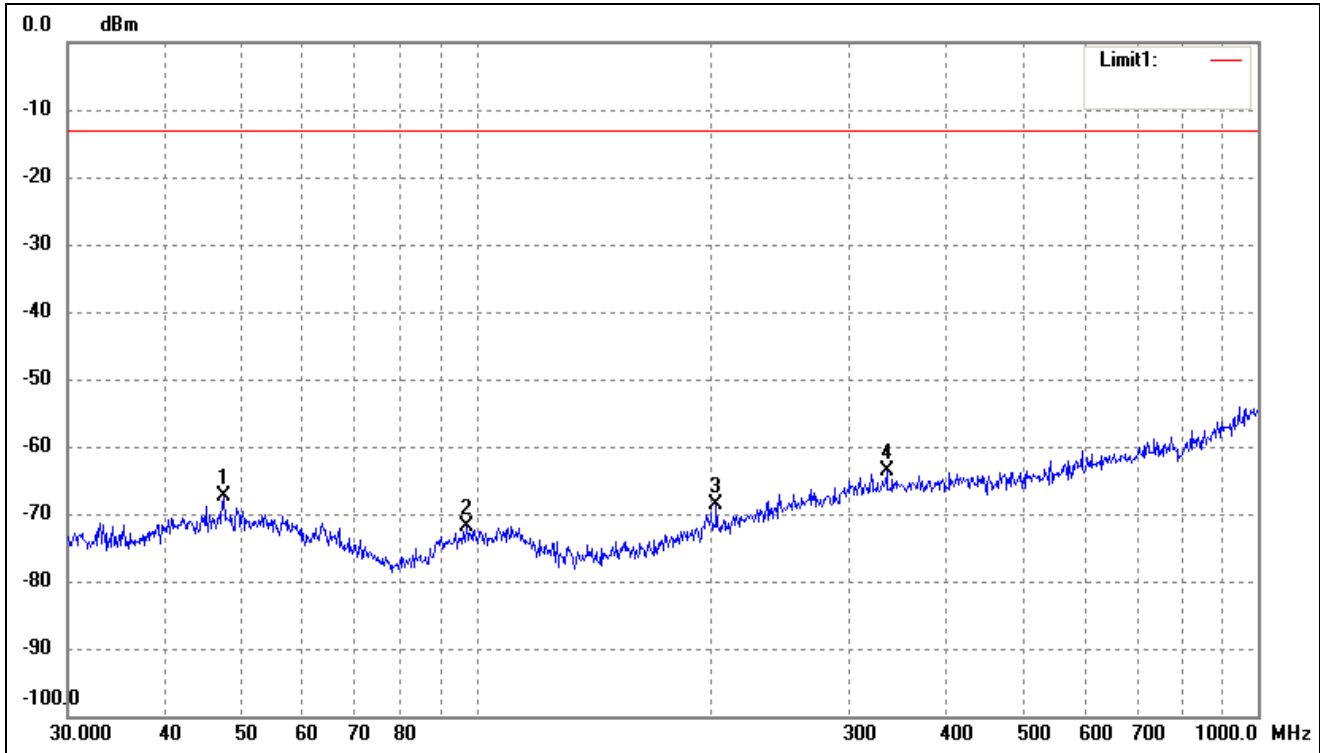

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.4918	-66.37	-1.01	-67.38	-13.00	-54.38	343	100	peak
2	97.1148	-68.82	-3.10	-71.92	-13.00	-58.92	91	100	peak
3	202.8104	-68.21	-0.40	-68.61	-13.00	-55.61	83	100	peak
4	334.8589	-68.88	5.14	-63.74	-13.00	-50.74	120	100	peak


For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

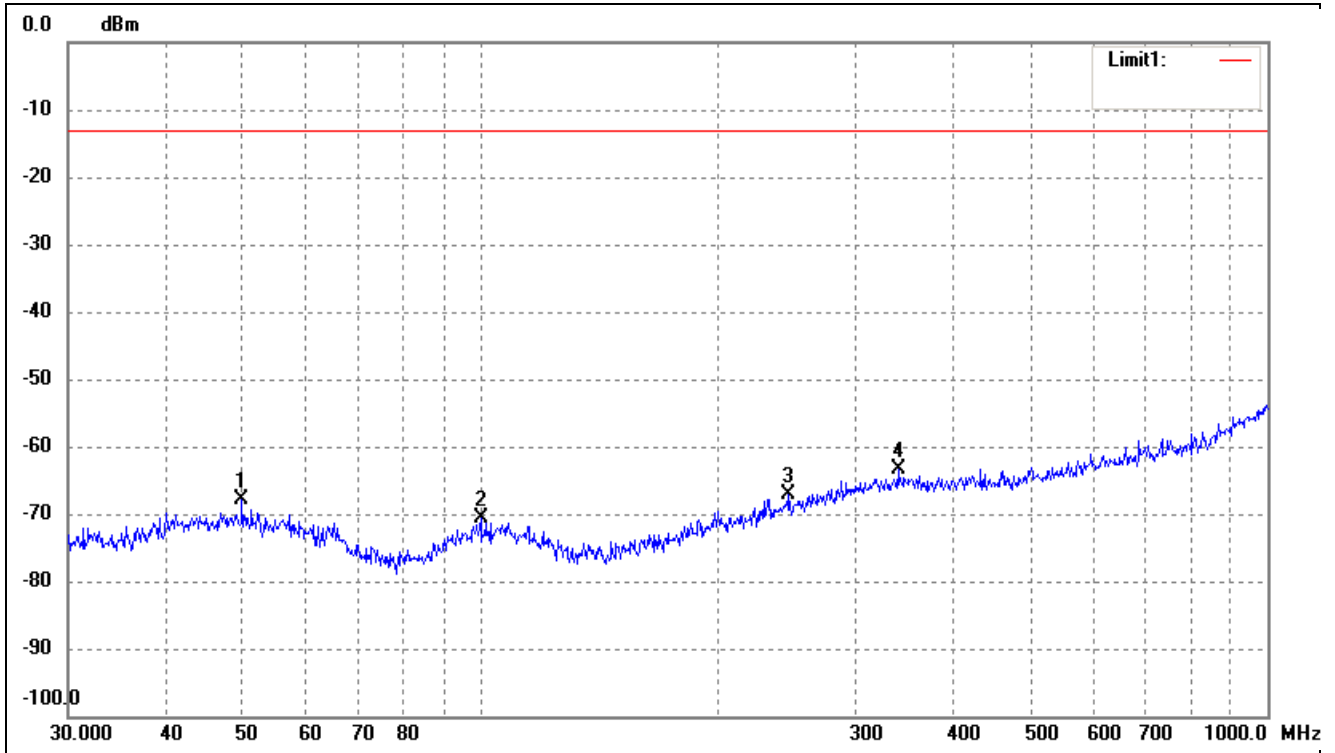

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.8814	-66.64	-1.12	-67.76	-13.00	-54.76	330	100	peak
2	100.2286	-67.91	-2.65	-70.56	-13.00	-57.56	241	100	peak
3	246.8149	-69.07	1.98	-67.09	-13.00	-54.09	97	100	peak
4	339.5888	-68.74	5.27	-63.47	-13.00	-50.47	258	100	peak

Note: Margin= (Reading+ Correct)- Limit


Test Channel	WCDMA Band V	Polarity:	Horizontal
--------------	--------------	-----------	------------

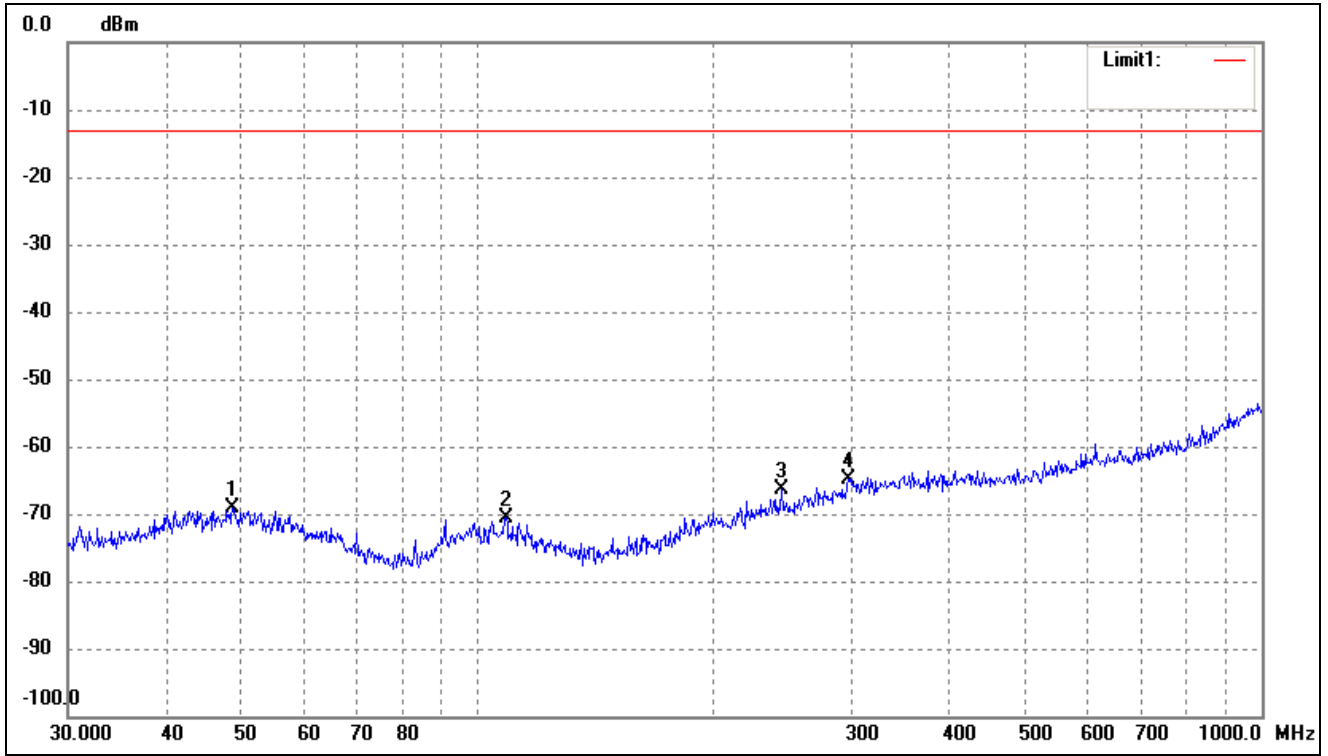

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.6719	-68.08	-1.02	-69.10	-13.00	-56.10	102	100	peak
2	108.6470	-68.49	-2.15	-70.64	-13.00	-57.64	141	100	peak
3	244.2321	-68.22	1.94	-66.28	-13.00	-53.28	141	100	peak
4	297.2241	-69.10	4.33	-64.77	-13.00	-51.77	143	100	peak




Test Channel	WCDMA Band V	Polarity:	Vertical
--------------	--------------	-----------	----------

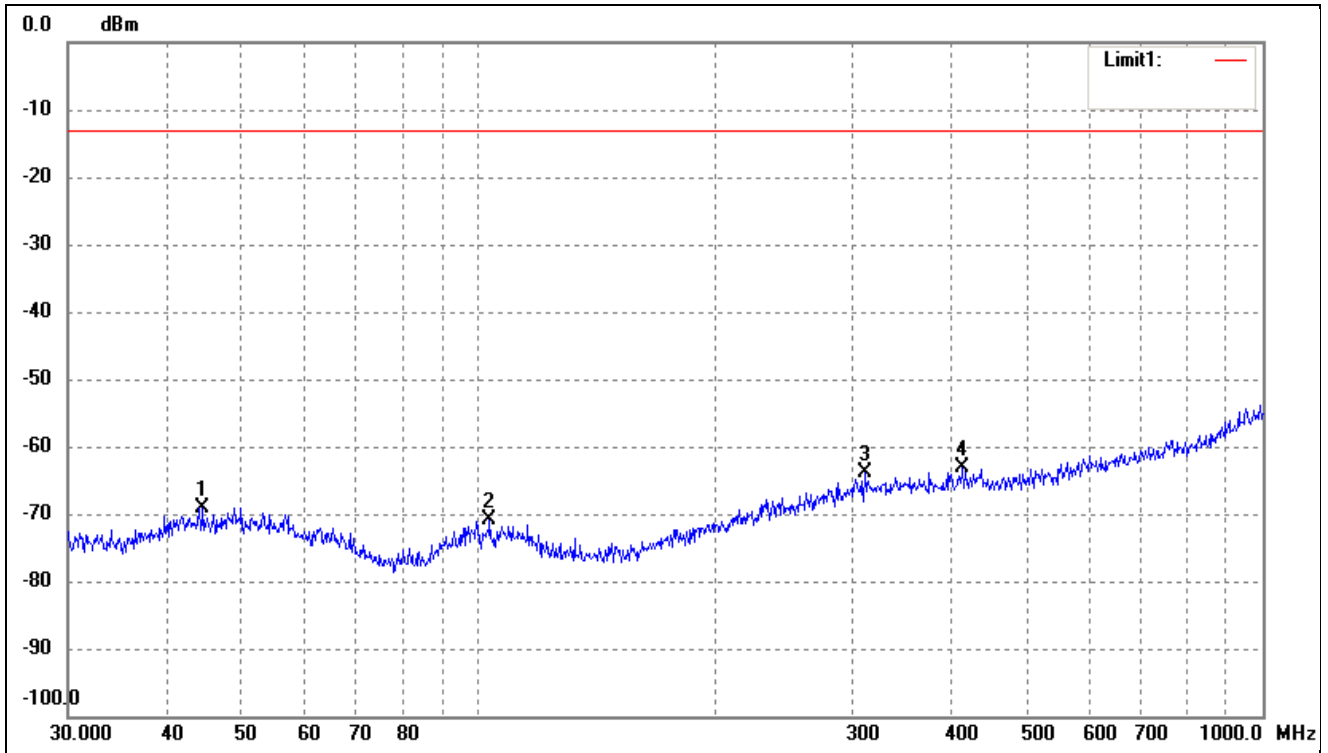

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	44.5868	-67.81	-1.20	-69.01	-13.00	-56.01	81	100	peak
2	103.4421	-68.50	-2.36	-70.86	-13.00	-57.86	160	100	peak
3	311.0867	-68.58	4.62	-63.96	-13.00	-50.96	58	100	peak
4	414.7223	-68.61	5.60	-63.01	-13.00	-50.01	120	100	peak


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band II	Polarity:	Horizontal
--------------	---------------	-----------	------------

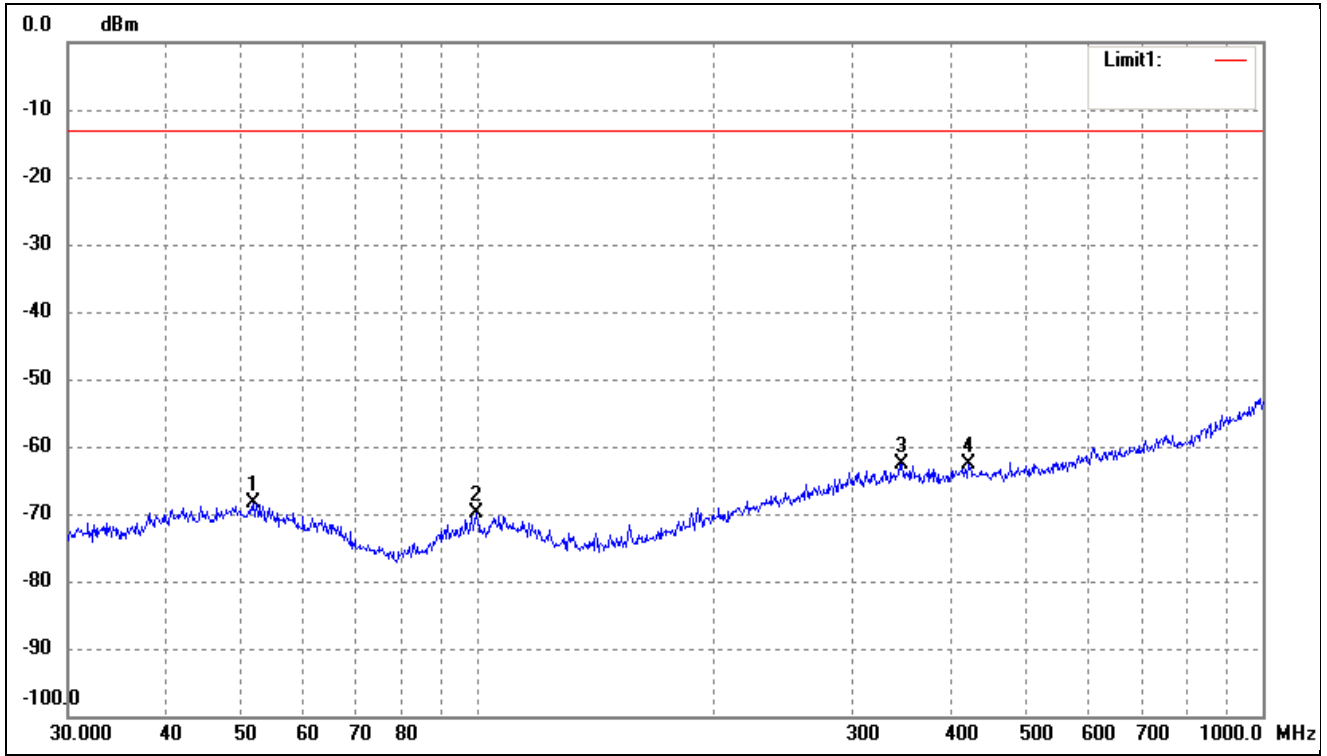

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.6616	-67.40	-1.02	-68.42	-13.00	-55.42	132	100	peak
2	99.5281	-67.18	-2.73	-69.91	-13.00	-56.91	155	100	peak
3	346.8092	-68.02	5.31	-62.71	-13.00	-49.71	101	100	peak
4	422.0577	-68.33	5.66	-62.67	-13.00	-49.67	119	100	peak

Test Channel	WCDMA Band II	Polarity:	Vertical
--------------	---------------	-----------	----------

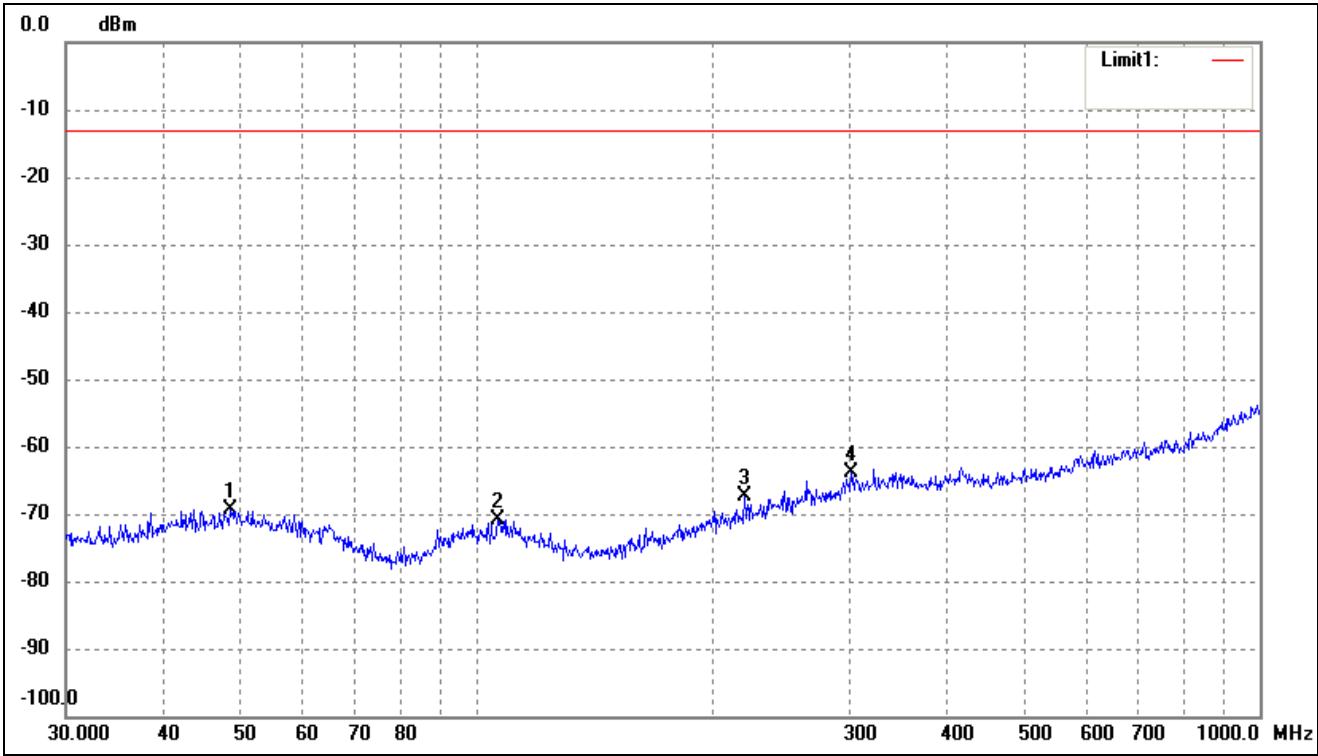

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.6719	-68.33	-1.02	-69.35	-13.00	-56.35	51	100	peak
2	106.7587	-68.56	-2.20	-70.76	-13.00	-57.76	182	100	peak
3	220.6171	-67.91	0.50	-67.41	-13.00	-54.41	104	100	peak
4	301.4224	-68.32	4.40	-63.92	-13.00	-50.92	149	100	peak

Note: Margin= (Reading+ Correct)- Limit

- Spurious Emissions Above 1GHz
- For Cellular Band\_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-37.57	4.94	-32.63	-13	-19.63	H
2472.6	-44.02	8.46	-35.56	-13	-22.56	H
1648.4	-35.26	4.94	-30.32	-13	-17.32	V
2472.6	-42.2	8.46	-33.74	-13	-20.74	V
Middle Channel (836.6MHz)						
1673.2	-34.38	5.11	-29.27	-13	-16.27	H
2509.8	-43.52	8.54	-34.98	-13	-21.98	H
1673.2	-35.42	5.11	-30.31	-13	-17.31	V
2509.8	-43.14	8.54	-34.6	-13	-21.6	V
High Channel (848.8MHz)						
1697.6	-34.95	5.25	-29.7	-13	-16.7	H
2546.4	-43.46	8.57	-34.89	-13	-21.89	H
1697.6	-35.56	5.25	-30.31	-13	-17.31	V
2546.4	-41.02	8.57	-32.45	-13	-19.45	V

- For PCS Band\_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-39.99	10.54	-29.45	-13	-16.45	H
5550.6	-49.08	13.37	-35.71	-13	-22.71	H
3700.4	-39.05	10.54	-28.51	-13	-15.51	V
5550.6	-47.31	13.37	-33.94	-13	-20.94	V
Middle Channel (1880MHz)						
3760.0	-42.9	10.64	-32.26	-13	-19.26	H
5640.0	-49.61	13.54	-36.07	-13	-23.07	H
3760.0	-40.9	10.64	-30.26	-13	-17.26	V
5640.0	-49.93	13.54	-36.39	-13	-23.39	V
High Channel (1909.8MHz)						
3819.6	-42.42	10.74	-31.68	-13	-18.68	H
5729.4	-49.7	13.71	-35.99	-13	-22.99	H
3819.6	-40.9	10.74	-30.16	-13	-17.16	V
5729.4	-46.98	13.71	-33.27	-13	-20.27	V

## ➤ For WCDMA Band V Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (826.4MHz)						
1652.8	-37.72	4.94	-32.78	-13	-19.78	H
2479.2	-44.59	8.46	-36.13	-13	-23.13	H
1652.8	-35.47	4.94	-30.53	-13	-17.53	V
2479.2	-43.25	8.46	-34.79	-13	-21.79	V
Middle Channel (836.6MHz)						
1672.8	-37.22	5.11	-32.11	-13	-19.11	H
2509.2	-41.67	8.54	-33.13	-13	-20.13	H
1672.8	-37.72	5.11	-32.61	-13	-19.61	V
2509.2	-43.55	8.54	-35.01	-13	-22.01	V
High Channel (846.6MHz)						
1693.2	-35.48	5.25	-30.23	-13	-17.23	H
2539.8	-44.21	8.57	-35.64	-13	-22.64	H
1693.2	-36.56	5.25	-31.31	-13	-18.31	V
2539.8	-41.15	8.57	-32.58	-13	-19.58	V

## ➤ For WCDMA Band II Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
3704.8	-36.65	10.17	-26.48	-13	-13.48	H
5557.2	-41.51	14.69	-26.82	-13	-13.82	H
3704.8	-34.87	10.17	-24.7	-13	-11.7	V
5557.2	-42.28	14.69	-27.59	-13	-14.59	V
Middle Channel (1880MHz)						
3760.8	-37.47	10.26	-27.21	-13	-14.21	H
5640.0	-44.55	14.78	-29.77	-13	-16.77	H
3760.8	-37.93	10.26	-27.67	-13	-14.67	V
5640.0	-41.42	14.78	-26.64	-13	-13.64	V
High Channel (1907.6MHz)						
3815.2	-34.74	10.59	-24.15	-13	-11.15	H
5722.8	-44.55	15.03	-29.52	-13	-16.52	H
3815.2	-36.35	10.59	-25.76	-13	-12.76	V
5722.8	-42.04	15.03	-27.01	-13	-14.01	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 9. Frequency Stability

---

### 9.1 Standard Applicable

According to §22.355, §24.235 the limit is 2.5ppm.

### 9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

### 9.3 Summary of Test Results/Plots

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B5 middle channel

2. Normal Voltage NV=DC3.7V; Low Voltage LV=DC3.5V;High Voltage HV=DC4.35V

## ➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	102	0.1219	2.50	Pass
	-20	115	0.1375		
	-10	122	0.1458		
	0	118	0.1410		
	10	112	0.1339		
	20	126	0.1506		
	30	135	0.1614		
	40	121	0.1446		
	50	98	0.1171		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	115	0.0612	2.50	Pass
	-20	125	0.0665		
	-10	136	0.0723		
	0	108	0.0574		
	10	115	0.0612		
	20	154	0.0819		
	30	121	0.0644		
	40	124	0.0660		
	50	114	0.0606		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	111	0.1327	2.50	Pass
	-20	98	0.1171		
	-10	89	0.1064		
	0	105	0.1255		
	10	120	0.1434		
	20	97	0.1159		
	30	99	0.1183		
	40	109	0.1303		
	50	113	0.1351		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	97	0.0516	2.50	Pass
	-20	89	0.0473		
	-10	86	0.0457		
	0	96	0.0511		
	10	92	0.0489		
	20	87	0.0463		
	30	86	0.0457		
	40	85	0.0452		
	50	87	0.0463		

➤ Frequency stability V.S. Voltage measurement

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	101	0.1207	2.50	Pass
	NV	112	0.1339		
	LV	121	0.1446		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		



25	HV	95	0.0505	2.50	Pass
	NV	88	0.0468		
	LV	99	0.0527		
Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	
		Hz	ppm	Result	
25	HV	106	0.1267	2.50	Pass
	NV	108	0.1291		
	LV	112	0.1339		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	110	0.0585	2.50	Pass
	NV	115	0.0612		
	LV	107	0.0569		

\*\*\*\*\* END OF REPORT \*\*\*\*\*