

FCC TEST REPORT

For

Mobile Phone

Model Number: L575

FCC ID: RQQHLT-GL5H0

Report Number : WT158003393

Test Laboratory : Shenzhen Academy of Metrology and Quality
Inspection
National Digital Electronic Product Testing Center
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan,
Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

Test report declaration

Applicant : HYUNDAI CORPORATION
Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea
Manufacturer : Gionee Communication Equipment Co.,Ltd.
Address : 21/F,Times Technology Building,No. 7028,Shennan Avenue,
Futian District,Shenzhen,China
EUT Description : Mobile Phone
Model No : L575
Trade mark : HYUNDAI
Serial Number : /
FCC ID : RQQHLT-GL5H0

Test Standards:

FCC PART 22H , 24E AND 27 (2014)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-D (2010) & KDB971168 and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 22H , 24E AND 27.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer: 陈司林 Date: Aug.22, 2015
(Chen Silin 陈司林)
Checked by: 林奕翔 Date: Aug.22, 2015
(Lin Yixiang 林奕翔)
Approved by: 林斌 Date: Aug.22, 2015
(Lin Bin 林斌)

TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. GENERAL INFORMATION	5
1.1. Report information.....	5
1.2. Laboratory Accreditation and Relationship to Customer	5
1.3. Measurement Uncertainty.....	6
2. PRODUCT DESCRIPTION	7
2.1. EUT Description	7
2.2. Related Submittal(s) / Grant (s)	8
2.3. Operating Condition of EUT	8
2.4. Support Equipment List.....	21
2.5. Test Conditions.....	21
2.6. Special Accessories.....	21
2.7. Equipment Modifications.....	21
3. TEST EQUIPMENT USED	22
4. TEST RESULTS	23
4.1. RF Power Output.....	23
4.2. Peak to Average Ratio	28
4.3. Occupied Bandwidth/Emission Bandwidth.....	31
4.4. Spurious Emission at Antenna Terminal	66
4.5. Spurious Emissions Radiated	284
4.6. Frequency Stability.....	315

TEST Results Summary

Table 1 Test Results Summary

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	22.913 24.232 27.50(d) 27.50 (h)	Effective Radiated Power of Transmitter	PASS
2.1046	22.913 24.232(b) 27.50(d) 27.50 (h)	Conducted Power of Transmitter	PASS
2.1046	24.232(d) 27.50(d) 27.50 (h)	Peak to Average Radio	PASS
2.1049	22.917(b) 24.238(b) 27.53	Occupied Bandwidth	PASS
2.1051	22.917 24.238 27.53	Spurious Emission at Antenna Terminal	PASS
2.1053	22.917 24.238 27.53	Radiated Spurious Emissions	PASS
2.1055	22.355 24.235 27.54	Frequency Stability	PASS

CFR 47 (FCC) part 22 subpart H, part 24 subpart E and part 27 .

Remark: "N/A" means "Not applicable."

The tests documented in this report were performed in accordance with ANSI/TIA-603-D (2010) & KDB971168, FCC CFR 47 Part 2, Part 22 ,Part 24 and Part 27.

1. GENERAL INFORMATION

1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.
- 1.1.2. The samples mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

1.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at Bldg. of Metrology & Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guangdong, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 446246 806614 994606(semi anechoic chamber).

The Laboratory is listed in Voluntary Control Council for Interference by Information Technology Equipment (VCCI), and the registration number are R-1974(open area test site) , R-1966(semi anechoic chamber),C-2117(mains ports conducted interference measurement) and T-180(telecommunication ports conducted interference measurement).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is IC4174.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

1.3. Measurement Uncertainty

For a 95% confidence level ($k = 2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Radiated Emission

30MHz~1000MHz 4.5dB

1GHz~26.5GHz 4.6dB

2. PRODUCT DESCRIPTION

2.1.EUT Description

Table 2 Specification of the Equipment under Test

Product Type:	Mobile Phone		
Hardware Version:	L575_Mainboard_P3		
Software Version :	L575_0303_V5647		
FCC-ID:	RQQHLT-GL5H0		
Frequency Range	GSM850: TX 824MHz~849MHz RX 869MHz~894MHz PCS1900: TX 1850MHz~1910MHz RX 1930MHz~1990MHz WCDMA 850: TX 824MHz~849MHz RX 869MHz~894MHz WCDMA 1700: TX 1710MHz~1755MHz RX 2110MHz~2155MHz WCDMA 1900: TX 1850MHz~1910MHz RX 1930MHz~1990MHz LTE Band IV: TX: 1710MHz~1755MHz RX 2110MHz~2155MHz LTE Band 7: TX 2500MHz~2570MHz RX 2620MHz~2690MHz		
Type(s) of Modulation:	GSM850/PCS1900 :GMSK 8PSK WCDMA850/WCDMA1700/WCDMA1900:QPSK LTE Band 4/LTE Band 7:QPSK 16QAM		
LTE Supported Channel Bandwidth:	Band 4:	1.4 MHz	Supported
		3 MHz	Supported
		5 MHz	Supported
		10 MHz	Supported
		15 MHz	Supported
		20 MHz	Supported
	Band 7:	5 MHz	Supported
		10 MHz	Supported
		15 MHz	Supported
20 MHz		Supported	
Antenna Designation:	Fixed Antenna	850MHz:0dBi 1700MHz:0dBi 1900MHz:0dBi 2500MHz:0dBi	
Operating voltage:	Internal battery, 120V AC Adapter; 3.5V (Low)/3.7V (Nominal)/ 4.2V (Max)		

Remark: --

Table 3 Identification of the Equipment Under Test (EUT)

EUT	Serial Number/IMEI	HW Version	SW Version	Notes
1	354147042022468	L575_Mainboard_P3	L575_0303_V5647	Conducted testing sample.
2	354147042057431	L575_Mainboard_P3	L575_0303_V5647	Radiated testing sample.

Table 4 Identification of Accessory equipment

Name	Model No	S/N	Manufacturer
Li-polymer Battery	BL-N2700	---	Gionee Communication Equipment Co.,Ltd
Adaptor for EUT	A8+-501000	---	Gionee Communication Equipment Co.,Ltd
Earphone	DQA5.12	---	Gionee Communication Equipment Co.,Ltd

2.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **RQQHLT-GL5H0** filing to comply with FCC PART 22H,24E AND 27.

2.3. Operating Condition of EUT

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

- TM1:** GSM Mode with GMSK Modulation
- TM2:** EDGE Mode with 8PSK Modulation
- TM3:** WCDMA Mode with QPSK Modulation
- TM4:** LTE Mode with QPSK Modulation
- TM5:** LTE Mode with 16QAM Modulation

The maximum power levels are GSM mode for GMSK link, Edge mode for 8PSK link, WCDMA mode for QPSK link, LTE Mode for QPSK link , LTE mode for 16QAM link. only these modes were used for all tests.

The conducted power tables are as follows:

Band: GSM850	Average Power [dBm]		
Channel	128	190	251
Frequency (MHz)	824.2	836.6	848.8
GSM (GMSK, 1 Tx slot)	33.68	33.50	33.38
GPRS (GMSK, 1 Tx slot)	33.67	33.50	33.37
GPRS (GMSK, 2 Tx slots)	32.57	32.42	32.33
GPRS (GMSK, 3 Tx slots)	30.63	30.45	30.36
GPRS (GMSK, 4 Tx slots)	29.77	29.61	29.48
EDGE (8PSK, 1 Tx slot)	25.93	26.24	26.39
EDGE (8PSK, 2 Tx slot)	24.48	24.99	24.45
EDGE (8PSK, 3 Tx slot)	23.30	23.09	23.17
EDGE (8PSK, 4 Tx slot)	22.59	22.13	22.25

Band: GSM1900	Average Power [dBm]		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM (GMSK, 1 Tx slot)	29.65	29.80	29.97
GPRS (GMSK, 1 Tx slot)	29.65	29.81	29.96
GPRS (GMSK, 2 Tx slots)	29.02	29.17	29.36
GPRS (GMSK, 3 Tx slots)	27.32	27.44	27.67
GPRS (GMSK, 4 Tx slots)	26.15	26.28	26.51
EDGE (8PSK, 1 Tx slot)	25.13	25.48	25.64
EDGE (8PSK, 2 Tx slot)	23.33	23.63	23.43
EDGE (8PSK, 3 Tx slot)	21.84	21.63	21.86
EDGE (8PSK, 4 Tx slot)	20.66	20.94	21.06

Band :WCDMA Band V	Average Power [dBm]		
Channel	4,132	4,182	4,233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	22.84	22.79	22.54
HSDPA Subtest-1	21.86	21.77	21.53
HSDPA Subtest-2	21.85	21.78	21.51
HSDPA Subtest-3	21.38	21.31	21.04
HSDPA Subtest-4	21.37	21.30	21.02
HSUPA Subtest-1	19.84	19.74	19.51
HSUPA Subtest-2	19.81	19.77	19.50
HSUPA Subtest-3	20.81	20.76	20.49
HSUPA Subtest-4	19.28	19.19	18.95
HSUPA Subtest-5	21.33	21.26	21.01

Band: WCDMA Band IV	Average Power [dBm]		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	23.45	23.30	23.38
HSDPA Subtest-1	22.24	22.12	22.26
HSDPA Subtest-2	22.19	21.09	22.25
HSDPA Subtest-3	21.64	21.58	21.54
HSDPA Subtest-4	21.58	21.46	21.52
HSUPA Subtest-1	20.24	20.16	20.37
HSUPA Subtest-2	20.23	20.11	20.29
HSUPA Subtest-3	21.52	21.43	21.48
HSUPA Subtest-4	20.96	20.87	20.92
HSUPA Subtest-5	21.95	21.87	21.83

Band: WCDMA Band II	Average Power [dBm]		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	22.75	22.93	23.19
HSDPA Subtest-1	21.69	21.43	21.69
HSDPA Subtest-2	21.23	21.39	21.69
HSDPA Subtest-3	20.77	20.92	21.23
HSDPA Subtest-4	20.74	20.90	21.20
HSUPA Subtest-1	19.76	19.98	20.29
HSUPA Subtest-2	19.72	19.91	20.19
HSUPA Subtest-3	20.72	20.89	21.17
HSUPA Subtest-4	19.15	19.48	19.69
HSUPA Subtest-5	21.20	21.39	21.68

LTE Band 4(1.4MHz)

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	19957	1710.7	1	0	23.28
			1	3	23.32
			1	5	23.28
			3	0	23.38
			3	2	23.38
			3	3	23.41
	20175	1732.5	1	0	23.05
			1	3	23.02
			1	5	23.04
			3	0	23.21
			3	2	23.16
			3	3	23.18
	20393	1754.3	1	0	22.28
			1	3	22.23
			1	5	22.21
			3	0	22.30
			3	2	22.23
			3	3	22.25
16QAM	19957	1710.7	1	0	22.54
			1	3	22.66
			1	5	22.55
			3	0	22.50
			3	2	22.48
			3	3	22.46
	20175	1732.5	1	0	22.52
			1	3	22.54
			1	5	22.50
			3	0	22.21
			3	2	22.17
			3	3	22.19
	20393	1754.3	1	0	21.52
			1	3	21.57
			1	5	21.48
			3	0	21.36
			3	2	21.29
			3	3	21.35
			6	0	20.43

LTE Band 4 (3MHz)

Channel Bandwidth: 3 MHz					
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	19965	1711.5	1	0	23.19
			1	7	23.21
			1	14	23.18
			8	0	22.41
			8	4	22.42
			8	7	22.39
	20175	1732.5	15	0	22.40
			1	0	23.23
			1	7	23.05
			1	14	22.91
			8	0	22.19
			8	4	22.16
	20385	1753.5	8	7	22.16
			15	0	22.14
			1	0	22.26
			1	7	22.24
			1	14	22.01
			8	0	20.91
16QAM	19965	1711.5	8	4	21.12
			8	7	21.39
			15	0	21.41
			1	0	22.55
			1	7	22.63
			1	14	22.49
	20175	1732.5	8	0	21.46
			8	4	21.51
			8	7	21.44
			15	0	21.39
			1	0	22.35
			1	7	22.40
	20385	1753.5	1	14	22.30
			8	0	21.27
			8	4	21.25
			8	7	21.23
			15	0	21.16
			1	0	21.65
20385	1753.5	1	7	21.57	
		1	14	21.60	
		8	0	20.61	
		8	4	20.34	
		8	7	20.21	
		15	0	20.42	

LTE Band 4 (5MHz)

Channel Bandwidth: 3 MHz					
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	19975	1712.5	1	0	23.47
			1	12	23.19
			1	24	23.19
			12	0	22.21
			12	6	22.32
			12	13	22.38
	20175	1732.5	25	0	22.43
			1	0	23.07
			1	12	23.04
			1	24	22.97
			12	0	22.24
			12	6	22.21
	20375	1752.5	12	13	22.20
			25	0	22.18
			1	0	22.44
			1	12	22.35
			1	24	22.20
			12	0	21.46
16QAM	19975	1712.5	12	6	21.41
			12	13	21.34
			25	0	21.25
			1	0	22.74
			1	12	22.68
			1	24	22.57
	20175	1732.5	12	0	21.60
			12	6	21.63
			12	13	21.43
			25	0	21.37
			1	0	22.53
			1	12	22.55
	20375	1752.5	1	24	22.47
			12	0	21.43
			12	6	21.40
			12	13	21.41
			25	0	21.24
			1	0	21.51
			1	12	21.44
			1	24	21.21
			12	0	20.51
			12	6	20.45
			12	13	20.41
			25	0	20.40

LTE Band 4 (10MHz)

		Channel Bandwidth: 3 MHz			
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	20000	1715	1	0	23.28
			1	24	23.27
			1	49	23.14
			25	0	22.38
			25	12	22.35
			25	25	22.28
	20175	1732.5	50	0	22.34
			1	0	23.09
			1	24	23.06
			1	49	22.91
			25	0	22.19
			25	12	22.16
	20350	1750	25	25	22.13
			50	0	22.18
			1	0	22.51
			1	24	22.36
			1	49	22.14
			25	0	21.49
16QAM	20000	1715	25	12	21.42
			25	25	21.32
			50	0	21.44
			1	0	22.64
			1	24	22.53
			1	49	22.42
	20175	1732.5	25	0	21.40
			25	12	21.38
			25	25	21.29
			50	0	21.36
			1	0	22.42
			1	24	22.45
	20350	1750	1	49	22.31
			25	0	21.25
			25	12	21.22
			25	25	21.17
			50	0	21.22
			1	0	22.00
20350	1750	1	24	21.80	
		1	49	21.57	
		25	0	20.55	
		25	12	20.48	
		25	25	20.38	
		50	0	20.51	

LTE Band 4 (15MHz)

Channel Bandwidth: 3 MHz					
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	20025	1717.5	1	0	23.29
			1	37	23.19
			1	74	23.11
			37	0	22.47
			37	18	22.43
			37	38	22.37
	20175	1732.5	75	0	22.45
			1	0	23.11
			1	37	23.03
			1	74	22.82
			37	0	22.27
			37	18	22.24
	20325	1747.5	37	38	22.16
			75	0	22.24
			1	0	22.87
			1	37	22.58
			1	74	22.27
			37	0	21.74
16QAM	20025	1717.5	37	18	21.60
			37	38	21.50
			75	0	21.60
			1	0	22.64
			1	37	22.56
			1	74	22.43
	20175	1732.5	37	0	21.44
			37	18	21.37
			37	38	21.34
			75	0	21.40
			1	0	22.45
			1	37	22.44
	20325	1747.5	1	74	22.24
			37	0	21.28
			37	18	21.24
			37	38	21.18
			75	0	21.25
			1	0	22.17
20025	1717.5	1	37	21.91	
		1	74	21.48	
		37	0	20.78	
		37	18	20.63	
		37	38	20.50	
		75	0	20.62	

LTE Band 4 (20MHz)

Channel Bandwidth: 3 MHz					
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	20050	1720	1	0	23.48
			1	49	23.30
			1	99	23.28
			50	0	22.38
			50	25	22.29
			50	50	22.28
	20175	1732.5	100	0	22.33
			1	0	23.31
			1	49	23.24
			1	99	22.97
			50	0	22.27
			50	25	22.22
	20300	1745	50	50	22.08
			100	0	22.16
			1	0	23.16
			1	49	22.79
			1	99	22.36
			50	0	21.94
16QAM	20050	1720	50	25	21.69
			50	50	21.51
			100	0	21.70
			1	0	22.65
			1	49	22.48
			1	99	22.45
	20175	1732.5	50	0	21.40
			50	25	21.30
			50	50	21.30
			100	0	21.34
			1	0	22.47
			1	49	22.43
	20300	1745	1	99	22.18
			50	0	21.29
			50	25	21.22
			50	50	21.11
			100	0	21.20
			1	0	22.51
20050	1720	1	49	22.10	
		1	99	21.72	
		50	0	21.00	
		50	25	20.77	
		50	50	20.59	
		100	0	20.75	

LTE Band 7(5MHz)

Channel Bandwidth: 3 MHz					
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	20775	2502.5	1	0	22.85
			1	12	22.82
			1	24	22.71
			12	0	21.89
			12	6	21.85
			12	13	21.79
	21100	2535	25	0	21.77
			1	0	22.56
			1	12	22.66
			1	24	22.70
			12	0	21.52
			12	6	21.54
	21425	2567.5	12	13	21.60
			25	0	21.53
			1	0	23.18
			1	12	23.23
			1	24	23.20
			12	0	22.26
16QAM	20775	2502.5	12	6	22.25
			12	13	22.28
			25	0	22.20
			1	0	22.15
			1	12	22.17
			1	24	22.01
	21100	2535	12	0	21.02
			12	6	20.98
			12	13	20.88
			25	0	20.81
			1	0	21.49
			1	12	21.58
	21425	2567.5	1	24	21.56
			12	0	20.49
			12	6	20.52
			12	13	20.56
			25	0	20.49
			1	0	22.18
21425	2567.5	1	12	22.32	
		1	24	22.26	
		12	0	21.21	
		12	6	21.22	
		12	13	21.24	
		25	0	21.18	

LTE Band 7(10MHz)

		Channel Bandwidth: 3 MHz			
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	20800	2505	1	0	22.81
			1	24	22.69
			1	49	22.52
			25	0	21.78
			25	12	21.69
			25	25	21.60
	21100	2535	50	0	21.71
			1	0	22.43
			1	24	22.50
			1	49	22.60
			25	0	21.48
			25	12	21.54
	21400	2565	25	25	21.57
			50	0	21.53
			1	0	23.07
			1	24	23.16
			1	49	23.22
			25	0	22.11
16QAM	20800	2505	25	12	22.14
			25	25	22.21
			50	0	22.14
			1	0	22.08
			1	24	21.90
			1	49	21.73
	21100	2535	25	0	20.78
			25	12	20.66
			25	25	20.55
			50	0	20.68
			1	0	21.62
			1	24	21.69
	21400	2565	1	49	21.84
			25	0	20.44
			25	12	20.48
			25	25	20.53
			50	0	20.48
			1	0	22.35
			1	24	22.42
			1	49	22.48
			25	0	21.05
			25	12	21.11
			25	25	21.15
			50	0	21.13

LTE Band 7(15MHz)

		Channel Bandwidth: 3 MHz			
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	20825	2507.5	1	0	22.84
			1	37	22.63
			1	74	22.38
			37	0	21.83
			37	18	21.69
			37	38	21.57
	21100	2535	75	0	21.73
			1	0	22.40
			1	37	22.55
			1	74	22.66
			37	0	21.56
			37	18	21.63
	21375	2562.5	37	38	21.72
			75	0	21.67
			1	0	23.04
			1	37	23.16
			1	74	23.31
			37	0	22.18
16QAM	20825	2507.5	37	18	22.26
			37	38	22.31
			75	0	22.27
			1	0	22.07
			1	37	21.85
			1	74	21.60
	21100	2535	37	0	20.73
			37	18	20.61
			37	38	20.51
			75	0	20.64
			1	0	21.60
			1	37	21.66
	21375	2562.5	1	74	21.83
			37	0	20.46
			37	18	20.53
			37	38	20.62
			75	0	20.57
			1	0	22.26
21375	2562.5	1	37	22.33	
		1	74	22.41	
		37	0	21.08	
		37	18	21.17	
		37	38	21.22	
		75	0	21.15	

LTE Band 7(20MHz)

		Channel Bandwidth: 3 MHz			
Modulation	Channel	Frequency (MHz)	RB Configuration		Average Power [dBm]
			Size	Offset	
QPSK	20850	2510	1	0	22.95
			1	49	22.60
			1	99	22.47
			50	0	21.71
			50	25	21.53
			50	50	21.42
	21100	2535	100	0	21.56
			1	0	22.51
			1	49	22.60
			1	99	22.91
			50	0	21.45
			50	25	21.52
	21350	2560	50	50	21.69
			100	0	21.55
			1	0	23.07
			1	49	23.14
			1	99	23.35
			50	0	22.02
16QAM	20850	2510	50	25	22.08
			50	50	22.15
			100	0	22.08
			1	0	22.12
			1	49	21.76
			1	99	21.59
	21100	2535	50	0	20.63
			50	25	20.47
			50	50	20.34
			100	0	20.51
			1	0	21.66
			1	49	21.69
	21350	2560	1	99	22.06
			50	0	20.37
			50	25	20.44
			50	50	20.60
			100	0	20.48
			1	0	22.34
21350	2560	1	49	22.37	
		1	99	22.54	
		50	0	20.98	
		50	25	21.06	
		50	50	21.12	
		100	0	21.01	

2.4. Support Equipment List

Table 5 Support Equipment List

Name	Model No	S/N	Manufacturer
N/A			

2.5. Test Conditions

Date of test : Jul 16,2015-Aug 22, 2015

Date of EUT Receive : Jul 16,2015

Temperature: -30-50 °C

Relative Humidity: 48-56%

2.6. Special Accessories

Not available for this EUT intended for grant.

2.7. Equipment Modifications

Not available for this EUT intended for grant.

3. TEST EQUIPMENT USED

Table 6 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	Mar.27, 2015	1 Year
SB9721/04	Signal Generator	Agilent	E8257D	Jan. 05, 2015	1 Year
SB8501/04	Bilog Antenna	Schwarzbeck	VULB9163	May 12, 2015	1 Year
SB5472/02	Bilog Antenna	Schwarzbeck	VULB9163	Jan.19, 2015	1 Year
SB3435	Horn Antenna	Rohde & Schwarz	HF906	Jan.19, 2015	1 Year
SB3434	Horn Antenna	Rohde & Schwarz	HF906	Jan.19, 2015	1 Year
SB3435/01	Amplifier(1-18GHz)	Rohde & Schwarz	---	Jan.19, 2015	1 Year
SB3435/02	Amplifier(18-40GHz)	Rohde & Schwarz	---	May.15, 2015	1 Year
SB8501/16	Horn Antenna	Rohde & Schwarz	SCU-26	Mar.23, 2015	1 Year
SB3450/01	3m Semi-anechoic chamber	Albatross Projects	9X6X6	Oct.11, 2014	2 Years
SB8501/02	Communication Test Unit	Rohde & Schwarz	CMU200	Jun.05, 2015	1 Year
SB9054/02	Wideband Radio communication Tester	Rohde & Schwarz	CMW500	Oct.26, 2015	1 Year
SB9721/02	Signal Analyzer	Agilent	N9020A	Jan. 05, 2015	1 Year
SB3611	DC Power Supply	KENWOOD	PDS36-10	May.15, 2015	1 Year
SB6691	Climatic Chamber	NANYA	DW-0150	Apr.12, 2015	1 Year
SB9060	Signal Analyzer	Rohde & Schwarz	FSQ40	May.13,2015	1 Year
SB9721/01	Universal Radio Communication Tester	Agilent	E5515C	Jan. 05, 2015	1year

4. TEST RESULTS

4.1. RF Power Output

4.1.1. Test Standard

FCC: CFR Part 2.1046, CFR Part 22.913, CFR Part 24.232 CFR Part 27

4.1.2. Test Limit

FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

FCC 24.232 (b)(c) Power limits.

(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP). (c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

.27.50 (h) (2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

4.1.3. Test Procedure

Radiated Output Power Measurement procedure

Ref: ANSI/TIA-603-D (2010) & KDB971168-2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
2. Adjust the settings of the Universal Radio Communication Tester (CMU) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
4. Rotate the EUT 360°. Record the peak level in dBm (LVL).
5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS). $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$.
7. Determine the ERP using the following equation:
 $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
8. Determine the EIRP using the following equation:
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB)}$
9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

4.1.4. Test Data

Table 7 Substitution Results

Test Mode	Freq. [MHz]	SG. Level [dBm]	Cable Loss [dB]	Antenna Gain [dBd]	Substitution Level (ERP) [dBm]	H/V	Limit [dBm]	Result
TM1	824.2	24.72	0.5	5.28	29.50	V	38.5	Pass
	836.6	25.28	0.5	5.28	30.06	V	38.5	Pass
	848.8	25.41	0.5	5.28	30.19	V	38.5	Pass
TM2	824.2	20.08	0.5	5.28	24.86	V	38.5	Pass
	836.6	20.65	0.5	5.28	25.43	V	38.5	Pass
	848.8	20.59	0.5	5.28	25.37	V	38.5	Pass
TM3	826.4	15.41	0.5	5.28	20.19	V	38.5	Pass
	836.4	16.02	0.5	5.28	20.80	V	38.5	Pass
	846.6	15.36	0.5	5.28	20.14	V	38.5	Pass

Note: both of Vertical and Horizontal polarization are evaluated, and only the worst case is recorded in this report

Table 8 Substitution Results

Test Mode	Freq. [MHz]	SG. Level [dBm]	Cable Loss [dB]	Antenna Gain [dBi]	Substitution Level (EIRP) [dBm]	H/V	Limit [dBm]	Result
TM1	1850.2	19.8	0.97	8.92	27.75	V	33	Pass
	1880	19.91	0.97	8.92	27.86	V	33	Pass
	1909.8	19.66	0.97	8.92	27.61	V	33	Pass
TM2	1850.2	17.18	0.97	8.92	25.13	V	33	Pass
	1880	17.47	0.97	8.92	25.42	V	33	Pass
	1909.8	17.63	0.97	8.92	25.58	V	33	Pass
TM3	1852.4	12.96	0.97	8.92	20.91	V	33	Pass
	1880	13.59	0.97	8.92	21.54	V	33	Pass
	1907.6	13.12	0.97	8.92	21.07	V	33	Pass

Note: both of Vertical and Horizontal polarization are evaluated, and only the worst case is recorded in this report

Table 9 Substitution Results

Test Mode	Freq. [MHz]	SG. Level [dBm]	Cable Loss [dB]	Antenna Gain [dBi]	Substitution Level (EIRP) [dBm]	H/V	Limit [dBm]	Result
TM3	1712.4	15.46	0.91	6.83	21.38	V	30	Pass
	1732.6	15.2	0.91	6.83	21.12	V	30	Pass
	1752.6	16.25	0.91	6.83	22.17	V	30	Pass

Note: both of Vertical and Horizontal polarization are evaluated, and only the worst case is recorded in this report

Table 10 Substitution Results (LTE Band 4)

Test Mode	Band width (MHz)	RB Size	Freq. [MHz]	SG. Level [dBm]	Cable Loss [dB]	Antenna Gain [dBi]	Substitution Level (EIRP) [dBm]	H/V	Limit [dBm]	Result
TM4	1.4	1RB	1710.7	15.25	0.91	6.83	21.17	V	30	Pass
	1.4		1732.5	15.71	0.91	6.83	21.63	V	30	Pass
	1.4		1754.3	15.5	0.91	6.83	21.42	V	30	Pass
	3		1711.5	15.66	0.91	6.83	21.58	V	30	Pass
	3		1732.5	15.36	0.91	6.83	21.28	V	30	Pass
	3		1753.5	15.15	0.91	6.83	21.07	V	30	Pass
	5		1712.5	15.58	0.91	6.83	21.50	V	30	Pass
	5		1732.5	15.47	0.91	6.83	21.39	V	30	Pass
	5		1752.5	15.08	0.91	6.83	21.00	V	30	Pass
	10		1715	15.61	0.91	6.83	21.53	V	30	Pass
	10		1732.5	15.43	0.91	6.83	21.35	V	30	Pass
	10		1750	15.21	0.91	6.83	21.13	V	30	Pass
	15		1717.5	15.17	0.91	6.83	21.09	V	30	Pass
	15		1732.5	15.4	0.91	6.83	21.32	V	30	Pass
	15		1747.5	15.42	0.91	6.83	21.34	V	30	Pass
	20		1720	15.15	0.91	6.83	21.07	V	30	Pass
	20		1732.5	15.62	0.91	6.83	21.54	V	30	Pass
	20		1745	15.39	0.91	6.83	21.31	V	30	Pass

Note: both of Vertical and Horizontal polarization are evaluated, and only the worst case is recorded in this report

Table 11 Substitution Results (LTE Band 4)

Test Mode	Band width (MHz)	RB Size	Freq. [MHz]	SG. Level [dBm]	Cable Loss [dB]	Antenna Gain [dBi]	Substitution Level (EIRP) [dBm]	H/V	Limit [dBm]	Result
TM5	1.4	1RB	1710.7	13.11	0.91	6.83	19.03	V	30	Pass
	1.4		1732.5	12.87	0.91	6.83	18.79	V	30	Pass
	1.4		1754.3	13.62	0.91	6.83	19.54	V	30	Pass
	3		1711.5	13.08	0.91	6.83	19.00	V	30	Pass
	3		1732.5	13.31	0.91	6.83	19.23	V	30	Pass
	3		1753.5	13.22	0.91	6.83	19.14	V	30	Pass
	5		1712.5	12.93	0.91	6.83	18.85	V	30	Pass
	5		1732.5	12.68	0.91	6.83	18.60	V	30	Pass
	5		1752.5	13.10	0.91	6.83	19.02	V	30	Pass
	10		1715	12.93	0.91	6.83	18.85	V	30	Pass
	10		1732.5	13.47	0.91	6.83	19.39	V	30	Pass
	10		1750	13.29	0.91	6.83	19.21	V	30	Pass
	15		1717.5	13.07	0.91	6.83	18.99	V	30	Pass
	15		1732.5	13.02	0.91	6.83	18.94	V	30	Pass
	15		1747.5	12.84	0.91	6.83	18.76	V	30	Pass
	20		1720	13.31	0.91	6.83	19.23	V	30	Pass
	20		1732.5	12.84	0.91	6.83	18.76	V	30	Pass
	20		1745	13.09	0.91	6.83	19.01	V	30	Pass

Note: both of Vertical and Horizontal polarization are evaluated, and only the worst case is recorded in this report

Table 12 Substitution Results (LTE Band 7)

Test Mode	Band width (MHz)	RB Size	Freq. [MHz]	SG. Level [dBm]	Cable Loss [dB]	Antenna Gain [dBi]	Substitution Level (EIRP) [dBm]	H/V	Limit [dBm]	Result
TM4	5	1RB	2502.5	13.50	2.1	7.45	21.00	H	33	Pass
	5		2535	14.04	2.1	7.45	21.06	H	33	Pass
	5		2567.5	13.86	2.1	7.45	21.45	H	33	Pass
	10		2505	13.64	2.1	7.45	20.89	H	33	Pass
	10		2535	13.59	2.1	7.45	21.08	H	33	Pass
	10		2565	13.41	2.1	7.45	21.37	H	33	Pass
	15		2507.5	13.88	2.1	7.45	20.79	H	33	Pass
	15		2535	13.41	2.1	7.45	20.83	H	33	Pass
	15		2562.5	13.66	2.1	7.45	21.42	H	33	Pass
	20		2510	13.5	2.1	7.45	21.13	H	33	Pass
	20		2535	14.04	2.1	7.45	20.96	H	33	Pass
	20		2560	13.86	2.1	7.45	21.05	H	33	Pass
	TM5		5	1RB	2502.5	13.41	2.1	7.45	18.76	H
5		2535	13.26		2.1	7.45	18.61	H	33	Pass
5		2567.5	14.1		2.1	7.45	19.45	H	33	Pass
10		2505	13.67		2.1	7.45	19.02	H	33	Pass
10		2535	13.39		2.1	7.45	18.74	H	33	Pass
10		2565	14.06		2.1	7.45	19.41	H	33	Pass
15		2507.5	13.77		2.1	7.45	19.12	H	33	Pass
15		2535	13.41		2.1	7.45	18.76	H	33	Pass
15		2562.5	13.71		2.1	7.45	19.06	H	33	Pass
20		2510	13.41		2.1	7.45	18.92	H	33	Pass
20		2535	13.26		2.1	7.45	18.71	H	33	Pass
20		2560	14.1		2.1	7.45	19.25	H	33	Pass

4.2. Peak to Average Ratio

4.2.1. Test Standard

CFR 47 (FCC) part 24 subpart E, part 27

4.2.2. Test Limit

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2.3. Test Procedure

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode. For LTE operating mode: a. The EUT was connected to spectrum and system simulator via a power divider. b. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer. c. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%. d. Record the deviation as Peak to Average Ratio.

4.2.4. Test Data

Test Band	Test Mode	Test Channel	Measured[dB]	Limit [dB]	Verdict
GSM1900	GSM/TM1	1850.2	0.86	<13	PASS
		1880	0.95	<13	PASS
		1909.8	0.83	<13	PASS
GSM1900	EDGE/TM2	1850.2	1.05	<13	PASS
		1880	0.87	<13	PASS
		1909.8	0.96	<13	PASS

Test Band	Test Mode	Test Channel	Measured[dB]	Limit [dB]	Verdict
WCDMA1700	UMTS/TM3	1712.4	2.82	<13	PASS
		1732.6	2.96	<13	PASS
		1752.6	2.69	<13	PASS
WCDMA1900	UMTS/TM3	1852.4	3.12	<13	PASS
		1880	3.15	<13	PASS
		1907.6	3.04	<13	PASS

LTE Band 4:

Channel Bandwidth: 1.4 MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	1710.7	1	0	4.07	<13	PASS
	1732.5	1	0	4.23	<13	PASS
	1754.3	1	0	4.21	<13	PASS
16QAM	1710.7	1	0	5.13	<13	PASS
	1732.5	1	0	5.23	<13	PASS
	1754.3	1	0	5.12	<13	PASS

Channel Bandwidth: 3MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	1711.5	1	0	4.15	<13	PASS
	1732.5	1	0	4.31	<13	PASS
	1753.5	1	0	4.16	<13	PASS
16QAM	1711.5	1	0	5	<13	PASS
	1732.5	1	0	5.08	<13	PASS
	1753.5	1	0	5.13	<13	PASS

Channel Bandwidth: 5MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	1712.5	1	0	3.95	<13	PASS
	1732.5	1	0	4.02	<13	PASS
	1752.5	1	0	4.14	<13	PASS
16QAM	1712.5	1	0	4.99	<13	PASS
	1732.5	1	0	5.06	<13	PASS
	1752.5	1	0	4.99	<13	PASS

Channel Bandwidth: 10MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	1715	1	0	4.08	<13	PASS
	1732.5	1	0	4.12	<13	PASS
	1750	1	0	4.53	<13	PASS
16QAM	1715	1	0	4.87	<13	PASS
	1732.5	1	0	4.82	<13	PASS
	1750	1	0	5.48	<13	PASS

Channel Bandwidth: 15MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	1717.5	1	0	4.67	<13	PASS
	1732.5	1	0	5.27	<13	PASS
	1747.5	1	0	4.72	<13	PASS
16QAM	1717.5	1	0	4.94	<13	PASS
	1732.5	1	0	4.85	<13	PASS
	1747.5	1	0	5.7	<13	PASS

Channel Bandwidth: 20MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	1720	1	0	5.54	<13	PASS
	1732.5	1	0	5.45	<13	PASS
	1745	1	0	5.82	<13	PASS
16QAM	1720	1	0	5.72	<13	PASS
	1732.5	1	0	5.74	<13	PASS
	1745	1	0	5.89	<13	PASS

LTE Band 7:

Channel Bandwidth: 5MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	2502.5	1	0	3.76	<13	PASS
	2535	1	0	3.49	<13	PASS
	2567.5	1	0	3.2	<13	PASS
16QAM	2502.5	1	0	4.66	<13	PASS
	2535	1	0	4.46	<13	PASS
	2567.5	1	0	4.04	<13	PASS

Channel Bandwidth: 10MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	2505	1	0	3.72	<13	PASS
	2535	1	0	3.64	<13	PASS
	2565	1	0	3.39	<13	PASS
16QAM	2505	1	0	4.71	<13	PASS
	2535	1	0	4.56	<13	PASS
	2565	1	0	4.38	<13	PASS

Channel Bandwidth: 15MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	2507.5	1	0	3.77	<13	PASS
	2535	1	0	3.73	<13	PASS
	2562.5	1	0	3.6	<13	PASS
16QAM	2507.5	1	0	4.78	<13	PASS
	2535	1	0	4.67	<13	PASS
	2562.5	1	0	4.75	<13	PASS

Channel Bandwidth: 20MHz						
Modulation	Test Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	2510	1	0	4.12	<13	PASS
	2535	1	0	4.36	<13	PASS
	2560	1	0	4.52	<13	PASS
16QAM	2510	1	0	5.44	<13	PASS
	2535	1	0	5.03	<13	PASS
	2560	1	0	5.26	<13	PASS

4.3. Occupied Bandwidth/Emission Bandwidth

4.3.1. Test Standard

FCC: CFR Part 2.1049, CFR Part 22.917, CFR Part 24.238, CRF Part 27

4.3.2. Test Limit


The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

4.3.3. Test Procedure

1. Connect the equipment as shown in the above diagram.
 2. Adjust the settings of the Universal Radio Communication Tester (CMU) to set the EUT to its maximum power at the required channel.
 3. Set the spectrum analyzer to measure the 99% occupied bandwidth. Record the value.
 4. Set the spectrum analyzer to measure the -26 dB emission bandwidth. Record the value.
 5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
- Spectrum analyzer settings: Measurement bandwidth of at least 1% of the occupied bandwidth.

4.3.4. Test Setup

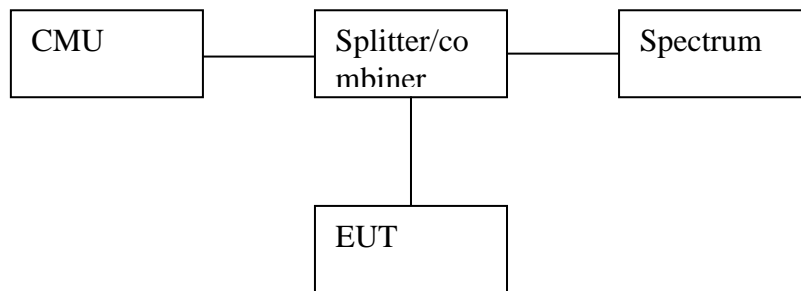

4.3.5. Test Data

Table 13 Occupied Bandwidth Test Data

Test Band	Test Mode	Test Channel	99% OBW (kHz)	26dBc BANDWIDTH (kHz)	Verdict
GSM850	GSM/TM1	LCH	245.78	319.84	PASS
		MCH	247.16	317.25	PASS
		HCH	248.66	308.33	PASS
	EDGE/TM2	LCH	247.67	319.92	PASS
		MCH	247.63	320.62	PASS
		HCH	248.69	323.34	PASS
GSM1900	GSM/TM1	LCH	248.48	309.75	PASS
		MCH	243.40	311.48	PASS
		HCH	249.48	313.42	PASS
	EDGE/TM2	LCH	246.75	318.13	PASS
		MCH	250.24	314.86	PASS
		HCH	249.57	318.66	PASS

Table 14 Occupied Bandwidth Test Data

Test Band	Test Mode	Test Channel	99% OBW (kHz)	26dBc BANDWIDTH (kHz)	Verdict
WCDMA850	UMTS/TM1	LCH	4232.1	4911	PASS
		MCH	4220.7	4882	PASS
		HCH	4207.2	4904	PASS
WCDMA1700	UMTS/TM1	LCH	4195.3	4836	PASS
		MCH	4208.8	4858	PASS
		HCH	4211.2	4871	PASS
WCDMA1900	UMTS/TM1	LCH	4222.5	4886	PASS
		MCH	4208.8	4872	PASS
		HCH	4207.4	4904	PASS

LTE Band 4:

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	6	0	1.0768	1.225	PASS
	MCH	6	0	1.0788	1.215	PASS
	HCH	6	0	1.0761	1.208	PASS
16QAM	LCH	6	0	1.0800	1.237	PASS
	MCH	6	0	1.0800	1.219	PASS
	HCH	6	0	1.0787	1.223	PASS

Channel Bandwidth: 3 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	15	0	2.6815	2.868	PASS
	MCH	15	0	2.6834	2.869	PASS
	HCH	15	0	2.6823	2.874	PASS
16QAM	LCH	15	0	2.6820	2.876	PASS
	MCH	15	0	2.6827	2.872	PASS
	HCH	15	0	2.6849	2.880	PASS

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	25	0	4.4809	4.837	PASS
	MCH	25	0	4.4834	4.808	PASS
	HCH	25	0	4.4793	4.841	PASS
16QAM	LCH	25	0	4.4780	4.818	PASS
	MCH	25	0	4.4853	4.827	PASS
	HCH	25	0	4.4895	4.860	PASS

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	50	0	8.9379	9.453	PASS
	MCH	50	0	8.9437	9.513	PASS
	HCH	50	0	8.9298	9.387	PASS
16QAM	LCH	50	0	8.9316	9.455	PASS
	MCH	50	0	8.9376	9.540	PASS
	HCH	50	0	8.9408	9.415	PASS

Channel Bandwidth: 15 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	75	0	13.407	14.02	PASS
	MCH	75	0	13.422	14.10	PASS
	HCH	75	0	13.384	14.01	PASS
16QAM	LCH	75	0	13.404	14.08	PASS
	MCH	75	0	13.414	14.07	PASS
	HCH	75	0	13.386	14.10	PASS

Channel Bandwidth: 20 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	100	0	17.869	18.63	PASS
	MCH	100	0	17.900	18.67	PASS
	HCH	100	0	17.835	18.60	PASS
16QAM	LCH	100	0	17.886	18.61	PASS
	MCH	100	0	17.897	18.66	PASS
	HCH	100	0	17.832	18.64	PASS

LTE Band 7:


Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	25	0	4.4865	4.835	PASS
	MCH	25	0	4.4832	4.841	PASS
	HCH	25	0	4.4926	4.842	PASS
16QAM	LCH	25	0	4.4769	4.829	PASS
	MCH	25	0	4.4904	4.868	PASS
	HCH	25	0	4.4849	4.843	PASS

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	50	0	8.9394	9.487	PASS
	MCH	50	0	8.9515	9.514	PASS
	HCH	50	0	8.9396	9.501	PASS
16QAM	LCH	50	0	8.9327	9.479	PASS
	MCH	50	0	8.9343	9.474	PASS
	HCH	50	0	8.9449	9.481	PASS


Channel Bandwidth: 15 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	75	0	13.412	14.05	PASS
	MCH	75	0	13.428	14.15	PASS
	HCH	75	0	13.417	14.15	PASS
16QAM	LCH	75	0	13.405	14.05	PASS
	MCH	75	0	13.416	14.10	PASS
	HCH	75	0	13.414	14.18	PASS

Channel Bandwidth: 20 MHz						
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
		Size	Offset			
QPSK	LCH	100	0	17.862	18.66	PASS
	MCH	100	0	17.879	18.72	PASS
	HCH	100	0	17.874	18.78	PASS
16QAM	LCH	100	0	17.866	18.58	PASS
	MCH	100	0	17.876	18.63	PASS
	HCH	100	0	17.863	18.62	PASS


Test Band = GSM850
 Test Mode = GSM/TM1
 Test Channel = LCH

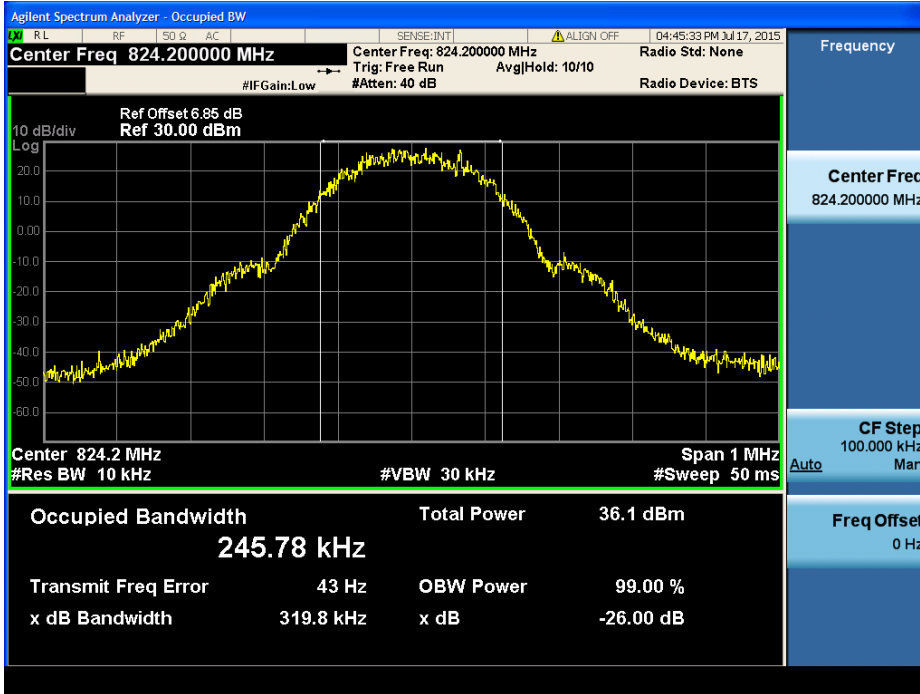


Test Band = GSM850
 Test Mode = GSM/TM1
 Test Channel = MCH

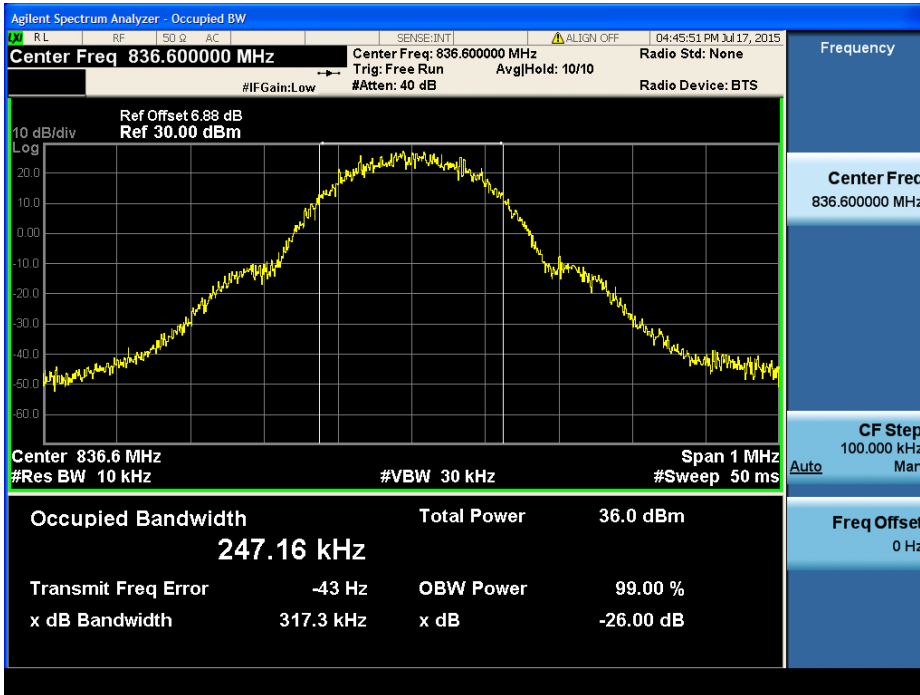


Test Band = GSM850
 Test Mode = GSM/TM1
 Test Channel = HCH

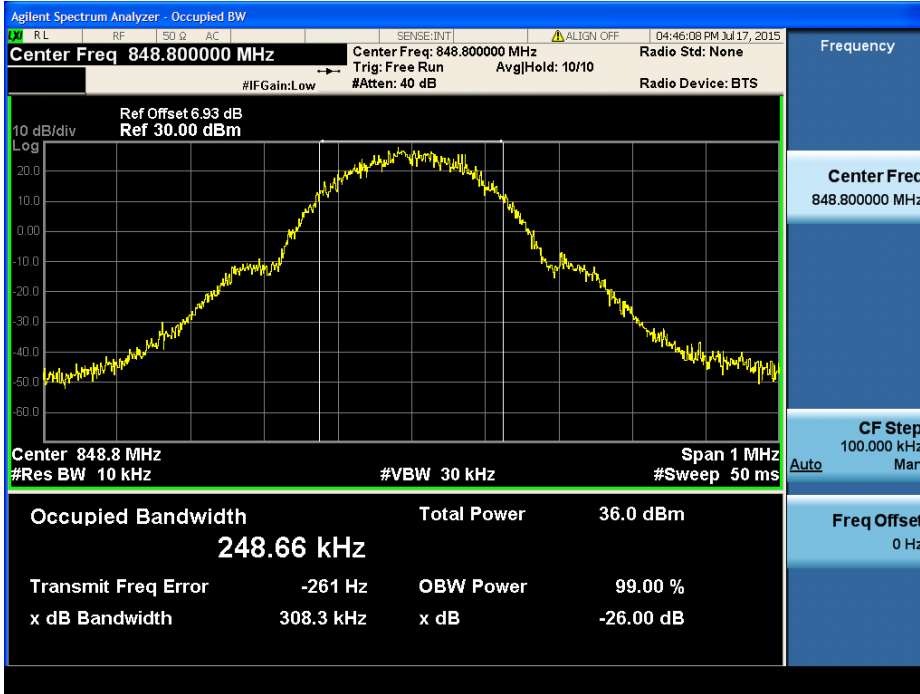


Test Band = GSM850
 Test Mode = EDGE/TM2
 Test Channel = LCH

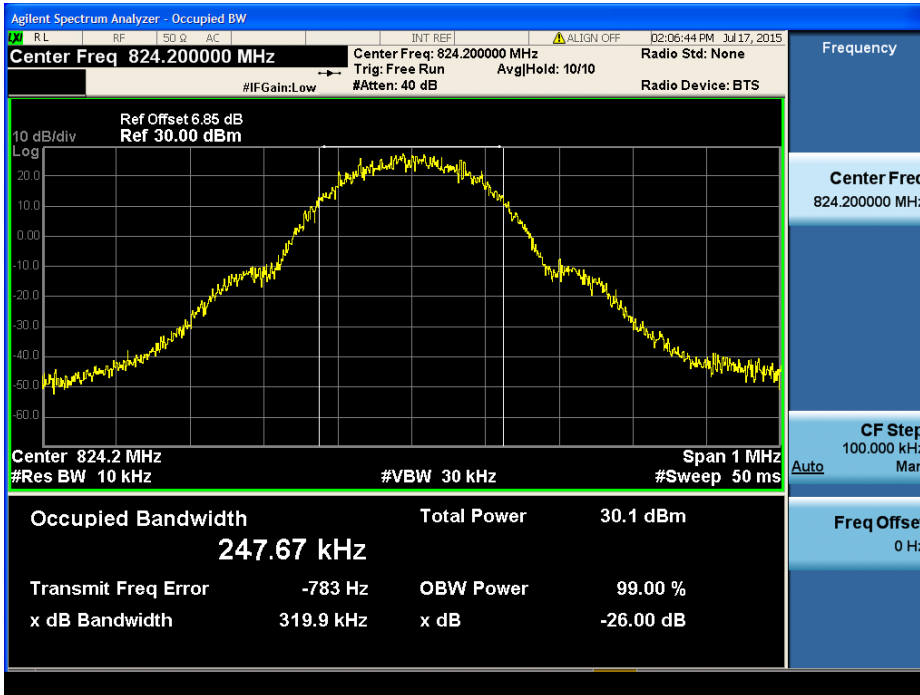


Test Band = GSM850
 Test Mode = EDGE/TM2
 Test Channel = MCH

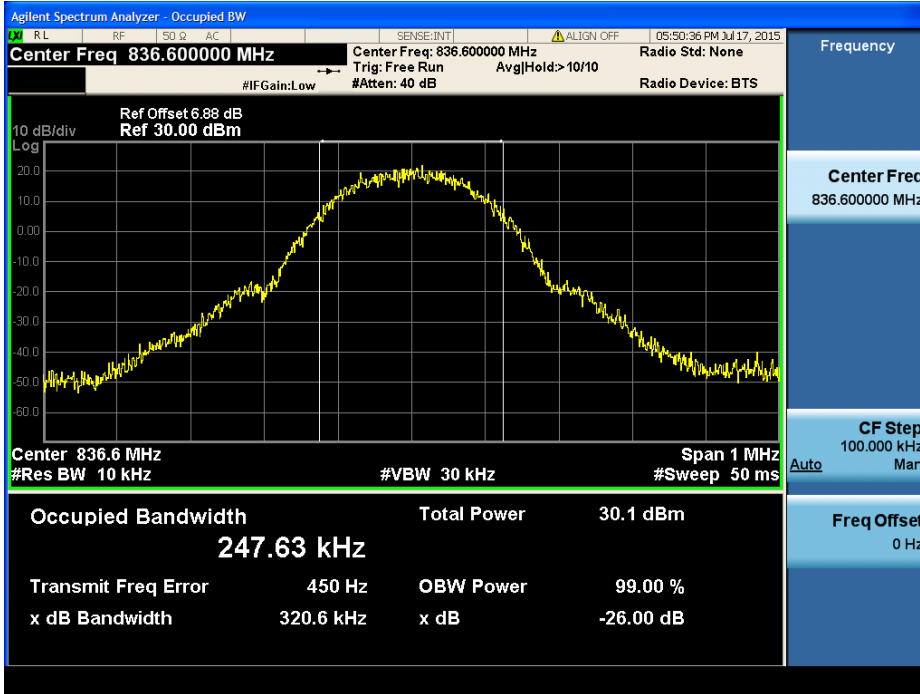


Test Band = GSM850
 Test Mode = EDGE/TM2
 Test Channel = HCH

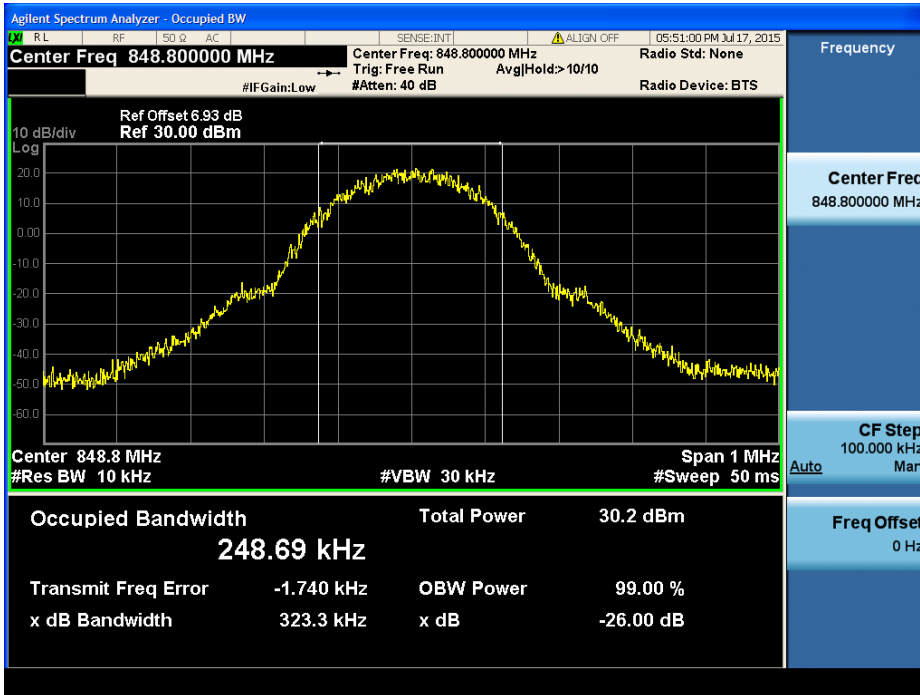


Test Band = GSM1900
 Test Mode = GSM/TM1
 Test Channel = LCH

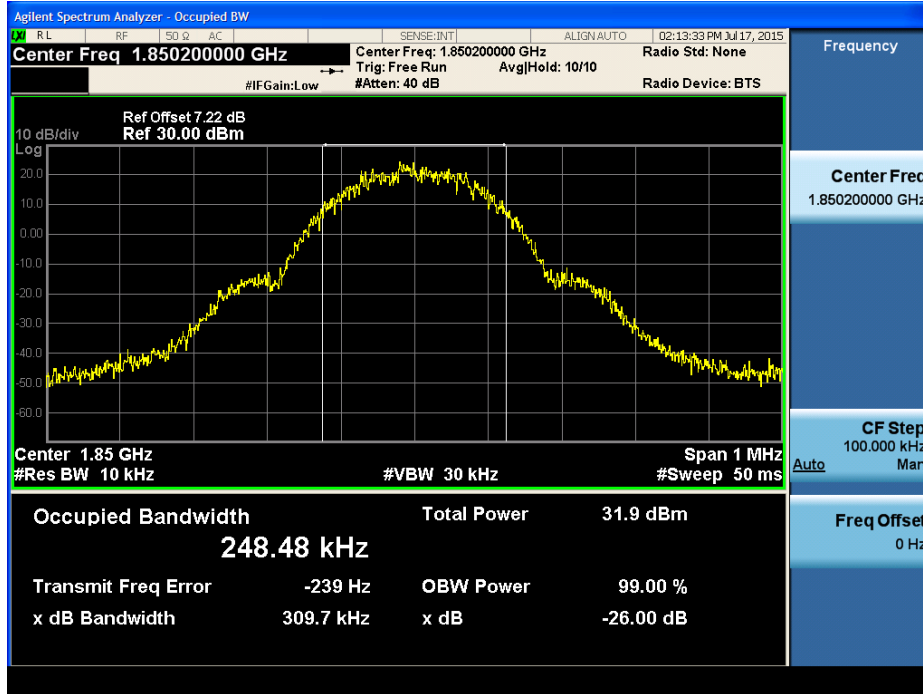


Test Band = GSM1900
 Test Mode = GSM /TM1
 Test Channel = MCH

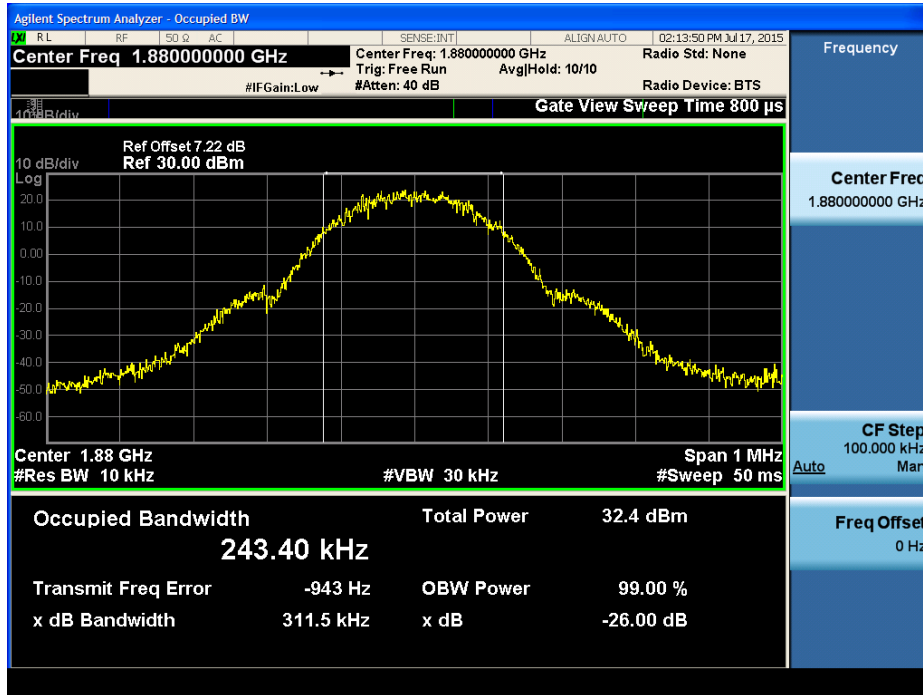


Test Band = GSM1900
 Test Mode = GSM /TM1
 Test Channel = HCH

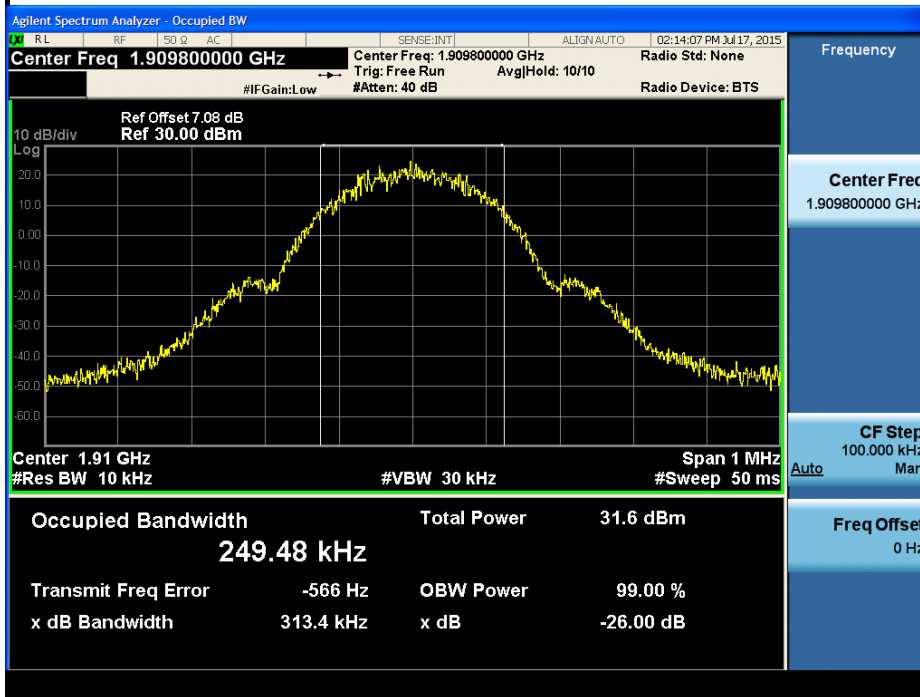


Test Band = GSM1900
 Test Mode = EDGE /TM2
 Test Channel = LCH

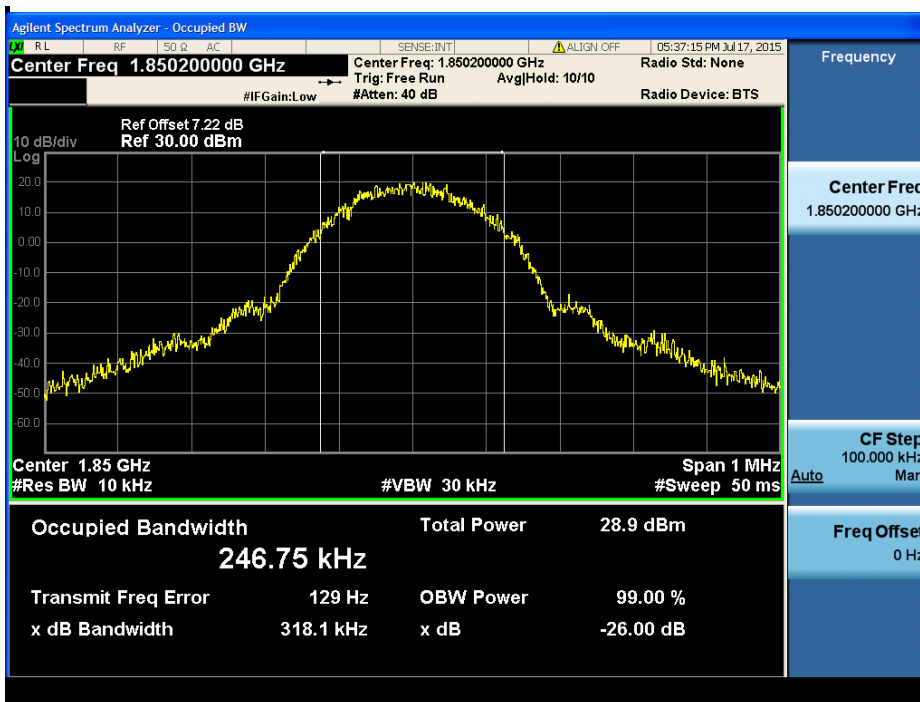


Test Band = GSM1900
 Test Mode = EDGE /TM2
 Test Channel = MCH

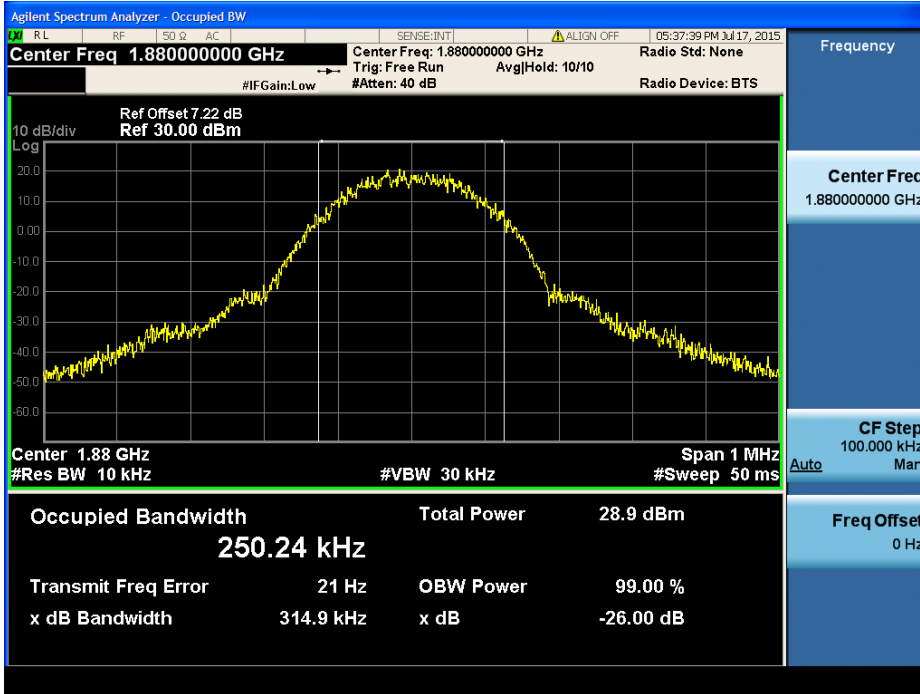


Test Band = GSM1900
 Test Mode = EDGE /TM2
 Test Channel = HCH

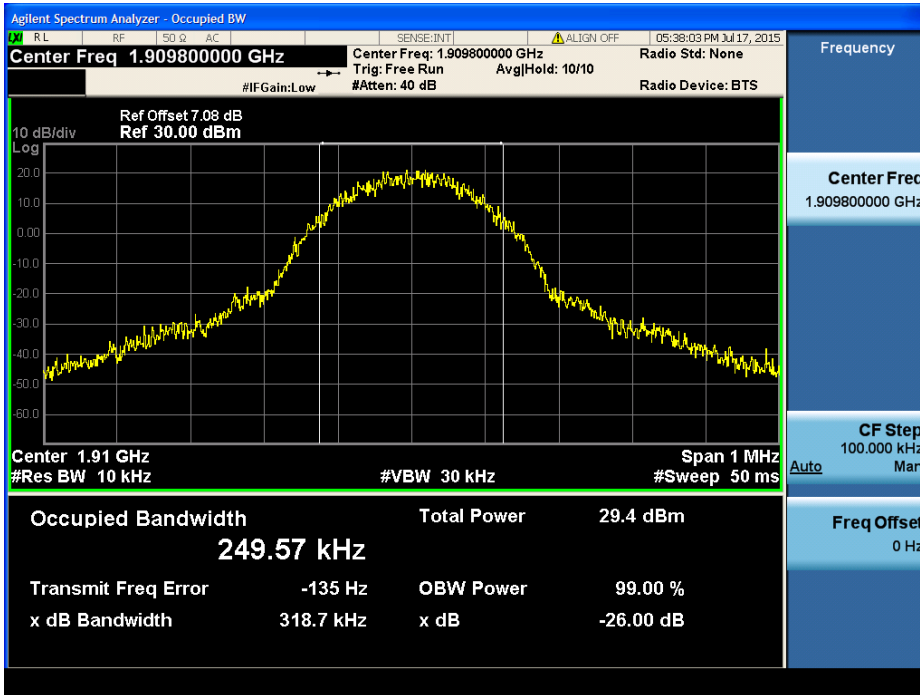


Test Band=WCDMA850
 Test Mode=UMTS/TM3
 Test Channel=LCH

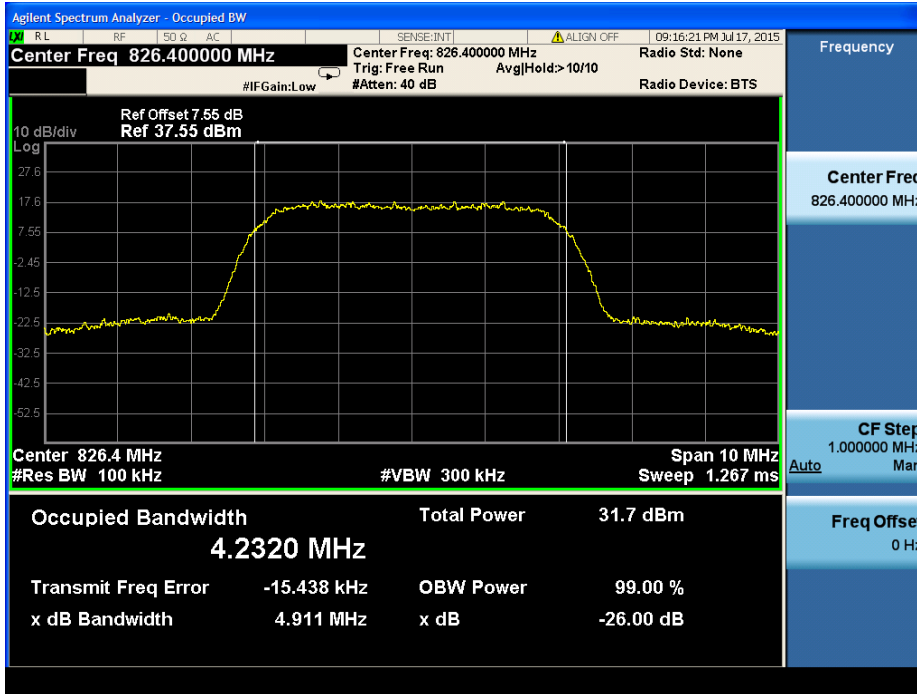


Test Band=WCDMA850
 Test Mode=UMTS/TM3
 Test Channel=MCH

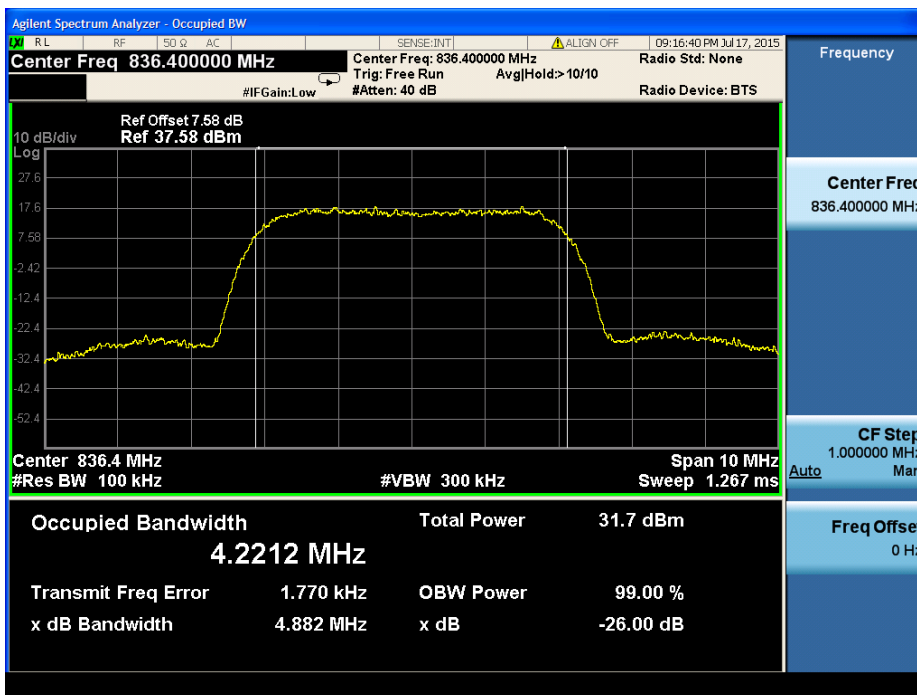


Test Band=WCDMA850
 Test Mode=UMTS/TM3
 Test Channel=HCH

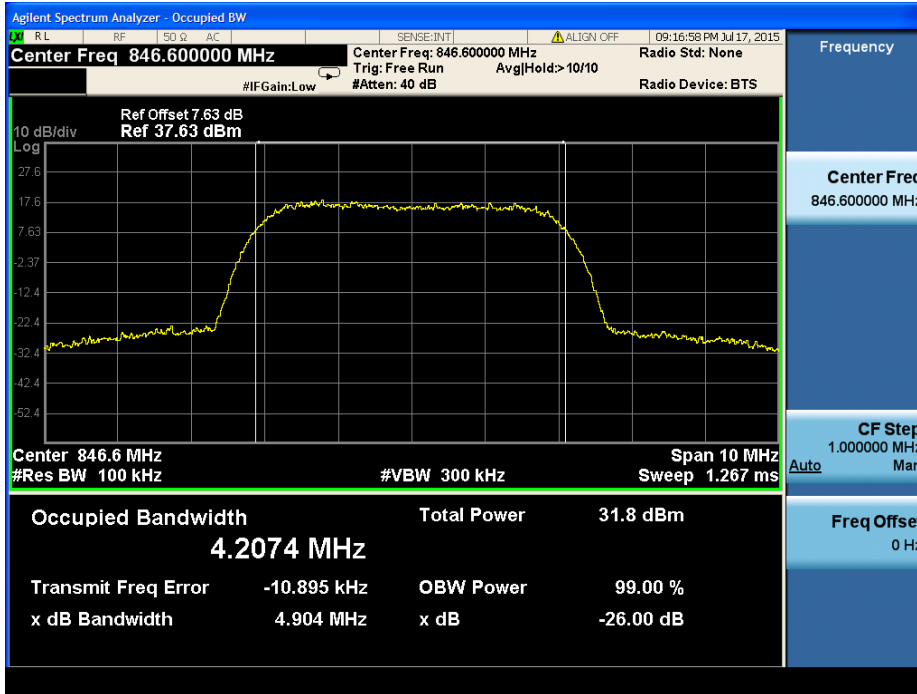


Test Band=WCDMA1700
 Test Mode=UMTS/TM3
 Test Channel=LCH

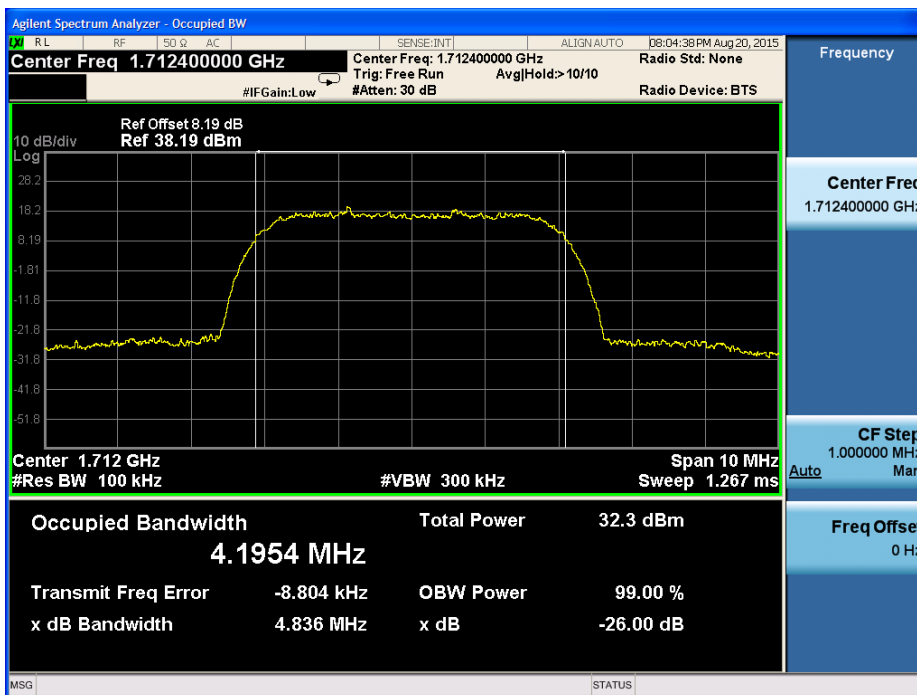


Test Band=WCDMA1700
 Test Mode=UMTS/TM3
 Test Channel=MCH

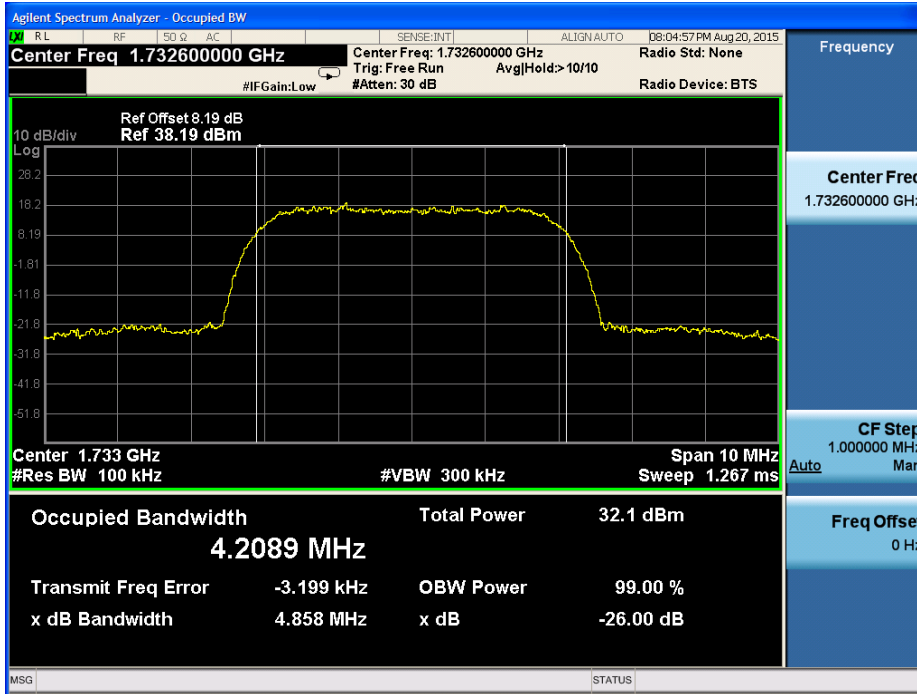


Test Band=WCDMA1700
 Test Mode=UMTS/TM3
 Test Channel=HCH

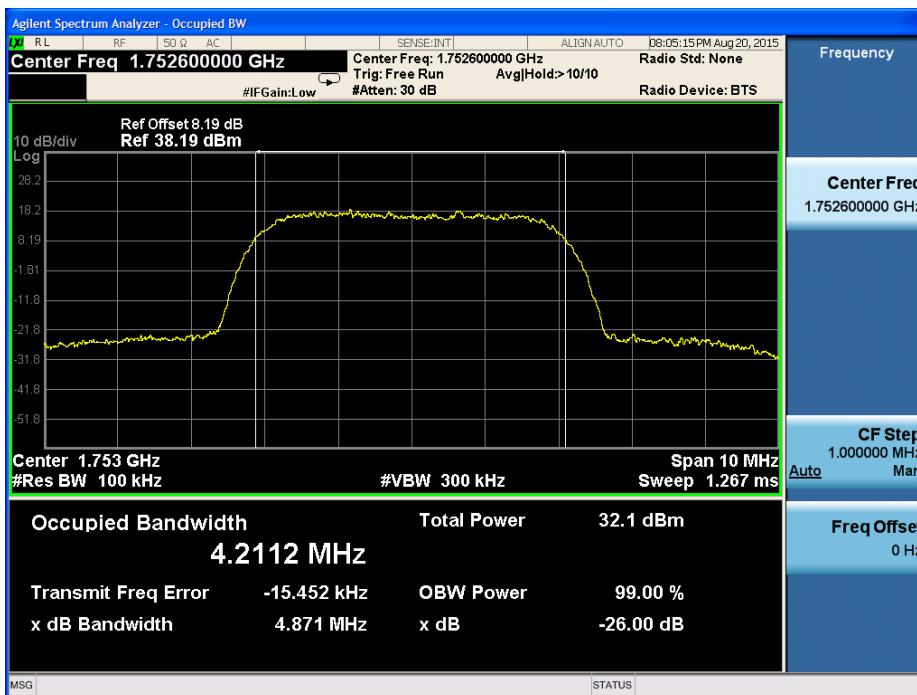


Test Band=WCDMA1900
 Test Mode=UMTS/TM3
 Test Channel=LCH

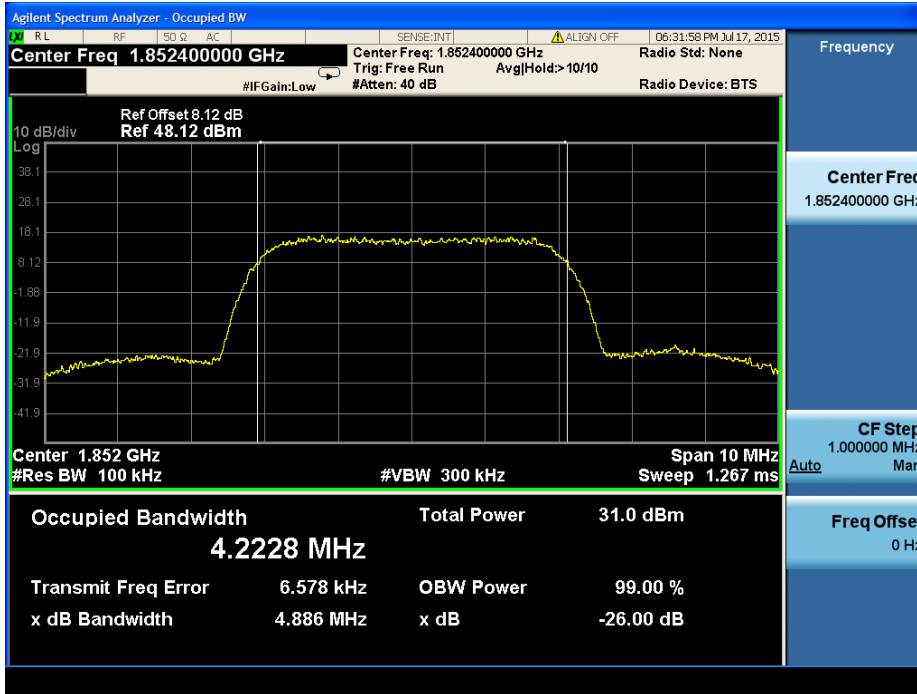




Test Band=WCDMA1900
 Test Mode=UMTS/TM3
 Test Channel=MCH

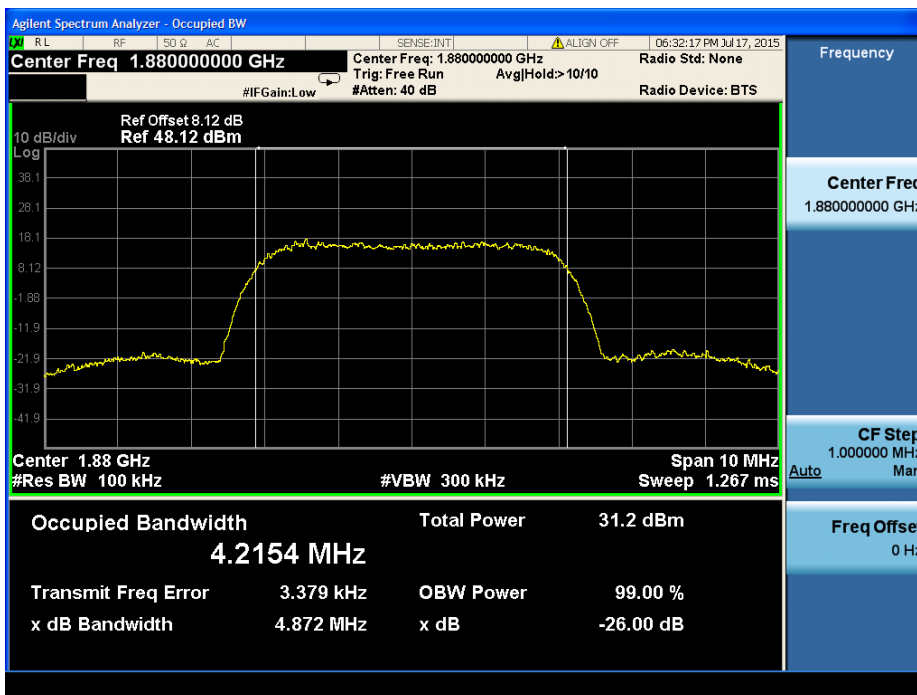




Test Band=WCDMA1900
 Test Mode=UMTS/TM3
 Test Channel=HCH

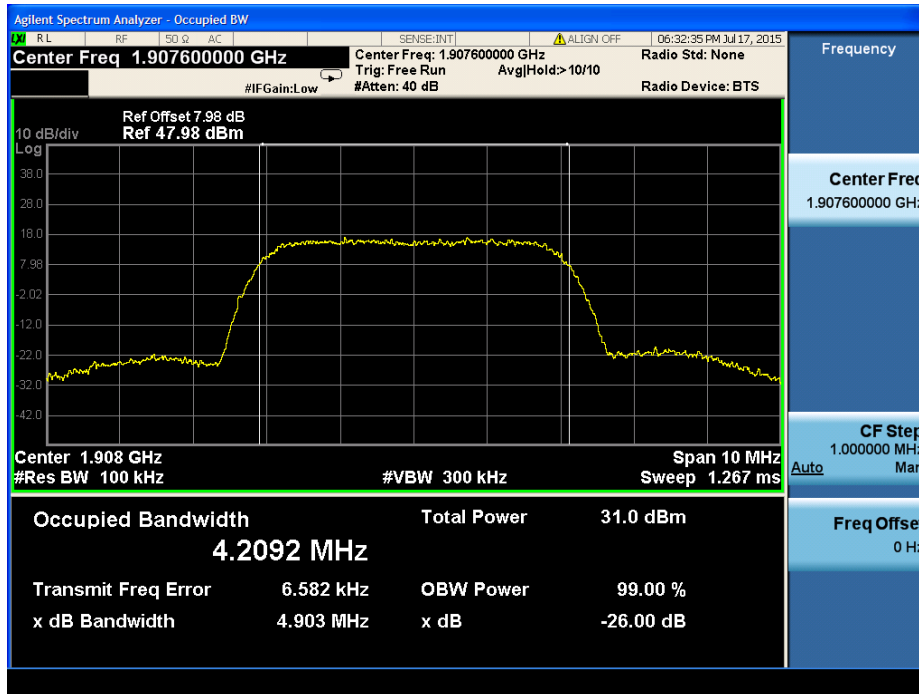




LTE Band 4
 Channel Bandwidth: 1.4 MHz
 Test Mode=QPSK/TM4

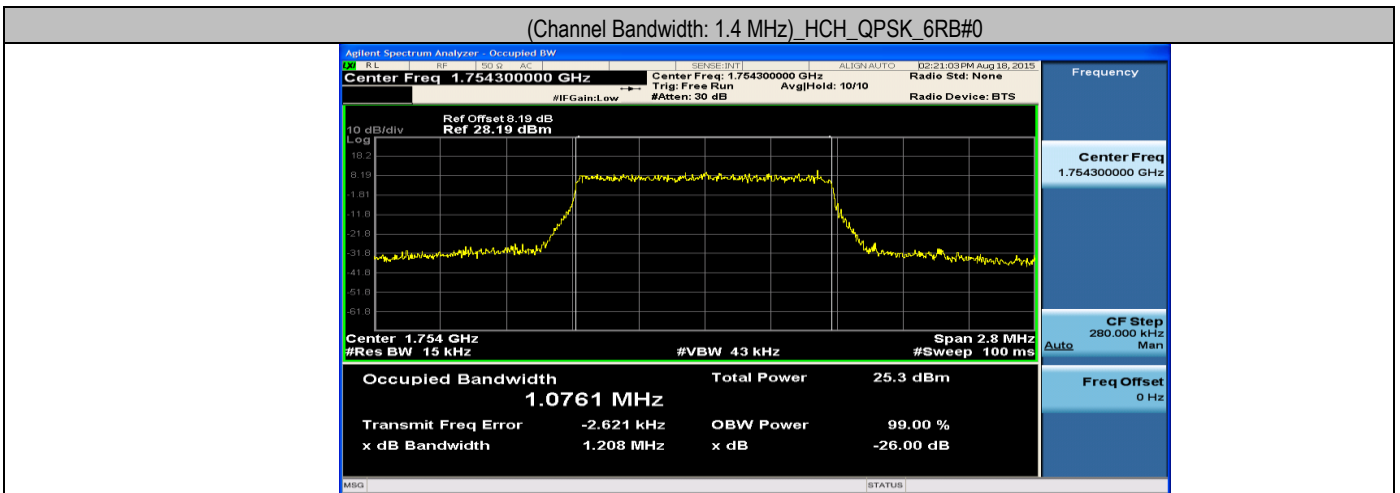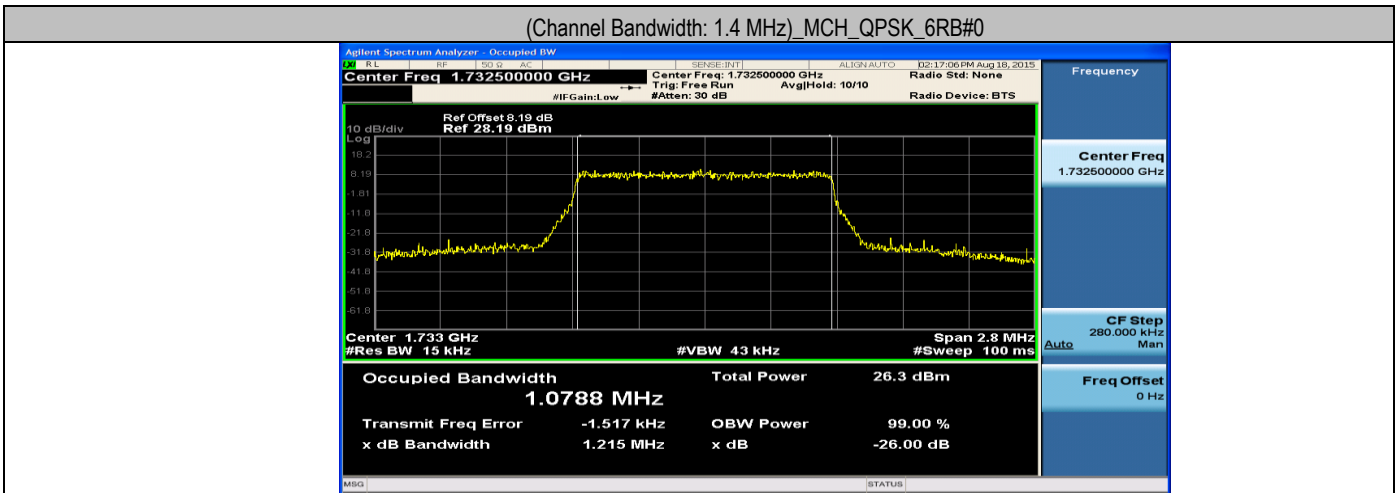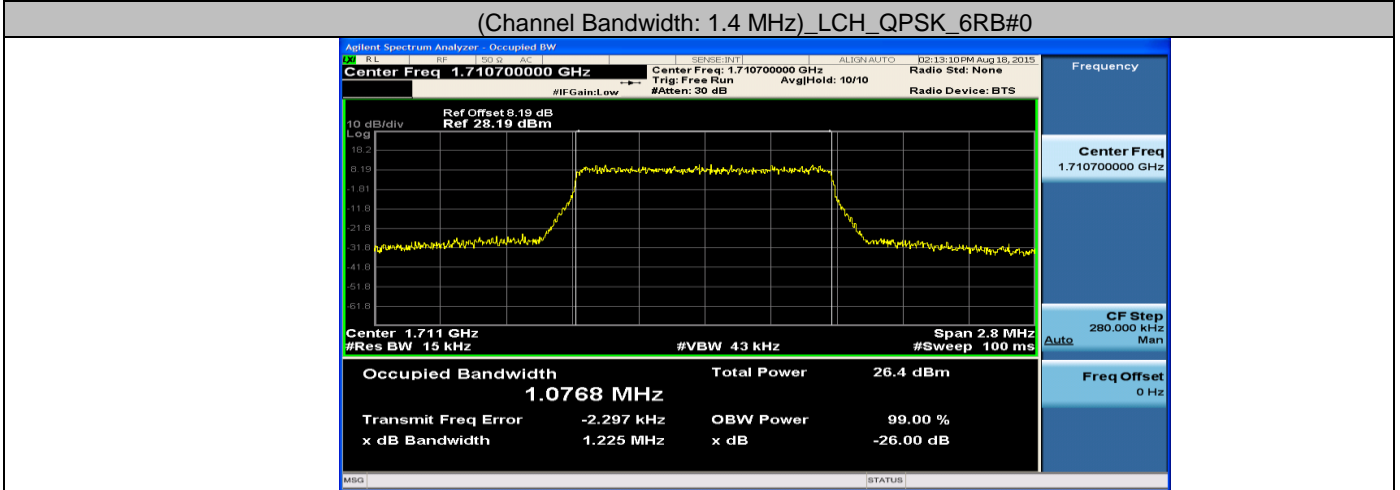




LTE Band 4
 Channel Bandwidth: 1.4 MHz
 Test Mode=16QAM/TM5

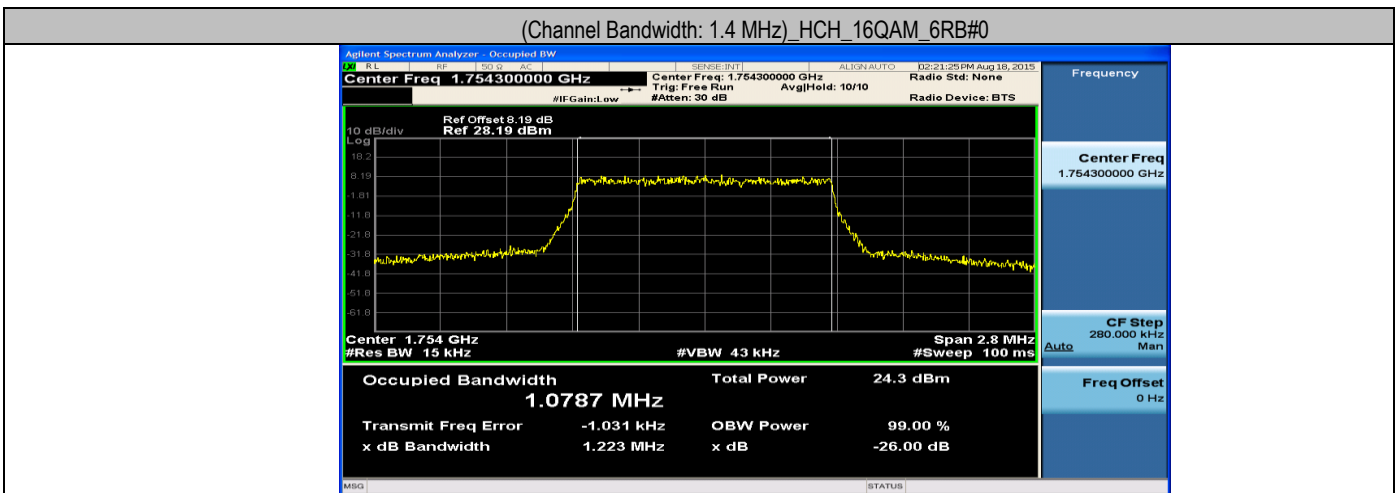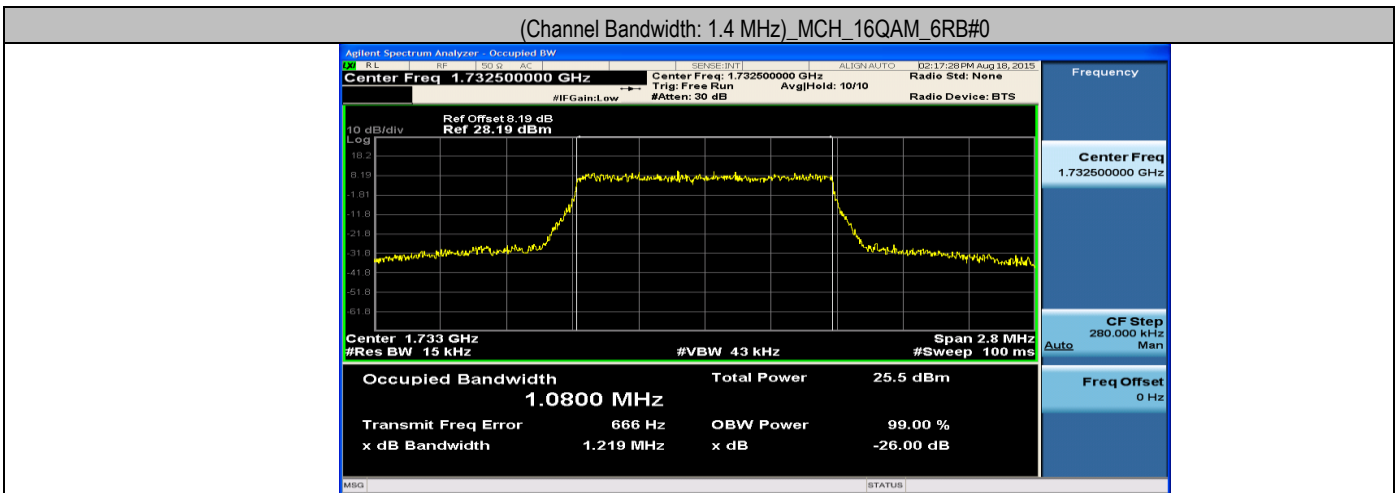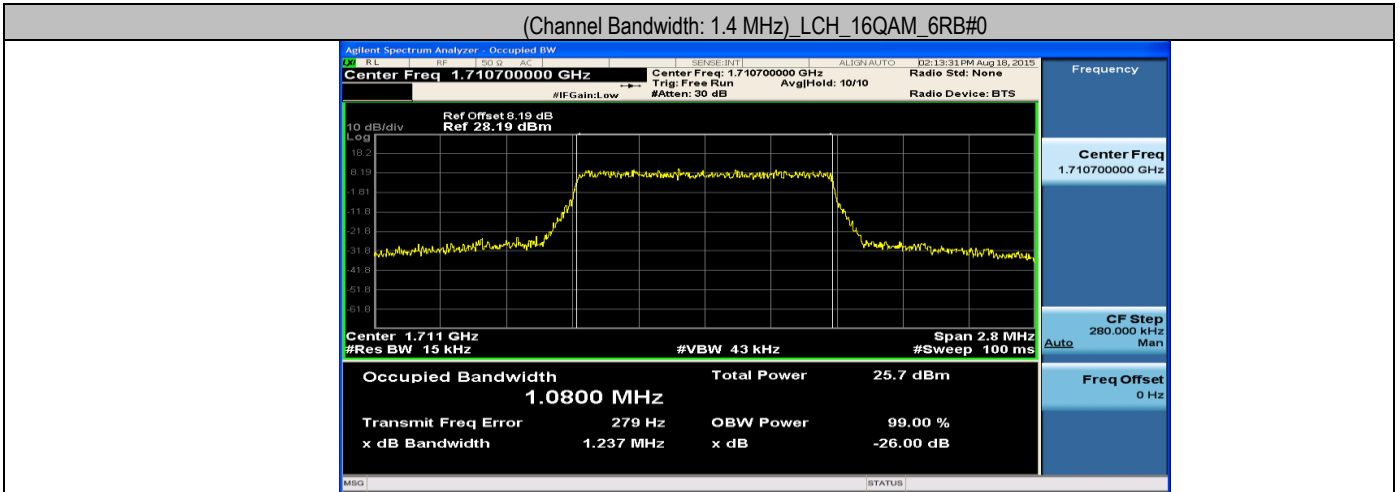




LTE Band 4
 Channel Bandwidth: 3 MHz
 Test Mode=QPSK/TM4

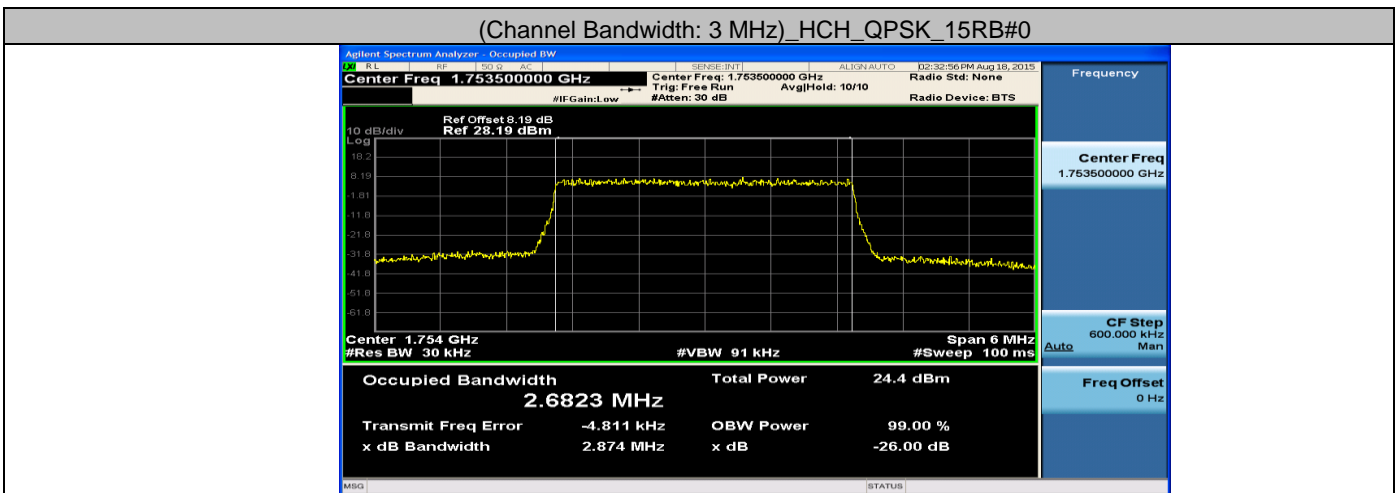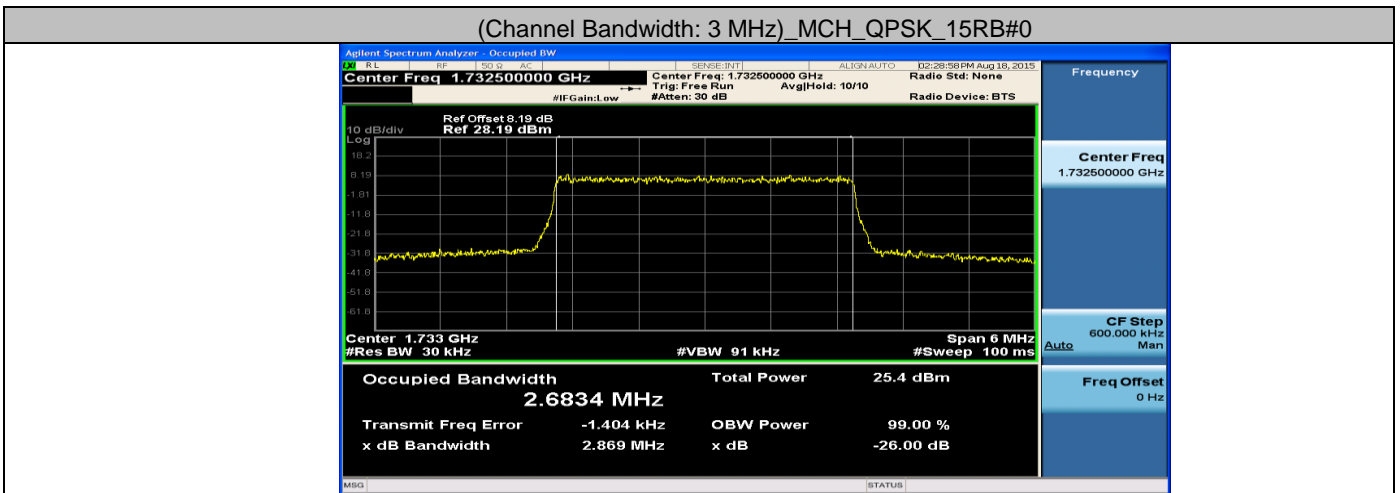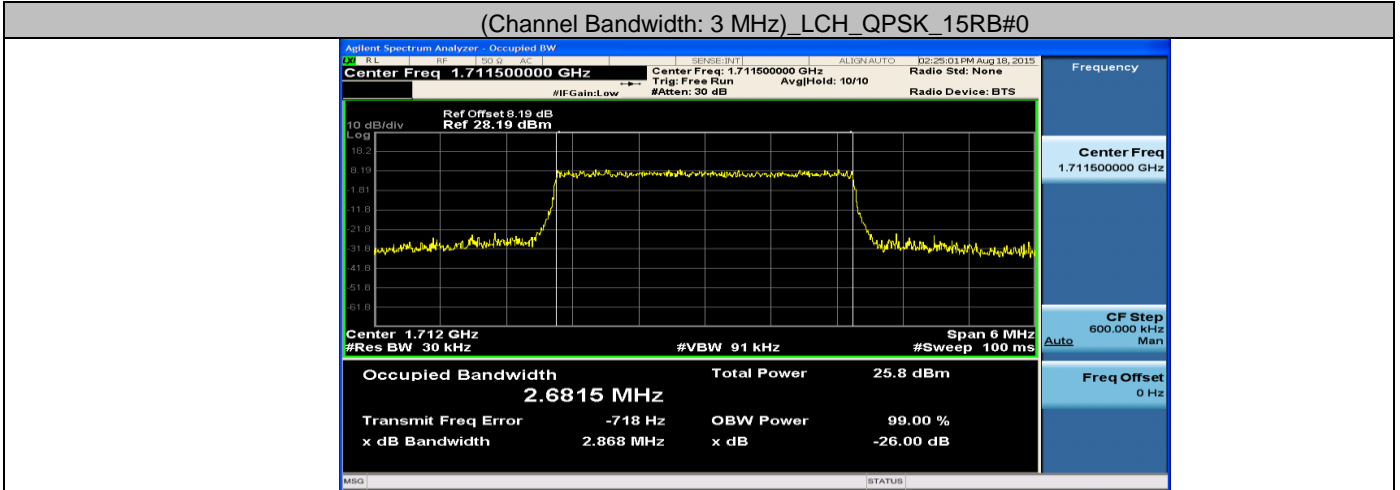

LTE Band 4
 Channel Bandwidth: 3 MHz
 Test Mode=16QAM/TM5

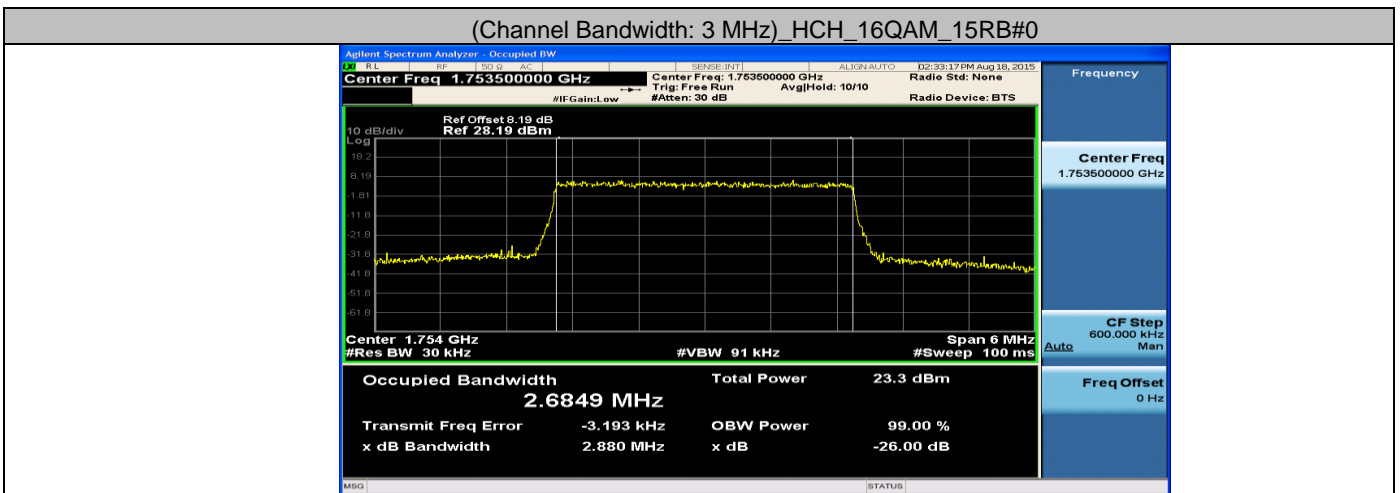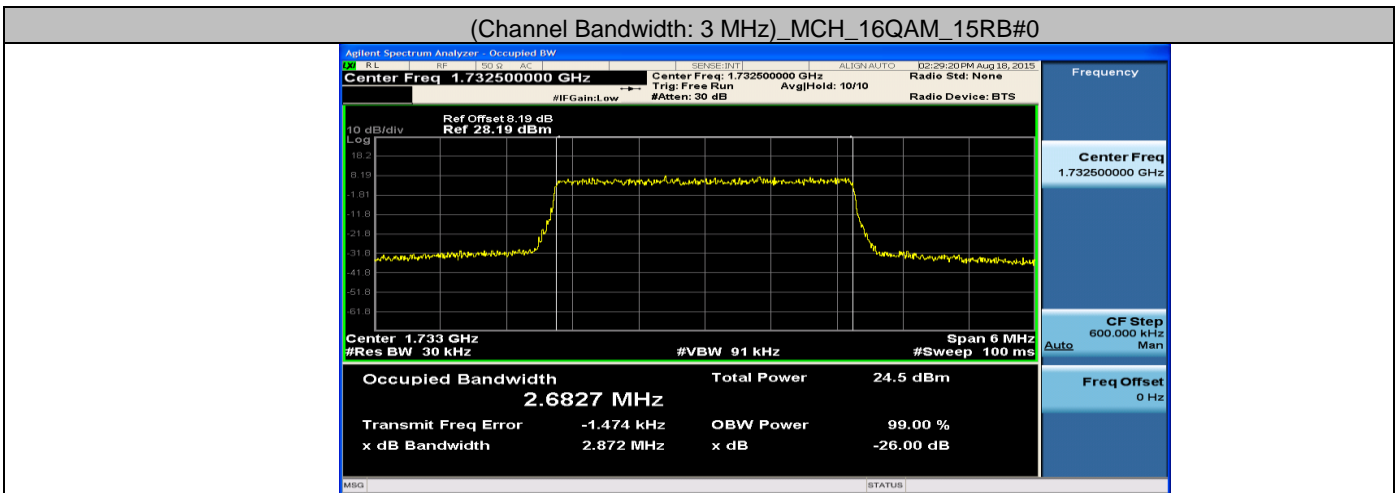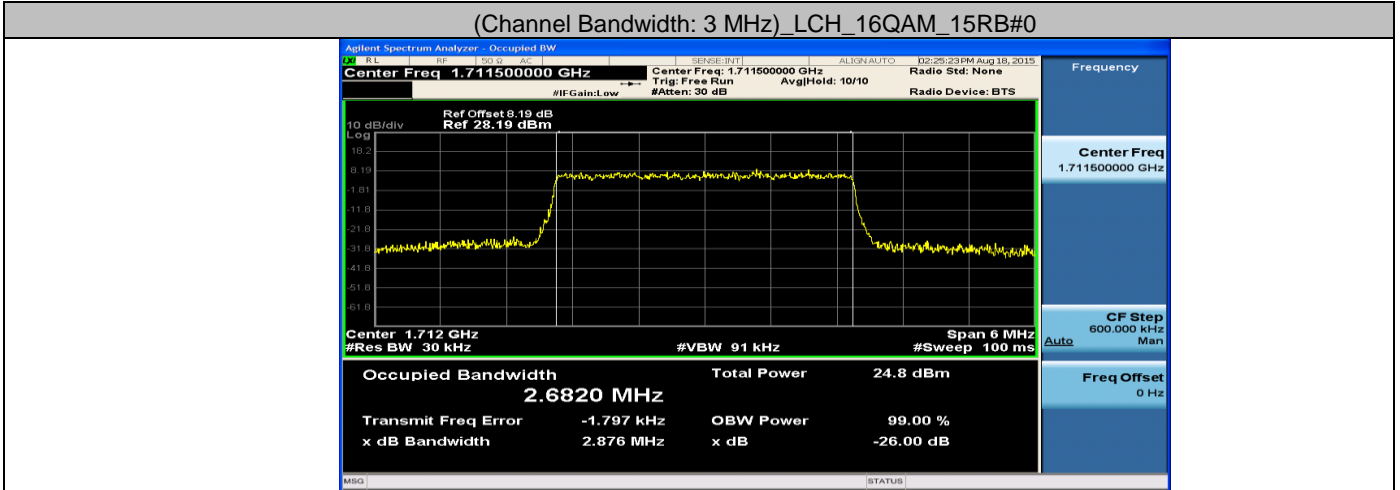


LTE Band 4
 Channel Bandwidth: 5 MHz
 Test Mode=QPSK/TM4

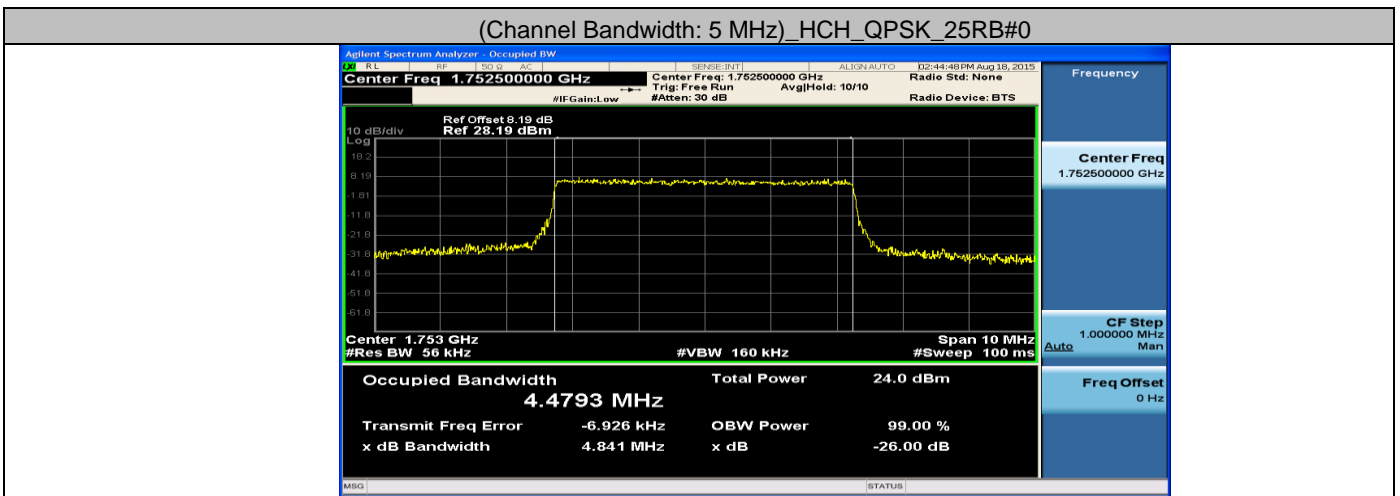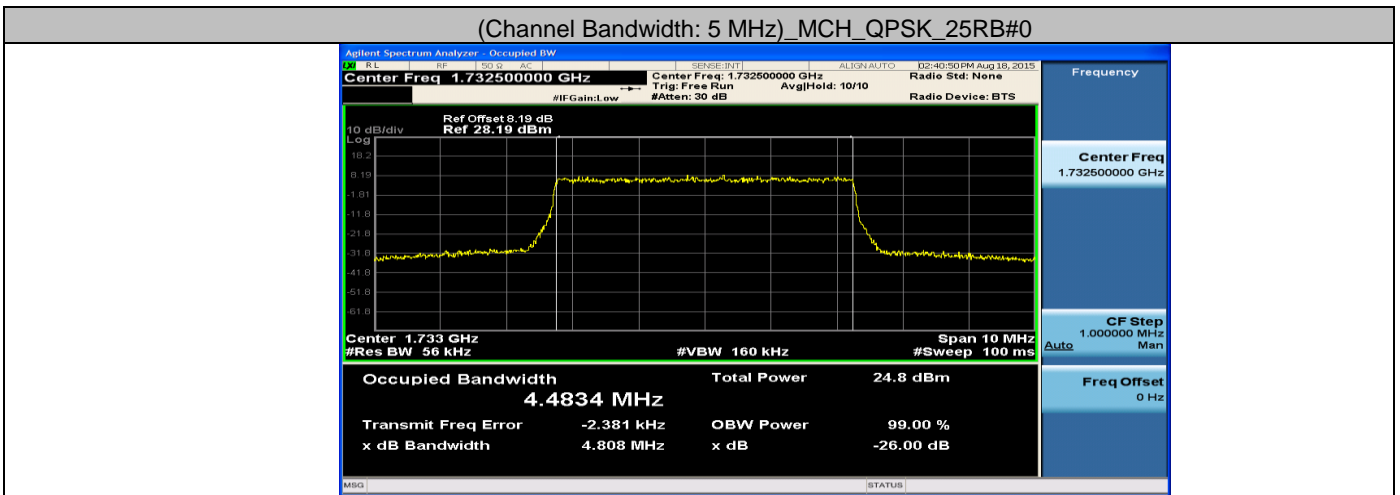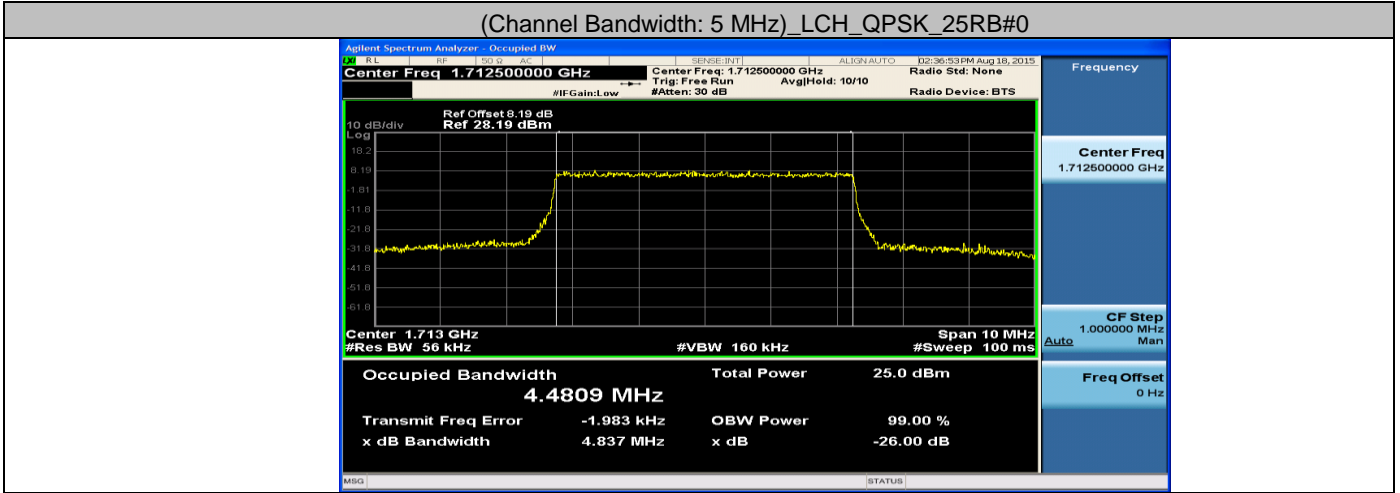


LTE Band 4
 Channel Bandwidth: 5 MHz
 Test Mode=16QAM/TM5


(Channel Bandwidth: 5 MHz)_LCH_16QAM_25RB#0

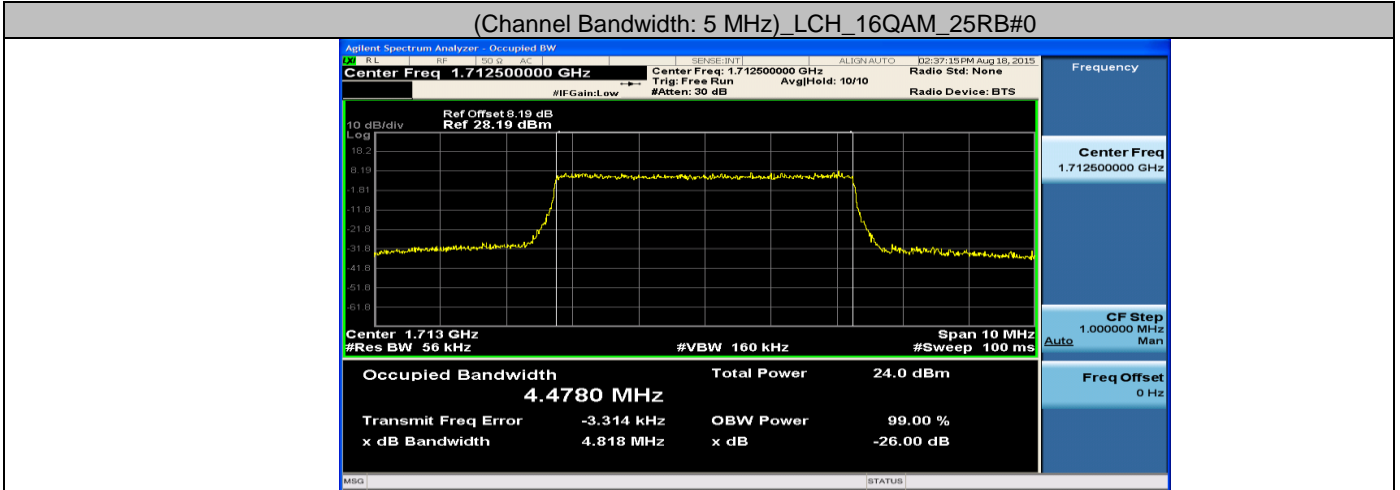




(Channel Bandwidth: 5 MHz)_MCH_16QAM_25RB#0

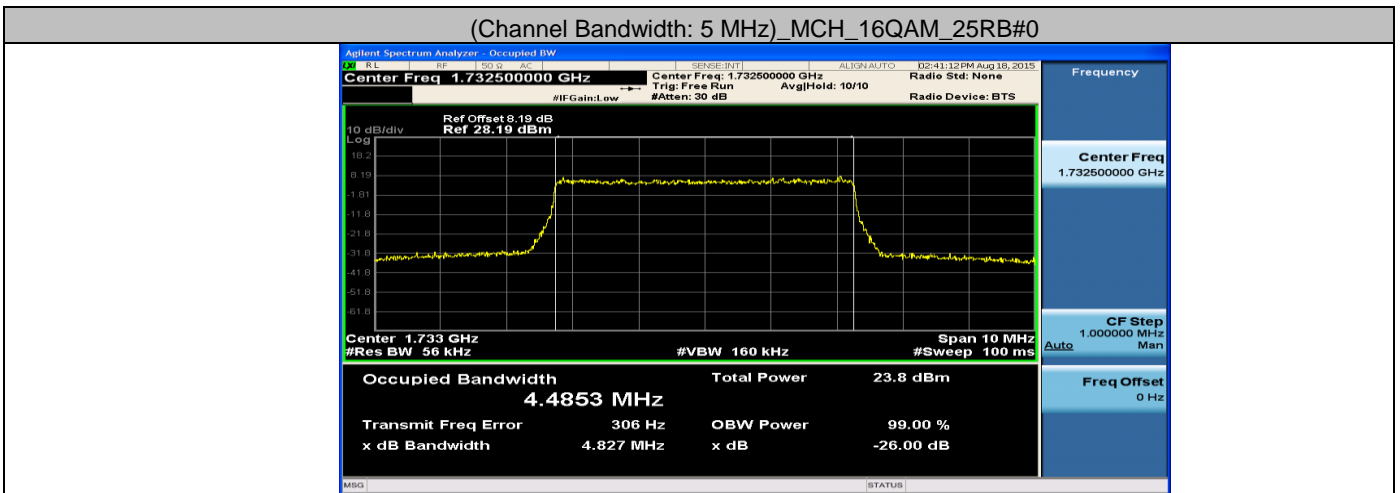




(Channel Bandwidth: 5 MHz)_HCH_16QAM_25RB#0

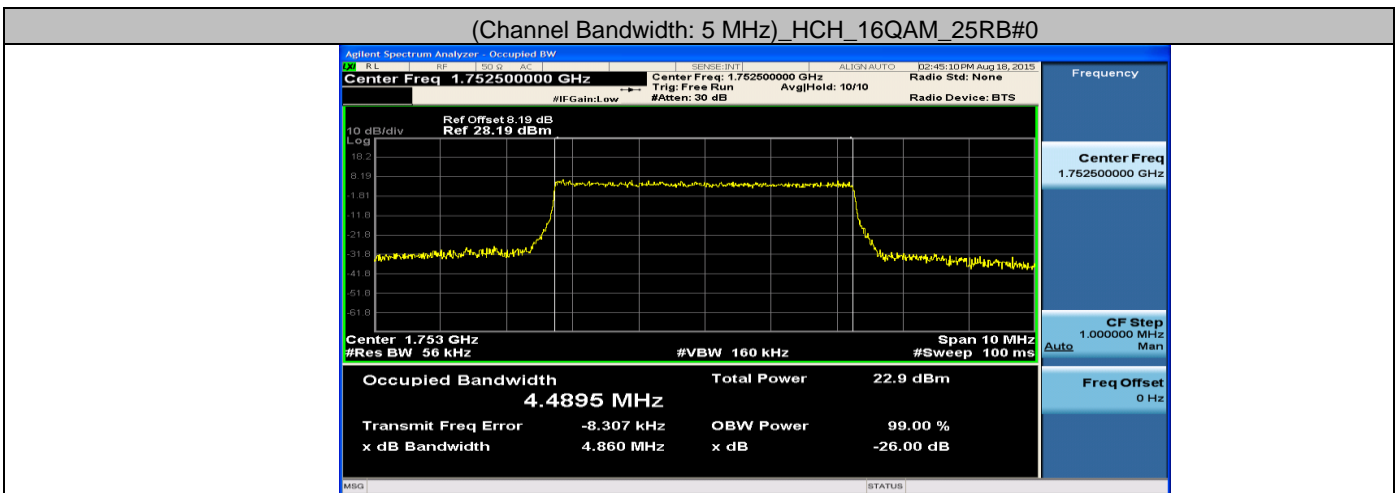




LTE Band 4
 Channel Bandwidth: 10 MHz
 Test Mode=QPSK/TM4

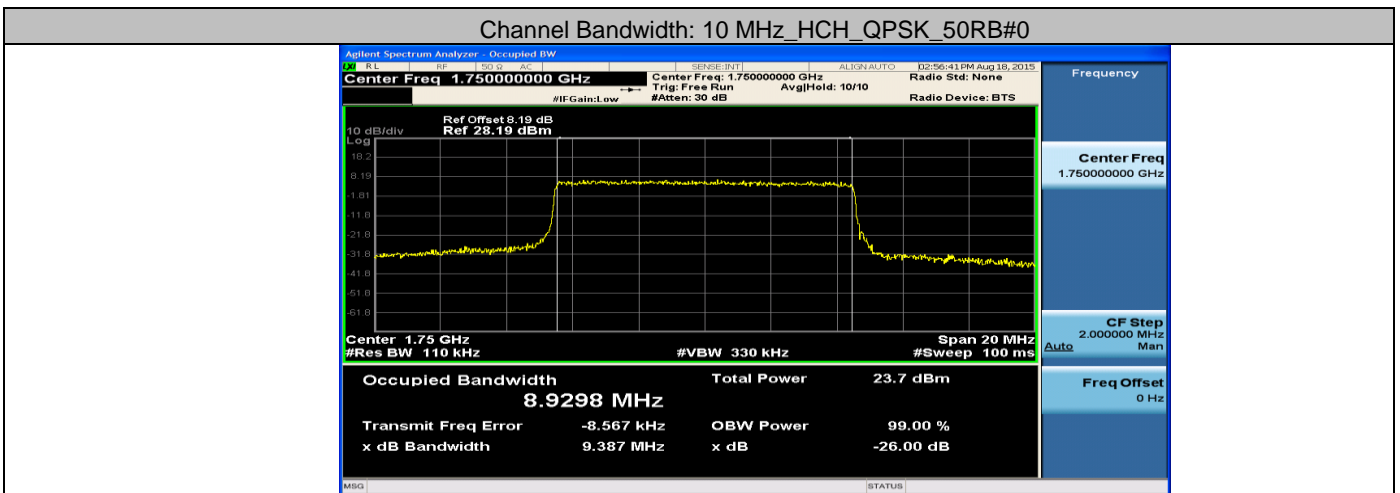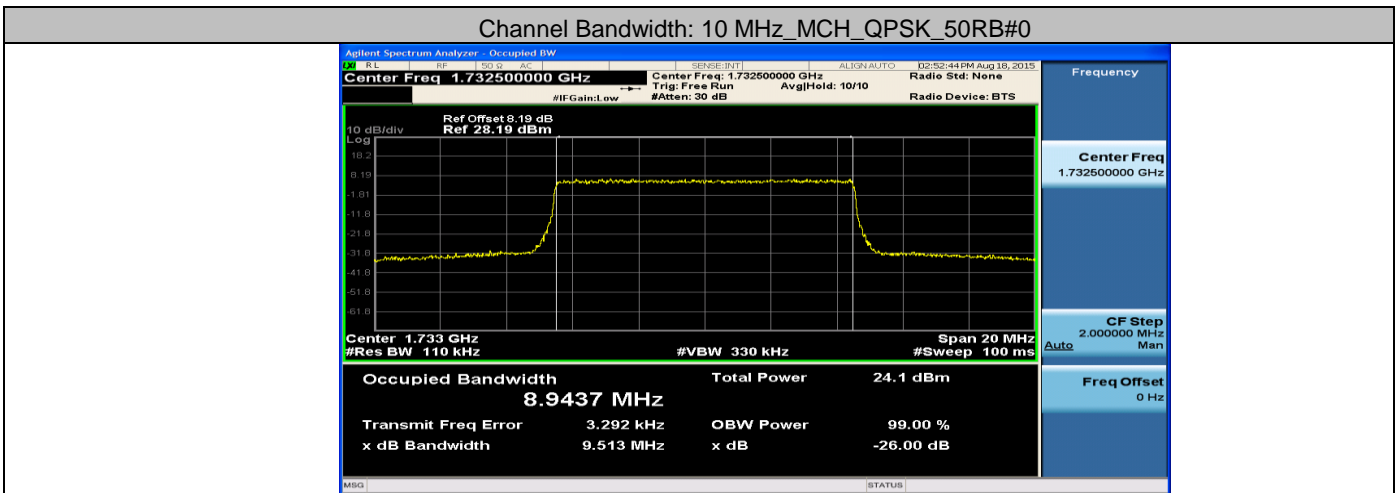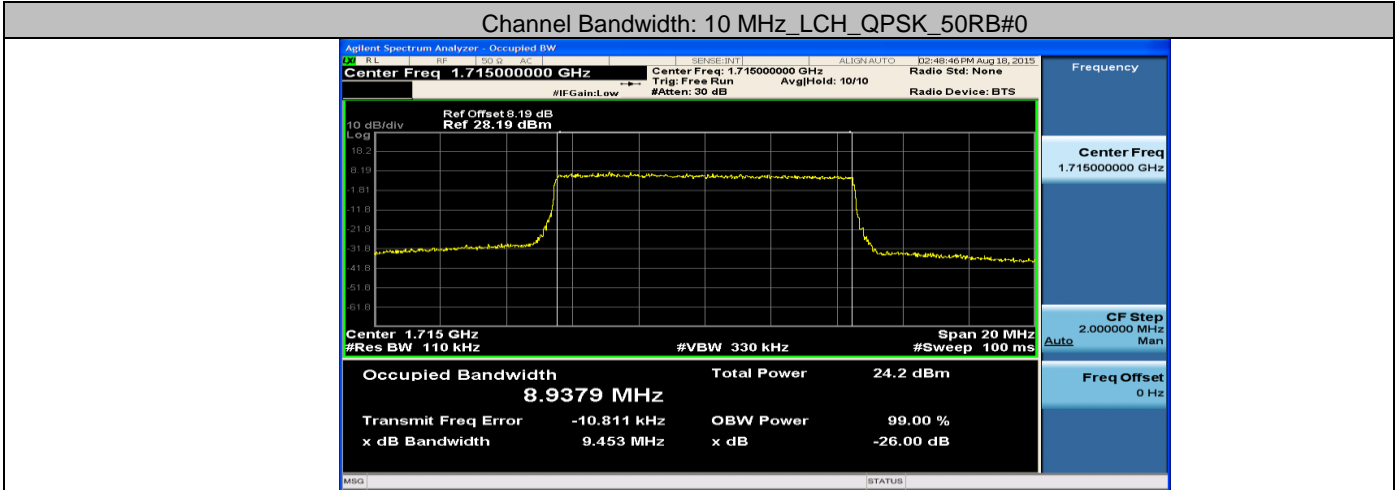

LTE Band 4
 Channel Bandwidth: 10MHz
 Test Mode=16QAM/TM5

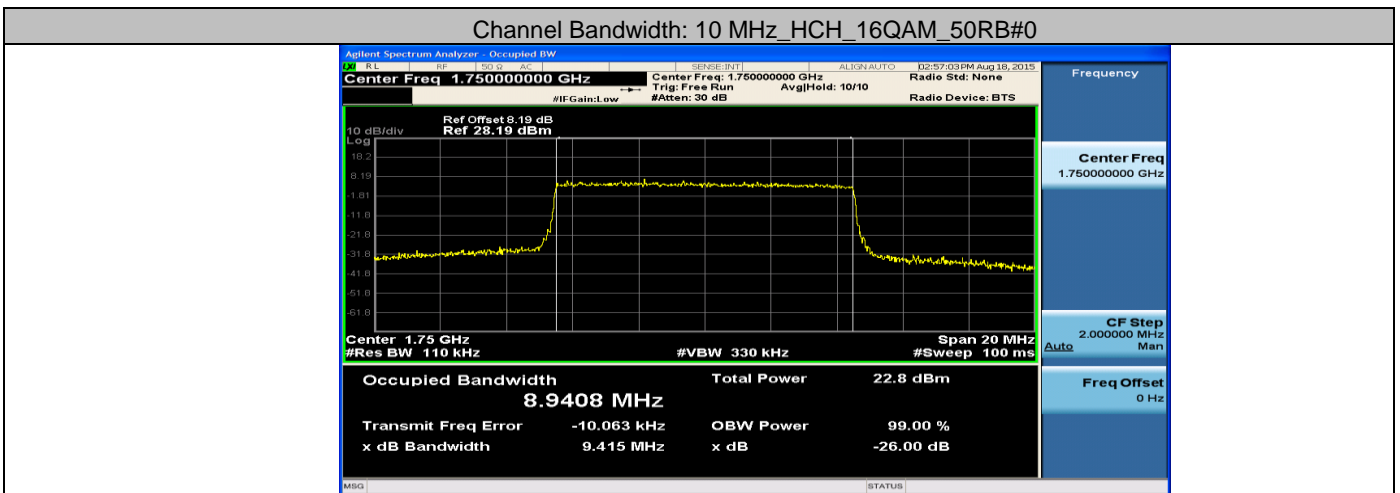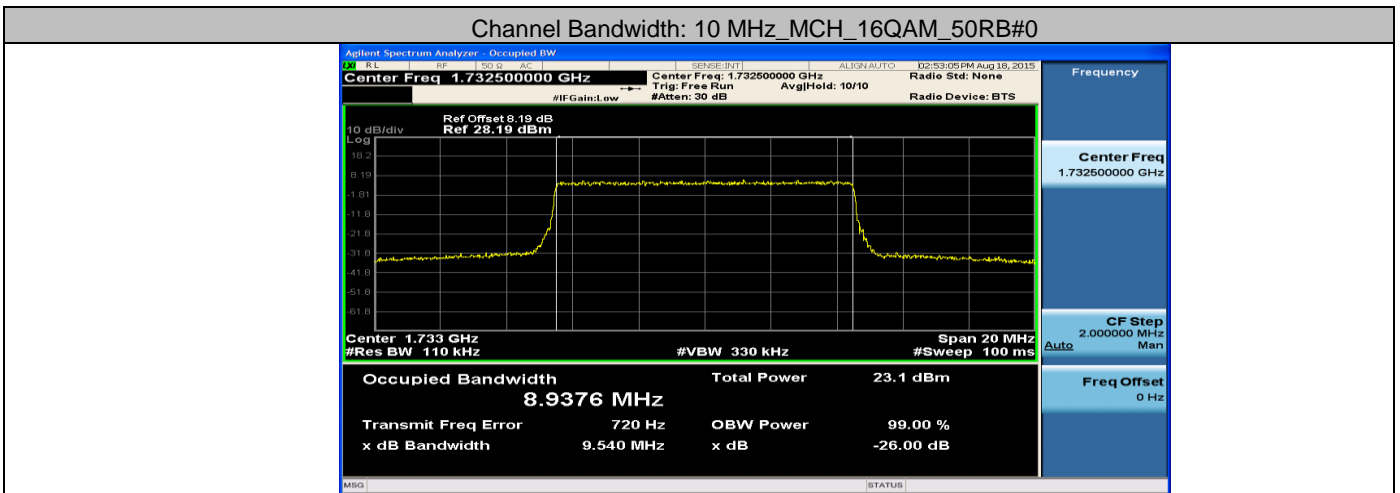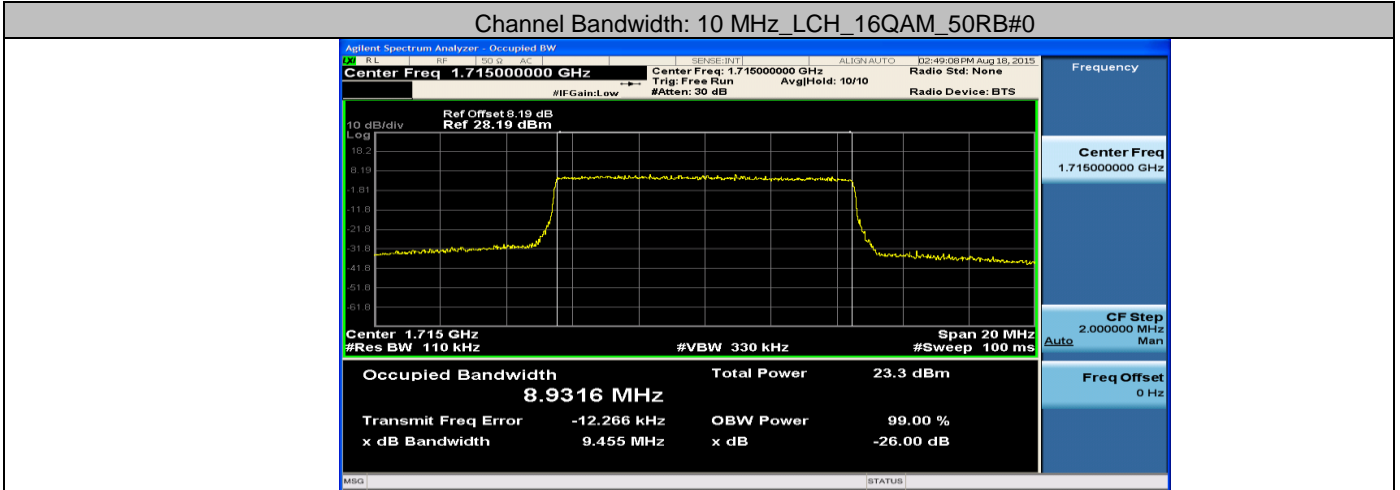


LTE Band 4
 Channel Bandwidth: 15 MHz
 Test Mode=QPSK/TM4

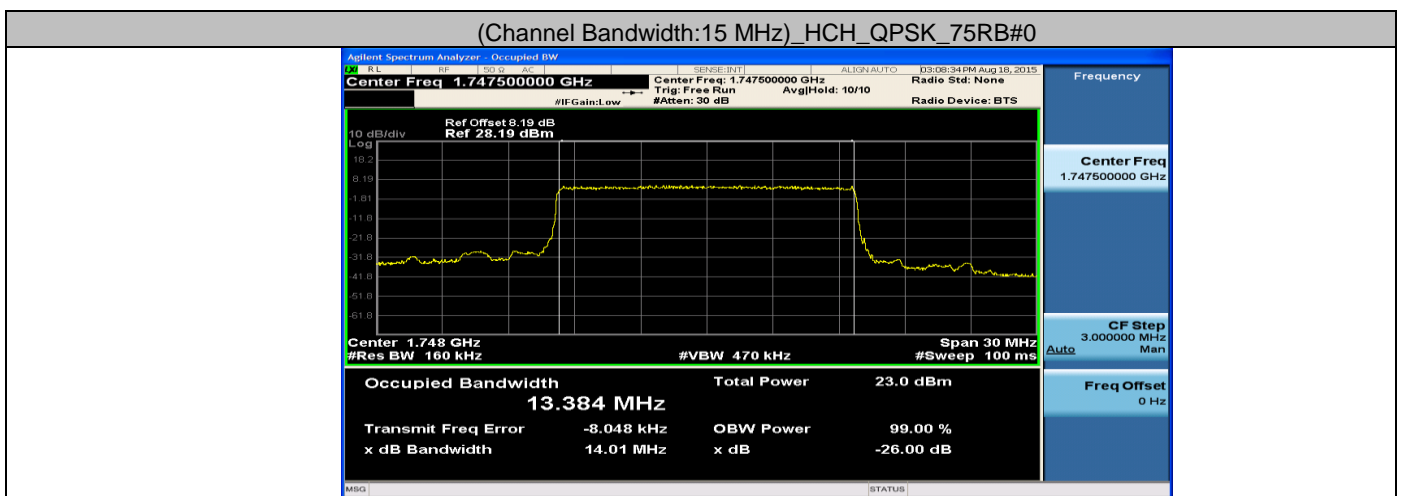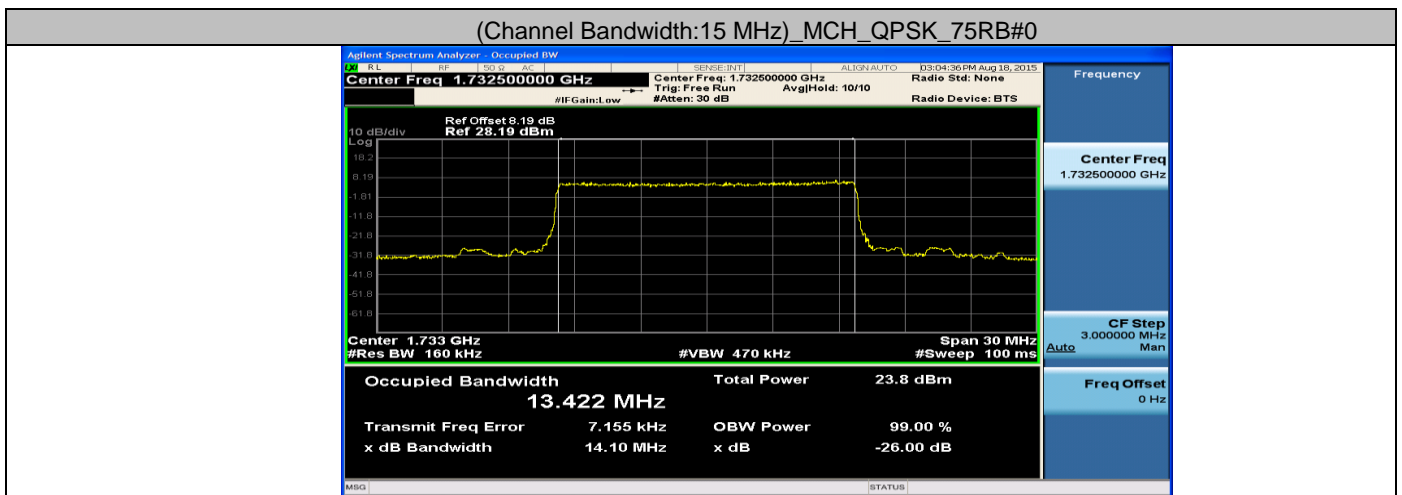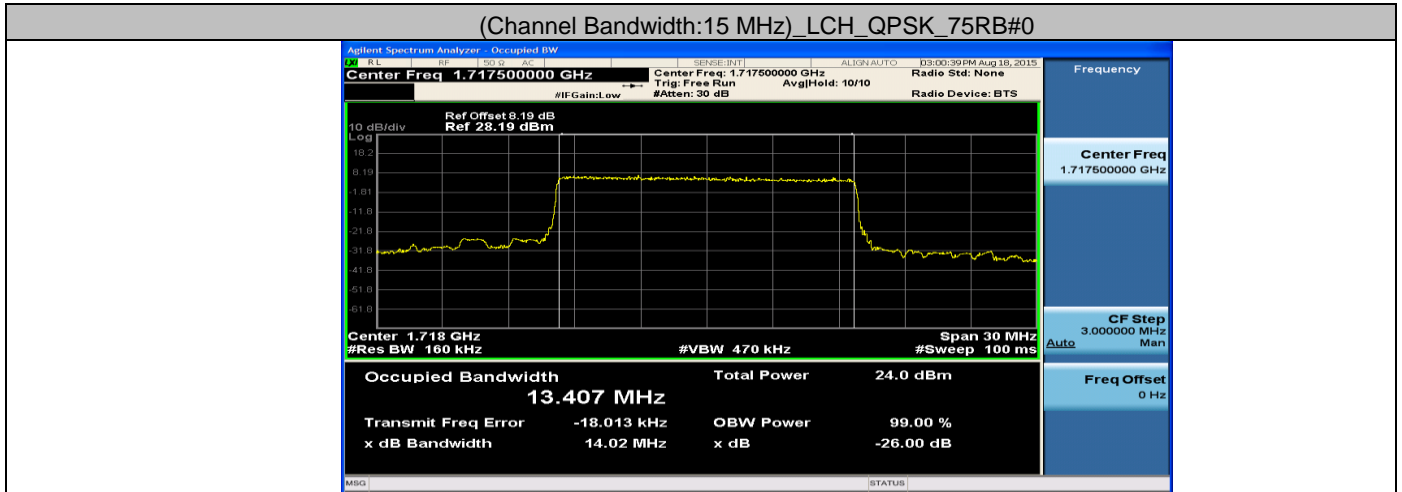


LTE Band 4
 Channel Bandwidth: 15 MHz
 Test Mode=16QAM/TM5


(Channel Bandwidth:15 MHz)_LCH_16QAM_75RB#0

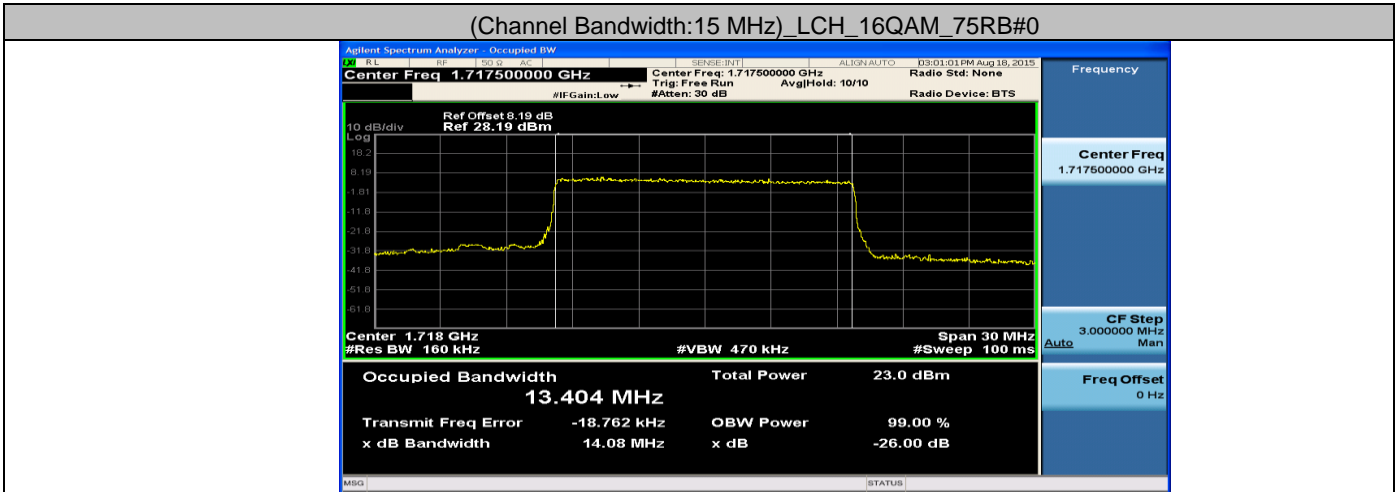

(Channel Bandwidth:15 MHz)_MCH_16QAM_75RB#0

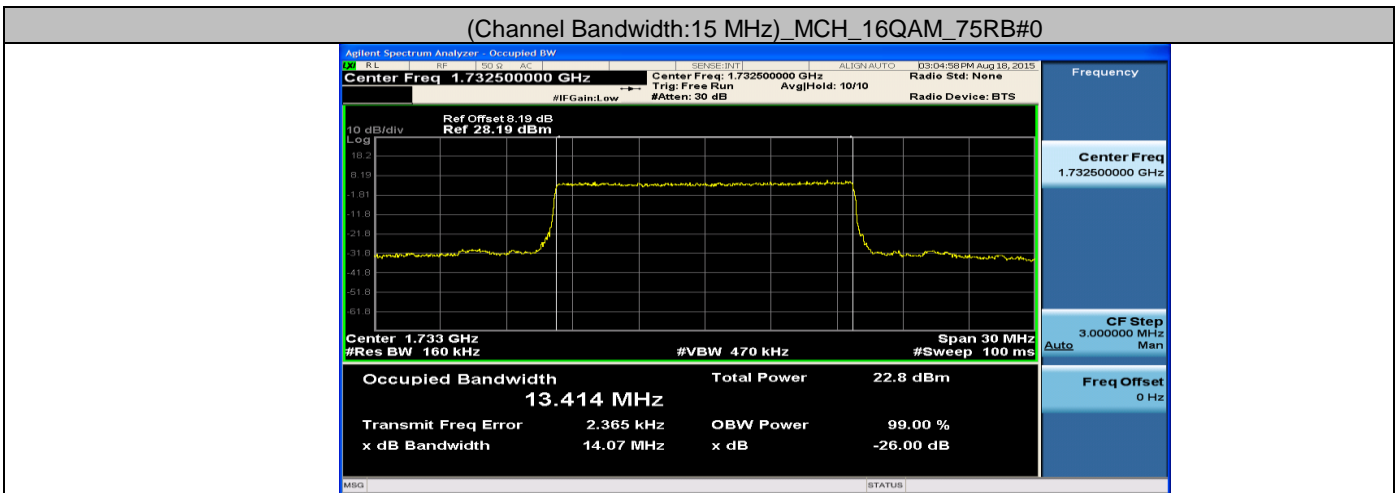


(Channel Bandwidth:15 MHz)_HCH_16QAM_75RB#0

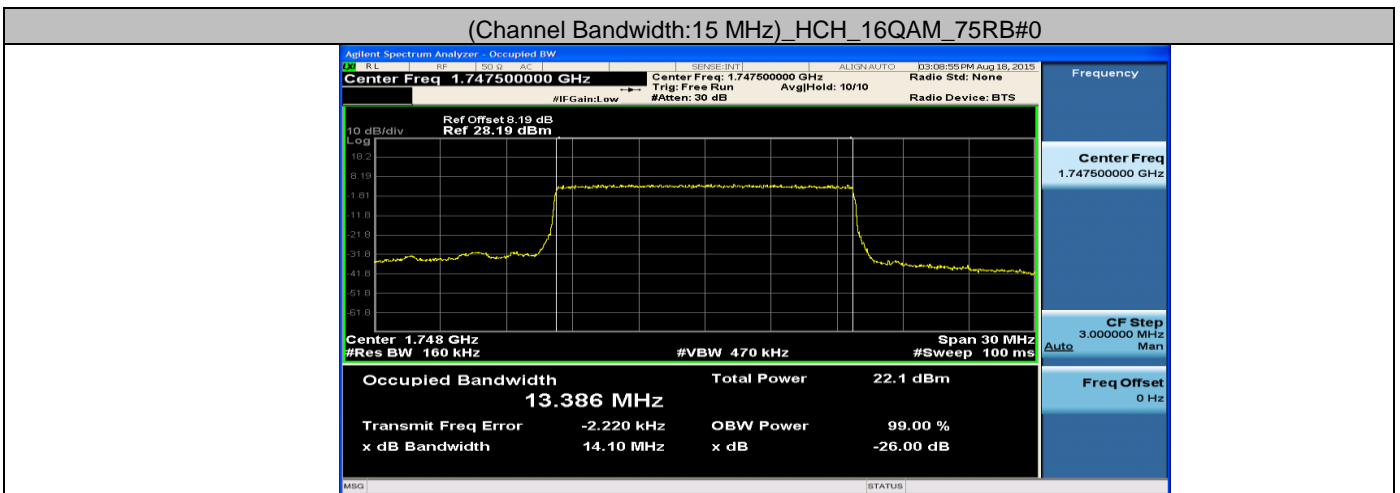


LTE Band 4
 Channel Bandwidth: 20 MHz
 Test Mode=QPSK/TM4


(Channel Bandwidth:20 MHz)_LCH_QPSK_100RB#0

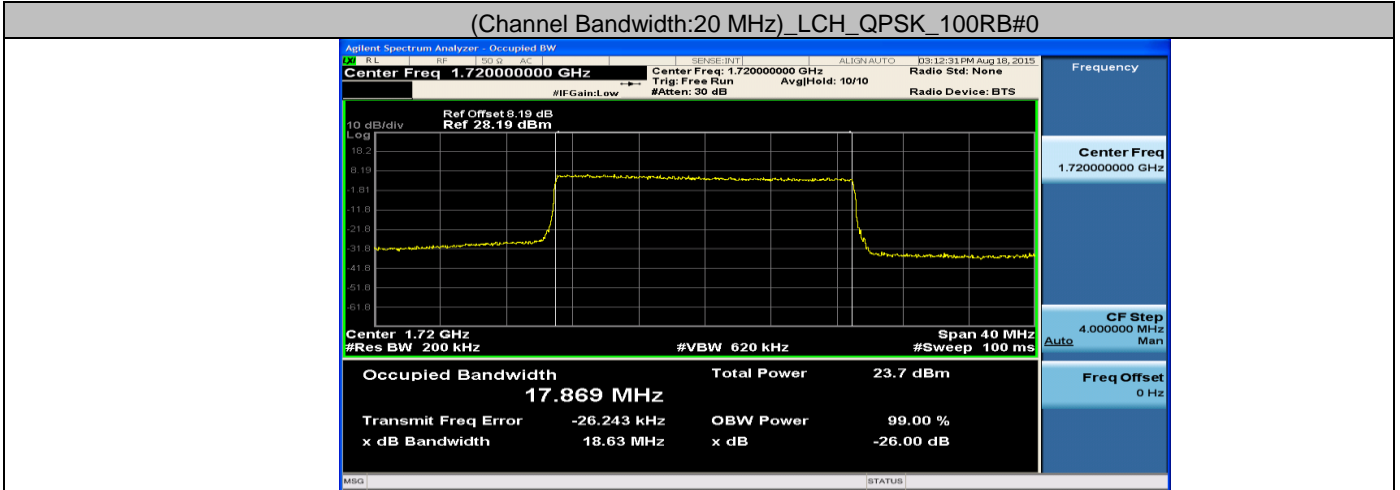

(Channel Bandwidth:20 MHz)_MCH_QPSK_100RB#0

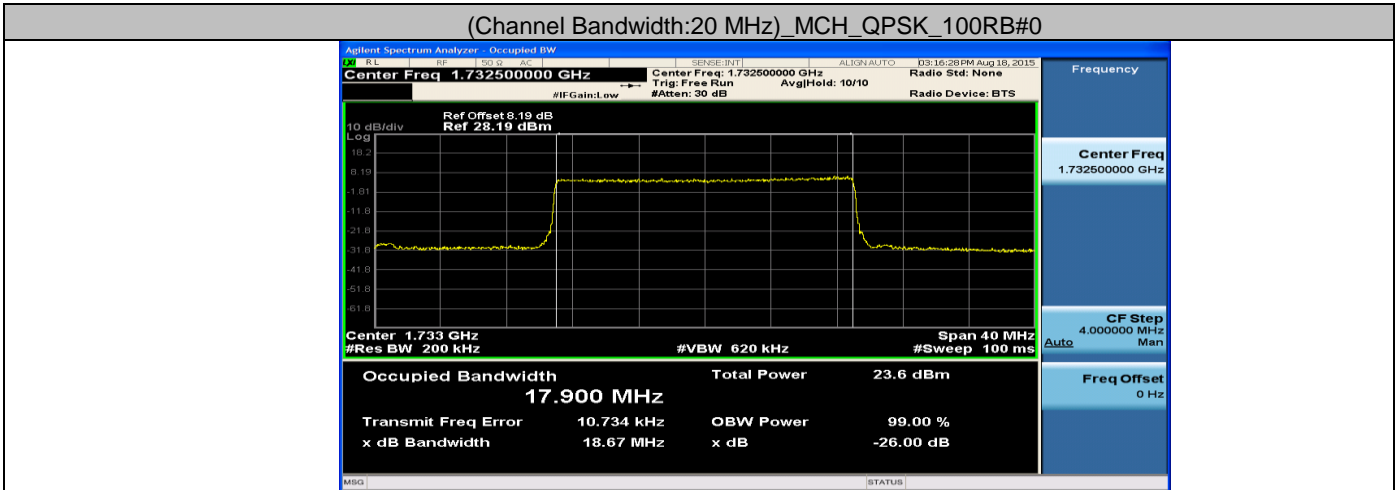


(Channel Bandwidth:20 MHz)_HCH_QPSK_100RB#0

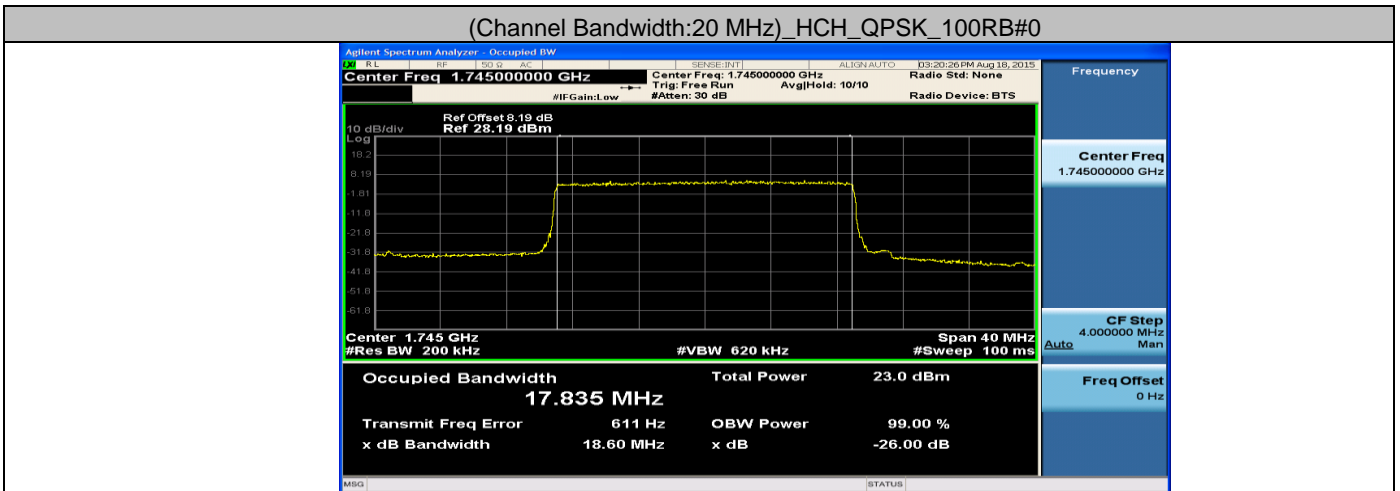


LTE Band 4
 Channel Bandwidth: 20 MHz
 Test Mode=16QAM/TM5


(Channel Bandwidth:20 MHz)_LCH_16QAM_100RB#0

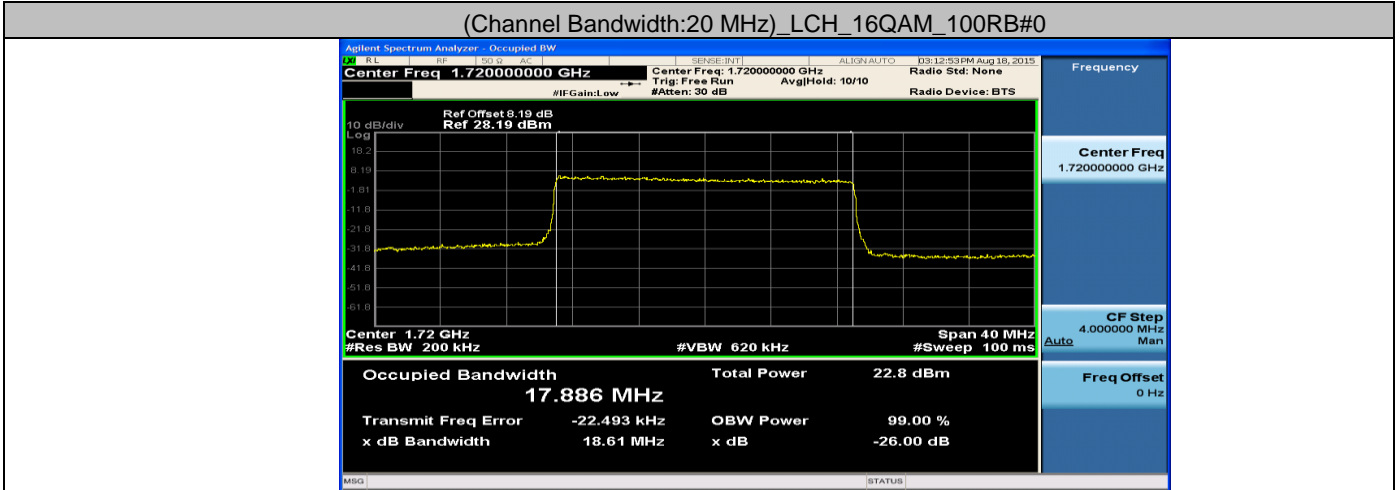




(Channel Bandwidth:20 MHz)_MCH_16QAM_100RB#0

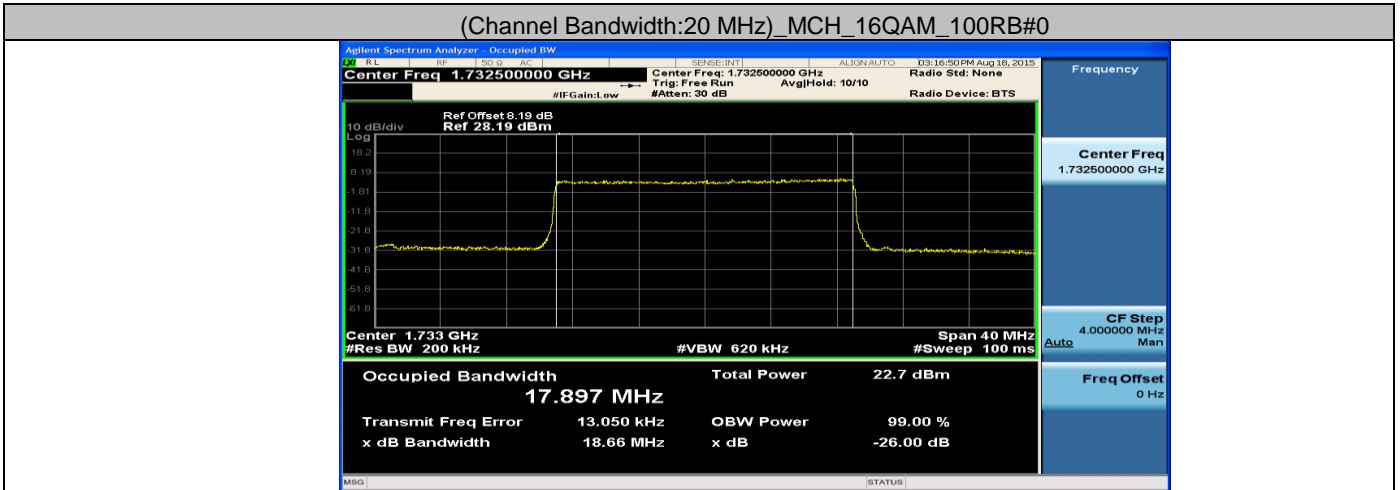

(Channel Bandwidth:20 MHz)_HCH_16QAM_100RB#0

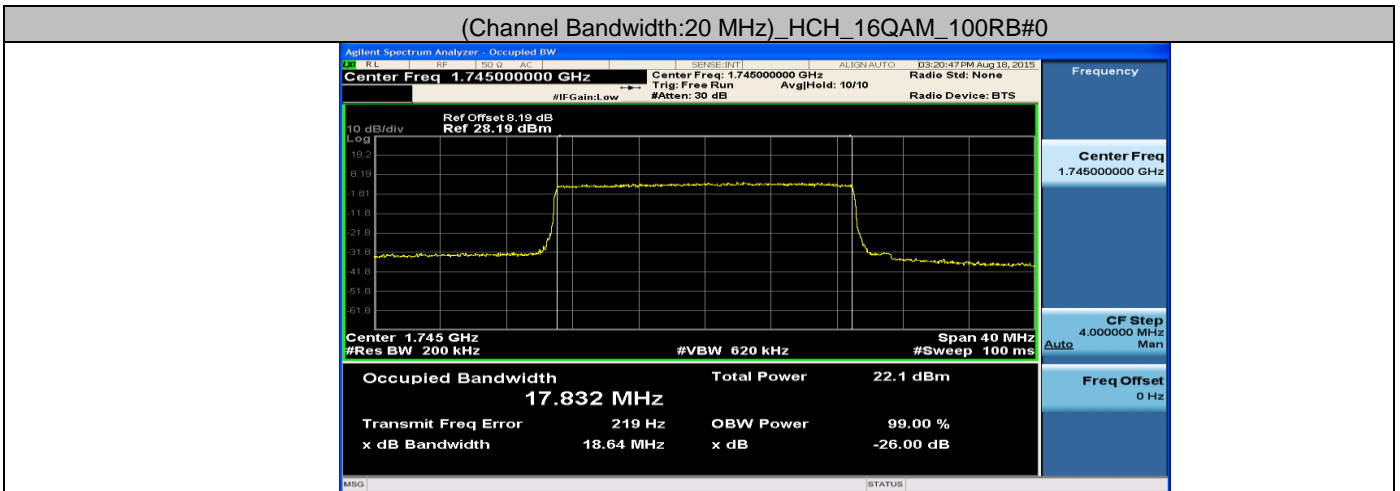


LTE Band 7
 Channel Bandwidth: 5 MHz
 Test Mode=QPSK/TM4

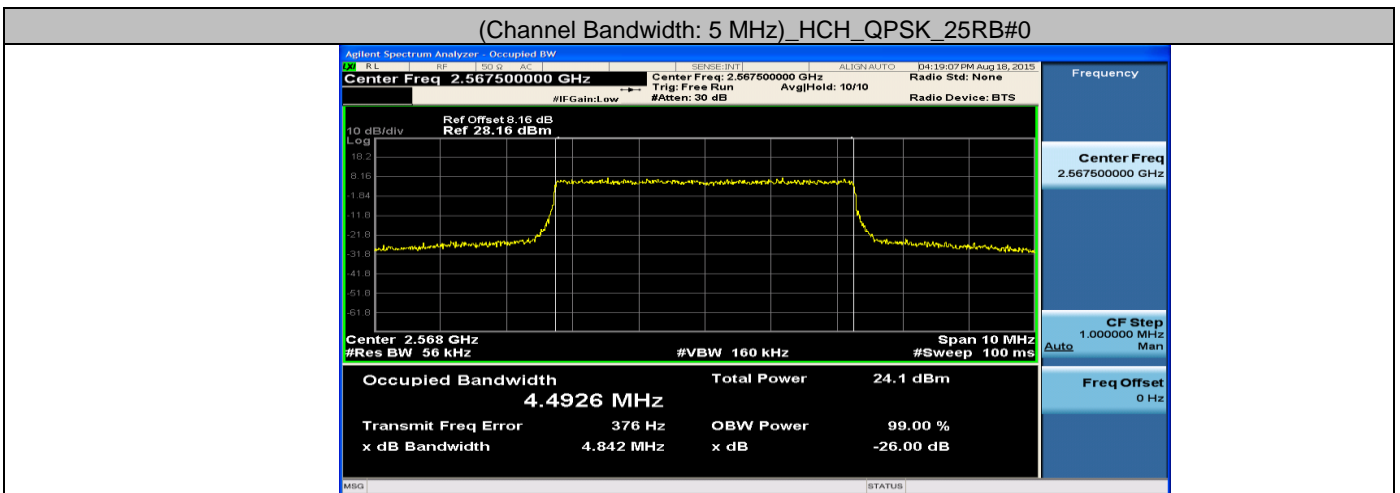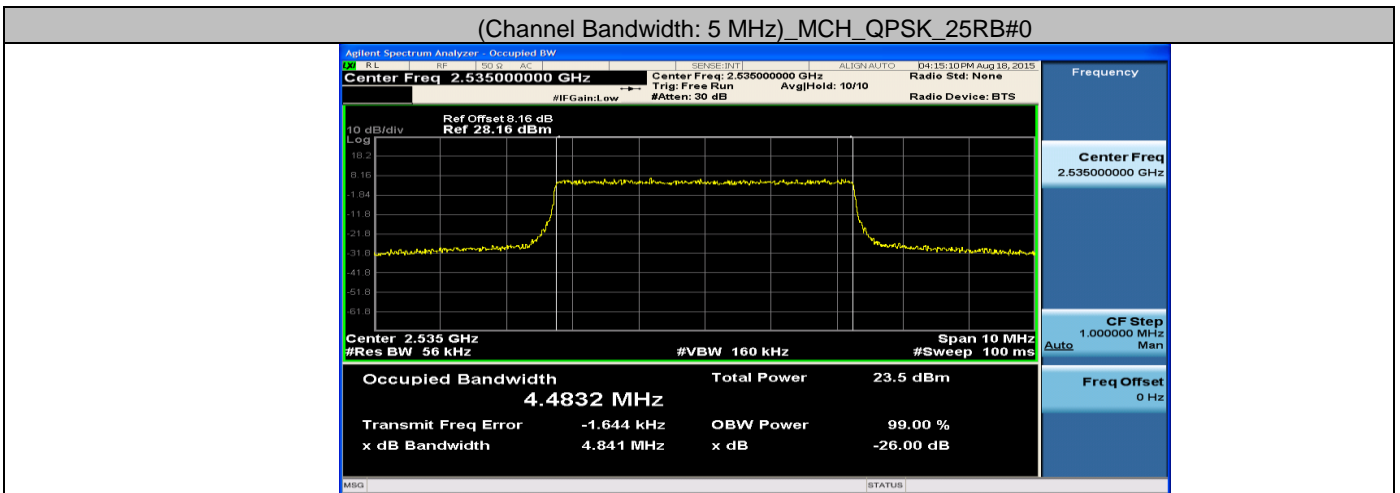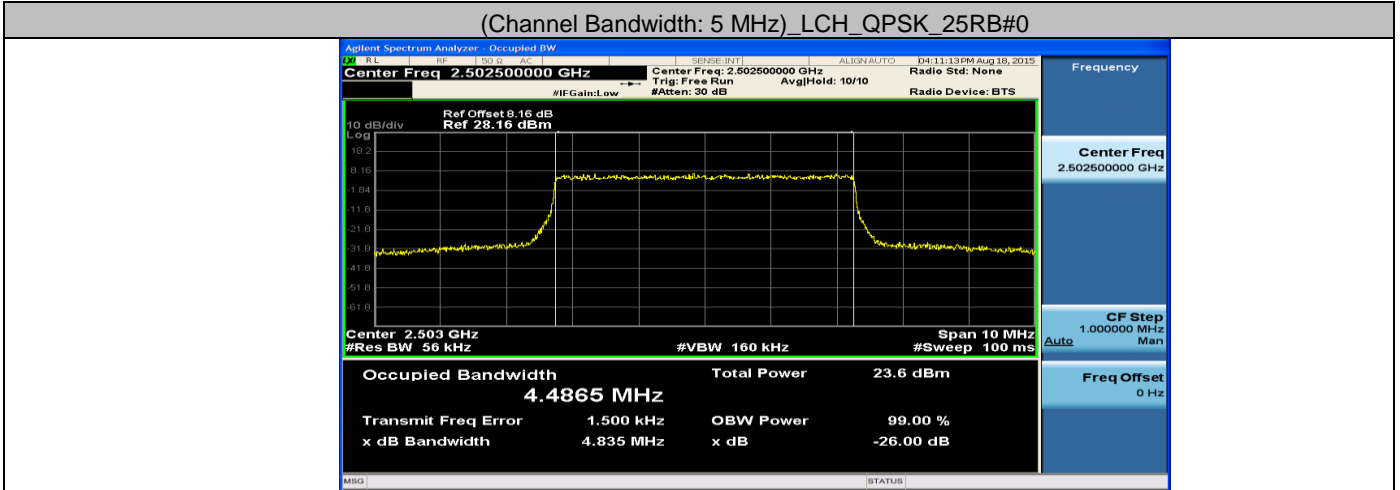


LTE Band 7
 Channel Bandwidth: 5 MHz
 Test Mode=16QAM/TM5


(Channel Bandwidth: 5 MHz)_LCH_16QAM_25RB#0

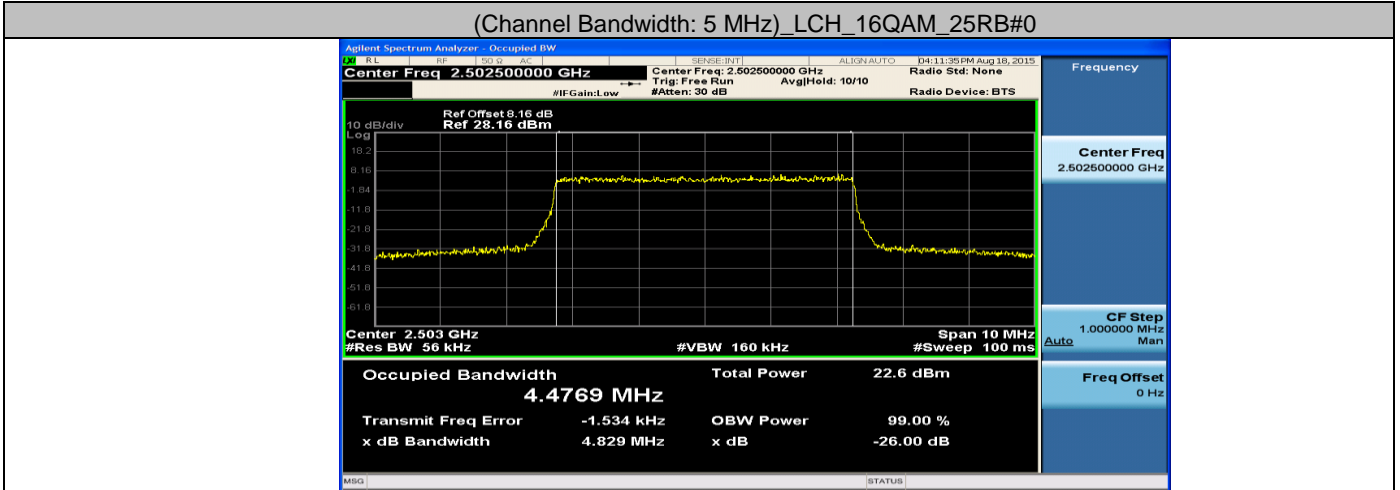




(Channel Bandwidth: 5 MHz)_MCH_16QAM_25RB#0

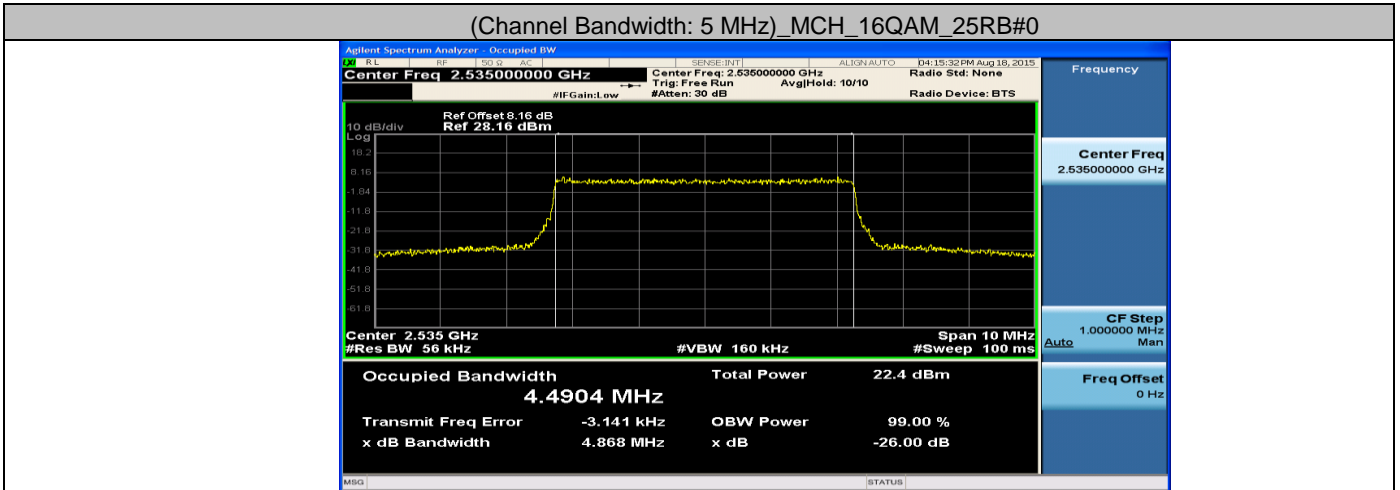




(Channel Bandwidth: 5 MHz)_HCH_16QAM_25RB#0

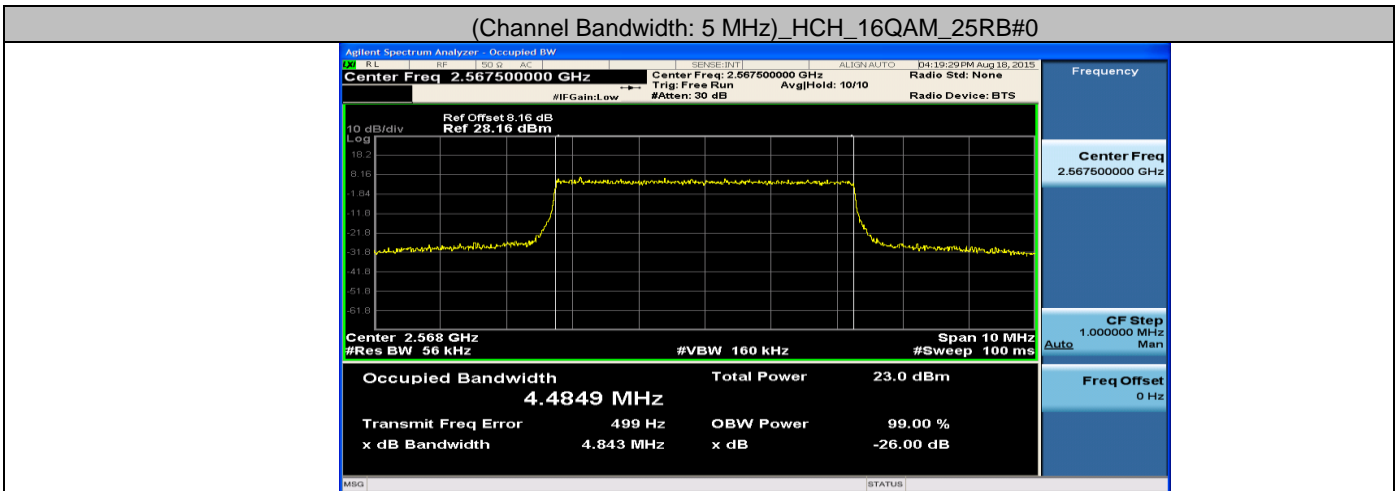




LTE Band 7
 Channel Bandwidth: 10 MHz
 Test Mode=QPSK/TM4

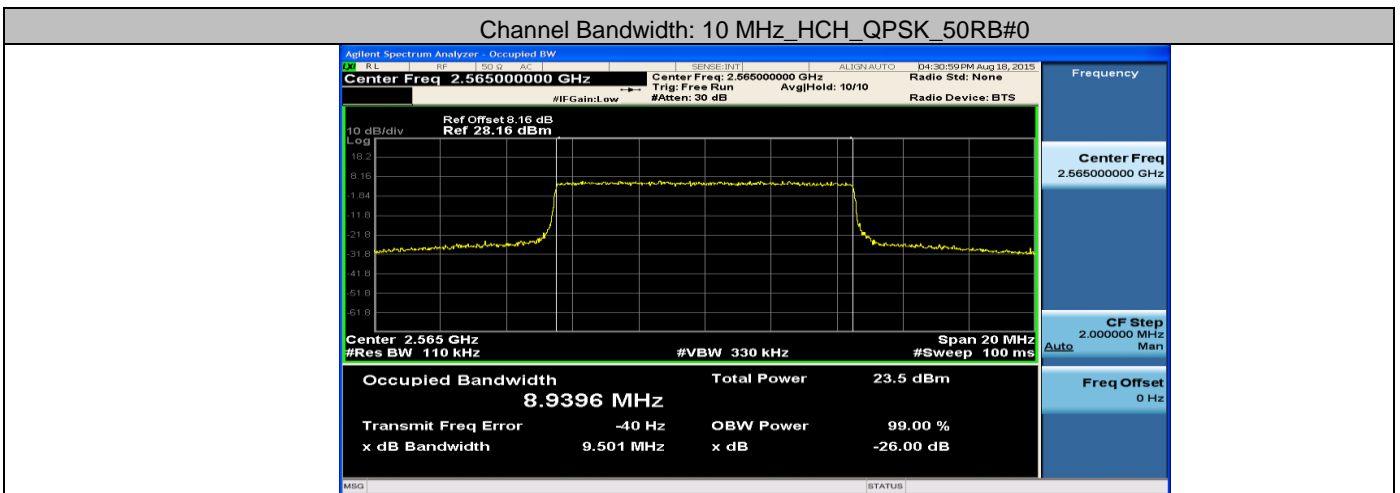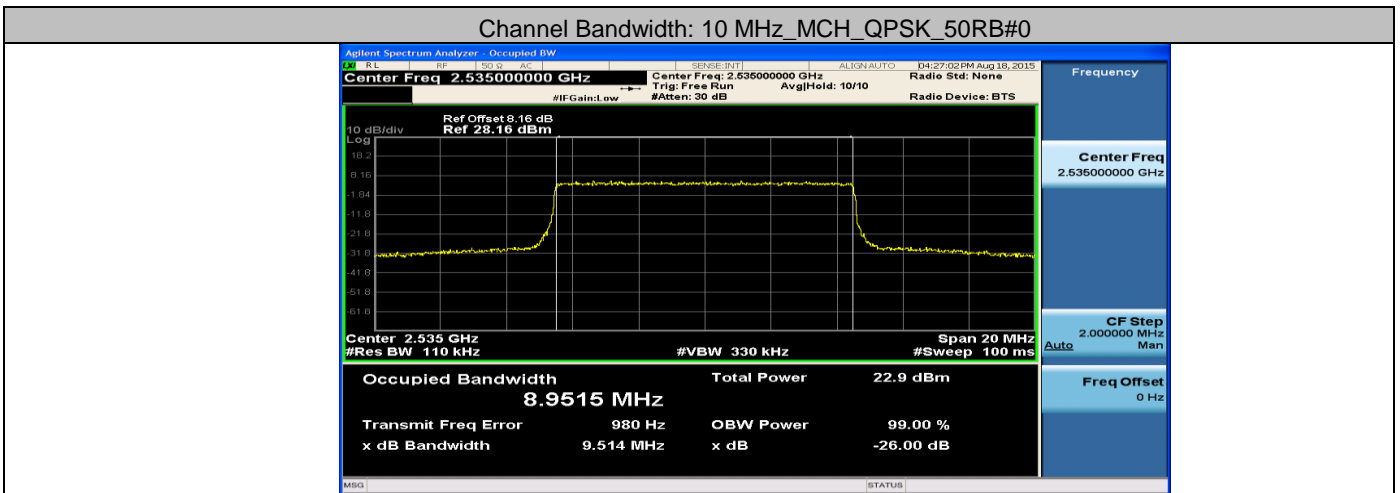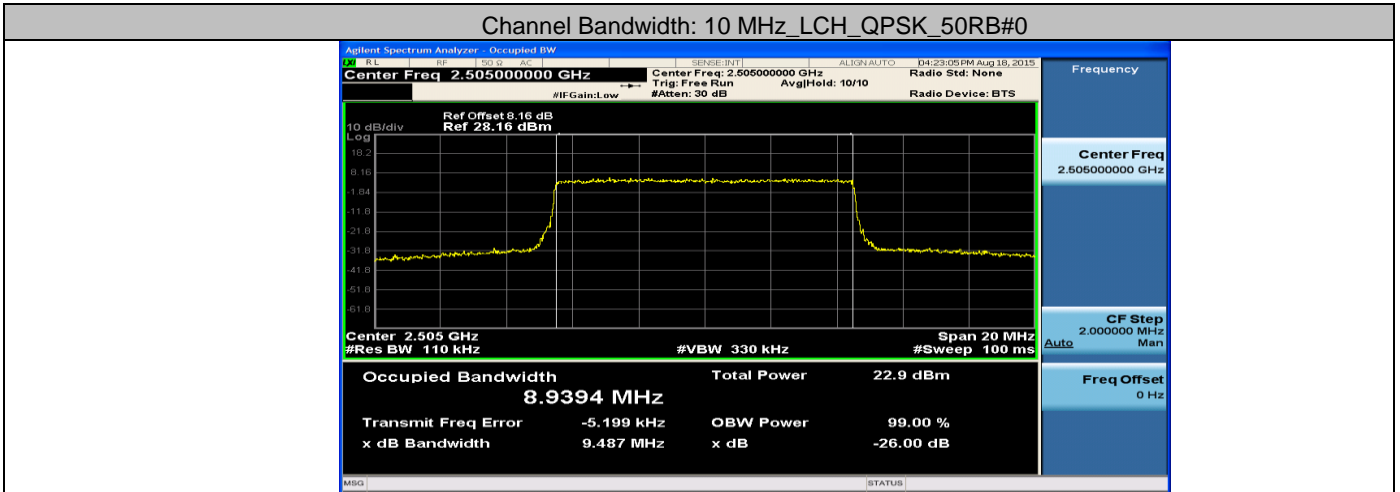

LTE Band 7
 Channel Bandwidth: 10 MHz
 Test Mode=16QAM/TM5

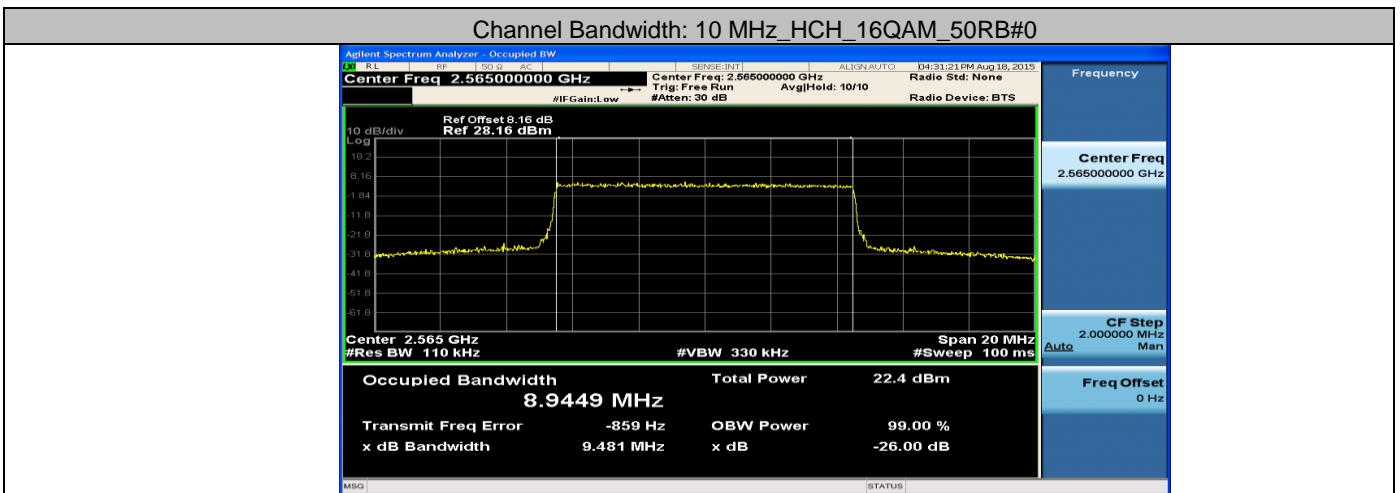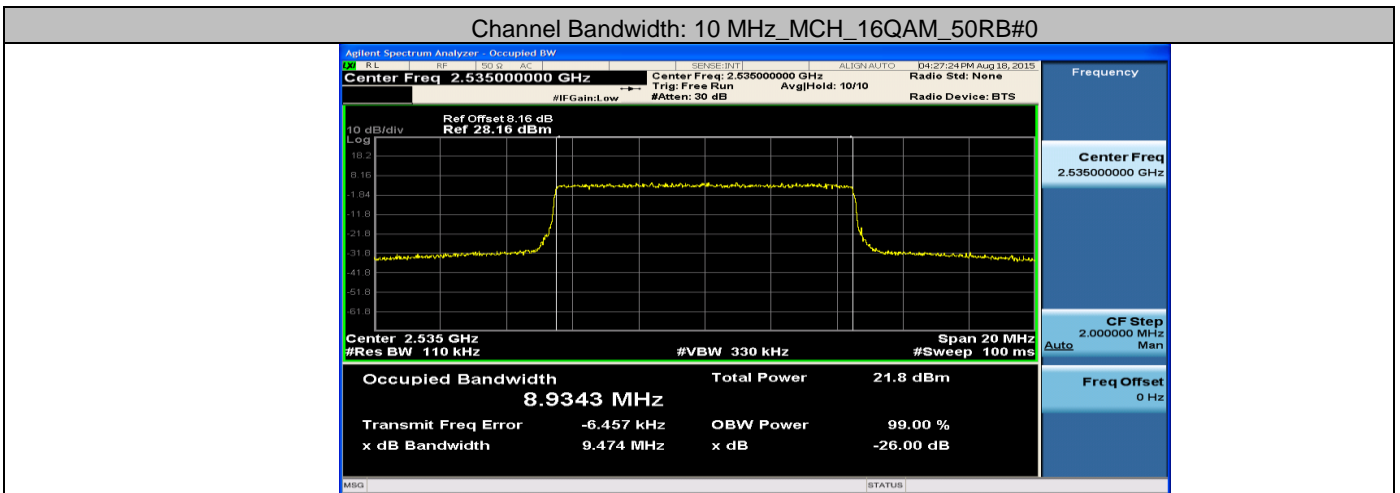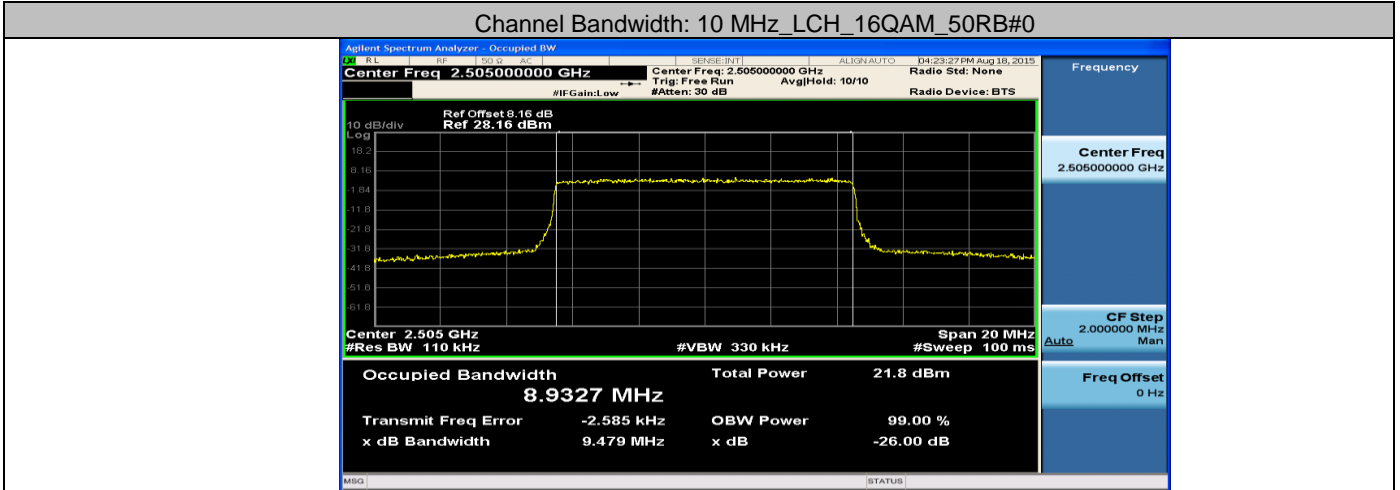


LTE Band 7
 Channel Bandwidth: 15 MHz
 Test Mode=QPSK/TM4

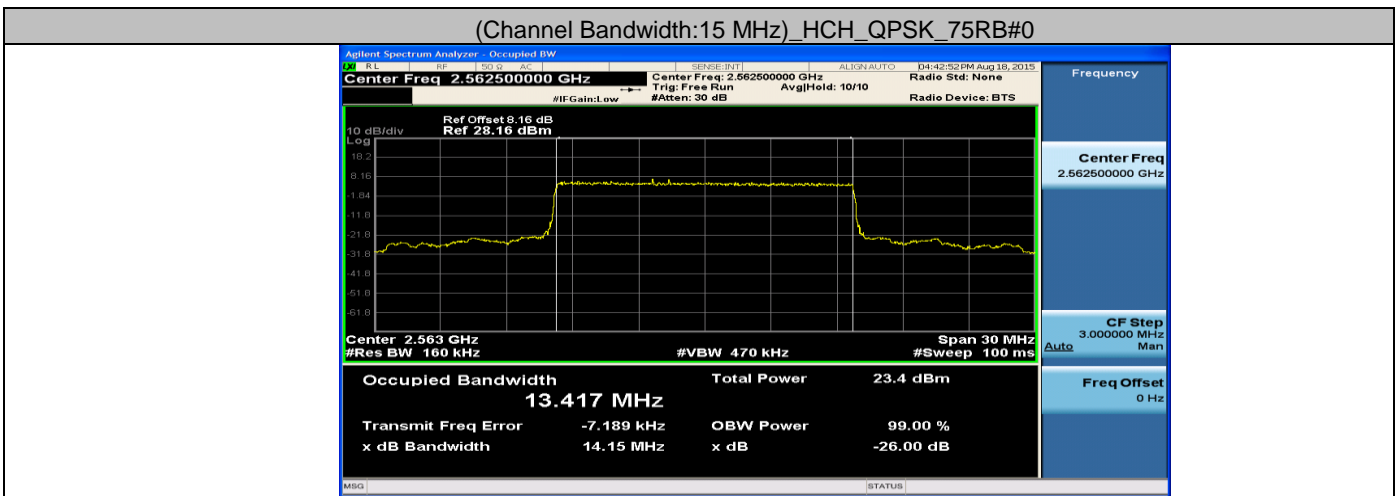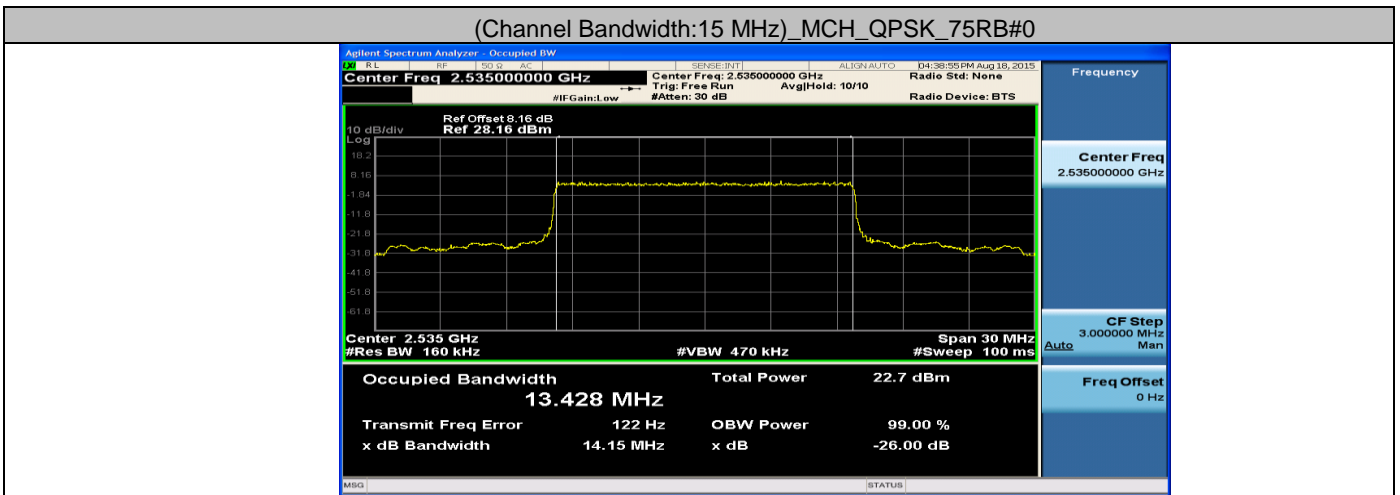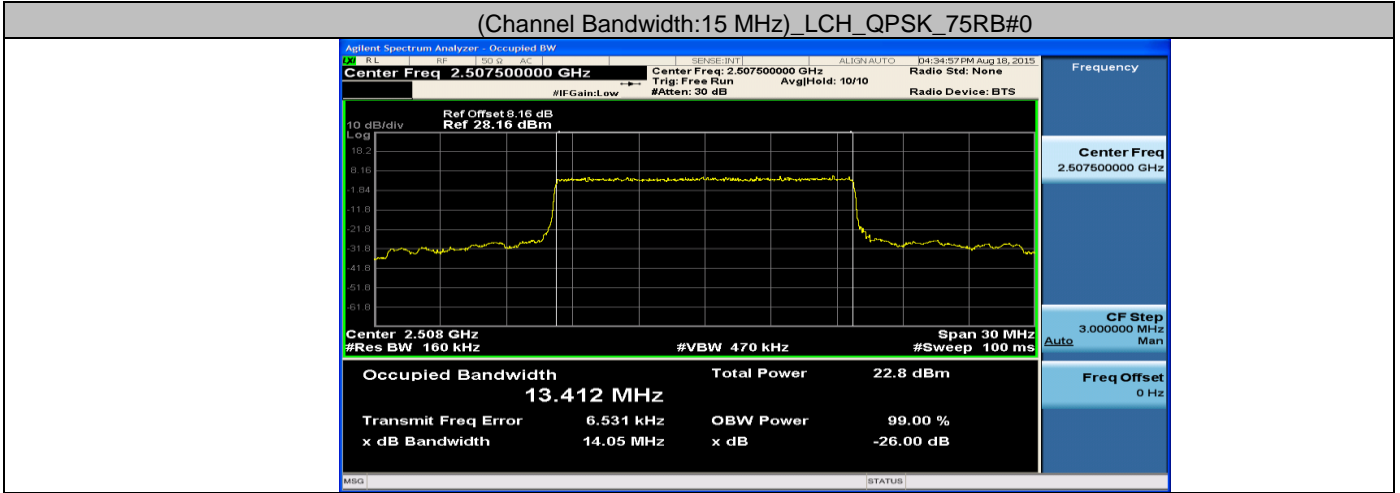


LTE Band 7
 Channel Bandwidth: 15 MHz
 Test Mode=16QAM/TM5


(Channel Bandwidth:15 MHz)_LCH_16QAM_75RB#0

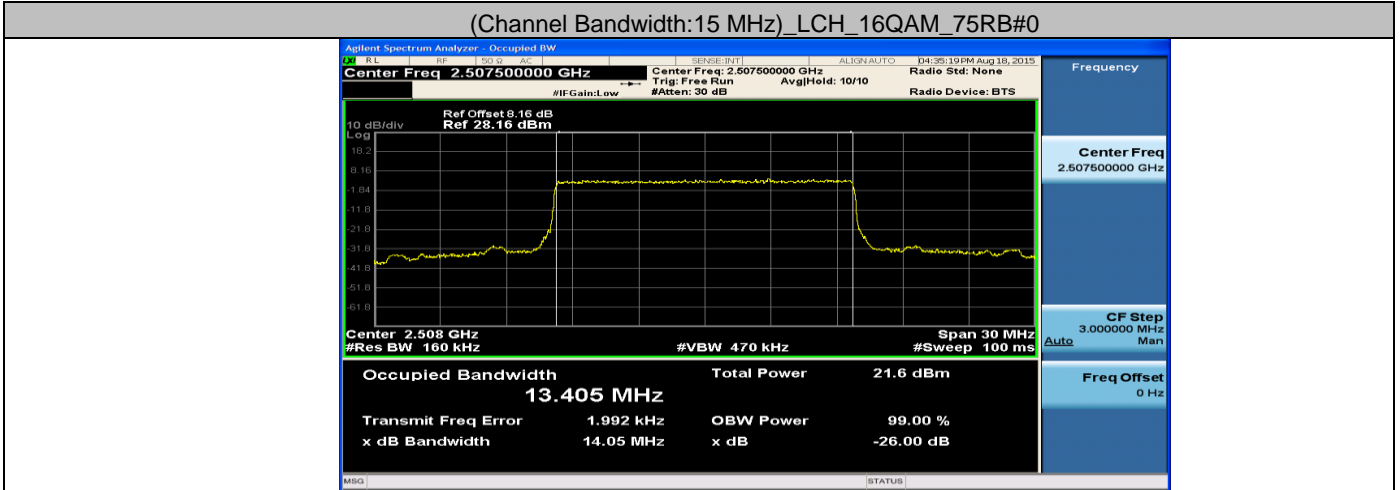

(Channel Bandwidth:15 MHz)_MCH_16QAM_75RB#0

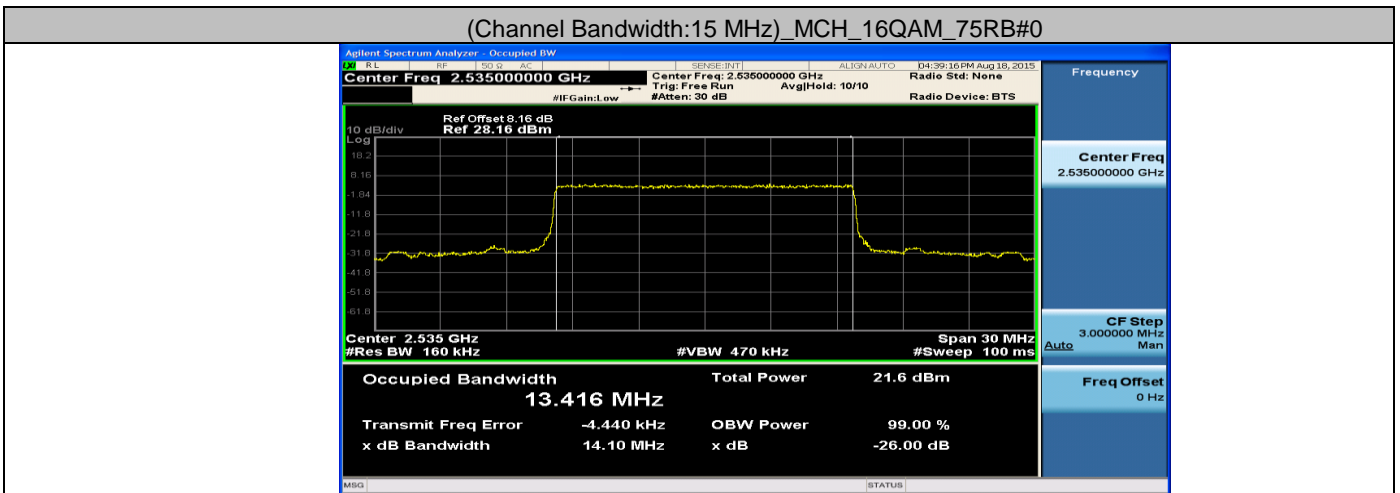


(Channel Bandwidth:15 MHz)_HCH_16QAM_75RB#0

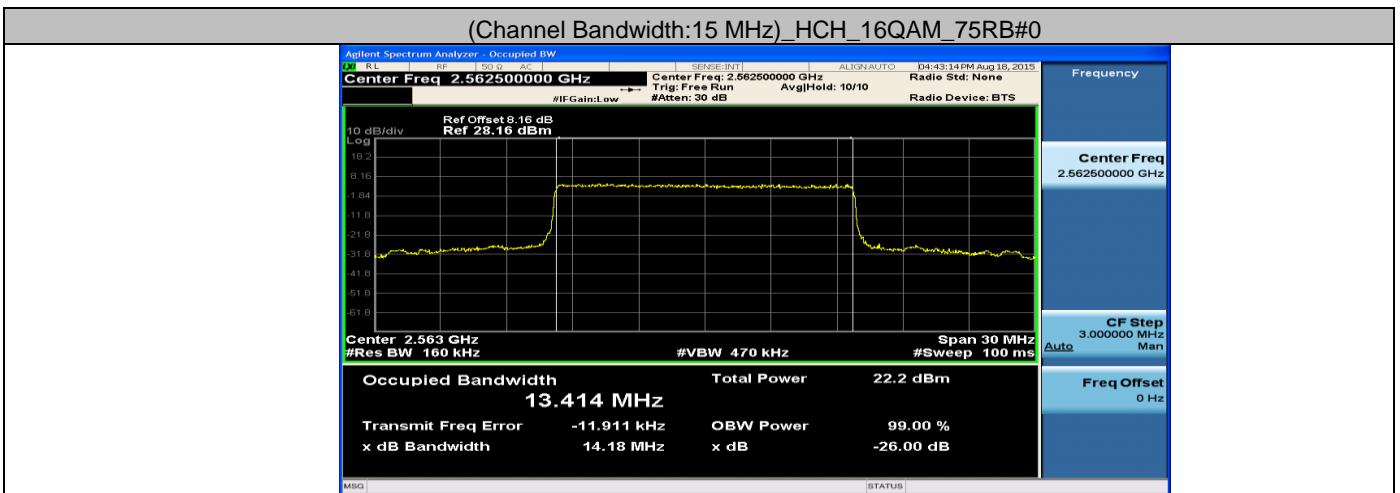


LTE Band 7
 Channel Bandwidth: 20 MHz
 Test Mode=QPSK/TM4


(Channel Bandwidth:20 MHz)_LCH_QPSK_100RB#0

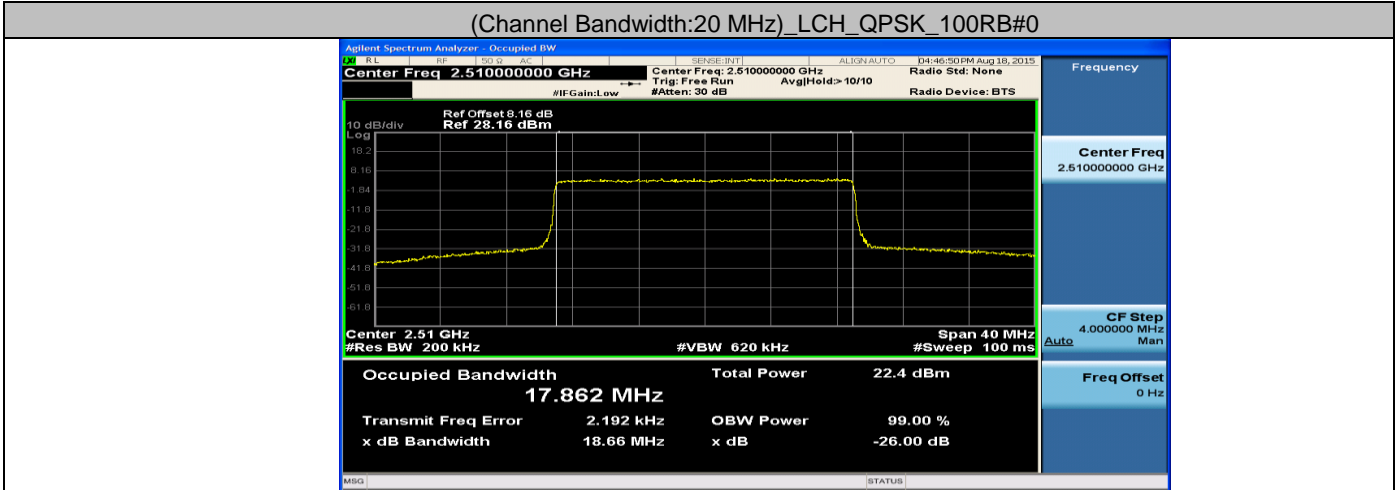

(Channel Bandwidth:20 MHz)_MCH_QPSK_100RB#0

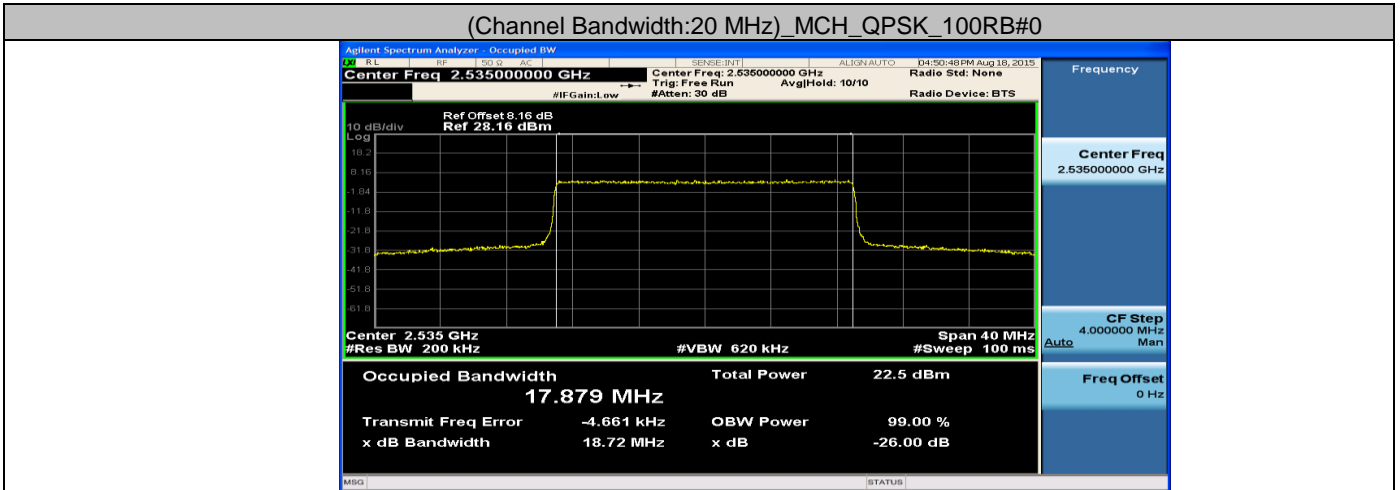


(Channel Bandwidth:20 MHz)_HCH_QPSK_100RB#0

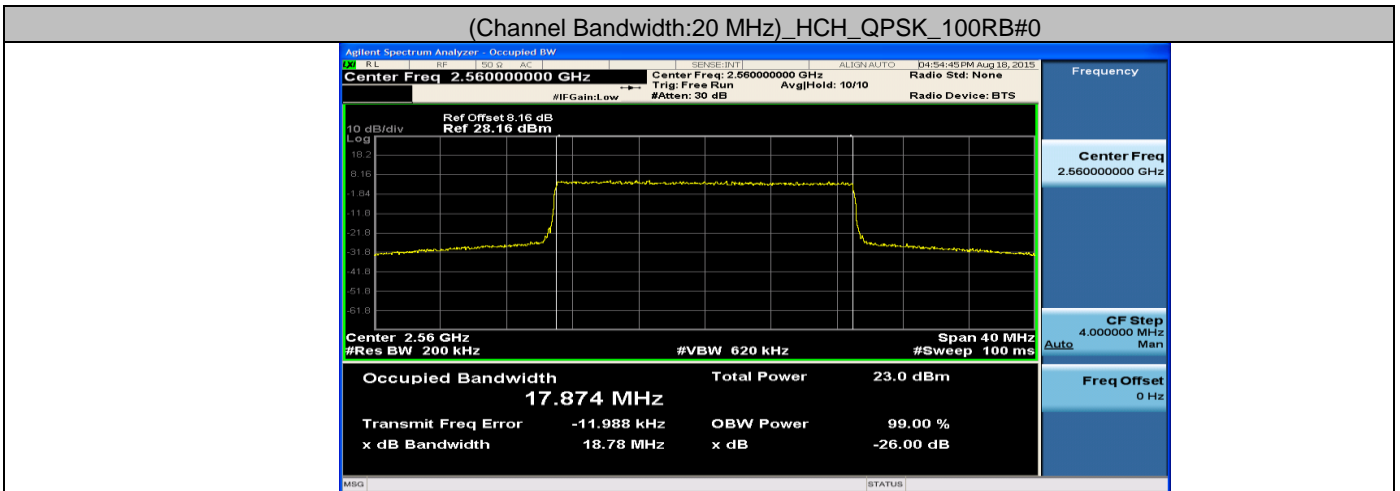


LTE Band 7
 Channel Bandwidth: 20 MHz
 Test Mode=16QAM/TM5


(Channel Bandwidth:20 MHz)_LCH_16QAM_100RB#0

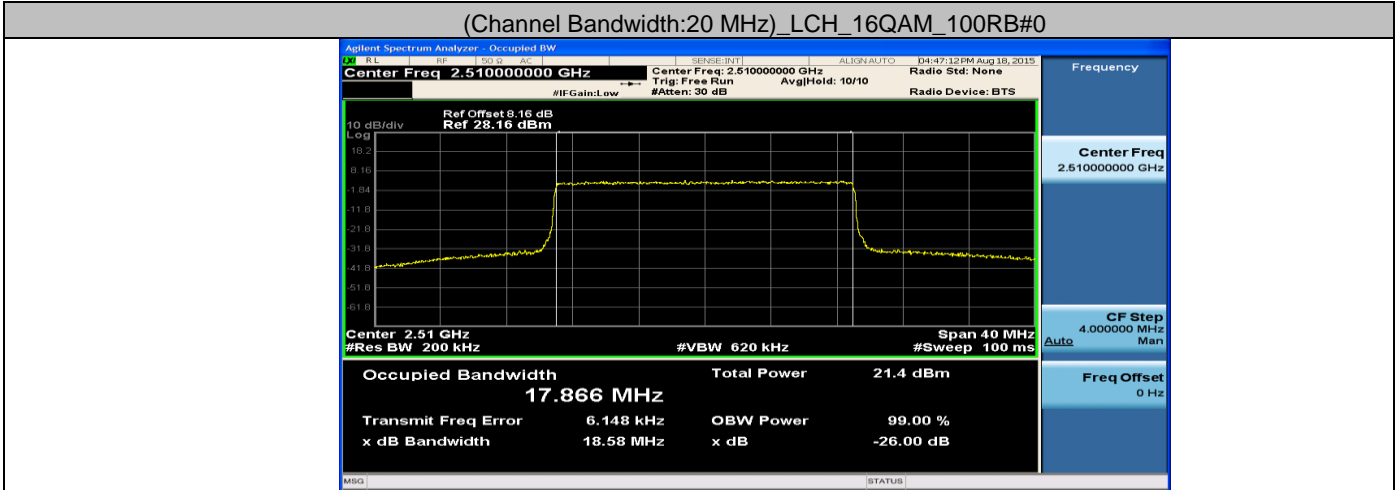

(Channel Bandwidth:20 MHz)_MCH_16QAM_100RB#0

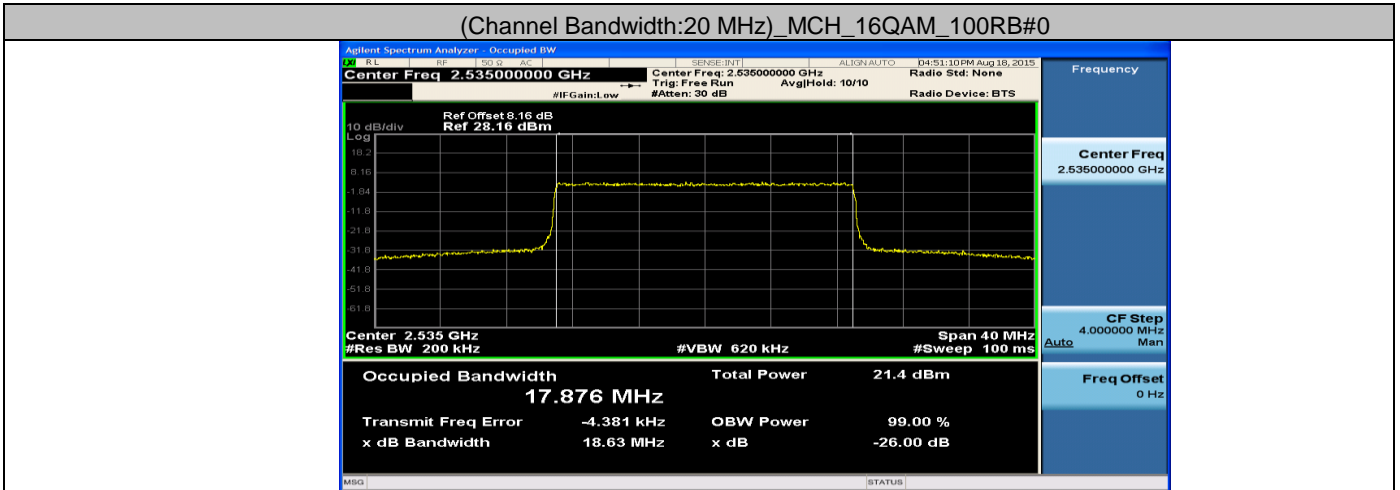

(Channel Bandwidth:20 MHz)_HCH_16QAM_100RB#0

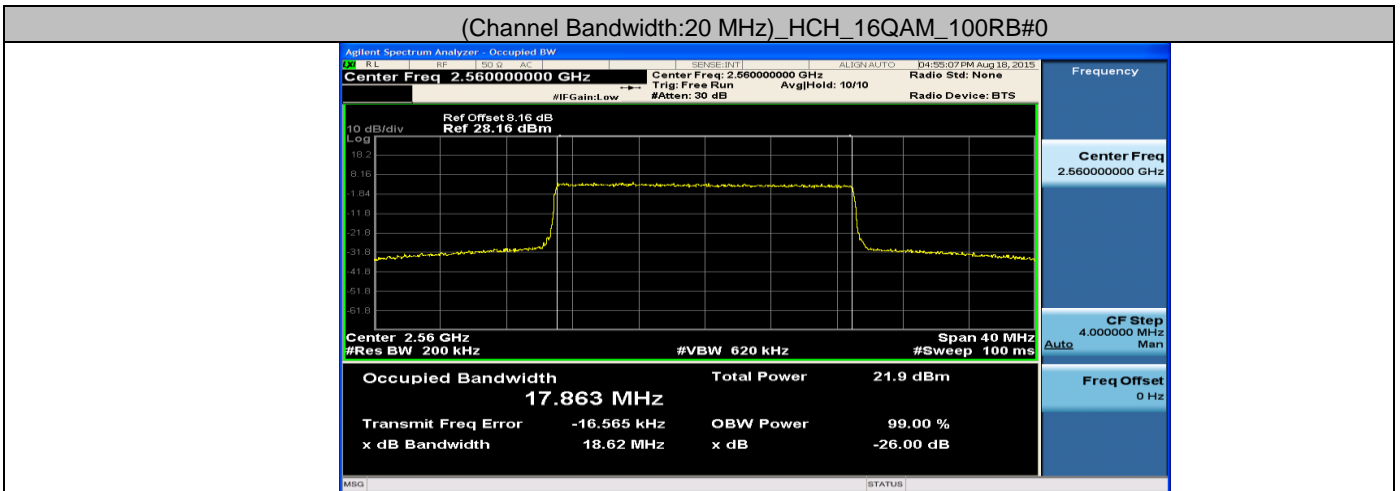

4.4. Spurious Emission at Antenna Terminal

4.4.1. Test Standard

FCC: CFR Part 2.1051, CFR Part 22.917, CFR Part 24.238, CFR Part 27.53

4.4.2. Test Limit

The radio frequency voltage or power generated within the equipment and appearing on a

spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC: §27.53


(m)(4) For mobile digital stations, the attenuation factor shall be not less than $43 + 10 \log (P)$ dB at the channel edge and $55 + 10 \log (P)$ dB at 5.5 megahertz from the channel edges.(Channel edges are defined under §27.5 (i) Frequency assignment for the BRS/EBS band)

(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.4.3. Test Procedure


1. Connect the equipment as shown in the above diagram.
 2. Set the spectrum analyzer to measure peak hold with the required settings.
 3. Set the signal generator to a known output power and record the path loss in dB (LOSS) for frequencies up to the tenth harmonic of the EUT's carrier frequency.
 $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$.
 4. Replace the signal generator with the EUT.
 5. Adjust the settings of the Universal Radio Communication Tester (CMU) to set the EUT to its maximum power at the required channel.
 6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
 7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
 8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
 9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.
- (Note: Step 3 above is performed prior to testing and LOSS is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

4.4.4. Test Setup

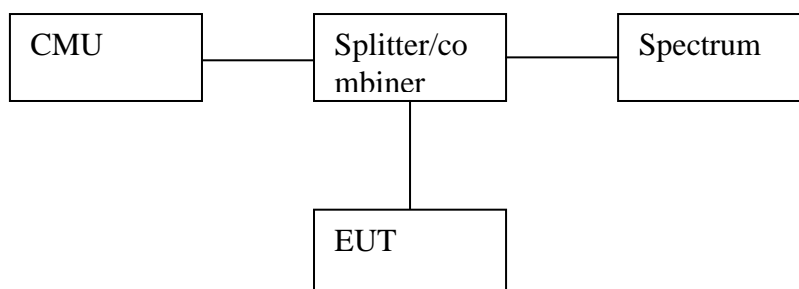


4.4.5. Test Data


Out of band measurement
 Test Band = GSM850
 Test Mode = GSM /TM1
 Test Channel = LCH

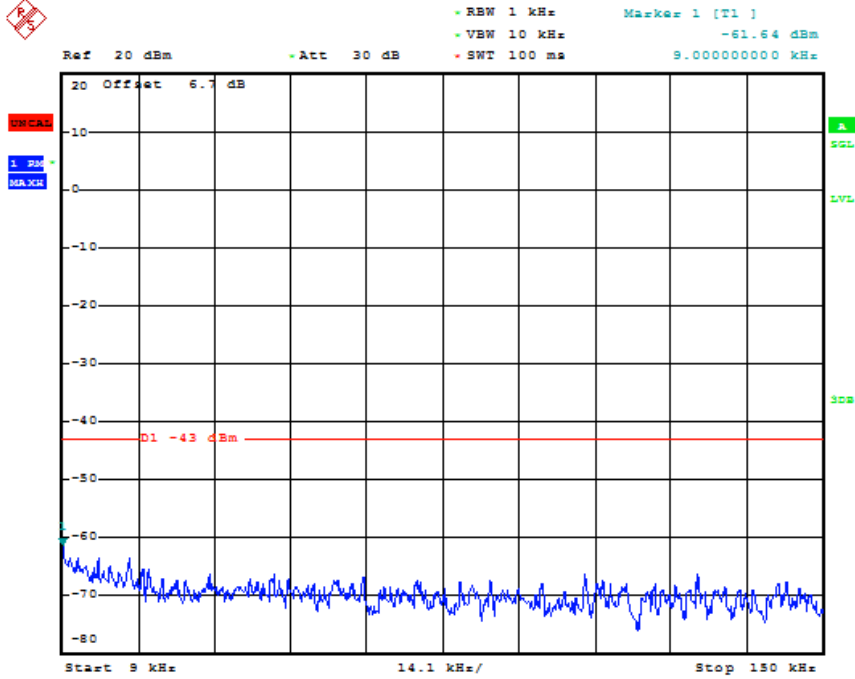


Date: 19.AUG.2015 18:05:07

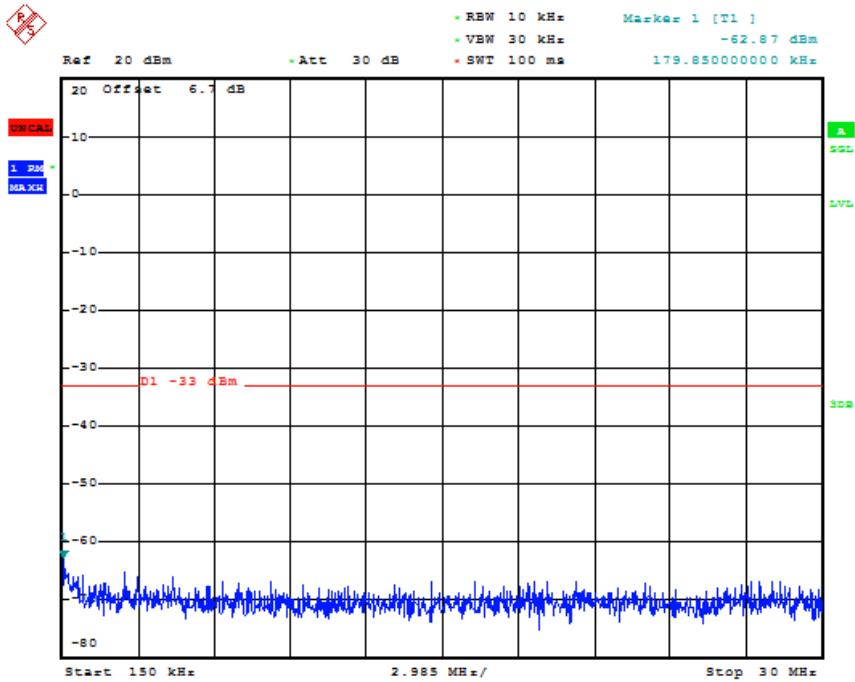

Date: 19.AUG.2015 18:05:21

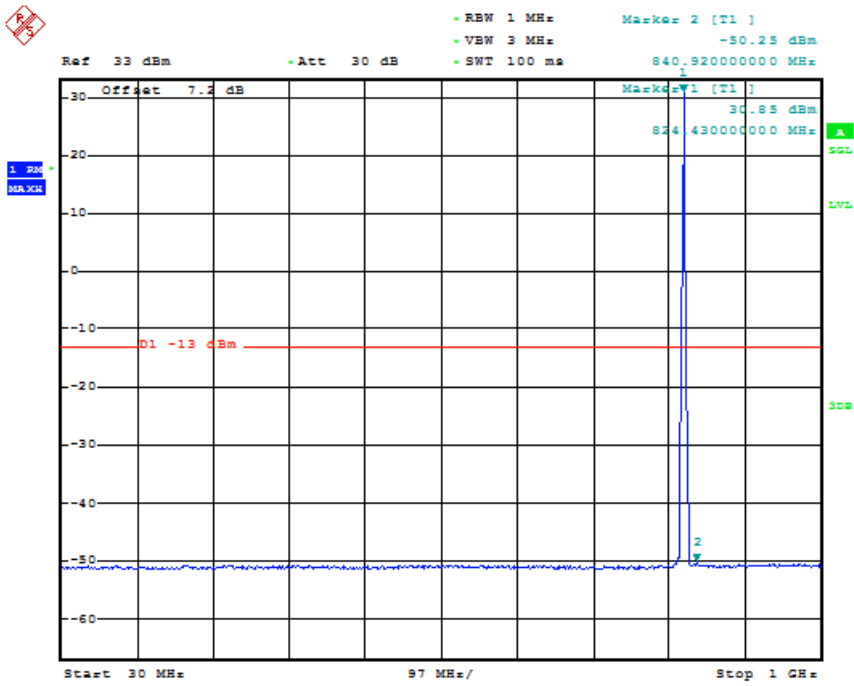


Date: 19.AUG.2015 18:05:36

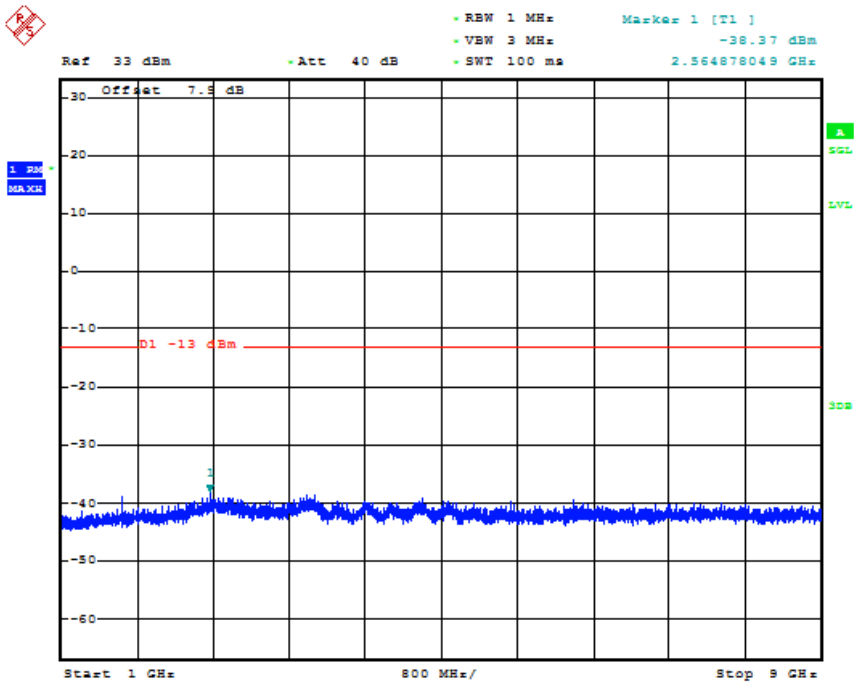


Date: 19.AUG.2015 18:05:50

Out of band measurement
 Test Band = GSM850
 Test Mode = GSM /TM1
 Test Channel = HCH

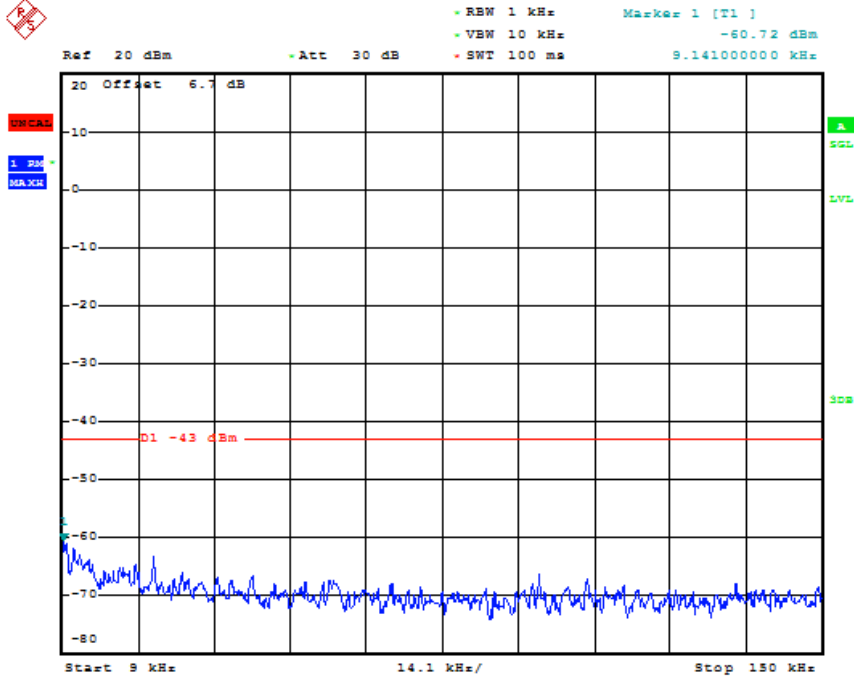


Date: 19.AUG.2015 18:07:10

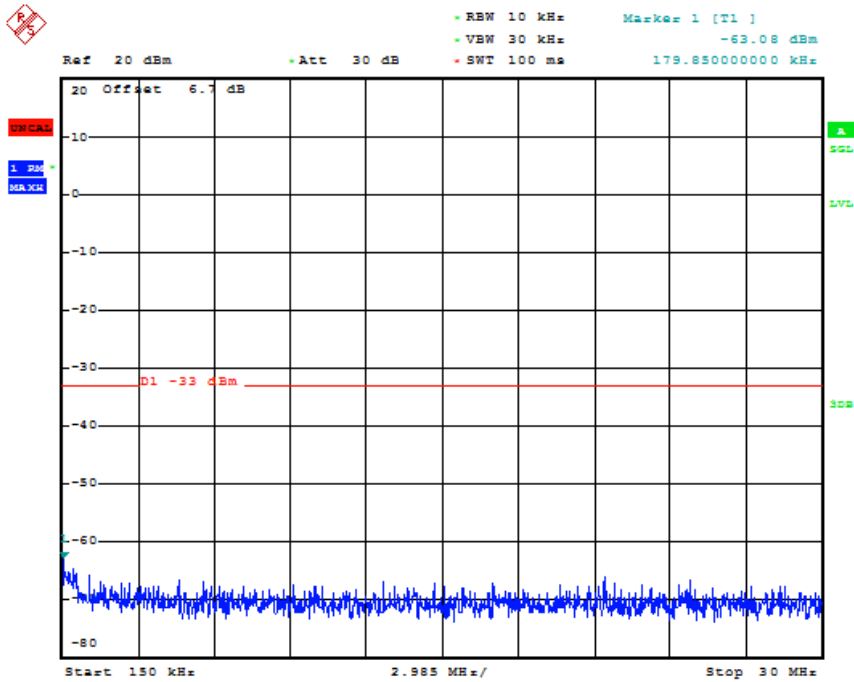


Date: 19.AUG.2015 18:07:23


Out of band measurement
 Test Band = GSM850
 Test Mode = EDGE /TM2
 Test Channel = LCH

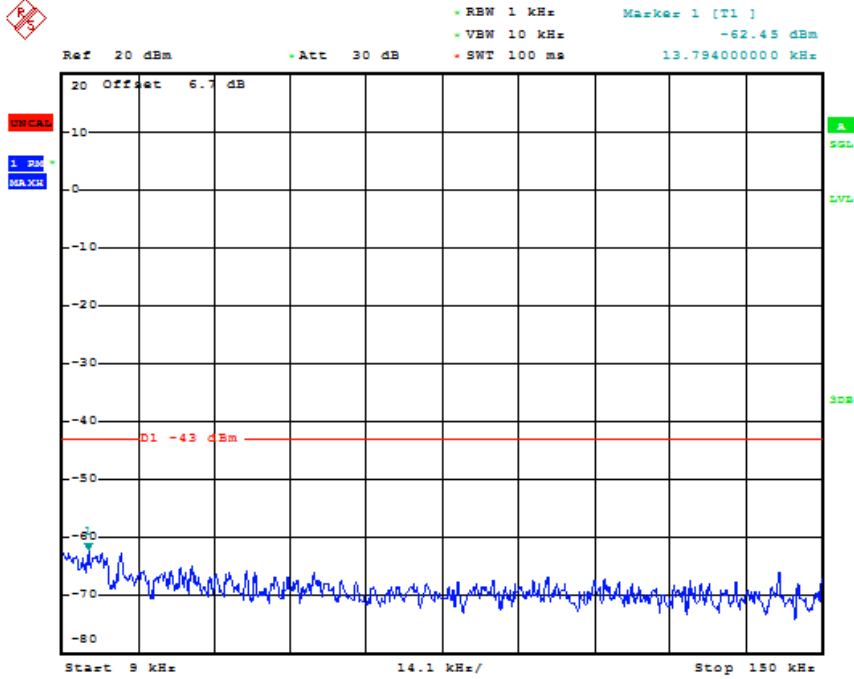


Date: 19.AUG.2015 18:47:04

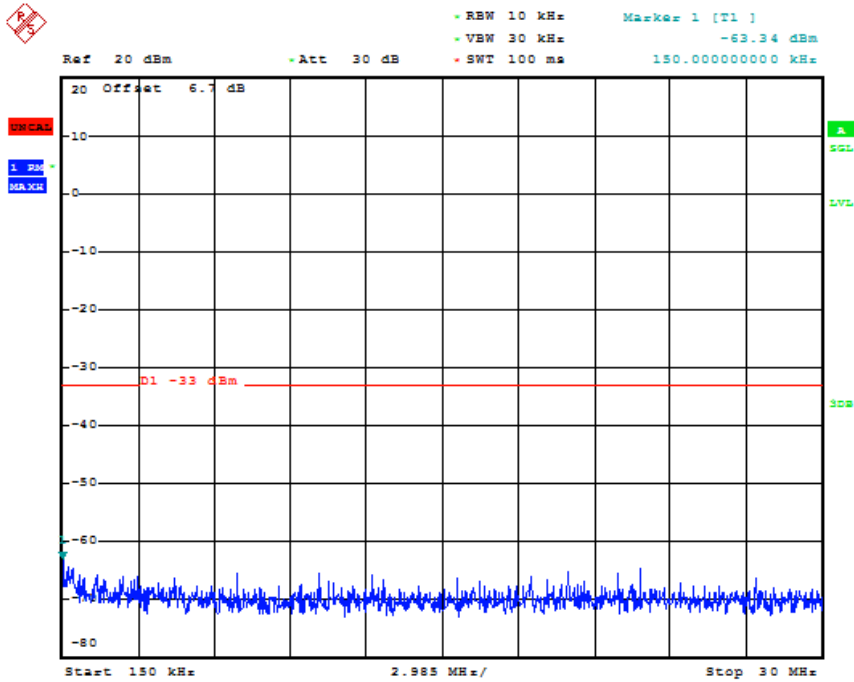

Date: 19.AUG.2015 18:47:18

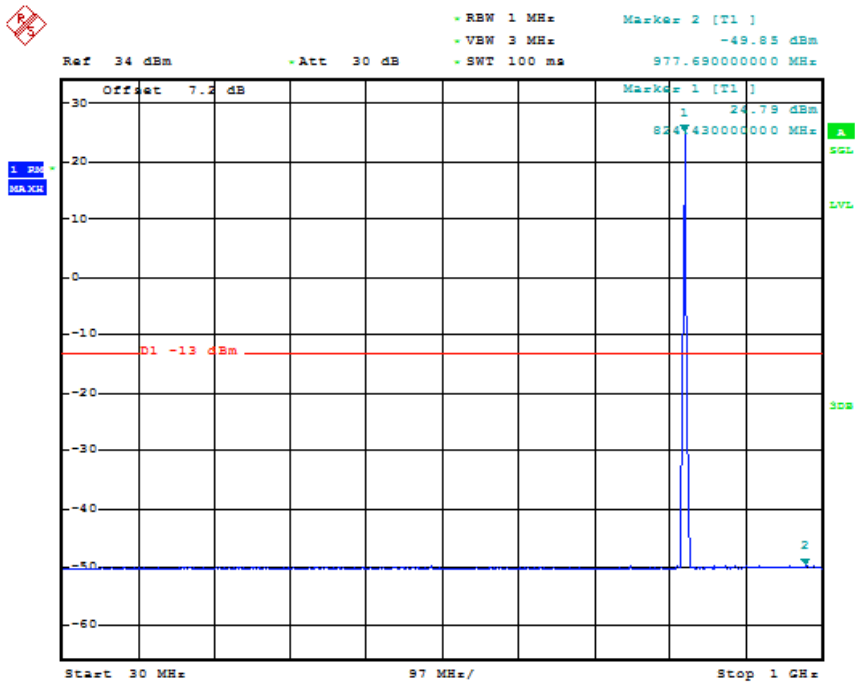


Date: 22.AUG.2015 22:23:56

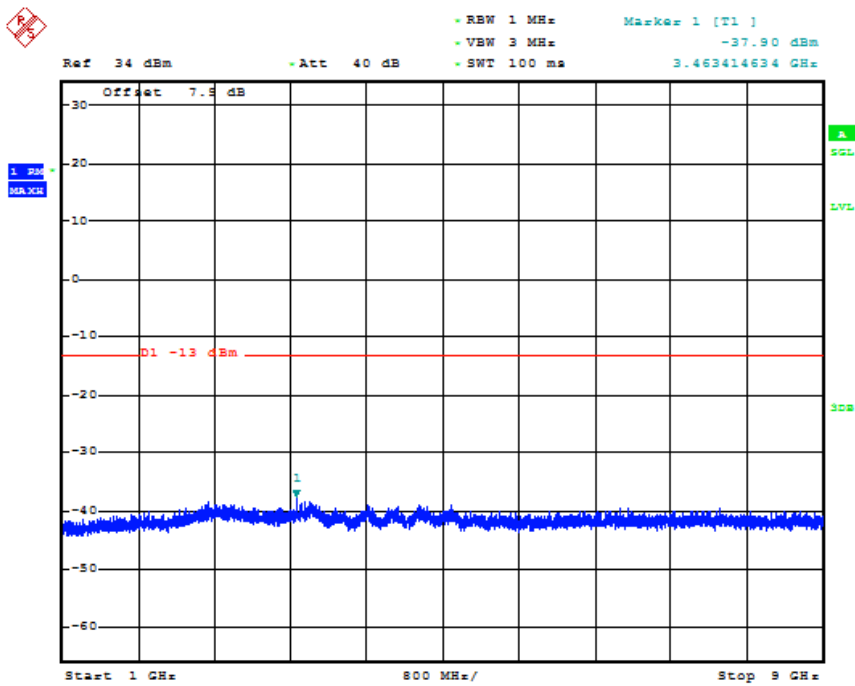


Date: 22.AUG.2015 22:24:06


Out of band measurement
 Test Band = GSM850
 Test Mode = EDGE /TM2
 Test Channel = MCH

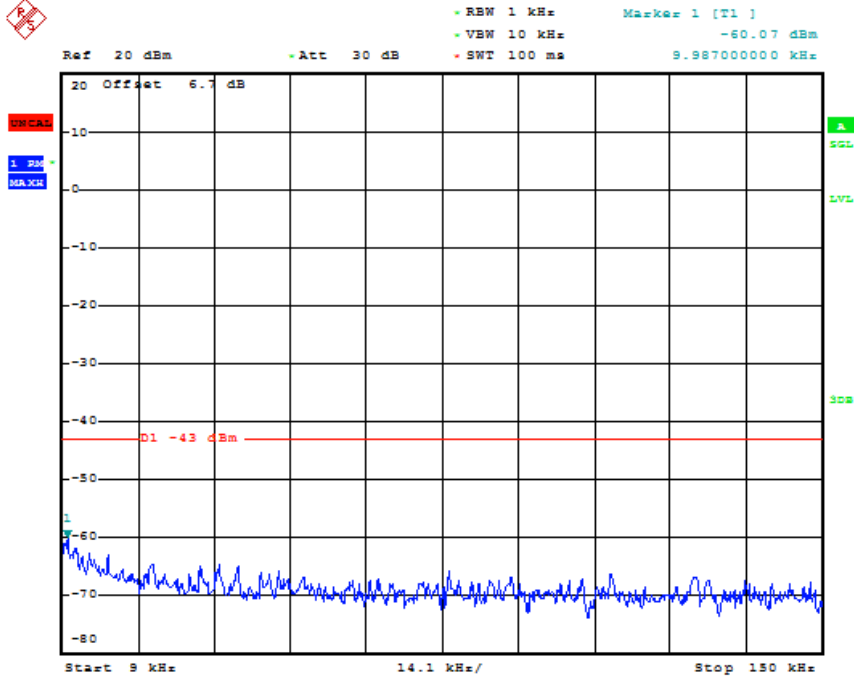


Date: 19.AUG.2015 18:49:41

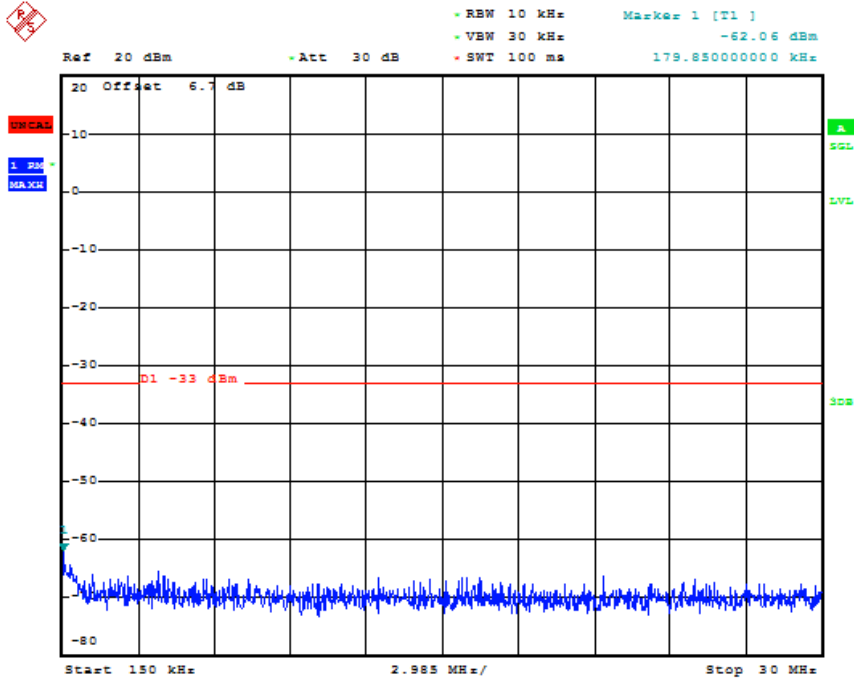

Date: 19.AUG.2015 18:49:56

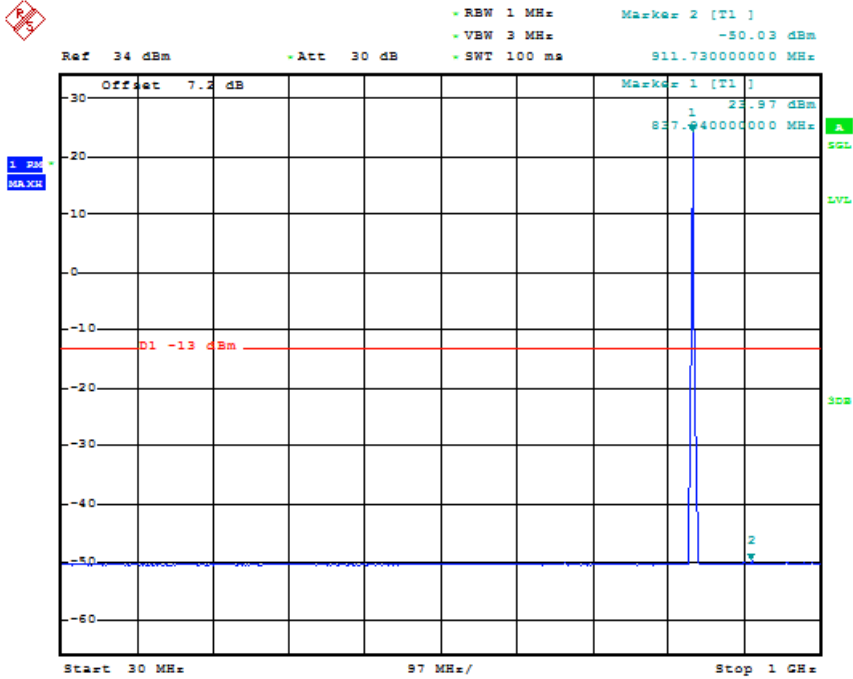


Date: 19.AUG.2015 18:10:51

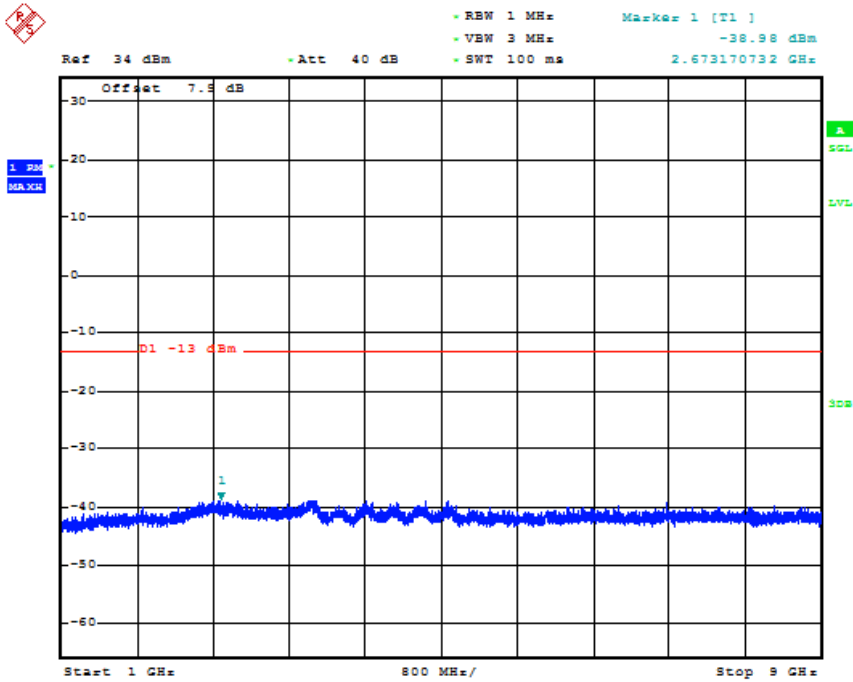


Date: 19.AUG.2015 18:11:07

Out of band measurement
 Test Band = GSM850
 Test Mode = EDGE /TM2
 Test Channel = HCH

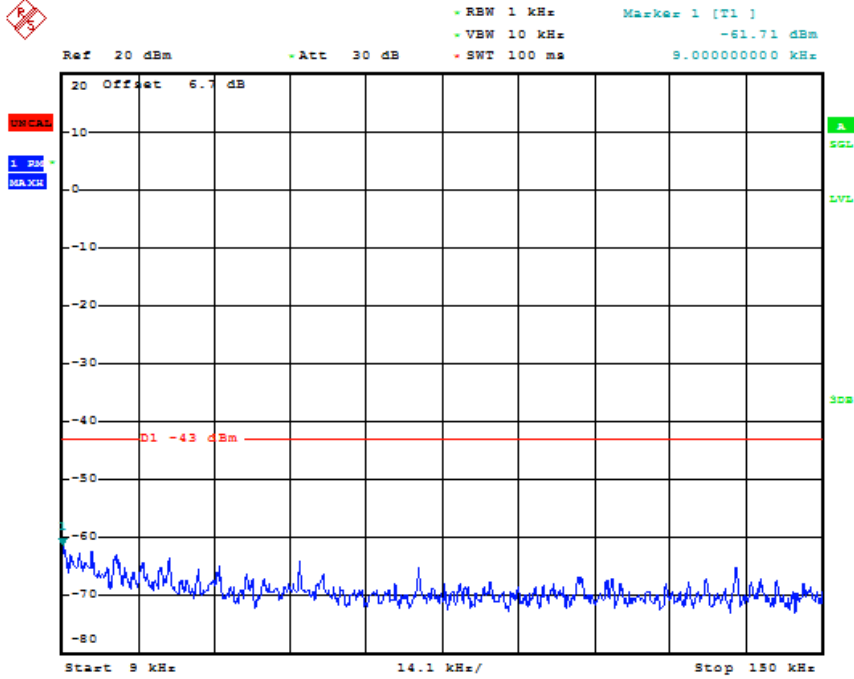


Date: 19.AUG.2015 18:50:30

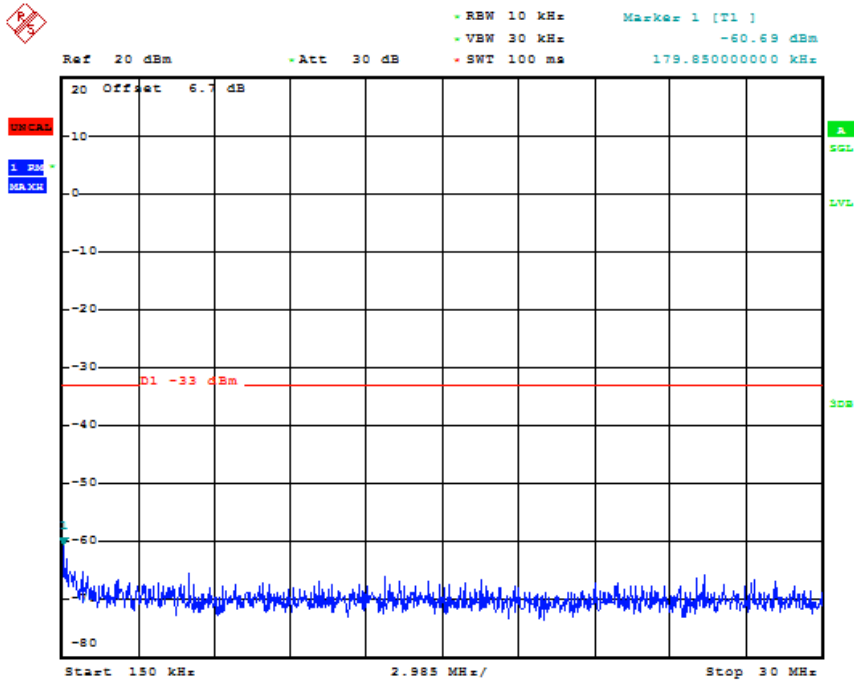


Date: 19.AUG.2015 18:50:45

Out of band measurement
 Test Band = GSM1900
 Test Mode = GSM /TM1
 Test Channel = LCH

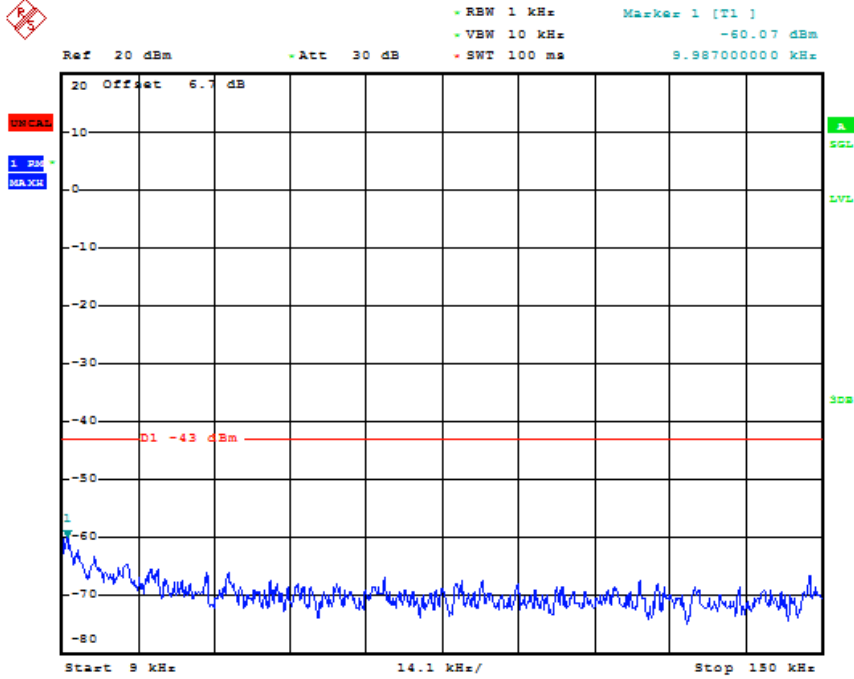

Date: 18.AUG.2015 19:42:00

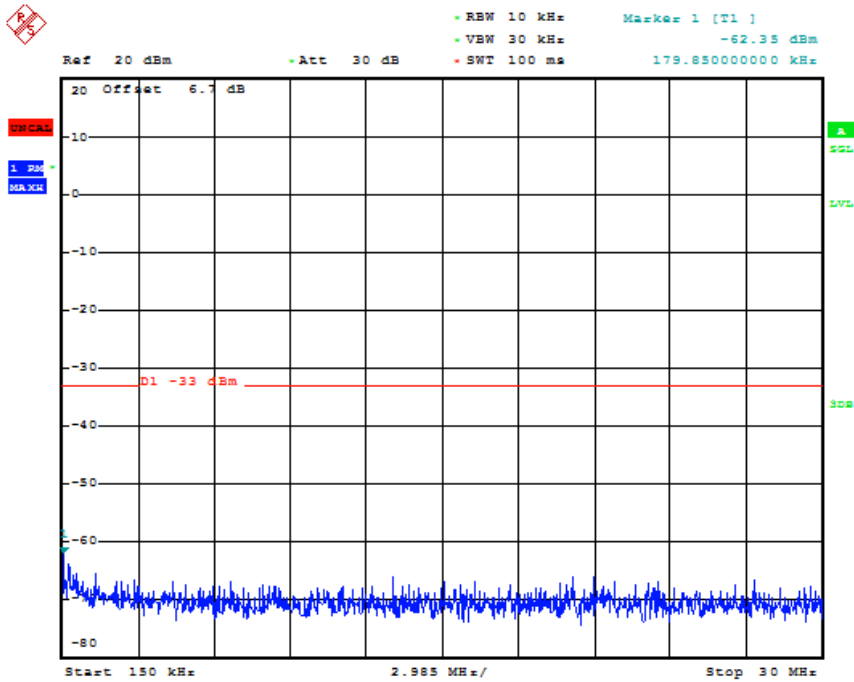

Date: 18.AUG.2015 19:42:14