




## FCC TEST REPORT

### 47 CFR FCC Part 15 Subpart B

|  |  |   |
|--|--|---|
| <b>Report Reference No.</b> .....:   | MWR151101106   |   |
| <b>FCC ID</b> .....:   | RQQHLT-L50SCM  |   |
| Compiled by<br>( position+printed name+signature)..:   | File administrators Martin Ao  |  |
| Supervised by<br>( position+printed name+signature)..:   | Test Engineer Yuchao Wang  |  |
| Approved by<br>( position+printed name+signature)..:   | Manager Dixon Hao  |  |
| Date of issue.....:  | Nov. 01, 2015  |   |
| <b>Representative Laboratory Name</b> ..:  | <b>Maxwell International Co., Ltd.</b>   |   |
| Address .....  | Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China                       |   |
| <b>Testing Laboratory Name</b> .....   | <b>Shenzhen CTL Testing Technology Co., Ltd.</b>   |   |
| Address .....  | Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055 |   |
| <b>Applicant's name</b> .....:   | <b>HYUNDAI CORPORATION</b>   |   |
| Address .....  | 140-2, Kye-dong, Chongro-ku, Seoul, South Korea  |   |
| <b>Test specification</b> .....  |  |   |
| Standard .....   | <b>47 CFR FCC Part 15 Subpart B - Unintentional Radiators</b><br><b>ANSI C63.4: 2009</b>           |   |
| TRF Originator.....:   | Maxwell International Co., Ltd.  |   |
| <b>Maxwell International Co., Ltd. All rights reserved.</b>  |  |   |
| This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material. Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. |  |   |
| <b>Test item description</b> .....   | Mobile Phone   |   |
| Trade Mark .....   | HYUNDAI  |   |
| <b>Manufacturer</b> .....:   | <b>Skycom Telecommunications Co., Limited</b>  |   |
| Model/Type reference.....:   | L505   |   |
| Listed Models .....  | N/A  |   |
| Rating .....   | DC 3.80V   |   |
| Hardware version .....   | WW818-MB-V0.5  |   |
| Software version .....   | HYUNDAI_L505_V4.0.3  |   |
| Result.....:   | <b>PASS</b>  |   |

**TEST REPORT**

|                          |                     |               |
|--------------------------|---------------------|---------------|
| <b>Test Report No. :</b> | <b>MWR151101106</b> | Nov. 01, 2015 |
|                          |                     | Date of issue |

Equipment under Test : Mobile Phone

Model /Type : L505

Listed Models : N/A

**Applicant** : **HYUNDAI CORPORATION**

Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

**Manufacturer** : **Skycom Telecommunications Co., Limited**

Address : Rm604, East Block, Shengtang Bldg., No.1, Tairan 9 Rd.,  
Chegongmiao, Futian District, Shenzhen, China

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                 |   |                  |
|-----------------|---|------------------|
| <b><u>1</u></b> | <b><u>TEST STANDARDS.....</u></b>                   | <b><u>4</u></b>  |
| <b><u>2</u></b> | <b><u>SUMMARY .....</u></b>                         | <b><u>5</u></b>  |
| 2.1             | General Remarks                                     | 5                |
| 2.2             | Product Description                                 | 5                |
| 2.3             | Equipment under Test                                | 6                |
| 2.4             | Short description of the Equipment under Test (EUT) | 6                |
| 2.5             | EUT operation mode                                  | 6                |
| 2.6             | Related Submittal(s) / Grant (s)                    | 6                |
| 2.7             | Internal Identification of AE used during the test  | 6                |
| 2.8             | Modifications                                       | 6                |
| 2.9             | EUT configuration                                   | 7                |
| 2.10            | Configuration of Tested System                      | 7                |
| <b><u>3</u></b> | <b><u>TEST ENVIRONMENT.....</u></b>                 | <b><u>8</u></b>  |
| 3.1             | Address of the test laboratory                      | 8                |
| 3.2             | Test Facility                                       | 错                |
| 误!未定义书签。        |   |                  |
| 3.3             | Environmental conditions                            | 8                |
| 3.4             | Statement of the measurement uncertainty            | 8                |
| 3.5             | Equipments Used during the Test                     | 9                |
| <b><u>4</u></b> | <b><u>TEST CONDITIONS AND RESULTS.....</u></b>      | <b><u>10</u></b> |
| 4.1             | Conducted Emissions Test                            | 10               |
| 4.2             | Radiated Emission Test                              | 13               |
| <b><u>5</u></b> | <b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>    | <b><u>17</u></b> |
| <b><u>6</u></b> | <b><u>EXTERNAL PHOTOS OF THE EUT.....</u></b>       | <b><u>17</u></b> |
| <b><u>7</u></b> | <b><u>INTERNAL PHOTOS OF THE EUT.....</u></b>       | <b><u>17</u></b> |

# **1 TEST STANDARDS**

The tests were performed according to following standards:

[47 CFR FCC Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2009](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

## 2 SUMMARY

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Oct. 10, 2015 |
|                                |   |               |
| Testing commenced on           | : | Oct. 11, 2015 |
|                                |   |               |
| Testing concluded on           | : | Nov. 01, 2015 |

### 2.2 Product Description

The **HYUNDAI CORPORATION**'s Model: L505 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

|  |   |
|--|---|
| Name of EUT                            | Mobile Phone  |
| Model Number                           | L505  |
| Modulation Type                        | GMSK for GSM/GPRS, 8-PSK for EDGE, QPSK for UMTS, QPSK, 16QAM for LTE   |
| Antenna Type                           | Internal  |
| UMTS Operation Frequency Band          | Device supported UMTS FDD Band II/IV/V  |
| WLAN FCC Operation frequency           | IEEE 802.11b:2412-2462MHz<br>IEEE 802.11g:2412-2462MHz<br>IEEE 802.11n HT20:2412-2462MHz<br>IEEE 802.11n HT40:2422-2452MHz  |
| BT FCC Operation frequency             | 2402MHz-2480MHz   |
| HSDPA Release Version                  | Release 10  |
| HSUPA Release Version                  | Release 6   |
| DC-HSUPA Release Version               | Not Supported   |
| WCDMA Release Version                  | R99   |
| LTE Release Version                    | R8  |
| LTE Operation Frequency Band           | Device supported FDD band 2, FDD band 4, FDD band 7, FDD band 17  |
| WLAN FCC Modulation Type               | IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK)<br>IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) |
| BT Modulation Type                     | GFSK,8DPSK, $\pi$ /4DQPSK(BT 3.0+EDR)   |
| Hardware version                       | WW818-MB-V0.5   |
| Software version                       | HYUNDAI_L505_V4.0.3   |
| Android version                        | Android 4.4.2   |
| GPS function                           | Supported   |
| WLAN                                   | Supported 802.11b/802.11g/802.11n   |
| Bluetooth                              | Supported BT 4.0/BT 3.0+EDR   |
| GSM/EDGE/GPRS                          | Supported GSM/GPRS/EDGE   |
| GSM/EDGE/GPRS Power Class              | GSM850:Power Class 4/ PCS1900:Power Class 1   |
| GSM/EDGE/GPRS Operation Frequency      | GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz   |
| GSM/EDGE/GPRS Operation Frequency Band | GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900  |
| GSM Release Version                    | R99   |
| GPRS/EDGE Multislot Class              | GPRS/EDGE: Multi-slot Class 12  |
| Extreme temp. Tolerance                | -30°C to +50°C  |
| Extreme vol. Limits                    | 3.40VDC to 4.20VDC (nominal: 3.80VDC)   |
| GPRS operation mode                    | Class B   |

## 2.3 Equipment under Test

### Power supply system utilised

|                      |   |                                  |                                  |                       |             |
|----------------------|---|----------------------------------|----------------------------------|-----------------------|-------------|
| Power supply voltage | : | <input type="radio"/>            | 120V / 60 Hz                     | <input type="radio"/> | 115V / 60Hz |
|                      |   | <input type="radio"/>            | 12 V DC                          | <input type="radio"/> | 24 V DC     |
|                      |   | <input checked="" type="radio"/> | Other (specified in blank below) |                       |             |

DC 3.80V

## 2.4 Short description of the Equipment under Test (EUT)

### 2.4.1 General Description

L505 is subscriber equipment in the WCDMA/GSM /LTE system. The HSPA/UMTS frequency band is Band II, Band IV and Band V, LTE frequency band is band 2, band 4, band 7,band 17; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS ,LTE and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

### 2.4.2 Test Environments

NOTE: The values used in the test report maybe stringent than the declared.

| Environment Parameter | Selected Values During Tests |             |         |
|-----------------------|------------------------------|-------------|---------|
|                       | NTNV                         | Temperature | Voltage |
| Ambient               |                              | 3.8VDC      | Ambient |

## 2.5 EUT operation mode

The EUT has been tested under typical operating condition.

## 2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: RQQHLT-L50SCM** filing to comply with Section 15.247 of the FCC Part 15, Subpart B Rules.

## 2.7 Internal Identification of AE used during the test

| AE ID* | Description |
|--------|-------------|
| AE1    | Charger     |

AE1

Model: TPA-5950100UU

INPUT: 100-240V~ 50/60Hz 0.2A

OUTPUT: DC 5.0V 1.0A

\*AE ID: is used to identify the test sample in the lab internally.

We not used AE2 when for FCC Part 15B test.

## 2.8 Modifications

No modifications were implemented to meet testing criteria.

## 2.9 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:


● - supplied by the manufacturer

○ - supplied by the lab

|   |             |                |   |
|---|-------------|----------------|---|
| ○ | Power Cable | Length (m) :   | / |
|   |             | Shield :       | / |
|   |             | Detachable :   | / |
| ○ | Multimeter  | Manufacturer : | / |
|   |             | Model No. :    | / |

## 2.10 Configuration of Tested System

Configuration of Tested System

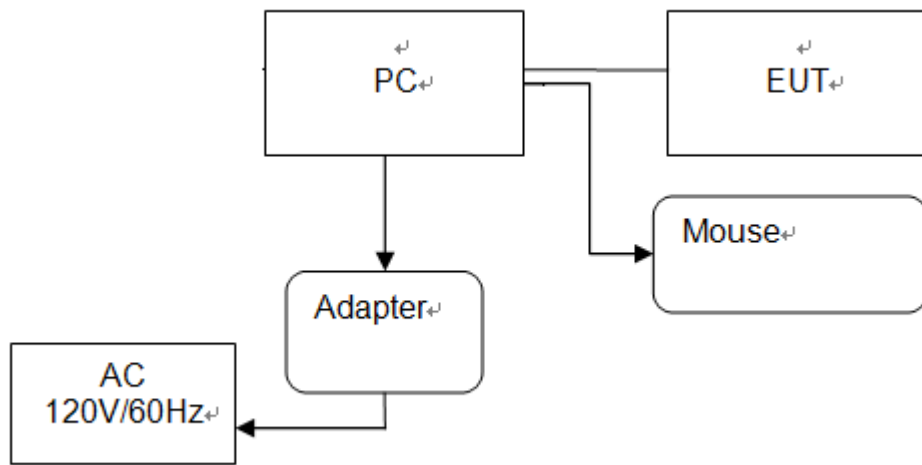

Equipment Used in Tested System

| No. | Equipment                | Manufacturer | Model No.   | Serial No. | Length | shielded/unshielded | Notes |
|-----|--------------------------|--------------|-------------|------------|--------|---------------------|-------|
| 1   | Notebook                 | ThinkPad     | E430C       | A131101550 | /      | /                   | DOC   |
| 2   | Mouse                    | DELL         | MO56UO<br>A | G0E02SY7   | 1.00m  | unshielded          | DOC   |
| 3   | USB Cable<br>(EUT to PC) | Genshuo      | USB 2.0     | N/A        | 0.60m  | unshielded          | N/A   |
| 4   | Power line               | /            | /           | N/A        | 1.00m  | unshielded          | N/A   |

### **3 TEST ENVIRONMENT**

#### **3.1 Address of the test laboratory**

##### **Shenzhen CTL Testing Technology Co., Ltd.**

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

#### **3.2 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

The test facility is recognized, certified, or accredited by the following organizations:

##### **IC Registration No.: 9618B**

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

##### **FCC-Registration No.: 970318**

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

#### **3.3 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

#### **3.4 Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

| <b>Test</b>           | <b>Range</b> | <b>Measurement Uncertainty</b> | <b>Notes</b> |
|-----------------------|--------------|--------------------------------|--------------|
| Radiated Emission     | 30~1000MHz   | 4.5 dB                         | (1)          |
| Radiated Emission     | 1~18GHz      | 4.6 dB                         | (1)          |
| Conducted Disturbance | 0.009~30MHz  | 3.5 dB                         | (1)          |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.




### 3.5 Equipments Used during the Test

| Test Equipment              | Manufacturer         | Model No.             | Serial No.   | Calibration Date | Calibration Due Date |
|-----------------------------|----------------------|-----------------------|--------------|------------------|----------------------|
| LISN                        | R&S                  | ENV216                | 3560.6550.12 | 2015/06/02       | 2016/06/01           |
| LISN                        | R&S                  | ESH2-Z5               | 860014/010   | 2015/06/02       | 2016/06/01           |
| Bilog Antenna               | Sunol Sciences Corp. | JB1                   | A061713      | 2015/06/02       | 2016/06/01           |
| EMI Test Receiver           | R&S                  | ESCI                  | 103710       | 2015/06/02       | 2016/06/01           |
| Spectrum Analyzer           | Agilent              | N9030A                | MY49430428   | 2015/05/21       | 2016/05/20           |
| Controller                  | EM Electronics       | Controller EM 1000    | N/A          | 2015/05/21       | 2016/05/20           |
| Horn Antenna                | Sunol Sciences Corp. | DRH-118               | A062013      | 2015/05/19       | 2016/05/18           |
| Active Loop Antenna         | SCHWARZBECK          | FMZB1519              | 1519-037     | 2015/05/19       | 2016/05/18           |
| Amplifier                   | Agilent              | 8349B                 | 3008A02306   | 2015/05/19       | 2016/05/18           |
| Amplifier                   | Agilent              | 8447D                 | 2944A10176   | 2015/05/19       | 2016/05/18           |
| Temperature/ Humidity Meter | Gangxing             | CTH-608               | 02           | 2015/05/20       | 2016/05/19           |
| High-Pass Filter            | K&L                  | 9SH10-2700/X12750-O/O | N/A          | 2015/05/20       | 2016/05/19           |
| High-Pass Filter            | K&L                  | 41H10-1375/U12750-O/O | N/A          | 2015/05/20       | 2016/05/19           |
| Coaxial Cables              | HUBER+SUHNER         | SUCOFLEX 104PEA-10M   | 10m          | 2015/06/02       | 2016/06/01           |
| Coaxial Cables              | HUBER+SUHNER         | SUCOFLEX 104PEA-3M    | 3m           | 2015/06/02       | 2016/06/01           |
| Coaxial Cables              | HUBER+SUHNER         | SUCOFLEX 104PEA-3M    | 3m           | 2015/06/02       | 2016/06/01           |
| RF Cable                    | Megalon              | RF-A303               | N/A          | 2015/06/02       | 2016/06/01           |
| Power Sensor                | R&S                  | NRP-Z4                | 823.3618.03  | 2015.06.02       | 2016.06.01           |
| Power Meter                 | R&S                  | NRVS                  | 1020.1809.02 | 2015.06.02       | 2016.06.01           |

## 4 TEST CONDITIONS AND RESULTS

### 4.1 Conducted Emissions Test

#### TEST CONFIGURATION

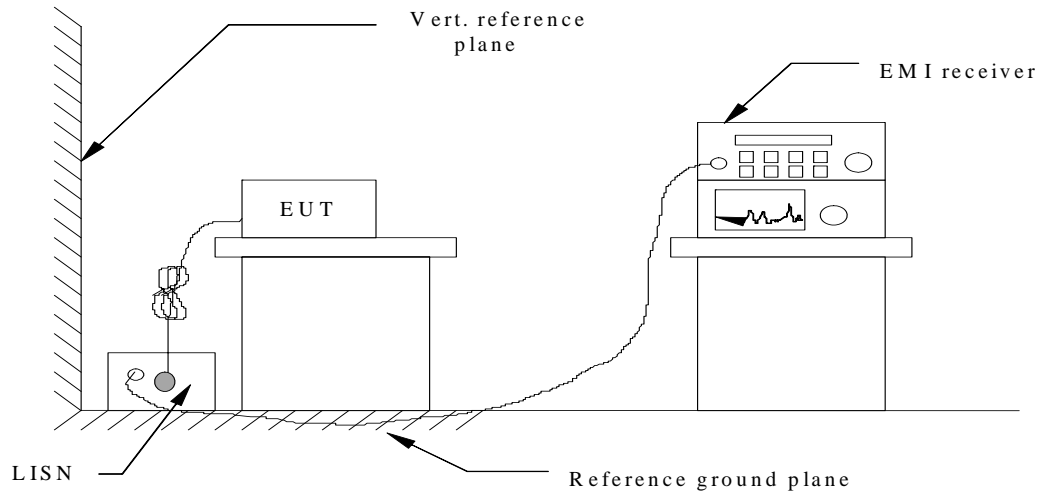

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2014.
2. Support equipment, if needed, was placed as per ANSI C63.4-2014.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2014.
4. The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

#### CONDUCTED POWER LINE EMISSION LIMIT

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

| Frequency (MHz) | Maximum RF Line Voltage (dB $\mu$ V) |      |         |        |
|-----------------|--------------------------------------|------|---------|--------|
|                 | CLASS A                              |      | CLASS B |        |
|                 | Q.P.                                 | Ave. | Q.P.    | Ave.   |
| 0.15 - 0.50     | 79                                   | 66   | 66-56*  | 56-46* |
| 0.50 - 5.00     | 73                                   | 60   | 56      | 46     |
| 5.00 - 30.0     | 73                                   | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency


#### TEST RESULTS

*Note: We tested the playing video Mode, Data transmission (connected PC) Mode, camera Mode and so on, and recorded the worst case at the playing video Mode.*

L:

**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

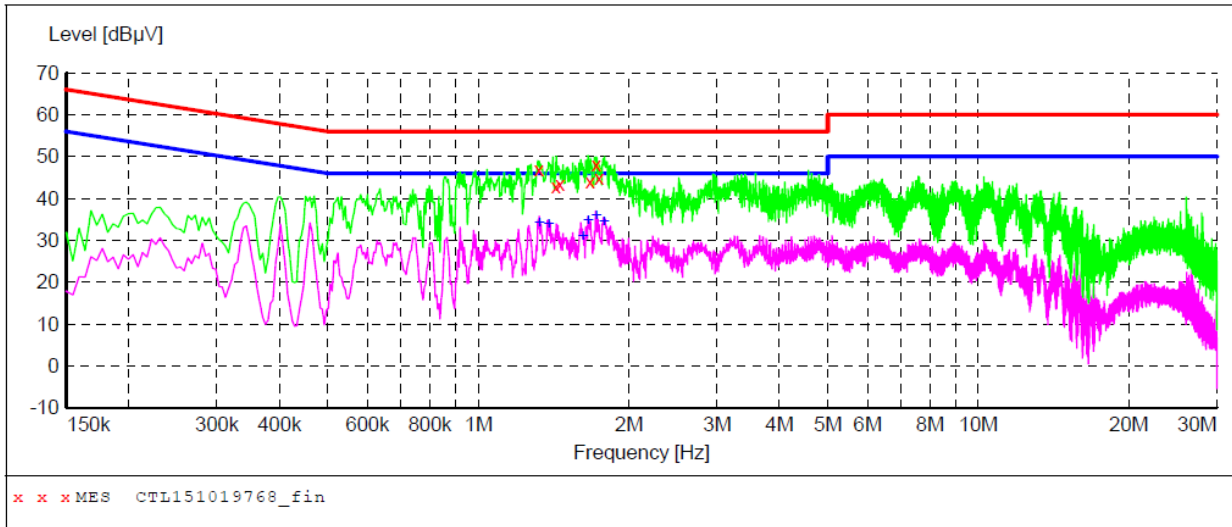

**MEASUREMENT RESULT: "CTL151019768\_fin"**

10/19/2015 8:14PM

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|
| 1.320001      | 46.80      | 10.3      | 56         | 9.2       | QP       | L1   | GND |
| 1.428001      | 42.90      | 10.3      | 56         | 13.1      | QP       | L1   | GND |
| 1.455001      | 43.50      | 10.3      | 56         | 12.5      | QP       | L1   | GND |
| 1.671001      | 44.10      | 10.3      | 56         | 11.9      | QP       | L1   | GND |
| 1.720501      | 47.90      | 10.3      | 56         | 8.1       | QP       | L1   | GND |
| 1.743001      | 44.80      | 10.3      | 56         | 11.2      | QP       | L1   | GND |

**MEASUREMENT RESULT: "CTL151019768\_fin2"**


10/19/2015 8:14PM

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Detector | Line | PE  |
|---------------|------------|-----------|------------|-----------|----------|------|-----|
| 1.324501      | 34.00      | 10.3      | 46         | 12.0      | AV       | L1   | GND |
| 1.383001      | 33.90      | 10.3      | 46         | 12.1      | AV       | L1   | GND |
| 1.617001      | 31.00      | 10.3      | 46         | 15.0      | AV       | L1   | GND |
| 1.657501      | 34.60      | 10.3      | 46         | 11.4      | AV       | L1   | GND |
| 1.720501      | 35.90      | 10.3      | 46         | 10.1      | AV       | L1   | GND |
| 1.783501      | 34.50      | 10.3      | 46         | 11.5      | AV       | L1   | GND |

N:

**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

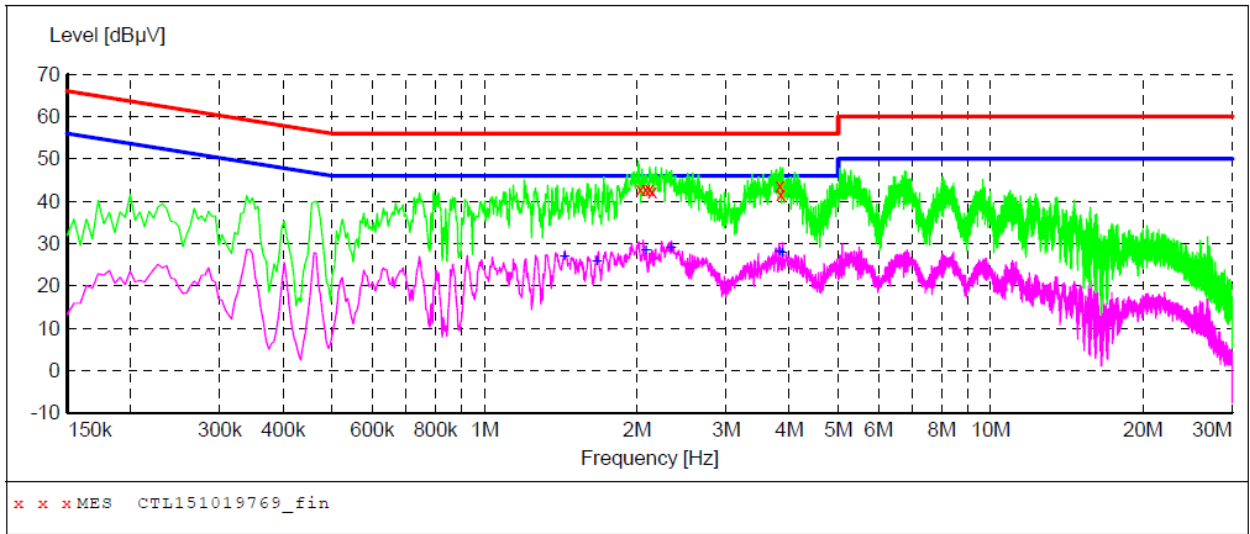

**MEASUREMENT RESULT: "CTL151019769\_fin"**

10/19/2015 8:17PM

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 2.031001         | 42.80         | 10.4         | 56            | 13.2         | QP       | N    | GND |
| 2.080501         | 42.70         | 10.4         | 56            | 13.3         | QP       | N    | GND |
| 2.116501         | 42.70         | 10.4         | 56            | 13.3         | QP       | N    | GND |
| 2.143501         | 42.10         | 10.4         | 56            | 13.9         | QP       | N    | GND |
| 3.835501         | 43.60         | 10.4         | 56            | 12.4         | QP       | N    | GND |
| 3.849001         | 41.70         | 10.4         | 56            | 14.3         | QP       | N    | GND |

**MEASUREMENT RESULT: "CTL151019769\_fin2"**


10/19/2015 8:17PM

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 1.437001         | 26.70         | 10.3         | 46            | 19.3         | AV       | N    | GND |
| 1.666501         | 25.70         | 10.3         | 46            | 20.3         | AV       | N    | GND |
| 2.085001         | 28.30         | 10.4         | 46            | 17.7         | AV       | N    | GND |
| 2.337001         | 28.80         | 10.4         | 46            | 17.2         | AV       | N    | GND |
| 3.822001         | 28.00         | 10.4         | 46            | 18.0         | AV       | N    | GND |
| 3.876001         | 27.60         | 10.4         | 46            | 18.4         | AV       | N    | GND |


## 4.2 Radiated Emission Test

### TEST CONFIGURATION

Frequency range: 30MHz – 1000MHz

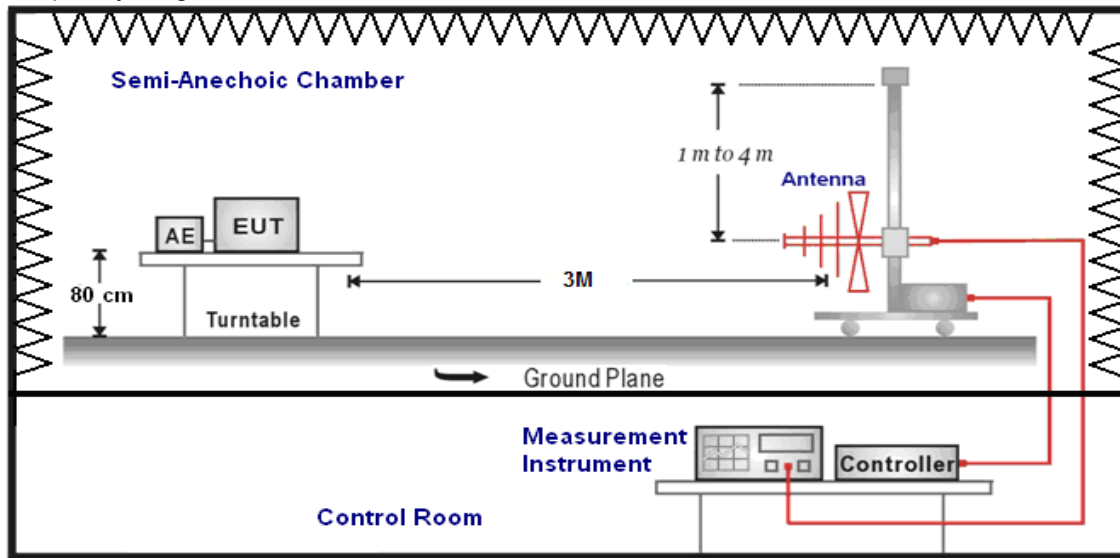

Frequency range above 1GHz-25GHz

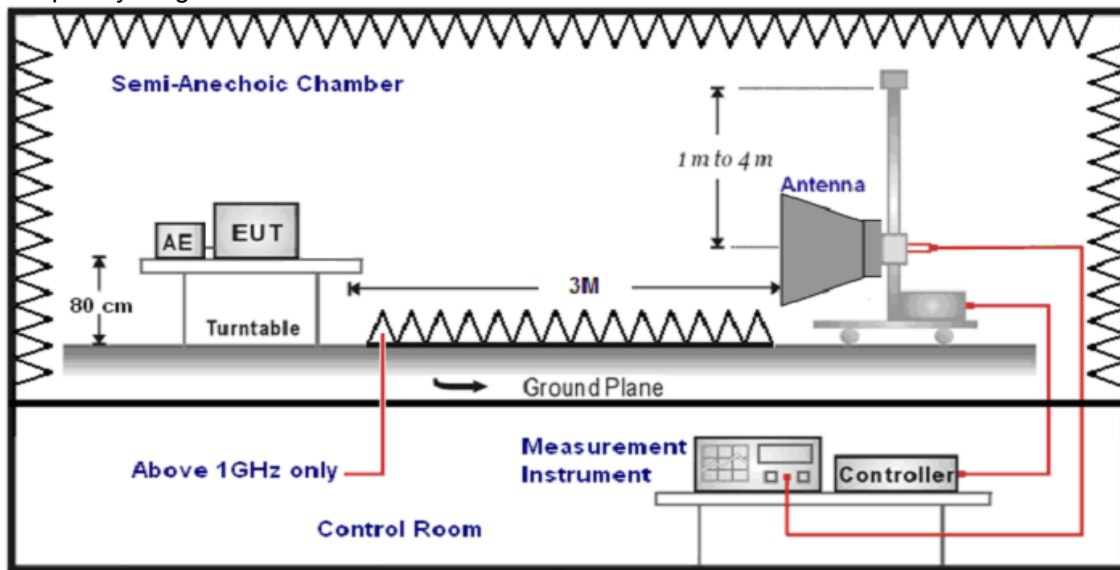

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The maximum operation frequency was 1.2GHz, the radiated emission test frequency from 30 MHz to 6GHz.

8. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-6GHz            | Double Ridged Horn Antenna | 3             |

9. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                       | Detector              |
|----------------------|--|-----------------------|
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz,Sweep time=Auto               | QP                    |
| 1GHz-6GHz            | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto    | Peak<br>(Receiver)    |
|                      | Average Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto | Average<br>(Receiver) |

### **FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |  |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |  |

For example

| Frequency (MHz) | FS (dB $\mu$ V/m) | RA (dB $\mu$ V/m) | AF (dB) | CL (dB) | AG (dB) | Transd (dB) |
|-----------------|-------------------|-------------------|---------|---------|---------|-------------|
| 300.00          | 40                | 58.1              | 12.2    | 1.6     | 31.90   | -18.1       |

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

### **RADIATION LIMIT**

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


| Frequency (MHz) | Distance (Meters) | Radiated (dB $\mu$ V/m)          | Radiated ( $\mu$ V/m) |
|-----------------|-------------------|----------------------------------|-----------------------|
| 0.009-0.49      | 300               | $20\log(2400/F(\text{KHz}))+80$  | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 30                | $20\log(24000/F(\text{KHz}))+40$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 30                | $20\log(30)+40$                  | 30                    |
| 30-88           | 3                 | 40.0                             | 100                   |
| 88-216          | 3                 | 43.5                             | 150                   |
| 216-960         | 3                 | 46.0                             | 200                   |
| Above 960       | 3                 | 54.0                             | 500                   |

### **TEST RESULTS**

**Polarization** **Horizontal**

**SWEEP TABLE: "test (30M-1G)"**

| Short Description: |           | Field Strength |          |         |            |  |
|--------------------|-----------|----------------|----------|---------|------------|--|
| Start              | Stop      | Detector       | Meas.    | IF      | Transducer |  |
| Frequency          | Frequency |                | Time     | Bandw.  |            |  |
| 30.0 MHz           | 1.0 GHz   | MaxPeak        | 300.0 ms | 120 kHz | Jb1        |  |

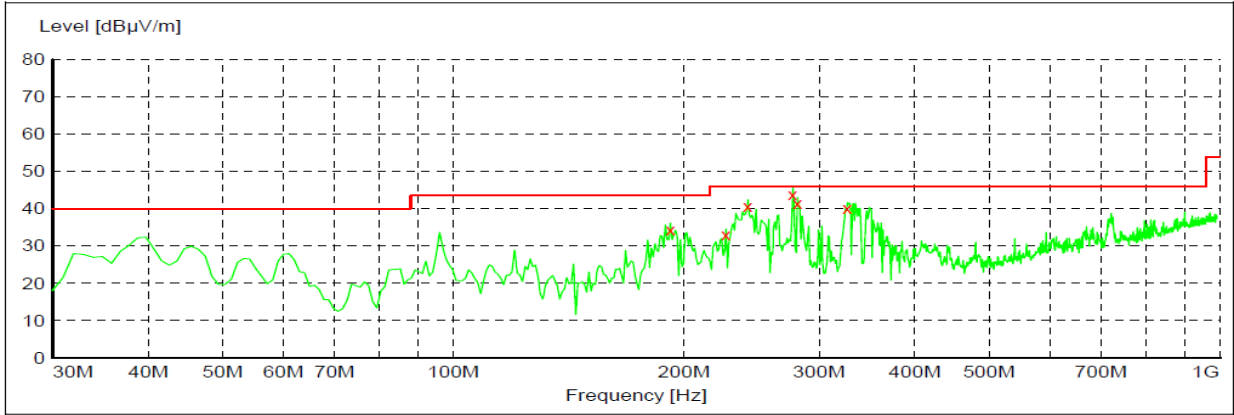

x x MES CTL151019578\_red

**MEASUREMENT RESULT: "CTL151019578\_red"**


10/19/2015 10:22AM

| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------|-----------|--------------|-----------|------|-----------|-------------|--------------|
| 191.990000    | 36.10        | -14.7     | 43.5         | 7.4       | QP   | 100.0     | 340.00      | HORIZONTAL   |
| 226.910000    | 34.60        | -15.1     | 46.0         | 11.4      | QP   | 100.0     | 340.00      | HORIZONTAL   |
| 242.430000    | 40.40        | -15.4     | 46.0         | 5.6       | QP   | 100.0     | 112.00      | HORIZONTAL   |
| 277.350000    | 43.60        | -14.7     | 46.0         | 2.4       | QP   | 100.0     | 70.00       | HORIZONTAL   |
| 281.230000    | 42.00        | -14.5     | 46.0         | 4.0       | QP   | 100.0     | 70.00       | HORIZONTAL   |
| 326.820000    | 39.70        | -13.0     | 46.0         | 6.3       | QP   | 100.0     | 70.00       | HORIZONTAL   |

**30MHz-1GHz**

**SWEEP TABLE: "test (1G-6G) P"**

| Short Description: |           | EN 55022 Field Strength |        |        |            |  |
|--------------------|-----------|-------------------------|--------|--------|------------|--|
| Start              | Stop      | Detector                | Meas.  | IF     | Transducer |  |
| Frequency          | Frequency |                         | Time   | Bandw. |            |  |
| 1.0 GHz            | 6.0 GHz   | MaxPea                  | Couple | 1 MH   | DRH_118    |  |

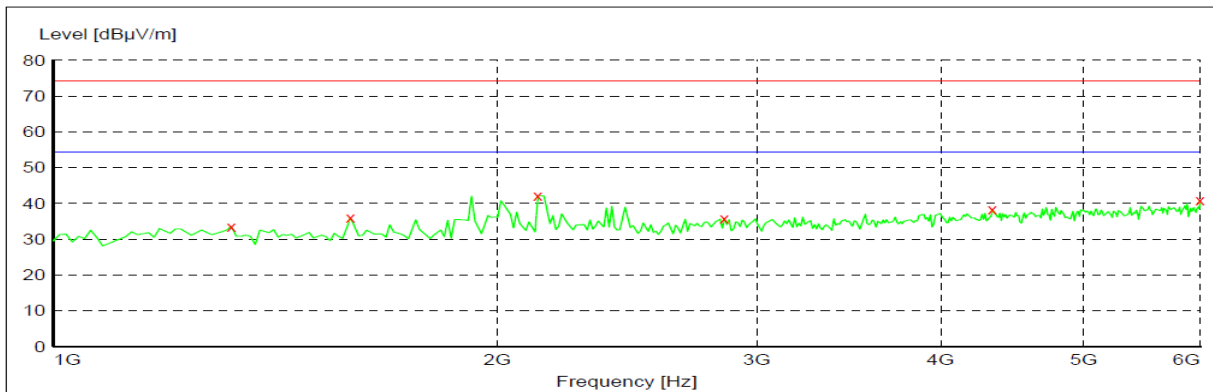

x x MES CTL151019580\_red

**MEASUREMENT RESULT: "CTL151019580\_red"**

10/19/2015 5:52PM


| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------|-----------|--------------|-----------|------|-----------|-------------|--------------|
| 1320.641283   | 33.60        | -8.0      | 74.0         | 40.4      | ---  | 100.0     | 5.00        | HORIZONTAL   |
| 1591.182365   | 36.00        | -8.4      | 74.0         | 38.0      | ---  | 100.0     | 0.00        | HORIZONTAL   |
| 2132.264529   | 42.20        | -5.6      | 74.0         | 31.8      | ---  | 100.0     | 0.00        | HORIZONTAL   |
| 2853.707415   | 35.80        | -3.6      | 74.0         | 38.2      | ---  | 100.0     | 5.00        | HORIZONTAL   |
| 4336.673347   | 38.30        | 0.7       | 74.0         | 35.7      | ---  | 100.0     | 9.00        | HORIZONTAL   |
| 6000.000000   | 40.90        | 4.6       | 74.0         | 33.1      | ---  | 100.0     | 0.00        | HORIZONTAL   |

**1GHz-6GHz**

|                     |                 |
|---------------------|-----------------|
| <i>Polarization</i> | <i>Vertical</i> |
|---------------------|-----------------|

**SWEEP TABLE: "test (30M-1G)"**

|                    |           |                |          |         |            |
|--------------------|-----------|----------------|----------|---------|------------|
| Short Description: |           | Field Strength |          |         |            |
| Start              | Stop      | Detector       | Meas.    | IF      | Transducer |
| Frequency          | Frequency |                | Time     | Bandw.  |            |
| 30.0 MHz           | 1.0 GHz   | MaxPeak        | 300.0 ms | 120 kHz | JB1        |

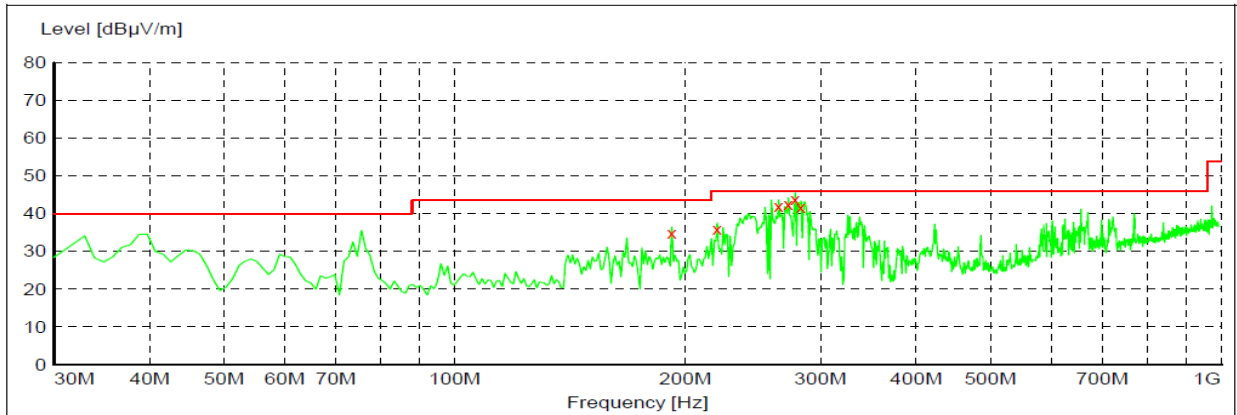

x x xMES CTL151019577\_red

**MEASUREMENT RESULT: "CTL151019577\_red"**


10/19/2015 10:20AM

| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------|-----------|--------------|-----------|------|-----------|-------------|--------------|
| 191.990000    | 36.50        | -14.7     | 43.5         | 7.0       | QP   | 100.0     | 36.00       | VERTICAL     |
| 220.120000    | 37.60        | -15.1     | 43.5         | 5.9       | QP   | 100.0     | 7.00        | VERTICAL     |
| 264.740000    | 41.70        | -15.4     | 46.0         | 4.3       | QP   | 100.0     | 7.00        | VERTICAL     |
| 272.500000    | 42.20        | -15.0     | 46.0         | 3.8       | QP   | 100.0     | 7.00        | VERTICAL     |
| 278.320000    | 43.50        | -14.7     | 46.0         | 2.5       | QP   | 100.0     | 7.00        | VERTICAL     |
| 283.170000    | 41.40        | -14.4     | 46.0         | 4.6       | QP   | 100.0     | 7.00        | VERTICAL     |

**30MHz-1GHz**

**SWEEP TABLE: "test (1G-6G) P"**

|                    |           |                         |         |        |            |
|--------------------|-----------|-------------------------|---------|--------|------------|
| Short Description: |           | EN 55022 Field Strength |         |        |            |
| Start              | Stop      | Detector                | Meas.   | IF     | Transducer |
| Frequency          | Frequency |                         | Time    | Bandw. |            |
| 1.0 GHz            | 6.0 GHz   | MaxPeak                 | Coupled | 1 MHz  | DRH_118    |

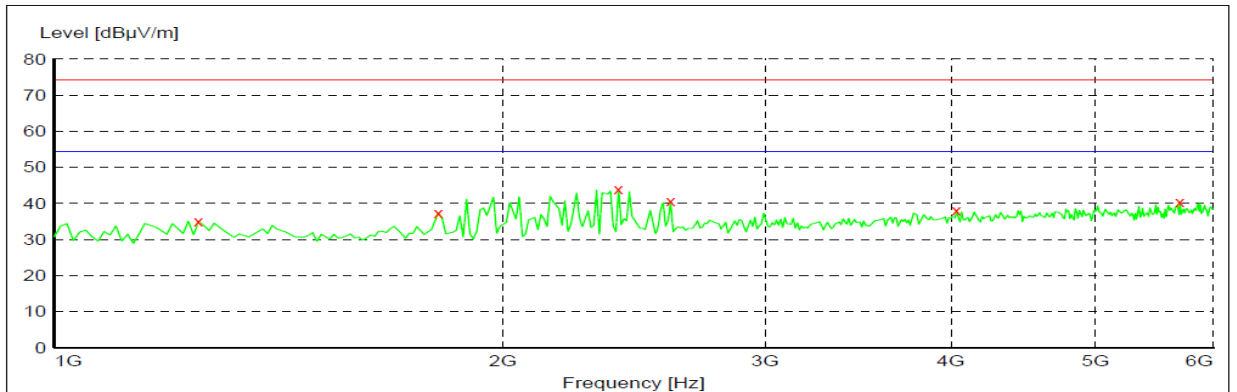

x x xMES CTL151019579\_red

**MEASUREMENT RESULT: "CTL151019579\_red"**

10/19/2015 6:08PM

| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|---------------|--------------|-----------|--------------|-----------|------|-----------|-------------|--------------|
| 1250.501002   | 35.10        | -8.4      | 74.0         | 38.9      | ---  | 100.0     | 0.00        | VERTICAL     |
| 1811.623246   | 37.50        | -8.2      | 74.0         | 36.5      | ---  | 100.0     | 0.00        | VERTICAL     |
| 2392.785571   | 43.90        | -5.3      | 74.0         | 30.1      | ---  | 100.0     | 0.00        | VERTICAL     |
| 2593.186373   | 40.60        | -5.0      | 74.0         | 33.4      | ---  | 100.0     | 6.00        | VERTICAL     |
| 4036.072144   | 38.10        | -0.3      | 74.0         | 35.9      | ---  | 100.0     | 0.00        | VERTICAL     |
| 5699.398798   | 40.50        | 3.6       | 74.0         | 33.5      | ---  | 100.0     | 10.00       | VERTICAL     |

**1GHz-6GHz**



**5 Test Setup Photos of the EUT**

Please refer to separated files for Test Setup Photos of the EUT.

**6 External Photos of the EUT**

Please refer to separated files for External Photos of the EUT.

**7 Internal Photos of the EUT**

Please refer to separated files for Internal Photos of the EUT.

.....**End of Report**.....