



A D T

# FCC TEST REPORT (15.247)

**REPORT NO.:** RF120210E01 R1

**MODEL NO.:** D2F

**FCC ID:** RRK-D2F

**RECEIVED:** Feb. 10, 2012

**TESTED:** Feb. 15 to 17, 2012

**ISSUED:** Apr. 13, 2012

**APPLICANT:** Alpha Networks Inc.

**ADDRESS:** No.8 Li-shing 7th Rd., Science-based  
Industrial Park, Hsinchu, Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

This test report consists of 88 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

## Table of Contents

RELEASE CONTROL RECORD .....	5
1. CERTIFICATION .....	6
2. SUMMARY OF TEST RESULTS .....	7
2.1 MEASUREMENT UNCERTAINTY .....	8
3. GENERAL INFORMATION .....	9
3.1 GENERAL DESCRIPTION OF EUT .....	9
3.2 DESCRIPTION OF TEST MODES .....	12
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	13
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	16
3.4 DESCRIPTION OF SUPPORT UNITS.....	17
3.5 CONFIGURATION OF SYSTEM UNDER TEST .....	18
4. TEST TYPES AND RESULTS (For 2.4GHz, 2412 ~ 2462MHz Band).....	19
4.1 CONDUCTED EMISSION MEASUREMENT .....	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	19
4.1.2 TEST INSTRUMENTS.....	19
4.1.3 TEST PROCEDURES .....	20
4.1.4 DEVIATION FROM TEST STANDARD .....	20
4.1.5 TEST SETUP .....	21
4.1.6 EUT OPERATING CONDITIONS .....	21
4.1.7 TEST RESULTS .....	22
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	24
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	24
4.2.2 TEST INSTRUMENTS.....	25
4.2.3 TEST PROCEDURES .....	27
4.2.4 DEVIATION FROM TEST STANDARD .....	27
4.2.5 TEST SETUP .....	28
4.2.6 EUT OPERATING CONDITIONS .....	28
4.2.7 TEST RESULTS .....	29
4.3 6dB BANDWIDTH MEASUREMENT .....	42
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	42
4.3.2 TEST INSTRUMENTS.....	42
4.3.3 TEST PROCEDURE.....	42
4.3.4 DEVIATION FROM TEST STANDARD .....	42
4.3.5 TEST SETUP .....	42
4.3.6 EUT OPERATING CONDITIONS .....	42
4.3.7 TEST RESULTS .....	43
4.4 CONDUCTED OUTPUT POWER.....	44
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	44
4.4.2 INSTRUMENTS.....	44
4.4.3 TEST PROCEDURES .....	44



4.4.4	DEVIATION FROM TEST STANDARD .....	44
4.4.5	TEST SETUP .....	44
4.4.6	EUT OPERATING CONDITIONS .....	44
4.4.7	TEST RESULTS .....	45
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	47
4.5.2	TEST INSTRUMENTS.....	47
4.5.3	TEST PROCEDURE.....	47
4.5.4	DEVIATION FROM TEST STANDARD .....	47
4.5.5	TEST SETUP .....	47
4.5.6	EUT OPERATING CONDITION.....	47
4.5.7	TEST RESULTS .....	48
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT .....	50
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	50
4.6.2	TEST INSTRUMENTS.....	50
4.6.3	TEST PROCEDURE.....	50
4.6.4	DEVIATION FROM TEST STANDARD .....	51
4.6.5	TEST SETUP .....	51
4.6.6	EUT OPERATING CONDITION.....	51
4.6.7	TEST RESULTS .....	51
5.	TEST TYPES AND RESULTS (For 5Ghz, 5725~5850MHz Band) .....	56
5.1	CONDUCTED EMISSION MEASUREMENT .....	56
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	56
5.1.2	TEST INSTRUMENTS.....	56
5.1.3	TEST PROCEDURES .....	57
5.1.4	DEVIATION FROM TEST STANDARD .....	57
5.1.5	TEST SETUP .....	58
5.1.6	EUT OPERATING CONDITIONS .....	58
5.1.7	TEST RESULTS .....	59
5.2	RADIATED AND BANDEDGE EMISSION MEASUREMENT .....	61
5.2.1	LIMITS OF RADIATED AND BANDEDGE EMISSION MEASUREMENT.....	61
5.2.2	TEST INSTRUMENTS.....	62
5.2.3	TEST PROCEDURES .....	64
5.2.4	DEVIATION FROM TEST STANDARD .....	64
5.2.5	TEST SETUP .....	65
5.2.6	EUT OPERATING CONDITIONS .....	65
5.2.7	TEST RESULTS .....	66
5.3	6dB BANDWIDTH MEASUREMENT .....	75
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	75
5.3.2	TEST INSTRUMENTS.....	75
5.3.3	TEST PROCEDURE.....	75
5.3.4	DEVIATION FROM TEST STANDARD .....	75



A D T

5.3.5	TEST SETUP .....	75
5.3.6	EUT OPERATING CONDITIONS .....	75
5.3.7	TEST RESULTS .....	76
5.4	CONDUCTED OUTPUT POWER.....	77
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	77
5.4.2	INSTRUMENTS.....	77
5.4.3	TEST PROCEDURES .....	77
5.4.4	DEVIATION FROM TEST STANDARD .....	77
5.4.5	TEST SETUP .....	77
5.4.6	EUT OPERATING CONDITIONS .....	77
5.4.7	TEST RESULTS .....	78
5.5	POWER SPECTRAL DENSITY MEASUREMENT.....	79
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	79
5.5.2	TEST INSTRUMENTS.....	79
5.5.3	TEST PROCEDURE.....	79
5.5.4	DEVIATION FROM TEST STANDARD .....	79
5.5.5	TEST SETUP .....	79
5.5.6	EUT OPERATING CONDITION.....	79
5.5.7	TEST RESULTS .....	80
5.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	81
5.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	81
5.6.2	TEST INSTRUMENTS.....	81
5.6.3	TEST PROCEDURE.....	81
5.6.4	DEVIATION FROM TEST STANDARD .....	82
5.6.5	EUT OPERATING CONDITION.....	82
5.6.6	TEST RESULTS .....	82
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	86
7.	INFORMATION ON THE TESTING LABORATORIES .....	87
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	88



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120210E01	Original release	Apr. 10, 2012
RF120210E01 R1	Modified Antenna Connector type of the EUT	Apr. 13, 2012



A D T

## 1. CERTIFICATION

**PRODUCT:** MY NET N600  
**BRAND NAME:** WD  
**MODEL NO.:** D2F  
**TEST SAMPLE:** MASS-PRODUCTION  
**APPLICANT:** Alpha Networks Inc.  
**TESTED:** Feb. 15 to 17, 2012  
**STANDARDS:** **FCC Part 15, Subpart C (Section 15.247)**  
ANSI C63.10-2009

The above equipment (Model: D2F) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** :  , **DATE:** Apr. 13, 2012  
( Lori Chung, Specialist )

**APPROVED BY** :  , **DATE:** Apr. 13, 2012  
( May Chen, Deputy Manager )



## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

[For 2.4GHz, 2412~2462MHz Band](#)

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -20.48dB at 0.39540MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.5dB at 2390.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is MHF not a standard connector.

[For 5GHz, 5745~5825MHz Band](#)

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -20.91dB at 0.37621MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -2.3dB at 5360.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is MHF not a standard connector.

**NOTE:** The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz and 5.725~5.850GHz. For the 5.15~5.25GHz RF parameters was recorded in another test report.



A D T

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.81 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB





A D T

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	MY NET N600
<b>MODEL NO.</b>	D2F
<b>FCC ID</b>	RRK-D2F
<b>POWER SUPPLY</b>	DC 12V from external power adapter
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	802.11b: Up to 11Mbps 802.11a/g: Up to 54Mbps 802.11n (20MHz, 800ns GI): Up to 130Mbps 802.11n (20MHz, 400ns GI): Up to 144.444Mbps 802.11n (40MHz, 800ns GI): Up to 270Mbps 802.11n (40MHz, 400ns GI): Up to 300Mbps
<b>OPERATING FREQUENCY</b>	<b>For 15.407</b> 802.11a: 5.18 ~ 5.24GHz <b>For 15.247</b> 802.11b/g: 2.412 ~ 2.462GHz 802.11a: 5.745 ~ 5.825GHz
<b>NUMBER OF CHANNEL</b>	<b>For 15.407</b> 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) <b>For 15.247 (2.4GHz)</b> 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) <b>For 15.247 (5GHz)</b> 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)



A D T

<b>MAXIMUM OUTPUT POWER</b>	<p><b>For 15.407</b>              802.11a: 28.3mW              802.11n (20MHz): 46.0mW              802.11n (40MHz): 48.0mW</p> <p><b>For 15.247 (2.4GHz)</b>              802.11b: 360.0mW              802.11g: 485.4mW              802.11n (20MHz): 485.4mW              802.11n (40MHz): 442.6mW</p> <p><b>For 15.247 (5GHz)</b>              802.11a: 485.6mW              802.11n (20MHz): 789.7mW              802.11n (40MHz): 762.2mW</p>
<b>ANTENNA TYPE</b>	Please see NOTE
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Refer to user's manual
<b>ASSOCIATED DEVICES</b>	Adapter x 1

**NOTE:**

1. The antennas provided to the EUT, please refer to the following table:

For 2.4GHz					
Transmitter Circuit	Brand	Model	Peak Gain (dBi)	Antenna Type	Connecter Type
Chain (0)	WHA YU GROUP	C037-511171-A (SSR-14424)	3	PCB	NA
Chain (1)	WHA YU GROUP	C037-511170-A (SSR-2011130)	3	PCB	NA
For 5GHz					
Transmitter Circuit	Brand	Model	Peak Gain (dBi)	Antenna Type	Connecter Type
Chain (0)	WHA YU GROUP	C037-511172-A (SSR-2011133)	5	PCB	MHF
Chain (1)	WHA YU GROUP	C037-511176-A (SSR-14470)	5	PCB	MHF

2. The EUT must be supplied with a power adapter as following table:

Brand	Model No.	Spec.
APD	WA-24E12FU	Input: 100-240V, 50-60Hz, 0.65A Max Output: 12V, 2A DC output cable (1.8m, unshielded, with one core)

3. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX/Rx FUNCTION
<b>802.11b</b>	2Tx/2Rx
<b>802.11g</b>	2Tx/2Rx
<b>802.11a</b>	2Tx/2Rx
<b>802.11n (20MHz)</b>	2Tx/2Rx
<b>802.11n (40MHz)</b>	2Tx/2Rx

4. Spurious emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.

5. The EUT is 2 \* 2 spatial MIMO (2Tx & 2Rx) without beam forming function.

6. The EUT incorporates CDD function with 802.11a, 802.11b, 802.11g.

7. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.

8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

## 3.2 DESCRIPTION OF TEST MODES

### Operated in 2400 ~ 2483.5MHz band:

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### Operated in 5725 ~ 5850MHz band:

Five channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

Two channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY
151	5755 MHz
159	5795 MHz



A D T

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission      **RE < 1G**: Radiated Emission below 1GHz  
**RE ≥ 1G**: Radiated Emission above 1GHz      **APCM**: Antenna Port Conducted Measurement  
**OB**: Conducted Out-Band Emission Measurement

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6
802.11a	149 to 165	149	OFDM	BPSK	6

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6
802.11a	149 to 165	149	OFDM	BPSK	6



A D T

**RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5



A D T

**CONDUCTED OUT-BAND EMISSION MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
For 2.4 GHz 802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6
For 5 GHz 802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
For 5 GHz 802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	24deg. C, 75%RH	120Vac, 60Hz	Scott Chen
RE<1G	19deg. C, 62%RH	120Vac, 60Hz	Nick Chang
RE <sup>3</sup> 1G	23deg. C, 69%RH	120Vac, 60Hz	Frank Liu
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### **FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.





A D T

### 3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC
3	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
4	HDD	WD	WDBAAE5000A SL-PESN	WX51A6172904	FCC DoC

No.	Signal cable description
1	UTP cable (10m)
2	UTP cable (10m)
3	UTP cable (10m)
4	USB cable (0.3m)

Note: The power cords of the above support units were unshielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

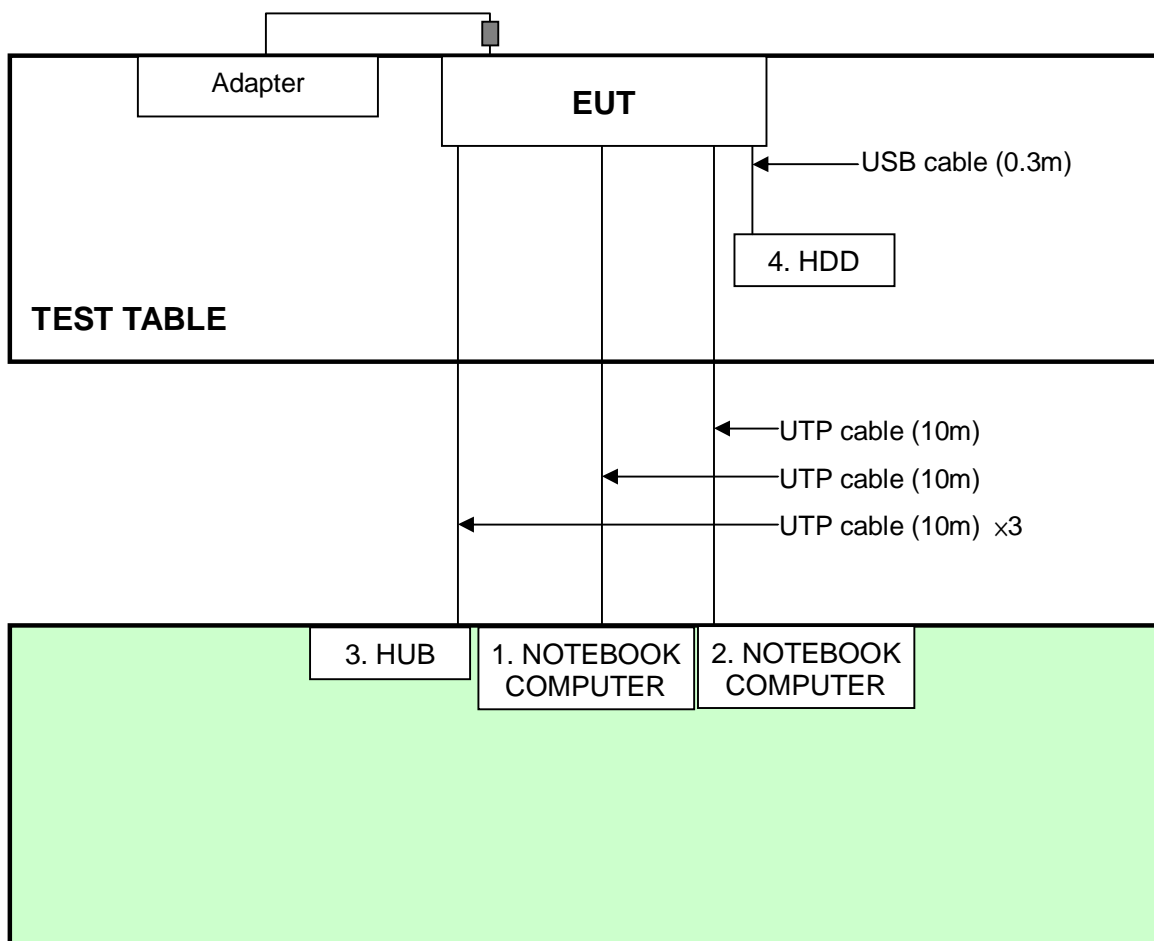



A D T

## 4. TEST TYPES AND RESULTS (FOR 2.4GHz, 2412 ~ 2462MHz Band)

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2011	Mar. 08, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK8127	8127-522	Sep. 07, 2011	Sep. 06, 2012
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 02, 2011	Nov. 01, 2012
RF Cable (JYEBAO)	5DFB	COCCAB-002	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Feb. 17, 2012


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

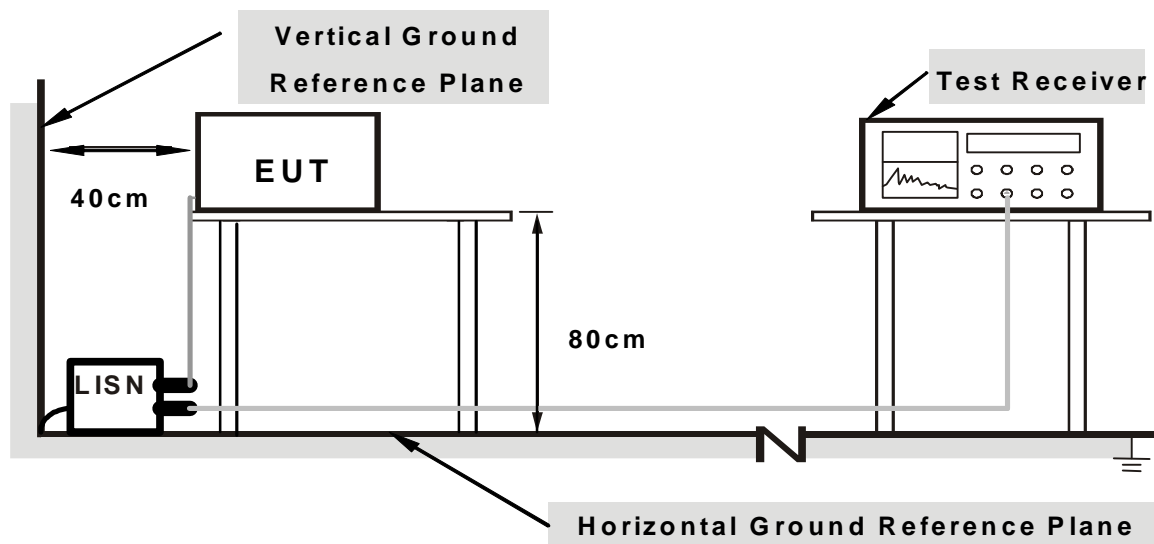

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS


1. Placed the EUT on testing table.
2. Prepared other computer system (support unit 1) to act as communication partners and placed them outside of testing area.
3. The communication partners ran test program “artgui.exe” to enable EUT under transmission/receiving condition continuously via UTP cables transmission.

#### 4.1.7 TEST RESULTS

<b>PHASE</b>	Line (L)	<b>6dB BANDWIDTH</b>	9 kHz
--------------	----------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16154	0.09	43.45	32.22	43.54	32.31	65.38	55.38	-21.84	-23.07
2	0.18899	0.10	40.08	28.35	40.18	28.45	64.08	54.08	-23.90	-25.63
<b>3</b>	<b>0.39540</b>	<b>0.14</b>	<b>34.85</b>	<b>27.33</b>	<b>34.99</b>	<b>27.47</b>	<b>57.95</b>	<b>47.95</b>	<b>-22.96</b>	<b>-20.48</b>
4	1.65234	0.24	28.04	22.13	28.28	22.37	56.00	46.00	-27.72	-23.63
5	3.87222	0.39	29.99	22.25	30.38	22.64	56.00	46.00	-25.62	-23.36
6	9.12900	0.67	26.22	20.45	26.89	21.12	60.00	50.00	-33.11	-28.88


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

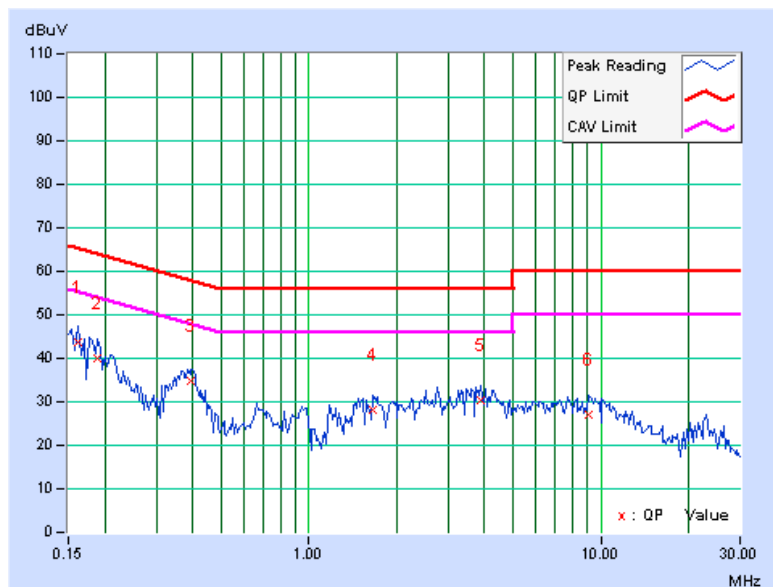

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16188	0.08	43.67	32.55	43.75	32.63	65.37	55.37	-21.62	-22.74
2	0.18879	0.09	40.22	28.51	40.31	28.60	64.09	54.09	-23.78	-25.49
3	0.39695	0.13	34.33	27.15	34.46	27.28	57.92	47.92	-23.46	-20.64
4	1.65335	0.18	28.22	22.43	28.40	22.61	56.00	46.00	-27.60	-23.39
5	3.87327	0.30	29.98	22.51	30.28	22.81	56.00	46.00	-25.72	-23.19
6	9.12870	0.55	26.11	20.32	26.66	20.87	60.00	50.00	-33.34	-29.13

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

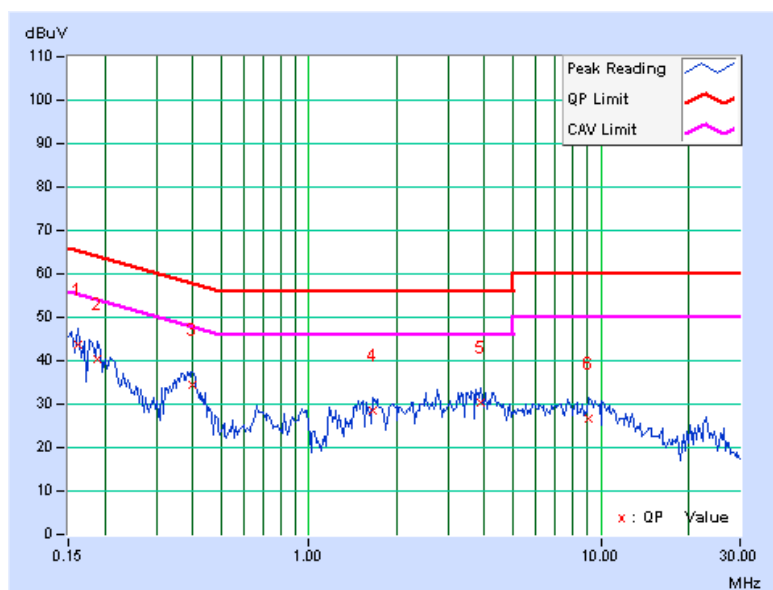

## 4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.





A D T

## 4.2.2 TEST INSTRUMENTS

### For below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. G.

4. The FCC Site Registration No. is 966073.

5. The VCCI Site Registration No. is G-137.

6. The CANADA Site Registration No. is IC 7450H-2.

7. Tested Date: Feb. 15, 2012



A D T

**For above 1GHz**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 28, 2011	Feb. 27, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
3. The test was performed in 966 Chamber No. H.  
4. The FCC Site Registration No. is 797305.  
5. The CANADA Site Registration No. is IC 7450H-3.  
6. Tested Date: Feb. 17, 2012

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

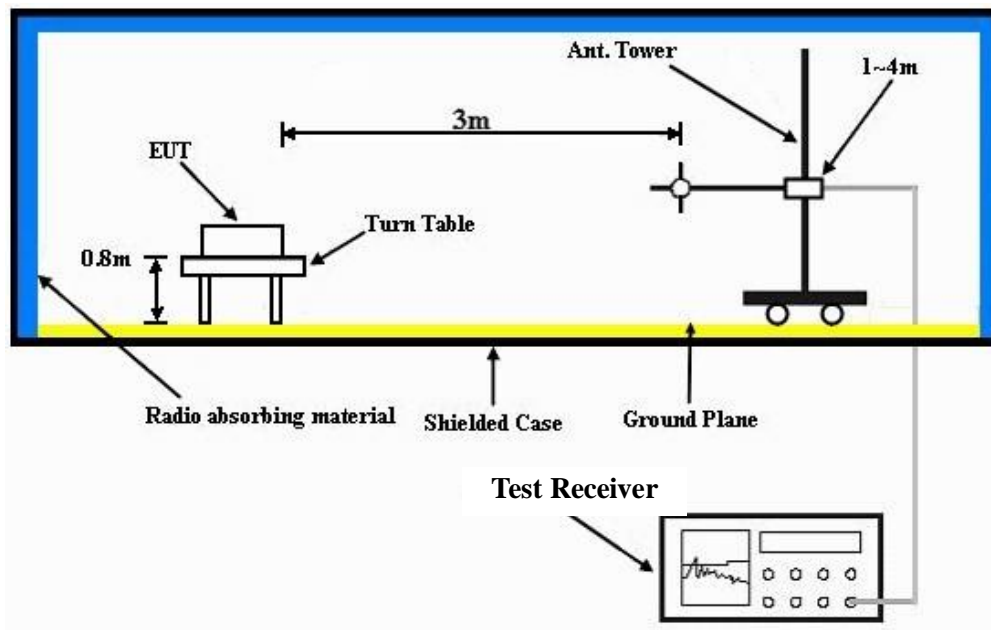

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

## 4.2.7 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA

#### 802.11g

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	130.42	23.5 QP	43.5	-20.0	2.00 H	271	10.06	13.45
2	239.96	25.1 QP	46.0	-20.9	1.00 H	70	12.18	12.96
3	374.97	31.4 QP	46.0	-14.6	1.00 H	9	14.15	17.28
4	720.05	34.9 QP	46.0	-11.1	1.00 H	360	11.26	23.60
5	759.96	34.5 QP	46.0	-11.5	1.00 H	203	9.78	24.71
6	920.06	34.7 QP	46.0	-11.3	1.50 H	221	7.21	27.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	65.65	28.4 QP	40.0	-11.6	1.50 V	69	15.39	13.03
2	128.05	28.8 QP	43.5	-14.7	1.00 V	360	15.56	13.25
3	374.97	31.6 QP	46.0	-14.4	2.00 V	0	14.29	17.28
4	500.02	29.0 QP	46.0	-17.0	1.00 V	19	8.66	20.31
5	720.05	29.4 QP	46.0	-16.6	1.50 V	300	5.77	23.60
6	919.95	30.3 QP	46.0	-15.8	1.50 V	244	2.73	27.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

**ABOVE 1GHz DATA**

**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.27	60.2 PK	74.0	-13.8	1.00 H	71	28.33	31.87
2	2386.27	52.5 AV	54.0	-1.5	1.00 H	71	20.63	31.87
3	*2412.00	115.5 PK			1.00 H	66	83.55	31.95
4	*2412.00	113.3 AV			1.00 H	66	81.35	31.95
5	4824.00	52.1 PK	74.0	-21.9	1.00 H	133	10.88	41.22
6	4824.00	46.7 AV	54.0	-7.3	1.00 H	133	5.48	41.22

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.27	57.4 PK	74.0	-16.6	1.03 V	68	25.53	31.87
2	2386.27	46.6 AV	54.0	-7.4	1.03 V	68	14.73	31.87
3	*2412.00	105.0 PK			1.03 V	114	73.05	31.95
4	*2412.00	102.4 AV			1.03 V	114	70.45	31.95
5	4824.00	53.8 PK	74.0	-20.2	1.00 V	283	12.58	41.22
6	4824.00	49.8 AV	54.0	-4.2	1.00 V	283	8.58	41.22

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.5 PK			1.00 H	65	81.46	32.04
2	*2437.00	111.1 AV			1.00 H	65	79.06	32.04
3	4874.00	53.4 PK	74.0	-20.6	1.00 H	252	12.04	41.36
4	4874.00	49.5 AV	54.0	-4.5	1.00 H	252	8.14	41.36
5	7311.00	54.8 PK	74.0	-19.2	1.03 H	301	9.13	45.67
6	7311.00	42.7 AV	54.0	-11.3	1.03 H	301	-2.97	45.67

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.3 PK			1.02 V	113	72.26	32.04
2	*2437.00	101.9 AV			1.02 V	113	69.86	32.04
3	4874.00	53.5 PK	74.0	-20.5	1.00 V	252	12.14	41.36
4	4874.00	49.1 AV	54.0	-4.9	1.00 V	252	7.74	41.36
5	7311.00	52.3 PK	74.0	-21.7	1.00 V	280	6.63	45.67
6	7311.00	48.0 AV	54.0	-6.0	1.00 V	280	2.33	45.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2383.70	65.0 PK	74.0	-9.0	1.00 H	59	33.13	31.87
2	2383.70	49.3 AV	54.0	-4.7	1.00 H	59	17.43	31.87
3	*2462.00	113.7 PK			1.00 H	86	81.58	32.12
4	*2462.00	111.4 AV			1.00 H	86	79.28	32.12
5	2483.50	60.4 PK	74.0	-13.6	1.00 H	85	28.21	32.19
6	2483.50	52.7 AV	54.0	-1.3	1.00 H	85	20.51	32.19
7	4924.00	52.7 PK	74.0	-21.3	1.00 H	245	11.22	41.48
8	4924.00	49.1 AV	54.0	-4.9	1.00 H	245	7.62	41.48
9	7386.00	55.1 PK	74.0	-18.9	1.05 H	314	9.19	45.91
10	7386.00	42.8 AV	54.0	-11.2	1.05 H	314	-3.11	45.91

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.9 PK			1.00 V	117	70.78	32.12
2	*2462.00	100.3 AV			1.00 V	117	68.18	32.12
3	2483.50	57.3 PK	74.0	-16.7	1.02 V	112	25.11	32.19
4	2483.50	45.1 AV	54.0	-8.9	1.02 V	112	12.91	32.19
5	4924.00	53.9 PK	74.0	-20.1	1.00 V	249	12.42	41.48
6	4924.00	49.8 AV	54.0	-4.2	1.00 V	249	8.32	41.48
7	7386.00	52.4 PK	74.0	-21.6	1.00 V	282	6.49	45.91
8	7386.00	47.9 AV	54.0	-6.1	1.00 V	282	1.99	45.91

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.





A D T

802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	72.5 PK	74.0	-1.5	1.00 H	67	40.62	31.88
2	2390.00	51.5 AV	54.0	-2.5	1.00 H	67	19.62	31.88
3	*2412.00	111.8 PK			1.00 H	66	79.85	31.95
4	*2412.00	101.3 AV			1.00 H	66	69.35	31.95
5	4824.00	48.3 PK	74.0	-25.7	1.00 H	281	7.08	41.22
6	4824.00	37.0 AV	54.0	-17.0	1.00 H	281	-4.22	41.22

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	59.6 PK	74.0	-14.4	1.07 V	116	27.72	31.88
2	2390.00	45.6 AV	54.0	-8.4	1.07 V	116	13.72	31.88
3	*2412.00	101.8 PK			1.02 V	72	69.85	31.95
4	*2412.00	91.4 AV			1.02 V	72	59.45	31.95
5	4824.00	51.0 PK	74.0	-23.0	1.00 V	291	9.78	41.22
6	4824.00	39.2 AV	54.0	-14.8	1.00 V	291	-2.02	41.22

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.00 H	65	40.52	31.88
2	2390.00	50.6 AV	54.0	-3.4	1.00 H	65	18.72	31.88
3	*2437.00	111.7 PK			1.00 H	69	79.66	32.04
4	*2437.00	101.9 AV			1.00 H	69	69.86	32.04
5	4874.00	49.5 PK	74.0	-24.5	1.00 H	290	8.14	41.36
6	4874.00	38.3 AV	54.0	-15.7	1.00 H	290	-3.06	41.36
7	7311.00	54.5 PK	74.0	-19.5	1.08 H	306	8.83	45.67
8	7311.00	43.7 AV	54.0	-10.3	1.08 H	306	-1.97	45.67

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2437.00	104.9 PK			1.00 V	84	72.86	32.04
2	*2437.00	94.7 AV			1.00 V	84	62.66	32.04
3	4874.00	52.8 PK	74.0	-21.2	1.01 V	281	11.44	41.36
4	4874.00	42.3 AV	54.0	-11.7	1.01 V	281	0.94	41.36
5	7311.00	54.6 PK	74.0	-19.4	1.15 V	178	8.93	45.67
6	7311.00	43.6 AV	54.0	-10.4	1.15 V	178	-2.07	45.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.5 PK			1.00 H	107	79.38	32.12
2	*2462.00	100.3 AV			1.00 H	107	68.18	32.12
3	2483.50	73.4 PK	74.0	-0.6	1.00 H	87	41.21	32.19
4	2483.50	49.3 AV	54.0	-4.7	1.00 H	87	17.11	32.19
5	4924.00	48.6 PK	74.0	-25.4	1.00 H	283	7.12	41.48
6	4924.00	37.2 AV	54.0	-16.8	1.00 H	283	-4.28	41.48
7	7386.00	54.0 PK	74.0	-20.0	1.10 H	296	8.09	45.91
8	7386.00	43.4 AV	54.0	-10.6	1.10 H	296	-2.51	45.91

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.3 PK			1.03 V	88	70.18	32.12
2	*2462.00	91.2 AV			1.03 V	88	59.08	32.12
3	2483.50	62.3 PK	74.0	-11.7	1.08 V	108	30.11	32.19
4	2483.50	44.6 AV	54.0	-9.4	1.08 V	108	12.41	32.19
5	4924.00	52.4 PK	74.0	-21.6	1.01 V	277	10.92	41.48
6	4924.00	41.9 AV	54.0	-12.1	1.01 V	277	0.42	41.48
7	7386.00	54.9 PK	74.0	-19.1	1.21 V	167	8.99	45.91
8	7386.00	44.1 AV	54.0	-9.9	1.21 V	167	-1.81	45.91

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.



A D T

802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2240.00	60.3 PK	74.0	-13.7	1.00 H	81	28.86	31.44
2	2240.00	52.1 AV	54.0	-1.9	1.00 H	81	20.66	31.44
3	<b>2390.00</b>	<b>73.5 PK</b>	<b>74.0</b>	<b>-0.5</b>	<b>1.00 H</b>	<b>64</b>	<b>41.62</b>	<b>31.88</b>
4	<b>2390.00</b>	<b>53.5 AV</b>	<b>54.0</b>	<b>-0.5</b>	<b>1.00 H</b>	<b>64</b>	<b>21.62</b>	<b>31.88</b>
5	*2412.00	111.3 PK			1.00 H	72	79.35	31.95
6	*2412.00	101.0 AV			1.00 H	72	69.05	31.95
7	4824.00	48.6 PK	74.0	-25.4	1.05 H	273	7.38	41.22
8	4824.00	37.2 AV	54.0	-16.8	1.05 H	273	-4.02	41.22

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.12 V	246	27.22	31.88
2	2390.00	46.1 AV	54.0	-7.9	1.12 V	246	14.22	31.88
3	*2412.00	101.4 PK			1.11 V	92	69.45	31.95
4	*2412.00	89.9 AV			1.11 V	92	57.95	31.95
5	4824.00	51.4 PK	74.0	-22.6	1.01 V	280	10.18	41.22
6	4824.00	39.5 AV	54.0	-14.5	1.01 V	280	-1.72	41.22

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	1.00 H	65	40.32	31.88
2	2390.00	49.3 AV	54.0	-4.7	1.00 H	65	17.42	31.88
3	*2437.00	111.8 PK			1.00 H	67	79.76	32.04
4	*2437.00	101.4 AV			1.00 H	67	69.36	32.04
5	4874.00	50.1 PK	74.0	-23.9	1.00 H	305	8.74	41.36
6	4874.00	38.4 AV	54.0	-15.6	1.00 H	305	-2.96	41.36
7	7311.00	54.0 PK	74.0	-20.0	1.11 H	295	8.33	45.67
8	7311.00	43.5 AV	54.0	-10.5	1.11 H	295	-2.17	45.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.7 PK			1.13 V	208	72.66	32.04
2	*2437.00	93.0 AV			1.13 V	208	60.96	32.04
3	4874.00	52.8 PK	74.0	-21.2	1.01 V	270	11.44	41.36
4	4874.00	42.6 AV	54.0	-11.4	1.01 V	270	1.24	41.36
5	7311.00	54.8 PK	74.0	-19.2	1.12 V	188	9.13	45.67
6	7311.00	43.6 AV	54.0	-10.4	1.12 V	188	-2.07	45.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2240.00	60.4 PK	74.0	-13.6	1.00 H	79	28.96	31.44
2	2240.00	52.3 AV	54.0	-1.7	1.00 H	79	20.86	31.44
3	*2462.00	111.1 PK			1.00 H	107	78.98	32.12
4	*2462.00	100.0 AV			1.00 H	107	67.88	32.12
5	2483.50	73.4 PK	74.0	-0.6	1.00 H	107	41.21	32.19
6	2483.50	50.0 AV	54.0	-4.0	1.00 H	107	17.81	32.19
7	4924.00	48.9 PK	74.0	-25.1	1.00 H	267	7.42	41.48
8	4924.00	37.5 AV	54.0	-16.5	1.00 H	267	-3.98	41.48
9	7386.00	54.3 PK	74.0	-19.7	1.06 H	292	8.39	45.91
10	7386.00	43.8 AV	54.0	-10.2	1.06 H	292	-2.11	45.91

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.2 PK			1.41 V	220	70.08	32.12
2	*2462.00	91.2 AV			1.41 V	220	59.08	32.12
3	2483.50	65.2 PK	74.0	-8.8	1.06 V	234	33.01	32.19
4	2483.50	44.8 AV	54.0	-9.2	1.06 V	234	12.61	32.19
5	4924.00	52.9 PK	74.0	-21.1	1.00 V	263	11.42	41.48
6	4924.00	42.4 AV	54.0	-11.6	1.00 V	263	0.92	41.48
7	7386.00	54.4 PK	74.0	-19.6	1.25 V	163	8.49	45.91
8	7386.00	43.7 AV	54.0	-10.3	1.25 V	163	-2.21	45.91

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.



A D T

802.11n (40MHz)

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.8 PK	74.0	-5.2	1.00 H	75	36.92	31.88
2	2390.00	53.5 AV	54.0	-0.5	1.00 H	75	21.62	31.88
3	*2422.00	104.9 PK			1.00 H	67	72.90	31.98
4	*2422.00	95.7 AV			1.00 H	67	63.72	31.98
5	4844.00	49.2 PK	74.0	-24.8	1.06 H	257	7.92	41.28
6	4844.00	37.8 AV	54.0	-16.2	1.06 H	257	-3.48	41.28
7	7266.00	54.0 PK	74.0	-20.0	1.02 H	280	8.45	45.55
8	7266.00	43.4 AV	54.0	-10.6	1.02 H	280	-2.15	45.55

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	1.14 V	246	28.52	31.88
2	2390.00	46.2 AV	54.0	-7.8	1.14 V	246	14.32	31.88
3	*2422.00	95.3 PK			1.07 V	247	63.32	31.98
4	*2422.00	84.6 AV			1.07 V	247	52.62	31.98
5	4844.00	50.9 PK	74.0	-23.1	1.10 V	267	9.62	41.28
6	4844.00	40.3 AV	54.0	-13.7	1.10 V	267	-0.98	41.28
7	7266.00	54.6 PK	74.0	-19.4	1.22 V	159	9.05	45.55
8	7266.00	44.2 AV	54.0	-9.8	1.22 V	159	-1.35	45.55

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.



A D T

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.00 H	72	39.12	31.88
2	2390.00	52.6 AV	54.0	-1.4	1.00 H	72	20.72	31.88
3	*2437.00	100.9 PK			1.00 H	67	68.86	32.04
4	*2437.00	99.6 AV			1.00 H	67	67.56	32.04
5	2483.50	71.6 PK	74.0	-2.4	1.00 H	84	39.41	32.19
6	2483.50	47.7 AV	54.0	-6.3	1.00 H	84	15.51	32.19
7	4874.00	49.6 PK	74.0	-24.4	1.03 H	254	8.24	41.36
8	4874.00	38.0 AV	54.0	-16.0	1.03 H	254	-3.36	41.36
9	7311.00	53.5 PK	74.0	-20.5	1.00 H	275	7.83	45.67
10	7311.00	43.0 AV	54.0	-11.0	1.00 H	275	-2.67	45.67

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2437.00	100.4 PK			1.42 V	218	68.36	32.04
2	*2437.00	88.8 AV			1.42 V	218	56.76	32.04
3	4874.00	51.3 PK	74.0	-22.7	1.00 V	273	9.94	41.36
4	4874.00	40.8 AV	54.0	-13.2	1.00 V	273	-0.56	41.36
5	7311.00	54.4 PK	74.0	-19.6	1.21 V	153	8.73	45.67
6	7311.00	43.9 AV	54.0	-10.1	1.21 V	153	-1.77	45.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.





A D T

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2452.00	107.4 PK			1.00 H	68	75.31	32.09
2	*2452.00	97.9 AV			1.00 H	68	65.81	32.09
3	2483.50	69.4 PK	74.0	-4.6	1.00 H	69	37.21	32.19
4	2483.50	53.1 AV	54.0	-0.9	1.00 H	69	20.91	32.19
5	4904.00	49.7 PK	74.0	-24.3	1.00 H	239	8.26	41.44
6	4904.00	38.0 AV	54.0	-16.0	1.00 H	239	-3.44	41.44
7	7356.00	53.6 PK	74.0	-20.4	1.00 H	270	7.79	45.81
8	7356.00	43.0 AV	54.0	-11.0	1.00 H	270	-2.81	45.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2452.00	99.4 PK			1.42 V	219	67.31	32.09
2	*2452.00	88.1 AV			1.42 V	219	56.01	32.09
3	2483.50	67.1 PK	74.0	-6.9	1.41 V	235	34.91	32.19
4	2483.50	45.5 AV	54.0	-8.5	1.41 V	235	13.31	32.19
5	4904.00	51.0 PK	74.0	-23.0	1.04 V	277	9.56	41.44
6	4904.00	40.9 AV	54.0	-13.1	1.04 V	277	-0.54	41.44
7	7356.00	54.7 PK	74.0	-19.3	1.17 V	147	8.89	45.81
8	7356.00	44.2 AV	54.0	-9.8	1.17 V	147	-1.61	45.81

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 17, 2012


#### 4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

### 4.3.7 TEST RESULTS

#### 802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.38	10.81	0.5	PASS
6	2437	10.71	10.51	0.5	PASS
11	2462	10.51	10.80	0.5	PASS

#### 802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.43	16.57	0.5	PASS
6	2437	16.53	16.55	0.5	PASS
11	2462	16.45	16.56	0.5	PASS

#### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.76	17.83	0.5	PASS
6	2437	17.77	17.85	0.5	PASS
11	2462	17.70	17.79	0.5	PASS

#### 802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.72	36.89	0.5	PASS
6	2437	36.70	36.70	0.5	PASS
9	2452	37.03	36.62	0.5	PASS



A D T

#### 4.4 CONDUCTED OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

##### 4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 17, 2012


##### 4.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

##### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

##### 4.4.5 TEST SETUP

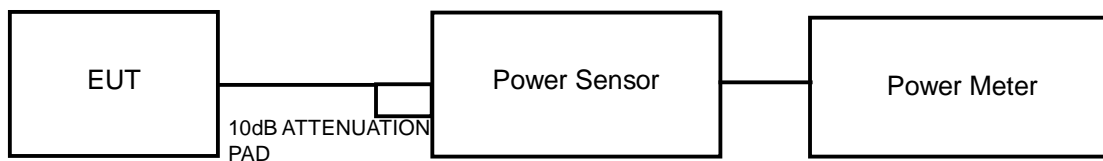

##### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

#### 4.4.7 TEST RESULTS

##### 802.11b

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.4	22.7	360.0	25.6	29.99	PASS
6	2437	21.9	22.5	332.7	25.2	29.99	PASS
11	2462	20.6	20.1	217.1	23.4	29.99	PASS

**Note:** Directional gain = gain of antenna element + 10 log (# of TX antenna elements)  
Effective Legacy Gain (dBi) = 6.01  
The effective legacy gain is 6.01dBi, therefore the limit needs to reduce.

##### 802.11g

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	23.2	23.5	432.8	26.4	29.99	PASS
6	2437	23.8	23.9	485.4	26.9	29.99	PASS
11	2462	23.1	23.2	413.1	26.2	29.99	PASS

**Note:** Directional gain = gain of antenna element + 10 log (# of TX antenna elements)  
Effective Legacy Gain (dBi) = 6.01  
The effective legacy gain is 6.01dBi, therefore the limit needs to reduce.

##### 802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	23.0	23.4	418.3	26.2	30	PASS
6	2437	23.8	23.9	485.4	26.9	30	PASS
11	2462	23.1	23.2	413.1	26.2	30	PASS



A D T

802.11n (40MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	22.9	23.1	399.2	26.0	30	PASS
6	2437	23.5	23.4	442.6	26.5	30	PASS
9	2452	22.9	23.0	394.5	26.0	30	PASS

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 17, 2012


### 4.5.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5.5 TEST SETUP



### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

## 4.5.7 TEST RESULTS

### 802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	10.8	-4.4	3.0	-1.4	7.99	PASS
	6	2437	9.1	-6.1	3.0	-3.1	7.99	PASS
	11	2462	8.1	-7.1	3.0	-4.1	7.99	PASS
1	1	2412	10.9	-4.3	3.0	-1.3	7.99	PASS
	6	2437	10.1	-5.2	3.0	-2.2	7.99	PASS
	11	2462	8.0	-7.2	3.0	-4.2	7.99	PASS

**Note:** Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi) = 6.01

The effective legacy gain is 6.01dBi, therefore the limit needs to reduce.

### 802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-0.9	-16.1	3.0	-13.1	7.99	PASS
	6	2437	3.4	-11.8	3.0	-8.8	7.99	PASS
	11	2462	-0.1	-15.4	3.0	-12.4	7.99	PASS
1	1	2412	1.1	-14.2	3.0	-11.2	7.99	PASS
	6	2437	4.7	-10.6	3.0	-7.6	7.99	PASS
	11	2462	0.6	-14.7	3.0	-11.7	7.99	PASS

**Note:** Directional gain = gain of antenna element + 10 log (# of TX antenna elements)

Effective Legacy Gain (dBi) = 6.01

The effective legacy gain is 6.01dBi, therefore the limit needs to reduce.

### 802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-1.9	-17.1	3.0	-14.1	8	PASS
	6	2437	2.9	-12.3	3.0	-9.3	8	PASS
	11	2462	-0.6	-15.8	3.0	-12.8	8	PASS
1	1	2412	-0.2	-15.5	3.0	-12.5	8	PASS
	6	2437	3.7	-11.6	3.0	-8.6	8	PASS
	11	2462	-0.3	-15.5	3.0	-12.5	8	PASS





A D T

### 802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-7.2	-22.4	3.0	-19.4	8	PASS
	6	2437	-2.9	-18.1	3.0	-15.1	8	PASS
	9	2452	-5.9	-21.1	3.0	-18.1	8	PASS
1	3	2422	-5.8	-21.0	3.0	-18.0	8	PASS
	6	2437	-1.7	-16.9	3.0	-13.9	8	PASS
	9	2452	-4.6	-19.8	3.0	-16.8	8	PASS

## 4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 16, 2012

### 4.6.3 TEST PROCEDURE

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.6.5 TEST SETUP



### 4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

### 4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit. Only worst data of each operating mode is presented.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T

### 802.11b



#### CH 1

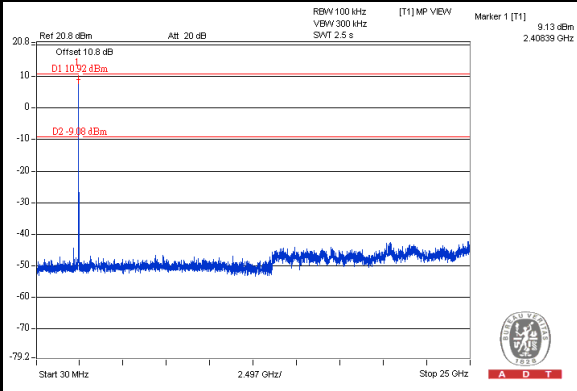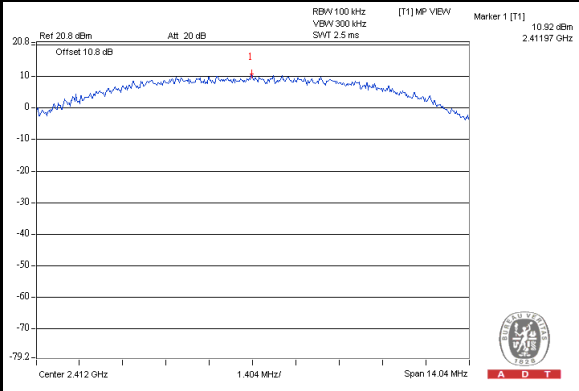

#### CH 6

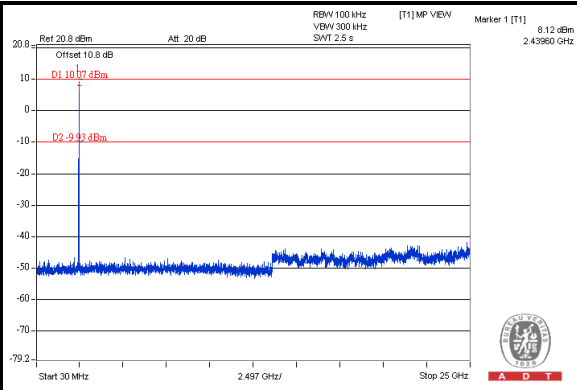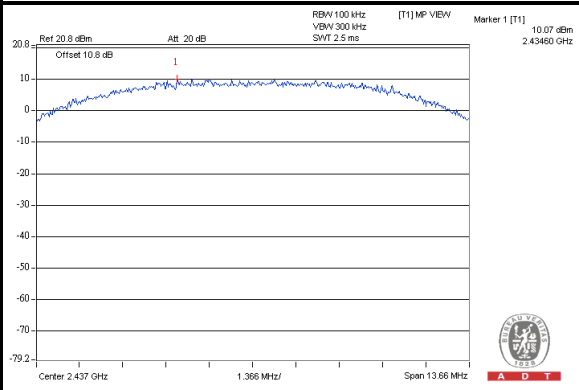

#### CH 11

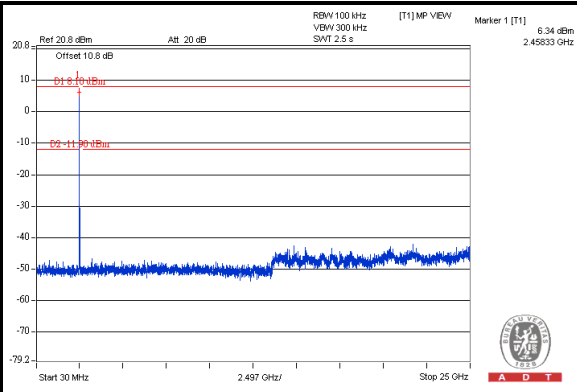
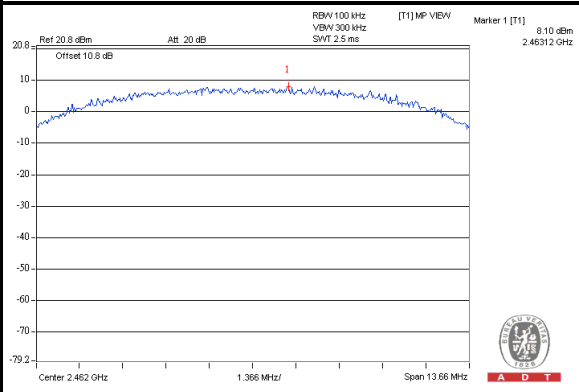






A D T

### 802.11g



#### CH 1

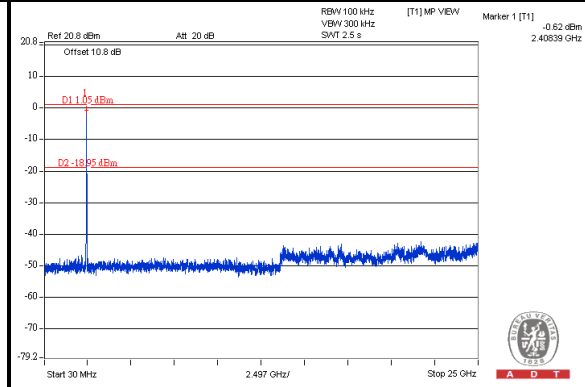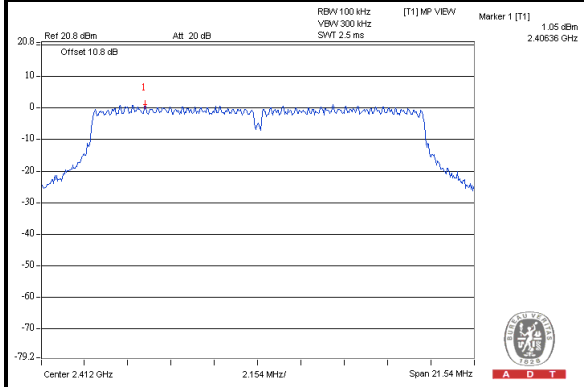

#### CH 6

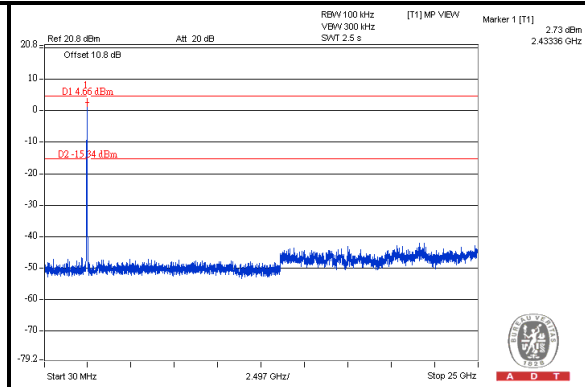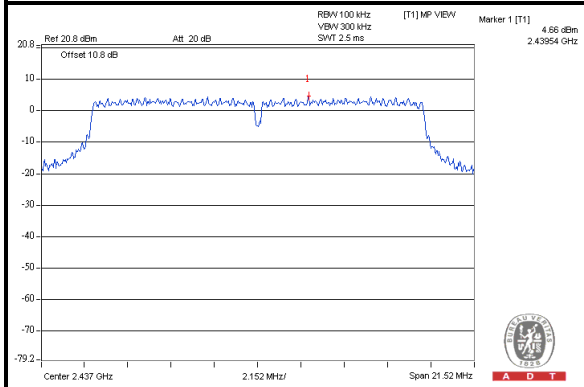

#### CH 11

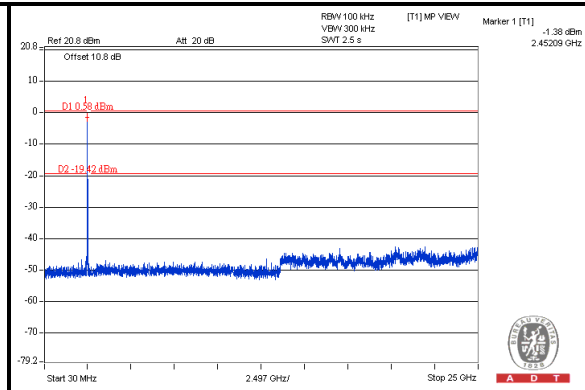
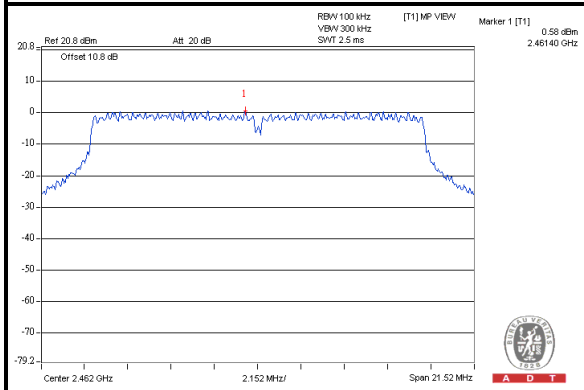






A D T

### 802.11n (20MHz)



#### CH 1

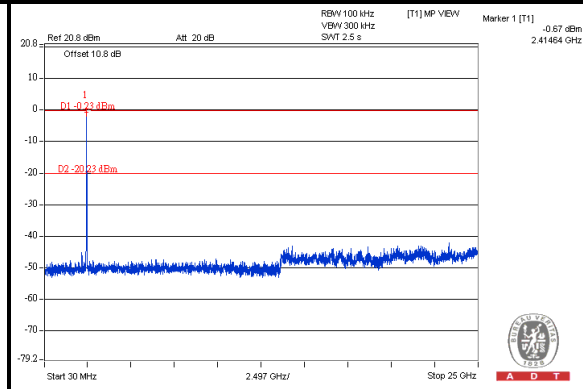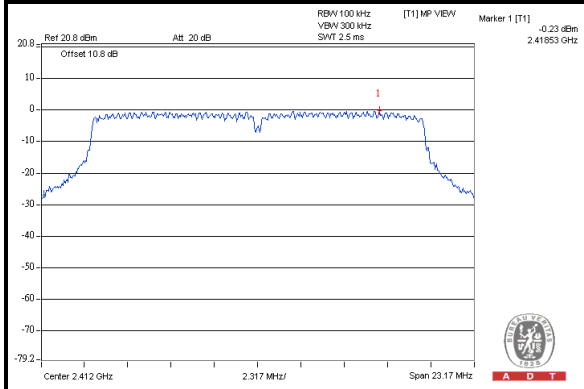

#### CH 6

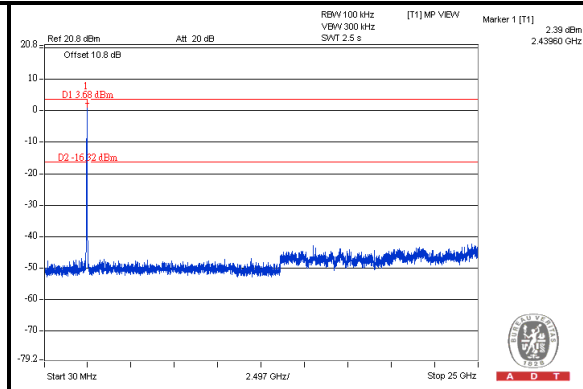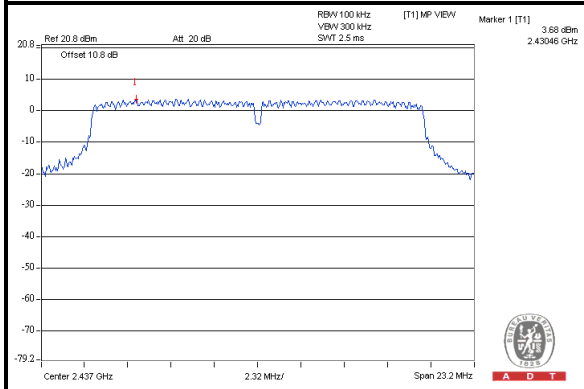

#### CH 11

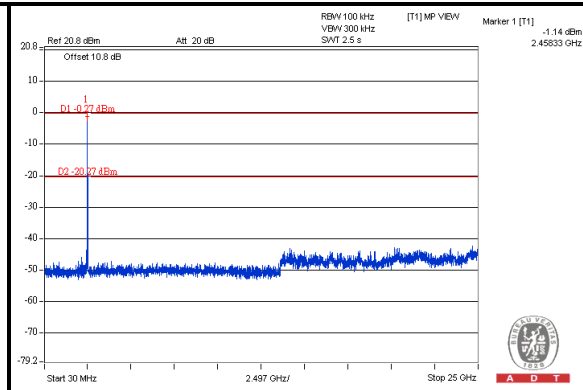
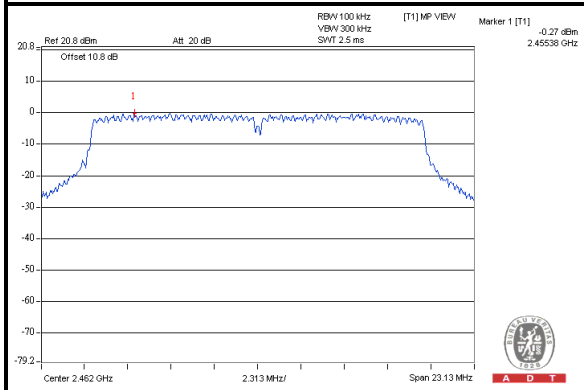






A D T

### 802.11n (40MHz)



#### CH 3

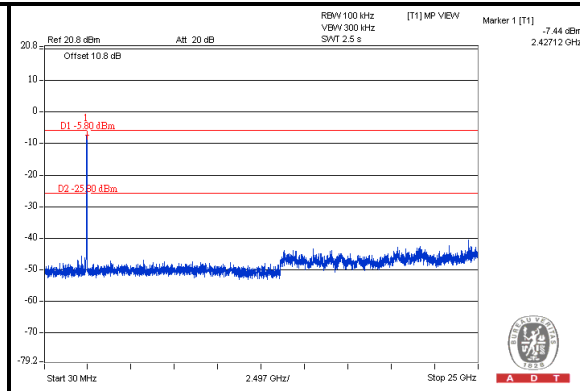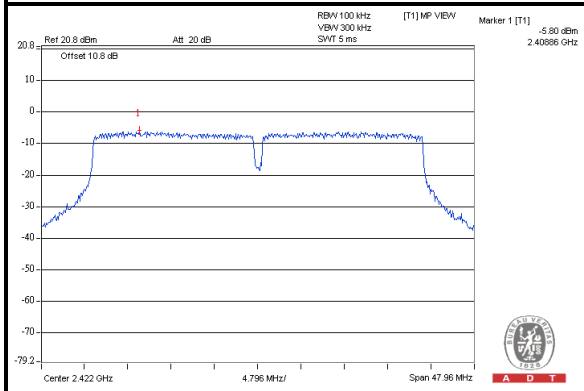

#### CH 6

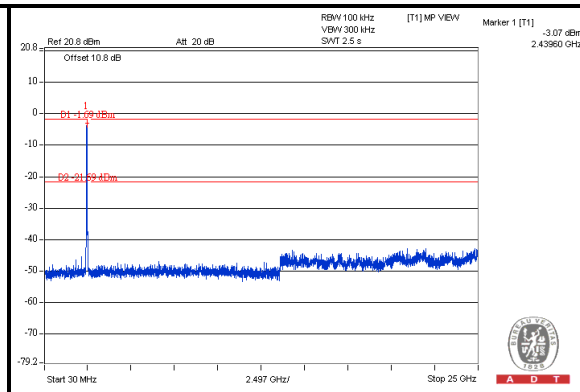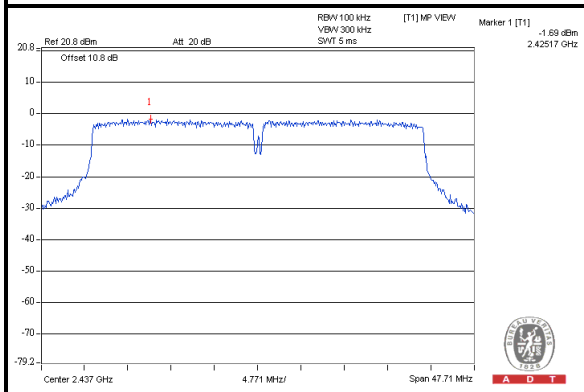

#### CH 9

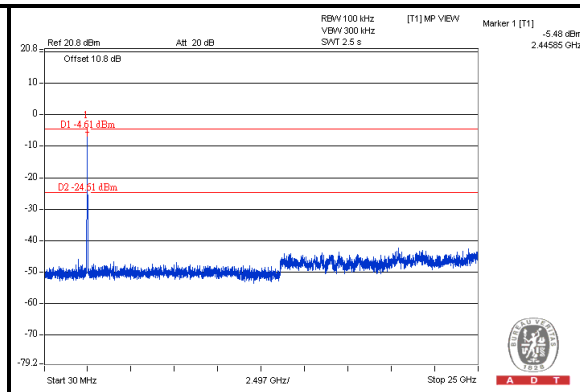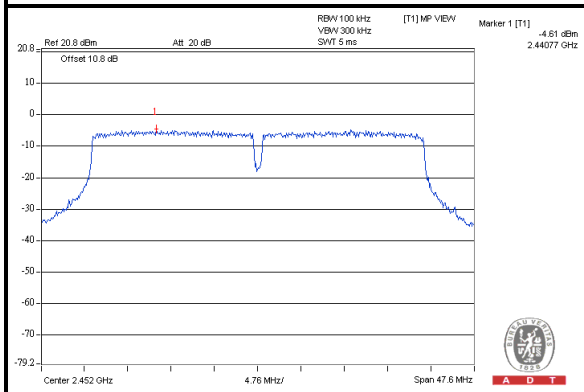



A D T

## 5. TEST TYPES AND RESULTS (FOR 5GHz, 5725~5850MHz Band)

### 5.1 CONDUCTED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2011	Mar. 08, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK8127	8127-522	Sep. 07, 2011	Sep. 06, 2012
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 02, 2011	Nov. 01, 2012
RF Cable (JYBAO)	5DFB	COCCAB-002	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Feb. 17, 2012





A D T


### 5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.1.5 TEST SETUP

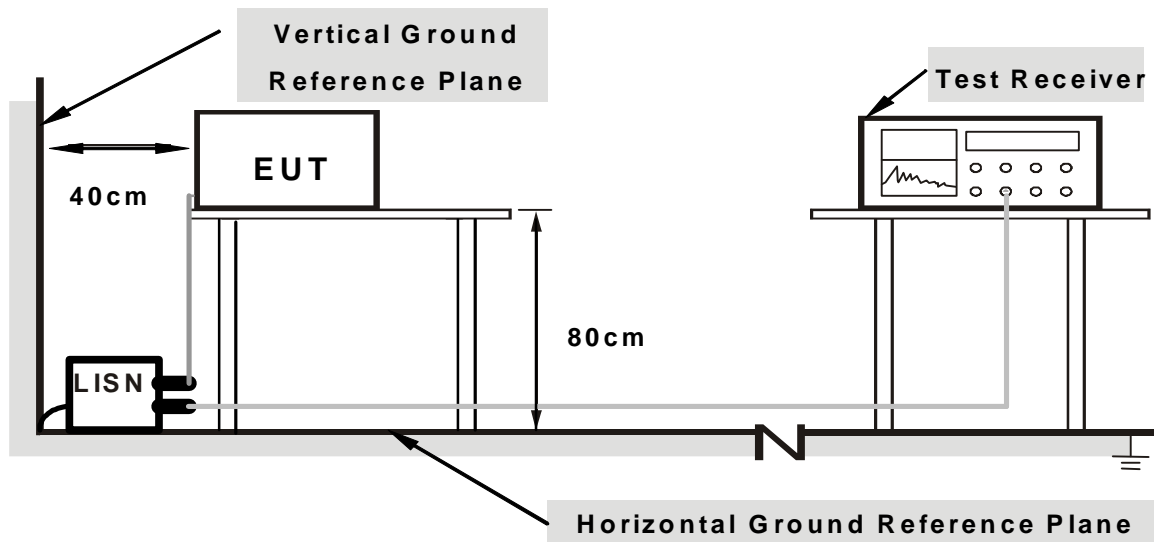

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 5.1.6 EUT OPERATING CONDITIONS


Same as the 4.1.6

### 5.1.7 TEST RESULTS

<b>PHASE</b>	Line (L)	<b>6dB BANDWIDTH</b>	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15322	0.09	44.68	31.92	44.77	32.01	65.82
2	0.18702	0.10	40.91	29.71	41.01	29.81	64.17	54.17	-23.15	-24.35
<b>3</b>	<b>0.37621</b>	<b>0.14</b>	<b>33.77</b>	<b>27.32</b>	<b>33.91</b>	<b>27.46</b>	<b>58.36</b>	<b>48.36</b>	<b>-24.46</b>	<b>-20.91</b>
4	0.94840	0.19	27.99	22.16	28.18	22.35	56.00	46.00	-27.82	-23.65
5	4.91189	0.45	27.52	21.23	27.97	21.68	56.00	46.00	-28.03	-24.32
6	10.07200	0.72	25.99	20.75	26.71	21.47	60.00	50.00	-33.29	-28.53

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

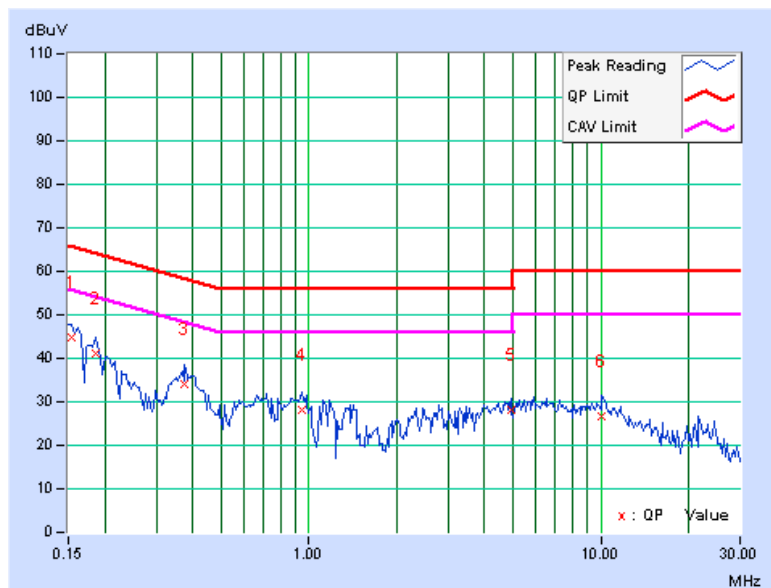




A D T

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16202	0.08	43.58	32.65	43.66	32.73	65.36	55.36	-21.70	-22.63
2	0.18899	0.09	40.55	28.45	40.64	28.54	64.08	54.08	-23.44	-25.54
3	0.39685	0.13	34.35	27.25	34.48	27.38	57.92	47.92	-23.44	-20.54
4	1.65254	0.18	28.22	22.65	28.40	22.83	56.00	46.00	-27.60	-23.17
5	3.87154	0.30	29.86	22.51	30.16	22.81	56.00	46.00	-25.84	-23.19
6	9.12875	0.55	25.92	22.36	26.47	22.91	60.00	50.00	-33.53	-27.09

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

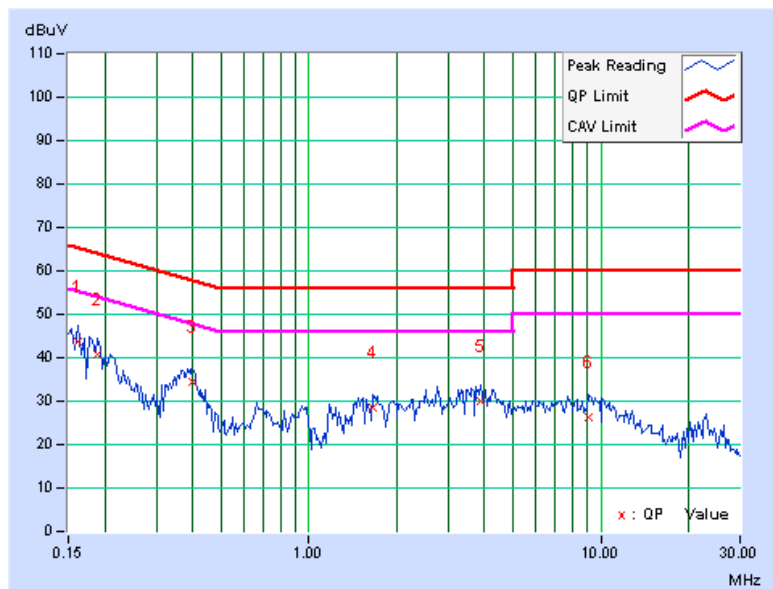

## 5.2 RADIATED AND BANDEDGE EMISSION MEASUREMENT

### 5.2.1 LIMITS OF RADIATED AND BANDEDGE EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

## 5.2.2 TEST INSTRUMENTS

### For below 1GHz

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
 3. The test was performed in 966 Chamber No. G.  
 4. The FCC Site Registration No. is 966073.  
 5. The VCCI Site Registration No. is G-137.  
 6. The CANADA Site Registration No. is IC 7450H-2.  
 7. Tested Date: Feb. 15, 2012



A D T

**For above 1GHz**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 28, 2011	Feb. 27, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
3. The test was performed in 966 Chamber No. H.  
4. The FCC Site Registration No. is 797305.  
5. The CANADA Site Registration No. is IC 7450H-3.  
6. Tested Date: Feb. 17, 2012

### 5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation



## 5.2.5 TEST SETUP

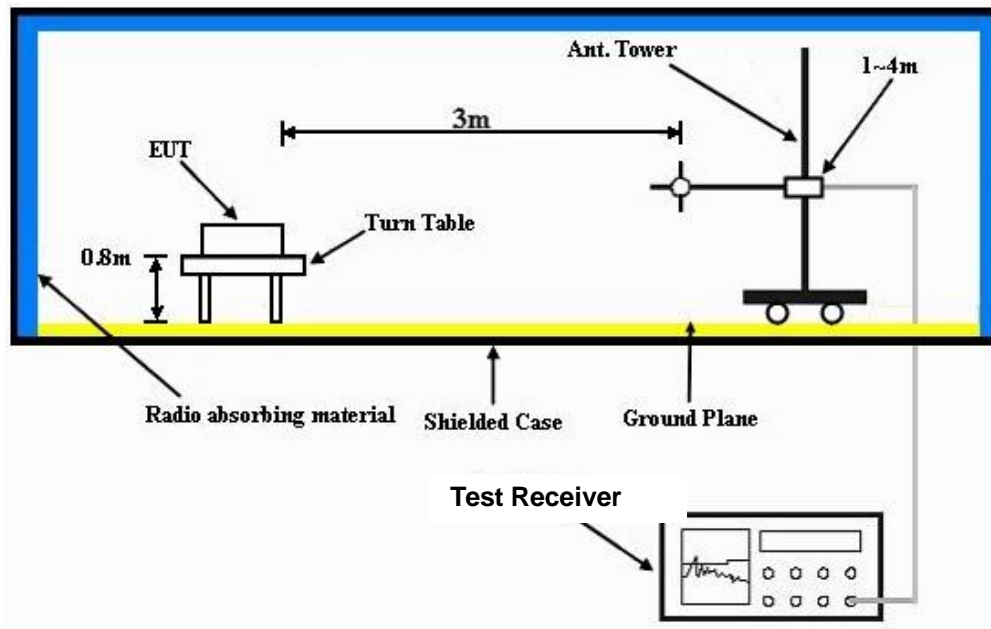

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 5.2.6 EUT OPERATING CONDITIONS

Same as the 4.2.6



A D T

### 5.2.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA

#### 802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	117.04	26.6 QP	43.5	-16.9	2.00 H	251	14.46	12.12
2	250.03	22.2 QP	46.0	-23.9	1.50 H	84	8.80	13.35
3	374.97	32.6 QP	46.0	-13.4	1.00 H	5	15.34	17.28
4	500.02	25.0 QP	46.0	-21.0	1.50 H	335	4.66	20.31
5	562.55	23.9 QP	46.0	-22.1	1.50 H	0	2.17	21.76
6	720.05	33.5 QP	46.0	-12.5	1.00 H	360	9.90	23.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	65.76	28.2 QP	40.0	-11.8	1.00 V	167	15.16	13.01
2	122.37	33.5 QP	43.5	-10.0	1.00 V	360	20.70	12.78
3	374.97	30.5 QP	46.0	-15.5	1.50 V	7	13.21	17.28
4	500.02	28.1 QP	46.0	-17.9	1.00 V	0	7.79	20.31
5	624.96	24.2 QP	46.0	-21.8	1.00 V	14	1.56	22.68
6	719.93	29.8 QP	46.0	-16.3	1.50 V	295	6.15	23.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

802.11a

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5000.00	60.4 PK	74.0	-13.6	1.21 H	254	18.77	41.63
2	5000.00	50.4 AV	54.0	-3.6	1.21 H	254	8.77	41.63
3	5440.00	60.1 PK	74.0	-13.9	1.00 H	115	17.89	42.21
4	5440.00	51.5 AV	54.0	-2.5	1.00 H	115	9.29	42.21
5	*5745.00	113.6 PK			1.50 H	150	70.90	42.70
6	*5745.00	103.5 AV			1.50 H	150	60.80	42.70
7	11490.00	57.2 PK	74.0	-16.8	1.46 H	151	7.89	49.31
8	11490.00	46.4 AV	54.0	-7.6	1.46 H	151	-2.91	49.31

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	108.5 PK			1.01 V	55	65.80	42.70
2	*5745.00	97.8 AV			1.01 V	55	55.10	42.70
3	11490.00	56.2 PK	74.0	-17.8	1.00 V	67	6.89	49.31
4	11490.00	45.3 AV	54.0	-8.7	1.00 V	67	-4.01	49.31

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.



A D T

<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5000.00	60.2 PK	74.0	-13.8	1.29 H	252	18.57	41.63
2	5000.00	50.8 AV	54.0	-3.2	1.29 H	252	9.17	41.63
3	5440.00	60.4 PK	74.0	-13.6	1.00 H	112	18.19	42.21
4	5440.00	51.6 AV	54.0	-2.4	1.00 H	112	9.39	42.21
5	*5785.00	113.2 PK			1.44 H	176	70.44	42.76
6	*5785.00	103.0 AV			1.44 H	176	60.24	42.76
7	11570.00	57.1 PK	74.0	-16.9	1.41 H	153	7.72	49.38
8	11570.00	46.2 AV	54.0	-7.8	1.41 H	153	-3.18	49.38

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	107.4 PK			1.07 V	51	64.64	42.76
2	*5785.00	96.7 AV			1.07 V	51	53.94	42.76
3	11570.00	56.4 PK	74.0	-17.6	1.00 V	53	7.02	49.38
4	11570.00	45.6 AV	54.0	-8.4	1.00 V	53	-3.78	49.38

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.



A D T

<b>CHANNEL</b>	TX Channel 165	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5000.00	59.8 PK	74.0	-14.2	1.28 H	251	18.17	41.63
2	5000.00	50.5 AV	54.0	-3.5	1.28 H	251	8.87	41.63
3	5360.00	60.0 PK	74.0	-14.0	1.00 H	112	17.89	42.11
4	<b>5360.00</b>	<b>51.7 AV</b>	<b>54.0</b>	<b>-2.3</b>	<b>1.00 H</b>	<b>112</b>	<b>9.59</b>	<b>42.11</b>
5	*5825.00	112.6 PK			1.36 H	177	69.78	42.82
6	*5825.00	102.1 AV			1.36 H	177	59.28	42.82
7	11650.00	57.3 PK	74.0	-16.7	1.45 H	169	7.95	49.35
8	11650.00	46.4 AV	54.0	-7.6	1.45 H	169	-2.95	49.35

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	106.6 PK			1.03 V	52	63.78	42.82
2	*5825.00	96.5 AV			1.03 V	52	53.68	42.82
3	11650.00	56.3 PK	74.0	-17.7	1.00 V	69	6.95	49.35
4	11650.00	45.2 AV	54.0	-8.8	1.00 V	69	-4.15	49.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.



A D T

802.11n (20MHz)

<b>CHANNEL</b>	TX Channel 149	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5000.00	59.6 PK	74.0	-14.4	1.36 H	251	17.97	41.63
2	5000.00	49.6 AV	54.0	-4.4	1.36 H	251	7.97	41.63
3	5440.00	61.0 PK	74.0	-13.0	1.00 H	115	18.79	42.21
4	5440.00	51.3 AV	54.0	-2.7	1.00 H	115	9.09	42.21
5	*5745.00	113.6 PK			1.45 H	156	70.90	42.70
6	*5745.00	103.5 AV			1.45 H	156	60.80	42.70
7	11490.00	57.1 PK	74.0	-16.9	1.43 H	155	7.79	49.31
8	11490.00	45.2 AV	54.0	-8.8	1.43 H	155	-4.11	49.31

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5745.00	108.1 PK			1.00 V	59	65.40	42.70
2	*5745.00	97.7 AV			1.00 V	59	55.00	42.70
3	11490.00	56.5 PK	74.0	-17.5	1.00 V	45	7.19	49.31
4	11490.00	45.4 AV	54.0	-8.6	1.00 V	45	-3.91	49.31

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.



A D T

<b>CHANNEL</b>	TX Channel 157	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5000.00	60.2 PK	74.0	-13.8	1.31 H	254	18.57	41.63
2	5000.00	49.8 AV	54.0	-4.2	1.31 H	254	8.17	41.63
3	5440.00	62.0 PK	74.0	-12.0	1.00 H	116	19.79	42.21
4	5440.00	51.6 AV	54.0	-2.4	1.00 H	116	9.39	42.21
5	*5785.00	112.6 PK			1.40 H	165	69.84	42.76
6	*5785.00	102.7 AV			1.40 H	165	59.94	42.76
7	11570.00	57.9 PK	74.0	-16.1	1.41 H	146	8.52	49.38
8	11570.00	46.3 AV	54.0	-7.7	1.41 H	146	-3.08	49.38

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	107.3 PK			1.02 V	58	64.54	42.76
2	*5785.00	96.8 AV			1.02 V	58	54.04	42.76
3	11570.00	56.4 PK	74.0	-17.6	1.00 V	44	7.02	49.38
4	11570.00	45.2 AV	54.0	-8.8	1.00 V	44	-4.18	49.38

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.



A D T

<b>CHANNEL</b>	TX Channel 165	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5000.00	60.4 PK	74.0	-13.6	1.34 H	251	18.77	41.63
2	5000.00	50.6 AV	54.0	-3.4	1.34 H	251	8.97	41.63
3	5440.00	60.7 PK	74.0	-13.3	1.00 H	112	18.49	42.21
4	5440.00	50.4 AV	54.0	-3.6	1.00 H	112	8.19	42.21
5	*5825.00	112.5 PK			1.40 H	175	69.68	42.82
6	*5825.00	102.3 AV			1.40 H	175	59.48	42.82
7	11650.00	57.8 PK	74.0	-16.2	1.45 H	147	8.45	49.35
8	11650.00	46.0 AV	54.0	-8.0	1.45 H	147	-3.35	49.35

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	106.5 PK			1.01 V	62	63.68	42.82
2	*5825.00	96.4 AV			1.01 V	62	53.58	42.82
3	11650.00	56.7 PK	74.0	-17.3	1.00 V	23	7.35	49.35
4	11650.00	45.3 AV	54.0	-8.7	1.00 V	23	-4.05	49.35

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.





A D T

802.11n (40MHz)

<b>CHANNEL</b>	TX Channel 151	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5000.00	60.3 PK	74.0	-13.7	1.00 H	250	18.67	41.63
2	5000.00	50.4 AV	54.0	-3.6	1.00 H	250	8.77	41.63
3	5440.00	60.4 PK	74.0	-13.6	1.00 H	112	18.19	42.21
4	5440.00	51.3 AV	54.0	-2.7	1.00 H	112	9.09	42.21
5	*5755.00	110.2 PK			1.46 H	158	67.48	42.72
6	*5755.00	100.1 AV			1.46 H	158	57.38	42.72
7	11510.00	57.1 PK	74.0	-16.9	1.41 H	122	7.77	49.33
8	11510.00	46.2 AV	54.0	-7.8	1.41 H	122	-3.13	49.33

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5755.00	106.9 PK			1.00 V	64	64.18	42.72
2	*5755.00	96.0 AV			1.00 V	64	53.28	42.72
3	11510.00	56.9 PK	74.0	-17.1	1.00 V	43	7.57	49.33
4	11510.00	45.5 AV	54.0	-8.5	1.00 V	43	-3.83	49.33

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.



A D T

<b>CHANNEL</b>	TX Channel 159	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5000.00	59.6 PK	74.0	-14.4	1.01 H	239	17.97	41.63
2	5000.00	49.8 AV	54.0	-4.2	1.01 H	239	8.17	41.63
3	5440.00	60.7 PK	74.0	-13.3	1.00 H	113	18.49	42.21
4	5440.00	51.4 AV	54.0	-2.6	1.00 H	113	9.19	42.21
5	*5795.00	109.6 PK			1.45 H	155	66.83	42.77
6	*5795.00	99.2 AV			1.45 H	155	56.43	42.77
7	11590.00	57.3 PK	74.0	-16.7	1.45 H	131	7.91	49.39
8	11590.00	46.1 AV	54.0	-7.9	1.45 H	131	-3.29	49.39

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	105.6 PK			1.00 V	62	62.83	42.77
2	*5795.00	95.0 AV			1.00 V	62	52.23	42.77
3	11590.00	57.2 PK	74.0	-16.8	1.00 V	37	7.81	49.39
4	11590.00	45.7 AV	54.0	-8.3	1.00 V	37	-3.69	49.39

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* ": Fundamental frequency.
  6. The limit value is defined as per 15.247.

### 5.3 6dB BANDWIDTH MEASUREMENT

#### 5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 17, 2012


#### 5.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 5.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.3.5 TEST SETUP



#### 5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

### 5.3.7 TEST RESULTS

#### 802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.56	16.59	0.5	PASS
157	5785	16.54	16.57	0.5	PASS
165	5825	16.60	16.62	0.5	PASS

#### 802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.71	17.84	0.5	PASS
157	5785	17.90	17.88	0.5	PASS
165	5825	17.84	17.90	0.5	PASS

#### 802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	37.30	37.39	0.5	PASS
159	5795	37.00	37.06	0.5	PASS



A D T

## 5.4 CONDUCTED OUTPUT POWER

### 5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz band: 1 Watt (30dBm)

### 5.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 17, 2012


### 5.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.4.5 TEST SETUP

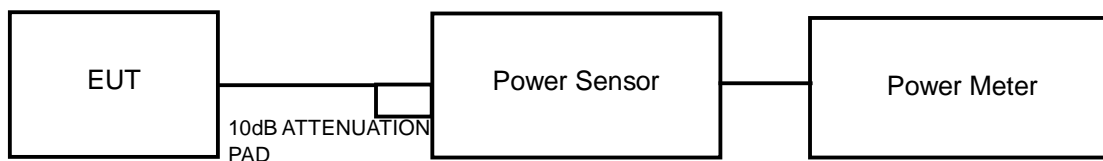

### 5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

## 5.4.7 TEST RESULTS

### 802.11a

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	23.9	23.8	485.4	26.9	27.99	PASS
157	5785	24.0	23.7	485.6	26.9	27.99	PASS
165	5825	23.8	23.5	463.8	26.7	27.99	PASS

**Note:** Directional gain = gain of antenna element + 10 log (# of TX antenna elements)  
 Effective Legacy Gain (dBi) = 8.01  
 The effective legacy gain is 8.01dBi, therefore the limit needs to reduce.

### 802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	25.6	26.3	789.7	29.0	30	PASS
157	5785	25.4	26.1	754.1	28.8	30	PASS
165	5825	25.2	25.8	711.3	28.5	30	PASS

### 802.11n (40MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	25.5	26.1	762.2	28.8	30	PASS
159	5795	25.3	26.0	737.0	28.7	30	PASS

## 5.5 POWER SPECTRAL DENSITY MEASUREMENT

### 5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 17, 2012


### 5.5.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.5.5 TEST SETUP



### 5.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

## 5.5.7 TEST RESULTS

### 802.11a

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	3.3	-11.9	3.0	-8.9	5.99	PASS
	157	5785	1.8	-13.5	3.0	-10.5	5.99	PASS
	165	5825	1.6	-13.6	3.0	-10.6	5.99	PASS
1	149	5745	3.1	-12.1	3.0	-9.1	5.99	PASS
	157	5785	2.9	-12.4	3.0	-9.4	5.99	PASS
	165	5825	2.0	-13.2	3.0	-10.2	5.99	PASS

**Note:** Directional gain = gain of antenna element + 10 log (# of TX antenna elements)  
 Effective Legacy Gain (dBi) = 8.01  
 The effective legacy gain is 8.01dBi, therefore the limit needs to reduce.

### 802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	7.6	-7.6	3.0	-4.6	8	PASS
	157	5785	5.4	-9.8	3.0	-6.8	8	PASS
	165	5825	5.0	-10.2	3.0	-7.2	8	PASS
1	149	5745	6.0	-9.2	3.0	-6.2	8	PASS
	157	5785	4.9	-10.3	3.0	-7.3	8	PASS
	165	5825	3.9	-11.3	3.0	-8.3	8	PASS

### 802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	3.1	-12.1	3.0	-9.1	8	PASS
	159	5795	3.2	-12.0	3.0	-9.0	8	PASS
1	151	5755	3.1	-12.1	3.0	-9.1	8	PASS
	159	5795	2.1	-13.2	3.0	-10.2	8	PASS





A D T

## 5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 17, 2012

### 5.6.3 TEST PROCEDURE

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

### 5.6.6 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding  $10\log(N)$  since the limit is relative emission limit. Only worst data of each operating mode is presented.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T

802.11a



### CH 149

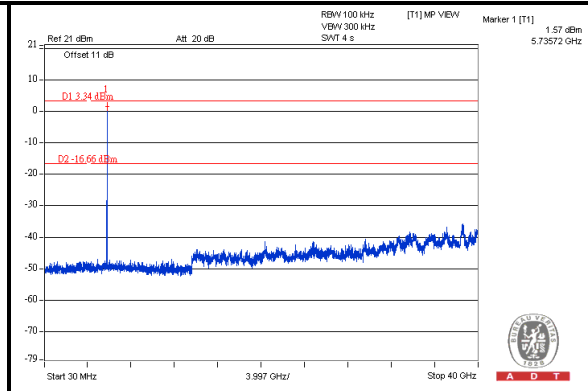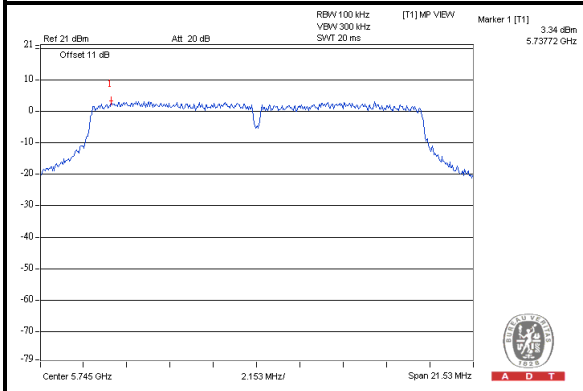

### CH 157

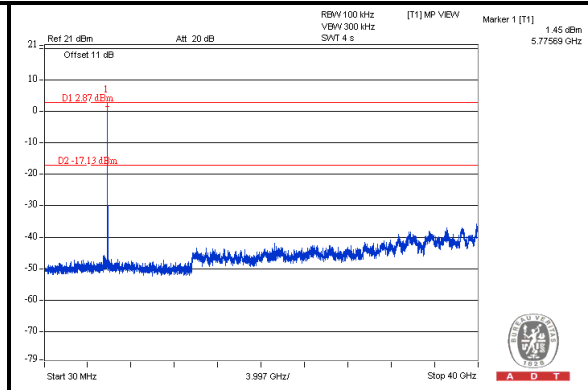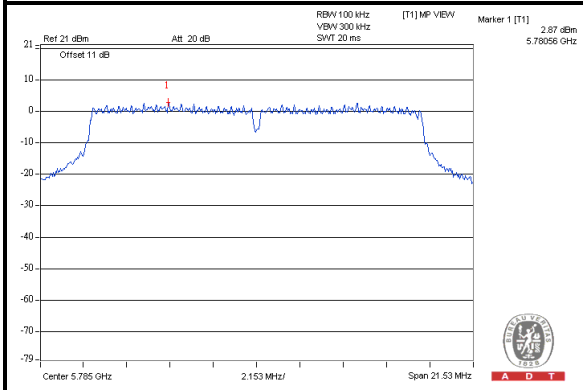

### CH 165

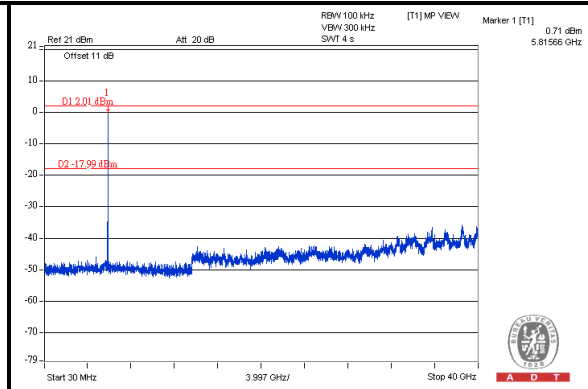
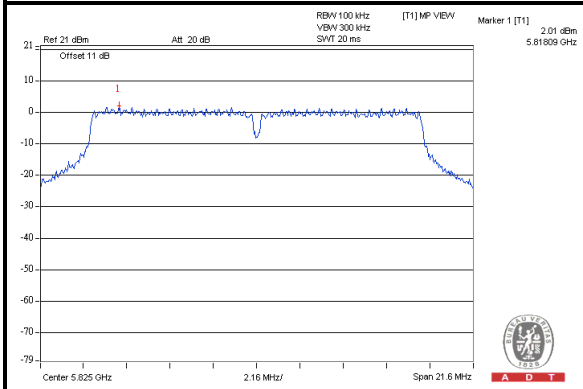






A D T

### 802.11n (20MHz)



#### CH 149

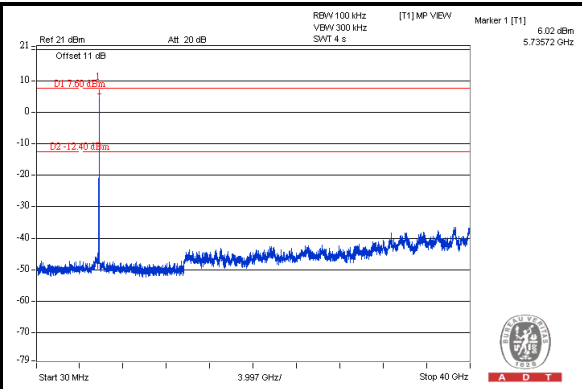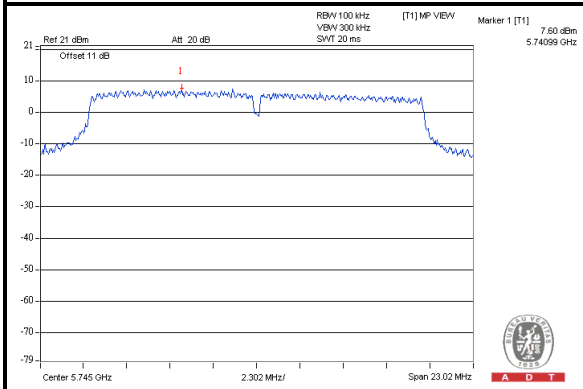

#### CH 157

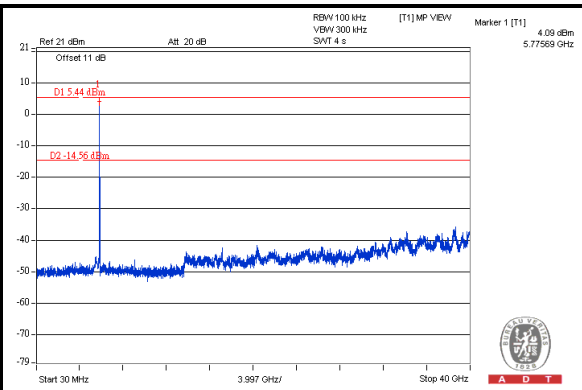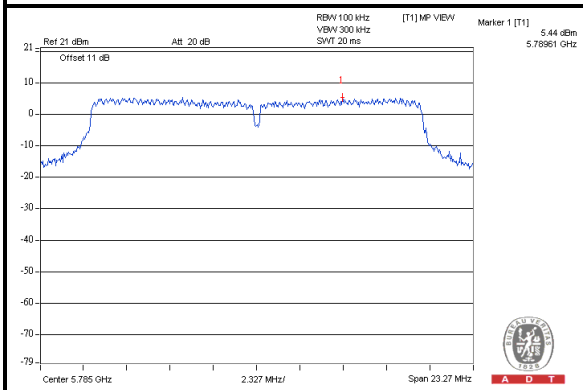

#### CH 165

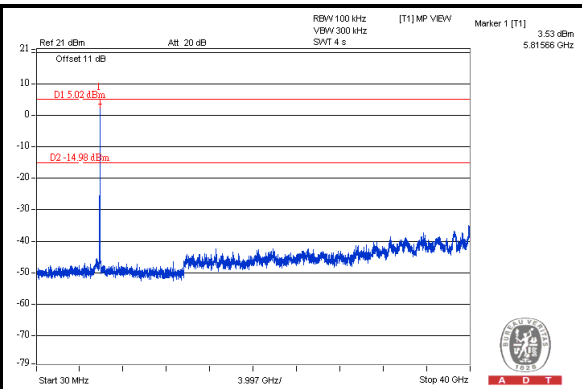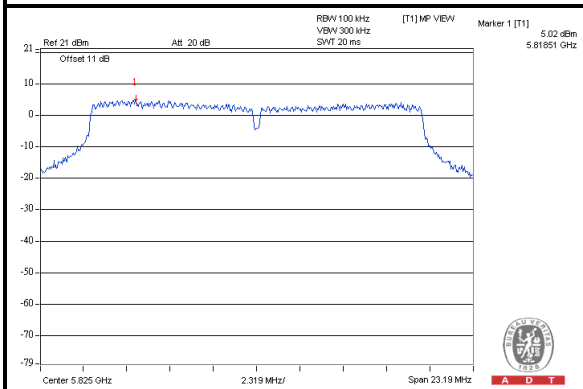





A D T

### 802.11n (40MHz)

#### CH 151

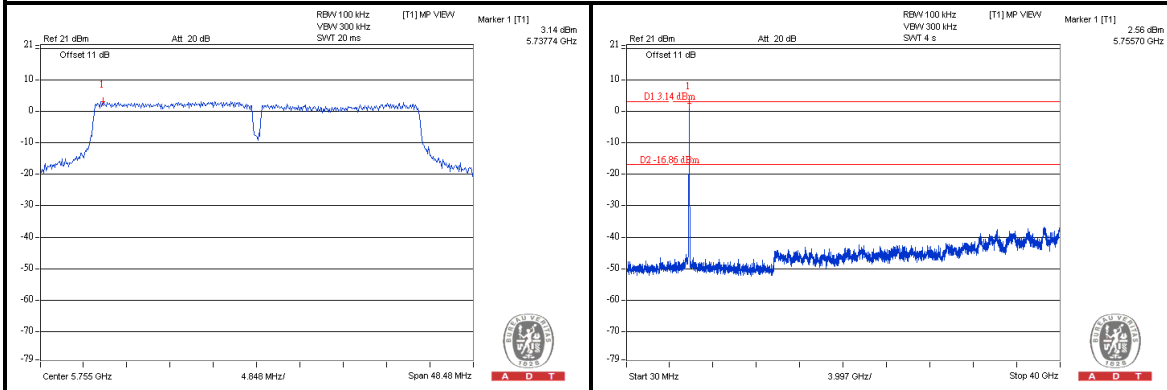

#### CH 159

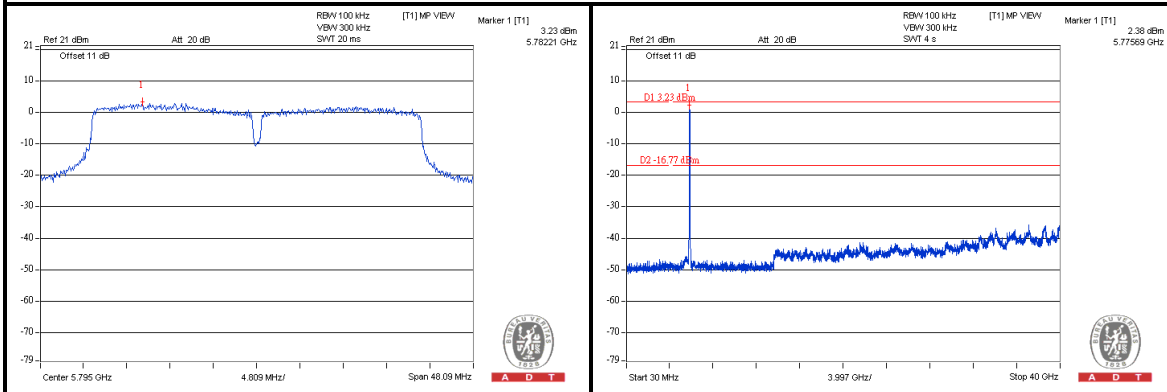



A D T

## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5.phtml](http://www.adt.com.tw/index.5.phtml).

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



A D T

## **8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**--- END ---**