

# TEST REPORT



Certification # 1367-01

Laboratory ID

PRODUCT SAFETY ENGINEERING, INC.  
12955 Bellamy Brothers Boulevard  
Dade City, Florida 33525 USA  
PH (352) 588-2209 FX (352) 588-2544

Submitter ID

XM Radio  
7777 Glades Road  
Boca Raton, FL 33434

Report Issue Date: 03/27/2006

Sample Radio ID# GYPRCV\_P3

Sample Receipt Date: 02/07/2006

Sample Test Date: see data sheets

Test Report Number: 06F121B

Model Designation: Gypsy

Product Description: Satellite Radio Receiver  
and FM Transmitter

Marketing Approval \_\_\_\_\_

Description of non-standard test method or test practice: *None*

Estimated Measurement Uncertainty: *Not Applicable*

Special limitations of use: *None*

Traceability: *reference standards of measurement have been calibrated by a competent body using standards traceable to the NIST.*

According to testing performed at Product Safety Engineering, Inc., the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in regulations indicated on page (3) of the test report. The test results contained herein relate only to the model(s) identified above. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Project Engineer, I hereby declare that the equipment tested as specified above conforms to the requirements indicated on page (3) of the test report.

Signature  Name David Foerstner

Title Engineering Group Leader Date 03/27/2006

Reviewed by: Steven Hoke  
Approved Signatory  Date 03/27/2006

This report may only be reproduced in full with written permission from Product Safety Engineering, Inc.

Test Report Number 06F121B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

## DIRECTORY - EMISSIONS

		Page(s)
<b>A) Documentation</b>		
Test report		1 - 10
Directory		2
Test Regulations		3
General Remarks		10
Test-setups (Photos)		11 - 12
<b>B) Test data</b>		
Conducted emissions	10/150 kHz - 30 MHz	5, 9
Radiated emissions	10 kHz - 30 MHz	5, 9
Radiated emissions	30 MHz - 1000 MHz	6, 9
Interference power	30 MHz - 300 MHz	6, 9
Equivalent Radiated emissions	1 GHz - 18 GHz	7, 9
Antenna Disturbance Voltage	30 MHz - 1,000 MHz	7,9
<b>C) Appendix A</b>		
Test Equipment Calibration Information		A2
Test Data Sheets		A3 - A8
<b>D) Appendix B</b>		
System Under Test Description		B2 - B4
<b>E) Appendix C</b>		
Measurement Protocol		C1 - C2

*Test Report Number 06F121B*

## EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- EN 61000-6-3:2001
- EN 61000-6-4:2001
  
- EN 55011 : 1998 / A1:1999
  - Group 1
  - Group 2
  - Class A
  - Class B
- EN 55013 : 1990 / A12:1994 / A13:1996 / A14:1999
  
- EN 55014 -1: 2001
  - Household appliances and similar
  - Portable tools
  - Semiconductor devices
  
- EN 55022 : 1998
  - Class A
  - Class B
- AS/NZS 3548:1995
  - Class A
  - Class B
- ICES-003
  - Class A
  - Class B
- CNS 13438
  - Class A
  - Class B
- VCCI : 1999
  - Class A
  - Class B
- FCC Part 15
  - Class A
  - Class B
  - Certification (Intentional Radiator portion only)
  - Verification
  - Declaration of Conformity
  
- FCC Part 15
  - Class A
  - Class B
  - Certification
  - Verification
  - Declaration of Conformity
  
- FCC Part 18

Test Report Number 06F121B

**Environmental conditions during testing:**

	LAB	OATS
Temperature: *	_____	: _____
Relative Humidity: **	_____	: _____

\* The ambient temperature during the testing was within the range of (50° - 104° F) unless indicted above.  
 \*\* The humidity levels during the testing was within the range of (10% - 90%) relative humidity unless indicated above.

Power supply system : 110 Volts 60 Hz SINGLE phase

**Sign Explanations:**

- not applicable
- applicable

**Product Description -**

This product has (2) variations as follows:

- 1) Home - AC powered with Home Antenna
- 2) Mobile - 12 DC powered with Mobile Antenna

The two versions were tested separately and the worst case configuration's data is included within the test report. The only version that connects to the mains is the home version. The mobile receives power from the car (12) volts.

All versions may have the output frequency set at any standard broadcast FM frequency between (88.1 - 107.9) MHz. The testing was completed while the output frequency was set to a low, medium and high operating frequency. While operating at each of these (3) frequencies, the spurious emissions were measured up to the (10 th) harmonic.

*Test Report Number 06F121B*

**Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)**

**The *CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)* measurements were performed at the following test location:**

- Test not applicable

- Darby Test Site (Open Area Test Site)
- Darby Laboratory

**Test equipment used :**

	<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>
<input checked="" type="checkbox"/>	8028-50	Solar	50 Ω LISN	829012, 829022
<input type="checkbox"/>	3825/2	Solar	50 Ω LISN	924840
<input checked="" type="checkbox"/>	EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/>	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/>	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/>	85662A	Hewlett Packard	Analyzer Display	2403A07352
<input type="checkbox"/>	8028-50	Solar	50 Ω LISN	903725, 903726
<input type="checkbox"/>	FCC-TLISN-T4	Fisher Custom Com.	Telecom ISN	20072

**Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)**

**The *RADIATED EMISSIONS (MAGNETIC FIELD)* measurements were performed at the following test location:**

- Darby Test Site (Open Area Test Site)
- 
- 

**at a test distance of :**

- 3 meters
- 30 meters

- Test not applicable

**Test equipment used :**

	<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>
<input type="checkbox"/>	96005	Eaton	Log Periodic Antenna	1099
<input type="checkbox"/>	BIA-25	Electro-Metrics	Biconical Antenna	4283
<input type="checkbox"/>	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/>	85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input type="checkbox"/>	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/>	ALR-30M	Electro-Metrics	Loop Antenna	824
<input type="checkbox"/>	8447D	Hewlett Packard	Preamplifier	2944A06832
<input type="checkbox"/>	EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/>	ALA-130/A	Antenna Research	Loop Antenna	106

Test Report Number 06F121B

## Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

- Test not applicable

- Darby Site (Open Area Test Site)
- Darby Lab
- 

at a test distance of :

- 3 meters
- 10 meters
- 30 meters

Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
<input checked="" type="checkbox"/>	LPA30	eElectro-Metrics	Log Periodic Antenna	2280
<input checked="" type="checkbox"/>	BIA-30	Electro-Metrics	Biconical Antenna	3852
<input checked="" type="checkbox"/>	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input checked="" type="checkbox"/>	85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input checked="" type="checkbox"/>	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input checked="" type="checkbox"/>	8447D	Hewlett-Packard	Preamplifier (26dB)	2944A06832
<input type="checkbox"/>	EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/>	8568B	Hewlett Packard	Spectrum Analyzer	2407A03213
<input type="checkbox"/>	85650A	Hewlett Packard	Quasi-Peak Adapter	2043A00358
<input type="checkbox"/>	85662A	Hewlett Packard	Analyzer Display	2340A05806
<input type="checkbox"/>	96005	Eaton	Log Periodic	1099
<input type="checkbox"/>	BIA 25	Electro-Metrics	Biconical Antenna	4283

## Emissions Test Conditions): INTERFERENCE POWER

The *INTERFERENCE POWER* measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

- Test not applicable

- Darby Lab
- 

Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
<input type="checkbox"/>	MDS-21	Rhode&Schwarz	Absorbing Clamp	8608447020
<input type="checkbox"/>	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/>	85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input type="checkbox"/>	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/>	8447D	Hewlett-Packard	Amplifier (26 dB)	2944A06832
<input type="checkbox"/>	EMC-30	Electro-Metrics	EMI Receiver	191

Test Report Number 06F121B

**The EQUIVALENT RADIATED EMISSIONS measurements in the frequency range 1 GHz - 1.1 GHz were performed in a horizontal and vertical polarization at the following test location :**

- - Darby Test Site (Open Area Test Site)
- -
- -
- -

**at a test distance of:**

- - 1 meters
- - 3 meters
- - 10 meters

**□ - Test not applicable**

**Test equipment used :**

Model Number	Manufacturer	Description	Serial Number
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
■ - 8449B	Hewlett-Packard	Preamplifier	3008A00320
■ - 3115	Electro-Mechanics	Double Ridge Guide Horn	3810

**The ANTENNA TERMINAL DISTURBANCE VOLTAGE in the frequency range 30 MHz - 1,000 MHz were performed.**

- - Darby Test Site (Open Area Test Site)
- - Laboratory
- -
- -

**■ - Test not applicable**

Model Number	Manufacturer	Description	Serial Number
□ - 2F9-3C4-3C5	Wavecom	UHF PAL TV Modulator	185879
□ - 2F1-3C4-3C5	Wavecom	VHF PAL TV Modulator	157728
□ - A-8000	IFR	Spectrum Analyzer	1306
□ - 8648B	Hewlett-Packard	Signal Generator	3623A01433
□ - 8648B	Hewlett-Packard	Signal Generator	3623A01477
□ - LMV-182A	Leader	RMS Milli-Voltmeter	8010091
□ - 3202	Krhon-Hite	Active filter	5899
□ - FMT115	Leaming	FM Modulator	NONE
□ - 371	UDT	Optical power meter	06657
□ - TSG95	Tektronix	PAL video / Audio generator	B028883
□ -			

Test Report Number 06F121B

**Equipment Under Test (EUT) Test Operation Mode - Emission tests :**

The device under test was operated under the following conditions during emissions testing:

- Standby
- Test program (H - Pattern)
- Test program (color bar)
- Test program (customer specific)
- Practice operation
- Normal Operating Mode
- 

**Configuration of the device under test:**

- See System Under Test Information in Appendix B

**Rationale for EUT setup / configuration:**

ANSI C63.4

---

---

---

---

---

---

*Test Report Number 06F121B*



## Emission Test Results:

### Conducted emissions 150 kHz - 30 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin 2.8 dB at 0.25 MHz  
Remarks: Against Average Limit

### Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin dB at MHz  
Remarks:

### Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin 2.4 dB at 98.3 MHz  
Remarks: Measured in the mobile configuration

### Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin dB at MHz  
Remarks:

### Radiated emissions 1 GHz - 1.08 GHz

The requirements are  - MET  - NOT MET  
Minimum limit margin >10 dB at all GHz  
Remarks:

### Antenna Terminal Disturbance Voltage 30 MHz - 1,000 MHz

The requirements are  - MET  - NOT MET  
Minimum limit margin dB at MHz  
Remarks:

Test Report Number 06F121B

**GENERAL REMARKS:**

The EUT’s were tested in (3) orthogonal planes.

Measurements were made up to the tenth harmonic of the highest frequency transmitted.

There are (2) separate configurations that were tested.

- (1) Home installation, uses home style antenna
- (2) Mobile installation, uses vehicle style antenna

The EUT transmits at 200 KHz intervals starting at 88.1 MHz and ending at 107.9 MHz.

We tested both configurations at 88.7, 98.3 & 107.5 MHz. Data is reported for the worst case configuration.

The line out port was never cabled during this “intentional radiator” testing because if cabled, it shuts off the transmitter.

**SUMMARY:**

The requirements according to the technical regulations are

- met
- **not** met.

The device under test does

- fulfill the general approval requirements mentioned on page 3.
- **not** fulfill the general approval requirements mentioned on page 3.


Testing Start Date                          February 07, 2006

Testing End Date:                              March 10, 2006

- PRODUCT SAFETY ENGINEERING INC -

*Test Report Number 06F121B*

Test-setup photo(s):  
Conducted emission 150 kHz - 30 MHz

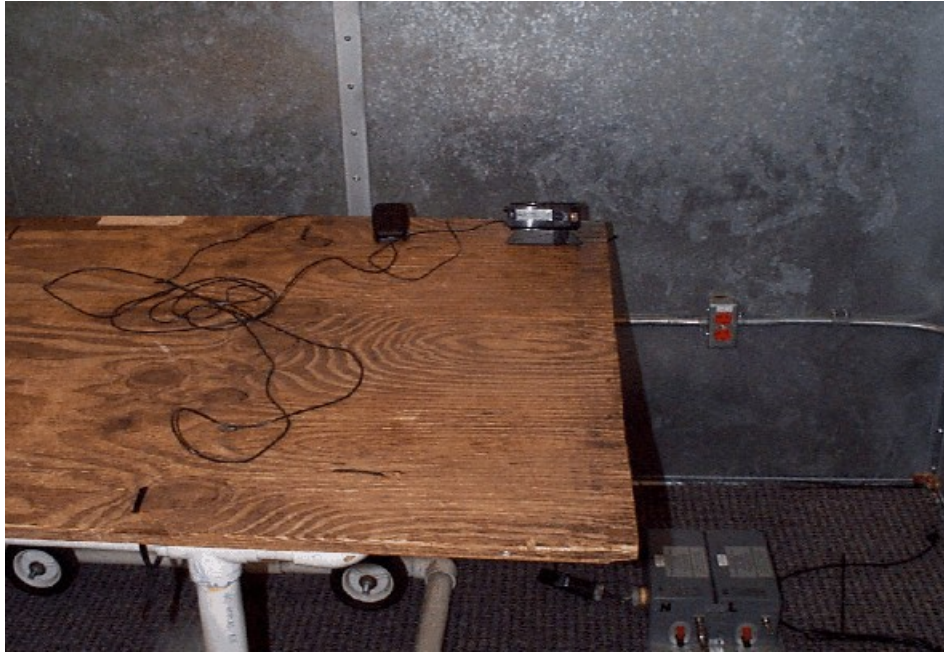

*Test Report Number 06F121B*

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544**

Test-setup photo(s):  
Radiated emission 30 MHz - 1000 MHz



*Test Report Number 06F121B*

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544**

# **APPENDIX**

## **A**

# **Test Equipment Calibration Information & Test Data Sheets**

## TEST EQUIPMENT CALIBRATION INFORMATION

<b>Manufacturer</b>	<b>Model</b>	<b>Description</b>	<b>Serial Number</b>	<b>Cal Due</b>
Hewlett Packard	8566B	Spectrum Analyzer	2421A00526	07/18/06
Hewlett Packard	85662A	Display	2403A07352	07/18/06
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00209	07/18/06
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06832	12/08/06
Hewlett Packard	8568B	Spectrum Analyzer	2407A03213	08/03/06
Hewlett Packard	85662A	Display	2340A05806	08/03/06
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00358	08/03/06
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06901	08/03/06
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	1937A03247	08/03/06
Hewlett Packard	8449B	Preamp 1 - 26.5 GHz	3008A00320	12/08/06
Hewlett Packard	8648B	Signal Generator	3443U00312	05/26/06
Hewlett Packard	8672A	Signal Generator	2211A02426	12/08/06
Eaton	96005	Log Periodic Antenna	1099	01/26/06
Electro-Metrics	LPA 30	Log Periodic Antenna	2280	12/14/06
Electro-Metrics	BIA 30	Biconical Antenna	3852	12/12/06
Electro-Metrics	BIA 25	Biconical Antenna	4283	01/27/06
Electro-Mechanics	3115	Double Ridge Guide Ant.	3810	11/28/07
Electro-Metrics	ALR30M	Magnetic Loop Antenna	824	01/10/06
Solar	8012	LISN	924840	03/10/06
Solar	8028	LISN	829012/809022	12/12/06
Solar	8028	LISN	903725/903726	11/22/06
Schwartzbeck	MDS-21	Absorbing Clamp	02581	12/09/06
Leader	LFG1310	Function Generator	8060233	05/26/06
Electro-Metrics	EMC-30	EMI Receiver	191	05/26/06
Antenna Research	ALA-130/A	Loop Antenna	106	06/02/06
Radio Shack	63-867	Temp/Hygrometer	N/A	05/27/06
Radio Shack	63-867A	Temp/Hygrometer	N/A	05/27/06

PRODUCT EMISSIONS

PRODUCT SAFETY ENGINEERING

Data File: GYPSY MOBILE ANT FCC-B 2-14-2006

No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE		HGT	AZM		
		dBuV/m		dB		cm	deg			
1	88.703	43.5	44.4	0.9	PK	H	200	1	-19.3	
2	98.305	43.5	45.6	2.1	PK	H	200	1	-16.2	AVG
3	107.504	43.5	39.8	-3.7	PK	H	200	1	-14.8	
4	177.402	43.5	27.8	-15.7	PK	H	200	1	-10.2	
5	196.601	43.5	26.6	-16.9	PK	H	200	1	-8.5	
6	215.000	43.5	34.8	-8.7	PK	H	200	1	-13.8	
7	266.100	46.0	26.6	-19.4	PK	H	200	1	-12.1	
8	294.900	46.0	31.5	-14.5	PK	H	200	1	-10.6	
9	322.503	46.0	28.3	-17.7	PK	H	200	1	-10.4	
10	354.800	46.0	22.4	-23.6	PK	H	200	1	-10.5	
11	393.200	46.0	19.4	-26.7	PK	H	200	1	-9.7	
12	430.000	46.0	19.4	-26.6	PK	H	200	1	-9.1	
13	443.497	46.0	19.9	-26.2	PK	H	200	1	-8.8	
14	491.500	46.0	23.2	-22.8	PK	H	200	1	-7.9	
15	532.194	46.0	27.7	-18.3	PK	H	200	1	-7.3	
16	537.499	46.0	22.0	-24.0	PK	H	200	1	-7.2	
17	589.798	46.0	21.2	-24.8	PK	H	200	1	-6.4	
18	620.900	46.0	22.9	-23.1	PK	H	200	1	-5.6	
19	645.000	46.0	21.1	-24.9	PK	H	200	1	-4.9	
20	688.099	46.0	21.3	-24.7	PK	H	200	1	-3.8	
21	709.600	46.0	22.6	-23.4	PK	H	200	1	-3.4	
22	752.499	46.0	25.5	-20.5	PK	H	200	1	-3.1	
23	786.400	46.0	25.2	-20.8	PK	H	200	1	-2.8	
24	798.300	46.0	26.2	-19.8	PK	H	200	1	-2.7	
25	859.999	46.0	32.0	-14.1	PK	H	200	1	-0.9	
26	884.700	46.0	28.0	-18.0	PK	H	200	1	-0.3	
27	887.000	46.0	29.7	-16.3	PK	H	200	1	-0.2	
28	967.499	54.0	29.3	-24.7	PK	H	200	1	1.	
29	982.999	54.0	28.8	-25.3	PK	H	200	1	1.3	
30	1000.00	54.0	29.8	-24.2	PK	H	200	1	1.6	Mkr @ 1075 MHz

PRODUCT EMISSIONS

PRODUCT SAFETY ENGINEERING

Data File: GYPSY HOME ANT FCC-B 2-7-2006

No	EMISSION	SPEC LIMIT	MEASUREMENTS			SITE			CORR FACTOR	COMMENTS
	FREQUENCY MHz		dBuV/m	ABS	dLIM	MODE	POL	HGT cm		
1	88.703	43.5	44.9	1.4	PK	V	100	1	-19.3	
2	98.306	43.5	45.3	1.8	PK	V	100	1	-16.2	AVG
3	107.504	43.5	39.1	-4.4	PK	V	100	1	-14.8	
4	177.402	43.5	26.1	-17.4	PK	V	100	1	-10.2	
5	196.601	43.5	28.5	-15.0	PK	V	100	1	-8.5	
6	215.000	43.5	30.4	-13.1	PK	V	100	1	-13.8	
7	266.100	46.0	24.9	-21.1	PK	V	100	1	-12.1	
8	294.900	46.0	26.1	-19.9	PK	V	100	1	-10.6	
9	322.503	46.0	29.4	-16.6	PK	H	200	1	-10.4	
10	354.800	46.0	20.8	-25.2	PK	H	200	1	-10.5	
11	393.200	46.0	23.2	-22.9	PK	H	200	1	-9.7	
12	430.000	46.0	18.9	-27.2	PK	H	200	1	-9.1	
13	443.497	46.0	22.5	-23.6	PK	H	200	1	-8.8	
14	491.500	46.0	24.0	-22.0	PK	H	200	1	-7.9	
15	532.194	46.0	24.8	-21.2	PK	H	200	1	-7.3	
16	537.500	46.0	22.5	-23.5	PK	H	200	1	-7.2	
17	589.798	46.0	22.8	-23.2	PK	H	200	1	-6.4	
18	620.900	46.0	25.2	-20.8	PK	H	200	1	-5.6	
19	645.000	46.0	24.0	-22.0	PK	H	200	1	-4.9	
20	688.099	46.0	31.9	-14.1	PK	H	200	1	-3.8	
21	709.600	46.0	25.9	-20.1	PK	H	200	1	-3.4	
22	752.500	46.0	25.2	-20.8	PK	H	200	1	-3.1	
23	786.400	46.0	26.0	-20.0	PK	H	200	1	-2.8	
24	798.307	46.0	26.3	-19.7	PK	H	200	1	-2.7	
25	860.000	46.0	29.9	-16.2	PK	H	200	1	-0.9	
26	884.700	46.0	27.8	-18.2	PK	H	200	1	-0.3	
27	887.000	46.0	29.4	-16.6	PK	H	200	1	-0.2	
28	967.500	54.0	27.9	-26.1	PK	H	200	1	1.	
29	982.999	54.0	29.0	-25.1	PK	H	200	1	1.3	
30	1000.00	54.0	29.4	-24.6	PK	H	200	1	1.6	Mkr @ 1075 MHz



# Product Safety Engineering

XM RADIO


Date : 03/10/06  
Technician : JACK GARNER  
Test Method : EN55022 CLASS B  
Equipment : GYPSY  
Mode of Op. : NORMAL  
Serial No. : UARUG00M

Time : 10:05:14.31  
Test Equip. : EMC-30  
Test Number : 1  
Sensor Loc. : NEUTRAL  
Sensor Pol. :  
Ext. Atten. : 0 dB

EMC-30 SETTINGS  
Detector : Quasi Peak  
Bandwidth : CISPR  
Dump/Dwell : N/A  
RF Atten. : 10 dB  
IF Atten. : 10 dB

SPECS  
1) CISPR 22 Quasi Peak  
2) CISPR 22 AVG  
3)  
4)

Comment 1 : 120 VAC / 60 HZ

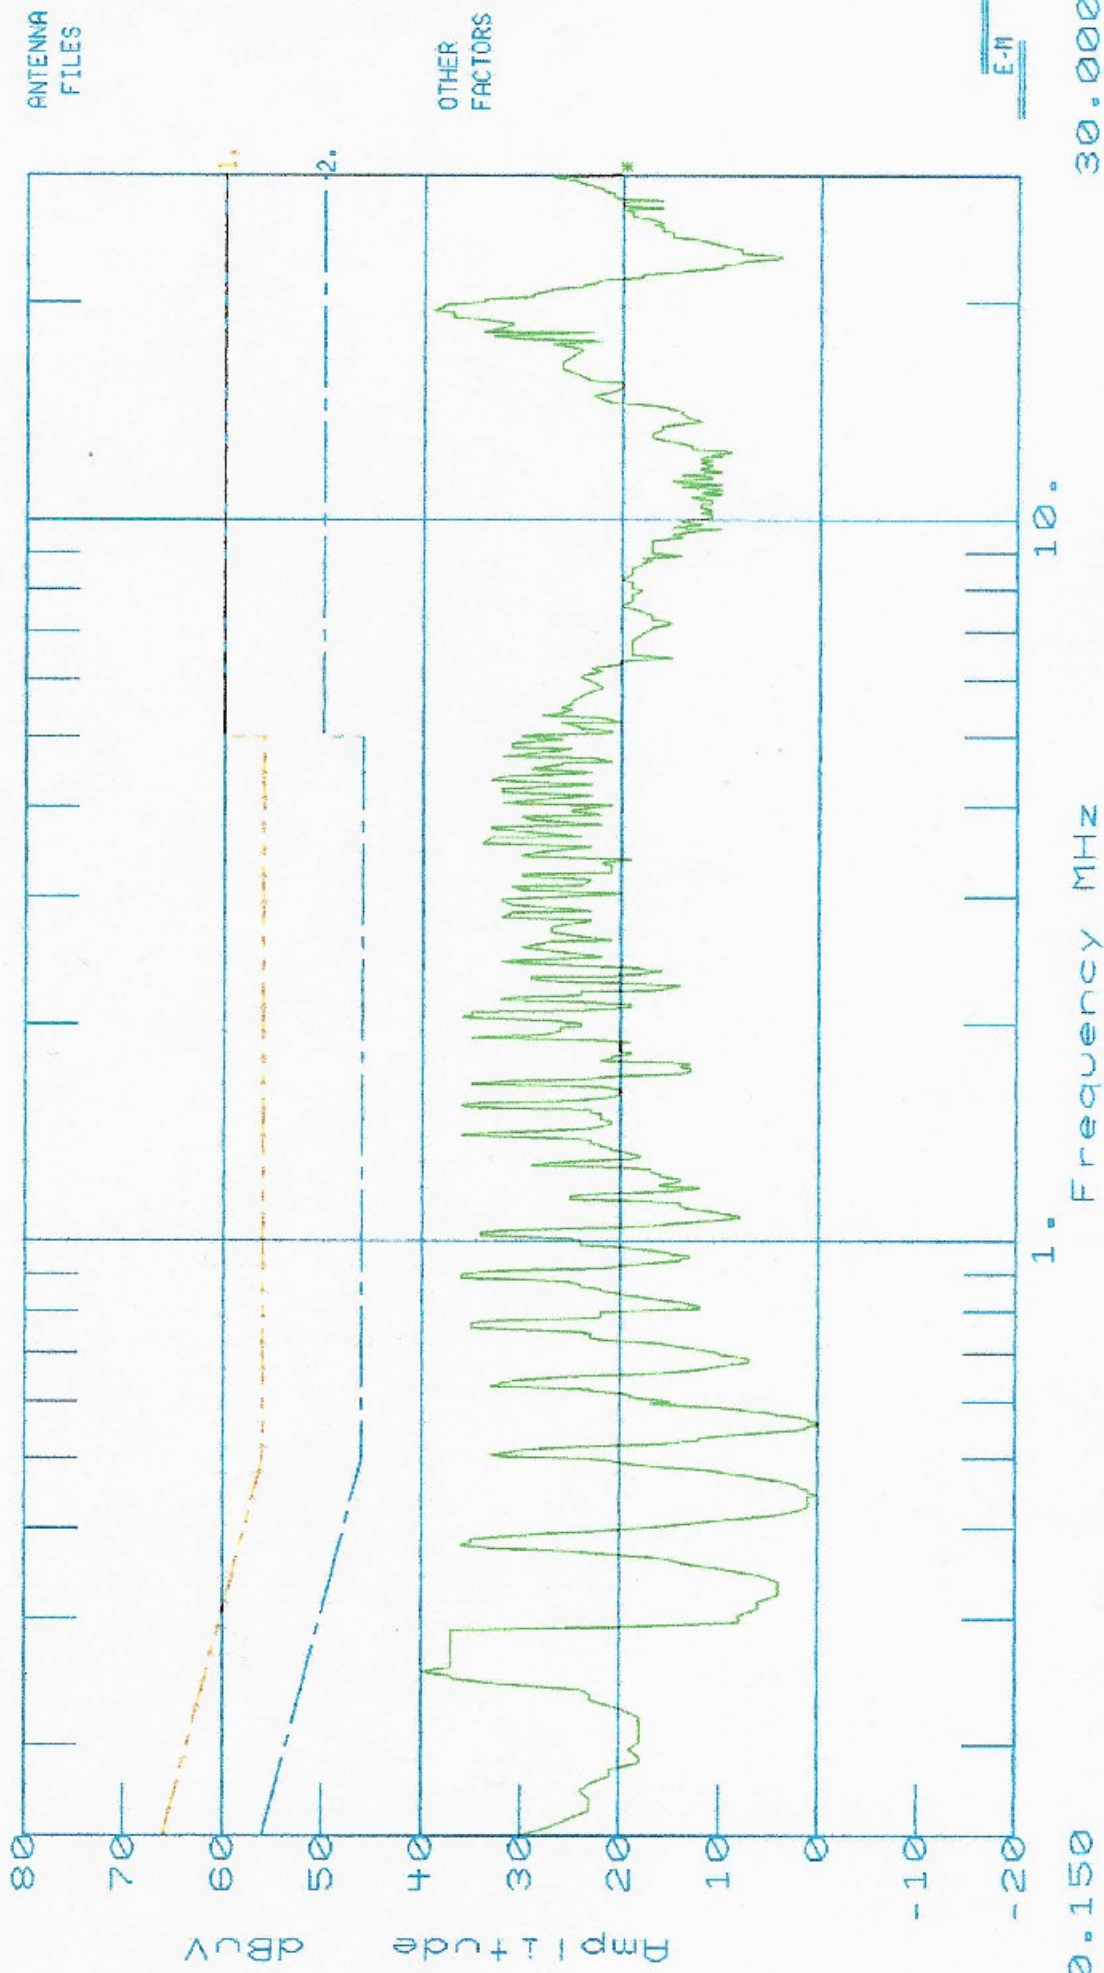

0.150

1. Frequency MHz

10.

30.000

E-11

TEST TITLE:XM RADIO  
DATA FILE :121\_N.D30  
Amplitude Units : dBuV

Threshold -10 dB

PAGE 1  
Freq.(MHz)  
0.1500

Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
0.8888	36.0		-10.000 *
0.8922	36.0		-10.000 *
0.8956	36.0		-10.000 *
0.8990	36.0		-10.000 *
1.4010	36.0		-10.000 *
1.5424	36.0		-10.000 *
1.5458	36.0		-10.000 *
2.0452	36.0		-10.000 *

# Product Safety Engineering

XM RADIO

Date : 03/10/06  
 Technician : JACK GARNER  
 Test Method : EN55022 CLASS B  
 Equipment : GYPSY  
 Mode of Op. : NORMAL  
 Serial No. : UARUG001


Time : 11:31:55.21  
 Test Equip. : EMC-30  
 Test Number : 1  
 Sensor Loc. : LINE  
 Sensor Pol. :  
 Ext. Atten. : 0 dB

Comment : 120 VAC / 60 HZ

EMC-30 SETTINGS  
 Detector : QuasiPeak  
 Bandwidth : CISPR  
 Dump/Dwell : IN/A  
 RF Atten. : 10 dB  
 IF Atten. : 10 dB

SPECS

- 1) CISPR 22 Quasi Peak
- 2) CISPR 22 AVG
- 3)
- 4)

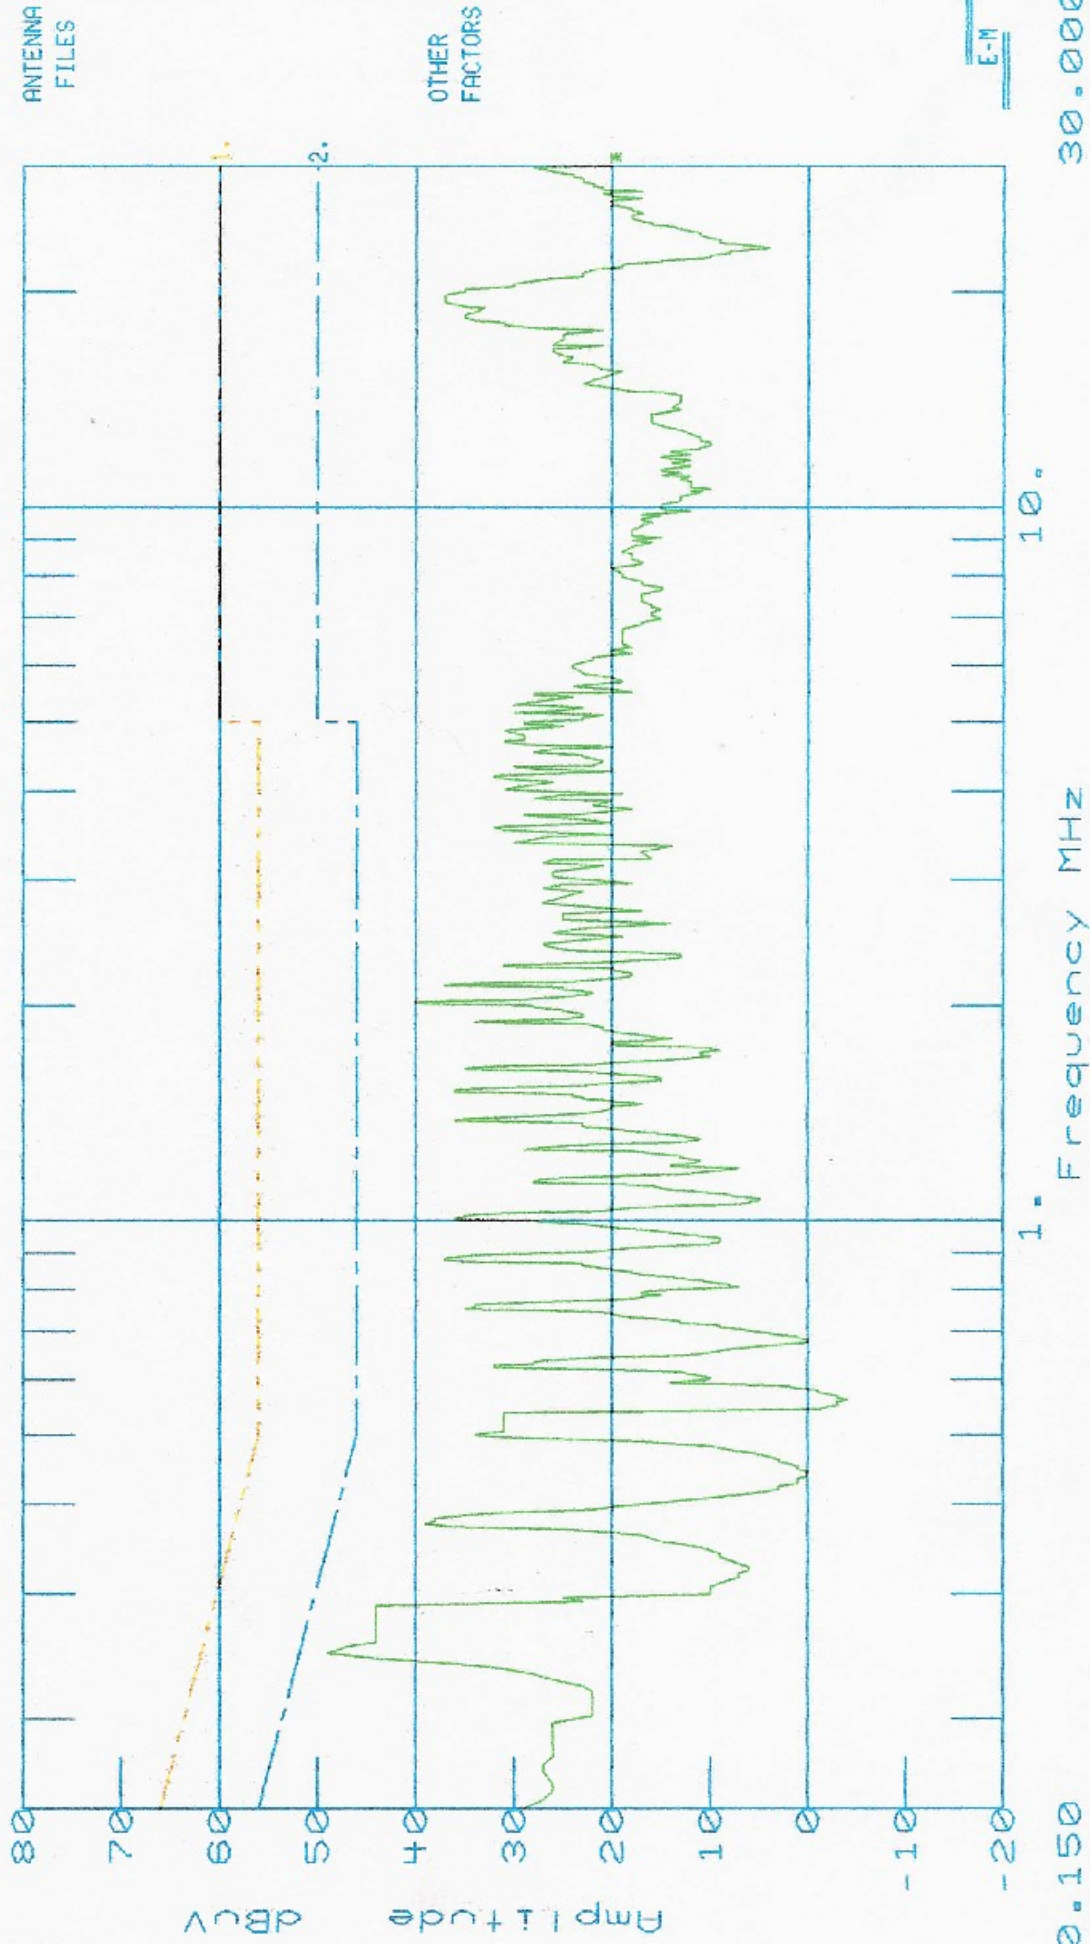

0.150

1. Frequency MHz

10.

30.000

TEST TITLE:XM RADIO

DATA FILE :121\_L.D30

Amplitude Units : dBuV

Threshold -10 dB

PAGE 1

Freq.(MHz)

0.1500

Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
0.2437	44.0		-7.969 *
0.2479	49.0		-2.827 *
0.2500	48.0		-3.757 *
0.2535	47.0		-4.642 *
0.2569	44.0		-7.531 *
0.2604	44.0		-7.419 *
0.2639	44.0		-7.308 *
0.2673	44.0		-7.201 *
0.2708	44.0		-7.093 *
0.2743	44.0		-6.987 *
0.2778	44.0		-6.881 *
0.2812	44.0		-6.780 *
0.2856	44.0		-6.651 *
0.2891	44.0		-6.550 *
0.3756	39.0		-9.376 *
0.8785	36.0		-10.000 *
0.8820	37.0		-9.000 *
0.8854	37.0		-9.000 *
0.8888	36.0		-10.000 *
1.0046	36.0		-10.000 *
1.0080	36.0		-10.000 *
1.3808	36.0		-10.000 *
1.5153	36.0		-10.000 *
1.5221	36.0		-10.000 *
1.5255	36.0		-10.000 *
2.0149	39.0		-7.000 *
2.0216	40.0		-6.000 *
2.0250	40.0		-6.000 *
2.0317	36.0		-10.000 *
2.1362	37.0		-9.000 *
2.1396	37.0		-9.000 *

# **APPENDIX**

## **B**

### **System Under Test Description**

# SYSTEM COMPONENTS

\*\*\*\*\*

DEVICE TYPE: EUT, XM RADIO MODEL# GYPSY  
SATELLITE RECEIVER/ FM TRANSMITTER

\*\*\*\*\*  
DEVICE TYPE: EUT, XM RADIO DOCK

\*\*\*\*\*  
DEVICE TYPE: EUT, XM RADIO AC POWER SUPPLY, MODEL# SMPS5V2A-XMR

\*\*\*\*\*  
DEVICE TYPE: EUT, XM RADIO SATELLITE RADIO ANTENNA (MOBILE USE)

\*\*\*\*\*  
DEVICE TYPE: EUT, XM RADIO SATELLITE RADIO ANTENNA (HOME USE) New Style

\*\*\*\*\*

# INTERFACE CABLES

\*\*\*\*\*

DEVICE TYPE: HOME ANTENNA

SHIELD: COAX

LENGTH: 7 METERS

CONNECTOR TYPE: DEDICATED TO COAXIAL PLUG

PORT: ANTENNA IN

\*\*\*\*\*

DEVICE TYPE: MOBILE ANTENNA

SHIELD: COAX

LENGTH: 7 METERS

CONNECTOR TYPE: DEDICATED TO COAXIAL PLUG

PORT: ANTENNA IN

\*\*\*\*\*

# AC LINE CORDS

\*\*\*\*\*

DEVICE TYPE: POWER SUPPLY (AC SIDE)

SHIELD: NO

LENGTH: N/A

CONNECTOR TYPE: 2 PIN POLARIZED WALL PLUG

\*\*\*\*\*

DEVICE TYPE: POWER SUPPLY (DC SIDE)

SHIELD: NO

LENGTH: 8 FEET

CONNECTOR TYPE: DEDICATED TO MINI COAXIAL PLUG TO EUT

\*\*\*\*\*



# **APPENDIX**

## **C**

### **Measurement Protocol**

**SYSTEM COMPONENTS**

\*\*\*\*\*

DEVICE TYPE: EUT, XM RADIO MODEL# GYPSY  
SATELLITE RECEIVER/ FM TRANSMITTER

\*\*\*\*\*

DEVICE TYPE: EUT, XM RADIO DOCK

\*\*\*\*\*

DEVICE TYPE: EUT, XM RADIO AC POWER SUPPLY, MODEL# SMPS5V2A-XMR

\*\*\*\*\*

DEVICE TYPE: EUT, XM RADIO SATELLITE RADIO ANTENNA (MOBILE USE)

\*\*\*\*\*

DEVICE TYPE: EUT, XM RADIO SATELLITE RADIO ANTENNA (HOME USE) New Style

\*\*\*\*\*

## INTERFACE CABLES

\*\*\*\*\*

DEVICE TYPE: HOME ANTENNA  
SHIELD: COAX  
LENGTH: 7 METERS  
CONNECTOR TYPE: DEDICATED TO COAXIAL PLUG  
PORT: ANTENNA IN

\*\*\*\*\*

DEVICE TYPE: MOBILE ANTENNA  
SHIELD: COAX  
LENGTH: 7 METERS  
CONNECTOR TYPE: DEDICATED TO COAXIAL PLUG  
PORT: ANTENNA IN

\*\*\*\*\*

**AC LINE CORDS**

\*\*\*\*\*

DEVICE TYPE: POWER SUPPLY (AC SIDE)

SHIELD: NO

LENGTH: N/A

CONNECTOR TYPE: 2 PIN POLARIZED WALL PLUG

\*\*\*\*\*

DEVICE TYPE: POWER SUPPLY (DC SIDE)

SHIELD: NO

LENGTH: 8 FEET

CONNECTOR TYPE: DEDICATED TO MINI COAXIAL PLUG TO EUT

\*\*\*\*\*

The test methodology followed during the collection of the data included within this technical report was ANSI C63.4:2003.

The EUT was powered with (120) VAC / (60) Hz during the collection of data included within.

The data is compared to the FCC Part 15 Class B limits.

The "EMI" instrumentation is capable of calculating the final emission level based on the following formula:

Level at the receiver (dB $\mu$ V) + Antenna Correction Factor (dB/M) + Cable Loss (dB) - Preamp Gain (dB) = Actual Level in dB $\mu$ V/M.

The sample calculation below is based on the actual test data collected:

Observed Level		<b>60.8</b>	dB $\mu$ V	
ACF	+	<b>8.7</b>	dB/M	
Cable Loss	+	<b>1.4</b>	dB	
Preamp Gain	-	<b><u>26.0</u></b>	dB	
Actual Level		<b>44.9</b>	dB $\mu$ V/M	@ 88.7 MHz

**Please have a company official review this report and sign.**

---