

TEST REPORT



Certification # 1367-01

Laboratory ID

PRODUCT SAFETY ENGINEERING, INC.
12955 Bellamy Brothers Boulevard
Dade City, Florida 33525 USA
PH (352) 588-2209 FX (352) 588-2544

Submitter ID

XM Radio
7777 Glades Road
Boca Raton, FL 33434

Report Issue Date: 08 Aug 05
Sample Radio ID# PR36D0CX
Sample Receipt Date: July 21, 2005

Test Report Number: 05F290B
Model Designation: ROADYXT
Product Description: Satellite Radio Receiver
and FM Transmitter

Sample Test Date: see data sheets

Marketing Approval _____

Description of non-standard test method or test practice: *None*

Estimated Measurement Uncertainty: *Not Applicable*

Special limitations of use: *None*

Traceability: *reference standards of measurement have been calibrated by a competent body using standards traceable to the NIST.*

According to testing performed at Product Safety Engineering, Inc., the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in regulations indicated on page (3) of the test report. The test results contained herein relate only to the model(s) identified above. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Project Engineer, I hereby declare that the equipment tested as specified above conforms to the requirements indicated on page (3) of the test report.

Signature *David Foerstner* Name David Foerstner

Title Engineering Group Leader Date 08 Aug 05

Reviewed by: *John E. Hale* Date 08 Aug 05
Approved Signatory

This report may only be reproduced in full with written permission from Product Safety Engineering, Inc.

Test Report Number 05F290B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

DIRECTORY - EMISSIONS

		Page(s)
A) Documentation		
Test report		1 - 10
Directory		2
Test Regulations		3
General Remarks		10
Test-setups (Photos)		11 - 12
B) Test data		
Conducted emissions	10/150 kHz - 30 MHz	5, 9
Radiated emissions	10 kHz - 30 MHz	5, 9
Radiated emissions	30 MHz - 1000 MHz	6, 9
Interference power	30 MHz - 300 MHz	6, 9
Equivalent Radiated emissions	1 GHz - 18 GHz	7, 9
Antenna Disturbance Voltage	30 MHz - 1,000 MHz	7, 9
C) Appendix A		
Test Equipment Calibration Information		A2
Test Data Sheets		A3 - A11
D) Appendix B		
System Under Test Description		B2 - B4
E) Appendix C		
Measurement Protocol		C1 - C2

Test Report Number 05F290B

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- EN 61000-6-3:2001
- EN 61000-6-4:2001

- EN 55011 : 1998 / A1:1999
 - Group 1
 - Group 2
 - Class A
 - Class B
- EN 55013 : 1990 / A12:1994 / A13:1996 / A14:1999

- EN 55014 -1: 2001
 - Household appliances and similar
 - Portable tools
 - Semiconductor devices

- EN 55022 : 1998
 - Class A
 - Class B
- AS/NZS 3548:1995
 - Class A
 - Class B
- - RSS-210
- CNS 13438
 - Class A
 - Class B
- VCCI : 1999
 - Class A
 - Class B
- - FCC Part 15
 - Class A
 - Class B
 - - Certification (Intentional Radiator portion only)
 - Verification
 - Declaration of Conformity

- FCC Part 18

Test Report Number 05F290B

Environmental conditions during testing:

	LAB	OATS
Temperature: *	_____	: _____
Relative Humidity: **	_____	: _____

* The ambient temperature during the testing was within the range of (50° - 104° F) unless indicted above.
** The humidity levels during the testing was within the range of (10% - 90%) relative humidity unless indicated above.

Power supply system : 110 Volts 60 Hz SINGLE phase

Sign Explanations:

- not applicable
- applicable

Test Report Number 05F290B

Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The *CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)* measurements were performed at the following test location:

- Test not applicable

- Darby Test Site (Open Area Test Site)
- Darby Laboratory

Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
<input checked="" type="checkbox"/>	8028-50	Solar	50 Ω LISN	829012, 829022
<input type="checkbox"/>	3825/2	Solar	50 Ω LISN	924840
<input checked="" type="checkbox"/>	EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/>	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/>	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/>	85662A	Hewlett Packard	Analyzer Display	2403A07352
<input type="checkbox"/>	8028-50	Solar	50 Ω LISN	903725, 903726
<input type="checkbox"/>	FCC-TLISN-T4	Fisher Custom Com.	Telecom ISN	20072

Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The *RADIATED EMISSIONS (MAGNETIC FIELD)* measurements were performed at the following test location:

- Darby Test Site (Open Area Test Site)
-
-

at a test distance of :

- 3 meters
- 30 meters

- Test not applicable

Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
<input type="checkbox"/>	96005	Eaton	Log Periodic Antenna	1099
<input type="checkbox"/>	BIA-25	Electro-Metrics	Biconical Antenna	4283
<input type="checkbox"/>	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/>	85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input type="checkbox"/>	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/>	ALR-30M	Electro-Metrics	Loop Antenna	824
<input type="checkbox"/>	8447D	Hewlett Packard	Preamplifier	2944A06832
<input type="checkbox"/>	EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/>	ALA-130/A	Antenna Research	Loop Antenna	106

Test Report Number 05F290B

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location :

- Test not applicable

- Darby Site (Open Area Test Site)
- Darby Lab
-

at a test distance of :

- 3 meters
- 10 meters
- 30 meters

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
<input checked="" type="checkbox"/> - LPA30	eElectro-Metrics	Log Periodic Antenna	2280
<input checked="" type="checkbox"/> - BIA-30	Electro-Metrics	Biconical Antenna	3852
<input checked="" type="checkbox"/> - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input checked="" type="checkbox"/> - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input checked="" type="checkbox"/> - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input checked="" type="checkbox"/> - 8447D	Hewlett-Packard	Preamplifier (26dB)	2944A06832
<input type="checkbox"/> - EMC-30	Electro-Metrics	EMI Receiver	191
<input type="checkbox"/> - 8568B	Hewlett Packard	Spectrum Analyzer	2407A03213
<input type="checkbox"/> - 85650A	Hewlett Packard	Quasi-Peak Adapter	2043A00358
<input type="checkbox"/> - 85662A	Hewlett Packard	Analyzer Display	2340A05806
<input type="checkbox"/> - 96005	Eaton	Log Periodic	1099
<input type="checkbox"/> - BIA 25	Electro-Metrics	Biconical Antenna	4283

Emissions Test Conditions): INTERFERENCE POWER

The *INTERFERENCE POWER* measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

- Test not applicable

- Darby Lab
-

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
<input type="checkbox"/> - MDS-21	Rhode&Schwarz	Absorbing Clamp	8608447020
<input type="checkbox"/> - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
<input type="checkbox"/> - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
<input type="checkbox"/> - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
<input type="checkbox"/> - 8447D	Hewlett-Packard	Amplifier (26 dB)	2944A06832
<input type="checkbox"/> - EMC-30	Electro-Metrics	EMI Receiver	191

Test Report Number 05F290B

The *EQUIVALENT RADIATED EMISSIONS* measurements in the frequency range 1 GHz - 1.1 GHz were performed in a horizontal and vertical polarization at the following test location :

- - Darby Test Site (Open Area Test Site)
- -
- -
- -

at a test distance of:

- - 1 meters
- - 3 meters
- - 10 meters

□ - Test not applicable

Test equipment used :

Model Number	Manufacturer	Description	Serial Number
■ - 8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
■ - 85662A	Hewlett-Packard	Analyzer Display	2403A07352
■ - 85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
■ - 8449B	Hewlett-Packard	Preamplifier	3008A00320
■ - 3115	Electro-Mechanics	Double Ridge Guide Horn	3810

The *ANTENNA TERMINAL DISTURBANCE VOLTAGE* in the frequency range 30 MHz - 1,000 MHz were performed.

- - Darby Test Site (Open Area Test Site)
- - Laboratory
- -
- -

■ - Test not applicable

Model Number	Manufacturer	Description	Serial Number
□ - 2F9-3C4-3C5	Wavecom	UHF PAL TV Modulator	185879
□ - 2F1-3C4-3C5	Wavecom	VHF PAL TV Modulator	157728
□ - A-8000	IFR	Spectrum Analyzer	1306
□ - 8648B	Hewlett-Packard	Signal Generator	3623A01433
□ - 8648B	Hewlett-Packard	Signal Generator	3623A01477
□ - LMV-182A	Leader	RMS Milli-Voltmeter	8010091
□ - 3202	Krhon-Hite	Active filter	5899
□ - FMT115	Leaming	FM Modulator	NONE
□ - 371	UDT	Optical power meter	06657
□ - TSG95	Tektronix	PAL video / Audio generator	B028883
□ -			

Test Report Number 05F290B

Equipment Under Test (EUT) Test Operation Mode - Emission tests :

The device under test was operated under the following conditions during emissions testing:

- Standby
- Test program (H - Pattern)
- Test program (color bar)
- Test program (customer specific)
- Practice operation
- Normal Operating Mode
-

Configuration of the device under test:

- See System Under Test Information in Appendix B

Rationale for EUT setup / configuration:

ANSI C63.4

Test Report Number 05F290B

Emission Test Results:

Conducted emissions 150 kHz - 30 MHz

The requirements are - MET - NOT MET
Minimum limit margin 1.5 dB at 0.227 MHz
Remarks: Against Average Limit

Radiated emissions (magnetic field) 10 kHz - 30 MHz

The requirements are - MET - NOT MET
Minimum limit margin dB at MHz
Remarks:

Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are - MET - NOT MET
Minimum limit margin 0.4 dB at 88.7 MHz
Remarks: Measured with the Home Docking configuration

Interference Power at the mains and interface cables 30 MHz - 300 MHz

The requirements are - MET - NOT MET
Minimum limit margin dB at MHz
Remarks:

Radiated emissions 1 GHz - 1.08 GHz

The requirements are - MET - NOT MET
Minimum limit margin >10 dB at all GHz
Remarks:

Antenna Terminal Disturbance Voltage 30 MHz - 1,000 MHz

The requirements are - MET - NOT MET
Minimum limit margin dB at MHz
Remarks:

Test Report Number 05F290B

GENERAL REMARKS:

The EUT's were tested in (3) orthogonal planes.

Measurements were made up to the tenth harmonic of the highest frequency transmitted.

There are (2) separate configurations that were tested.

- (1) Home installation uses home style antenna and "home style" docking cradle
- (2) Mobile installation uses vehicle style antenna and "vehicle style" docking cradle

The EUT transmits at 200 KHz intervals starting at 88.1 MHz and ending at 107.9 MHz.

We test home and mobile configurations at 88.7, 98.5 & 107.5 MHz. Data is reported for both configurations..

The line out port was never cabled during this "intentional radiator" testing because it shuts off the transmitter.

SUMMARY:

The requirements according to the technical regulations are

- met
- **not** met.

The device under test does

- fulfill the general approval requirements mentioned on page 3.
- **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date July 21, 2005

Testing End Date: August 5, 2005

- PRODUCT SAFETY ENGINEERING INC -

Test Report Number 05F290B

Test-setup photo(s):
Conducted emission 450/150 kHz - 30 MHz



Test Report Number 05F290B

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544**

Test-setup photo(s):
Radiated emission 30 MHz - 1000 MHz

Mobile Unit



Home Unit



Test Report Number 05F290B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525
Tel (352) 588-2209 Fax (352) 588-2544

APPENDIX

A

Test Equipment Calibration Information & Test Data Sheets

TEST EQUIPMENT CALIBRATION INFORMATION

Manufacturer	Model	Description	Serial Number	Cal Due
Hewlett Packard	8566B	Spectrum Analyzer	2421A00526	08/12/05
Hewlett Packard	85662A	Display	2403A07352	08/12/05
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00209	08/12/05
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06832	12/13/05
Hewlett Packard	8568B	Spectrum Analyzer	2407A03213	08/12/05
Hewlett Packard	85662A	Display	2340A05806	08/12/05
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00358	08/12/05
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	2944A06901	08/12/05
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHz	1937A03247	08/12/05
Hewlett Packard	8449B	Preamp 1 - 26.5 GHz	3008A00320	12/13/05
Hewlett Packard	8648B	Signal Generator	3443U00312	05/04/05
Hewlett Packard	8672A	Signal Generator	2211A02426	12/13/05
Eaton	96005	Log Periodic Antenna	1099	02/05/05
Electro-Metrics	LPA 30	Log Periodic Antenna	2280	01/11/06
Electro-Metrics	BIA 30	Biconical Antenna	3852	01/11/06
Electro-Metrics	BIA 25	Biconical Antenna	4283	02/04/05
Electro-Mechanics	3115	Double Ridge Guide Ant.	3810	11/25/05
Electro-Metrics	ALR30M	Magnetic Loop Antenna	824	01/10/06
Solar	8012	LISN	924840	12/24/04
Solar	8028	LISN	829012/809022	12/15/05
Solar	8028	LISN	903725/903726	12/15/05
Schwartzbeck	MDS-21	Absorbing Clamp	02581	12/09/05
Leader	LFG1310	Function Generator	8060233	05/04/05
Electro-Metrics	EMC-30	EMI Receiver	191	05/04/05
Antenna Research	ALA-130/A	Loop Antenna	106	05/03/05
Radio Shack	63-867	Temp/Hygrometer	N/A	05/04/05
Radio Shack	63-867A	Temp/Hygrometer	N/A	05/04/05

PRODUCT EMISSIONS

PRODUCT SAFETY ENGINEERING

Data File: ROADY XT HOME FCC-B 7-21-2005

No	EMISSION FREQUENCY MHz	SPEC LIMIT dBuV/m	MEASUREMENTS			MODE	POL	SITE		CORR FACTOR dB	COMMENTS
			ABS	dLIM dB	HGT cm			AZM deg			
1	88.710	48.0	47.6	-0.4	QP	H	100	1	-19.2		
2	98.503	48.0	47.4	-0.6	QP	H	100	1	-16.1		
3	107.451	48.0	44.2	-3.8	QP	V	100	1	-14.8		
4	177.406	43.5	30.0	-13.5	PK	V	100	1	-10.2		
5	197.004	43.5	18.8	-24.7	PK	V	100	1	-8.5		
6	215.000	43.5	26.6	-16.9	PK	V	100	1	-13.8		
7	266.099	46.0	26.8	-19.2	PK	V	100	1	-12.1		
8	295.500	46.0	24.0	-22.0	PK	V	100	1	-10.5		
9	322.492	46.0	23.2	-22.8	PK	V	100	1	-10.4		
10	354.785	46.0	19.0	-27.0	PK	V	100	1	-10.5		
11	393.965	46.0	18.8	-27.2	PK	V	100	1	-9.6		
12	429.989	46.0	19.4	-26.6	PK	V	100	1	-9.1		
13	443.486	46.0	20.4	-25.7	PK	V	100	1	-8.8		
14	492.518	46.0	20.9	-25.1	PK	V	100	1	-7.9		
15	532.200	46.0	34.8	-11.2	PK	V	100	1	-7.3		
16	537.582	46.0	21.3	-24.7	PK	V	100	1	-7.2		
17	591.117	46.0	33.3	-12.7	PK	V	100	1	-6.4		
18	620.900	46.0	20.5	-25.5	PK	V	100	1	-5.6		
19	645.000	46.0	23.8	-22.2	PK	V	100	1	-4.9		
20	689.504	46.0	22.2	-23.8	PK	V	100	1	-3.8		
21	709.553	46.0	25.1	-20.9	PK	V	100	1	-3.4		
22	752.375	46.0	25.1	-20.9	PK	V	100	1	-3.1		
23	787.924	46.0	25.7	-20.3	PK	V	100	1	-2.8		
24	798.154	46.0	25.1	-20.9	PK	V	100	1	-2.7		
25	860.018	46.0	30.2	-15.8	PK	V	100	1	-0.9		
26	886.495	46.0	27.5	-18.5	PK	V	100	1	-0.3		
27	887.000	46.0	27.5	-18.5	PK	V	100	1	-0.2		
28	967.509	54.0	27.9	-26.2	PK	V	100	1	1.		
29	985.024	54.0	28.7	-25.3	PK	V	100	1	1.3		
30	1000.00	54.0	25.8	-28.2	PK	V	100	1	1.6	Mkr @ 1075 MHz	

PRODUCT EMISSIONS

PRODUCT SAFETY ENGINEERING

Data File: ROADY XT MOBILE FCC-B 7-21-2005

No	EMISSION FREQUENCY MHz	SPEC LIMIT dBuV/m	MEASUREMENTS			MODE	SITE			CORR FACTOR dB	COMMENTS
			ABS	dLIM dB	POL		HGT cm	AZM deg			
1	88.708	48.0	44.5	-3.5	QP	V	100	5	-19.3		
2	98.483	48.0	44.5	-3.5	QP	V	100	5	-16.1		
3	107.501	48.0	43.5	-4.5	QP	H	200	1	-14.8		
4	177.407	43.5	29.2	-14.3	PK	V	100	1	-10.2		
5	197.004	43.5	30.5	-13.0	PK	V	100	1	-8.5		
6	215.000	43.5	21.5	-22.0	PK	V	100	1	-13.8		
7	266.100	46.0	22.5	-23.5	PK	V	100	1	-12.1		
8	295.502	46.0	17.7	-28.3	PK	V	100	1	-10.5		
9	322.500	46.0	15.3	-30.7	PK	V	100	1	-10.4		
10	354.800	46.0	15.0	-31.0	PK	V	100	1	-10.5		
11	394.002	46.0	14.8	-31.2	PK	V	100	1	-9.6		
12	430.000	46.0	18.3	-27.8	PK	V	100	1	-9.1		
13	443.493	46.0	19.5	-26.6	PK	V	100	1	-8.8		
14	492.515	46.0	20.8	-25.2	PK	V	100	1	-7.9		
15	532.200	46.0	32.4	-13.6	PK	V	100	1	-7.3		
16	537.583	46.0	21.8	-24.2	PK	V	100	1	-7.2		
17	591.117	46.0	19.3	-26.7	PK	V	100	1	-6.4		
18	620.900	46.0	23.9	-22.1	PK	V	100	1	-5.6		
19	644.997	46.0	24.4	-21.6	PK	V	100	1	-4.9		
20	689.504	46.0	23.3	-22.7	PK	V	100	1	-3.8		
21	709.546	46.0	24.8	-21.2	PK	V	100	1	-3.4		
22	752.386	46.0	24.9	-21.1	PK	V	100	1	-3.1		
23	787.988	46.0	25.7	-20.3	PK	V	100	1	-2.8		
24	798.169	46.0	25.9	-20.1	PK	V	100	1	-2.7		
25	860.000	46.0	26.1	-19.9	PK	V	100	1	-0.9		
26	886.505	46.0	25.3	-20.7	PK	V	100	1	-0.3		
27	887.000	46.0	25.7	-20.3	PK	V	100	1	-0.2		
28	967.500	54.0	26.3	-27.8	PK	V	100	1	1.		
29	985.005	54.0	27.1	-26.9	PK	V	100	1	1.3		
30	1000.00	54.0	27.4	-26.6	PK	V	100	1	1.6	Mkr @ 1075 MHz	

Product Safety Engineering

XM RADIO


Date : 08/05/05
 Technician : CHIP FOERSTNER
 Test Method : EN55022 CLASS B
 Equipment : ROADYXT
 Mode of Op. : NORMAL
 Serial No. :

Time : 09:29:46.94
 Test Equip. : EMC-30
 Test Number : 1
 Sensor Loc. : LINE
 Sensor Pol. :
 Ext. Atten. : 0 dB

Comment : 120 VAC / 60 HZ

EMC-30 SETTINGS
 Detector QuasiPeak
 Bandwidth CISPR
 Dump/Dwell IN/A
 RF Atten. 10 dB
 IF Atten. 10 dB

SPECS
 1) CISPR 22 Quasi Peak
 2) CISPR 22 AVG
 3)
 4)

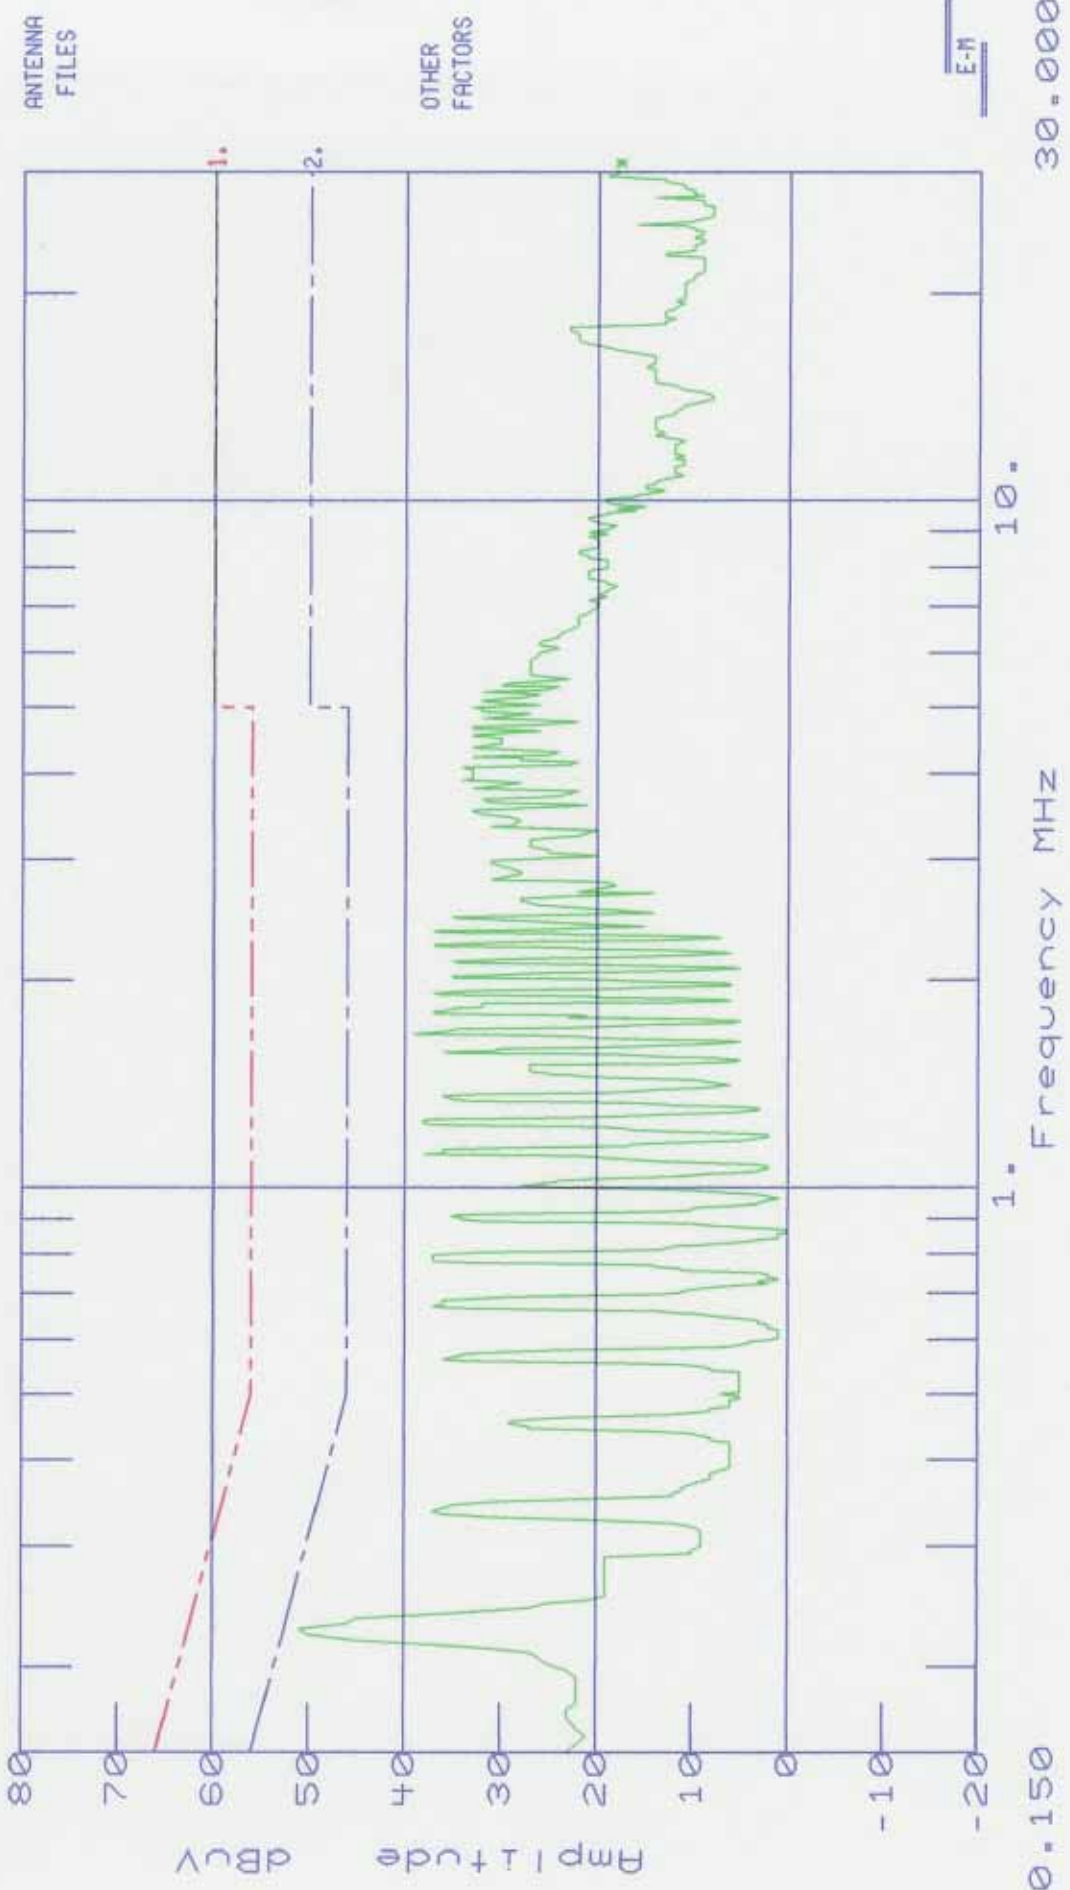

0.150

1. Frequency MHz

10.

30.000

E-N

TEST TITLE:XM RADIO
DATA FILE :290_L.D30
Amplitude Units : dBuV

Threshold -10 dB

PAGE 1
Freq.(MHz)
0.1500

Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
0.2187	45.0		-7.868 *
0.2229	50.0		-2.710 *
0.2273	51.0		-1.548 *
0.2315	46.0		-6.396 *
0.2357	45.0		-7.246 *
0.5613	36.0		-10.000 *
0.6708	37.0		-9.000 *
0.6743	36.0		-10.000 *
0.6777	36.0		-10.000 *
0.6811	36.0		-10.000 *
0.6845	36.0		-10.000 *
0.7799	37.0		-9.000 *
0.7833	37.0		-9.000 *
0.7867	37.0		-9.000 *
0.7901	37.0		-9.000 *
0.7935	37.0		-9.000 *
0.7969	37.0		-9.000 *
1.1169	38.0		-8.000 *
1.1203	36.0		-10.000 *
1.1304	36.0		-10.000 *
1.1338	36.0		-10.000 *
1.2385	38.0		-8.000 *
1.2419	38.0		-8.000 *
1.2520	38.0		-8.000 *
1.2554	37.0		-9.000 *
1.3538	36.0		-10.000 *
1.3572	36.0		-10.000 *
1.5729	36.0		-10.000 *
1.6713	39.0		-7.000 *
1.6781	38.0		-8.000 *
1.6814	37.0		-9.000 *
1.7922	37.0		-9.000 *
1.7989	37.0		-9.000 *
1.8023	36.0		-10.000 *
1.9068	36.0		-10.000 *
1.9137	37.0		-9.000 *
1.9171	36.0		-10.000 *
2.2438	36.0		-10.000 *
2.2505	37.0		-9.000 *
2.2539	37.0		-9.000 *
2.3519	36.0		-10.000 *
2.3586	37.0		-9.000 *
2.3620	36.0		-10.000 *

Product Safety Engineering

XM RADIO


Date : 08/05/05
 Technician : CHIP FOERSTNER
 Test Method : EN5022 CLASS B
 Equipment : ROADYXT
 Mode of Op. : NORMAL
 Serial No. :

Time : 09:51:19.39
 Test Equip. : EMC-30
 Test Number : 1
 Sensor Loc. : NEUTRAL
 Sensor Pol. :
 Ext. Atten. : 0 dB

Comment : 120 VAC / 60 HZ

EMC-30 SETTINGS
 Detector QuasiPeak
 Bandwidth CISPR
 Dump/Dwell IN/A
 RF Atten. 10 dB
 IF Atten. 10 dB

SPECS
 1) CISPR 22 Quasi Peak
 2) CISPR 22 AVG
 3)
 4)

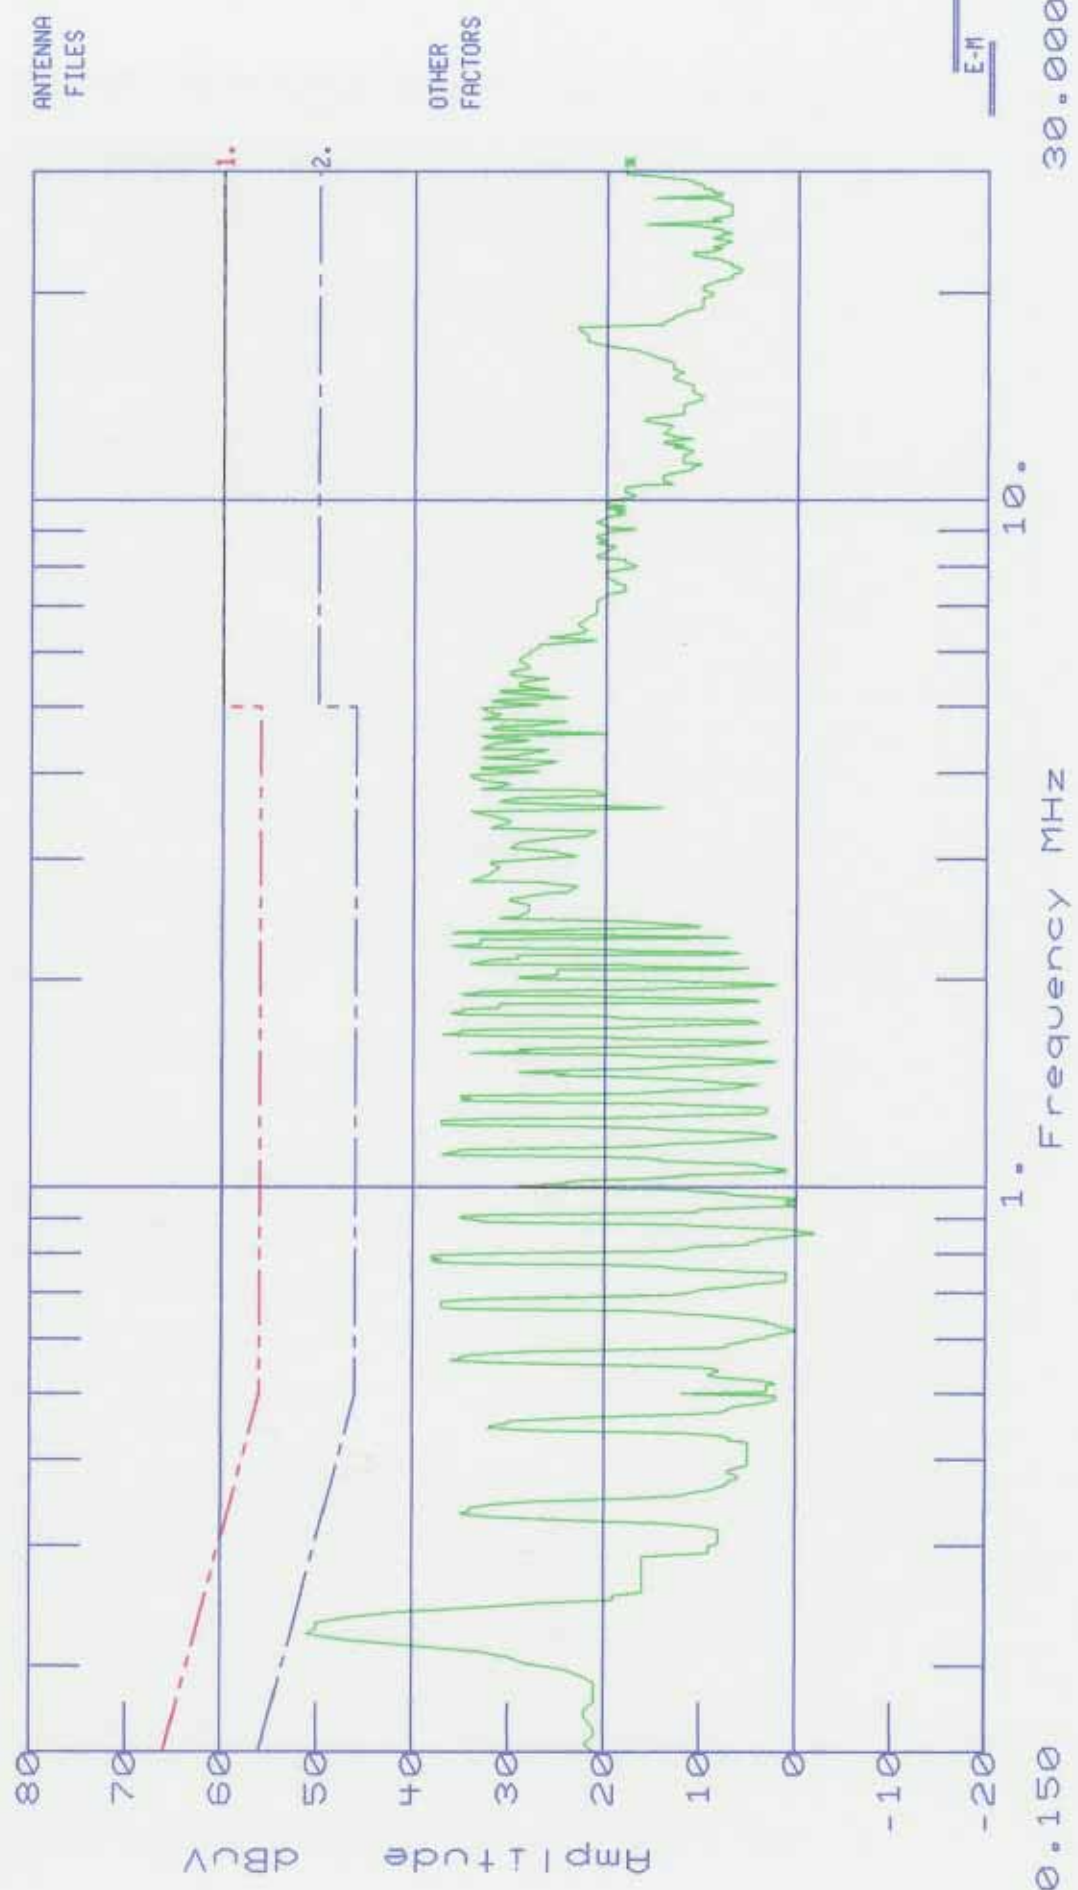

0.150

1. Frequency MHz

30.000

TEST TITLE:XM RADIO
DATA FILE :290_N.D30
Amplitude Units : dBuV

Threshold -10 dB

PAGE 1
Freq.(MHz)
0.1500

Freq(MHz)	Amp	C22BQP.S30 vs Spec(dB)	C22BAVG.S30 vs Spec(dB)
0.2187	47.0		-5.868 *
0.2229	51.0		-1.710 *
0.2273	50.0		-2.548 *
0.2315	50.0		-2.396 *
0.2357	47.0		-5.246 *
0.5579	36.0		-10.000 *
0.6674	37.0		-9.000 *
0.6708	37.0		-9.000 *
0.6743	37.0		-9.000 *
0.6777	37.0		-9.000 *
0.6811	37.0		-9.000 *
0.7765	37.0		-9.000 *
0.7799	38.0		-8.000 *
0.7833	37.0		-9.000 *
0.7867	38.0		-8.000 *
0.7901	38.0		-8.000 *
0.7935	38.0		-8.000 *
0.7969	36.0		-10.000 *
1.1135	37.0		-9.000 *
1.1203	36.0		-10.000 *
1.2318	37.0		-9.000 *
1.2385	37.0		-9.000 *
1.2453	37.0		-9.000 *
1.2487	37.0		-9.000 *
1.6646	37.0		-9.000 *
1.6713	36.0		-10.000 *
1.7854	36.0		-10.000 *
1.7922	36.0		-10.000 *
2.2438	36.0		-10.000 *
2.3451	36.0		-10.000 *

MKR Δ 103.0 KHZ
0.00 dB


REF 87.0 dB μ V ATTEN 0 dB

HP

10 dB/

POS PK

DL
65.3
dB μ V

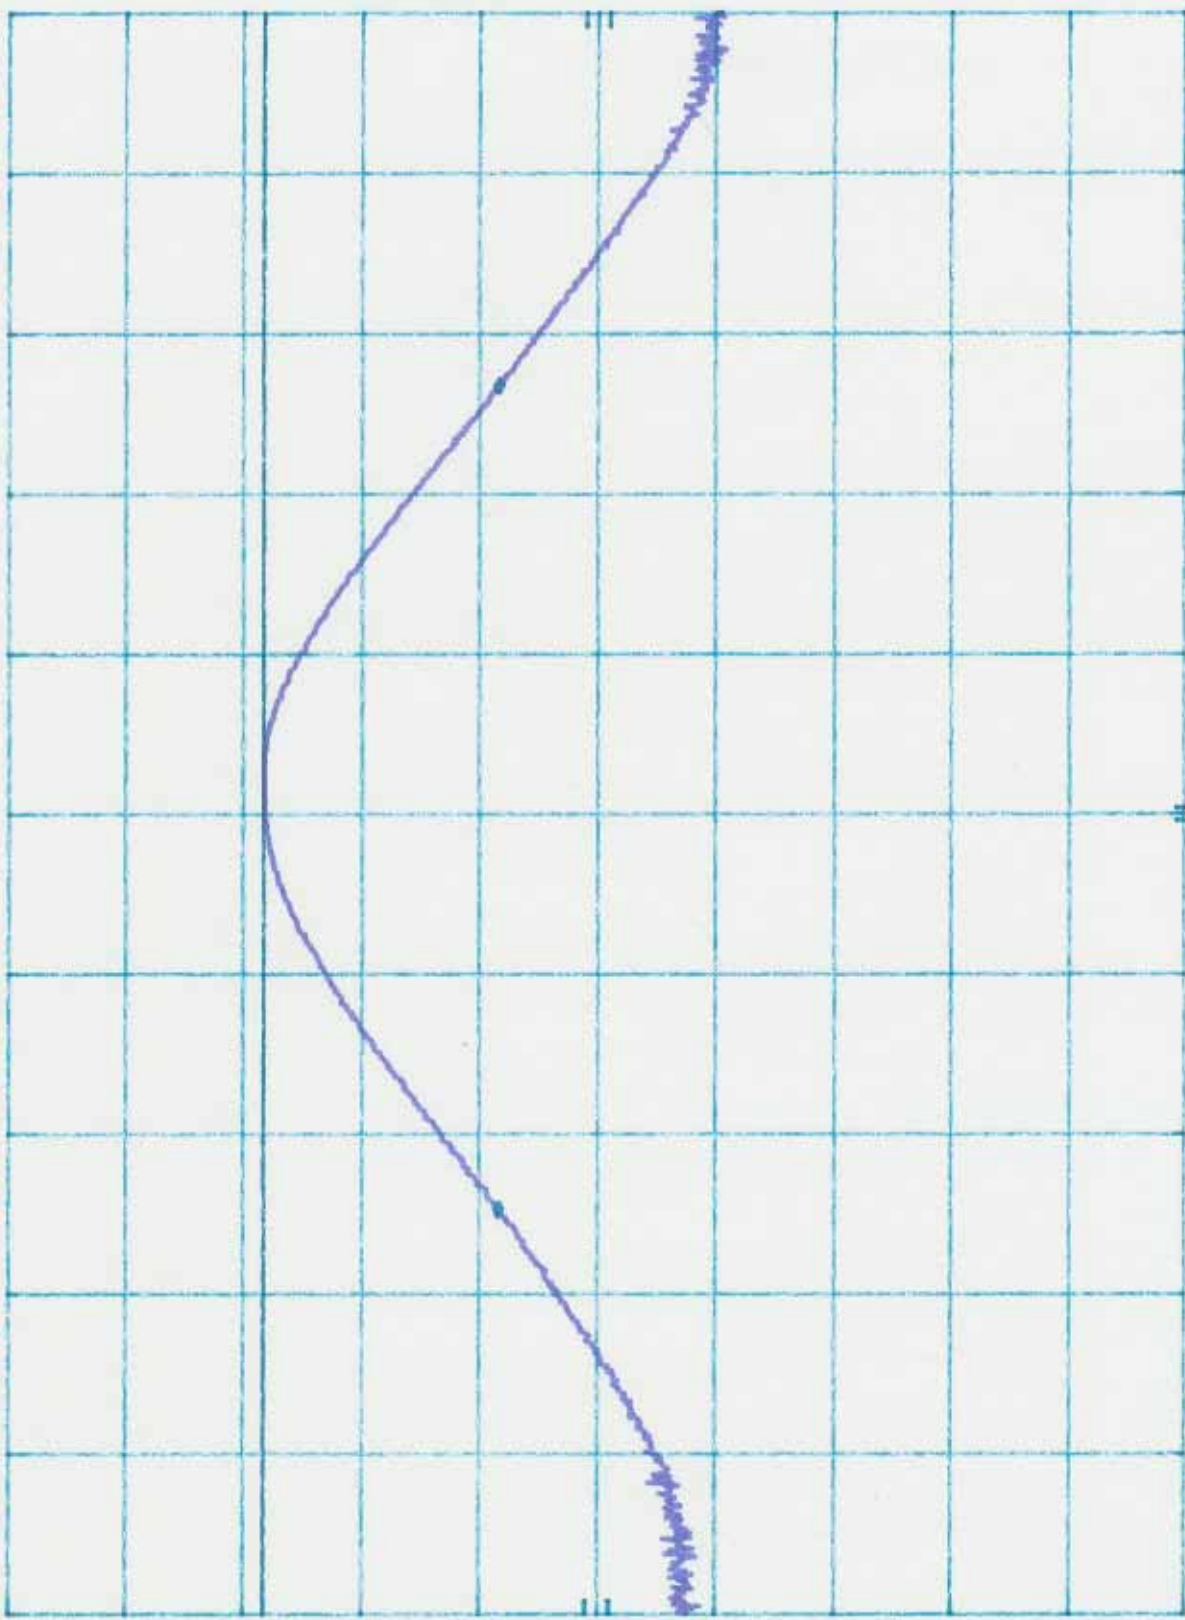

SPAN 200 KHZ
SWP 100 msec

VBW 30 KHZ


CENTER 88.100 MHZ
RES BW 30 KHZ

MKR Δ 110.0 KHZ
0.00 dB

REF 67.0 dB μ V ATTEN 0 dB

hp
10 dB/
POS PK

DL
60.1
dB μ V

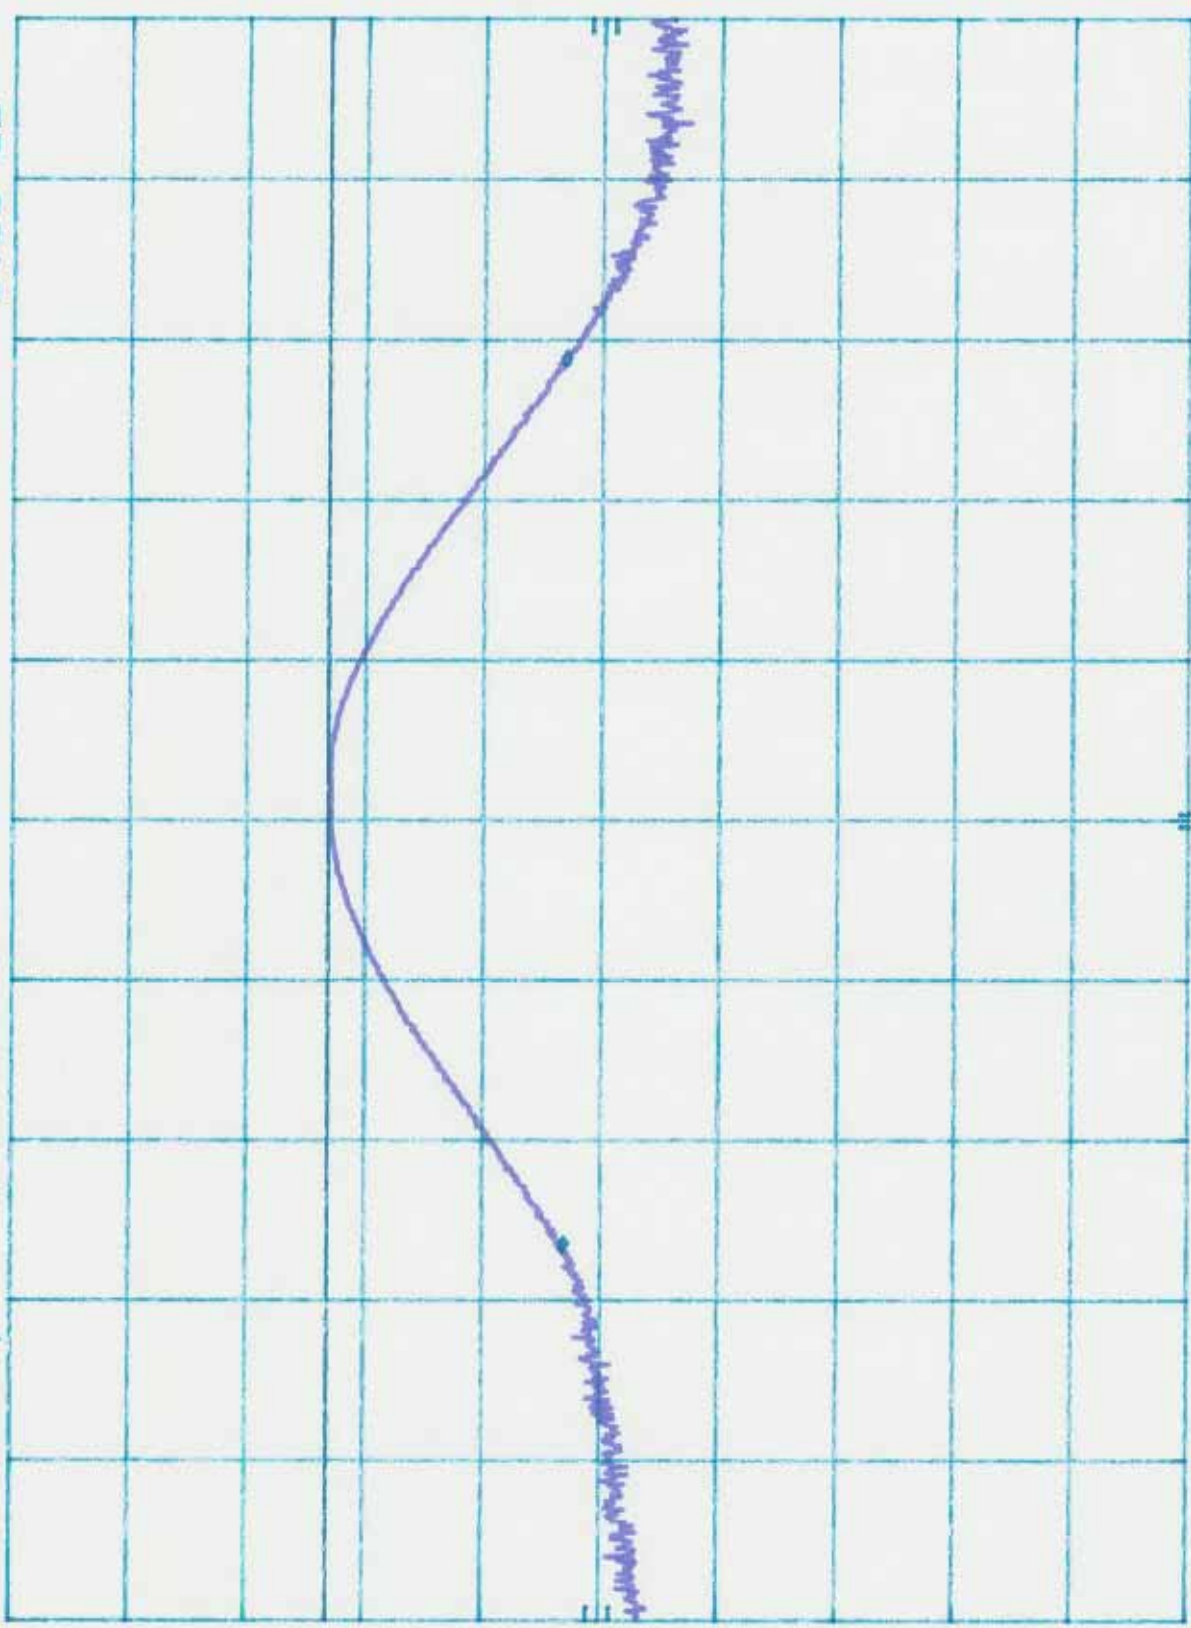


CENTER 98.500 MHz
RES BW 30 KHZ
SPAN 200 KHZ
SWP 100 msec
VBW 30 KHZ

MKR Δ 114.0 KHZ
-0.10 dB

h_p REF 87.0 dB μ V ATTEN 0 dB

10 dB/
POS PK

DL
64.6
dB μ V

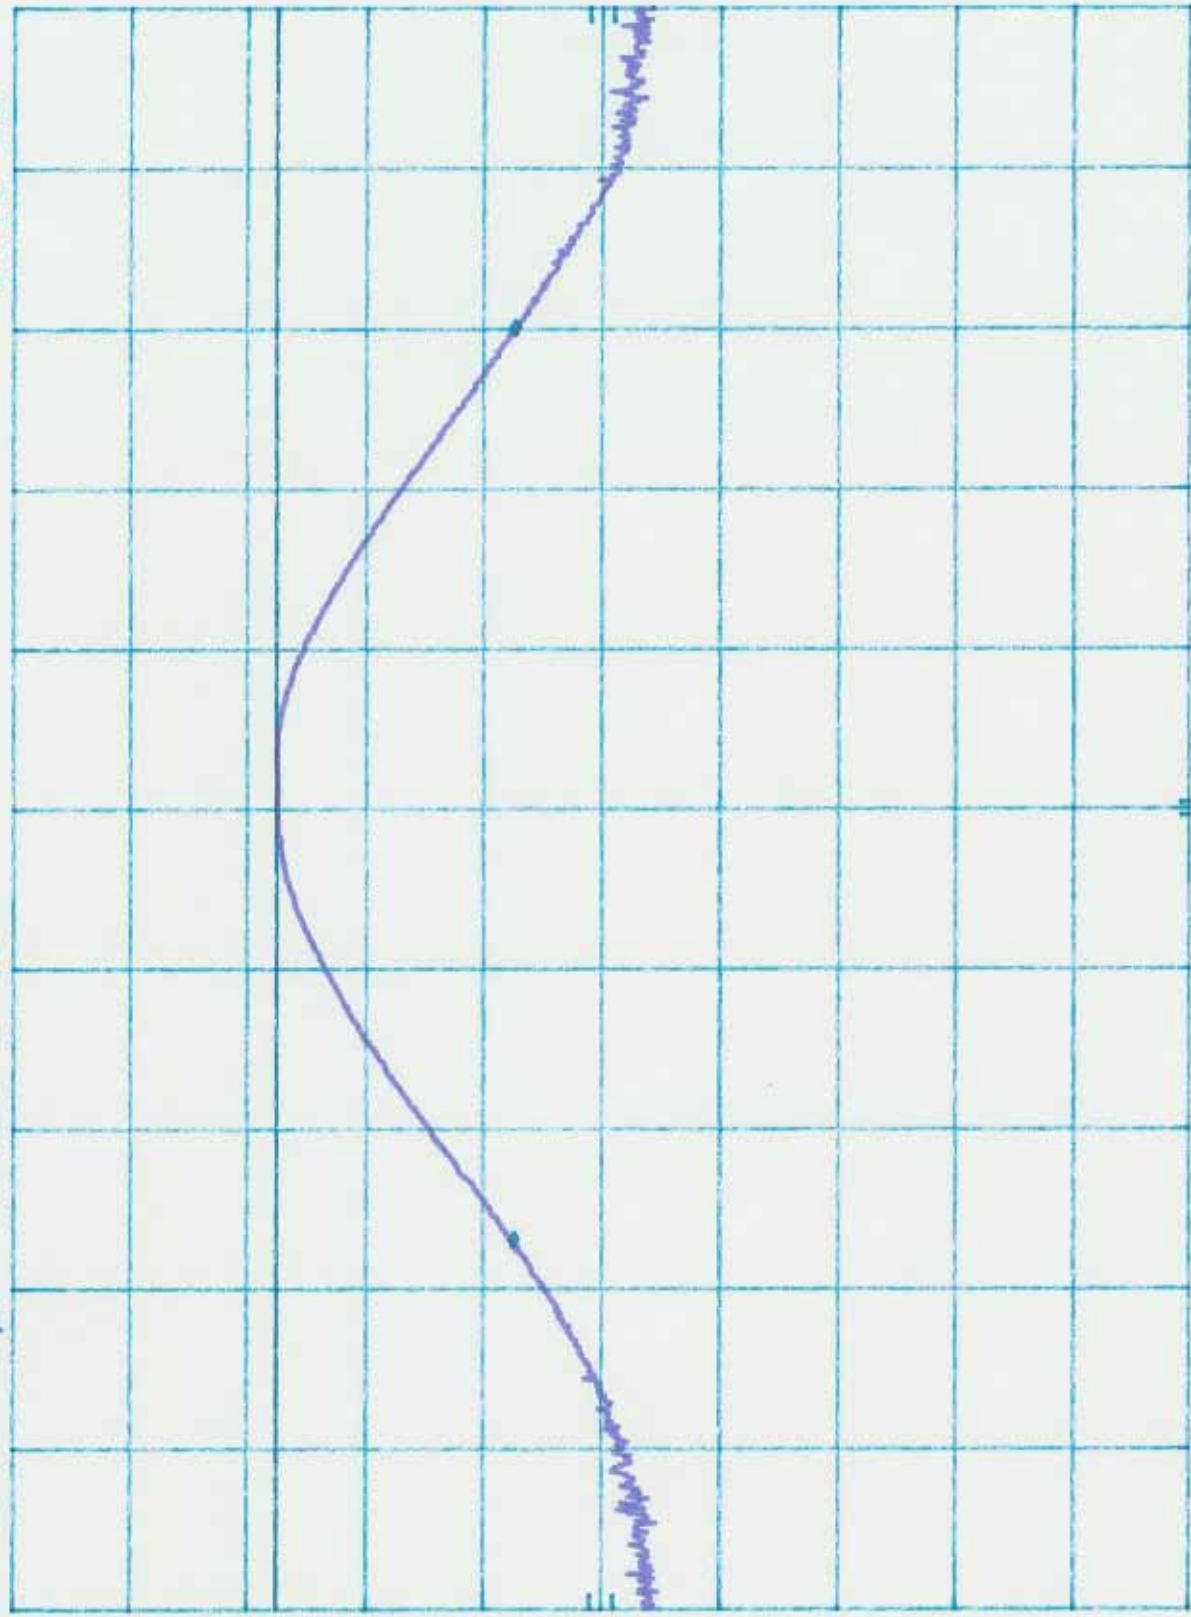

CENTER 107.900 MHZ
RES BW 30 KHZ

VBW 30 KHZ

SPAN 200 KHZ
SWP 100 msec

APPENDIX

B

System Under Test Description

SYSTEM COMPONENTS

DEVICE TYPE: EUT, XM RADIO MODEL# ROADYXT, RADIO ID# PR36D0CX
SATELLITE RECEIVER/ FM TRANSMITTER

DEVICE TYPE: EUT, XM RADIO MOBILE DOCK
18950410123 P4

DEVICE TYPE: EUT, XM RADIO HOME DOCK
19050120051 P4

DEVICE TYPE: EUT, XM RADIO AC POWER SUPPLY, MODEL# SMPS5V2A-XM

DEVICE TYPE: EUT, XM RADIO SATELLITE RADIO ANTENNA (MOBILE USE)

DEVICE TYPE: EUT, XM RADIO SATELLITE RADIO ANTENNA (HOME USE)

INTERFACE CABLES

DEVICE TYPE: HOME ANTENNA
SHIELD: COAX
LENGTH: 7 METERS
CONNECTOR TYPE: DEDICATED TO COAXIAL PLUG
PORT: ANTENNA IN ON HOME DOCKING STATION

DEVICE TYPE: MOBILE ANTENNA
SHIELD: COAX
LENGTH: 7 METERS
CONNECTOR TYPE: DEDICATED TO COAXIAL PLUG
PORT: ANTENNA IN ON MOBILE DOCKING STATION

AC LINE CORDS

DEVICE TYPE: POWER SUPPLY (AC SIDE)
SHIELD: NO
LENGTH: N/A
CONNECTOR TYPE: 2 PIN POLARIZED WALL PLUG

DEVICE TYPE: POWER SUPPLY (DC SIDE)
SHIELD: NO
LENGTH: 8 FEET
CONNECTOR TYPE: DEDICATED TO MINI COAXIAL PLUG TO EITHER DOCK

APPENDIX

C

Measurement Protocol

The test methodology followed during the collection of the data included within this technical report was ANSI C63.4:1992.

The EUT was powered with (120) VAC / (60) Hz during the collection of data included within.

The data is compared to the FCC Part 15 Class B limits.

The "EMI" instrumentation is capable of calculating the final emission level based on the following formula:

Level at the receiver (dB μ V) + Antenna Correction Factor (dB/M) + Cable Loss (dB) - Preamp Gain (dB) = Actual Level in dB μ V/M.

The sample calculation below is based on the actual test data collected:

Observed Level		63.5	dB μ V	
ACF	+	8.7	dB/M	
Cable Loss	+	1.4	dB	
Preamp Gain	-	<u>26.0</u>	dB	
Actual Level		47.6	dB μ V/M	@ 88.7 MHz

Please have a company official review this report and sign.
