



**VERIFICATION OF COMPLIANCE
 FCC Part 15B / IC Verification**

Manufacturer Name & Address:

Sirius XM Satellite Radio, Inc.
 3161 S.W. 10th Street
 Deerfield Beach, FL 33442

Date of Testing:

October 1-14, 2008

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

0809261431.RS2


TRADE NAME:	Sirius XM
U.S. RESPONSIBLE PARTY	Sirius XM Satellite Radio, Inc.
Address:	3161 S.W. 10th Street Deerfield Beach, FL 33442
Contact Person:	Beejay Jolayemi
Contact Telephone Number:	202-680-4288

EUT Type: Satellite Radio Receiver with FM Transmitter
Model: SXMIR1
Product Name: Sportster RCi (iPnP)
FCC ID: RS2SPRCI
IC Cert No: 5697A-SPRCI
FCC Rule Part(s): FCC Part 15 Subpart B, Part 2 (Verification)
IC Rule Part(s): ICES-003, RSS-Gen, RSS-210
FCC Classification: FCC Class B Digital Device
IC Classification: Class B Digital Device/Receiver
Test Procedure: ANSI C63.4-2003 / CISPR22 (ICES-003)

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 and CISPR22 (ICES-003) (See Test Report). These measurements were performed with no deviation from the standards.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

NVLAP accreditation does not constitute any product endorsement by NVLAP or any agency of the United States Government. PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


 Randy Ortanez
 President








Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter	Page 1 of 30	

TABLE OF CONTENTS

FCC Class B MEASUREMENT REPORT.....	3
1.0 INTRODUCTION.....	4
1.1 EVALUATION PROCEDURE.....	4
1.2 SCOPE.....	4
1.3 PCTEST TEST LOCATION.....	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION.....	5
2.2 OPERATION MODE.....	5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	5
3.0 DESCRIPTION OF TEST.....	6
3.1 CONDUCTED EMISSIONS.....	6
3.2 RADIATED EMISSIONS.....	7
4.0 SAMPLE CALCULATIONS.....	8
4.1 CONDUCTED EMISSION MEASUREMENT SAMPLE CALCULATION.....	8
4.2 RADIATED EMISSION MEASUREMENT SAMPLE CALCULATION.....	8
5.0 TEST EQUIPMENT CALIBRATION DATA.....	9
6.0 ENVIRONMENTAL CONDITIONS.....	10
7.0 TEST DATA.....	11
7.1 SUMMARY.....	11
7.2 EMISSION MEASUREMENTS FOR TEST CONFIGURATION # 1 AND 2.....	12
7.3 EMISSION MEASUREMENTS FOR TEST CONFIGURATION # 3.....	20
7.4 EMISSION MEASUREMENTS FOR TEST CONFIGURATION # 4.....	24
7.5 EMISSION MEASUREMENTS FOR TEST CONFIGURATION # 5.....	27
8.0 CONCLUSION.....	30

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 2 of 30



MEASUREMENT REPORT

FCC Part 15B / IC RSS-GEN



§ 2.1033 General Information

APPLICANT: Sirius XM Satellite Radio, Inc.
APPLICANT ADDRESS: 3161 S.W. 10th Street
 Deerfield Beach, FL 33442,
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): FCC Part 15 Subpart B, Part 2 (Verification)
IC RULE PART(S): RSS-Gen Receiver
MODEL: SXMIR1
EUT TYPE: Satellite Radio Receiver with FM Transmitter
Test Device Serial No.: N/A Production Pre-Production Engineering
FCC CLASSIFICATION: FCC Class B Digital Device
IC CLASSIFICATION: Class B Digital Device/Receiver
DATE(S) OF TEST: October 1-14, 2008



Test Methodology

Radiated and conducted measurements were taken using the methods and procedures described in ANSI C63.4-2003. Radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility / NVLAP Accreditation

Conducted and radiated tests were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunication, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter	Page 3 of 30	

1.0 INTRODUCTION

1.1 Evaluation Procedure

The evaluation of the Sportster RCi was performed as described in the XM New Product Certification test plan dated August 12, 2008. The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) was used in the measurement of radiated and conducted emissions from the **Sirius XM Satellite Radio Receiver with FM Transmitter**.

Deviation from measurement procedure.....None

1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

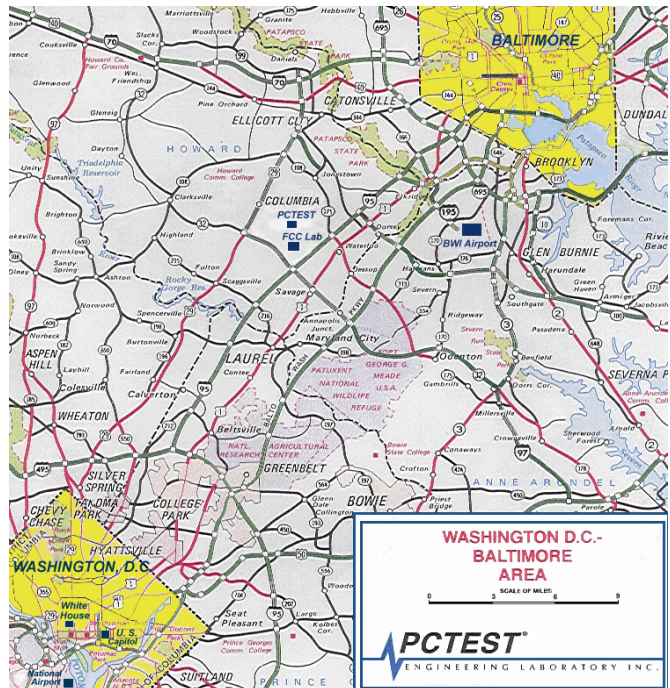


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 4 of 30

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Sirius XM Satellite Radio Receiver with FM Transmitter**. The test data contained in this report pertains only to the emissions due to the digital circuitry of the EUT. The iPNP is powered via 12 Vdc provided to the car cradle.

Model	Description
Sirius XM SXMIR1	Satellite Radio Receiver with FM Transmitter

Table 2-1. EUT Equipment Description

2.2 Operation Mode



The Sirius XM Satellite Radio Receiver with FM Transmitter Model: SXMIR1 was connected to the cradle in order to record all of the necessary measurements. Three separate test configurations were examined for radiated emission compliance to section 15.109 using the vehicle cradle and the XM receiver. The following are the configurations investigated:

- Test Configuration #1: iPNP with Home Cradle – Conducted Emissions
- Test Configuration #2: iPNP with Home Cradle – Radiated Emissions
- Test Configuration #3: iPNP with Car cradle and FM Direct Adapter
- Test Configuration #4: iPNP with Car cradle and Cassette Adapter
- Test Configuration #5: iPNP with Car cradle and Audio Out Cable

Please see Section 7.0 and the test setup photographs for more information on the test setup.

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter	Page 5 of 30	

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions

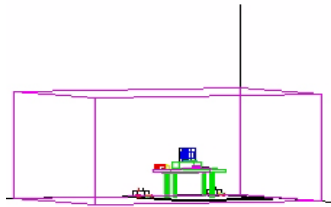


Figure 3-1. Shielded Enclosure Line-Conducted Test Facility

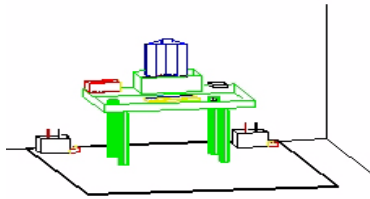


Figure 3-2. Line Conducted Emission Test Set-Up

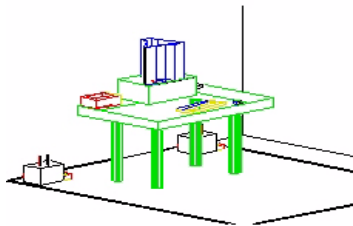


Figure 3-3. Wooden Table & Bonded LISNs

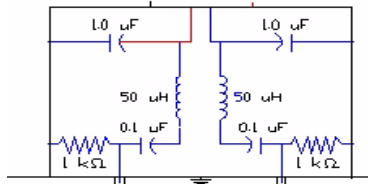


Figure 3-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see *Figure 3-1*). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see *Figure 3-2*). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see *Figure 3-3*). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see *Figure 3-4*). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

Model: SXMIR1	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15B / IC VERIFICATION TEST REPORT	SIRIUS SATELLITE RADIO	Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter	Page 6 of 30	

3.2 Radiated Emissions

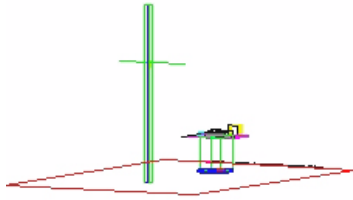


Figure 3-5. 3-Meter Test Site

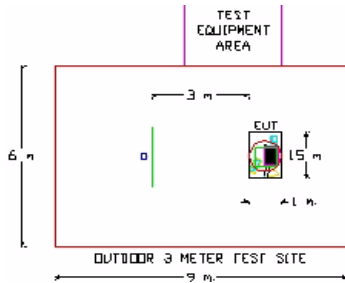


Figure 3-6. Dimensions of Outdoor Test Site

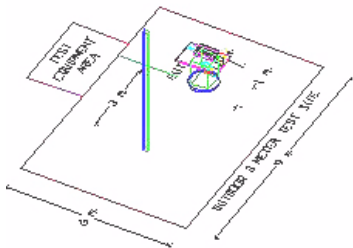


Figure 3-7. Turntable and System Setup

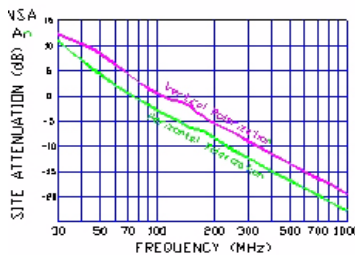


Figure 3-8. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3-5). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3-6). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

Model: SXMIR1	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15B / IC VERIFICATION TEST REPORT	SIRIUS SATELLITE RADIO	Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter	Page 7 of 30	

4.0 SAMPLE CALCULATIONS

4.1 Conducted Emission Measurement Sample Calculation

@ 20.3 MHz

Class B limit	= 60.0 dB μ V (Quasi-peak limit)
Reading	= - 57.8 dBm (calibrated quasi-peak level)
Convert to dB μ V	= - 57.8 + 107 = 49.2 dB μ V
Margin	= 49.2 - 60.0 = - 10.8 dB
	= 10.8 dB below limit

4.2 Radiated Emission Measurement Sample Calculation



@ 66.7 MHz

Class B limit	= 100 μ V/m = 40.0 dB μ V/m
Reading	= - 76.0 dBm (calibrated level)
Convert to dB μ V	= - 76.0 + 107 = 31.0 dB μ V
Antenna Factor + Cable Loss	= 5.8 dB/m
Total	= 36.8 dB μ V/m
Margin	= 36.8 - 40.0 = - 3.2 dB
	= 3.2 dB below limit

Note:

$$\text{Level}_{[\text{dB}\mu\text{V}]} = 20 \log_{10} (\text{Level}_{[\mu\text{V}/\text{m}]})$$

$$\text{Level}_{[\text{dB}\mu\text{V}]} = \text{Level}_{[\text{dBm}]} + 107$$



Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 8 of 30

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Calibration Date	Cal Interval	Calibration Due	Serial No.
-	No.165	(30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	11713A	Attenuation/Switch Driver	12/13/07	Annual	12/13/08	3439A02645
Agilent	8447D	Broadband Amplifier	N/A		N/A	1937A03348
Agilent	8447D	Broadband Amplifier	N/A		N/A	2443A01900
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	12/13/07	Annual	12/12/08	3008A00985
Agilent	85650A	Quasi-Peak Adapter	3/13/08	Annual	3/13/09	2043A00301
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	12/13/07	Annual	12/13/08	3638A08713
Agilent	8566B	Opt. 462 Impulse Bandwidth	12/13/07	Annual	12/12/08	3701A22204
Agilent	8591A	(9kHz-1.8GHz) Spectrum Analyzer	8/19/08	Annual	8/19/09	3144A02458
Agilent	E4407B	ESA Spectrum Analyzer	3/13/08	Annual	3/13/09	US39210313
Agilent	E4448A	(3Hz-50GHz) Spectrum Analyzer	1/24/08	Annual	1/24/09	US42510244
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/8/07	Biennial	3/8/09	MY45470194
Compliance Design	Roberts	Dipole Set	11/9/07	Biennial	11/8/09	146
Compliance Design	Roberts	Dipole Set	11/9/07	Biennial	11/8/09	147
Emco	6502	Active Loop Antenna (10k - 30 MHz)	11/6/07	Annual	1/5/09	267
Emco	3121C-DB4	Dipole Antenna	1/23/07	Biennial	1/22/09	00023951
Pasternack	PE7000-6	6 dB Attenuator	N/A		N/A	
Solar Electronics	8012-50-R-24-BNC	LISN	11/8/07	Biennial	11/8/09	0310233
Sunol	JB5	Bi-Log 3m Antenna (>1GHz)	5/25/07	Biennial	5/24/09	A051107

Table 5-1. Annual Test Equipment Calibration Schedule



Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter	Page 9 of 30	

6.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C.

The relative humidity is controlled within range of 10% to 75%.

The atmospheric pressure is controlled within the range 86-106kPa (860-1060mbar).

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 10 of 30

7.0 TEST DATA

7.1 Summary

Test Date(s): October 1-14, 2008

Test Engineer: Baron Chan

FCC Part 15 Section	IC RSS-Gen Section	Description	Result
15.107	7.2.2	Conducted Emissions	PASS
15.109	7.2.3	Radiated Emissions	PASS

Table 7-1. Summary of Test Results

Frequency [MHz]	FCC Field Strength Limit at 3 Meters [dBμV/m]
30 – 88	100
88 – 216	150
216 – 960	200
> 960	500

Table 7-2. 3-Meter Radiated Limits (FCC CFR Title 47 Section 15.109)

Frequency [MHz]	IC Field Strength Limit at 3 Meters [dBμV/m]
30 – 230	40.46
230 – 1000	47.46



Table 7-3. 3-Meter Radiated Limits (ICES-003 Section 5.5)

Sample Calculation:

- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB]

Notes:

- AFCL = Antenna Factor [dB] + Cable Loss [dB]
- Industry Canada 10 meter to 3 meter Limit Conversion = 10 meter Limit + 10.46 [dB]

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 11 of 30

7.2 Emission Measurements for test configuration # 1 and 2

7.2.1 Test Setup Description

The Sirius XM Model: SXMIR1 was connected to the home cradle with an XM antenna and an AC power supply. Additionally, a set of external speakers was connected to the Audio Out port of the home cradle while the EUT was receiving live XM and Sirius broadcast signal and was configured for a maximum audio output level. A distance of 10 cm was maintained between the edges of all items on the test setup table.

The test setup was tested for conducted and radiated emissions. Photographs of equipment and cable placement can be found in the Test Setup Photographs.

7.2.2 Test Support Equipment – Test Configuration # 1 and 2

The following table lists the units used for the test configuration #1 and #2.

1	Audiovox Home Cradle	P/N:	136-4060	S/N:	080600004513640600
2	XM Home Antenna	6.1m	Coax cable	S/N:	
3	Phihing AC Power Supply	Model:	PSM08A-052	S/N:	11235920P05
4	Creative Speakers with audio cable	Model:	GCS300	S/N:	SW036B2319000293
5	Creative AC power supply	Model:	DV-9440	S/N:	N/A

Table 7-4. Test Support Equipment for Test Configuration # 1 and 2

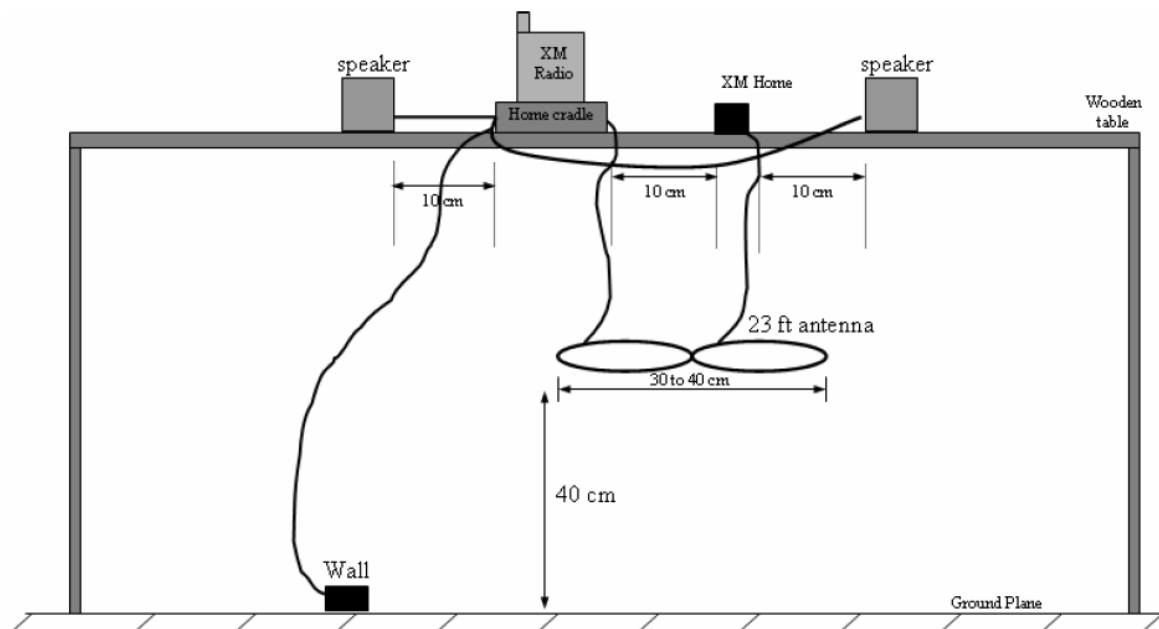




Figure 9: Test Setup Configuration # 1

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 12 of 30

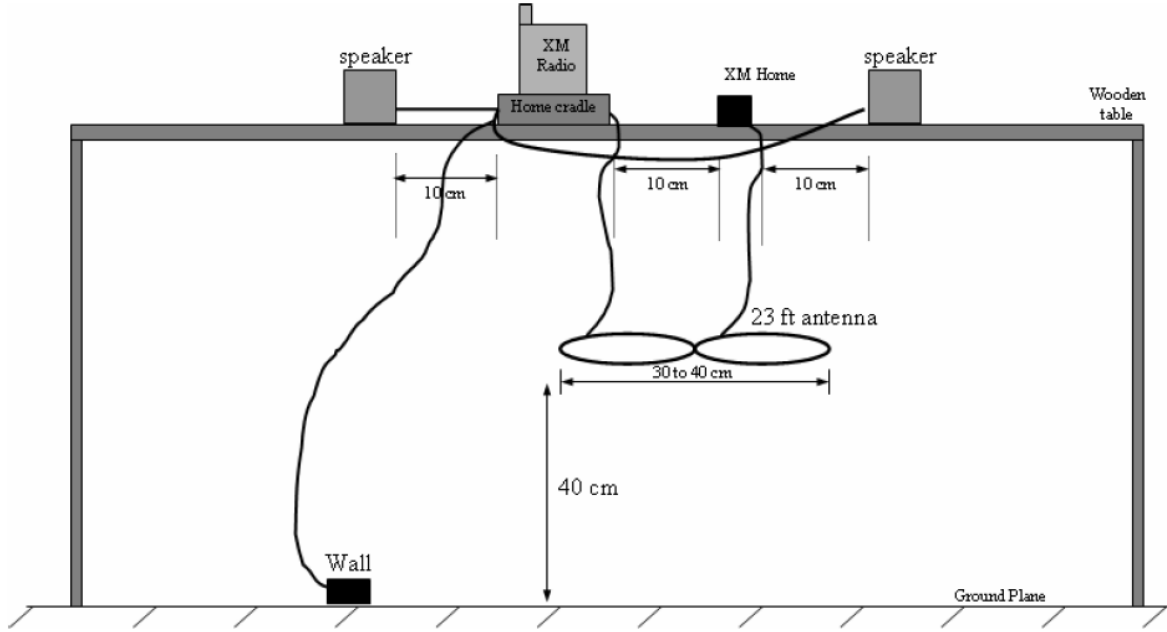




Figure 10: Test Setup Configuration # 2

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 13 of 30



7.2.3 Radiated Measurement Data – Test Configuration # 1
§15.109, RSS-Gen (7.2.3)

Frequency [MHz]	Level [dBm]	AFCL [dB]	PoI [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	FCC Field Strength Limit [dB μ V/m]	Margin [dB]
52.10	-92.62	9.47	V	1.40	0	23.85	40.00	-16.15
63.40	-84.24	10.17	V	1.40	30	32.93	40.00	-7.07
82.20	-94.00	10.95	V	1.60	20	23.95	40.00	-16.05
152.70	-87.43	14.04	H	1.00	0	33.61	43.52	-9.91
359.40	-91.19	17.43	H	1.00	290	33.24	46.02	-12.78
527.60	-101.28	20.80	V	1.40	220	26.51	46.02	-19.51

Table 7-5. Radiated Measurements at 3-meters– FCC Part 15 – Live XM

Frequency [MHz]	Level [dBm]	AFCL [dB]	PoI [H/V]	Height [m]	Azimuth [degrees]	Corrected IC Field Strength [dB μ V/m]	IC Field Strength Limit [dB μ V/m]	Margin [dB]
52.10	-92.62	9.47	V	1.40	0.00	23.85	40.46	-16.61
63.40	-84.24	10.17	V	1.40	30.00	32.93	40.46	-7.53
82.20	-94.00	10.95	V	1.60	20.00	23.95	40.46	-16.51
152.70	-87.43	14.04	H	1.00	0.00	33.61	40.46	-6.85
359.40	-91.19	17.43	H	1.00	290.00	33.24	47.46	-14.22
527.60	-101.28	20.80	V	1.40	220.00	26.51	47.46	-20.95

Table 7-6. Radiated Measurements at 3-meters– ICES-003 – Live XM



Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 14 of 30

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	FCC Field Strength Limit [dB μ V/m]	Margin [dB]
60.90	-93.44	10.03	V	1.30	50	23.59	40.00	-16.41
82.00	-93.90	10.95	V	1.20	300	24.05	40.00	-15.95
110.80	-97.98	12.12	V	1.30	240	21.13	43.52	-22.39
168.30	-89.92	14.14	V	1.50	0	31.22	43.52	-12.30
288.00	-98.44	15.35	V	1.50	90	23.91	46.02	-22.11
359.20	-93.09	17.42	V	1.30	90	31.33	46.02	-14.69

Table 7-7. Radiated Measurements at 3-meters– FCC Part 15 – Live Sirius

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Corrected IC Field Strength [dB μ V/m]	IC Field Strength Limit [dB μ V/m]	Margin [dB]
60.90	-93.44	10.03	V	1.30	50	23.59	40.46	-16.87
82.00	-93.90	10.95	V	1.20	300	24.05	40.46	-16.41
110.80	-97.98	12.12	V	1.30	240	21.13	40.46	-19.33
168.30	-89.92	14.14	V	1.50	0	31.22	40.46	-9.24
288.00	-98.44	15.35	V	1.50	90	23.91	47.46	-23.55
359.20	-93.09	17.42	V	1.30	90	31.33	47.46	-16.13


Table 7-8. Radiated Measurements at 3-meters– ICES-003 – Live Sirius

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 15 of 30

7.2.4 Line Conducted Measurement Data – Test Configuration # 2
§15.107, RSS-Gen (7.2.2)

Company : Sirius XM Satellite Radio, Inc.
 Model Number : SXMIR1
 Standard : FCC Part 15B / ICES-003 Class B

Power Source : AC120V/60Hz
 Tested Date : 10/08/2008
 Note : Home Cradle Configuration
 XM Service

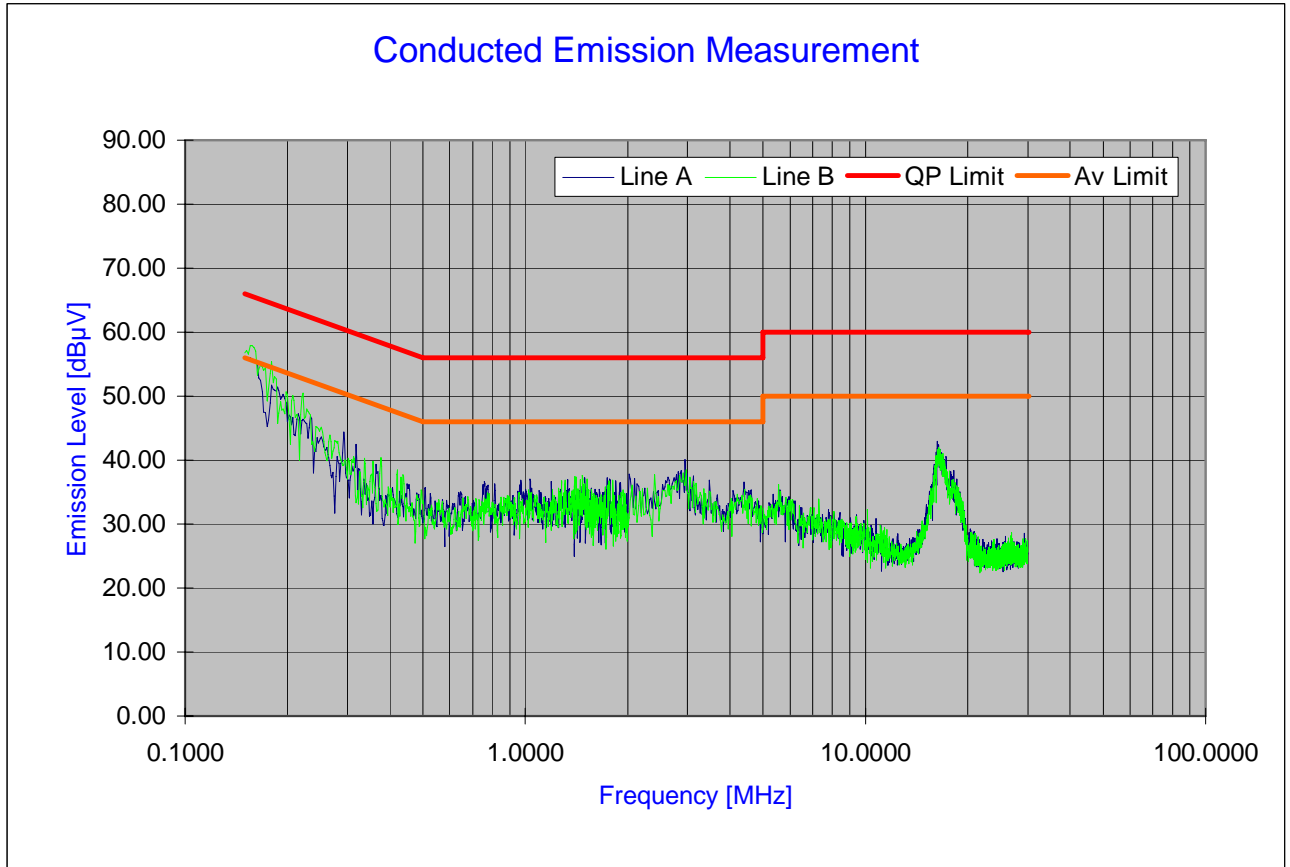



Ver.1.1 ©PCTEST 2006.08

Plot 7-1. Line-Conducted Test Plot for Test Configuration # 2 – XM Service

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.107 of the Title 47 CFR and in RSS-Gen (7.2.2) for Industry Canada.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter	Page 16 of 30	



Line Conducted Measurement Data – Test Configuration # 2
§15.107, RSS-Gen (7.2.2)

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.157	8.16	52.76	65.60	-12.84	37.31	55.60	-18.29
2	A	0.189	7.98	47.82	64.07	-16.25	31.54	54.07	-22.53
3	A	0.220	7.86	42.79	62.82	-20.03	27.16	52.82	-25.66
4	A	0.242	7.85	42.86	62.81	-19.95	27.97	52.81	-24.84
5	A	0.295	7.59	35.16	60.38	-25.22	23.24	50.38	-27.14
6	A	0.308	7.57	33.73	60.04	-26.31	22.76	50.04	-27.28
7	A	1.748	7.37	29.77	56.00	-26.23	20.17	46.00	-25.83
8	A	2.028	7.39	29.91	56.00	-26.09	19.90	46.00	-26.10
9	A	2.967	7.44	32.54	56.00	-23.46	20.27	46.00	-25.73
10	A	16.328	7.94	37.04	60.00	-22.96	22.19	50.00	-27.81
11	B	0.159	8.15	54.01	65.53	-11.52	38.12	55.53	-17.41
12	B	0.188	7.99	47.92	64.13	-16.21	33.21	54.13	-20.92
13	B	0.189	7.99	47.77	64.11	-16.34	33.08	54.11	-21.03
14	B	0.224	7.84	43.57	62.66	-19.09	29.74	52.66	-22.92
15	B	0.226	7.84	43.22	62.61	-19.39	29.25	52.61	-23.36
16	B	0.244	7.77	38.79	61.95	-23.16	27.04	51.95	-24.91
17	B	0.249	7.76	38.36	61.80	-23.44	26.06	51.80	-25.74
18	B	0.269	7.68	36.49	61.14	-24.65	25.68	51.14	-25.46
19	B	0.359	7.52	30.05	58.75	-28.70	22.00	48.75	-26.75
20	B	2.958	7.44	31.44	56.00	-24.56	20.13	46.00	-25.87

Table 7-9. Line-Conducted Test Data for Test Configuration # 2 – XM Service

Notes:


1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.107 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 17 of 30

7.2.5 Line Conducted Measurement Data – Test Configuration # 2
§15.107, RSS-Gen (7.2.2)

Company : Sirius XM Satellite Radio, Inc.
 Model Number : SXMIR1
 Standard : FCC Part 15B / ICES-003 Class B

Power Source : AC120V/60Hz
 Tested Date : 10/08/2008
 Note : Home Cradle Configuration
 Sirius Service

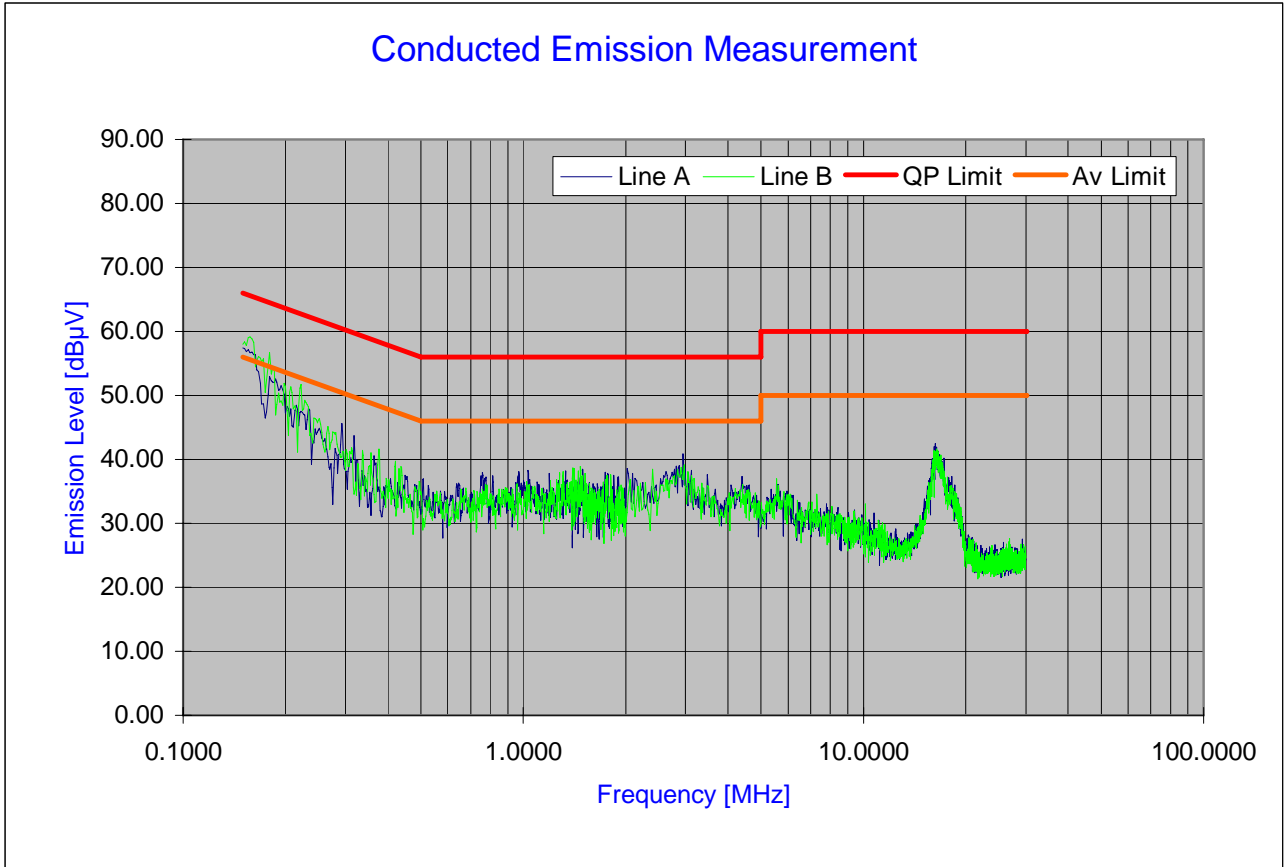



Ver.1.1 ©PCTEST 2006.08

Plot 7-2. Line-Conducted Test Plot for Test Configuration # 2 – Sirius Service

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.107 of the Title 47 CFR and in RSS-Gen (7.2.2) for Industry Canada.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter	Page 18 of 30	



Line Conducted Measurement Data – Test Configuration # 2
§15.107, RSS-Gen (7.2.2)

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBµV]	Limit [dBµV]	Margin [dB]	Average [dBµV]	Limit [dBµV]	Margin [dB]
1	A	0.168	8.16	51.67	65.60	-13.93	36.45	55.60	-19.15
2	A	0.202	7.98	48.23	64.07	-15.84	30.74	54.07	-23.33
3	A	0.227	7.86	43.11	62.82	-19.71	29.77	52.82	-23.05
4	A	0.274	7.85	41.91	62.81	-20.90	30.12	52.81	-22.69
5	A	0.311	7.59	36.74	60.38	-23.64	27.40	50.38	-22.98
6	A	0.338	7.57	32.62	60.04	-27.42	20.78	50.04	-29.26
7	A	1.467	7.37	30.17	56.00	-25.83	18.69	46.00	-27.31
8	A	2.185	7.39	30.85	56.00	-25.15	17.44	46.00	-28.56
9	A	2.690	7.44	31.44	56.00	-24.56	19.88	46.00	-26.12
10	A	16.544	7.94	35.80	60.00	-24.20	24.43	50.00	-25.57
11	B	0.174	8.15	54.01	65.53	-11.52	38.12	55.53	-17.41
12	B	0.180	7.99	47.92	64.13	-16.21	33.21	54.13	-20.92
13	B	0.194	7.99	47.77	64.11	-16.34	33.08	54.11	-21.03
14	B	0.233	7.84	43.57	62.66	-19.09	29.74	52.66	-22.92
15	B	0.231	7.84	43.22	62.61	-19.39	29.25	52.61	-23.36
16	B	0.256	7.77	38.79	61.95	-23.16	27.04	51.95	-24.91
17	B	0.289	7.76	38.36	61.80	-23.44	26.06	51.80	-25.74
18	B	0.314	7.68	36.49	61.14	-24.65	25.68	51.14	-25.46
19	B	0.367	7.52	30.05	58.75	-28.70	22.00	48.75	-26.75
20	B	16.844	7.94	34.77	56.00	-21.23	23.70	46.00	-22.30

Table 7-10. Line-Conducted Test Data for Test Configuration # 2 – Sirius Service

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.107 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 19 of 30

7.3 Emission Measurements for test configuration # 3

7.3.1 Test Setup Description



The Sirius XM Satellite Radio Receiver with FM Transmitter was connected to the vehicle cradle powered by a 12V battery through a cigarette lighter vehicle adapter. An XM FM Direct Adapter was connected through the “FM In” port to a FM aerial antenna, through the “FM Out” port to a 75Ω terminator, and to an XM antenna. A 3’x4’ ground plane was used in the setup to replicate the conditions in which an FM antenna is installed in a vehicle. The EUT was configured to receive live XM broadcast signal and was configured for a maximum audio output level. A distance of 10 cm was maintained between the edges of all items on the setup table. The test was then repeated while the device was set to receive live Sirius service.

The test setup was tested for radiated emissions only. Photographs of equipment and cable placement can be found in the Test Setup Photographs.

7.3.2 Test Support Equipment – Test Configuration # 3

1	iPNP Car Cradle	P/N:	N/A	S/N:	N/A
2	5.0V DC vehicle power adapter	1.05m	Unshielded cable with ferrite bead on one end	S/N:	N/A
3	FM Direct Adapter Box with 75Ω termination	Model:	XM-7700-0022	S/N:	0801000091
4	Sirius XM Antenna	7.01m	Shielded coax antenna cable	S/N:	N/A
5	FM aerial antenna	Model:	N/A	S/N:	N/A
6	EverStart Lawn/Garden 12V AC battery	Model:	N/A	S/N:	N/A

Table 7-11. Test Support Equipment for Test Configuration # 3

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 20 of 30

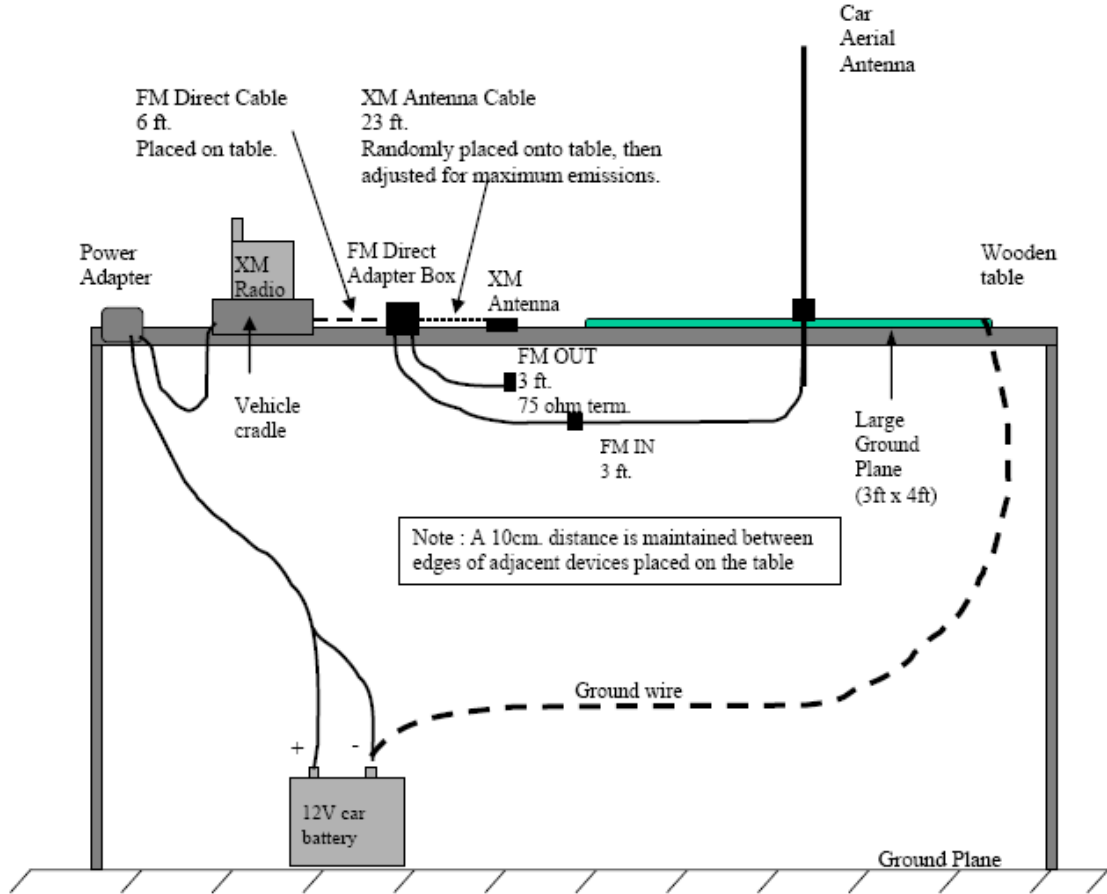




Figure 11: Test Setup Configuration # 3

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 21 of 30



7.3.3 Radiated Measurement Data – Test Configuration # 3
§15.109, RSS-Gen (7.2.3)

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	FCC Field Strength Limit [dB μ V/m]	Margin [dB]
55.80	-81.78	9.72	V	1.30	90	34.94	40.00	-5.06
95.30	-82.97	11.34	V	1.30	210	35.37	43.52	-8.15
184.90	-94.55	14.23	V	1.40	80	26.67	43.52	-16.85
216.30	-85.08	14.06	V	1.40	80	35.98	46.02	-10.04
299.20	-87.11	15.82	V	1.40	90	35.71	46.02	-10.31
531.40	-88.47	20.86	V	1.40	170	39.39	46.02	-6.63

Table 7-12. Radiated Measurements at 3-meters – FCC Part 15B – XM Service

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	IC Field Strength [dB μ V/m]	IC Field Strength Limit [dB μ V/m]	Margin [dB]
55.80	-81.78	9.72	V	1.30	90	34.94	40.46	-5.52
95.30	-82.97	11.34	V	1.30	210	35.37	40.46	-5.09
184.90	-94.55	14.23	V	1.40	80	26.67	40.46	-13.79
216.30	-85.08	14.06	V	1.40	80	35.98	40.46	-4.48
299.20	-87.11	15.82	V	1.40	90	35.71	47.46	-11.75
531.40	-88.47	20.86	V	1.40	170	39.39	47.46	-8.07

Table 7-13. Radiated Measurements at 3-meters – ICES-003 – XM Service



Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 22 of 30

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	FCC Field Strength Limit [dB μ V/m]	Margin [dB]
55.70	-87.53	9.71	V	1.00	20	29.18	40.00	-10.82
97.20	-87.15	11.40	V	1.20	0	31.24	43.52	-12.28
165.50	-89.02	14.12	V	1.00	0	32.10	43.52	-11.42
353.60	-91.60	17.28	V	1.00	0	32.68	46.02	-13.34
432.90	-91.96	19.04	H	1.00	350	34.08	46.02	-11.94
480.40	-94.89	19.95	H	1.40	0	32.06	46.02	-13.96

Table 7-14. Radiated Measurements at 3-meters – FCC Part 15B – Sirius Service

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	IC Field Strength [dB μ V/m]	IC Field Strength Limit [dB μ V/m]	Margin [dB]
55.70	-87.53	9.71	V	1.00	20	29.18	40.46	-11.28
97.20	-87.15	11.40	V	1.20	0	31.24	40.46	-9.22
165.50	-89.02	14.12	V	1.00	0	32.10	40.46	-8.36
353.60	-91.60	17.28	V	1.00	0	32.68	47.46	-14.78
432.90	-91.96	19.04	H	1.00	350	34.08	47.46	-13.38
480.40	-94.89	19.95	H	1.40	0	32.06	47.46	-15.40

Table 7-15. Radiated Measurements at 3-meters – ICES-003 – Sirius Service

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 23 of 30

7.4 Emission Measurements for test configuration # 4

7.4.1 Test Setup Description

The Sirius XM Satellite Radio Receiver with FM Transmitter Model: SXMIR1 was connected to the vehicle cradle powered by a 12V battery through a cigarette lighter vehicle adapter. The vehicle cradle was connected to an XM audio cassette adapter and an XM antenna. The EUT was configured to receive live XM broadcast signal and was configured for a maximum audio output level. A distance of 10 cm was maintained between the edges of all items on the setup table. The test was also performed with the device receiving live Sirius signal.

The test setup was tested for radiated emissions only. Photographs of equipment and cable placement can be found in the Test Setup Photographs.

7.4.2 Test Support Equipment – Test Configuration # 4

1	iPNP Car Cradle	P/N:	N/A	S/N:	N/A
2	5.0V DC vehicle power adapter	1.05m	Unshielded cable with ferrite bead on one end	S/N:	N/A
3	XM cassette adapter	1.12m	Unshielded audio cable	S/N:	13642930
4	XM Antenna	7.01m	Shielded coax antenna cable	S/N:	N/A
5	EverStart Lawn/Garden 12V AC battery	Model:	N/A	S/N:	N/A

Table 7-16. Test Support Equipment for Test Configuration # 4

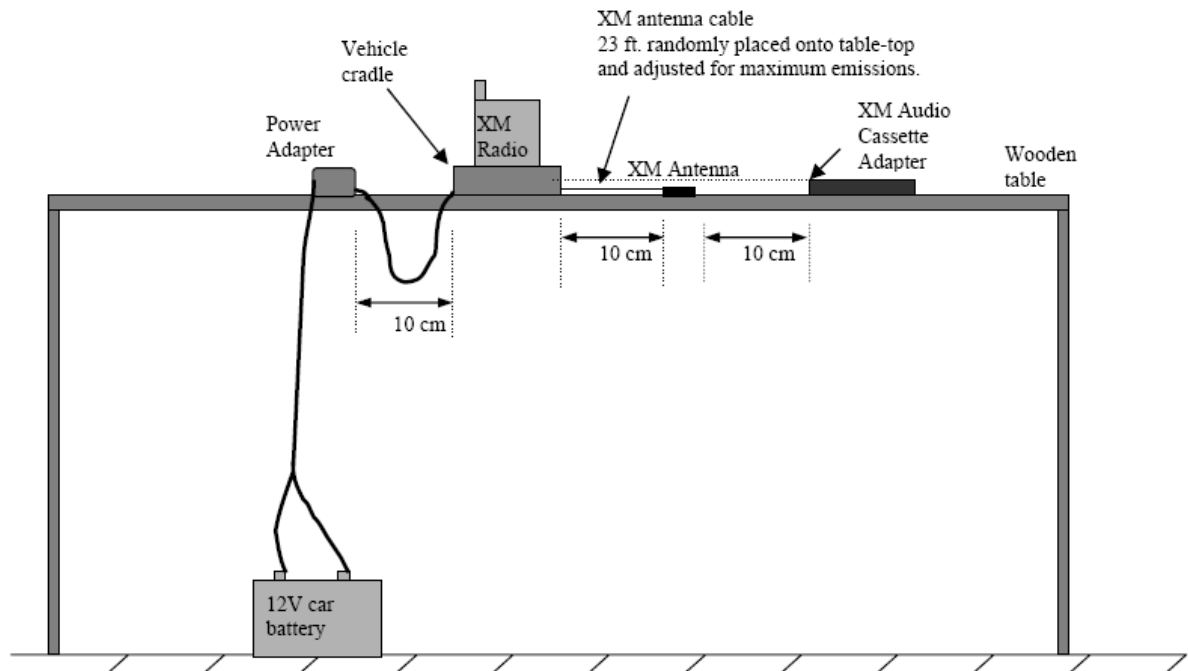




Figure 12: Test Setup Configuration # 4

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 24 of 30



7.4.3 Radiated Measurement Data – Test Configuration # 4
§15.109, RSS-Gen (7.2.3)

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	FCC Field Strength Limit [dB μ V/m]	Margin [dB]
67.10	-86.65	10.38	V	1.10	30	30.73	40.00	-9.27
108.20	-98.19	11.97	V	1.20	0	20.78	43.52	-22.74
167.50	-91.22	14.13	V	1.20	240	29.91	43.52	-13.61
216.20	-95.14	14.06	H	1.30	108	25.92	46.02	-20.10
352.30	-98.60	17.25	V	1.50	0	25.65	46.02	-20.37
432.30	-97.66	19.03	V	1.20	0	28.37	46.02	-17.65

Table 7-17. Radiated Measurements at 3-meters – FCC Part 15B – XM Service

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	IC Field Strength [dB μ V/m]	IC Field Strength Limit [dB μ V/m]	Margin [dB]
67.10	-86.65	10.38	V	1.10	30	30.73	40.46	-9.73
108.20	-98.19	11.97	V	1.20	0	20.78	40.46	-19.68
167.50	-91.22	14.13	V	1.20	240	29.91	40.46	-10.55
216.20	-95.14	14.06	H	1.30	108	25.92	40.46	-14.54
352.30	-98.60	17.25	V	1.50	0	25.65	47.46	-21.81
432.30	-97.66	19.03	V	1.20	0	28.37	47.46	-19.09

Table 7-18. Radiated Measurements at 3-meters – ICES-003 – XM Service



Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 25 of 30

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	FCC Field Strength Limit [dB μ V/m]	Margin [dB]
67.40	-88.25	10.39	V	1.40	30	29.14	40.00	-10.86
87.30	-92.89	11.11	V	1.30	20	25.22	40.00	-14.78
167.70	-92.62	14.13	V	1.30	20	28.51	43.52	-15.01
216.50	-98.24	14.05	V	1.30	20	22.82	46.02	-23.21
360.00	-98.59	17.44	V	1.20	20	25.85	46.02	-20.17
432.50	-98.76	19.04	V	1.10	0	27.28	46.02	-18.75

Table 7-19. Radiated Measurements at 3-meters – FCC Part 15B – Sirius Service

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Corrected IC Field Strength [dB μ V/m]	IC Field Strength Limit [dB μ V/m]	Margin [dB]
67.40	-88.25	10.39	V	1.40	30	29.14	40.46	-11.32
87.30	-92.89	11.11	V	1.30	20	25.22	40.46	-15.24
167.70	-92.62	14.13	V	1.30	20	28.51	40.46	-11.95
216.50	-98.24	14.05	V	1.30	20	22.82	40.46	-17.64
360.00	-98.59	17.44	V	1.20	20	25.85	47.46	-21.61
432.50	-98.76	19.04	V	1.10	0	27.28	47.46	-20.18

Table 7-20. Radiated Measurements at 3-meters – ICES-003 – Sirius Service

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 26 of 30

7.5 Emission Measurements for test configuration # 5

7.5.1 Test Setup Description

The Sirius XM Satellite Radio Receiver with FM Transmitter Model: SXMIR1 receiver was connected to the car cradle powered by a 12V battery through a cigarette lighter adapter. The XM antenna was also connected to the car cradle. The EUT was configured to receive live XM broadcast signal and was configured for a maximum audio output level. A distance of 10 cm was maintained between the edges of all items on the setup table. Testing was repeated while receiving live Sirius broadcast.

The test setup was tested for radiated emissions only. Photographs of equipment and cable placement can be found in the Test Setup Photographs.

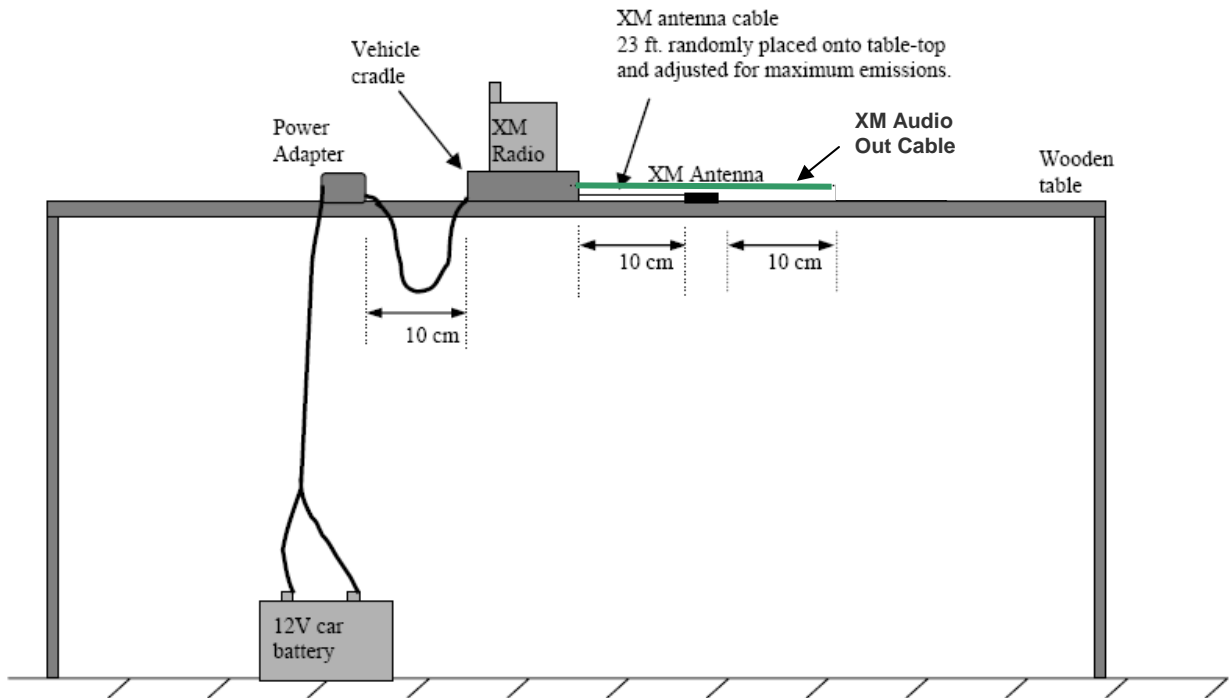




Figure 13: Test Setup Configuration #5

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 27 of 30



7.5.2 Radiated Measurement Data – Test Configuration # 5
§15.109, RSS-Gen (7.2.3)

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	FCC Field Strength Limit [dB μ V/m]	Margin [dB]
55.50	-88.53	9.70	V	1.20	0	28.17	40.00	-11.83
84.70	-93.55	11.03	V	1.30	160	24.49	40.00	-15.51
168.90	-96.42	14.14	V	1.20	160	24.72	43.52	-18.80
360.00	-97.49	17.44	V	1.30	140	26.95	46.02	-19.07
456.70	-100.12	19.51	V	1.10	170	26.39	46.02	-19.63
708.80	-99.84	23.55	V	1.10	170	30.71	46.02	-15.31

Table 7-21. Radiated Measurements at 3-meters – FCC Part 15B – XM Service

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Corrected IC Field Strength [dB μ V/m]	IC Field Strength Limit [dB μ V/m]	Margin [dB]
55.50	-88.53	9.70	V	1.20	0	28.17	40.46	-12.29
84.70	-93.55	11.03	V	1.30	160	24.49	40.46	-15.97
168.90	-96.42	14.14	V	1.20	160	24.72	40.46	-15.74
360.00	-97.49	17.44	V	1.30	140	26.95	47.46	-20.51
456.70	-100.12	19.51	V	1.10	170	26.39	47.46	-21.07
708.80	-99.84	23.55	V	1.10	170	30.71	47.46	-16.75

Table 7-22. Radiated Measurements at 3-meters – ICES-003 – XM Service



Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 28 of 30

Frequency [MHz]	Level [dBm]	AFCL [dB]	PoI [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	FCC Field Strength Limit [dB μ V/m]	Margin [dB]
56.20	-79.73	9.74	V	1.30	340	37.01	40.00	-2.99
95.10	-83.42	11.34	V	1.20	30	34.92	43.52	-8.61
113.10	-86.48	12.25	V	1.20	60	32.77	43.52	-10.76
181.60	-89.11	14.21	V	1.20	170	32.10	43.52	-11.42
216.40	-87.64	14.05	V	1.00	180	33.42	46.02	-12.60
300.80	-90.91	15.88	V	1.40	180	31.97	46.02	-14.05

Table 7-23. Radiated Measurements at 3-meters – FCC Part 15B – Sirius Service



Frequency [MHz]	Level [dBm]	AFCL [dB]	PoI [H/V]	Height [m]	Azimuth [degrees]	Corrected IC Field Strength [dB μ V/m]	IC Field Strength Limit [dB μ V/m]	Margin [dB]
56.20	-79.73	9.74	V	1.30	340	37.01	40.46	-3.45
95.10	-83.42	11.34	V	1.20	30	34.92	40.46	-5.54
113.10	-86.48	12.25	V	1.20	60	32.77	40.46	-7.69
181.60	-89.11	14.21	V	1.20	170	32.10	40.46	-8.36
216.40	-87.64	14.05	V	1.00	180	33.42	40.46	-7.04
300.80	-90.91	15.88	V	1.40	180	31.97	47.46	-15.49

Table 7-24. Radiated Measurements at 3-meters – ICES-003 – Sirius Service

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 29 of 30

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Satellite Radio Receiver with FM Transmitter Model: SXMIR1** has been verified to comply with the requirements specified in Part 15 (§15.107 and §15.109) and Part 2 of the FCC Rules as well as RSS-Gen/ICES-003 for Industry Canada.

Model: SXMIR1		FCC Pt. 15B / IC VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: 0809261431.RS2	Test Dates: October 1-14, 2008	EUT Type: Satellite Radio Receiver with FM Transmitter		Page 30 of 30