
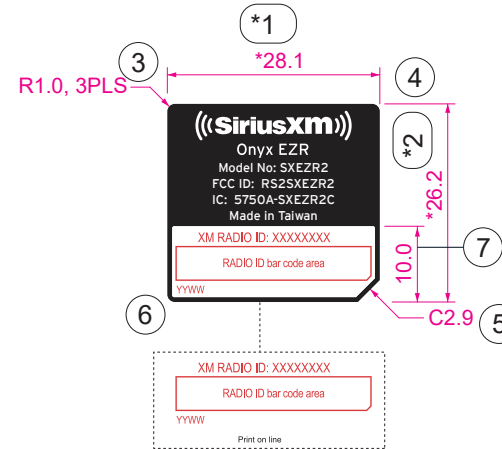


REFERENCE

REVISIONS

REV	DESCRIPTION	DATE	APPROVE
A	NEW RELEASE	05/03/23	ALVIN PENG

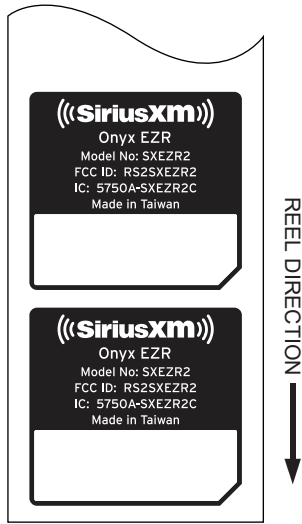

NOTES:

- MATERIAL: 消銀龍 (金利寶 HTLSMI50(EB)J(網紋)) t=0.05
- FINISH: PET (金利寶 TPATM(T)(30)J), t=0.026, ONLINE PRINT
- ADHESIVE: 壓克力背膠, t=0.024, adhesion > 1.6KG
- COLOR:
 - Background color= SILVER MATTE
 - Print= Black
- TEMPERATURE RESISTANT= (5°C ~ 125°C)
- PASTED OBJECT MATERIAL: ABS+PC
- ROLLED.
- PRINTING TOLERANCE:
 - <30mm ~ 120mm for ±0.3mm, 120~315mm for ±0.5mm, 315 for ±0.8mm
- TEST REQUIREMENTS

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1 附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 		WNC 啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DRAWN SANDY CHEN				05/03/23	
ENGR SANDY CHEN				05/03/23	
APVD ALVIN PENG				05/03/23	
DWG TITLE		LABEL, FCC, IC, SXEZR2, UPS-EZRE			
SIZE	DWG NO.			REV	
A4	4L.UPSEZ.005			A	
SCALE	1/1	SHEET	1 OF 1		