


Vertical

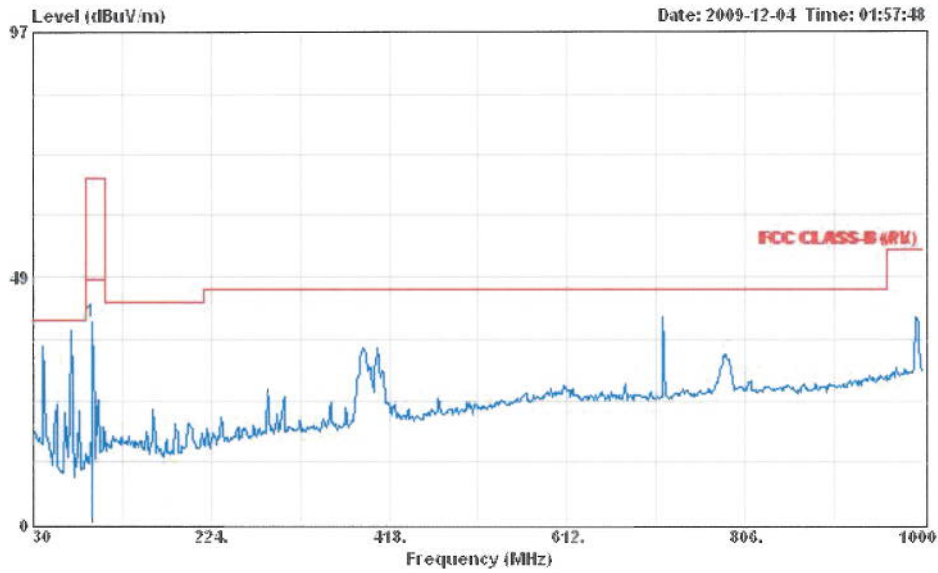


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD MONDEO  
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp		Rnt	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	Remark	Pos	Pos
1	94.990	39.75	-28.25	68.00	55.00	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 180° / Mode 1		


Horizontal

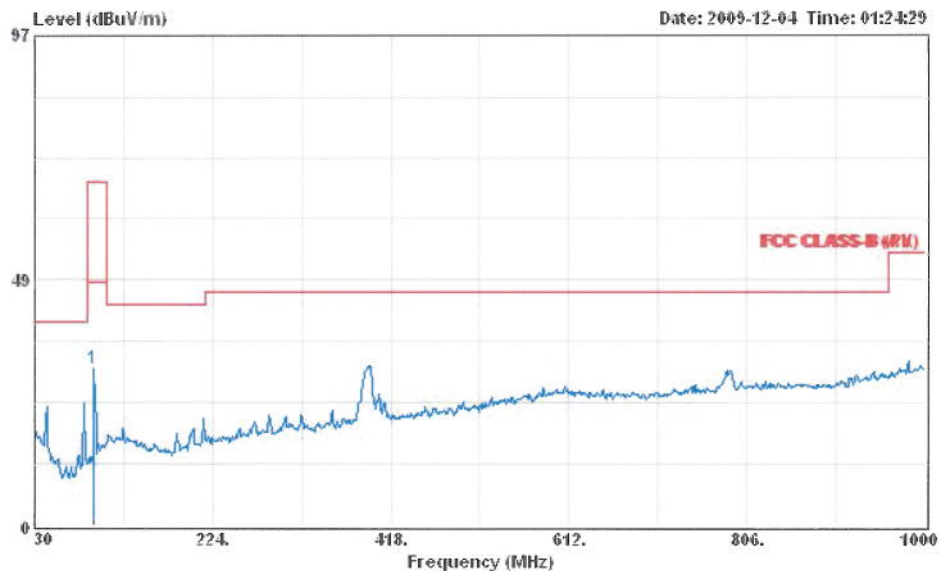

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD MONDEO  
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	30.84	-37.16	68.00	46.09	2.25	10.61	28.11	Peak	---	---

Vertical

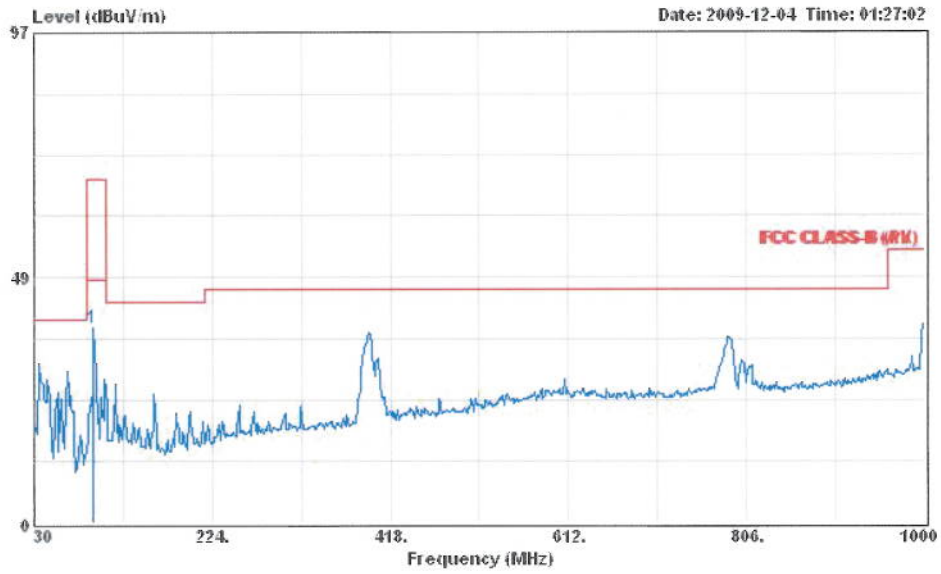


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD MONDEO  
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	38.51	-29.49	68.00	53.76	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 225° / Mode 1		


Horizontal

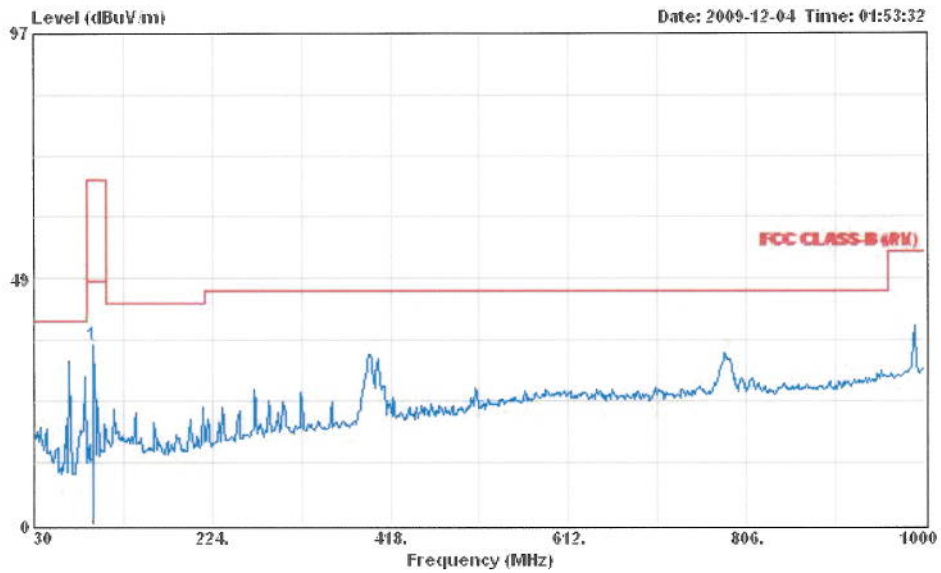

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD MONDEO  
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	35.41	-32.59	68.00	50.66	2.25	10.61	28.11	Peak	---	---

Vertical

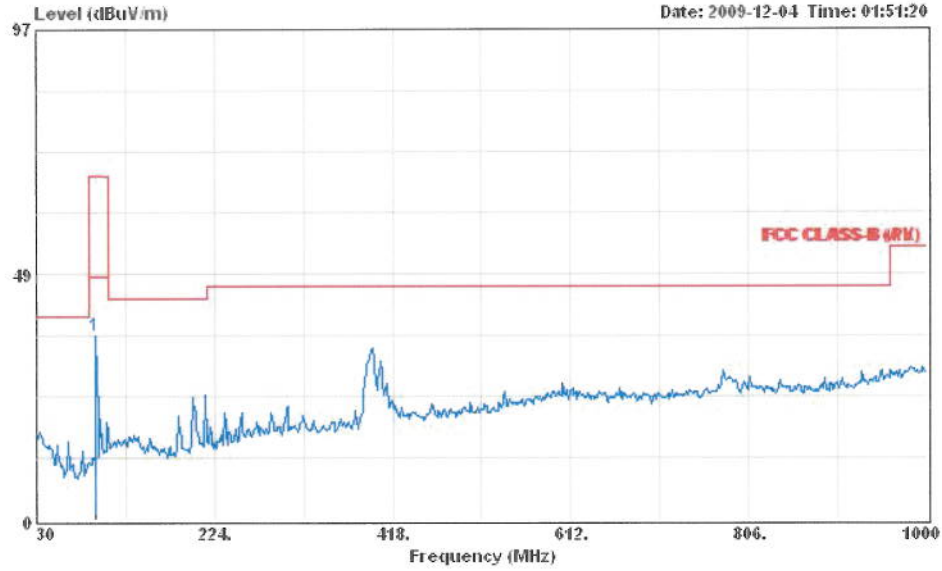


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD MONDEO  
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	36.26	-31.74	68.00	51.51	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 270° / Mode 1		


Horizontal

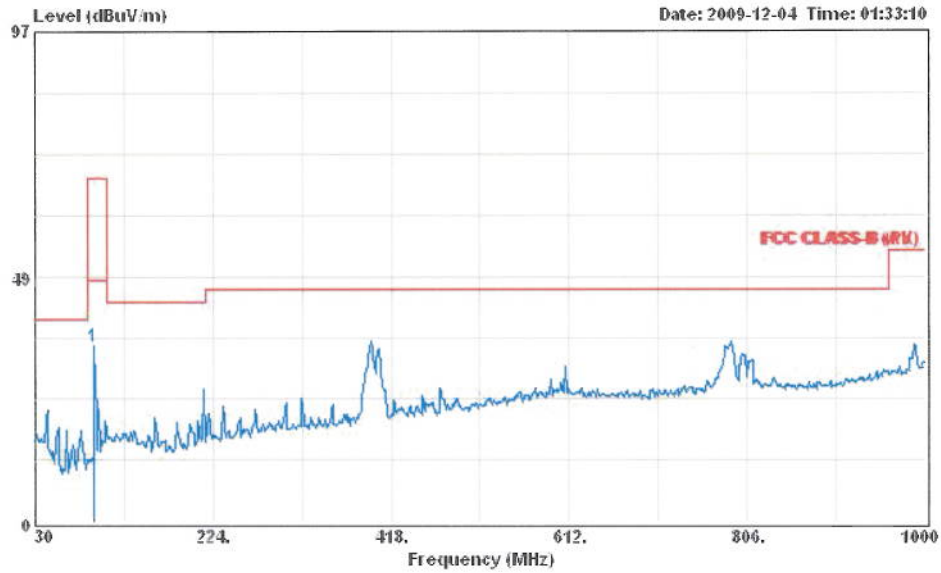

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD MONDEO  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	34.57	-33.43	68.00	49.82	2.25	10.61	28.11	Peak	---	---

Vertical

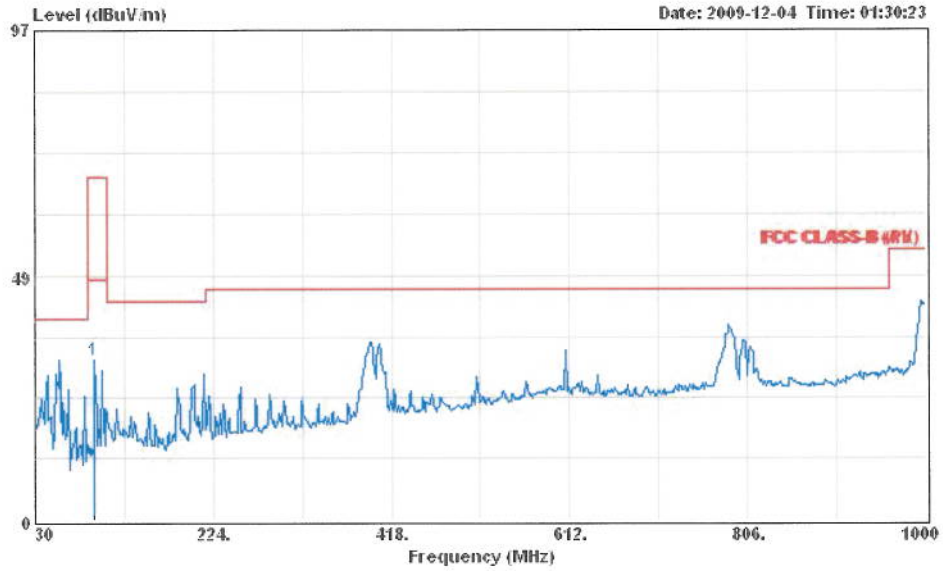


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD MONDEO  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	31.70	-36.30	68.00	46.95	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 315° / Mode 1		

Horizontal

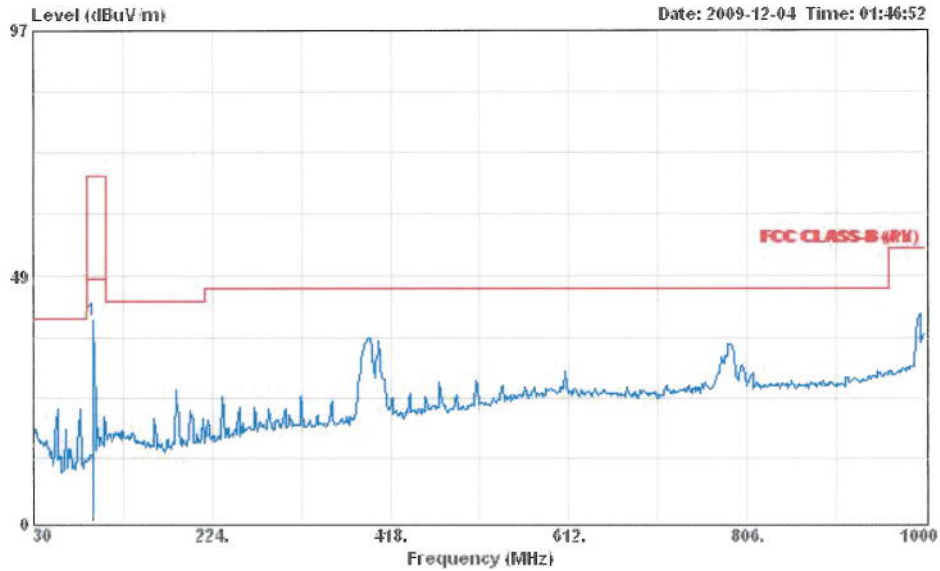


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD MONDEO  
 Memo : 315度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	Loss	Factor	Factor		cm	deg
1	94.990	39.78	-28.22	68.00	55.03	2.25	10.61	28.11	Peak	---	---



Vertical

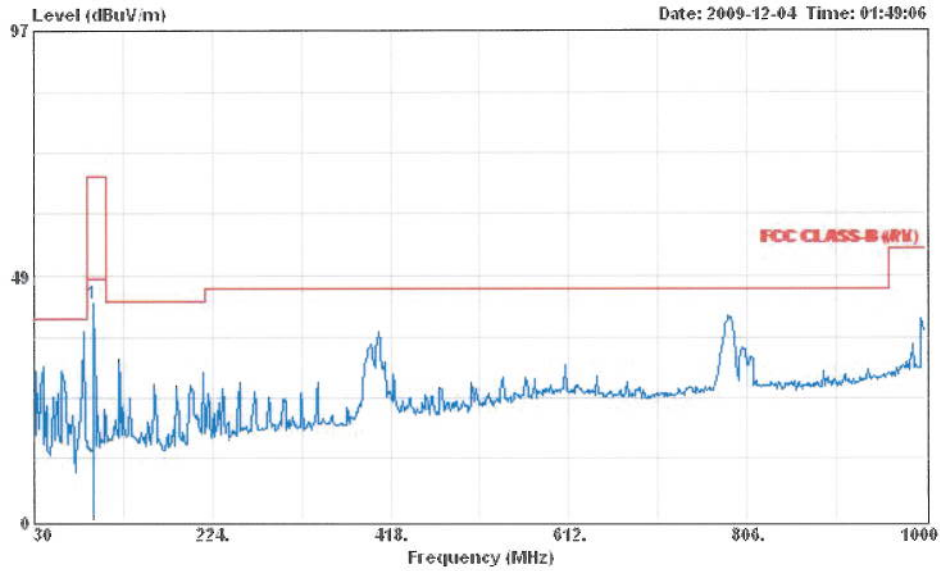


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD MONDEO  
 Memo : 315度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	43.28	-24.72	68.00	58.53	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 0° / Mode 2		


Horizontal

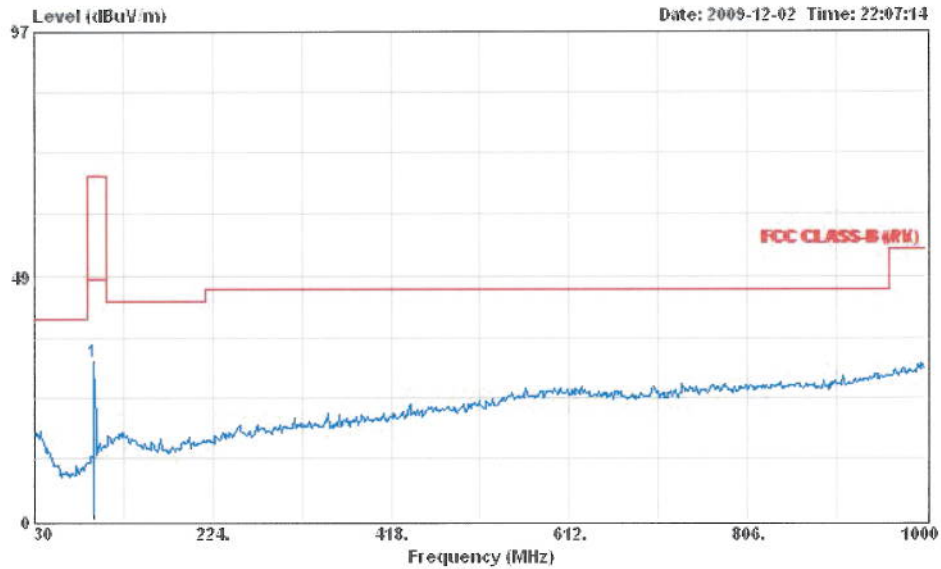

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 0度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	31.42	-36.58	68.00	46.67	2.25	10.61	28.11	Peak	---	---

Vertical

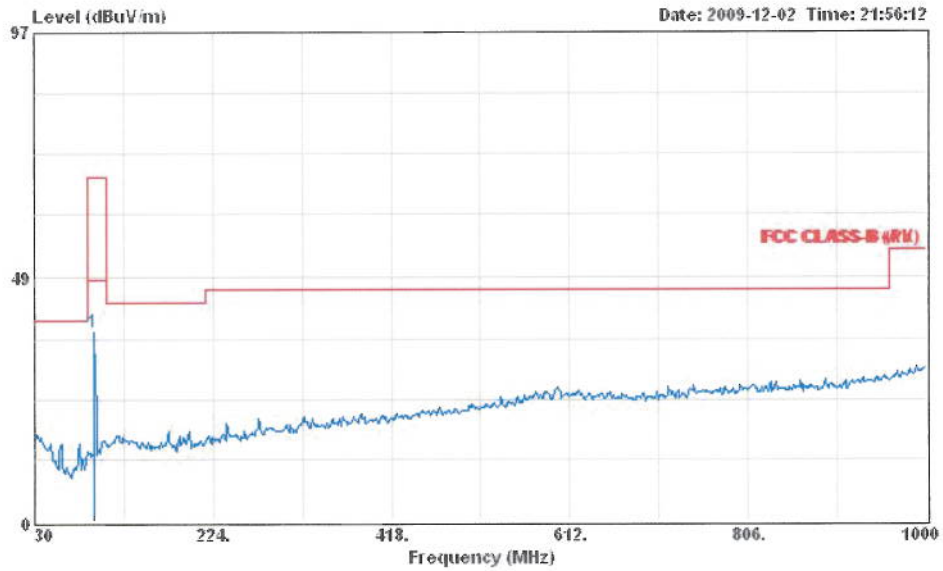


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM969M  
 Memo : TOYOTA COROLLA  
 Memo : 0度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	37.91	-30.09	68.00	53.16	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 45° / Mode 2		


Horizontal

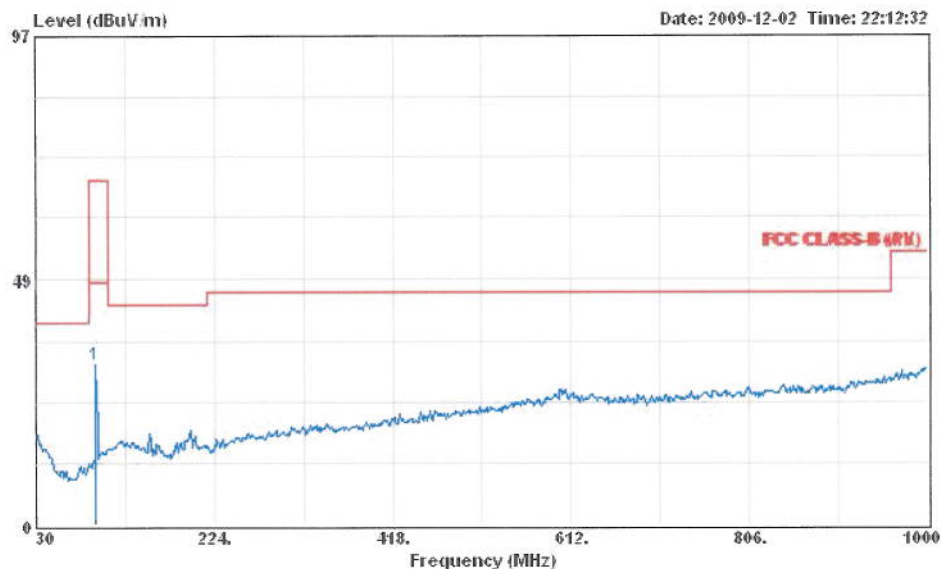

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 45度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	31.96	-36.04	68.00	47.21	2.25	10.61	28.11	Peak	---	---

Vertical

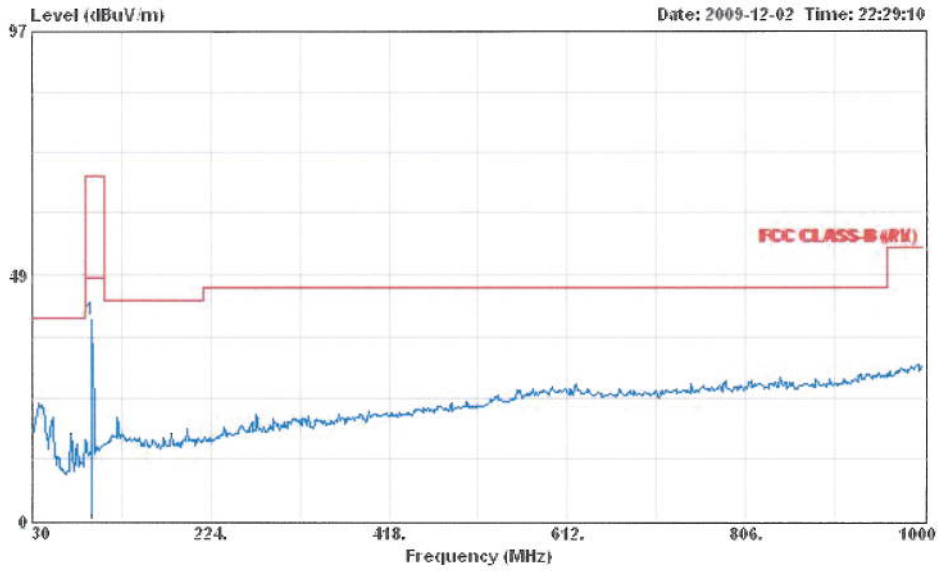


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 45度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	39.59	-28.41	68.00	54.84	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 90° / Mode 2		


Horizontal

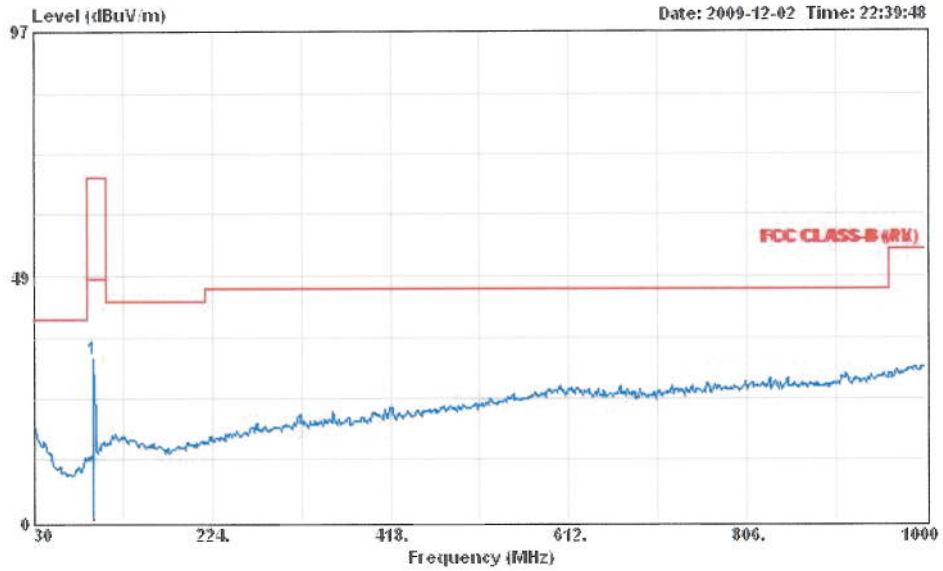

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	32.28	-35.72	68.00	47.53	2.25	10.61	28.11	Peak	---	---

Vertical

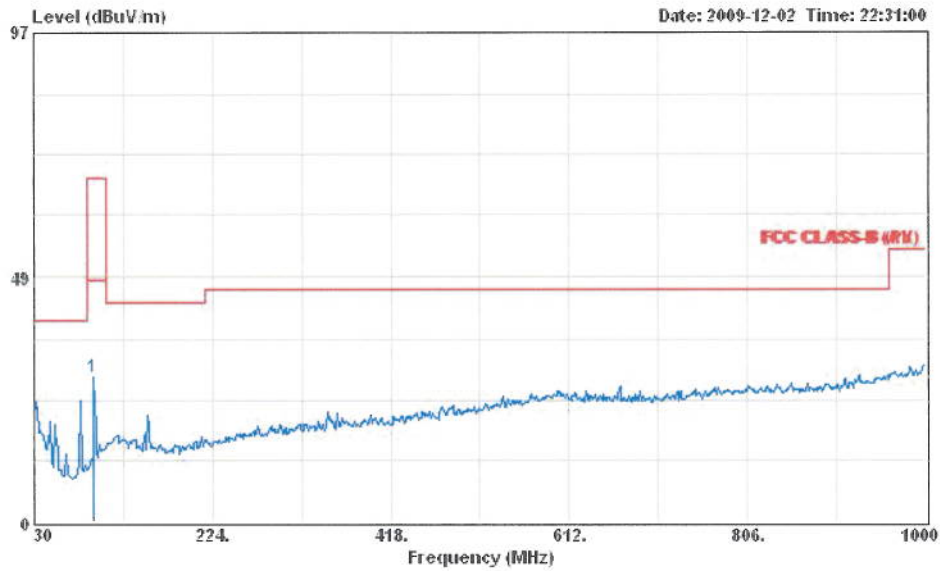


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM969M  
 Memo : TOYOTA COROLLA  
 Memo : 90度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	29.10	-38.90	68.00	44.35	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 135° / Mode 2		

Horizontal

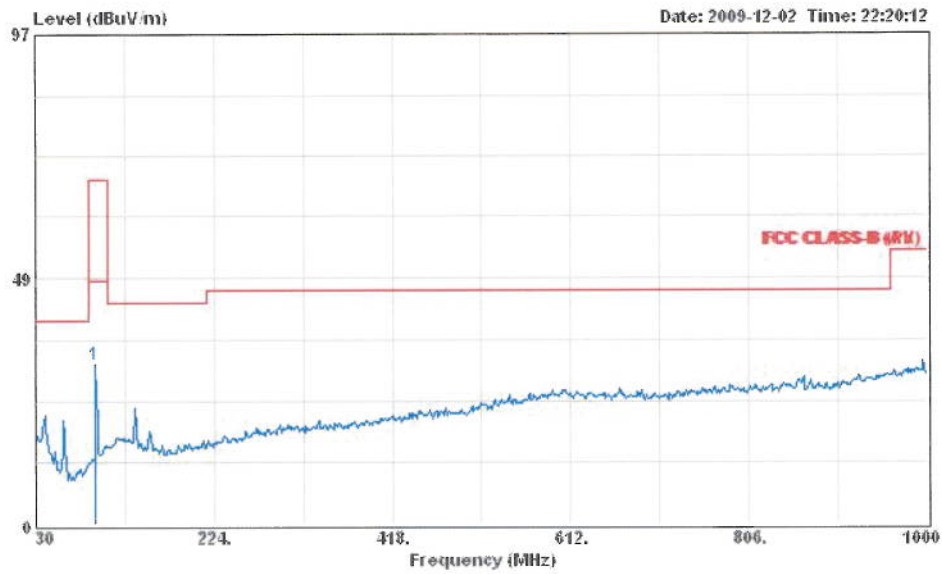


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	31.60	-36.40	68.00	46.85	2.25	10.61	28.11	Peak	---	---




Vertical

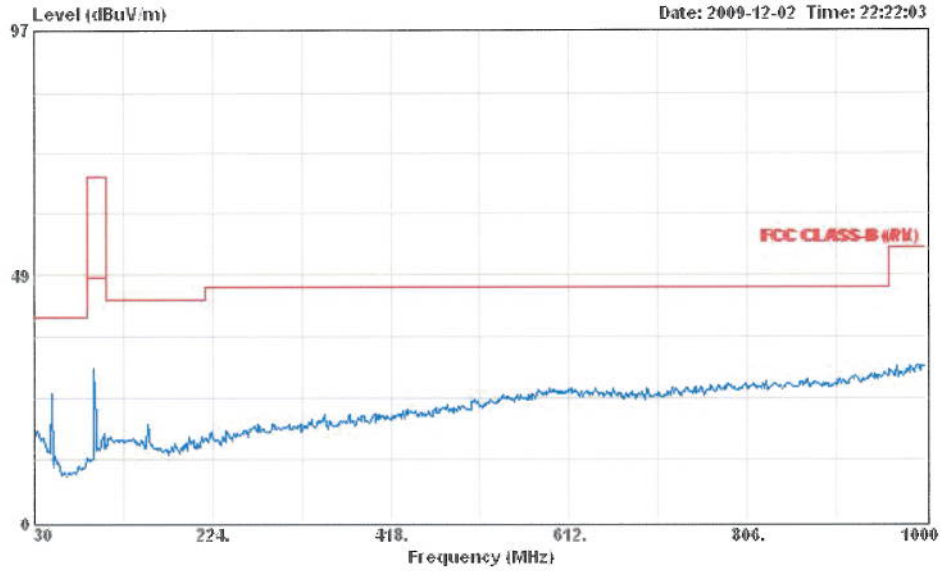

Site : 10CH01-HY  
Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
EUT : Xpress R  
Power :  
model : FM96.9M  
Memo : TOYOTA COROLLA  
Memo : 135度

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 225° / Mode 2		


Horizontal

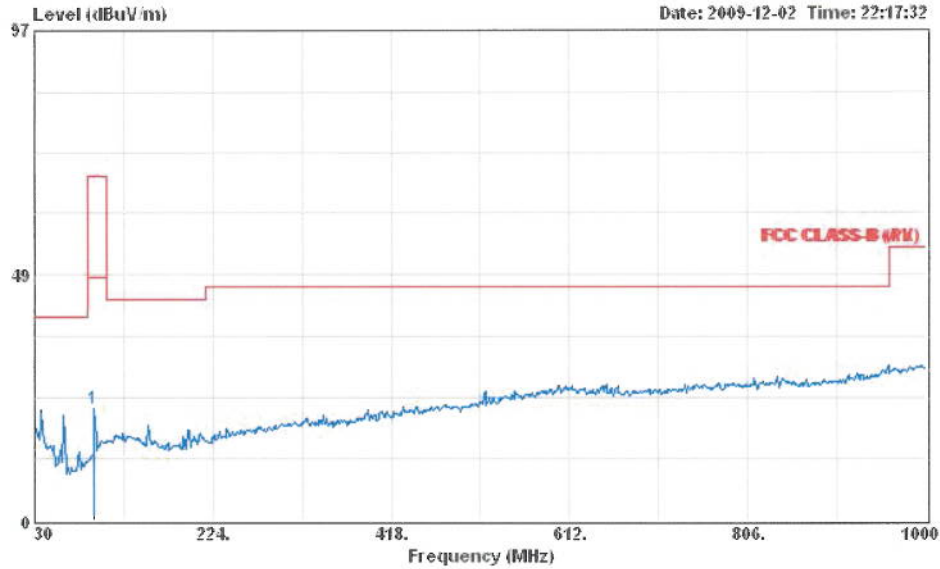

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	21.94	-46.06	68.00	37.19	2.25	10.61	28.11	Peak	---	---


Vertical

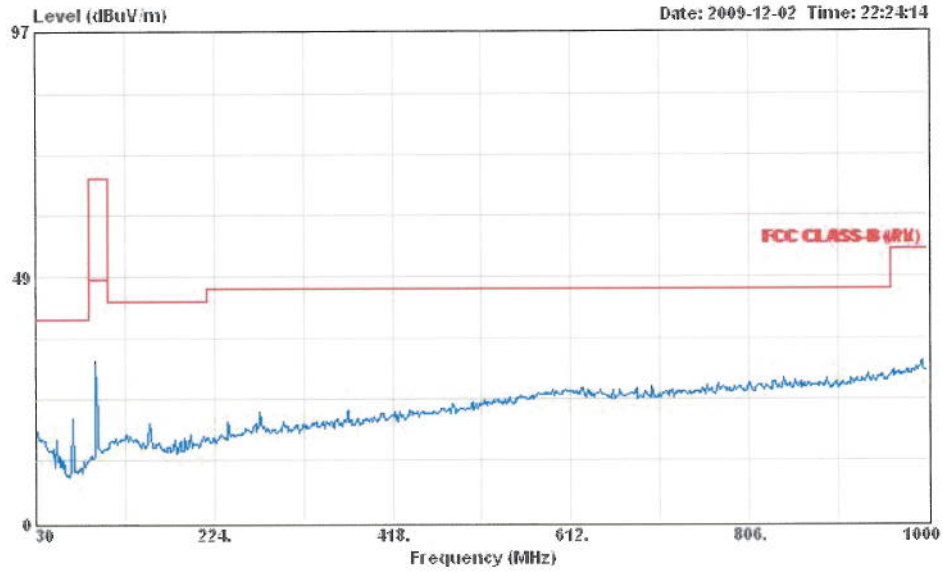

Site : 10CH01-HY  
Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
EUT : Xpress R  
Power :  
model : FM 96.9M  
Memo : TOYOTA COROLLA  
Memo : 225度

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 270° / Mode 2		


Horizontal

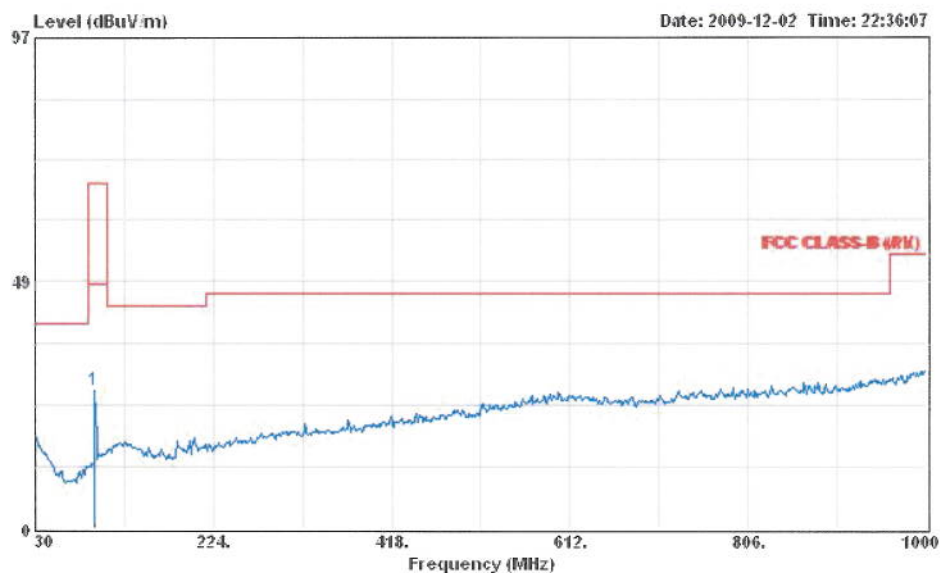

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	27.15	-40.85	68.00	42.40	2.25	10.61	28.11	Peak	---	---

Vertical

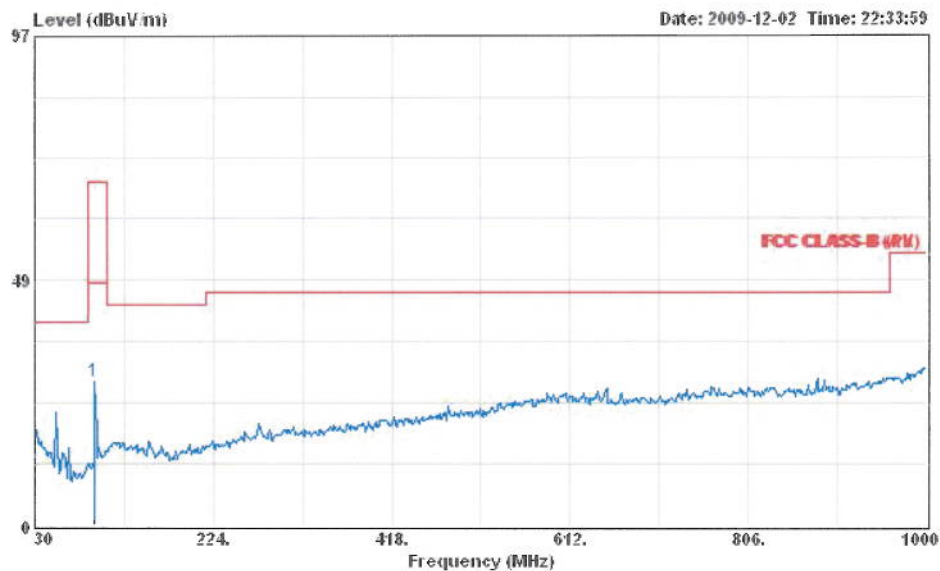


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	28.47	-39.53	68.00	43.72	2.25	10.61	28.11	Peak	---	---


Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 315° / Mode 2		

Horizontal

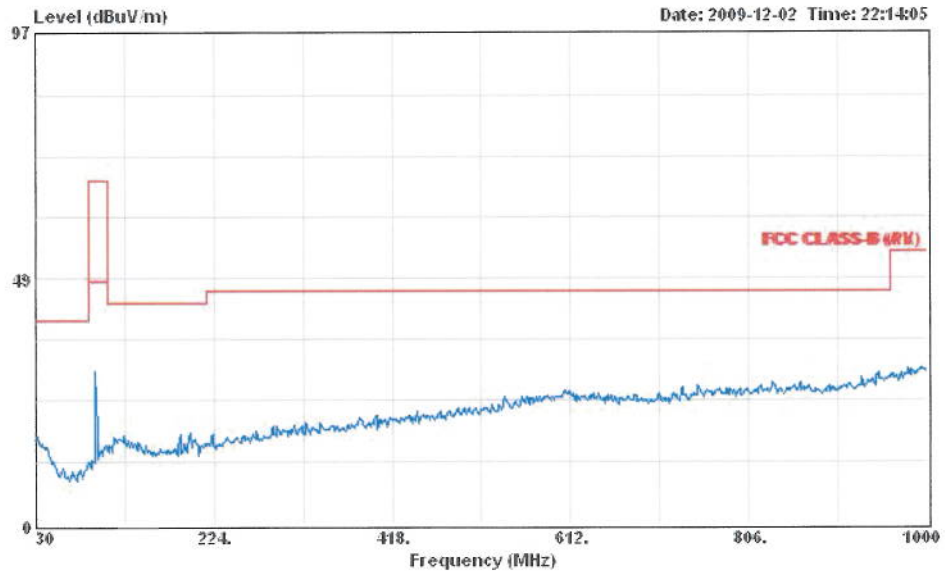

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 315度

Vertical

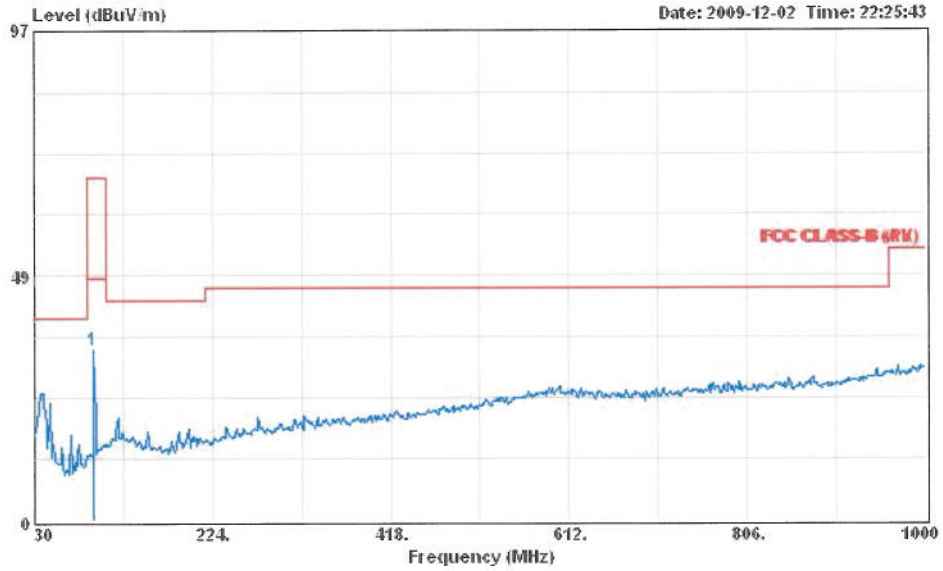


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : TOYOTA COROLLA  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	33.81	-34.19	68.00	49.06	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 0° / Mode 3		

Horizontal

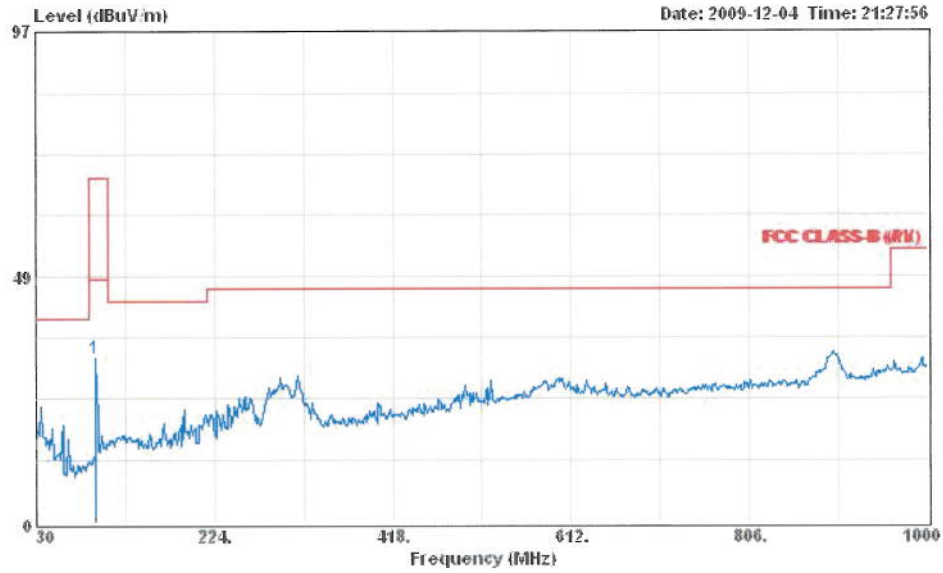


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD IXION  
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	32.00	-36.00	68.00	47.25	2.25	10.61	28.11	Peak	---	---



Vertical

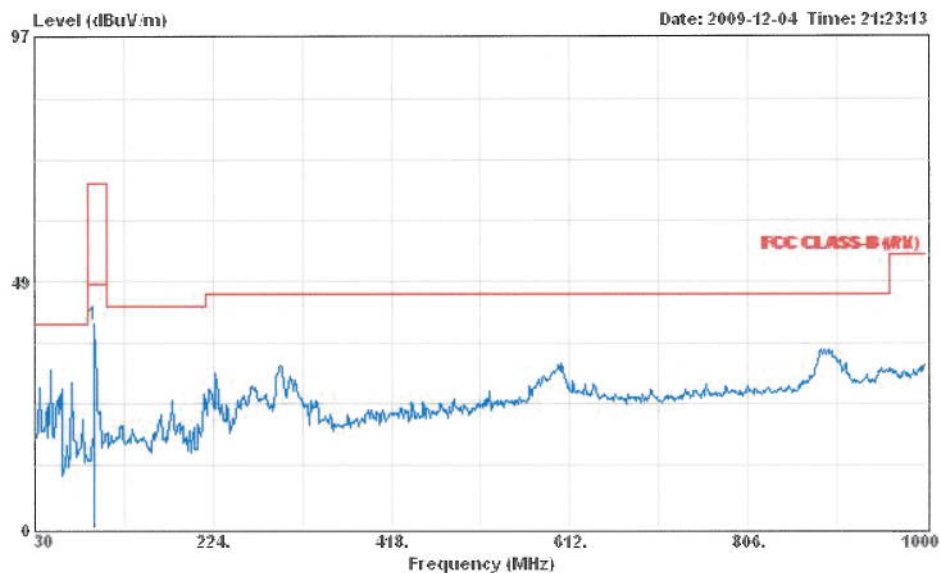

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Xpress R  
 Power :  
 model : FM 96.9M  
 Memo : FORD IXION  
 Memo : 0度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB	dB	dB		cm	deg
1	94.990	39.94	-28.06	68.00	55.19	2.25	10.61	28.11	Peak	---	---