


Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 45° / Mode 3		


Horizontal

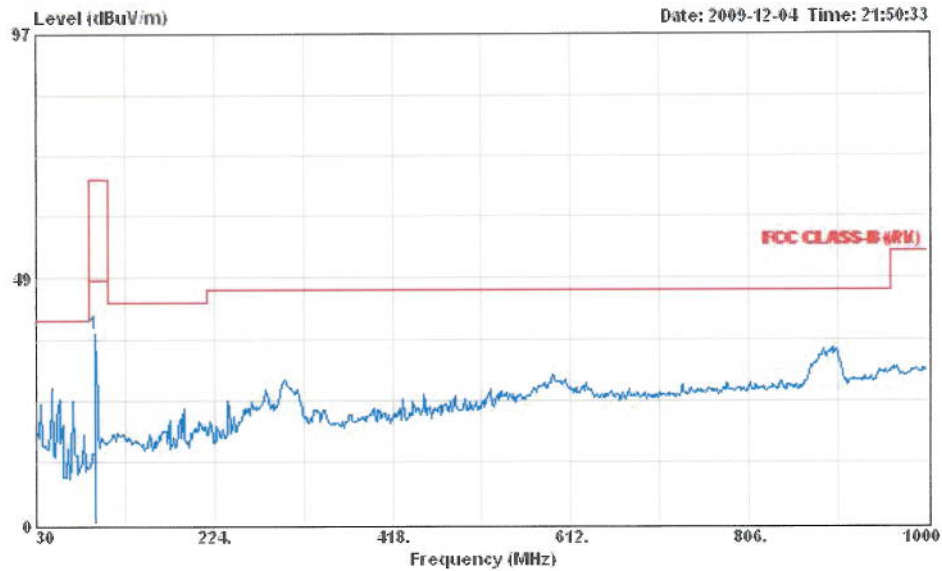

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	37.34	-30.66	68.00	52.59	2.25	10.61	28.11	Peak	---	---

Vertical

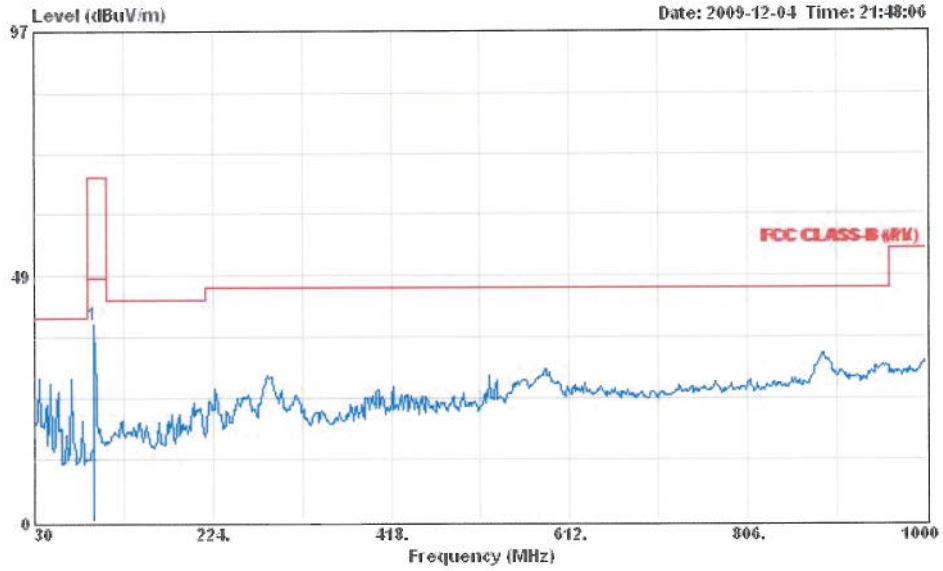


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 45度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	38.82	-29.18	68.00	54.07	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 90° / Mode 3		


Horizontal

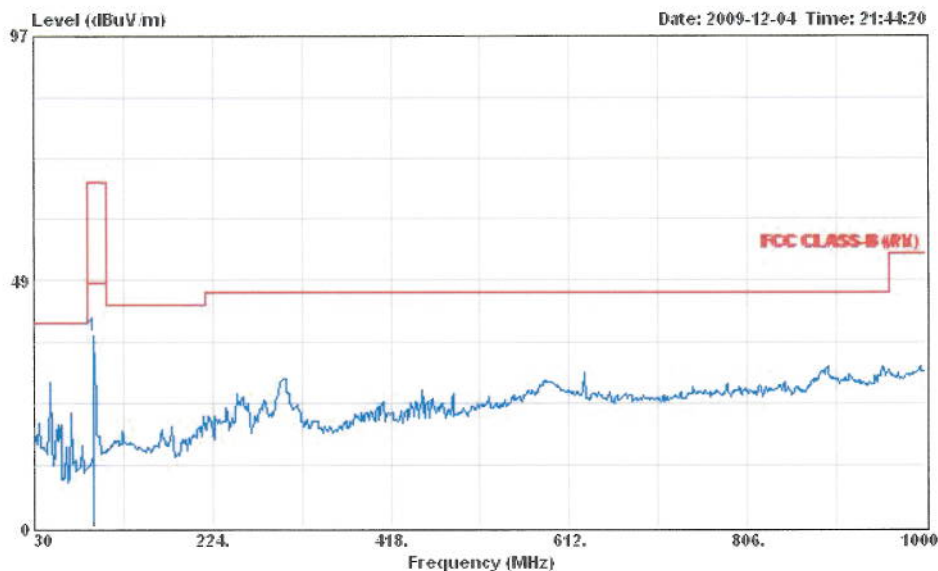

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 90度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	37.40	-30.60	68.00	52.65	2.25	10.61	28.11	Peak	---	---

Vertical

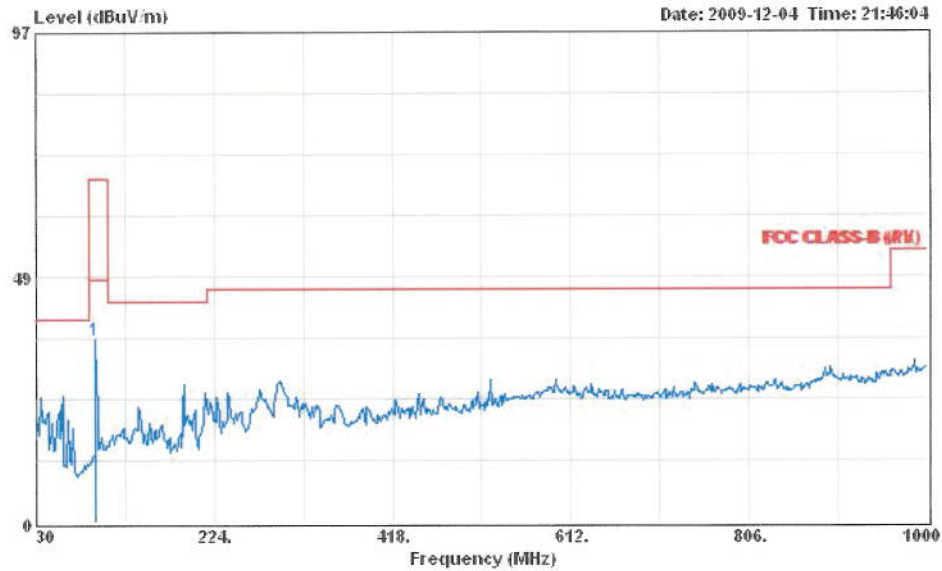


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 90度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	35.93	-32.07	68.00	51.18	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 135° / Mode 3		


Horizontal

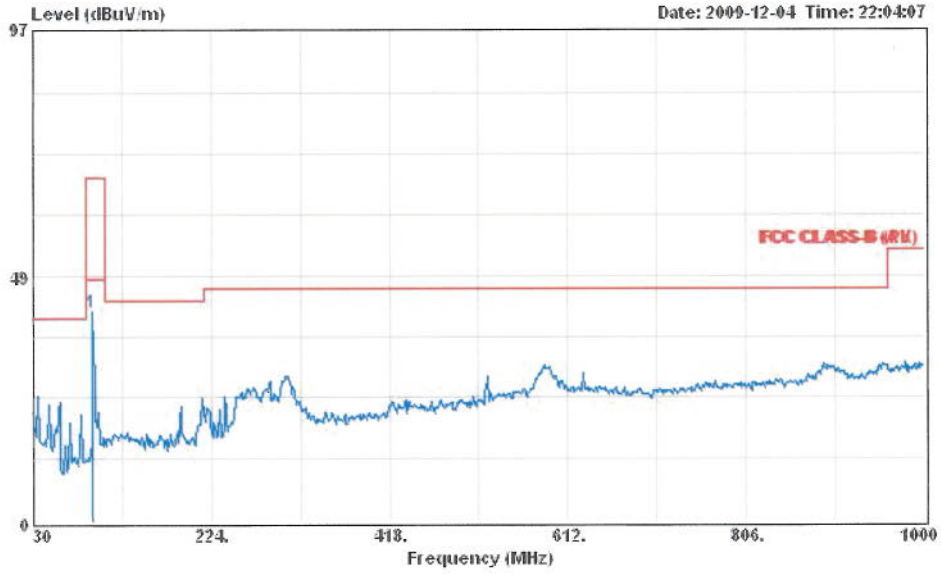

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	41.22	-26.78	68.00	56.47	2.25	10.61	28.11	Peak	---	---

Vertical

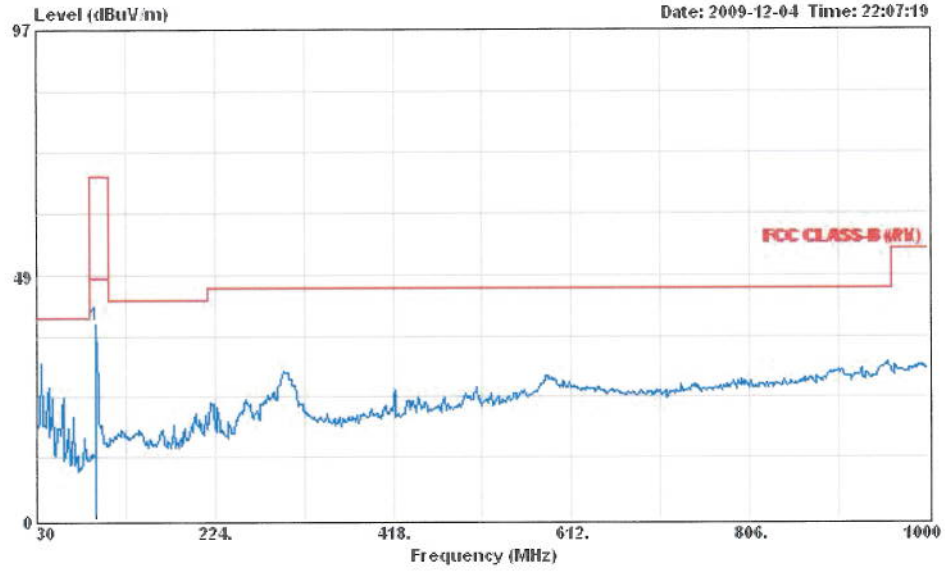


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	38.75	-29.25	68.00	54.00	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 180° / Mode 3		


Horizontal

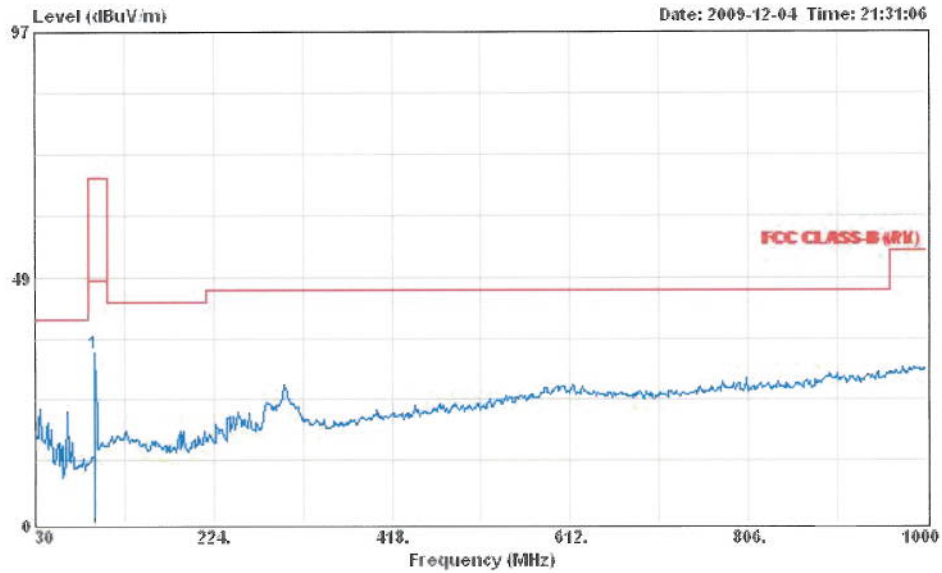

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	33.45	-34.55	68.00	48.70	2.25	10.61	28.11	Peak	---	---

Vertical

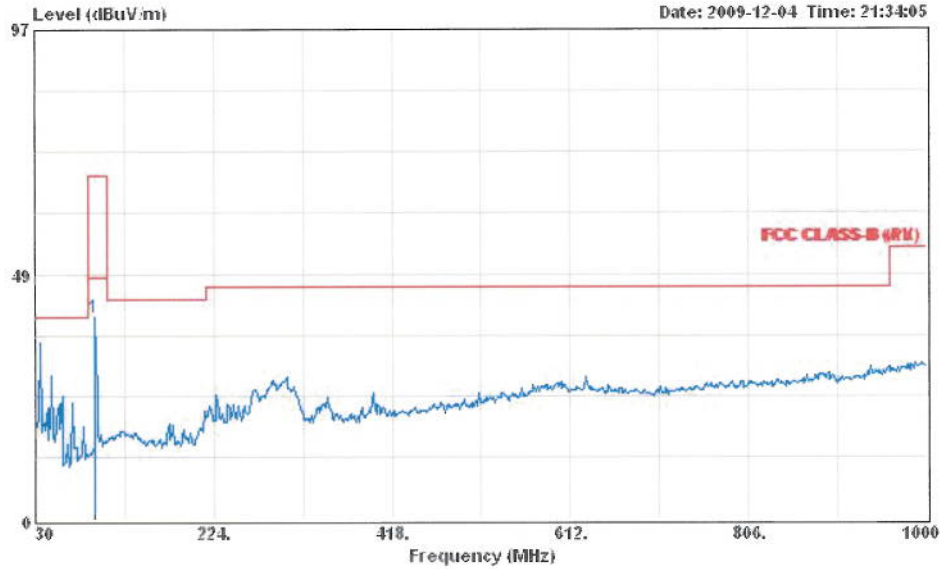


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	40.15	-27.85	68.00	55.40	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 225° / Mode 3		


Horizontal

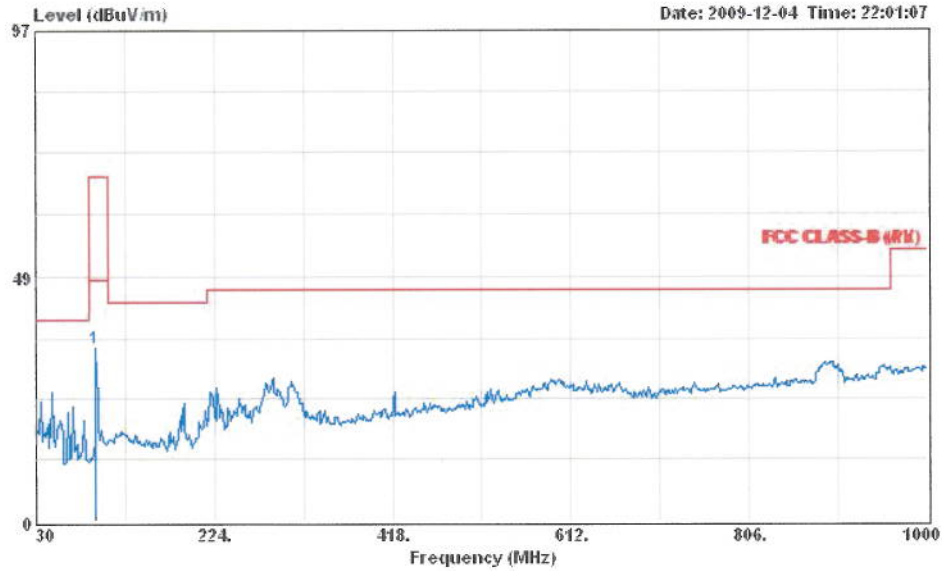

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	34.33	-33.67	68.00	49.58	2.25	10.61	28.11	Peak	---	---

Vertical

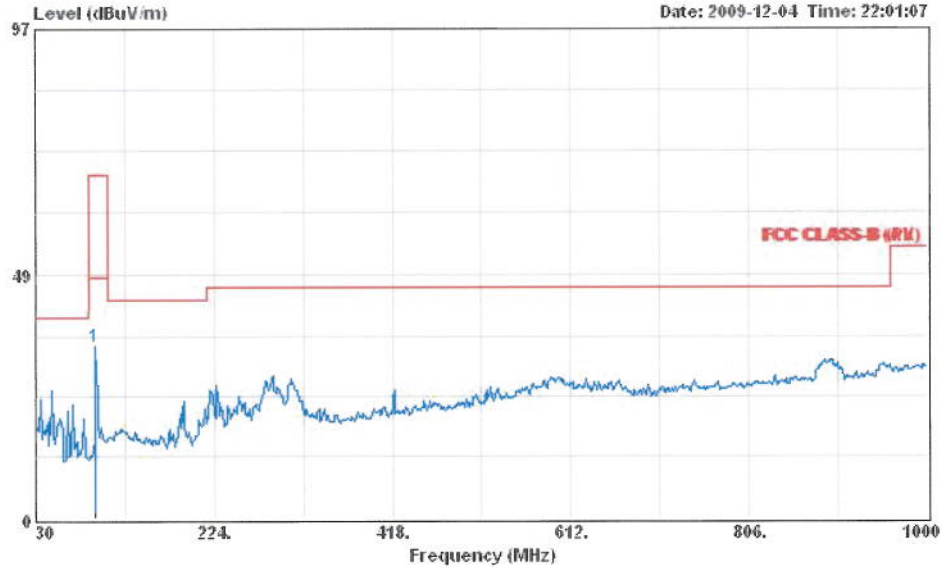


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 969M
 Memo : FORD IXION
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	34.33	-33.67	68.00	49.58	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 270° / Mode 3		


Horizontal

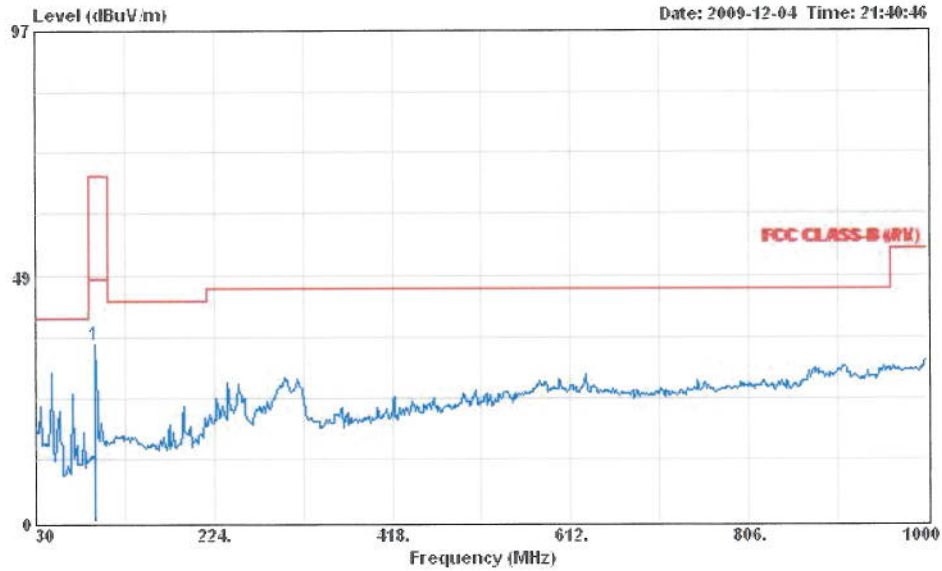

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	35.11	-32.89	68.00	50.36	2.25	10.61	28.11	Peak	---	---

Vertical

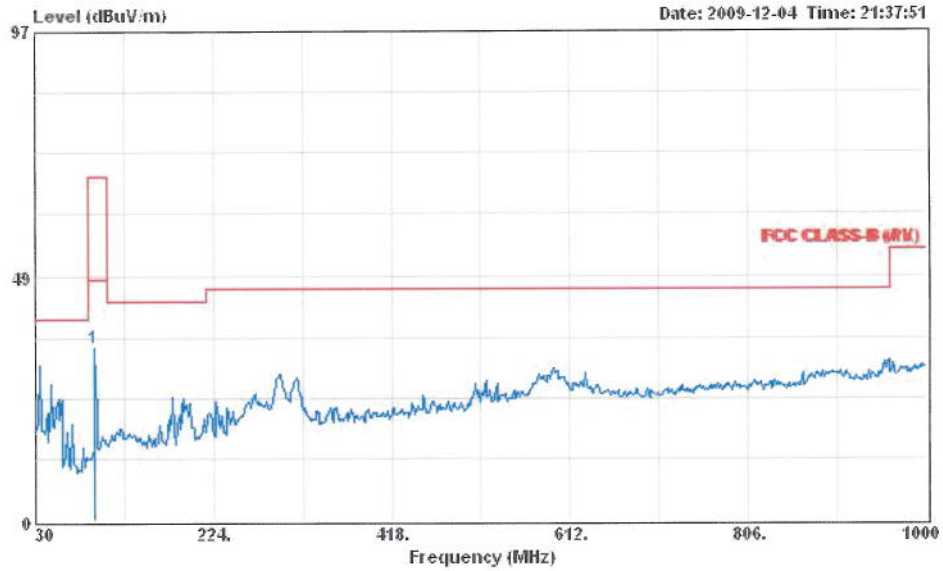


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD EXION
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	34.29	-33.71	68.00	49.54	2.25	10.61	28.11	Peak	---	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 315° / Mode 3		


Horizontal

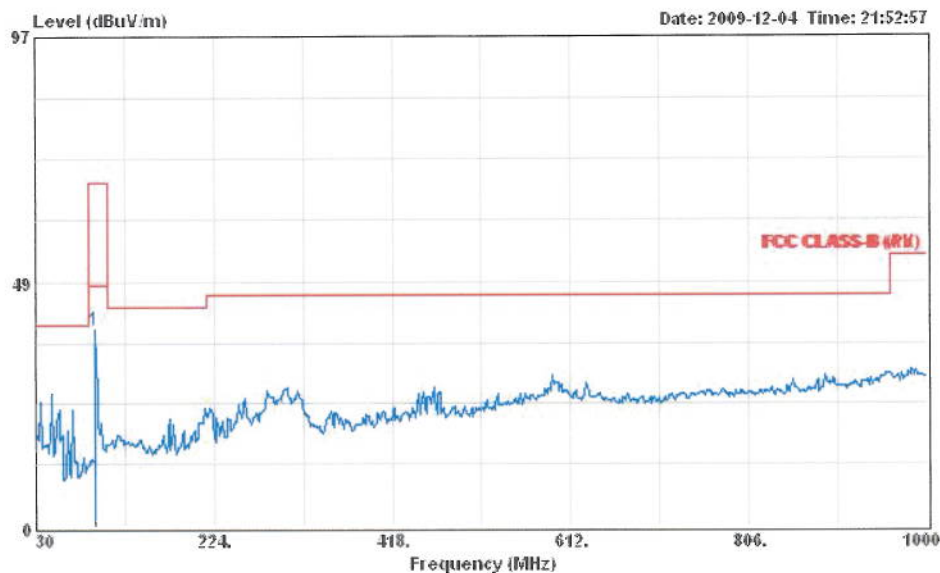

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	39.09	-28.91	68.00	54.34	2.25	10.61	28.11	Peak	---	---

Vertical

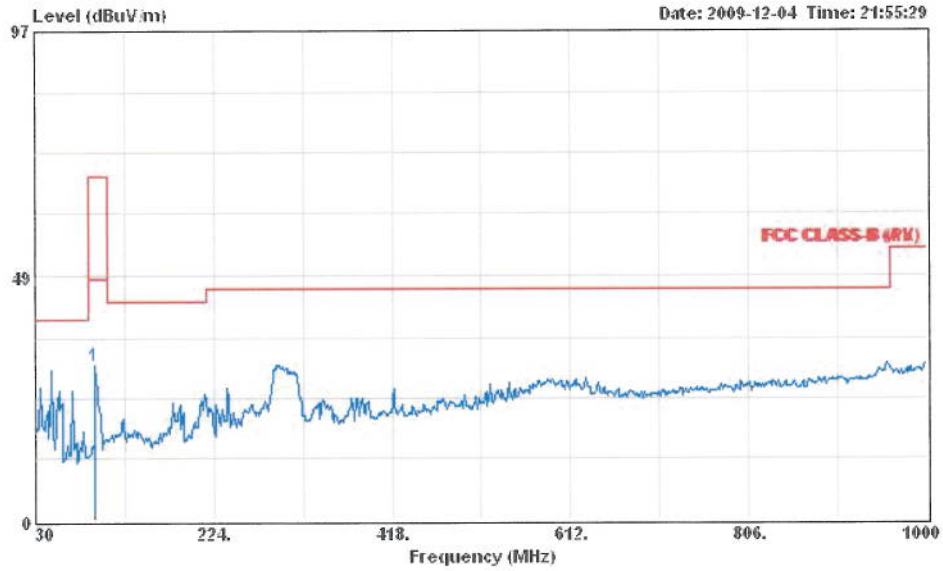

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 315度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	94.990	30.88	-37.12	68.00	46.13	2.25	10.61	28.11	Peak	---	---