


3.2 Test Result of Field Strength of Fundamental Emissions

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 0° / Mode 1		


Horizontal

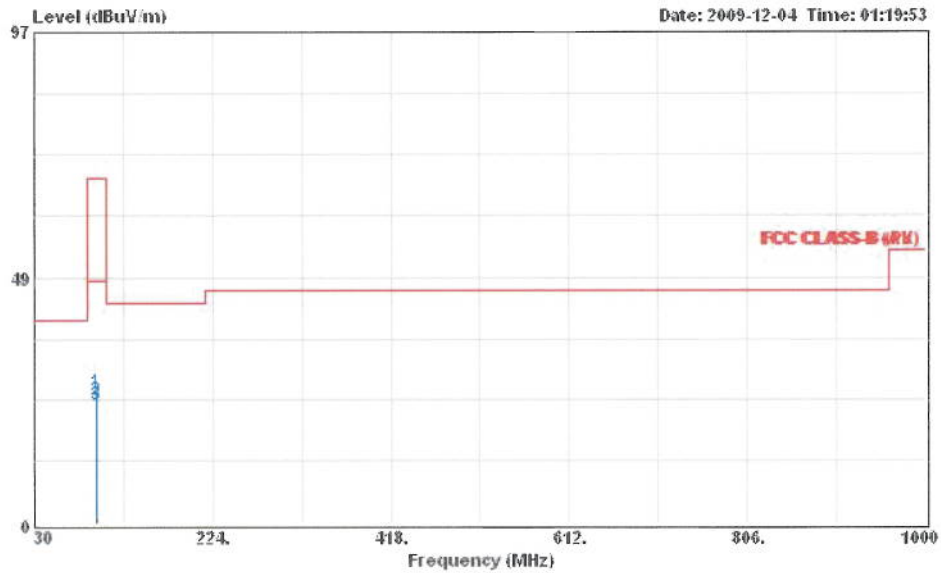

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 0度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	25.79	-42.21	68.00	40.68	2.26	10.96	28.11	Peak	400	---
2	96.900	24.17	-43.83	68.00	39.06	2.26	10.96	28.11	QP	400	---
3	96.900	23.25	-24.75	48.00	38.14	2.26	10.96	28.11	Average	400	---

Vertical

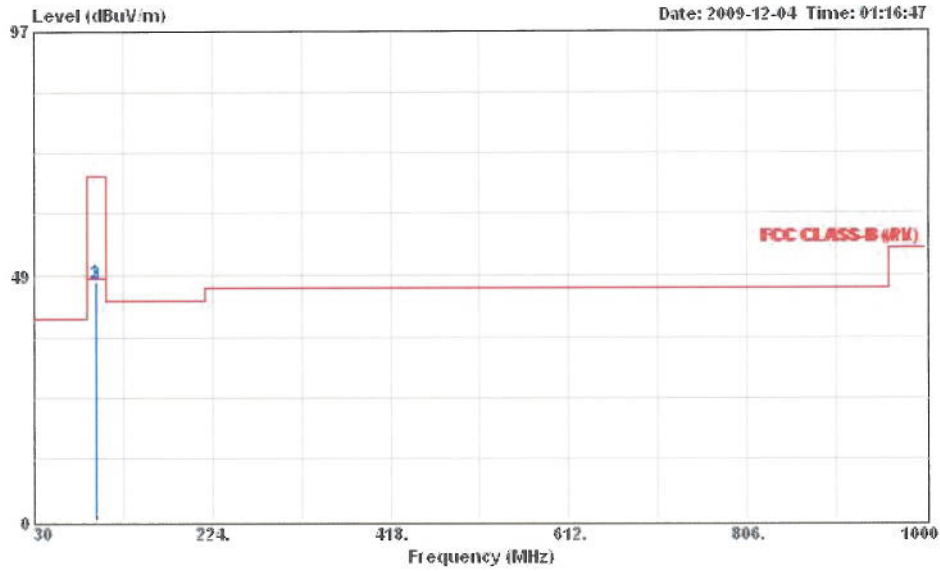


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	47.30	-20.70	68.00	62.19	2.26	10.96	28.11	Peak	100	---
2	96.900	47.06	-20.94	68.00	61.95	2.26	10.96	28.11	QP	100	---
3	96.900	46.80	-1.20	48.00	61.69	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 45° / Mode 1		


Horizontal

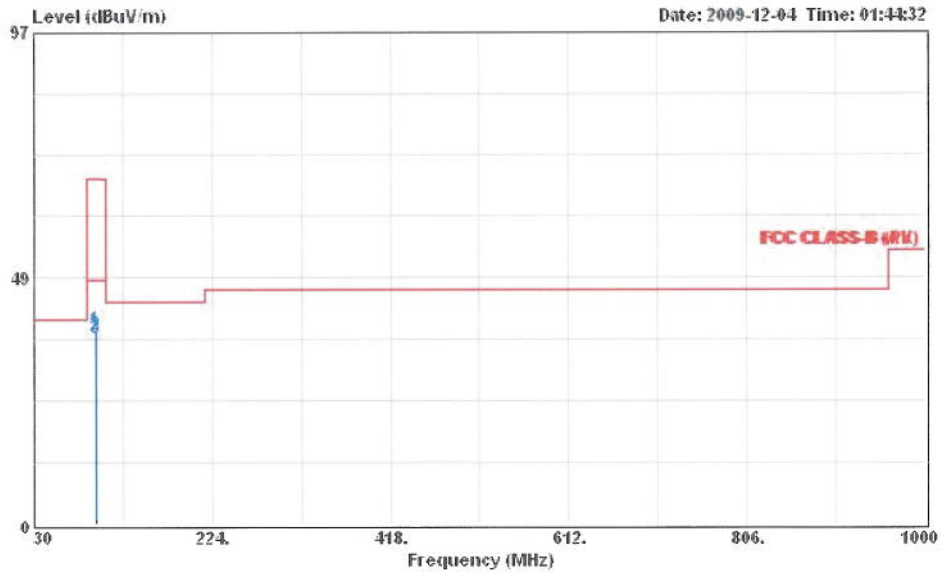

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	38.24	-29.76	68.00	53.13	2.26	10.96	28.11	Peak	400	---
2	96.900	37.28	-30.72	68.00	52.17	2.26	10.96	28.11	QP	400	---
3	96.900	36.62	-11.38	48.00	51.51	2.26	10.96	28.11	Average	400	---

Vertical

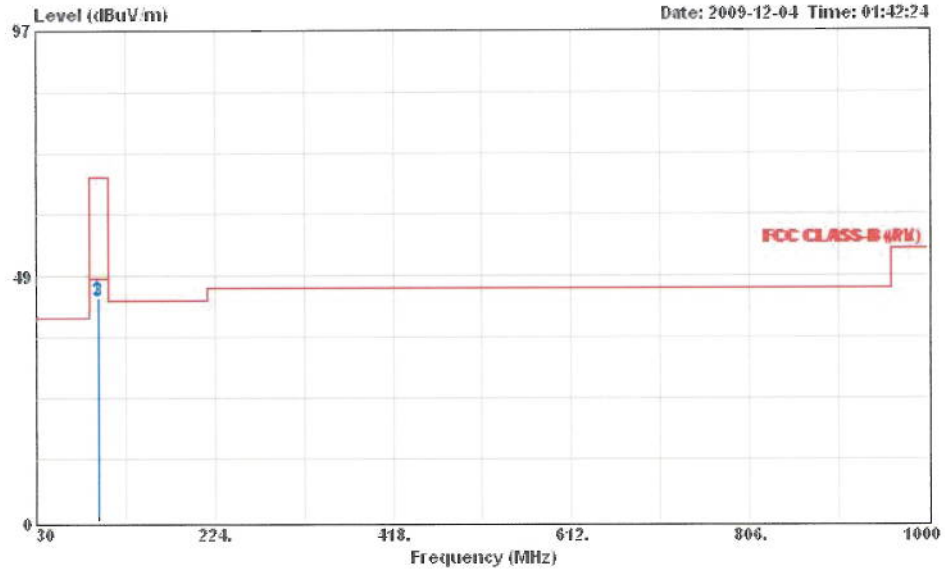


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM969M
 Memo : FORD MONDEO
 Memo : 45度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	44.25	-23.75	68.00	59.14	2.26	10.96	28.11	Peak	100	---
2	96.900	43.63	-24.37	68.00	58.52	2.26	10.96	28.11	QP	100	---
3	96.900	43.54	-4.46	48.00	58.43	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 90° / Mode 1		


Horizontal

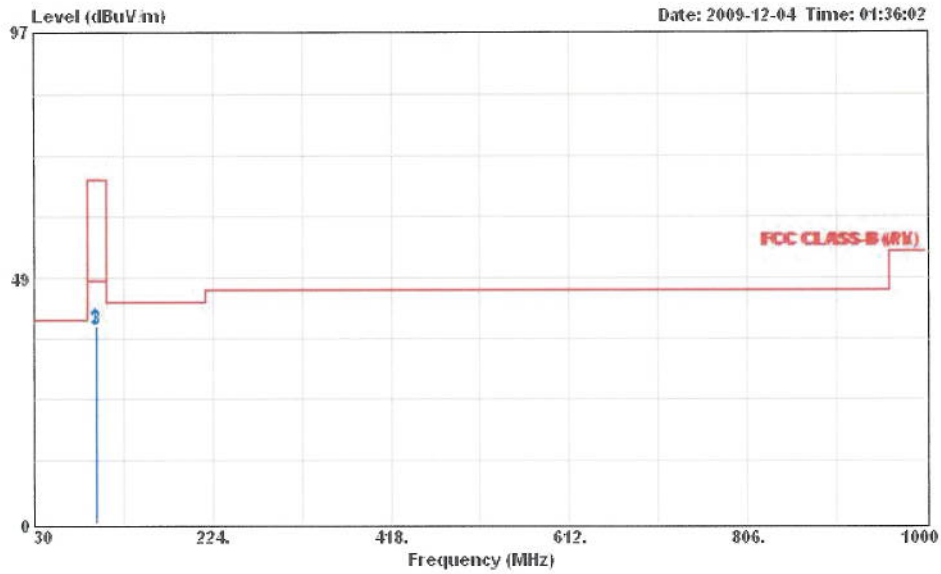

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	38.70	-29.30	68.00	53.59	2.26	10.96	28.11	Peak	400	---
2	96.900	38.30	-29.70	68.00	53.19	2.26	10.96	28.11	QP	400	---
3	96.900	38.18	-9.82	48.00	53.07	2.26	10.96	28.11	Average	400	---

Vertical

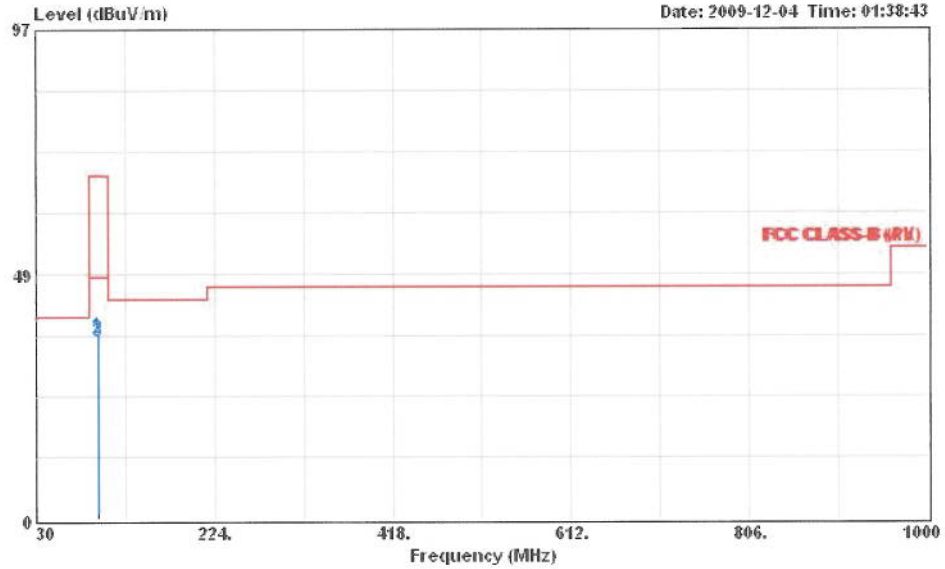


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 90度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	36.46	-31.54	68.00	51.35	2.26	10.96	28.11	Peak	100	---
2	96.900	35.84	-32.16	68.00	50.73	2.26	10.96	28.11	QP	100	---
3	96.900	35.22	-12.78	48.00	50.11	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 135° / Mode 1		


Horizontal

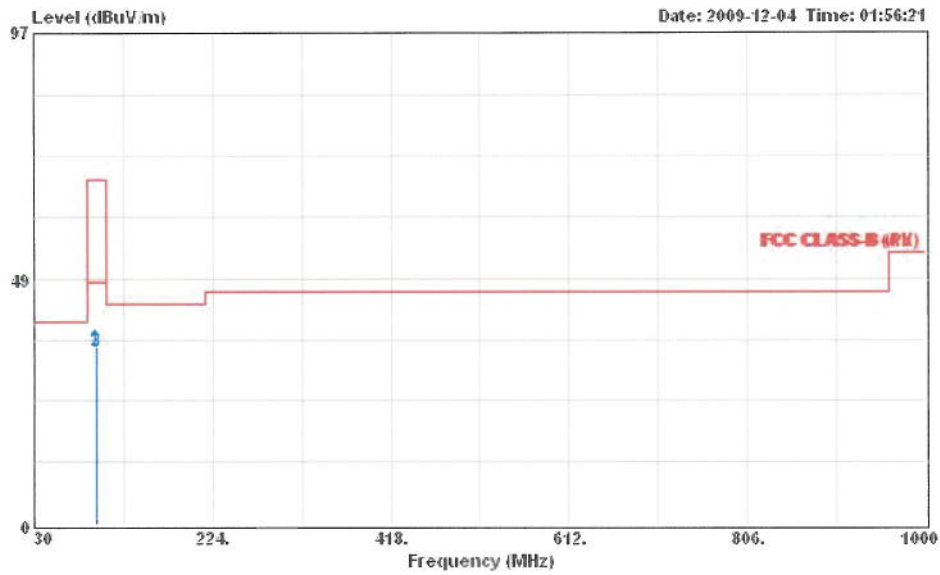

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	35.09	-32.91	68.00	49.98	2.26	10.96	28.11	Peak	323	---
2	96.900	34.44	-33.56	68.00	49.33	2.26	10.96	28.11	QP	323	---
3	96.900	33.92	-14.08	48.00	48.81	2.26	10.96	28.11	Average	323	---

Vertical

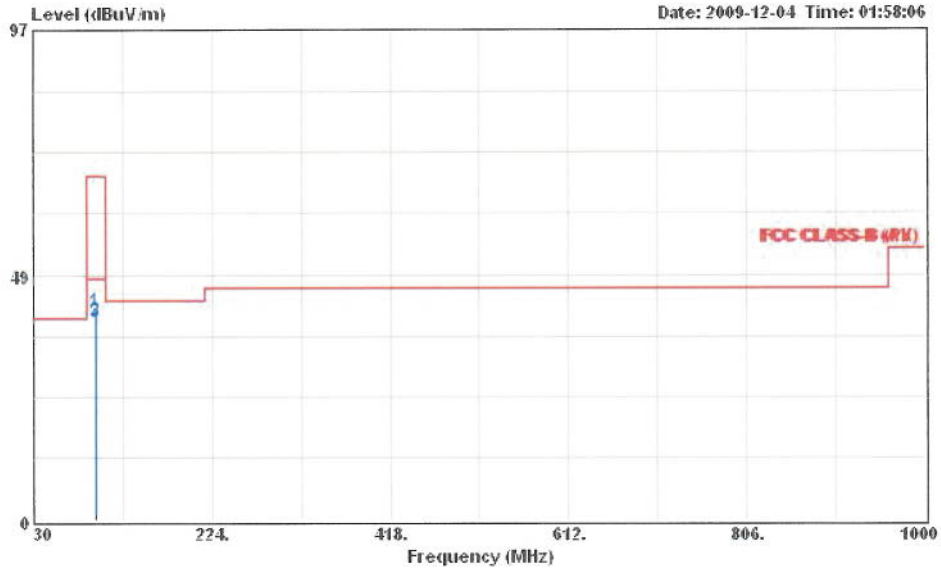


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	41.42	-26.58	68.00	56.31	2.26	10.96	28.11	Peak	100	---
2	96.900	39.83	-28.17	68.00	54.72	2.26	10.96	28.11	QP	100	---
3	96.900	39.51	-8.49	48.00	54.40	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 180° / Mode 1		


Horizontal

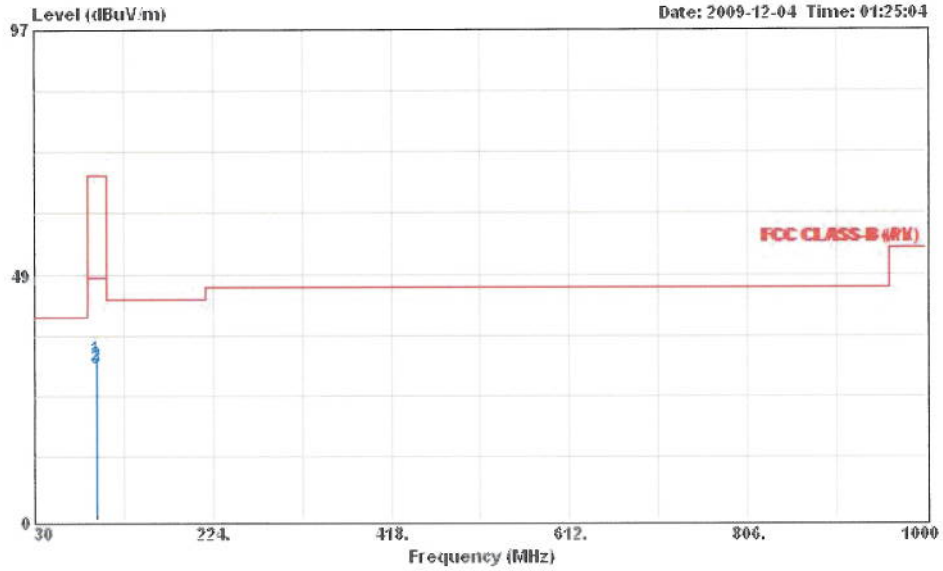

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	31.85	-36.15	68.00	46.74	2.26	10.96	28.11	Peak	178	---
2	96.900	30.64	-37.36	68.00	45.53	2.26	10.96	28.11	QP	178	---
3	96.900	29.82	-18.18	48.00	44.71	2.26	10.96	28.11	Average	178	---

Vertical

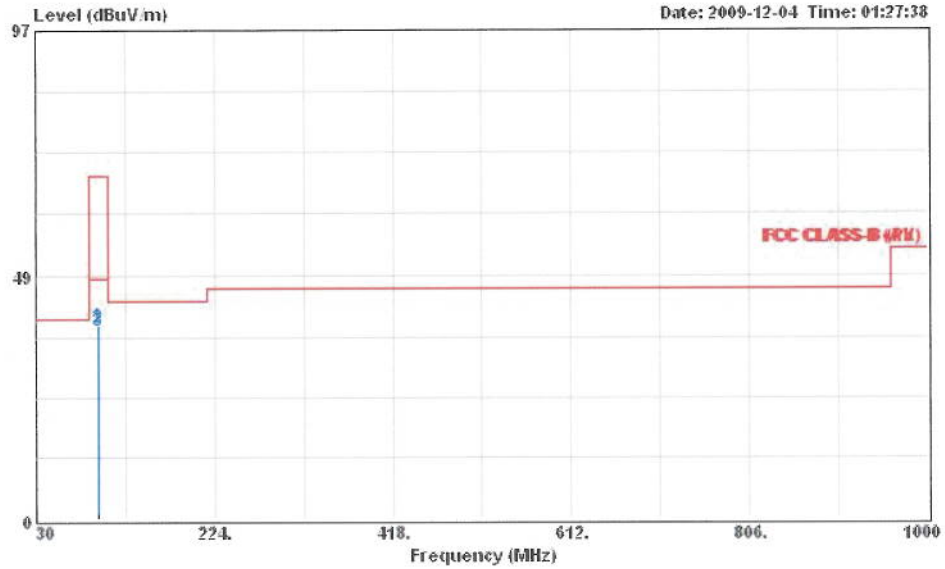


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	38.72	-29.28	68.00	53.61	2.26	10.96	28.11	Peak	100	---
2	96.900	38.30	-29.70	68.00	53.19	2.26	10.96	28.11	QP	100	---
3	96.900	37.80	-10.20	48.00	52.69	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 225° / Mode 1		


Horizontal

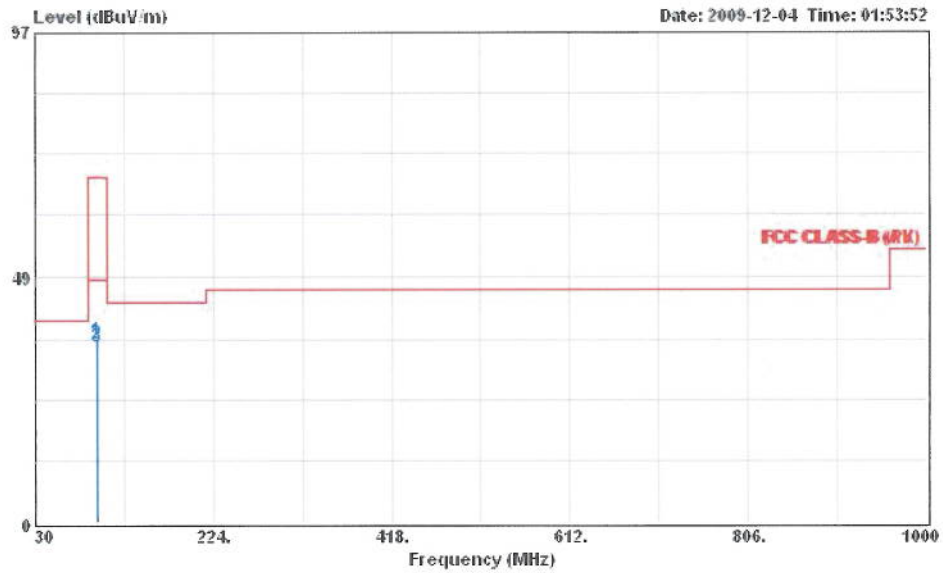

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	36.14	-31.86	68.00	51.03	2.26	10.96	28.11	Peak	177	---
2	96.900	35.59	-32.41	68.00	50.48	2.26	10.96	28.11	QP	177	---
3	96.900	35.09	-12.91	48.00	49.98	2.26	10.96	28.11	Average	177	---

Vertical

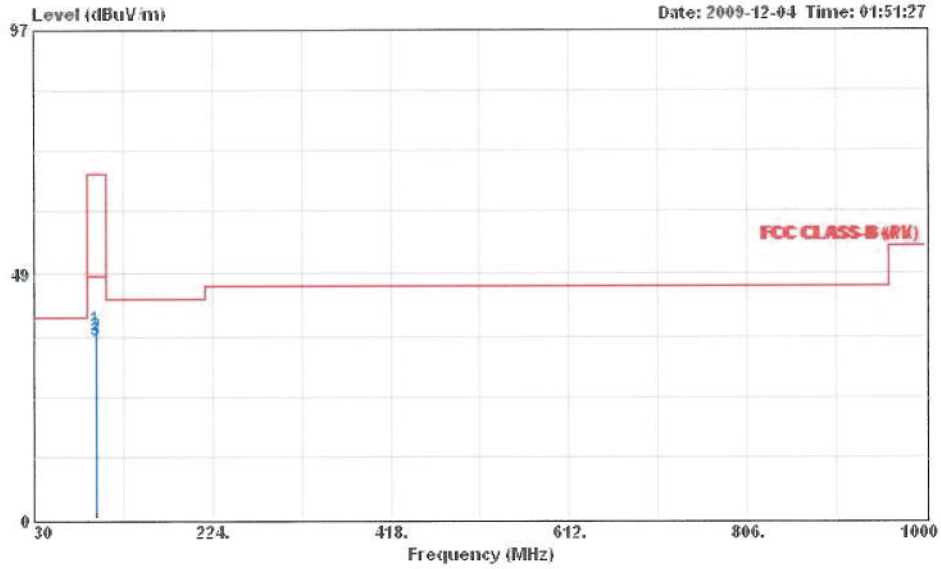


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	37.80	-30.20	68.00	52.69	2.26	10.96	28.11	Peak	352	---
2	96.900	36.40	-31.60	68.00	51.29	2.26	10.96	28.11	QP	352	---
3	96.900	35.69	-12.31	48.00	50.58	2.26	10.96	28.11	Average	352	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 270° / Mode 1		


Horizontal

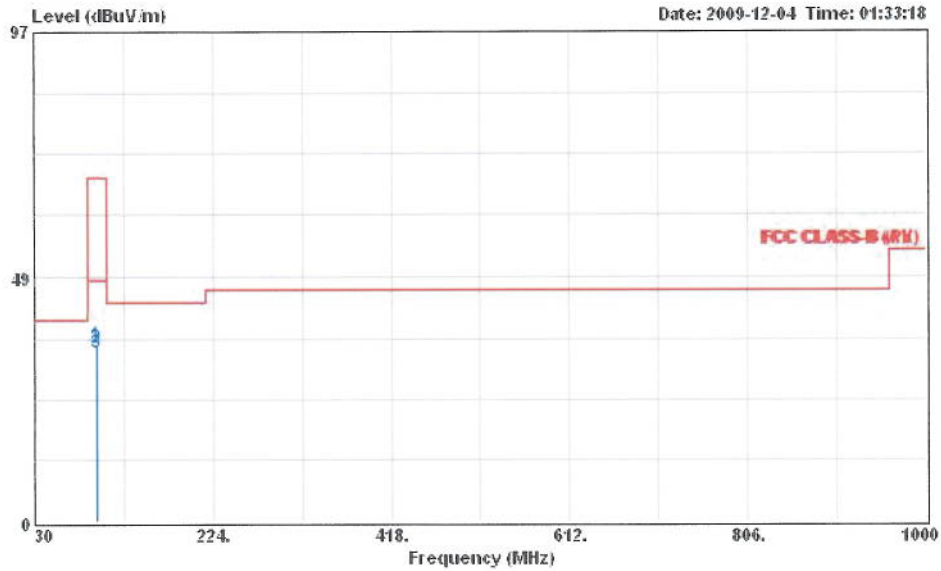

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	35.13	-32.87	68.00	50.02	2.26	10.96	28.11	Peak	400	---
2	96.900	34.50	-33.50	68.00	49.39	2.26	10.96	28.11	QP	400	---
3	96.900	33.83	-14.17	48.00	48.72	2.26	10.96	28.11	Average	400	---

Vertical

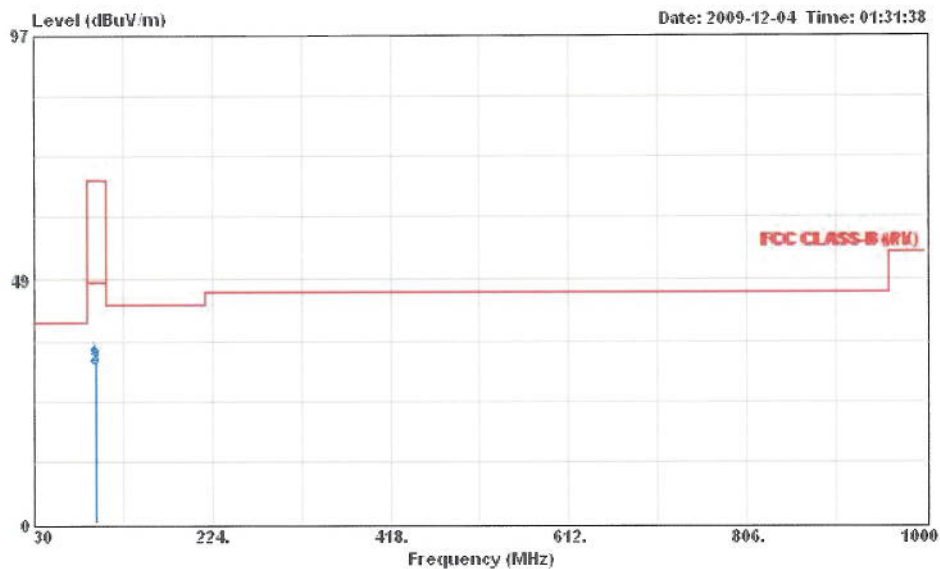


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	32.19	-35.81	68.00	47.08	2.26	10.96	28.11	Peak	100	---
2	96.900	31.42	-36.58	68.00	46.31	2.26	10.96	28.11	QP	100	---
3	96.900	30.96	-17.04	48.00	45.85	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 315° / Mode 1		


Horizontal

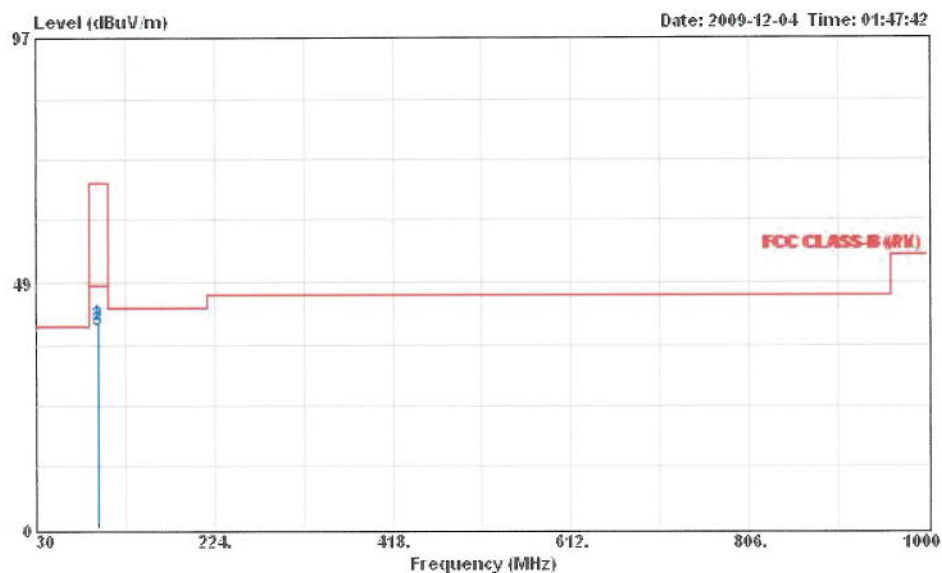

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 315度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	40.52	-27.48	68.00	55.41	2.26	10.96	28.11	Peak	304	---
2	96.900	40.18	-27.82	68.00	55.07	2.26	10.96	28.11	QP	304	---
3	96.900	39.42	-8.58	48.00	54.31	2.26	10.96	28.11	Average	304	---

Vertical

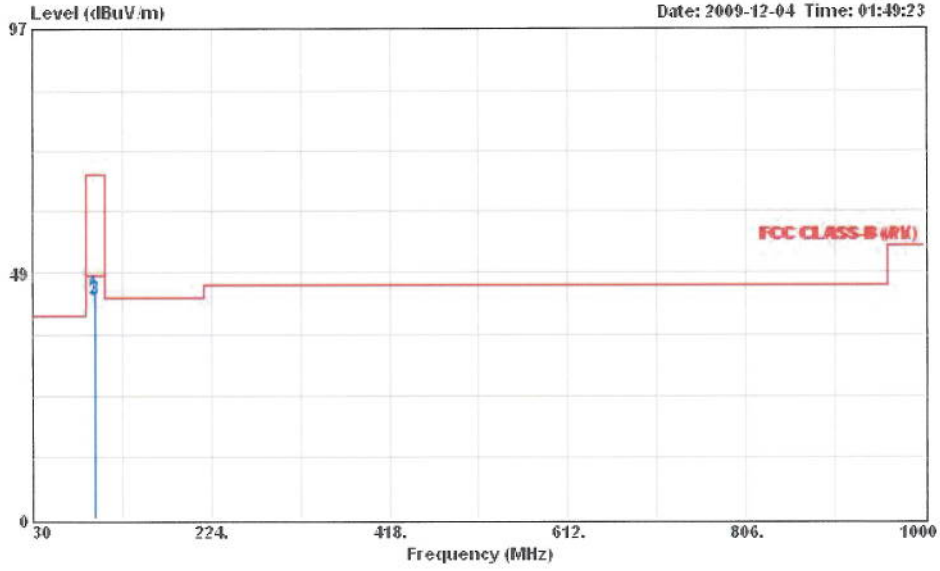


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD MONDEO
 Memo : 315度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	44.32	-23.68	68.00	59.21	2.26	10.96	28.11	Peak	100	---
2	96.900	43.36	-24.64	68.00	58.25	2.26	10.96	28.11	QP	100	---
3	96.900	43.24	-4.76	48.00	58.13	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 0° / Mode 2		


Horizontal

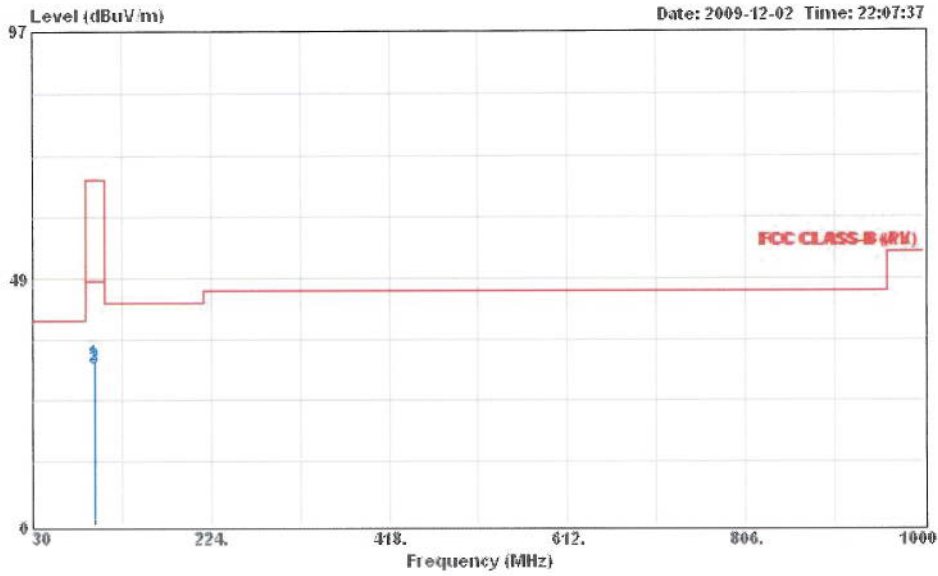

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	31.91	-36.09	68.00	46.80	2.26	10.96	28.11	Peak	364	---
2	96.880	31.15	-36.85	68.00	46.04	2.26	10.96	28.11	QP	364	---
3	96.880	30.56	-17.44	48.00	45.45	2.26	10.96	28.11	Average	364	---

Vertical

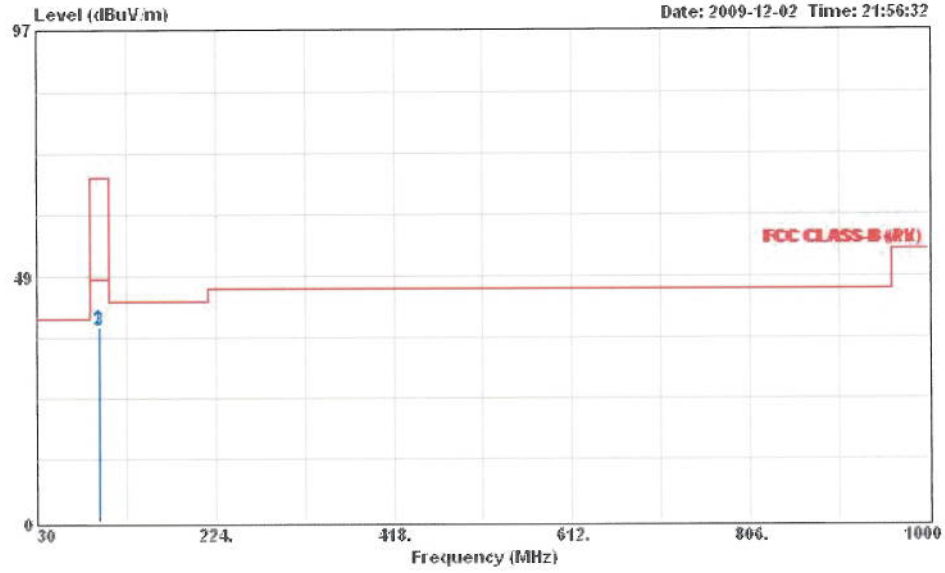

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 0度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	38.46	-29.54	68.00	53.35	2.26	10.96	28.11	Peak	106	---
2	96.880	38.06	-29.94	68.00	52.95	2.26	10.96	28.11	QP	106	---
3	96.880	37.90	-10.10	48.00	52.79	2.26	10.96	28.11	Average	106	---