


Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 45° / Mode 2		


Horizontal

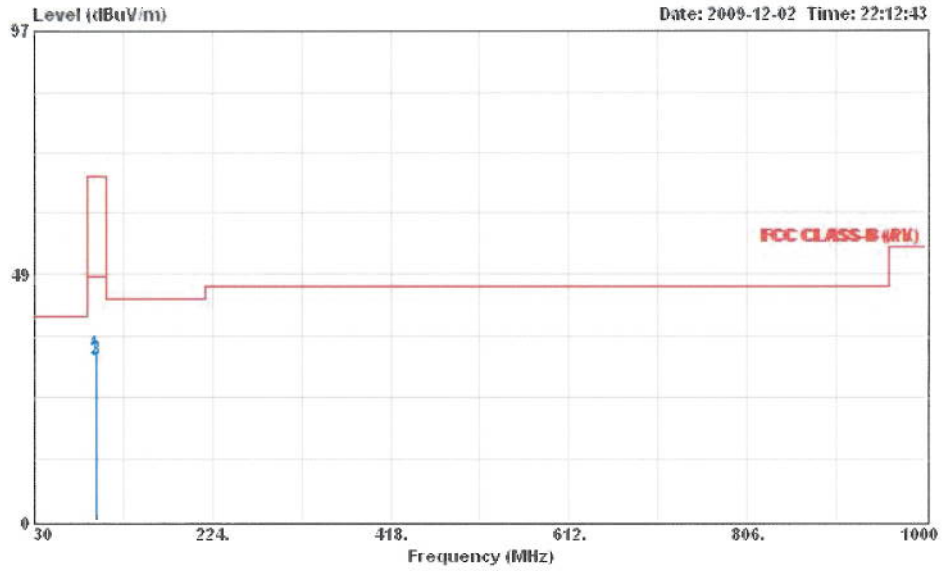

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 45度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	32.66	-35.34	68.00	47.55	2.26	10.96	28.11	Peak	354	---
2	96.880	31.87	-36.13	68.00	46.76	2.26	10.96	28.11	QP	354	---
3	96.880	31.64	-16.36	48.00	46.53	2.26	10.96	28.11	Average	354	---

Vertical

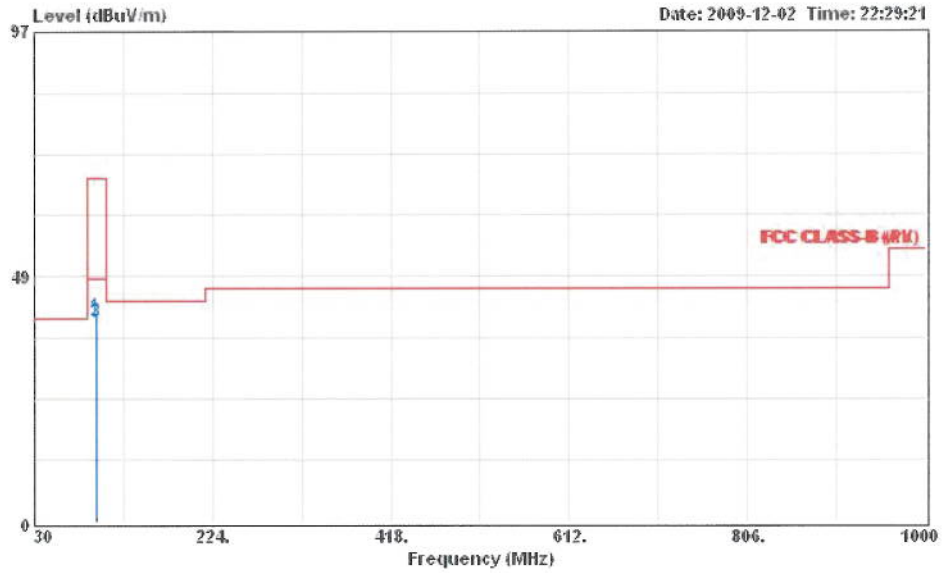


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 45度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	40.54	-27.46	68.00	55.43	2.26	10.96	28.11	Peak	100	---
2	96.880	39.59	-28.41	68.00	54.48	2.26	10.96	28.11	QP	100	---
3	96.880	39.33	-8.67	48.00	54.22	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 135° / Mode 2		


Horizontal

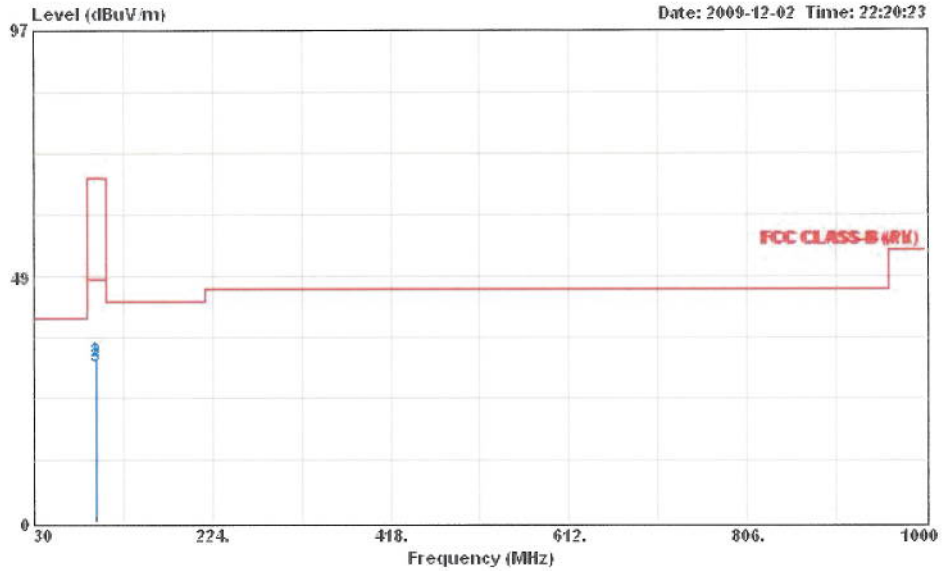

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM96.9M
 Memo : TOYOTA COROLLA
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	31.91	-36.09	68.00	46.80	2.26	10.96	28.11	Peak	400	---
2	96.880	31.65	-36.35	68.00	46.54	2.26	10.96	28.11	QP	400	---
3	96.880	30.46	-17.54	48.00	45.35	2.26	10.96	28.11	Average	400	---

Vertical

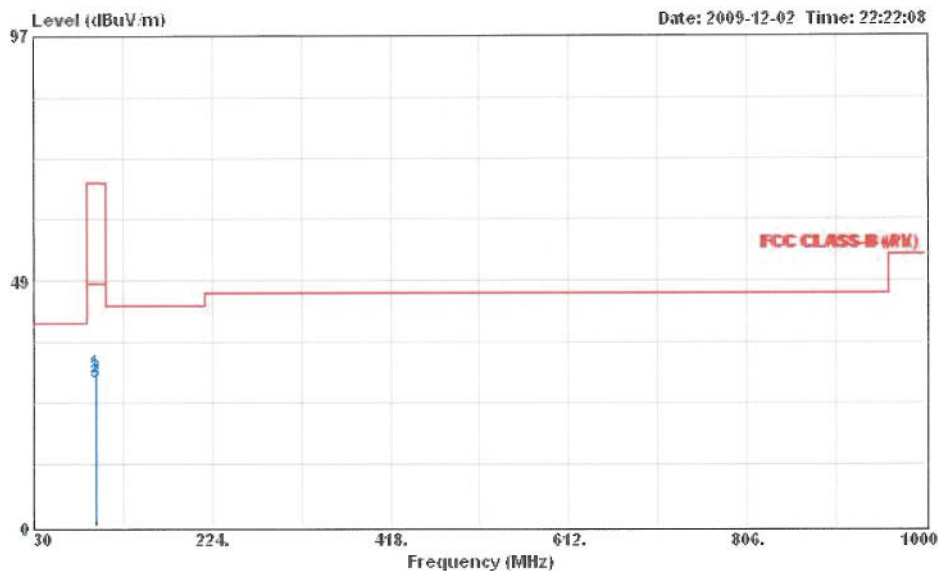


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	30.16	-37.84	68.00	45.05	2.26	10.96	28.11	Peak	267	---
2	96.880	29.15	-38.85	68.00	44.04	2.26	10.96	28.11	QP	267	---
3	96.880	28.21	-19.79	48.00	43.10	2.26	10.96	28.11	Average	267	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 180° / Mode 2		


Horizontal

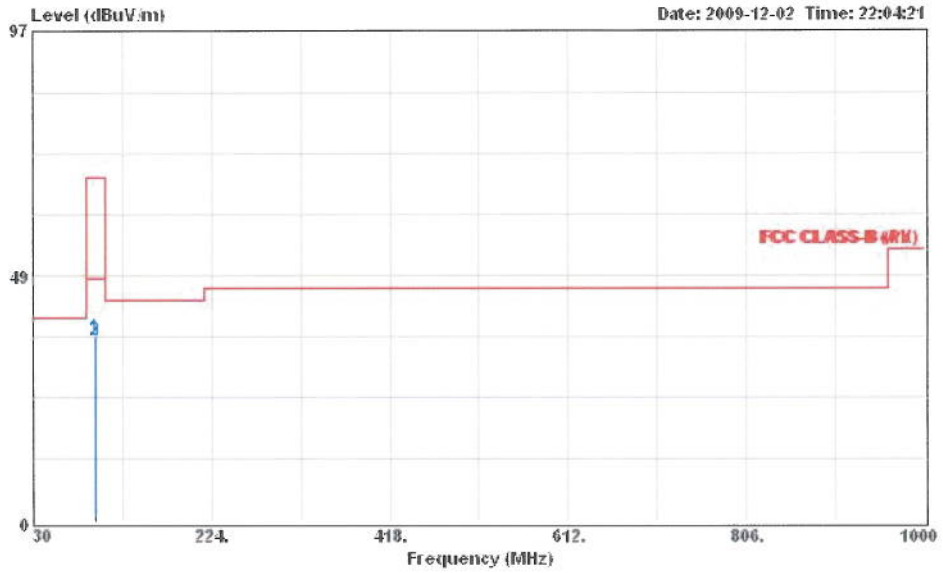

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	36.08	-31.92	68.00	50.97	2.26	10.96	28.11	Peak	351	---
2	96.880	35.67	-32.33	68.00	50.56	2.26	10.96	28.11	QP	351	---
3	96.880	35.47	-12.53	48.00	50.36	2.26	10.96	28.11	Average	351	---

Vertical

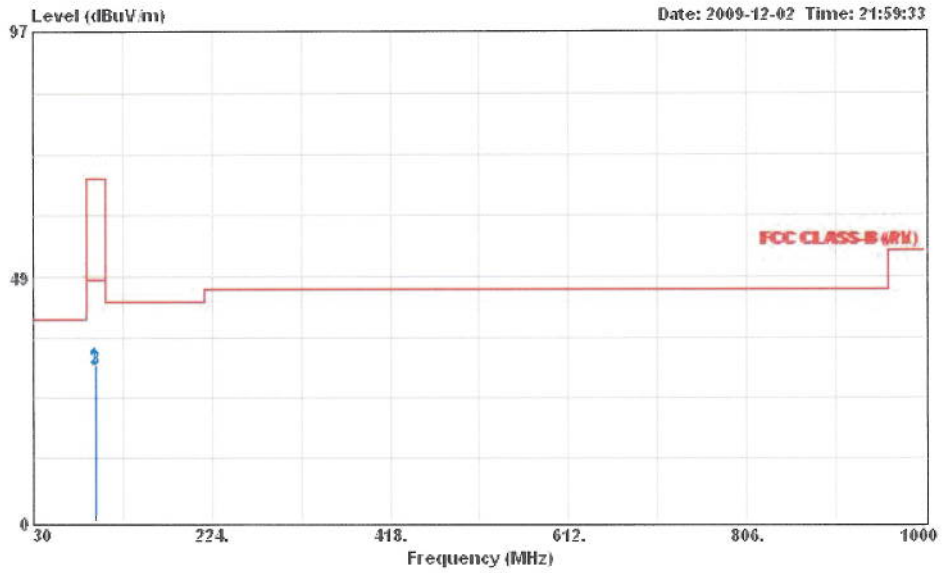


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM969M
 Memo : TOYOTA COROLLA
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	30.99	-37.01	68.00	45.88	2.26	10.96	28.11	Peak	100	---
2	96.880	30.16	-37.84	68.00	45.05	2.26	10.96	28.11	QP	100	---
3	96.880	29.87	-18.13	48.00	44.76	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 225° / Mode 2		


Horizontal

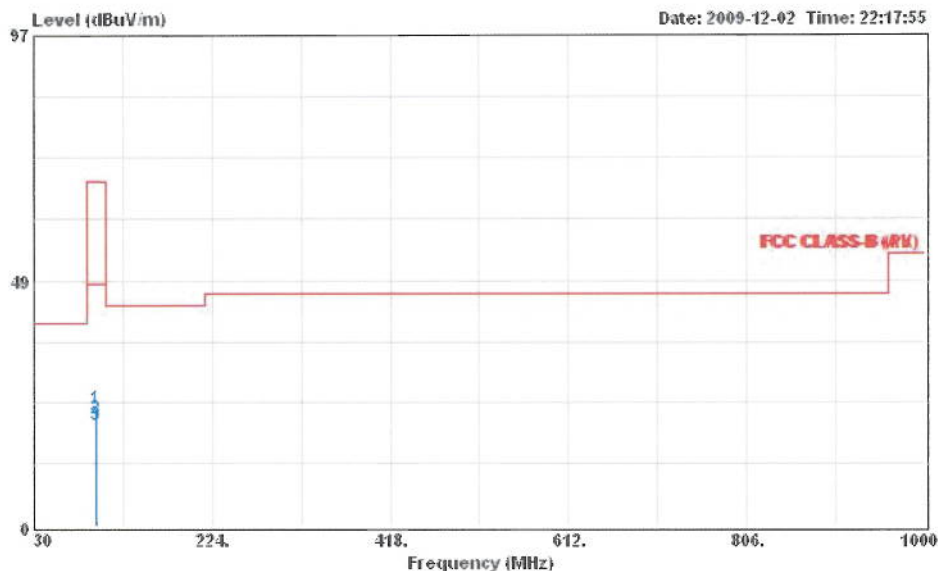

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM969M
 Memo : TOYOTA COROLLA
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	23.01	-44.99	68.00	37.90	2.26	10.96	28.11	Peak	169	---
2	96.880	20.99	-47.01	68.00	35.88	2.26	10.96	28.11	QP	169	---
3	96.880	19.77	-28.23	48.00	34.66	2.26	10.96	28.11	Average	169	---

Vertical

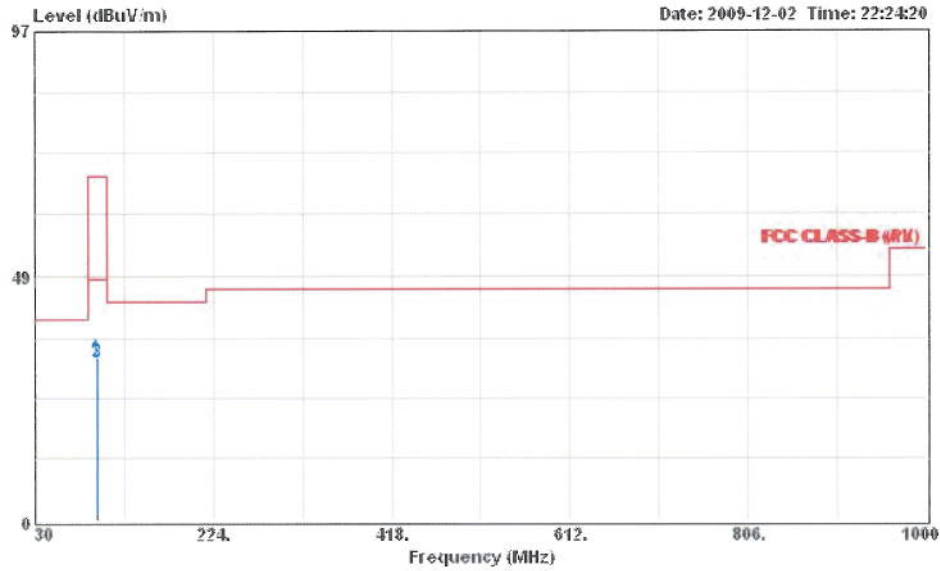


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM96.9M
 Memo : TOYOTA COROLLA
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	32.40	-35.60	68.00	47.29	2.26	10.96	28.11	Peak	100	---
2	96.880	31.70	-36.30	68.00	46.59	2.26	10.96	28.11	QP	100	---
3	96.880	31.45	-16.55	48.00	46.34	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 270° / Mode 2		


Horizontal

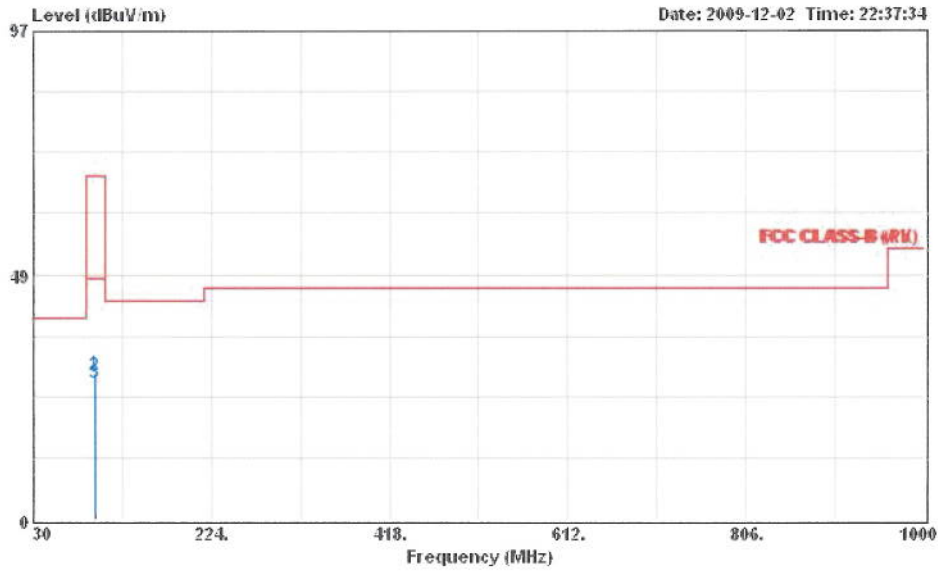

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	29.00	-39.00	68.00	43.89	2.26	10.96	28.11	Peak	347	---
2	96.880	28.66	-39.34	68.00	43.55	2.26	10.96	28.11	QP	347	---
3	96.880	27.24	-20.76	48.00	42.13	2.26	10.96	28.11	Average	347	---

Vertical

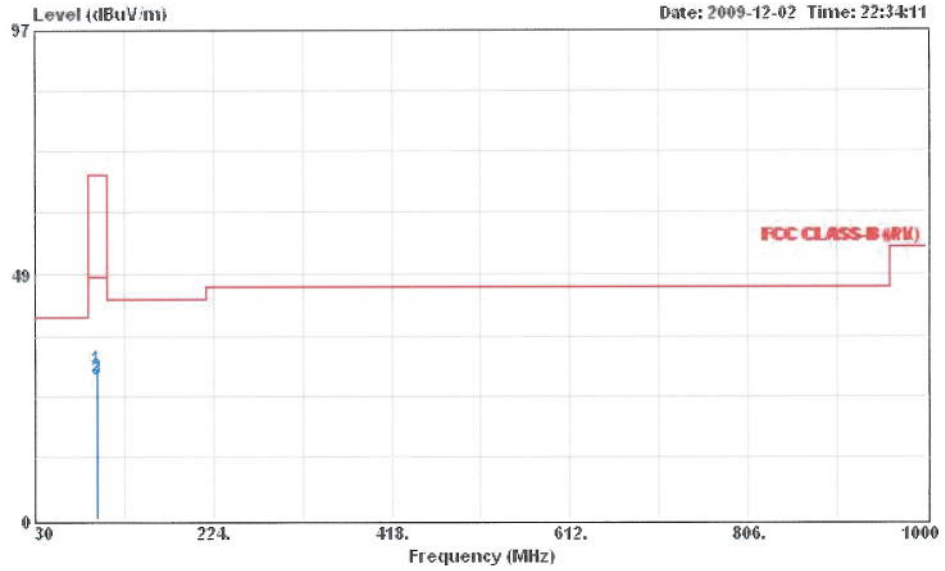


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	29.85	-38.15	68.00	44.74	2.26	10.96	28.11	Peak	373	---
2	96.880	28.20	-39.80	68.00	43.09	2.26	10.96	28.11	QP	373	---
3	96.880	27.63	-20.37	48.00	42.52	2.26	10.96	28.11	Average	373	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 315° / Mode 2		

Horizontal

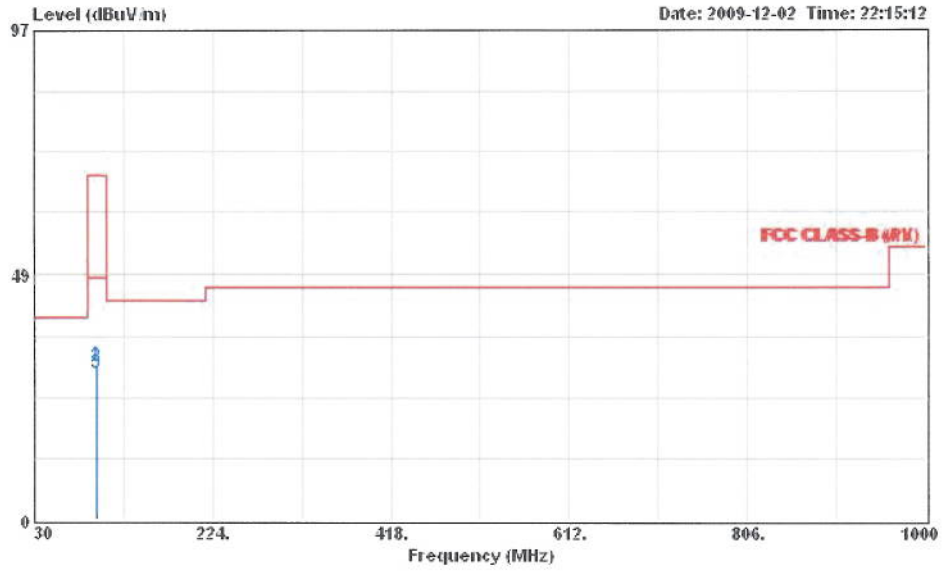

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 315度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.880	30.80	-37.20	68.00	45.69	2.26	10.96	28.11	Peak	380	---
2	96.880	30.46	-37.54	68.00	45.35	2.26	10.96	28.11	QP	380	---
3	96.880	29.36	-18.64	48.00	44.25	2.26	10.96	28.11	Average	380	---