


Vertical

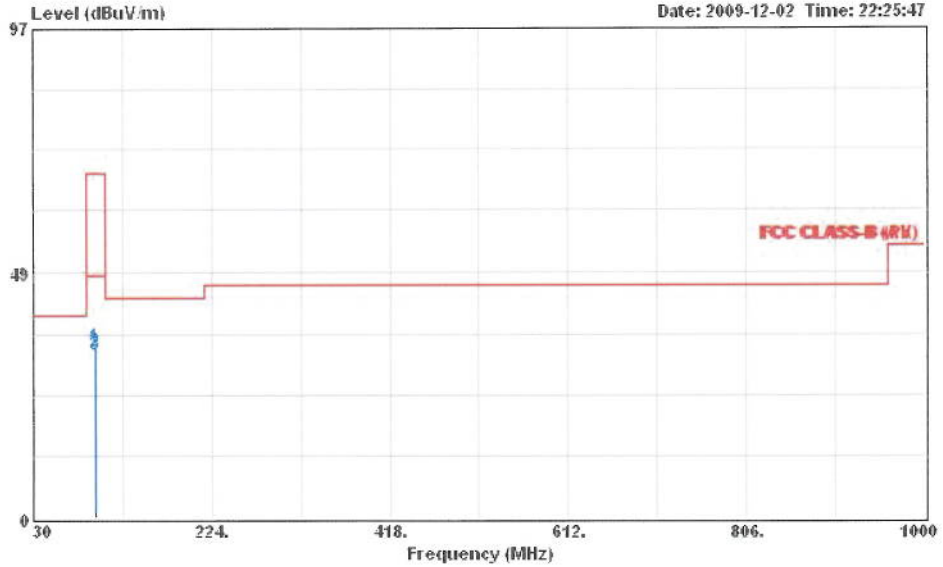


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : TOYOTA COROLLA
 Memo : 315度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp		Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	Remark	Pos	Pos
1	96.880	34.02	-33.98	68.00	48.91	2.26	10.96	28.11	Peak	128	---
2	96.880	32.98	-35.02	68.00	47.87	2.26	10.96	28.11	QP	128	---
3	96.880	32.34	-15.66	48.00	47.23	2.26	10.96	28.11	Average	128	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz / 0° / Mode 3		


Horizontal

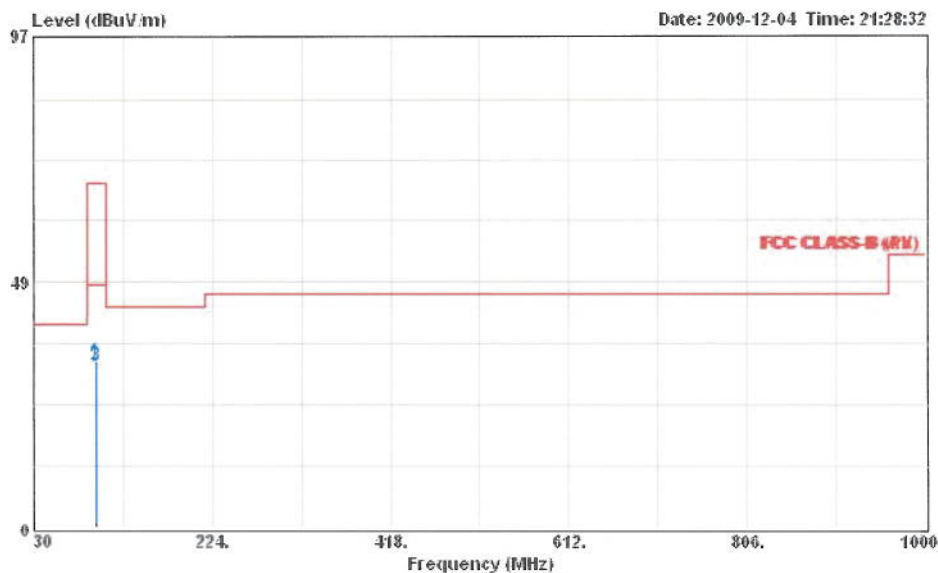

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	32.66	-35.34	68.00	47.55	2.26	10.96	28.11	Peak	303	---
2	96.900	32.00	-36.00	68.00	46.89	2.26	10.96	28.11	QP	303	---
3	96.900	31.76	-16.24	48.00	46.65	2.26	10.96	28.11	Average	303	---

Vertical

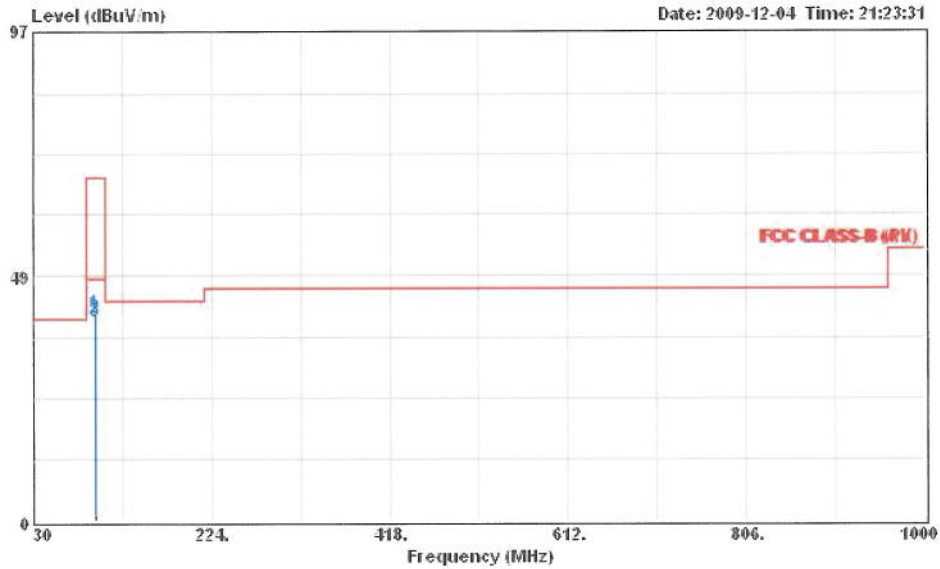


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM96.9M
 Memo : FORD IXION
 Memo : 0度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	41.12	-26.88	68.00	56.01	2.26	10.96	28.11	Peak	233	---
2	96.900	40.21	-27.79	68.00	55.10	2.26	10.96	28.11	QP	233	---
3	96.900	39.69	-8.31	48.00	54.58	2.26	10.96	28.11	Average	233	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 45° / Mode 3		


Horizontal

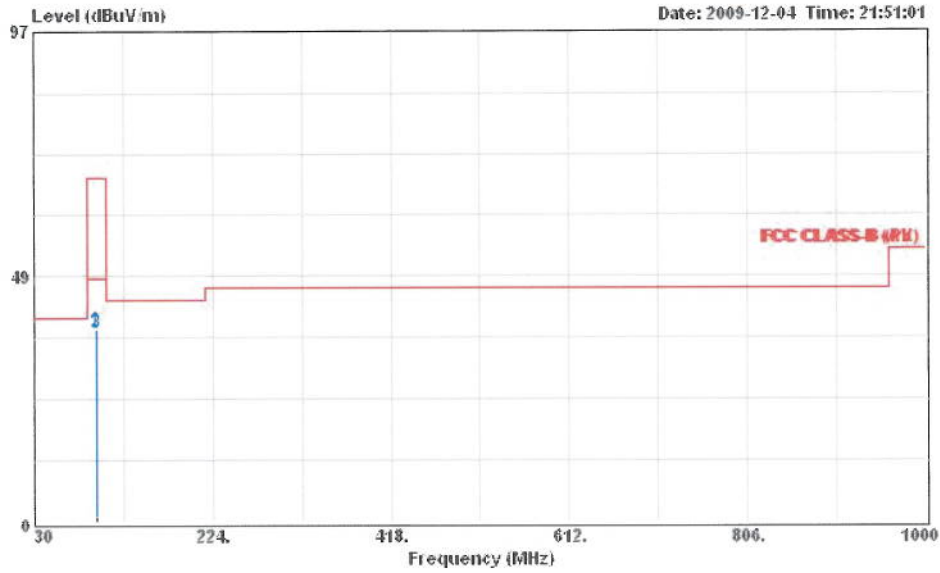

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Rnt Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	37.95	-30.05	68.00	52.84	2.26	10.96	28.11	Peak	326	---
2	96.900	37.45	-30.55	68.00	52.34	2.26	10.96	28.11	QP	326	---
3	96.900	37.18	-10.82	48.00	52.07	2.26	10.96	28.11	Average	326	---

Vertical

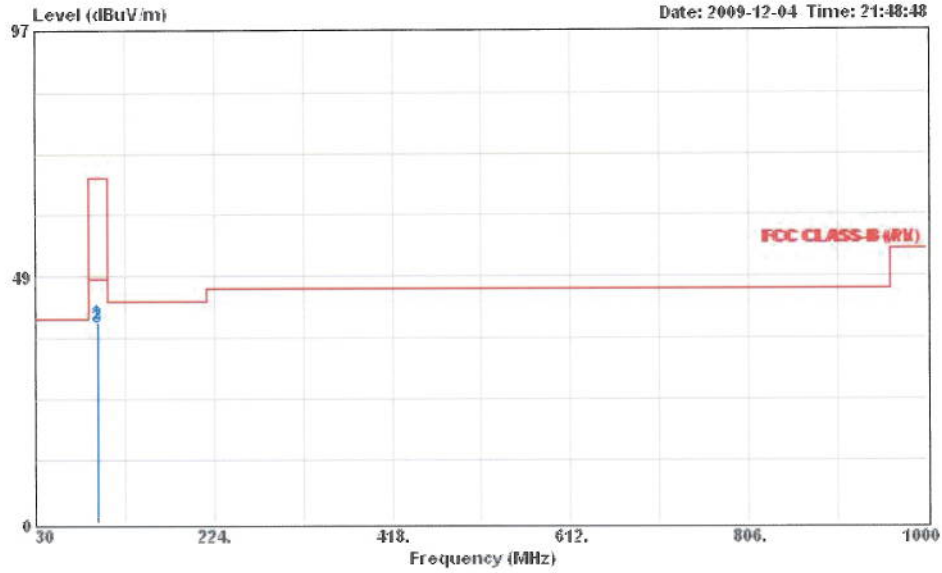


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	39.48	-28.52	68.00	54.37	2.26	10.96	28.11	Peak	100	---
2	96.900	38.92	-29.08	68.00	53.81	2.26	10.96	28.11	QP	100	---
3	96.900	38.34	-9.66	48.00	53.23	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 90° / Mode 3		


Horizontal

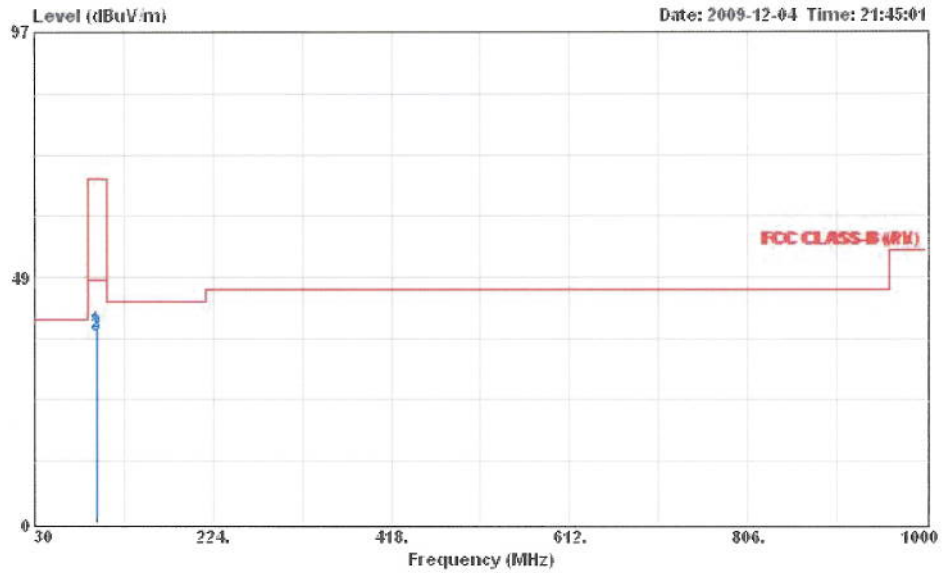

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 90度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	37.97	-30.03	68.00	52.86	2.26	10.96	28.11	Peak	200	---
2	96.900	37.40	-30.60	68.00	52.29	2.26	10.96	28.11	QP	200	---
3	96.900	36.98	-11.02	48.00	51.87	2.26	10.96	28.11	Average	200	---

Vertical

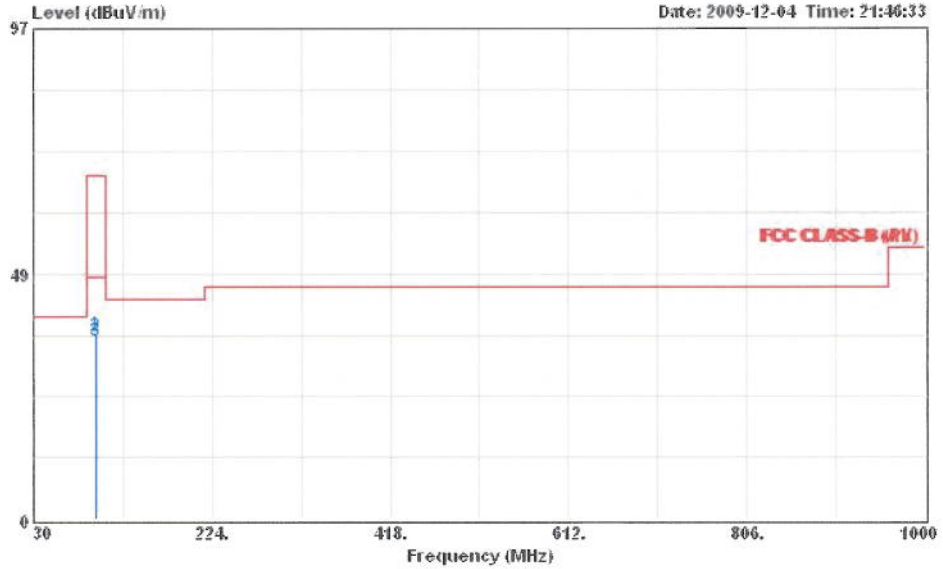


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 90度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	36.66	-31.34	68.00	51.55	2.26	10.96	28.11	Peak	100	---
2	96.900	36.13	-31.87	68.00	51.02	2.26	10.96	28.11	QP	100	---
3	96.900	35.39	-12.61	48.00	50.28	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 135° / Mode 3		


Horizontal

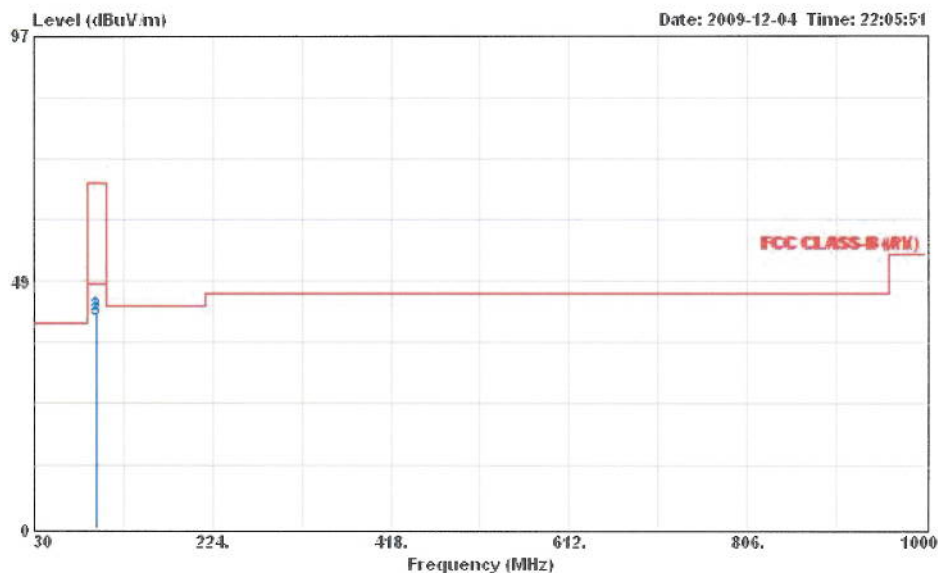

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	41.89	-26.11	68.00	56.78	2.26	10.96	28.11	Peak	335	---
2	96.900	41.45	-26.55	68.00	56.34	2.26	10.96	28.11	QP	335	---
3	96.900	40.75	-7.25	48.00	55.64	2.26	10.96	28.11	Average	335	---

Vertical

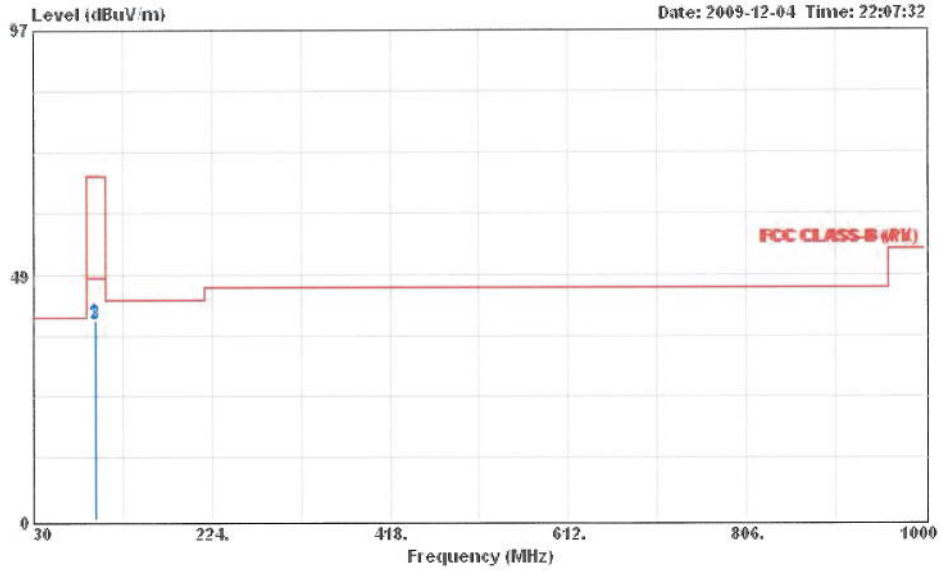


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 135度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	39.45	-28.55	68.00	54.34	2.26	10.96	28.11	Peak	100	---
2	96.900	39.02	-28.98	68.00	53.91	2.26	10.96	28.11	QP	100	---
3	96.900	38.72	-9.28	48.00	53.61	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 180° / Mode 3		


Horizontal

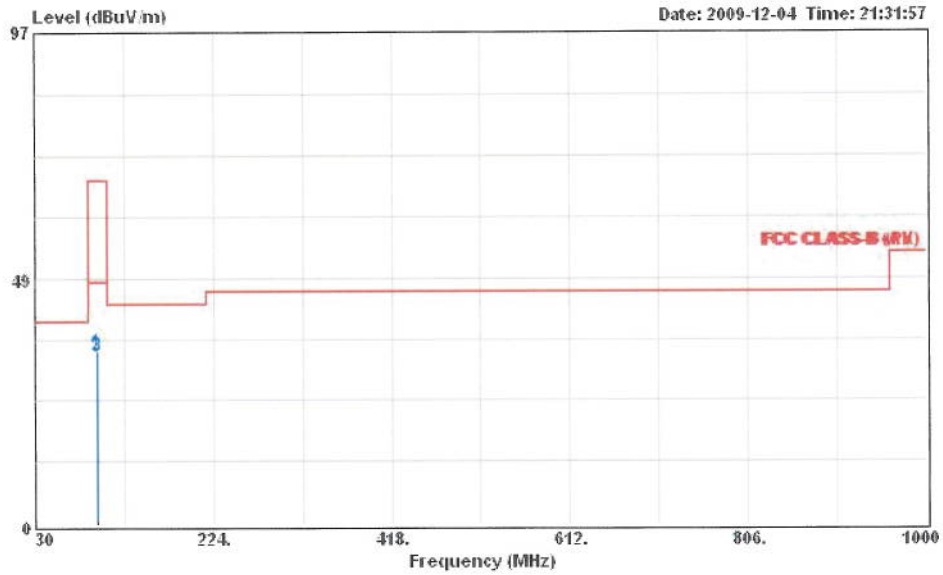

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	33.96	-34.04	68.00	48.85	2.26	10.96	28.11	Peak	189	---
2	96.900	33.31	-34.69	68.00	48.20	2.26	10.96	28.11	QP	189	---
3	96.900	33.07	-14.93	48.00	47.96	2.26	10.96	28.11	Average	189	---

Vertical

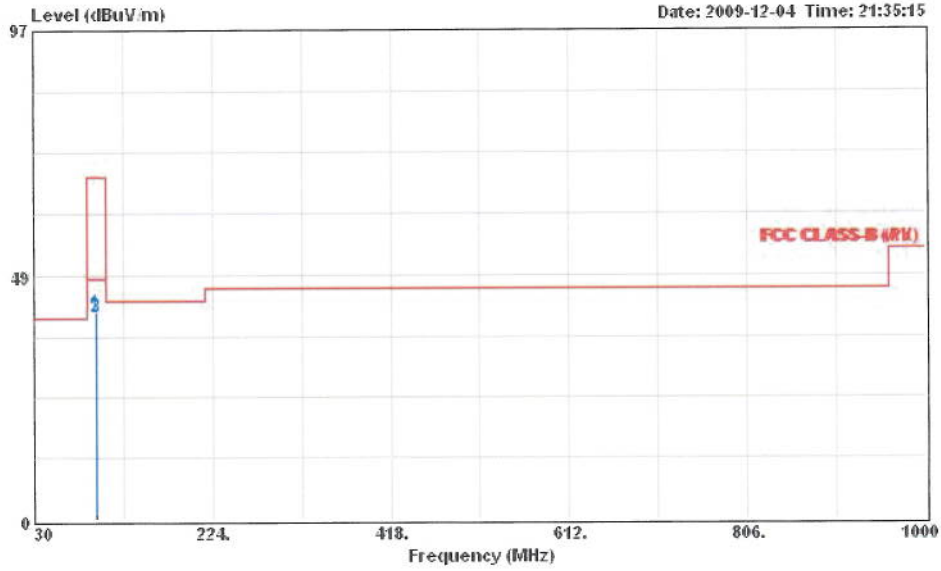


Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Rnt	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	41.25	-26.75	68.00	56.14	2.26	10.96	28.11	Peak	100	---
2	96.900	40.60	-27.40	68.00	55.49	2.26	10.96	28.11	QP	100	---
3	96.900	40.24	-7.76	48.00	55.13	2.26	10.96	28.11	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	96.9 MHz/ 225° / Mode 3		

Horizontal

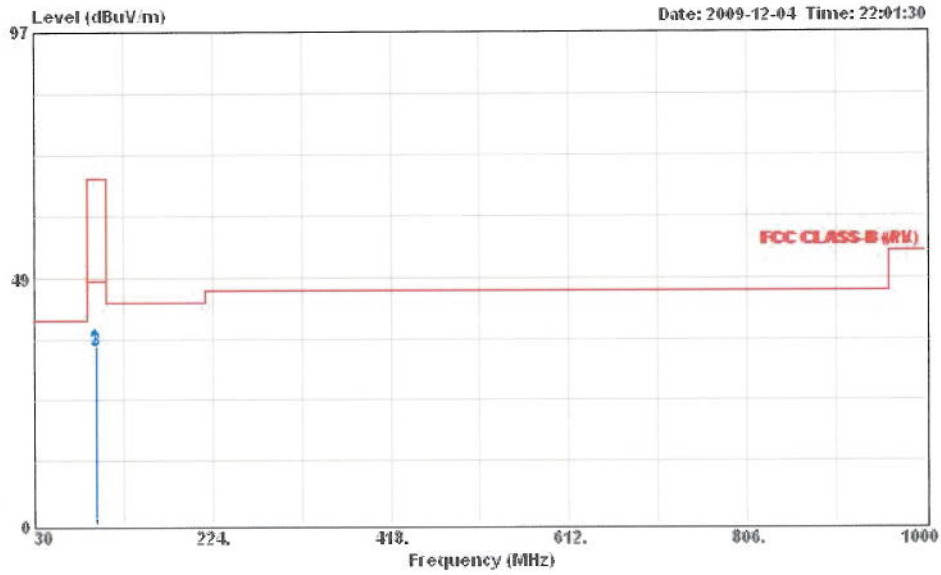

Site : 10CH01-HY
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL
 EUT : Xpress R
 Power :
 model : FM 96.9M
 Memo : FORD IXION
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	96.900	35.12	-32.88	68.00	50.01	2.26	10.96	28.11	Peak	400	---
2	96.900	34.39	-33.61	68.00	49.28	2.26	10.96	28.11	QP	400	---
3	96.900	34.06	-13.94	48.00	48.95	2.26	10.96	28.11	Average	400	---