



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
http://www.pctestlab.com



VERIFICATION OF COMPLIANCE FCC Part 15B / IC RSS-Gen Verification

Manufacturer Name & Address:

XM Satellite Radio, Inc.
3161 S.W. 10th Street
Deerfield Beach, FL 33442

Date of Testing:

July 18 - 19, 2007

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.:

0707180738.RS2


TRADE NAME:	DELPHI / SA10316
U.S. RESPONSIBLE PARTY	XM Satellite Radio, Inc.
Address:	3161 S.W. 10th Street Deerfield Beach, FL 33442
Contact Person:	Jean-Pierre Bourgon
Contact Telephone Number:	202-380-4165

EUT Type: XpressRC XM Radio Receiver
Model: SA10316
FCC ID: RS2XMXRC1
IC Cert No: 5697A-SA10316
FCC Rule Part(s): FCC Part 15 Subpart B, Part 2 (Verification)
IC Rule Part(s): RSS-Gen
FCC Classification: FCC Class B Digital Device
IC Classification: Class B Digital Device/Receiver
Test Procedure: ANSI C63.4-2003

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 (See Test Report). These measurements were performed with no deviation from the standards.



I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

NVLAP accreditation does not constitute any product endorsement by NVLAP or any agency of the United States Government. PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.





Randy Ortanez
President




Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 	Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»
		Page 1 of 28

T A B L E O F C O N T E N T S

FCC Class B MEASUREMENT REPORT.....		3
1.0 INTRODUCTION		4
1.1 EVALUATION PROCEDURE		4
1.2 SCOPE		4
1.3 PCTEST TEST LOCATION		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 OPERATION MODE.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
3.0 DESCRIPTION OF TEST		6
3.1 CONDUCTED EMISSIONS.....		6
3.2 RADIATED EMISSIONS.....		7
4.0 SAMPLE CALCULATIONS		8
4.1 CONDUCTED EMISSION MEASUREMENT SAMPLE CALCULATION		8
4.2 RADIATED EMISSION MEASUREMENT SAMPLE CALCULATION.....		8
5.0 TEST EQUIPMENT CALIBRATION DATA		9
6.0 ENVIRONMENTAL CONDITIONS		10
7.0 TEST DATA		11
7.1 SUMMARY		11
7.2 EMISSION MEASUREMENTS FOR TEST CONFIGURATION # 1		12
7.3 EMISSION MEASUREMENTS FOR TEST CONFIGURATION # 2		15
7.4 EMISSION MEASUREMENTS FOR TEST CONFIGURATION # 3		16
7.5 EMISSION MEASUREMENTS FOR TEST CONFIGURATION # 4		17
8.0 CONCLUSION.....		18
9.0 TEST SETUP PHOTOGRAPHS		19
10.0 EUT PHOTOGRAPHS		27

Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 2 of 28	



MEASUREMENT REPORT

FCC Part 15B / IC RSS-GEN



§ 2.1033 General Information

APPLICANT: XM Satellite Radio, Inc.
APPLICANT ADDRESS: 3161 S.W. 10th Street
 Deerfield Beach, FL 33442,
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): FCC Part 15 Subpart B, Part 2 (Verification)
IC RULE PART(S): RSS-Gen Receiver
MODEL: SA10316
EUT TYPE: XpressRC XM Radio Receiver
Test Device Serial No.: 13T0Q0MR1857 Production Pre-Production Engineering
FCC CLASSIFICATION: FCC Class B Digital Device
IC CLASSIFICATION: Class B Digital Device/Receiver
DATE(S) OF TEST: July 18 - 19, 2007



Test Methodology

Both conducted and radiated measurements were taken using the methods and procedures described in ANSI C63.4-2003. Radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility / NVLAP Accreditation

Conducted and radiated tests were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunication, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 3 of 28

1.0 INTRODUCTION

1.1 Evaluation Procedure

The evaluation of the Delphi XM Receiver was performed as described in the XM New Product Certification test plan dated July 16, 2007. The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) was used in the measurement of radiated and conducted emissions from the **Delphi XpressRC XM Radio Receiver Model: SA10316**.

Deviation from measurement procedure.....None

1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

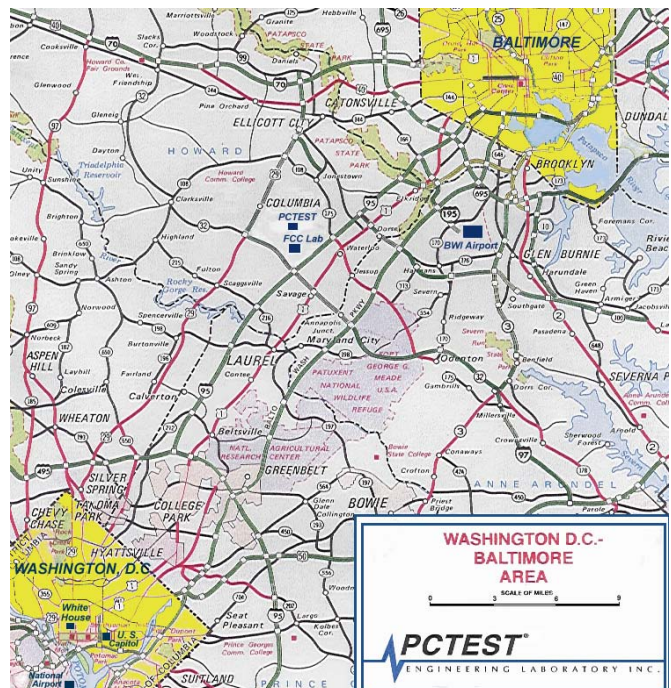


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 4 of 28

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Delphi XpressRC XM Radio Receiver**. The test data contained in this report pertains only to the emissions due to the digital circuitry of the EUT.

Manufacturer / Model	Description
Delphi / Model: SA10316	XpressRC XM Radio Receiver

Table 2-1. EUT Equipment Description

	Voltage (AC/DC) [Volts]	Operating Frequency [Hz]	Current [mA]
Input Power	100 - 240VAC	50 - 60	400
Output Power	5.2VDC		1600



Table 2-2. EUT Input/Output Power for XM AC Adapter

2.2 Operation Mode

The Delphi XpressRC XM Radio Receiver Model: SA10316 was connected to one of two different cradles in order to record all of the necessary measurements. Four different setups were examined for radiated emission compliance to section 15.109 using the vehicle cradle with the XM receiver. One of these setups was also examined for conducted emission compliance to section 15.107 using the home cradle with the XM receiver. Please see Section 7.0 and the test setup photographs for more information on the test setup.

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 5 of 28

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions




Figure 3-1. Shielded Enclosure Line-Conducted Test Facility

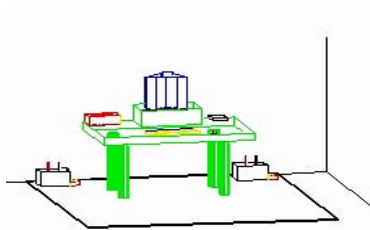


Figure 3-2. Line Conducted Emission Test Set-Up

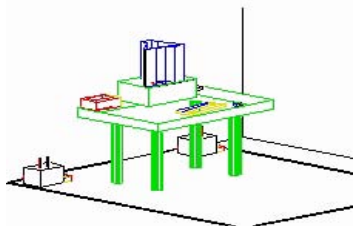


Figure 3-3. Wooden Table & Bonded LISNs

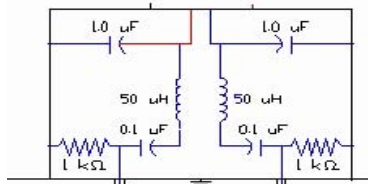


Figure 3-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 3-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see Figure 3-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

Model: «Model»	FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 6 of 28

3.2 Radiated Emissions

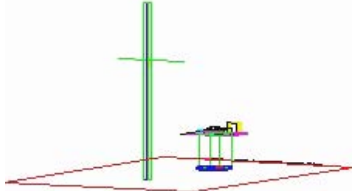


Figure 3-5. 3-Meter Test Site




Figure 3-6. Dimensions of Outdoor Test Site

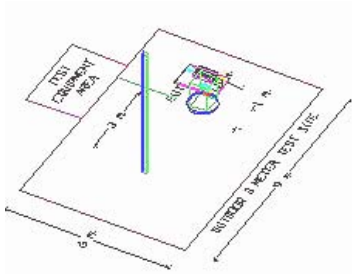


Figure 3-7. Turntable and System Setup

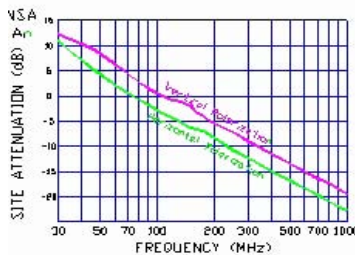


Figure 3-8. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3-5). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3-6). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in the test setup photographs. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.

Model: «Model»	FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 7 of 28

4.0 SAMPLE CALCULATIONS

4.1 Conducted Emission Measurement Sample Calculation

@ 20.3 MHz

Class B limit	=	60.0 dB μ V (Quasi-peak limit)
Reading	=	- 57.8 dBm (calibrated quasi-peak level)
Convert to dB μ V	=	- 57.8 + 107 = 49.2 dB μ V
Margin	=	49.2 - 60.0 = - 10.8 dB
	=	10.8 dB below limit

4.2 Radiated Emission Measurement Sample Calculation



@ 66.7 MHz

Class B limit	=	100 μ V/m = 40.0 dB μ V/m
Reading	=	- 76.0 dBm (calibrated level)
Convert to dB μ V	=	- 76.0 + 107 = 31.0 dB μ V
Antenna Factor + Cable Loss	=	5.8 dB/m
Total	=	36.8 dB μ V/m
Margin	=	36.8 - 40.0 = - 3.2 dB
	=	3.2 dB below limit

Note:

$$\text{Level}_{[\text{dB}\mu\text{V}]} = 20 \log_{10} (\text{Level}_{[\mu\text{V}/\text{m}]})$$

$$\text{Level}_{[\text{dB}\mu\text{V}]} = \text{Level}_{[\text{dBm}]} + 107$$



Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 	Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	E4407B ESA Spectrum Analyzer	04/29/07	Annual	04/28/08	US39210313
Agilent	HP 8566B (100Hz-22GHz) Spectrum Analyzer	12/21/06	Annual	12/21/07	3638A08713
Agilent	HP 8591A (9kHz-1.8GHz) Spectrum Analyzer	09/20/06	Annual	09/20/07	3144A02458
Agilent	HP 8591A (9kHz-1.8GHz) Spectrum Analyzer	09/20/06	Annual	09/20/07	3108A02053, 3034A01395
Agilent	E8257D (250kHz-20GHz) Signal Generator	03/08/07	Annual	03/07/08	MY45470194
CCA-7	CISPR QP Adapter	12/21/06	Annual	12/21/07	0194-04082
CCA-7	CISPR QP Adapter	12/21/06	Annual	12/21/07	0194-04082
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/12/06	Annual	12/12/07	3008A00985
Agilent	HP 11713A Attenuation/Switch Driver	12/12/06	Annual	12/12/07	N/A
Agilent	HP 85685A (20Hz-2GHz) Preselector	12/12/06	Annual	12/12/07	N/A
Agilent	HP 8566B Opt. 462 Impulse Bandwidth	12/12/06	Annual	12/12/07	3701A22204
Compliance Design	A100 Roberts Dipoles	08/31/05	Biennial	08/31/07	5118
EMCO	Dipole Pair	09/21/06	Biennial	09/20/08	23951
SOLAR	8012-50 LISN (2)	11/18/05	Biennial	11/18/07	0313233, 0310234
Pasternack	PE7000-6 6 dB Attenuator	N/A		N/A	N/A
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A

Table 5-1. Annual Test Equipment Calibration Schedule



Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 9 of 28

6.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C.

The relative humidity is controlled within range of 10% to 75%.

The atmospheric pressure is controlled within the range 86-106kPa (860-1060mbar).

Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 10 of 28	

7.0 TEST DATA

7.1 Summary

Test Date(s): July 18 - 19, 2007

Test Engineer: 

FCC Part 15 Section	IC RSS-Gen Section	Description	Result
15.107	7.2.2	Conducted Emissions	PASS
15.109	7.2.3	Radiated Emissions	PASS

Table 7-1. Summary of Test Results

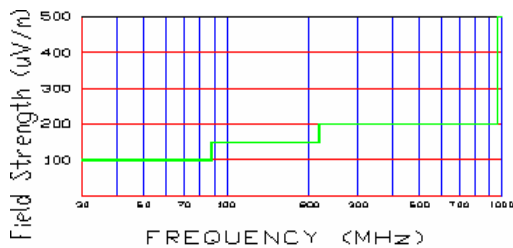




Figure 7-1. 3 Meter Limits

NOTES:

1. All modes of operation were investigated and the worst-case emissions are reported.
2. Radiated Emissions were measured from 30MHz – 2000MHz.
3. The radiated limits are shown on Figure 7-1. Above 1GHz the limit is 500µV/m.
4. All readings are calibrated by Agilent E8257D (250kHz – 20GHz) PSG Signal Generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
5. AFCL = Antenna Factor (Roberts dipole) and Cable Loss (30 ft. RG58C/U).
6. All measurements were recorded using a peak detector with a resolution bandwidth of 120kHz and a video bandwidth of at least three times the resolution bandwidth. The peak level complies with the quasi-peak limit.
7. Photographs of worst case emissions can be found in the Test Setup Photographs section at the end of this report.
8. Field Strength (dBmV/m) = 107 + Level (dBm) + AFCL (dBm).

Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 11 of 28

7.2 Emission Measurements for test configuration # 1

7.2.1 Test Setup Description

The XpressRC XM Radio Receiver Model: SA10316 was connected to the home cradle with an XM antenna and an AC power supply. Additionally, a set of external speakers was connected to the Audio Out port of the home cradle while the EUT was receiving live XM broadcast signal and was configured for a maximum audio output level. A distance of 10 cm was maintained between the edges of all items on the test setup table.

The test setup was tested for conducted and radiated emissions. Photographs of equipment and cable placement can be found in the Test Setup Photographs.

7.2.2 Test Support Equipment – Test Configuration # 1

1	Audiovox Home Stand for use with XpressRC XM Radio	Model:	136-4060	S/N:	060900003913640601P05
2	XM Home Antenna	6.1m	Unshielded antenna cable	S/N:	N/A
3	Phihong AC power supply	Model:	PSM08A-052	S/N:	11235920P05
		2.01m	Unshielded DC power cord		
4	Creative Speakers with audio cable	Model:	GCS300	S/N:	SW036B2319000293
		1.2m	Unshielded cable		
5	Creative AC power supply	Model:	DV-9440	S/N:	N/A
		1.5m	Unshielded DC cable		



Table 7-2. Test Support Equipment for Test Configuration # 1

7.2.3 Radiated Measurement Data – Test Configuration # 1

§15.109, RSS-Gen (7.2.3)

Frequency [MHz]	Peak Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	Field Strength [μ V/m]	Margin [dB]
67.72	-79.43	10.66	V	2.4	256	38.24	81.62	-1.76
79.01	-83.78	11.17	V	2.6	321	34.38	52.39	-5.62
95.97	-81.39	11.80	V	2.4	344	37.42	74.28	-6.10
101.57	-82.54	12.04	V	1.9	81	36.50	66.85	-7.02
124.18	-89.12	13.35	H	1.1	93	31.23	36.43	-12.29
220.14	-94.33	14.65	H	1.3	178	27.32	23.24	-18.70

Table 7-3. Radiated Measurements at 3-meters


Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 12 of 28

7.2.4 Line Conducted Measurement Data – Test Configuration # 1
§15.107, RSS-Gen (7.2.2)

PCTEST Engineering Laboratory Inc.

Company : XM Satellite Radio, Inc.
 Model Number : SA10316
 Standard : FCC Part 15B class B

Power Source : AC120V/60Hz
 Tested Date : 07/18/2007
 Note : Tested with XM AC Power Adapter Model: PSM08A-052

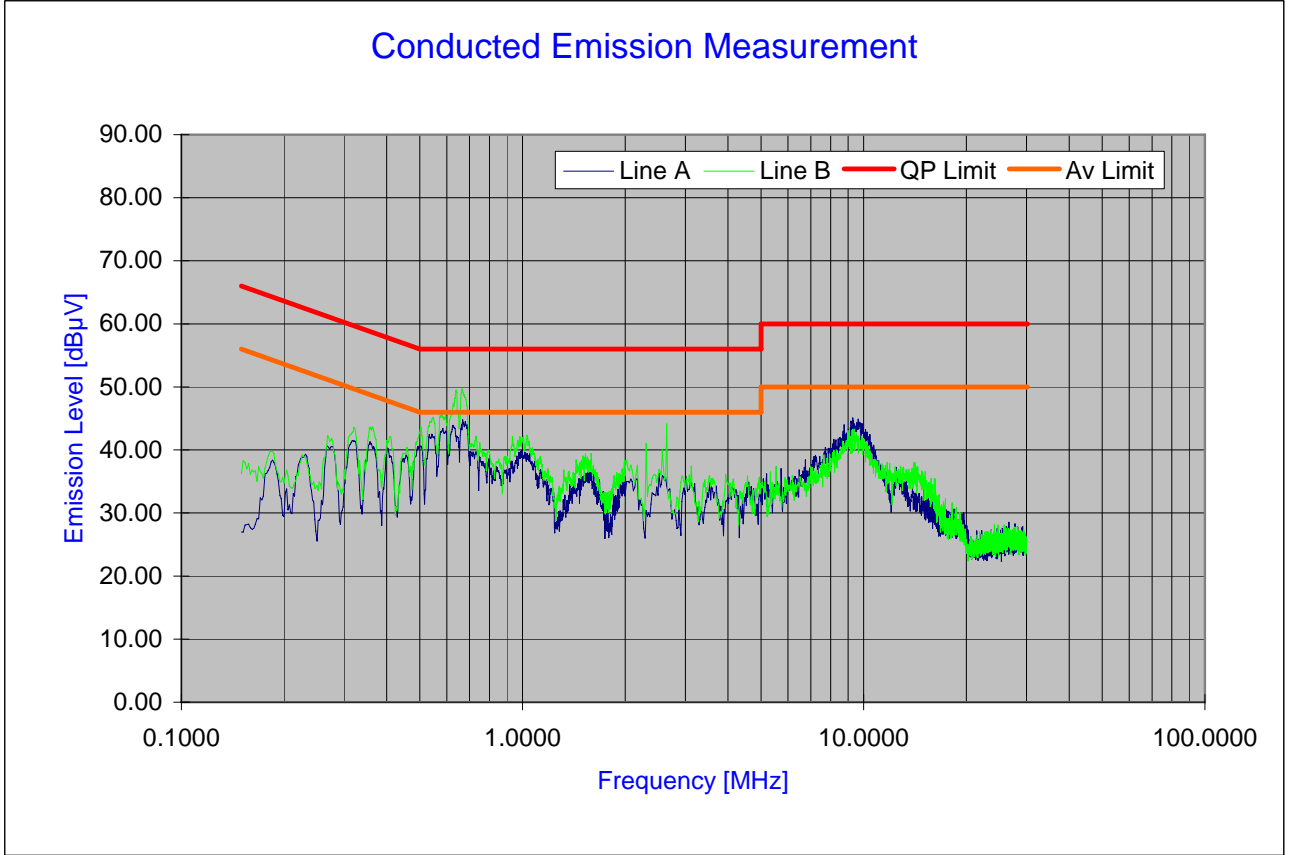



Ver.1.1 ©PCTEST 2006.08

Plot 7-1. Line-Conducted Test Plot for Test Configuration # 1

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.107 of the Title 47 CFR and in RSS-Gen (7.2.2) for Industry Canada.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 	Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»



Line Conducted Measurement Data – Test Configuration # 1
§15.107, RSS-Gen (7.2.2)

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBµV]	Limit [dBµV]	Margin [dB]	Average [dBµV]	Limit [dBµV]	Margin [dB]
1	A	0.501	7.43	38.94	56.00	-17.06	24.41	46.00	-21.59
2	A	0.548	7.41	41.01	56.00	-14.99	25.57	46.00	-20.43
3	A	0.585	7.40	41.17	56.00	-14.83	25.52	46.00	-20.48
4	A	0.675	7.38	43.45	56.00	-12.55	28.85	46.00	-17.15
5	A	0.988	7.33	36.85	56.00	-19.15	22.53	46.00	-23.47
6	A	9.245	7.59	40.01	60.00	-19.99	25.35	50.00	-24.65
7	A	9.258	7.59	40.07	60.00	-19.93	25.35	50.00	-24.65
8	A	9.619	7.59	40.37	60.00	-19.63	25.54	50.00	-24.46
9	A	9.622	7.59	40.35	60.00	-19.65	25.55	50.00	-24.45
10	A	9.845	7.60	40.05	60.00	-19.95	25.25	50.00	-24.75
11	B	0.506	7.43	46.19	56.00	-9.81	29.32	46.00	-16.68
12	B	0.548	7.41	43.74	56.00	-12.26	31.32	46.00	-14.68
13	B	0.587	7.40	47.69	56.00	-8.31	31.46	46.00	-14.54
14	B	0.631	7.39	48.64	56.00	-7.36	34.44	46.00	-11.56
15	B	0.669	7.38	50.21	56.00	-5.79	36.22	46.00	-9.78
16	B	0.746	7.37	38.70	56.00	-17.30	26.49	46.00	-19.51
17	B	0.933	7.33	39.69	56.00	-16.31	26.13	46.00	-19.87
18	B	0.998	7.32	38.94	56.00	-17.06	27.13	46.00	-18.87
19	B	1.032	7.32	41.73	56.00	-14.27	26.65	46.00	-19.35
20	B	2.575	7.42	36.11	56.00	-19.89	24.32	46.00	-21.68

Table 7-4. Line-Conducted Test Data for Test Configuration # 1

Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.107 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 14 of 28

7.3 Emission Measurements for test configuration # 2

7.3.1 Test Setup Description

The XpressRC XM Radio Receiver Model: SA10316 was connected to the vehicle cradle powered by a 12V battery through a cigarette lighter vehicle adapter. An XM FM Direct Adapter was connected through the “FM In” port to a FM aerial antenna, through the “FM Out” port to a 75Ω terminator, and to an XM antenna. A 3’x4’ ground plane was used in the setup to replicate the conditions in which an FM antenna is installed in a vehicle. The EUT was configured to receive live XM broadcast signal and was configured for a maximum audio output level. A distance of 10 cm was maintained between the edges of all items on the setup table.

The test setup was tested for radiated emissions only. Photographs of equipment and cable placement can be found in the Test Setup Photographs.

7.3.2 Test Support Equipment – Test Configuration # 2

1	Audiovox Car Cradle for use with XpressRC XM Radio Receiver	Model:	136-4458	S/N:	13644580
2	5.0V DC vehicle power adapter	1.05m	Unshielded cable with ferrite bead on one end	S/N:	N/A
3	Audiovox FM Direct Adapter Box with 75Ω termination	Model:	XMFM1	S/N:	061201911411236140
4	XM Antenna	7.01m	Unshielded antenna cable	S/N:	N/A
5	FM aerial antenna	Model:	N/A	S/N:	N/A
6	EverStart Lawn/Garden 12V AC battery	Model:	N/A	S/N:	N/A



Table 7-5. Test Support Equipment for Test Configuration # 2

7.3.3 Radiated Measurement Data – Test Configuration # 2

§15.109, RSS-Gen (7.2.3)

Frequency [MHz]	Peak Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
55.82	-94.23	10.04	V	1.8	222	22.81	13.82	-17.19
88.30	-76.06	11.53	V	1.6	315	42.47	132.90	-1.05
191.97	-94.61	14.88	H	1.2	313	27.27	23.09	-16.25
312.00	-92.02	16.94	H	1.0	312	31.92	39.44	-14.10
360.00	-87.28	18.23	H	1.0	300	37.95	78.94	-8.07
408.00	-81.80	19.35	H	1.9	296	44.55	168.76	-1.48

Table 7-6. Radiated Measurements at 3-meters

Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 15 of 28

7.4 Emission Measurements for test configuration # 3

7.4.1 Test Setup Description

The XpressRC XM Radio Receiver Model: SA10316 was connected to the vehicle cradle powered by a 12V battery through a cigarette lighter vehicle adapter. The vehicle cradle was connected to an XM audio cassette adapter and an XM antenna. The EUT was configured to receive live XM broadcast signal and was configured for a maximum audio output level. A distance of 10 cm was maintained between the edges of all items on the setup table.

The test setup was tested for radiated emissions only. Photographs of equipment and cable placement can be found in the Test Setup Photographs.

7.4.2 Test Support Equipment – Test Configuration # 3

1	Audiovox Car Cradle for use with XpressRC XM Radio Receiver	Model:	136-4458	S/N:	13644580
2	5.0V DC vehicle power adapter	1.05m	Unshielded cable with ferrite bead on one end	S/N:	N/A
3	XM cassette adapter	1.12m	Unshielded audio cable	S/N:	N/A
4	XM Antenna	7.01m	Unshielded antenna cable	S/N:	N/A
5	EverStart Lawn/Garden 12V AC battery	Model:	N/A	S/N:	N/A



Table 7-7. Test Support Equipment for Test Configuration # 3

7.4.3 Radiated Measurement Data – Test Configuration # 3

§15.109, RSS-Gen (7.2.3)

Frequency [MHz]	Peak Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	Field Strength [μ V/m]	Margin [dB]
56.44	-95.71	10.08	V	2.4	258	21.36	11.70	-18.64
73.37	-95.20	10.92	V	2.3	137	22.72	13.68	-17.28
167.99	-95.31	14.72	H	1.5	189	26.41	20.93	-17.11
264.01	-89.51	14.97	H	1.0	177	32.47	42.01	-13.55
360.02	-87.79	18.23	H	1.1	76	37.44	74.45	-8.58
407.99	-85.95	19.35	V	1.3	5	40.40	104.66	-5.63

Table 7-8. Radiated Measurements at 3-meters

Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 16 of 28

7.5 Emission Measurements for test configuration # 4

7.5.1 Test Setup Description

The XpressRC XM Radio Receiver Model: SA10316 was connected to the vehicle cradle powered by a 12V battery through a cigarette lighter vehicle adapter. The vehicle cradle was connected to an audio cable (un-terminated on one end) and an XM antenna. The EUT was configured to receive live XM broadcast signal and was configured for a maximum audio output level. A distance of 10 cm was maintained between the edges of all items on the setup table.

The test setup was tested for radiated emissions only. Photographs of equipment and cable placement can be found in the Test Setup Photographs.

7.5.2 Test Support Equipment – Test Configuration # 4

1	Audiovox Car Cradle for use with XpressRC XM Radio Receiver	Model:	136-4458	S/N:	13644580
2	5.0V DC vehicle power adapter	1.05m	Unshielded cable with ferrite bead on one end	S/N:	N/A
3	XM audio out cable	0.95m	Unshielded audio cable	S/N:	N/A
4	XM Antenna	7.01m	Unshielded antenna cable	S/N:	N/A
5	EverStart Lawn/Garden 12V AC battery	Model:	N/A	S/N:	N/A



Table 7-9. Test Support Equipment for Test Configuration # 4

7.5.3 Radiated Measurement Data – Test Configuration # 4

§15.109, RSS-Gen (7.2.3)



Frequency [MHz]	Peak Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dB μ V/m]	Field Strength [μ V/m]	Margin [dB]
67.74	-93.84	10.66	V	2.0	0	23.82	15.52	-16.18
79.03	-96.12	11.17	H	1.5	0	22.05	12.66	-17.95
95.99	-97.88	11.81	H	1.8	357	20.93	11.13	-22.59
120.01	-94.16	13.13	V	1.1	59	25.97	19.88	-17.55
360.02	-91.34	18.23	H	1.0	287	33.89	49.48	-12.13
408.01	-80.68	18.76	H	1.0	308	45.08	179.49	-0.94

Table 7-10. Radiated Measurements at 3-meters



Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 17 of 28


8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **XpressRC XM Radio Receiver Model: SA10316** has been verified to comply with the requirements specified in Part 15 (§15.107 and §15.109) and Part 2 of the FCC Rules as well as RSS-Gen for Industry Canada.



Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»		Page 18 of 28

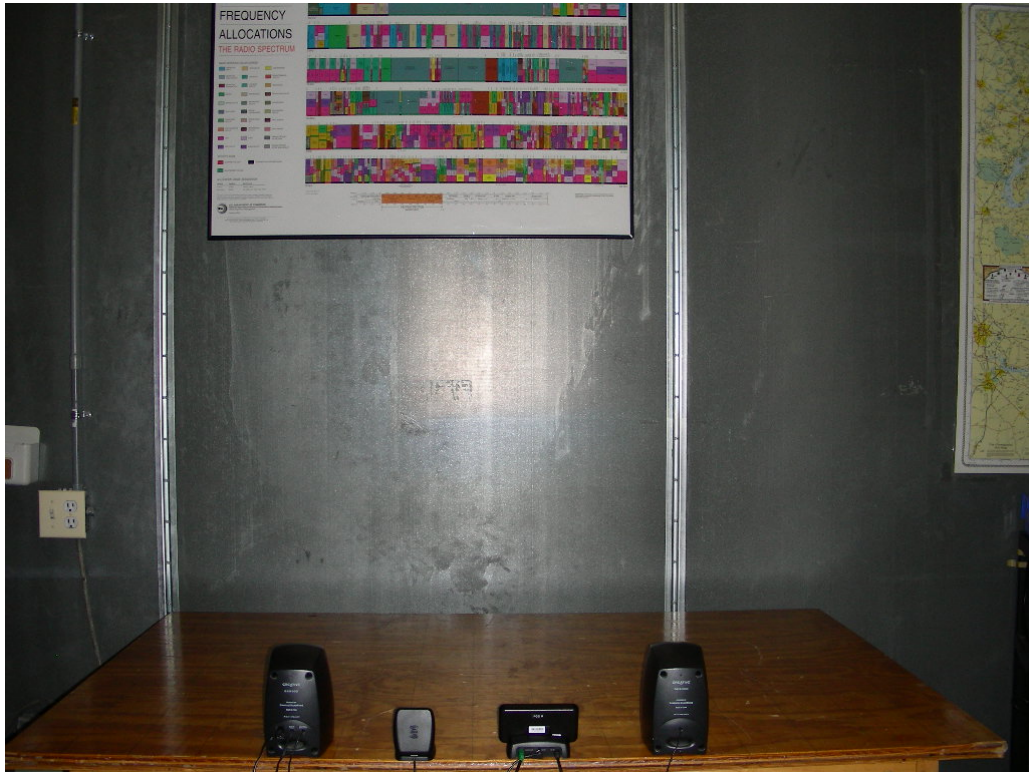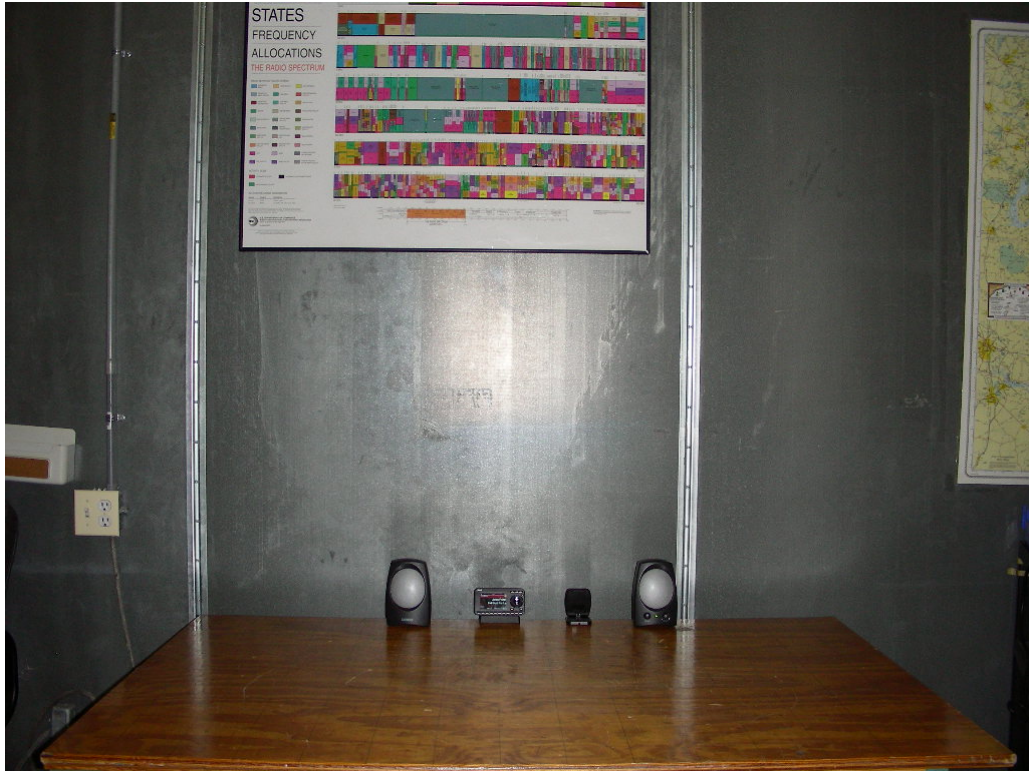9.0 TEST SETUP PHOTOGRAPHS






Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 	Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 19 of 28





Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 20 of 28	



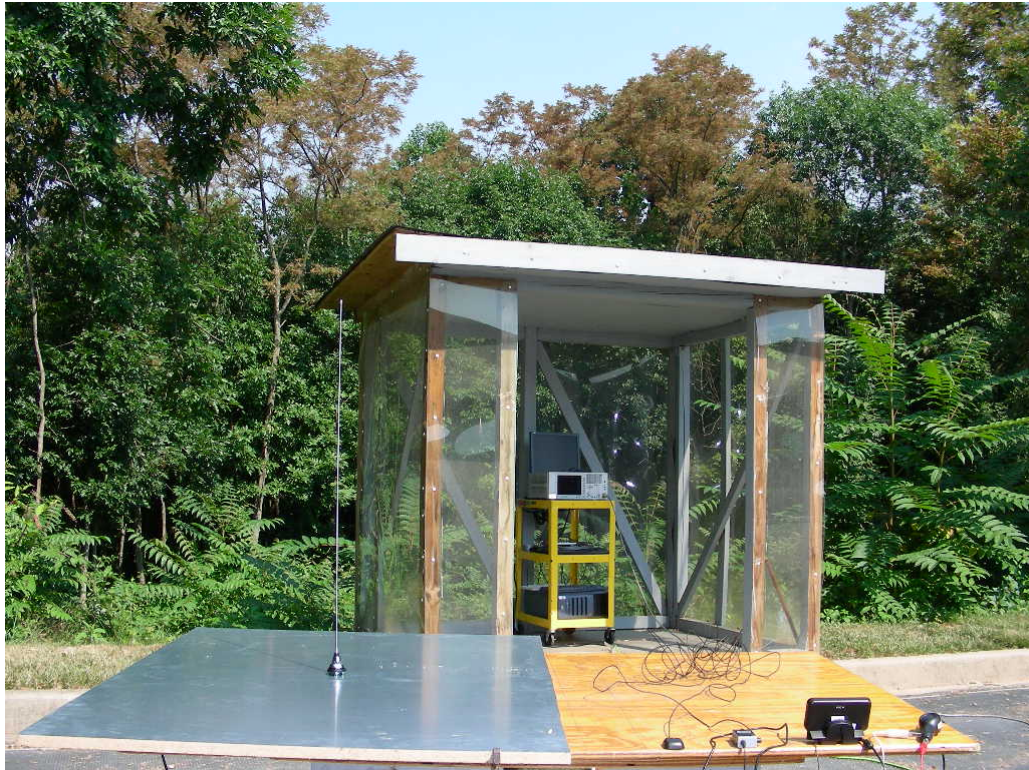

Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 21 of 28





Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 22 of 28	





Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 23 of 28	





Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 24 of 28



Model: «Model»		FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 25 of 28	



Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 26 of 28

10.0 EUT PHOTOGRAPHS



Figure 10-1. XM XpressRC Unit



Figure 10-2. XM XpressRC Unit with Home Cradle





Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 	Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»



Figure 10-3. XM XpressRC Unit with Vehicle Cradle

Model: «Model»	 FCC Pt. 15B / IC RSS-GEN VERIFICATION TEST REPORT 		Reviewed by: Quality Manager
Test Report S/N: «Report_SN»	Test Dates: «Date_of_Testing»	EUT Type: «EUT_Type»	Page 28 of 28