


INTERTEK TESTING SERVICES


Report No.: HK11050982-1
Sample No.: 7/9,8/9,9/9

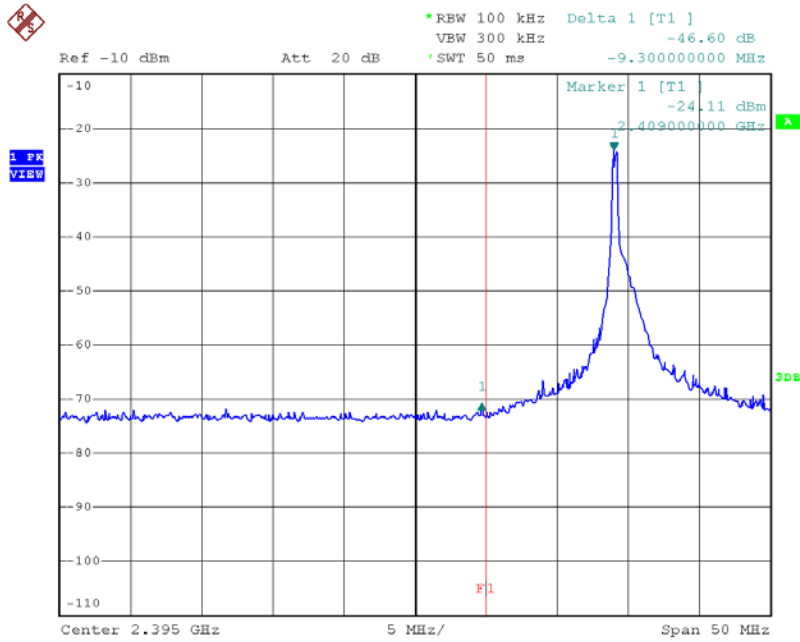

OATS=99.00dBuV/m
 Field Strength (Peak)
 =99.00 - 46.60 dBuV/m
 =52.40 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 =52.40 - AF dBuV/m
 =52.40 - 23.70 dBuV/m
 =28.70 dBuV/m
 (Limit: 54 dBuV/m)

Date: 30.MAY.2011 03:39:45

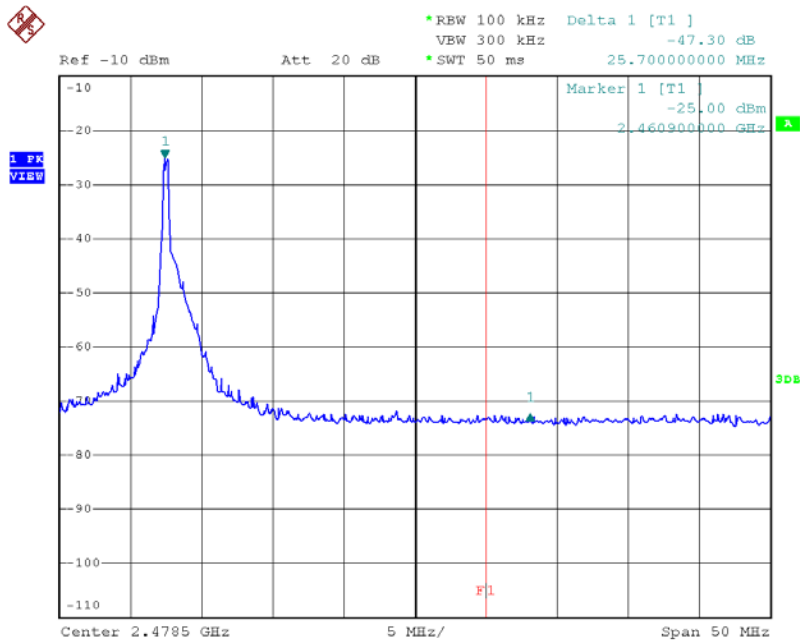

OATS=97.80dBuV/m
 Field Strength (Peak)
 =97.80 - 47.30 dBuV/m
 =50.5 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 =50.50 - AF dBuV/m
 =50.50 - 23.70 dBuV/m
 =26.80 dBuV/m
 (Limit: 54 dBuV/m)

Date: 30.MAY.2011 03:47:43

**Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass/Fail)
Pursuant to RSS-210 Requirement**