


INTERTEK TESTING SERVICES


Report No.: HK11060534-1
Sample No.: 1/2

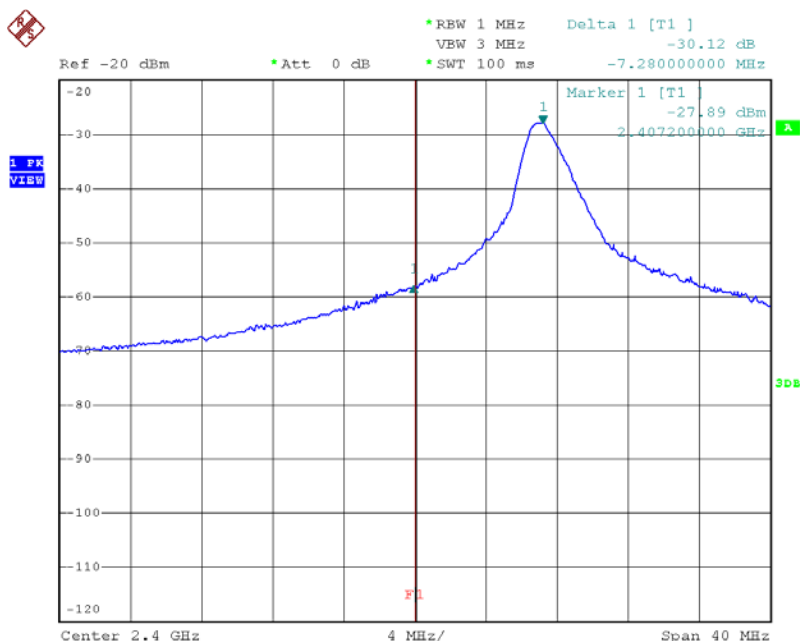

OATS=90.60dBuV/m
Field Strength (Peak)
=90.60 - 30.12 dBuV/m
=60.48 dBuV/m
(Limit: 74 dBuV/m)

Field Strength (Average)
=60.48 - AF dBuV/m
=60.48 - 23.50 dBuV/m
=36.98 dBuV/m
(Limit: 54 dBuV/m)

Date: 11.JUN.2011 05:06:47

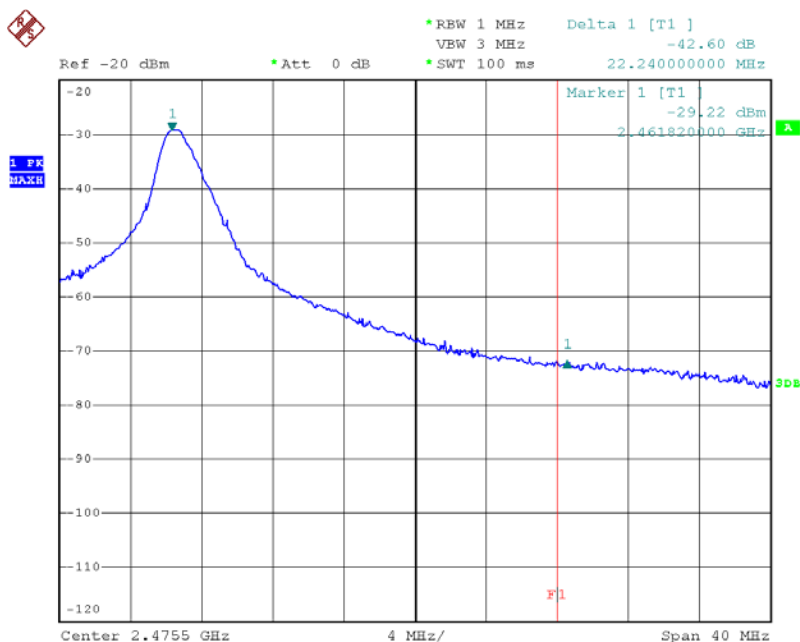

OATS=92.00dBuV/m
Field Strength (Peak)
=92.00 - 42.60 dBuV/m
=49.40 dBuV/m
(Limit: 74 dBuV/m)

Field Strength (Average)
=49.40 - AF dBuV/m
=49.40 - 23.50 dBuV/m
=25.90 dBuV/m
(Limit: 54 dBuV/m)

Date: 11.JUN.2011 04:53:21

**Bandedge Plot - Pursuant to FCC Part 15 Section 15.249 Requirement (Pass/Fail)
Pursuant to RSS-210 Requirement**