



Valued Quality. Delivered.

TEST REPORT

Report No.: 15070859HKG-001

Hasbro Far East Ltd.

Application
For
Certification
(Original Grant)
(FCC ID: RS4B1130)

Transceiver

Prepared and Checked by:

Approved by:

Signed On File

Leung Sung Tak, Andy
Assistant Engineer

Wong Kwok Yeung, Kenneth
Lead Engineer

Date: September 9, 2015

- Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-ettsemko.com

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Grantee:	Hasbro Far East Ltd.
Grantee Address:	1308, World Commerce Centre, Harbour City, 11 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong
Contact Person:	Richard Leung
Tel:	(852) 2737 7446
Fax:	(852) 2737 6448
e-mail:	N/A
Manufacturer:	Hasbro SA
Manufacturer Address:	Rue Emile-Boéchat 31 2800 Delemont CH CH-2800 Delémont, Switzerland
Buyer:	Hasbro
Vendor:	Wynnewood Industrial (SZ) Ltd.
Brand Name:	N/A
Model:	B1131
Additional Model:	B1130
Factory Code:	A
Vendor Code:	ZC048
Type of EUT:	Transceiver
Description of EUT:	AVN PMN Basic Starter Pack Hulk Hands W1 (B1131), AVN PMN Gamma Gear Mark II (B1130)
Serial Number:	N/A
FCC ID:	RS4B1130
Date of Sample Submitted:	July 16, 2015
Date of Test:	July 16, 2015 to August 06, 2015
Report No.:	15070859HKG-001
Report Date:	September 9, 2015
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

Report No.: 15070859HKG-001
FCC ID: RS4B1130

i

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

SUMMARY OF TEST RESULT

TEST SPECIFICATION	REFERENCE	RESULTS
Radiated Emission Radiated Emission on the Bandedge	15.249, 15.209	Pass
Radiated Emission in Restricted Bands	15.205	Pass

The equipment under test is found to be complying with the following standards:
FCC Part 15, October 1, 2014 Edition

- Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

INTERTEK TESTING SERVICES

Table of Contents

1.0	<u>General Description</u>	1
1.1	Product Description	1
1.2	Related Submittal(s) Grants.....	1
1.3	Test Methodology	1
1.4	Test Facility	1
2.0	<u>System Test Configuration</u>	3
2.1	Justification.....	3
2.2	EUT Exercising Software.....	3
2.3	Special Accessories	3
2.4	Measurement Uncertainty.....	3
2.5	Support Equipment List and Description.....	3
3.0	<u>Emission Results</u>	4
3.1	Field Strength Calculation.....	4
3.2	Radiated Emission Configuration Photograph	5
3.3	Radiated Emission Data	5
4.0	<u>Equipment Photographs</u>	15
5.0	<u>Product Labelling</u>	15
6.0	<u>Technical Specifications</u>	15
7.0	<u>Instruction Manual</u>	15
8.0	<u>Miscellaneous Information</u>	16
8.1	Radiated Emission on the Bandedge.....	16
8.2	Discussion of Pulse Desensitization	21
8.3	Calculation of Average Factor.....	21
8.4	Emissions Test Procedures	22
9.0	<u>Confidentiality Request</u>	25
10.0	<u>Equipment List</u>	25

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a 2.4GHz Transceiver (Hulk Right Hand). The EUT is powered by 2 x 1.5V AA batteries. The EUT contains a Bluetooth 4.0 module and a 2.4GHz module. The Bluetooth 4.0 module is operating in the frequencies from 2402MHz to 2480MHz (39 channels with 2MHz channel spacing). The 2.4GHz module operating at frequencies (2420, 2423, 2427, 2430, 2433, 2435, 2447 and 2449) MHz (8 channels). When the EUT is powered on, it can be connected with the Apps through Bluetooth 4.0 module which can be switched to the Proprietary Mode and this is for the connection between the other (Hulk Right Hand) in able to enter the Battle Playing Mode. The 2.4GHz module aims for the data communication with the corresponding Hulk Left Hand. The (Hulk Right Hand) contains two impact buttons and one shake switch, when the impact button or the shake switch is activated, the sound effect will be busted out through the speaker.

The Model: B1130 is the same as the Model: B1131 in hardware aspect. The models are different in color and item number only.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

The Certification procedure of transceiver for this transceiver (with FCC ID: RS4B1130T) is being processed as the same time of this application.

1.3 Test Methodology

Radiated emission measurements was performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The 3m Chamber facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo

INTERTEK TESTING SERVICES

Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by new 4 x 1.5V AA Batteries.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

The simultaneous transmission of both RF2.4GHz portion and Bluetooth portion into the device were checked. There is no new emission was observed during the simultaneous transmission. The data in this report represented the worst-case.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

2.5 Support Equipment List and Description

Apps :Avengers Net, Version: 1.2.43

INTERTEK TESTING SERVICES

3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where

- FS = Field Strength in dB μ V/m
- RR = RA - AG - AV in dB μ V
- LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 52.0 dB μ V/m	
AF = 7.4 dB	RR = 18.0 dB μ V
CF = 1.6 dB	LF = 9.0 dB
AG = 29.0 dB	
AV = 5.0 dB	
FS = RR + LF	
FS = 18 + 9 = 27 dB μ V/m	

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 14694.000 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 0.2 dB

INTERTEK TESTING SERVICES

Applicant: Hasbro Far East Ltd.

Date of Test: August 06, 2015

Model: B1131

Worst-Case Operating Mode: Transmitting, 2.4G (Right)

Table 1
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2420.000	74.6	33	29.4	71.0	0	71.0	94.0	-23.0
H	2400.000	54.1	33	29.4	50.5	0	50.5	54.0	-3.5
V	4840.000	46.7	33	34.9	48.6	0	48.6	54.0	-5.4
V	7260.000	45.3	33	37.9	50.2	0	50.2	54.0	-3.8
V	9680.000	44.3	33	40.4	51.7	0	51.7	54.0	-2.3
V	12100.000	44.9	33	40.5	52.4	0	52.4	54.0	-1.6
V	14520.000	47.8	33	38.4	53.2	0	53.2	54.0	-0.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2420.000	74.6	33	29.4	71.0	114.0	-43.0
H	2400.000	54.1	33	29.4	50.5	74.0	-23.5
V	4840.000	46.7	33	34.9	48.6	74.0	-25.4
V	7260.000	45.3	33	37.9	50.2	74.0	-23.8
V	9680.000	44.3	33	40.4	51.7	74.0	-22.3
V	12100.000	44.9	33	40.5	52.4	74.0	-21.6
V	14520.000	47.8	33	38.4	53.2	74.0	-20.8

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Hasbro Far East Ltd.

Date of Test: August 06, 2015

Model: B1131

Worst-Case Operating Mode: Transmitting, 2.4G (Right)

Table 2
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2435.000	74.8	33	29.4	71.2	0	71.2	94.0	-22.8
V	4870.000	47.0	33	34.9	48.9	0	48.9	54.0	-5.1
V	7305.000	45.9	33	37.9	50.8	0	50.8	54.0	-3.2
V	9740.000	44.0	33	40.4	51.4	0	51.4	54.0	-2.6
V	12175.000	44.8	33	40.5	52.3	0	52.3	54.0	-1.7
V	14610.000	48.2	33	38.4	53.6	0	53.6	54.0	-0.4

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2435.000	74.8	33	29.4	71.2	114.0	-42.8
V	4870.000	47.0	33	34.9	48.9	74.0	-25.1
V	7305.000	45.9	33	37.9	50.8	74.0	-23.2
V	9740.000	44.0	33	40.4	51.4	74.0	-22.6
V	12175.000	44.8	33	40.5	52.3	74.0	-21.7
V	14610.000	48.2	33	38.4	53.6	74.0	-20.4

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Hasbro Far East Ltd.

Date of Test: August 06, 2015

Model: B1131

Worst-Case Operating Mode: Transmitting, 2.4G (Right)

Table 3
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2449.000	75.6	33	29.4	72.0	0	72.0	94.0	-22.0
H	2483.500	54.4	33	29.4	50.8	0	50.8	54.0	-3.2
V	4898.000	46.8	33	34.9	48.7	0	48.7	54.0	-5.3
V	7347.000	46.0	33	37.9	50.9	0	50.9	54.0	-3.1
V	9796.000	43.9	33	40.4	51.3	0	51.3	54.0	-2.7
V	12245.000	45.2	33	40.5	52.7	0	52.7	54.0	-1.3
V	14694.000	48.4	33	38.4	53.8	0	53.8	54.0	-0.2

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2449.000	75.6	33	29.4	72.0	114.0	-42.0
H	2483.500	54.4	33	29.4	50.8	74.0	-23.2
V	4898.000	46.8	33	34.9	48.7	74.0	-25.3
V	7347.000	46.0	33	37.9	50.9	74.0	-23.1
V	9796.000	43.9	33	40.4	51.3	74.0	-22.7
V	12245.000	45.2	33	40.5	52.7	74.0	-21.3
V	14694.000	48.4	33	38.4	53.8	74.0	-20.2

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Hasbro Far East Ltd.

Date of Test: August 06, 2015

Model: B1131

Worst-Case Operating Mode: Transmitting, P mode (Right)

Table 4
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	92.8	33	29.4	89.2	0	89.2	94.0	-4.8
V	4804.000	51.1	33	34.9	53.0	0	53.0	54.0	-1.0
V	7206.000	44.4	33	37.9	49.3	0	49.3	54.0	-4.7
V	9608.000	43.0	33	40.4	50.4	0	50.4	54.0	-3.6
V	12010.000	44.2	33	40.5	51.7	0	51.7	54.0	-2.3
V	14412.000	45.8	33	40.0	52.8	0	52.8	54.0	-1.2

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	92.8	33	29.4	89.2	114.0	-24.8
V	4804.000	51.1	33	34.9	53.0	74.0	-21.0
V	7206.000	44.4	33	37.9	49.3	74.0	-24.7
V	9608.000	43.0	33	40.4	50.4	74.0	-23.6
V	12010.000	44.2	33	40.5	51.7	74.0	-22.3
V	14412.000	45.8	33	40.0	52.8	74.0	-21.2

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Hasbro Far East Ltd.

Date of Test: August 06, 2015

Model: B1131

Worst-Case Operating Mode: Transmitting, P mode (Right)

Table 5
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	91.4	33	29.4	87.8	0	87.8	94.0	-6.2
V	4880.000	51.3	33	34.9	53.2	0	53.2	54.0	-0.8
V	7320.000	44.9	33	37.9	49.8	0	49.8	54.0	-4.2
V	9760.000	42.8	33	40.4	50.2	0	50.2	54.0	-3.8
V	12200.000	44.0	33	40.5	51.5	0	51.5	54.0	-2.5
V	14640.000	47.2	33	38.4	52.6	0	52.6	54.0	-1.4

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	91.4	33	29.4	87.8	114.0	-26.2
V	4880.000	51.3	33	34.9	53.2	74.0	-20.8
V	7320.000	44.9	33	37.9	49.8	74.0	-24.2
V	9760.000	42.8	33	40.4	50.2	74.0	-23.8
V	12200.000	44.0	33	40.5	51.5	74.0	-22.5
V	14640.000	47.2	33	38.4	52.6	74.0	-21.4

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Hasbro Far East Ltd.

Date of Test: August 06, 2015

Model: B1131

Worst-Case Operating Mode: Transmitting, P mode (Right)

Table 6
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	91.1	33	29.4	87.5	0	87.5	94.0	-6.5
V	4960.000	51.5	33	34.9	53.4	0	53.4	54.0	-0.6
V	7440.000	44.8	33	37.9	49.7	0	49.7	54.0	-4.3
V	9920.000	43.2	33	40.4	50.6	0	50.6	54.0	-3.4
V	12400.000	43.7	33	40.5	51.2	0	51.2	54.0	-2.8
V	14880.000	47.5	33	38.4	52.9	0	52.9	54.0	-1.1

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	91.1	33	29.4	87.5	114.0	-26.5
V	4960.000	51.5	33	34.9	53.4	74.0	-20.6
V	7440.000	44.8	33	37.9	49.7	74.0	-24.3
V	9920.000	43.2	33	40.4	50.6	74.0	-23.4
V	12400.000	43.7	33	40.5	51.2	74.0	-22.8
V	14880.000	47.5	33	38.4	52.9	74.0	-21.1

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Hasbro Far East Ltd.
 Model: B1131

Date of Test: August 06, 2015

Worst-Case Operating Mode: Transmitting, BLE mode (Right) (Bluetooth 4.0 BLE)

Table 7
Radiated Emissions
 Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	93.4	33	29.4	89.8	0	89.8	94.0	-4.2
V	4804.000	50.9	33	34.9	52.8	0	52.8	54.0	-1.2
V	7206.000	44.7	33	37.9	49.6	0	49.6	54.0	-4.4
V	9608.000	43.4	33	40.4	50.8	0	50.8	54.0	-3.2
V	12010.000	44.3	33	40.5	51.8	0	51.8	54.0	-2.2
V	14412.000	45.7	33	40.0	52.7	0	52.7	54.0	-1.3

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	93.4	33	29.4	89.8	114.0	-24.2
V	4804.000	50.9	33	34.9	52.8	74.0	-21.2
V	7206.000	44.7	33	37.9	49.6	74.0	-24.4
V	9608.000	43.4	33	40.4	50.8	74.0	-23.2
V	12010.000	44.3	33	40.5	51.8	74.0	-22.2
V	14412.000	45.7	33	40.0	52.7	74.0	-21.3

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Hasbro Far East Ltd.
 Model: B1131

Date of Test: August 06, 2015

Worst-Case Operating Mode: Transmitting, BLE mode (Right) (Bluetooth 4.0 BLE)

Table 8
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	90.8	33	29.4	87.2	0	87.2	94.0	-6.8
V	4880.000	50.6	33	34.9	52.5	0	52.5	54.0	-1.5
V	7320.000	45.0	33	37.9	49.9	0	49.9	54.0	-4.1
V	9760.000	43.0	33	40.4	50.4	0	50.4	54.0	-3.6
V	12200.000	44.0	33	40.5	51.5	0	51.5	54.0	-2.5
V	14640.000	47.4	33	38.4	52.8	0	52.8	54.0	-1.2

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	90.8	33	29.4	87.2	114.0	-26.8
V	4880.000	50.6	33	34.9	52.5	74.0	-21.5
V	7320.000	45.0	33	37.9	49.9	74.0	-24.1
V	9760.000	43.0	33	40.4	50.4	74.0	-23.6
V	12200.000	44.0	33	40.5	51.5	74.0	-22.5
V	14640.000	47.4	33	38.4	52.8	74.0	-21.2

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: Hasbro Far East Ltd.

Date of Test: August 06, 2015

Model: B1131

Worst-Case Operating Mode: Transmitting, BLE mode (Right) (Bluetooth 4.0 BLE)

Table 9
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	91.0	33	29.4	87.4	0	87.4	94.0	-6.6
V	4960.000	50.8	33	34.9	52.7	0	52.7	54.0	-1.3
V	7440.000	44.9	33	37.9	49.8	0	49.8	54.0	-4.2
V	9920.000	43.3	33	40.4	50.7	0	50.7	54.0	-3.3
V	12400.000	44.1	33	40.5	51.6	0	51.6	54.0	-2.4
V	14880.000	46.8	33	38.4	52.2	0	52.2	54.0	-1.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	91.0	33	29.4	87.4	114.0	-26.6
V	4960.000	50.8	33	34.9	52.7	74.0	-21.3
V	7440.000	44.9	33	37.9	49.8	74.0	-24.2
V	9920.000	43.3	33	40.4	50.7	74.0	-23.3
V	12400.000	44.1	33	40.5	51.6	74.0	-22.4
V	14880.000	46.8	33	38.4	52.2	74.0	-21.8

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

4.0 **Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 **Technical Specifications**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

8.0 **Miscellaneous Information**

The miscellaneous information includes details of the test procedure.

8.1 Radiated Emission on the Bandedge

For the 2.4GHz Module:

The test data of bandedge emissions were shown on the above radiated emissions table 1 & table 3 respectively.



For the Bluetooth Module:

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).



INTERTEK TESTING SERVICES

Peak Measurement - Proprietary Mode

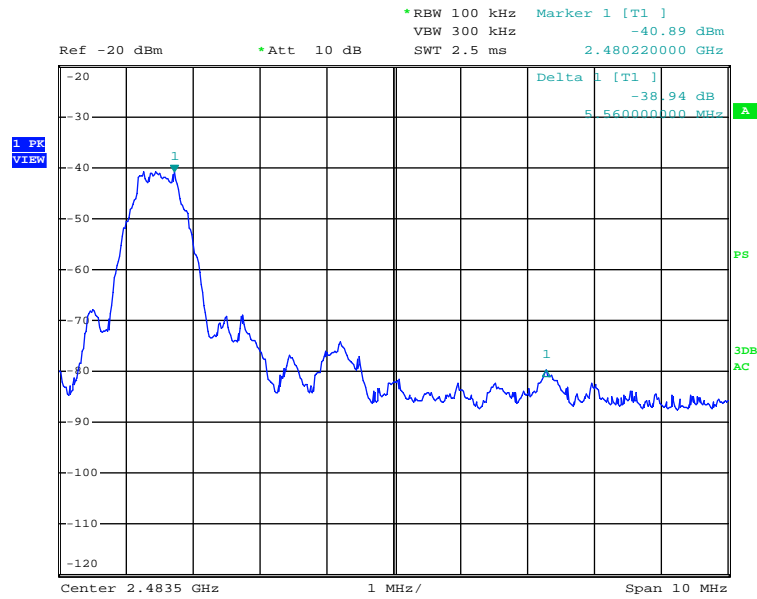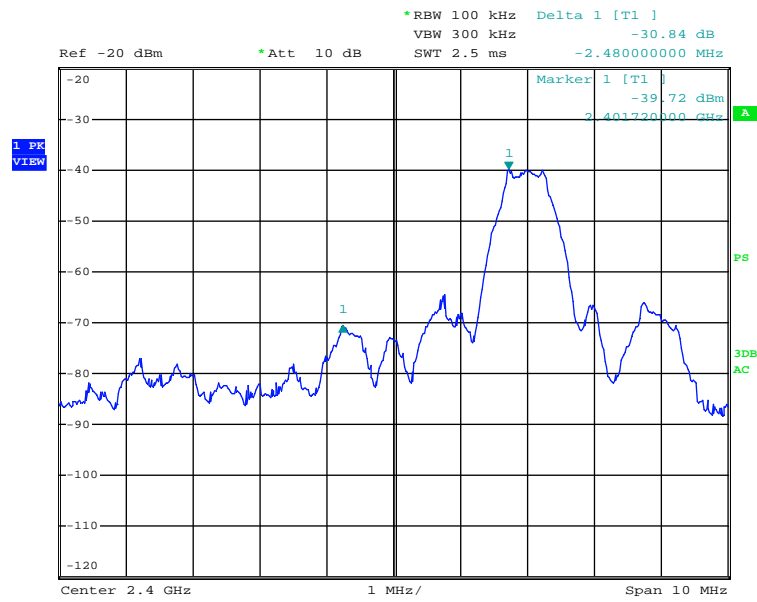

INTERTEK TESTING SERVICES

Peak Measurement - BLE Mode

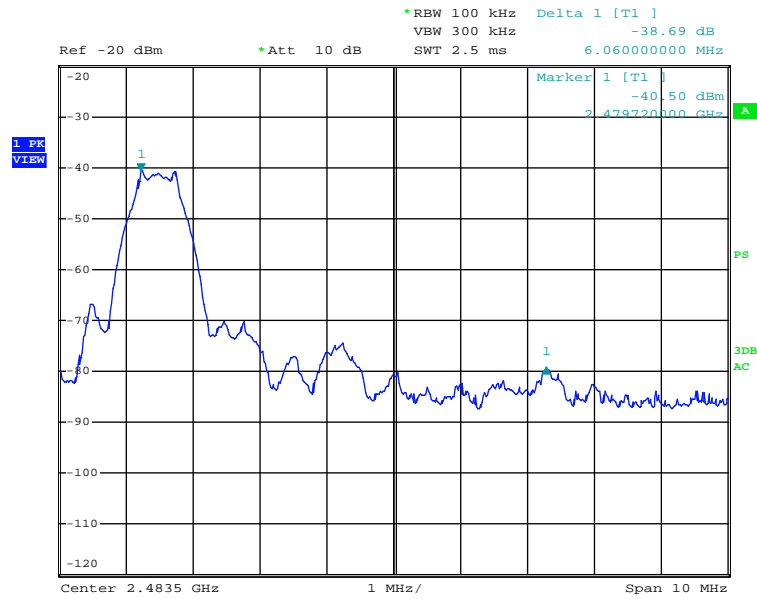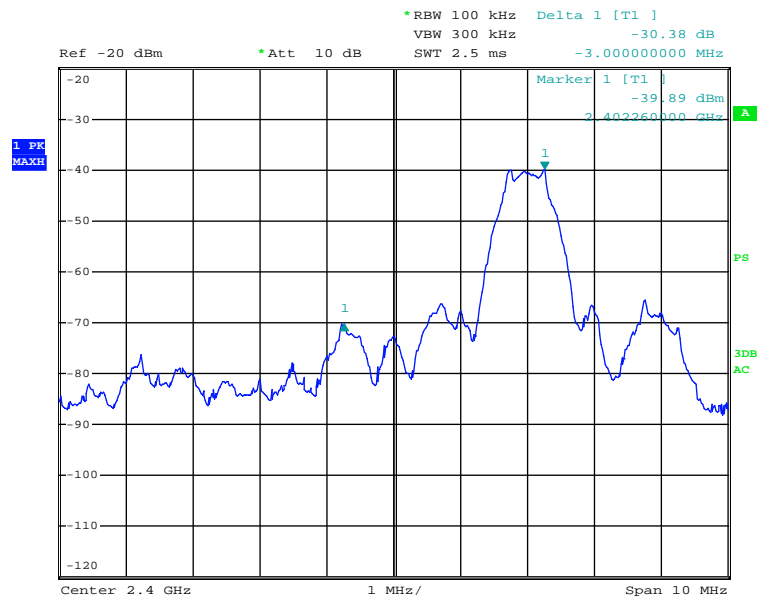

INTERTEK TESTING SERVICES

Peak Measurement - Proprietary Mode

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=89.2\text{dB}\mu\text{V}/\text{m} - 30.8 \text{ dB}$$

$$=58.4 \text{ dB}\mu\text{V}/\text{m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$=89.2 \text{ dB}\mu\text{V}/\text{m} - 30.8 \text{ dB}$$

$$=58.4 \text{ dB}\mu\text{V}/\text{m}$$

Upper bandedge - Proprietary Mode

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=87.5 \text{ dB}\mu\text{V}/\text{m} - 40.9 \text{ dB}$$

$$=46.6 \text{ dB}\mu\text{V}/\text{m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$=87.5 \text{ dB}\mu\text{V}/\text{m} - 40.9 \text{ dB}$$

$$=46.6 \text{ dB}\mu\text{V}/\text{m}$$

INTERTEK TESTING SERVICES

Peak Measurement – BLE

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=89.8\text{dB}\mu\text{V}/\text{m} - 30.4\text{ dB}$$

$$=59.4\text{ dB}\mu\text{V}/\text{m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$=89.8\text{ dB}\mu\text{V}/\text{m} - 30.4\text{ dB}$$

$$=59.4\text{ dB}\mu\text{V}/\text{m}$$

Upper bandedge - Proprietary Mode

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=87.4\text{ dB}\mu\text{V}/\text{m} - 38.7\text{ dB}$$

$$=48.7\text{ dB}\mu\text{V}/\text{m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$=87.4\text{ dB}\mu\text{V}/\text{m} - 38.7\text{ dB}$$

$$=48.7\text{ dB}\mu\text{V}/\text{m}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

INTERTEK TESTING SERVICES

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately 2.2 ms for a digital "1" bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

It is not necessary to apply average factor as the measured (peak) data has been complied with average limit of the radiated emission.

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 10 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


INTERTEK TESTING SERVICES

8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

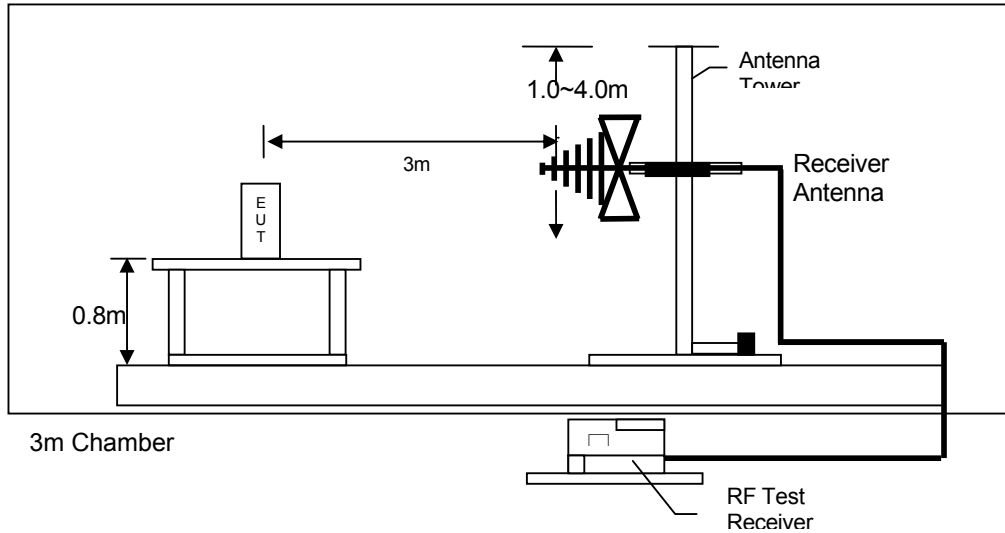

Test setup of radiated emissions upto 1GHz

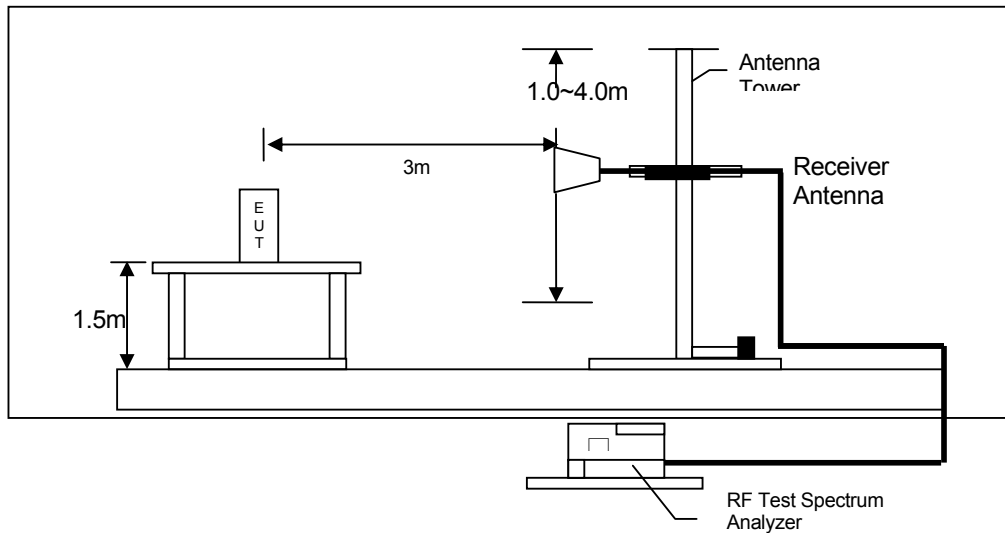

Test setup of radiated emissions above 1GHz

INTERTEK TESTING SERVICES

9.0 Confidentiality Request

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

10.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Biconical Antenna
Registration No.	EW-3095	EW-2466	EW-2512
Manufacturer	R&S	R&S	EMCO
Model No.	ESCI	FSP30	3104C
Calibration Date	Oct. 16, 2014	Sep. 02, 2014	Jan. 22, 2015
Calibration Due Date	Oct. 16, 2015	Sep. 02, 2015	Jul. 22, 2016

Equipment	Double Ridged Guide Antenna	Log Periodic Antenna
Registration No.	EW-1133	EW-0447
Manufacturer	EMCO	EMCO
Model No.	3115	3146
Calibration Date	Apr. 30, 2014	Mar. 16, 2015
Calibration Due Date	Oct. 30, 2015	Sep. 16, 2016

2) Bandedge Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2329
Manufacturer	R&S
Model No.	FSP3
Calibration Date	Jun. 17, 2015
Calibration Due Date	Jun. 17, 2016

END OF TEST REPORT