

FCC TEST REPORT

FCC ID: RSBSMPS-750

Product Name : BLUETOOTH ALL-IN-ONE HI-FI MUSIC WITH PA
Model Name : SMPS-750
Brand Name : JENSEN, BOOK, Daewoo
Report No. : PTC-DQ-03170660301-FC01

Prepared for

BK Pride Electronics Co.,Ltd.

Book Digital Industry Park Meilin District, Dalingshan Town, Dongguan, China

Prepared by

DongGuan Precise Testing Service Co.,Ltd.

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community

Dongcheng District, Dongguan, Guangdong, China



1TEST RESULT CERTIFICATION

Applicant's name : BK Pride Electronics Co.,Ltd.
 Address : Book Digital Industry Park Meilin District, Dalingshan Town, Dongguan, China
 Manufacture's name : BK Pride Electronics Co.,Ltd.
 Address : Book Digital Industry Park Meilin District, Dalingshan Town, Dongguan, China
 Product name : BLUETOOTH ALL-IN-ONE HI-FI MUSIC WITH PA
 Model name : SMPS-750
 Brand Name : JENSEN, BOOK, Daewoo
 Standards : FCC CFR47 Part 15 Section 15.247
 Test procedure : ANSI C63.10:2013
 Test Date : June 08, 2017 to June 20, 2017
 Date of Issue : June 20, 2017
 Test Result : Pass

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.

Testing Engineer

August Qiu

Technical Manager

Hack Ye

Authorized Signatory

Chris Du

Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF E.U.T.	7
3.2 CHANNEL LIST	8
3.3 TEST MODE	9
4 EQUIPMENT DURING TEST.....	10
4.1 EQUIPMENTS LIST.....	10
4.2 MEASUREMENT UNCERTAINTY	12
5 CONDUCTED EMISSION.....	13
5.1 E.U.T. OPERATION	13
5.2 EUT SETUP	13
5.3 MEASUREMENT DESCRIPTION	14
5.4 CONDUCTED EMISSION TEST RESULT	14
6 RADIATED SPURIOUS EMISSIONS.....	16
6.1 EUT OPERATION	16
6.2 TEST SETUP	17
6.3 SPECTRUM ANALYZER SETUP	18
6.4 TEST PROCEDURE	19
6.5 SUMMARY OF TEST RESULTS	20
7 CONDUCTED SPURIOUS & BAND EDGE EMISSION.....	29
7.1 REQUIREMENT	29
7.2 TEST PROCEDURE	29
7.3 TEST SETUP	29
7.4 EUT OPERATION CONDITIONS.....	29
7.5 TEST RESULTS	30
8 20 DB BANDWIDTH MEASUREMENT.....	38
8.1 TEST PROCEDURE	38
8.2 TEST RESULT	38
9 MAXIMUM PEAK OUTPUT POWER	45
9.1 TEST PROCEDURE	45
9.2 TEST RESULT	45



10 HOPPING CHANNEL SEPARATION.....	47
10.1 TEST PROCEDURE	47
10.2 TEST RESULT	48
11 NUMBER OF HOPPING FREQUENCY	54
11.1 TEST PROCEDURE	54
11.2 TEST RESULT	54
12 DWELL TIME	55
12.1 TEST PROCEDURE	55
12.2 TEST RESULT	55
13 ANTENNA REQUIREMENT	58
14 TEST PHOTOS	59
15 EUT PHOTOS	61



2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable



PRECISE TESTING

Report No.: PTC-DQ-03170660301-FC01

2.1 TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.
FCC Registration No.	371540



3 General Information

3.1 General Description of E.U.T.

Product Name : BLUETOOTH ALL-IN-ONE HI-FI MUSIC WITH PA

Model Name : SMPS-750

Bluetooth Version : BT2.1+EDR

Operating frequency : 2402-2480MHz

Numbers of Channel : 79 channels

Antenna Type : Internal PCB Antenna

Antenna Gain : 1.2 dBi

Type of Modulation : GFSK, Pi/4DQPSK, 8DPSK

Power supply for Test : DC 15V, 3000mA for Adapter

Adapter : Model: PS65B150Y3000S
Input: AC100-240V, 50/60Hz, 1.5A
Output: DC 15V, 3000mA

Hardware Version : V1.0

Software Version : V1.0



3.2 Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-



3.3 Test Mode

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2016	Aug.03, 2017	1 year
2	EXA Signal Analyzer	Keysight	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2016	Aug.03, 2017	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
4	Humidity Chamber	GF	GTH-225-40-1P	IAA061225	July 15, 2016	July 14, 2017	1 year
5	USB RF power sensor	DARE	RPR3006W	15I00041SN O01	July 15, 2016	July 14, 2017	1 year
6	Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	October 10, 2016	October 09, 2017	1 year
7	Coaxial Cable	CDS	79254	46107086	October 10, 2016	October 09, 2017	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2016	July 14, 2017	1 year
2	Loop Antenna	Schwarzbeck	FMZB 1519	012	July 15, 2016	July 14, 2017	1 year
3	Trilog Broadband Antenna	SCHWARZECK	VULB9160	9160-3355	July 15, 2016	July 14, 2017	1 year
4	Amplifier	EM	EM-30180	060538	July 15, 2016	July 14, 2017	1 year
5	Horn Antenna	SCHWARZECK	BBHA9120D	1246	July 15, 2016	July 14, 2017	1 year
6	Horn Antenna	SCHWARZECK	BBHA9170D	1412	July 15, 2016	July 14, 2017	1 year
7	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2016	July 14, 2017	1 year
8	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2016	July 14, 2017	1 year



Conducted Emissions

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
2	LISN	SCHWARZB ECK	NSLK 8128	8128-289	July 15, 2016	July 14, 2017	1 year
3	Cable	LARGE	RF300	-	July 15, 2016	July 14, 2017	1 year



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	



5 Conducted Emission

- Test Requirement: : FCC CFR 47 Part 15 Section 15.207
- Test Method: : ANSI C63.10:2013
- Test Result: : PASS
- Frequency Range: : 150kHz to 30MHz
- Class/Severity: : Class B
- Limit: : 66-56 dB μ V between 0.15MHz & 0.5MHz
: 56 dB μ V between 0.5MHz & 5MHz
: 60 dB μ V between 5MHz & 30MHz
- Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


5.1 E.U.T. Operation

Operating Environment :

- Temperature: : 25.5 °C
- Humidity: : 51 % RH
- Atmospheric Pressure: : 101.2kPa
- EUT Operation : : Refer to section 3.3
- Test Voltage : : AC 120V/60Hz

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013.

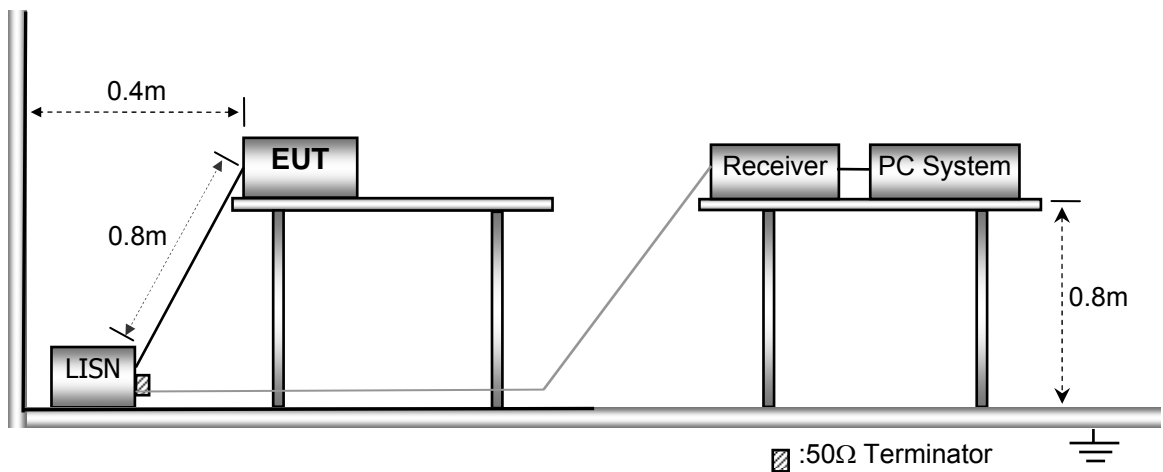




5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.4 Conducted Emission Test Result


Line-120V:

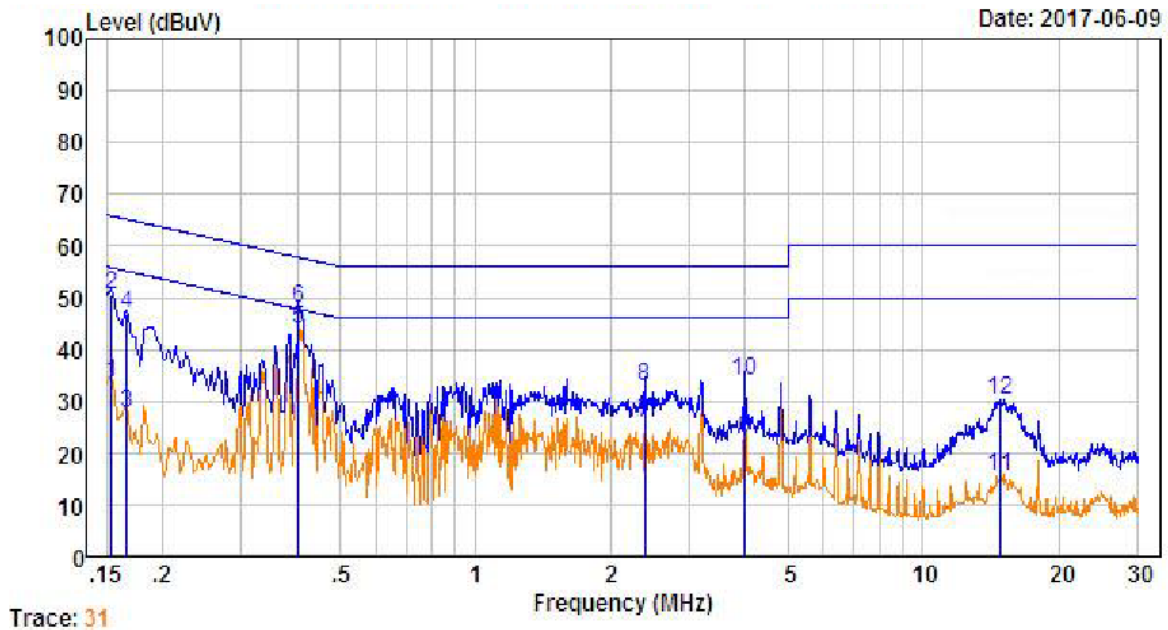

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.154	10.60	0.60	22.48	33.68	55.78	-22.10	Average
2.	0.154	10.60	0.60	39.48	50.68	65.78	-15.10	QP
3.	0.166	10.60	0.60	16.50	27.70	55.16	-27.46	Average
4.	0.166	10.60	0.60	35.50	46.70	65.16	-18.46	QP
5.	0.402	10.64	0.60	32.68	43.92	47.81	-3.89	Average
6.	0.402	10.64	0.60	36.68	47.92	57.81	-9.89	QP
7.	2.396	10.70	0.60	14.40	25.70	46.00	-20.30	Average
8.	2.396	10.70	0.60	21.40	32.70	56.00	-23.30	QP
9.	4.006	10.72	0.60	11.49	22.81	46.00	-23.19	Average
10.	4.006	10.72	0.60	22.49	33.31	56.00	-22.19	QP
11.	14.828	10.77	0.60	4.06	15.43	50.00	-34.57	Average
12.	14.828	10.77	0.60	19.06	30.43	60.00	-29.57	QP



Neutral-120V:

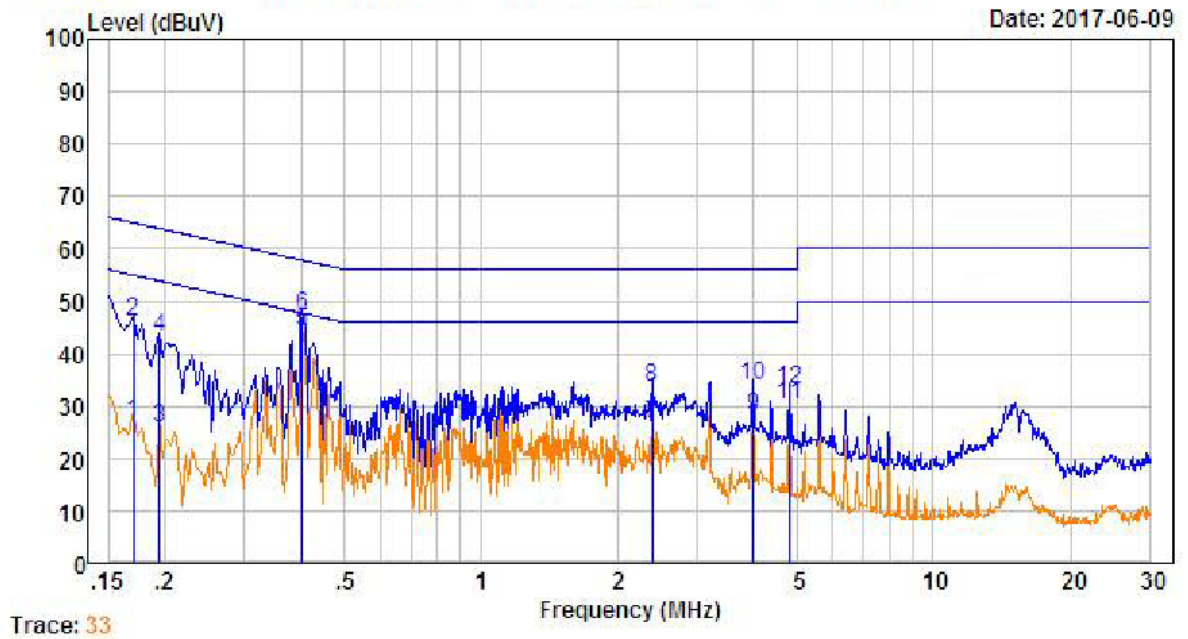

Trace: 33

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBUV	Emission Level dBUV	Limit dBUV	Over Limit dB	Remark
1.	0.170	10.60	0.60	15.87	27.07	54.94	-27.87	Average
2.	0.170	10.60	0.60	34.87	46.07	64.94	-18.87	QP
3.	0.194	10.61	0.60	14.80	26.01	53.84	-27.83	Average
4.	0.194	10.61	0.60	31.80	43.01	63.84	-20.83	QP
5.	0.402	10.64	0.60	33.02	44.26	47.81	-3.55	Average
6.	0.402	10.64	0.60	36.02	47.26	57.81	-10.55	QP
7.	2.396	10.70	0.60	15.13	26.43	46.00	-19.57	Average
8.	2.396	10.70	0.60	22.13	33.43	56.00	-22.57	QP
9.	4.006	10.72	0.60	16.77	28.09	46.00	-17.91	Average
10.	4.006	10.72	0.60	22.77	34.09	56.00	-21.91	QP
11.	4.797	10.73	0.60	19.06	30.39	46.00	-15.61	Average
12.	4.797	10.73	0.60	22.06	33.39	56.00	-22.61	QP



6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: : ANSI C63.10:2013
 Test Result: : PASS
 Measurement Distance: : 3m
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾


6.1 EUT Operation

Operating Environment :
 Temperature: : 23.5 °C
 Humidity: : 51.1 % RH
 Atmospheric Pressure: : 101.2kPa
 EUT Operation : : Refer to section 3.3
 Test Voltage : : AC 120V/60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

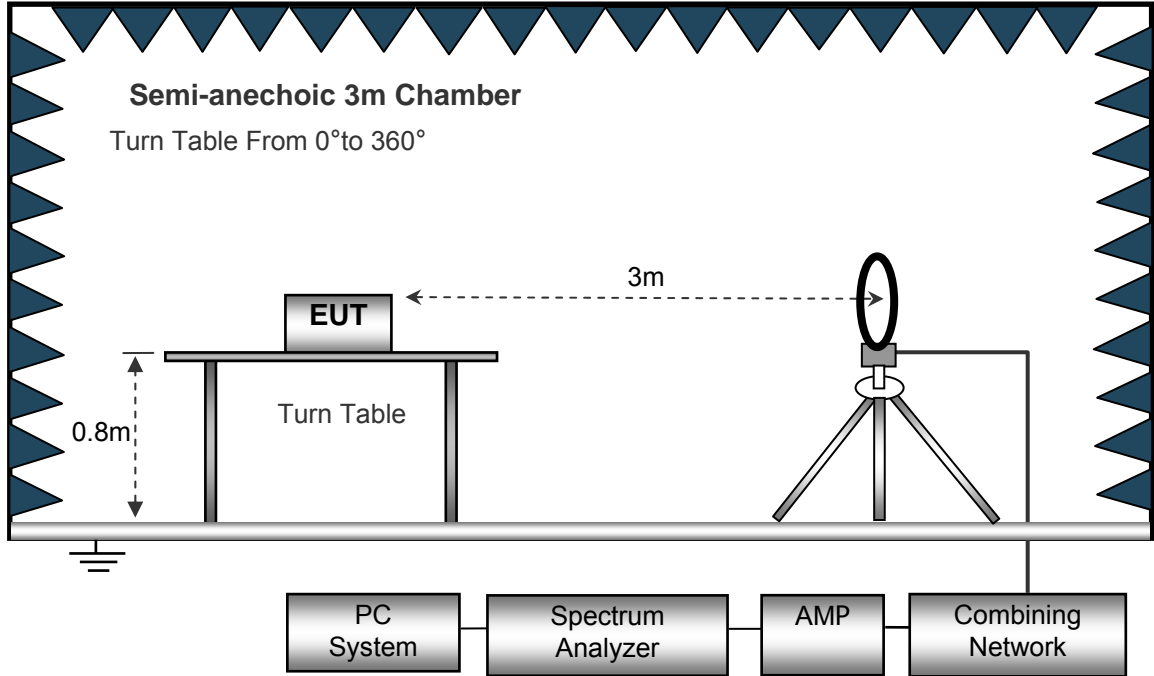

The test setup for emission measurement from 30 MHz to 1 GHz.

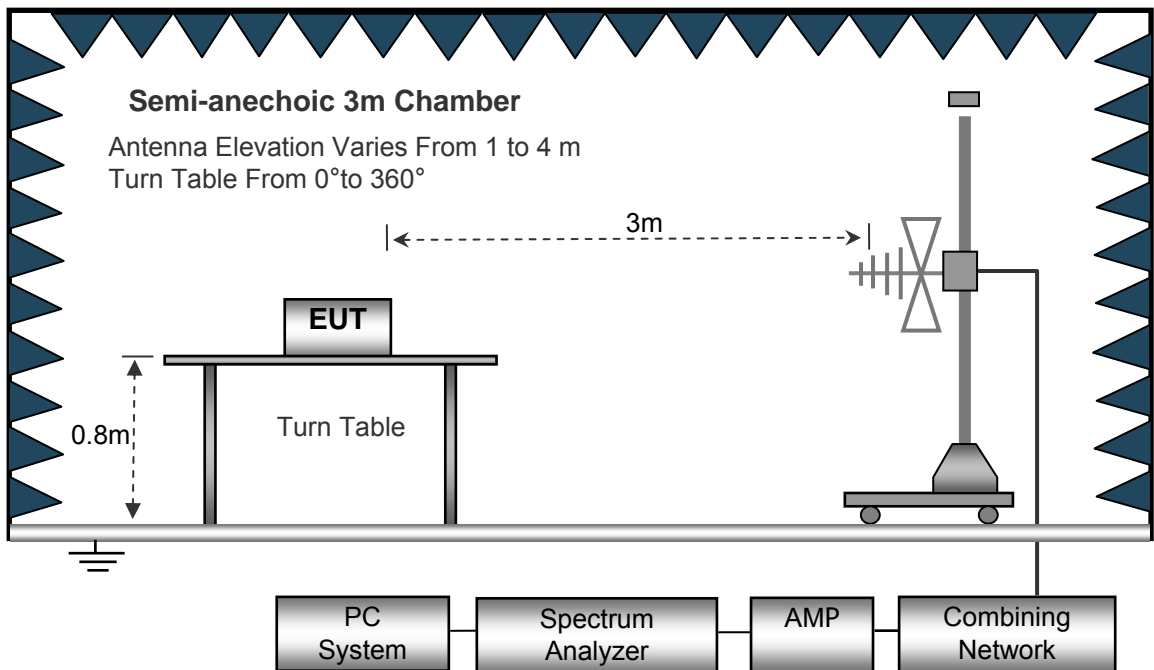

The test setup for emission measurement above 1 GHz.

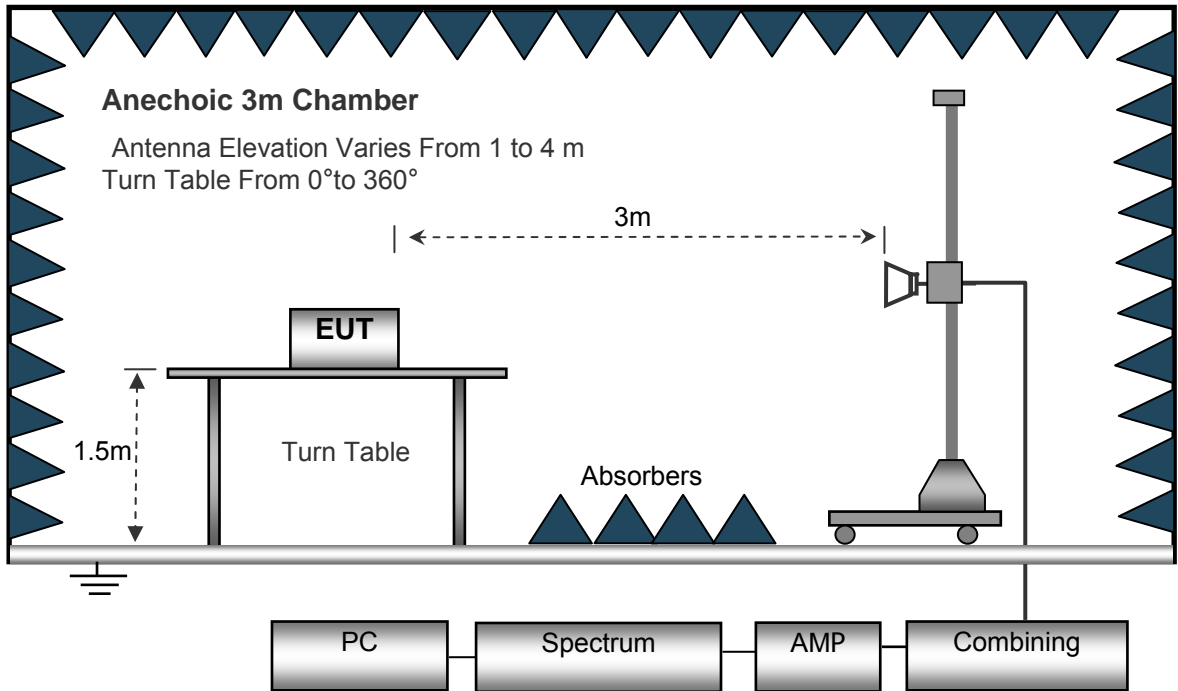

6.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. In the frequency above 1GHz, Place the measurement antenna 3m away from the EUT for each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



PRECISE TESTING

Report No.: PTC-DQ-03170660301-FC01

6.5 Summary of Test Results

Test Frequency: Below 30MHz


The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 1GHz

Remark: only the worst data(GFSK modulation mode) were reported.



Test plot for Horizontal: Mode: GFSK (2402MHz)

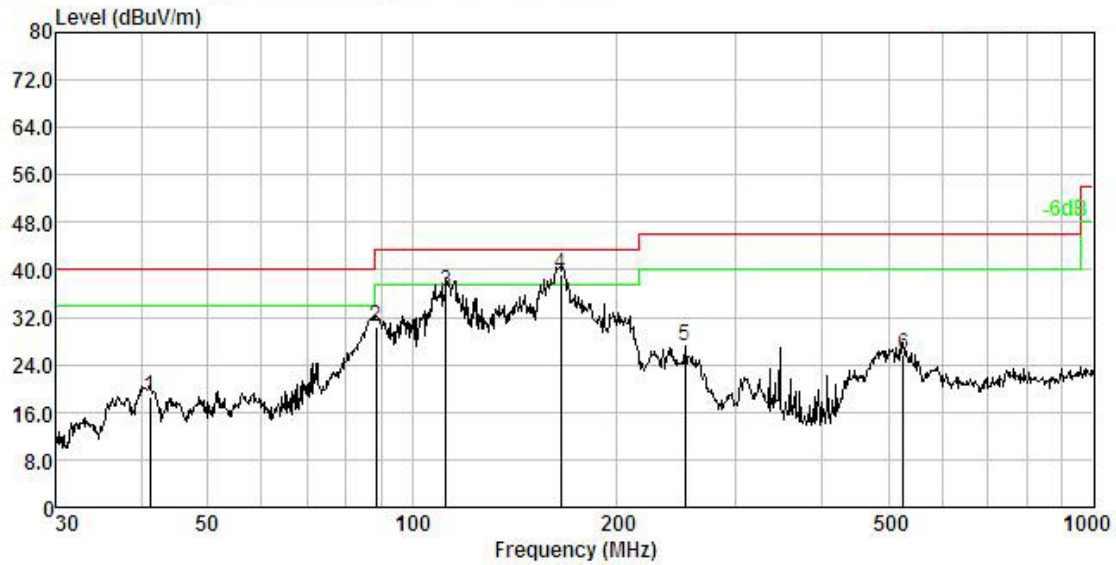


Remark: Absolute Level= Reading Level+ Factor, Margin= Limit- Absolute Level

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	41.132	1.34	13.60	33.67	30.08	18.53	40.00	-21.47	QP
2.	88.652	2.04	9.14	49.49	30.35	30.32	43.50	-13.18	QP
3.	112.131	2.25	11.28	53.25	30.43	36.35	43.50	-7.15	QP
4.	165.487	2.60	13.57	53.69	30.56	39.30	43.50	-4.20	QP
5.	252.063	2.98	11.97	42.81	30.71	27.05	46.00	-18.95	QP
6.	524.554	3.65	17.41	35.53	30.97	25.62	46.00	-20.38	QP



Test plot for Vertical: Mode: GFSK (2402MHz)

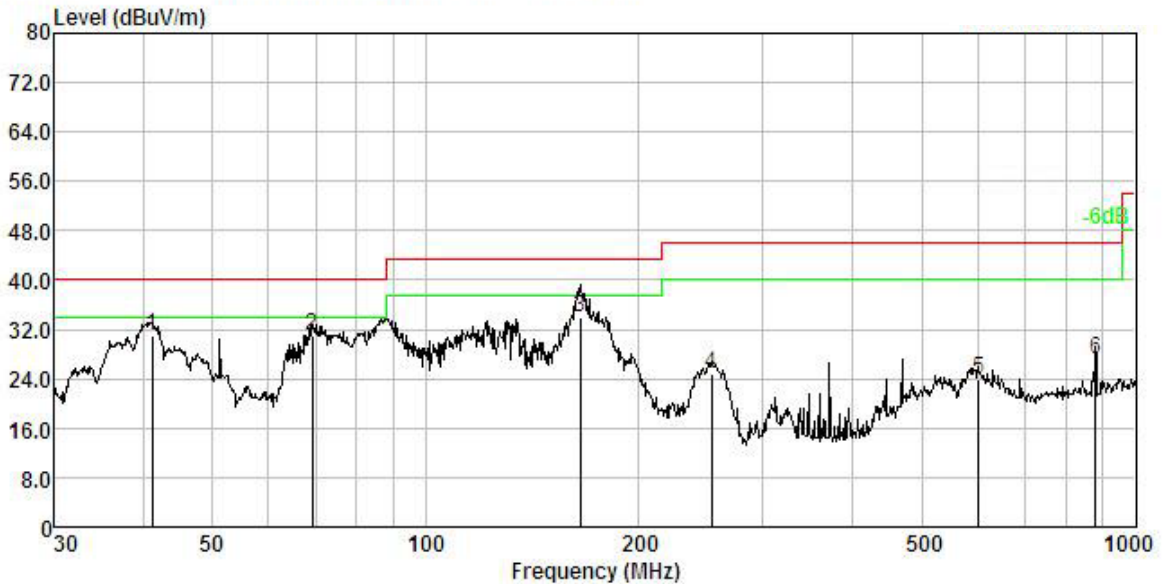


Remark:

Absolute Level= Reading Level+ Factor, Margin= Limit- Absolute Level

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	41.132	1.34	13.60	46.25	30.08	31.11	40.00	-8.89	QP
2.	69.357	1.81	10.22	49.11	30.26	30.88	40.00	-9.12	QP
3.	165.487	2.60	13.57	48.30	30.56	33.91	43.50	-9.59	QP
4.	253.837	2.99	12.00	40.58	30.71	24.86	46.00	-21.14	QP
5.	601.427	3.77	19.16	32.03	31.01	23.95	46.00	-22.05	QP
6.	878.322	4.11	22.12	32.05	31.14	27.14	46.00	-18.86	QP



Test plot for Horizontal: Mode: GFSK (2441MHz)

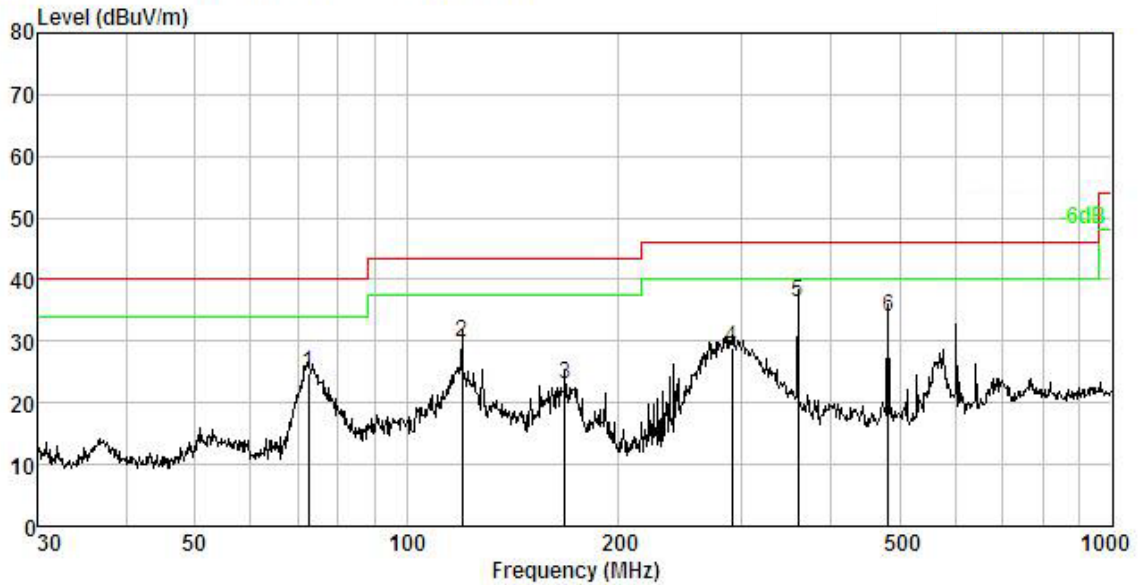


Remark: Absolute Level= Reading Level+ Factor, Margin= Limit- Absolute Level

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	72.592	1.86	9.93	43.42	30.28	24.93	40.00	-15.07	QP
2.	119.856	2.31	12.02	45.96	30.45	29.84	43.50	-13.66	QP
3.	167.824	2.61	13.45	37.63	30.57	23.12	43.50	-20.38	QP
4.	290.017	3.11	13.00	43.55	30.76	28.90	46.00	-17.10	QP
5.	360.448	3.31	14.40	49.39	30.83	36.27	46.00	-9.73	QP
6.	480.528	3.57	16.89	44.43	30.94	33.95	46.00	-12.05	QP



Test plot for Vertical: Mode: GFSK (2441MHz)

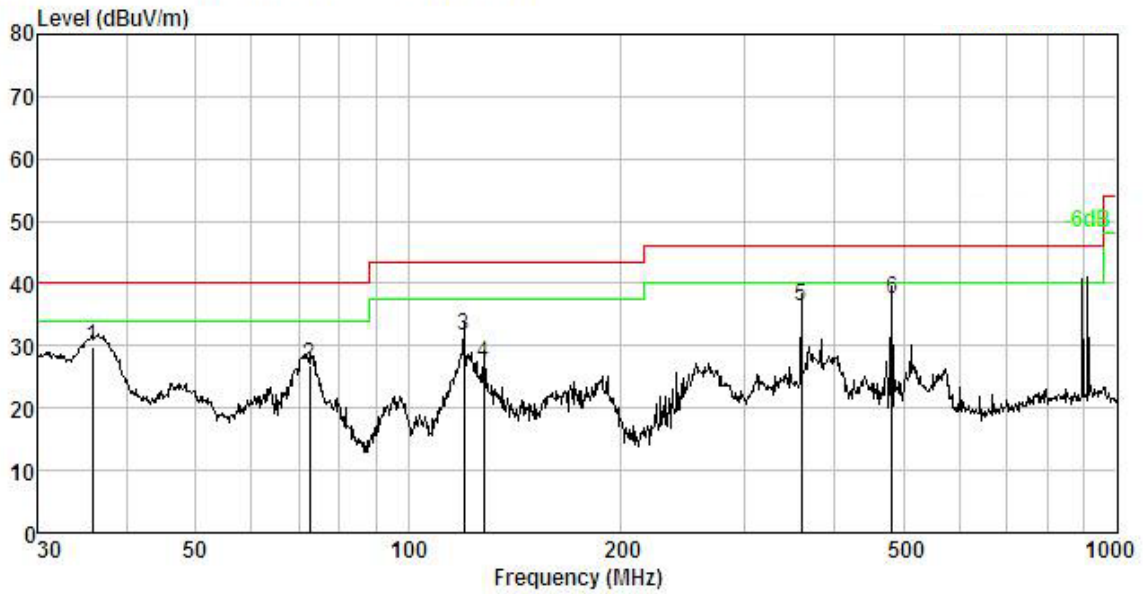


Remark:

Absolute Level= Reading Level+ Factor, Margin= Limit- Absolute Level

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	35.749	1.21	13.43	45.14	30.03	29.75	40.00	-10.25	QP
2.	72.592	1.86	9.93	45.33	30.28	26.84	40.00	-13.16	QP
3.	119.856	2.31	12.02	47.69	30.45	31.57	43.50	-11.93	QP
4.	128.113	2.37	12.52	42.82	30.48	27.23	43.50	-16.27	QP
5.	360.448	3.31	14.40	49.49	30.83	36.37	46.00	-9.63	QP
6.	480.528	3.57	16.89	47.96	30.94	37.48	46.00	-8.52	QP



Test plot for Horizontal: Mode: GFSK (2480MHz)

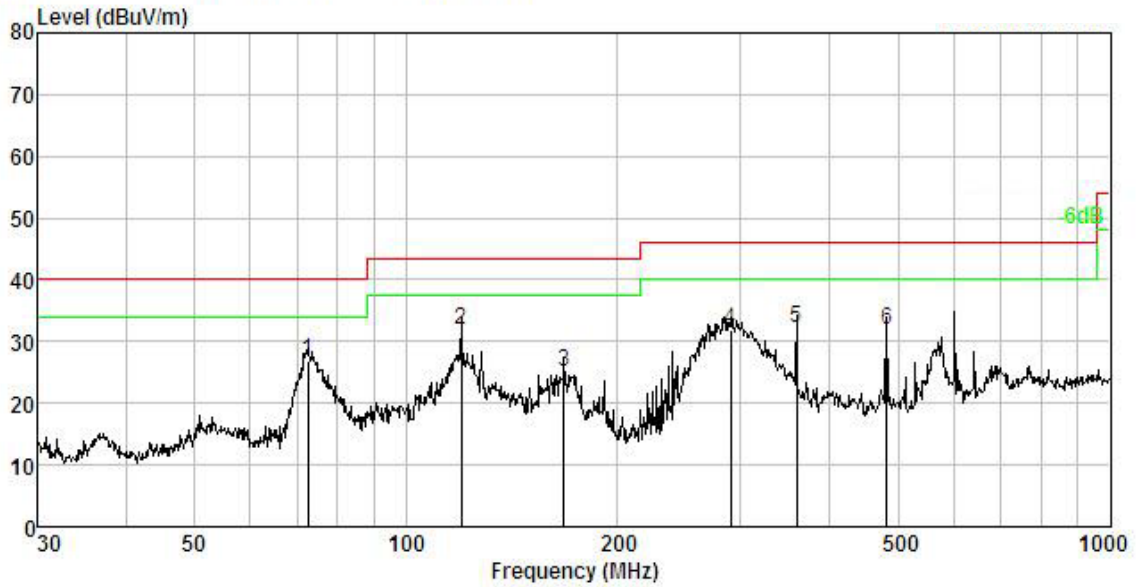


Remark: Absolute Level= Reading Level+ Factor, Margin= Limit- Absolute Level

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	72.592	1.86	9.93	45.42	30.28	26.93	40.00	-13.07	QP
2.	119.856	2.31	12.02	47.96	30.45	31.84	43.50	-11.66	QP
3.	167.824	2.61	13.45	39.63	30.57	25.12	43.50	-18.38	QP
4.	290.017	3.11	13.00	46.55	30.76	31.90	46.00	-14.10	QP
5.	360.448	3.31	14.40	45.39	30.83	32.27	46.00	-13.73	QP
6.	480.528	3.57	16.89	42.43	30.94	31.95	46.00	-14.05	QP



Test plot for Vertical: Mode: GFSK (2480MHz)

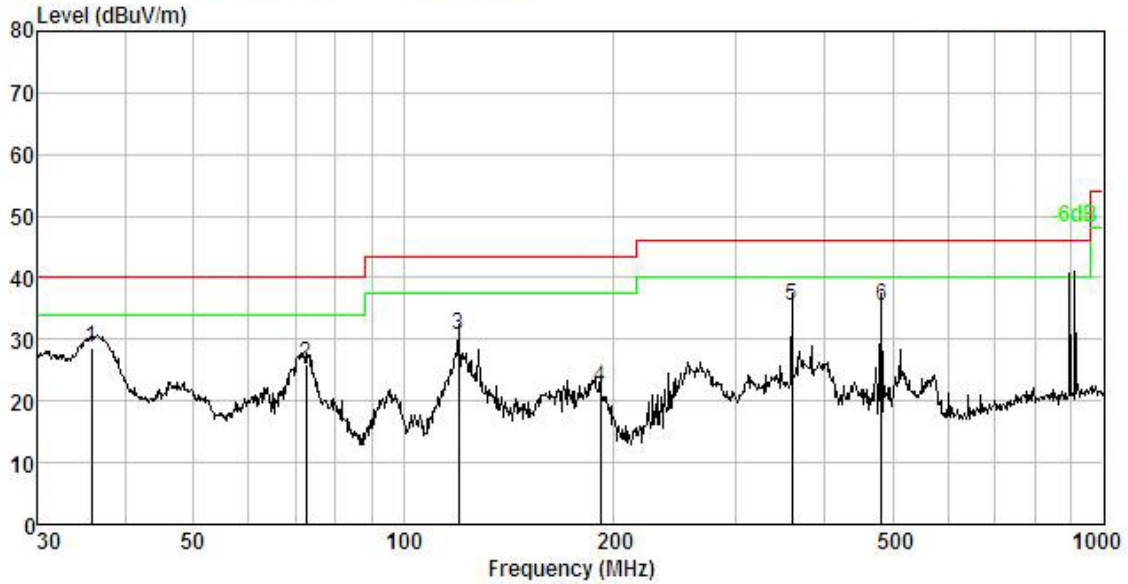

Remark:

Absolute Level= Reading Level+ Factor, Margin= Limit- Absolute Level

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBUV	Preamp Factor dB	Emission Level dBUV/m	Limit dBUV/m	Over Limit dB	Remark
1.	35.749	1.21	13.43	44.14	30.03	28.75	40.00	-11.25	QP
2.	72.592	1.86	9.93	44.33	30.28	25.84	40.00	-14.16	QP
3.	119.856	2.31	12.02	46.69	30.45	30.57	43.50	-12.93	QP
4.	191.745	2.73	10.97	39.04	30.62	22.12	43.50	-21.38	QP
5.	360.448	3.31	14.40	48.49	30.83	35.37	46.00	-10.63	QP
6.	480.528	3.57	16.89	45.96	30.94	35.48	46.00	-10.52	QP

**Test Frequency: Above 1000MHz~10th Harmonics:**

Operation Mode: GFSK (CH00: 2402MHz) Test Date : 2017-06-08

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804	H	65.89	45.38	74	54	-8.11	-8.62
7206	H	64.28	44.24	74	54	-9.72	-9.76
9608	H	63.42	43.56	74	54	-10.58	-10.44
12010	H	62.27	42.31	74	54	-11.73	-11.69
14412	H	61.74	40.63	74	54	-12.26	-13.37
16814	H	59.68	39.62	74	54	-14.32	-14.38
4804	V	66.25	45.38	74	54	-7.75	-8.62
7206	V	65.36	44.79	74	54	-8.64	-9.21
9608	V	64.18	43.51	74	54	-9.82	-10.49
12010	V	62.39	42.38	74	54	-11.61	-11.62
14412	V	61.32	41.46	74	54	-12.68	-12.54
16814	V	59.25	39.41	74	54	-14.75	-14.59

Operation Mode: GFSK (CH39: 2441MHz) Test Date : 2017-06-08

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	H	65.23	45.28	74	54	-8.77	-8.72
7323	H	64.19	44.73	74	54	-9.81	-9.27
9764	H	62.78	43.48	74	54	-11.22	-10.52
12205	H	61.47	42.16	74	54	-12.53	-11.84
14646	H	60.18	41.09	74	54	-13.82	-12.91
17087	H	59.23	40.26	74	54	-14.77	-13.74
4882	V	65.28	45.89	74	54	-8.72	-8.11
7323	V	64.39	44.72	74	54	-9.61	-9.28
9764	V	63.92	43.48	74	54	-10.08	-10.52
12205	V	62.49	42.15	74	54	-11.51	-11.85
14646	V	61.58	41.29	74	54	-12.42	-12.71
17087	V	59.36	39.89	74	54	-14.64	-14.11

Operation Mode: GFSK (CH78: 2480MHz) Test Date : 2017-06-08

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960	H	66.01	45.89	74	54	-7.99	-8.11
7440	H	65.38	44.24	74	54	-8.62	-9.76
9920	H	63.52	43.68	74	54	-10.48	-10.32
12400	H	61.32	41.34	74	54	-12.68	-12.66
14880	H	59.76	40.71	74	54	-14.24	-13.29
17360	H	58.31	38.29	74	54	-15.69	-15.71
4960	V	66.36	45.13	74	54	-7.64	-8.87
7440	V	65.29	44.25	74	54	-8.71	-9.75
9920	V	64.17	43.53	74	54	-9.83	-10.47
12400	V	63.35	42.08	74	54	-10.65	-11.92
14880	V	62.29	41.71	74	54	-11.71	-12.29
17360	V	58.39	39.78	74	54	-15.61	-14.22

Note:

- 1) Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK, the worst case is GFSK Mode
- 2) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor

7 CONDUCTED BAND EDGE EMISSION

7.1 REQUIREMENT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


7.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2403 MHz Upper Band Edge: 2479 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

7.3 TEST SETUP

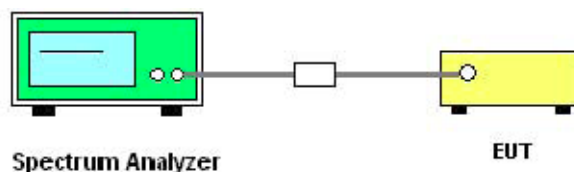

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

7.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



7.5 TEST RESULTS



For Non-Hopping Mode:

Frequency(MHz)	Modulation	Peak Power Output (dBm)	Emission Read Value (dBm)	Result of Band edge (dBc)	Band Edge Limit (dBc)
2400.00	GFSK	2.42	-48.96	51.38	>20dBc
2401.00	Pi/4-DQPSK	-0.92	-49.81	48.89	>20dBc
2400.00	8DPSK	-0.84	-50.42	49.58	>20dBc
2483.99	GFSK	5.14	-58.74	63.88	>20dBc
2483.21	Pi/4-DQPSK	3.21	-58.84	62.05	>20dBc
2483.73	8DPSK	3.25	-58.45	61.70	>20dBc





Test Plot:

GFSK:

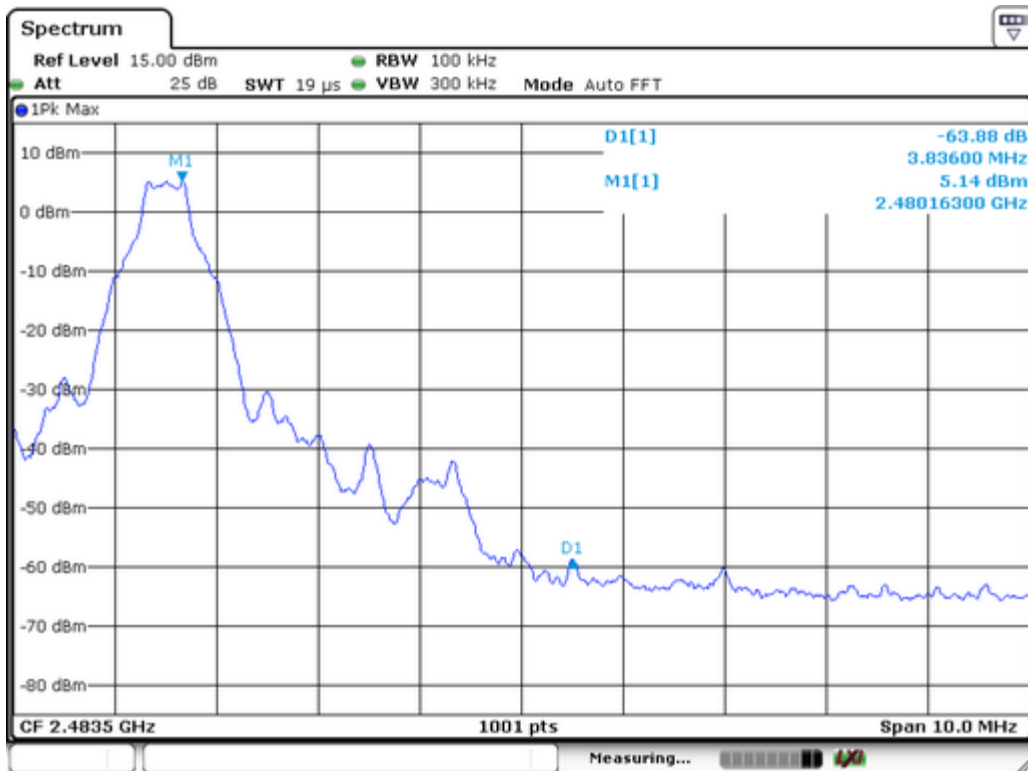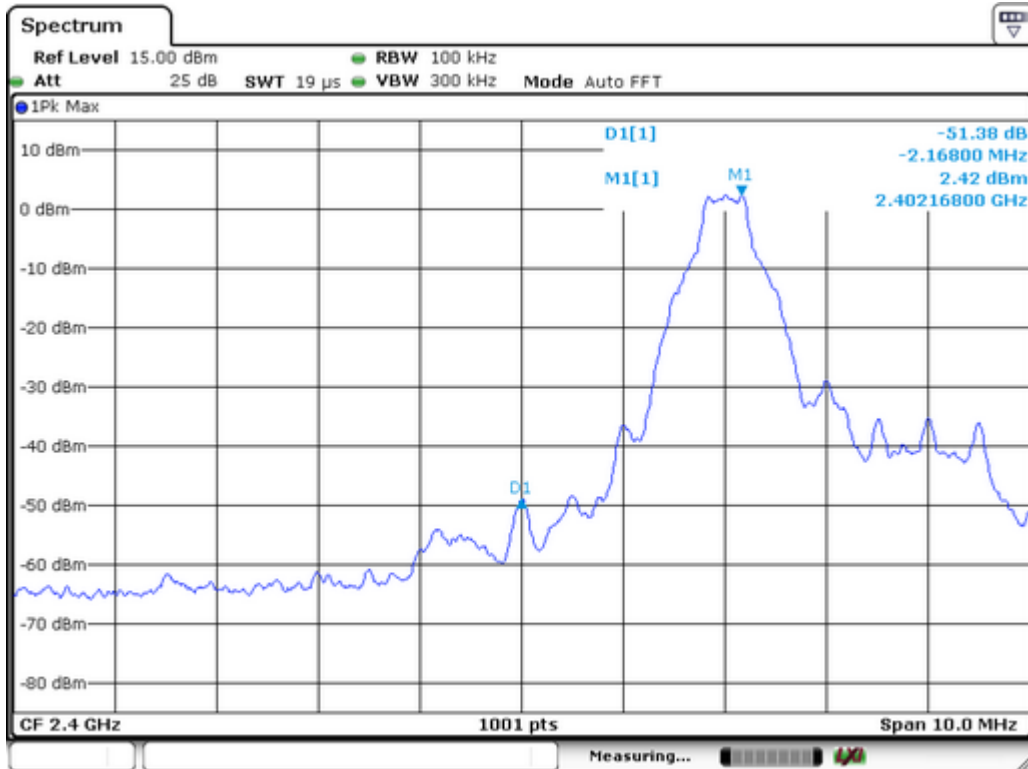





$\pi/4$ -DQPSK

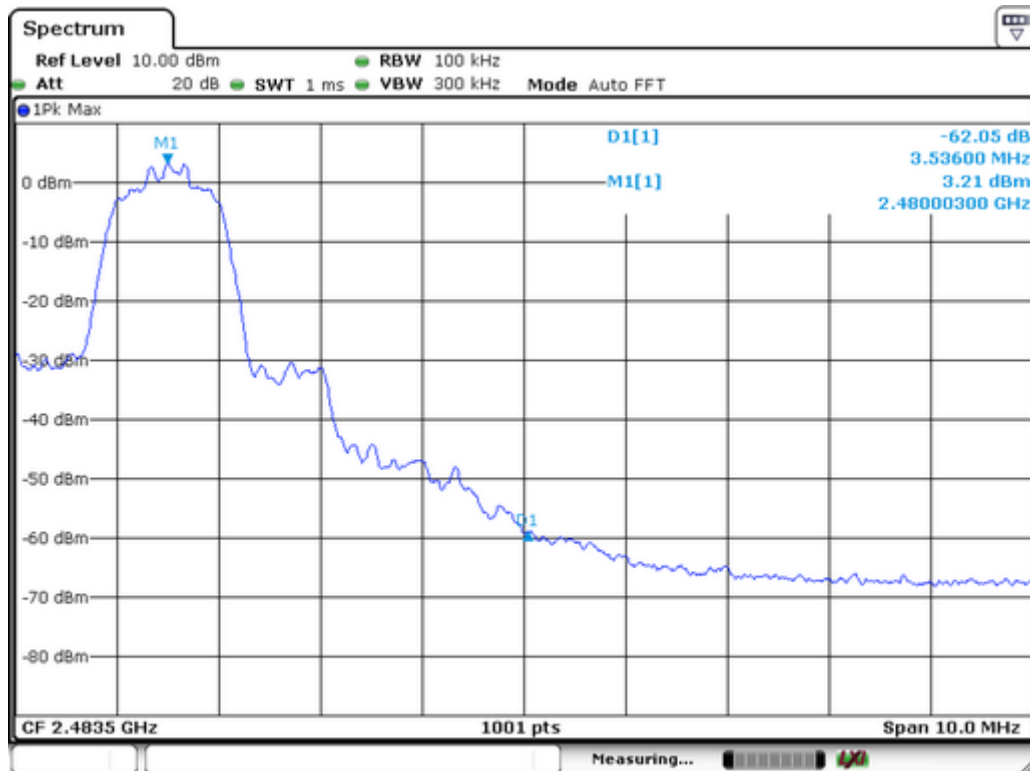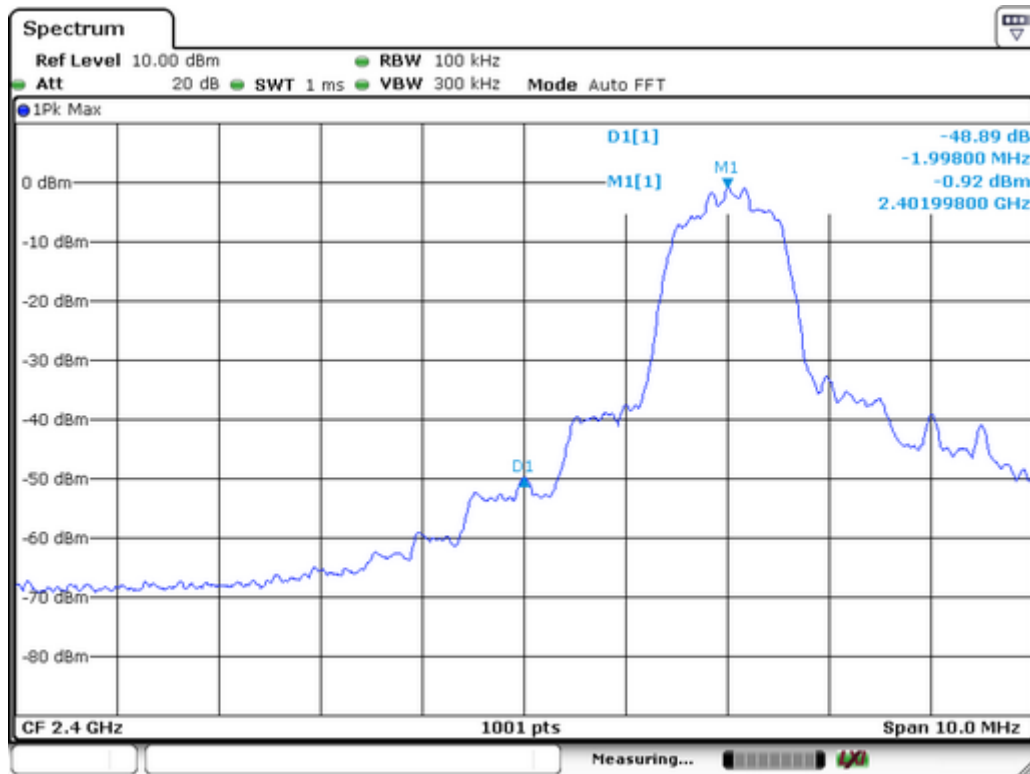



8DPSK

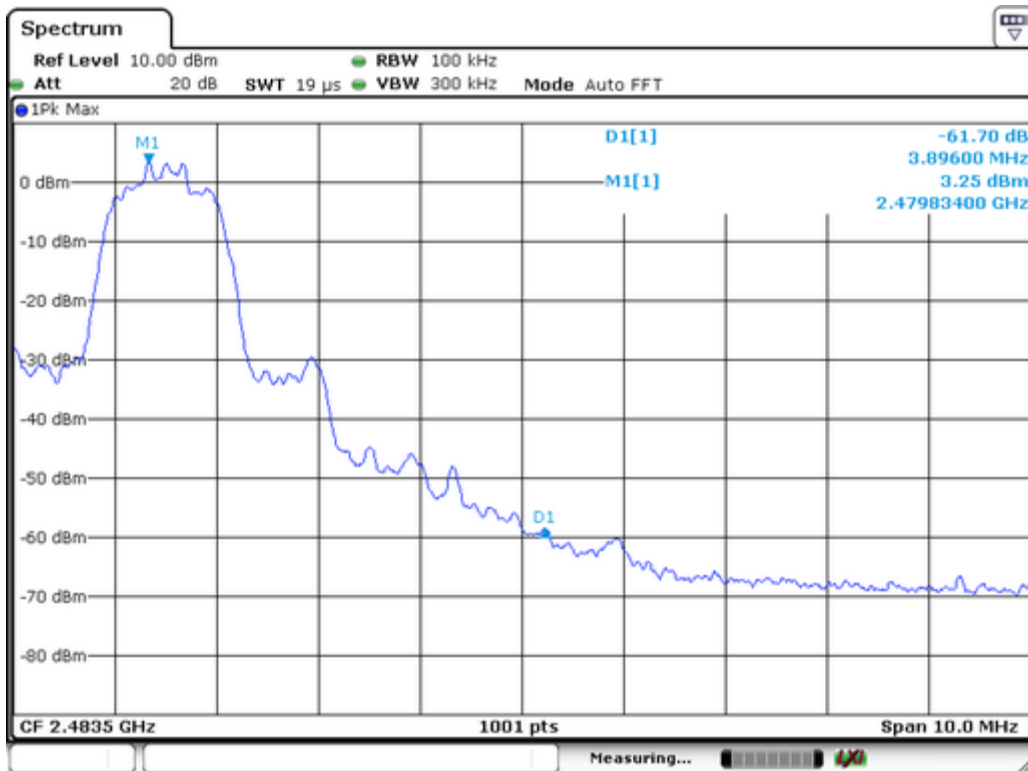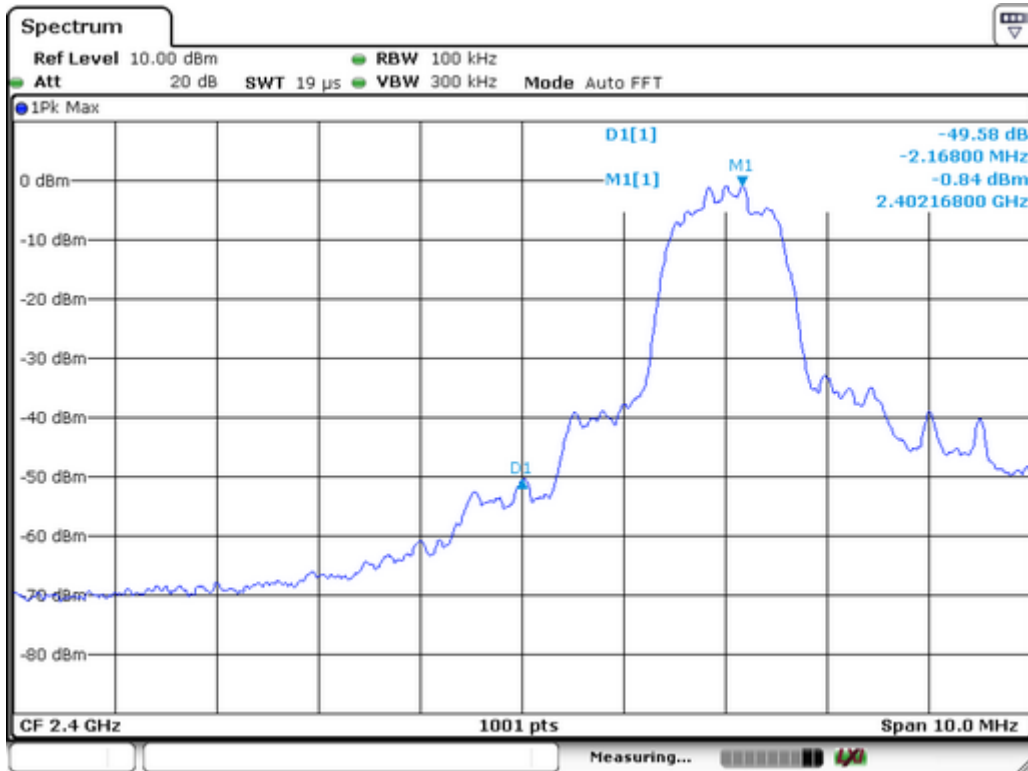





For Hopping Mode:



Frequency(MHz)	Modulation	Peak Power Output (dBm)	Emission Read Value (dBm)	Result of Band edge (dBc)	Band Edge Limit (dBc)
2400.00	GFSK	3.38	-50.08	53.46	>20dBc
2400.00	Pi/4-DQPSK	0.47	-50.26	50.73	>20dBc
2399.98	8DPSK	0.52	-53.72	54.24	>20dBc
2484.97	GFSK	5.11	-52.48	57.59	>20dBc
2484.99	Pi/4-DQPSK	3.21	-53.42	56.63	>20dBc
2485.14	8DPSK	3.16	-53.72	56.88	>20dBc

Test Plot:



GFSK:

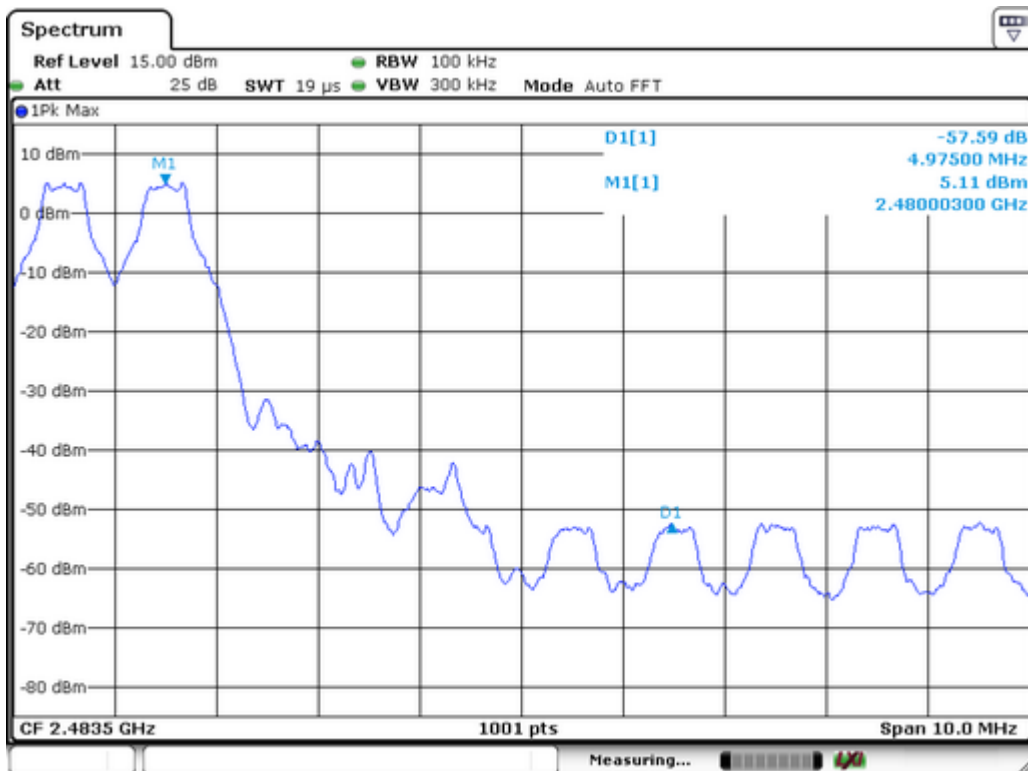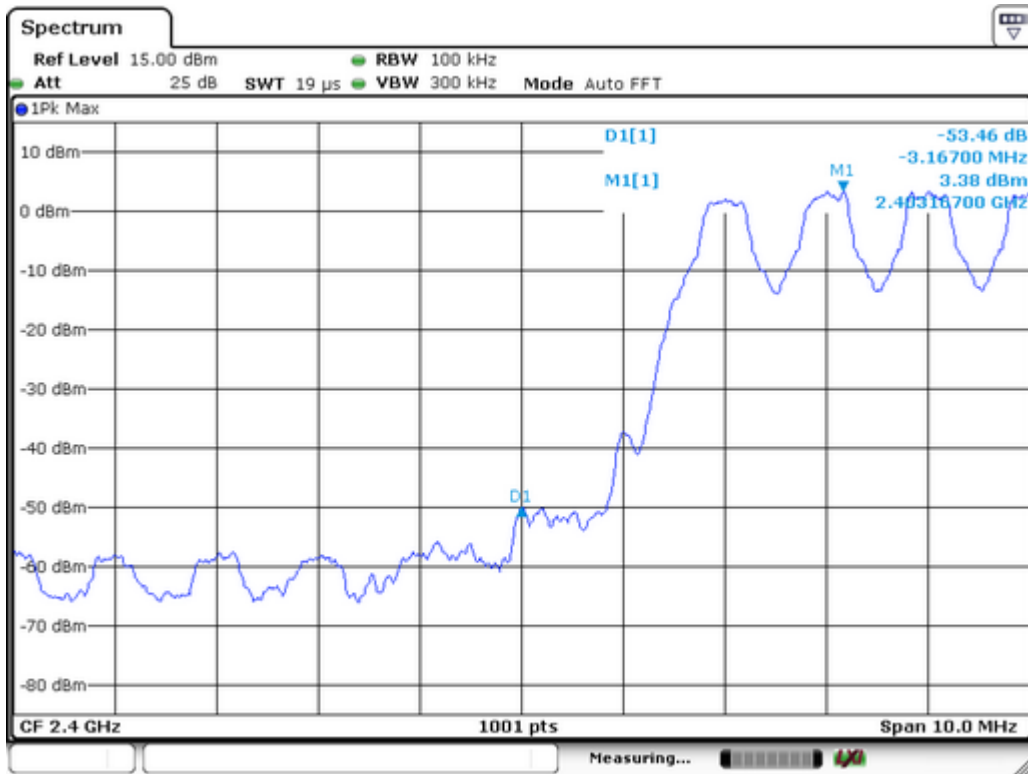

$\pi/4$ -DQPSK

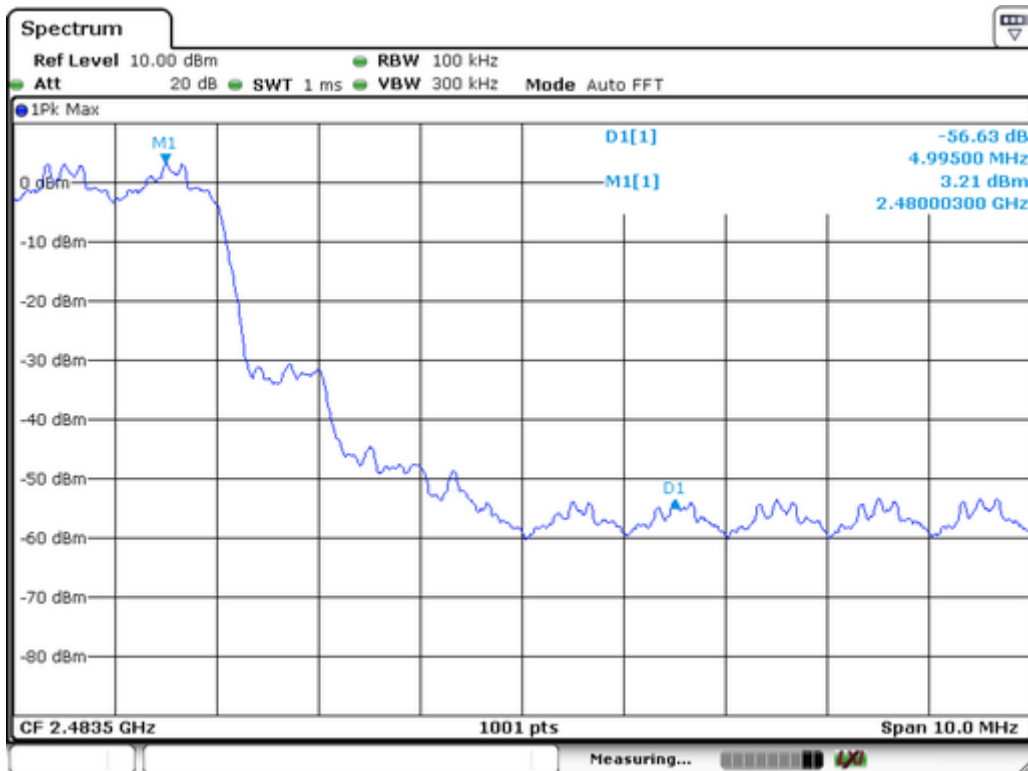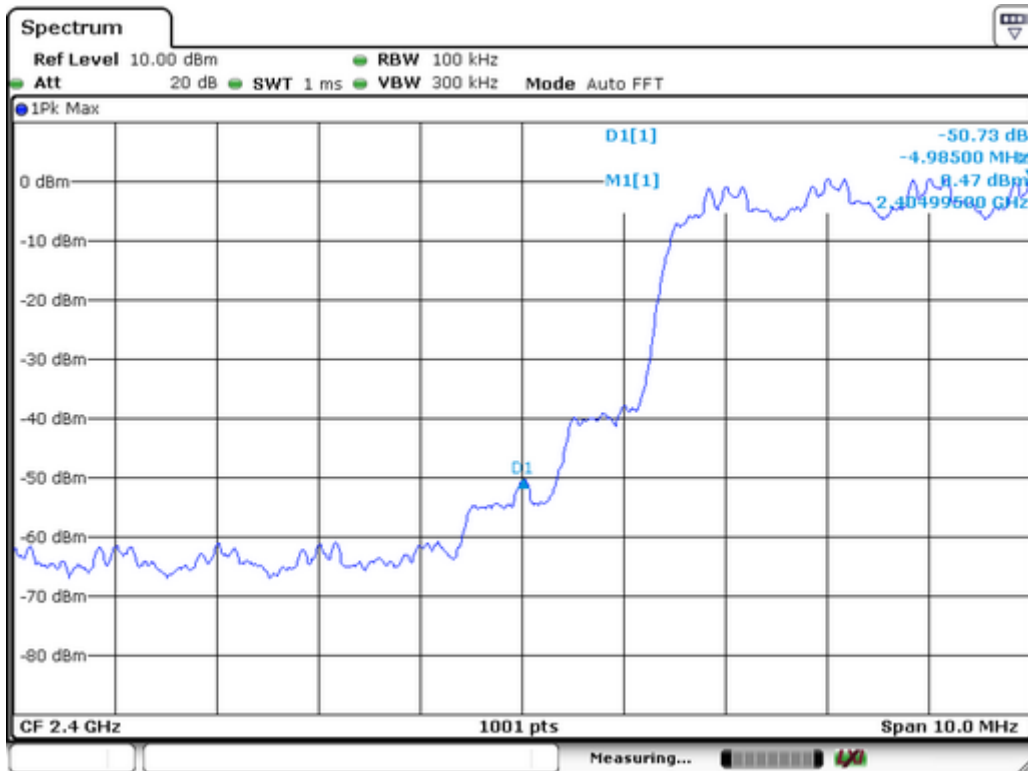

8DPSK

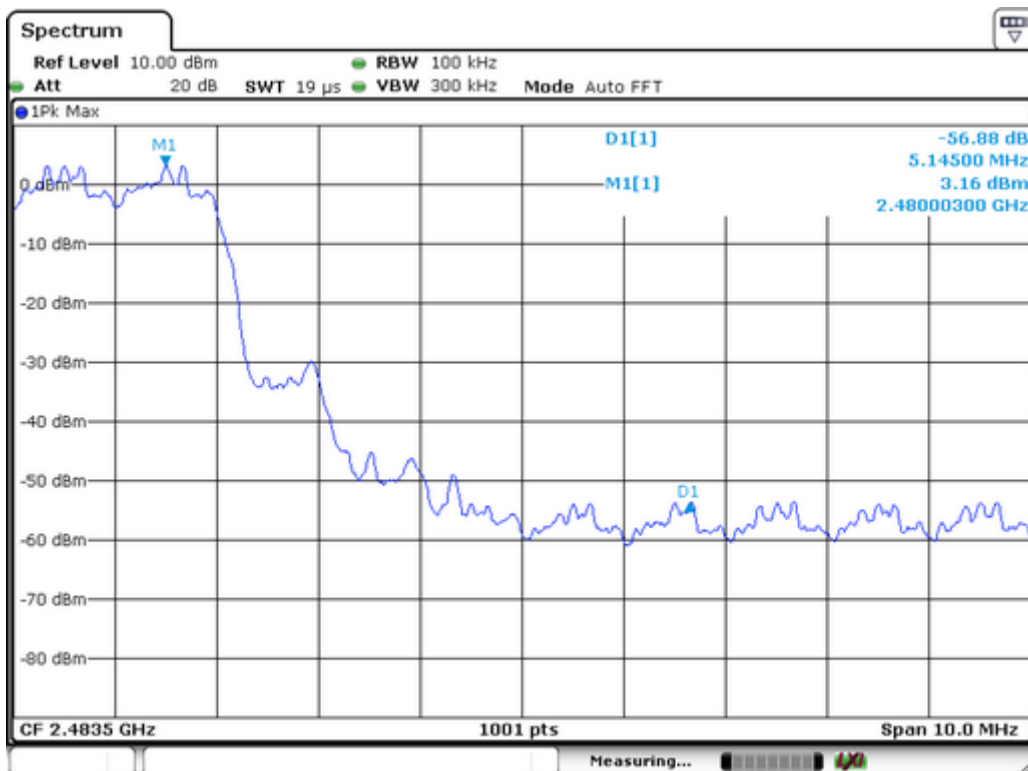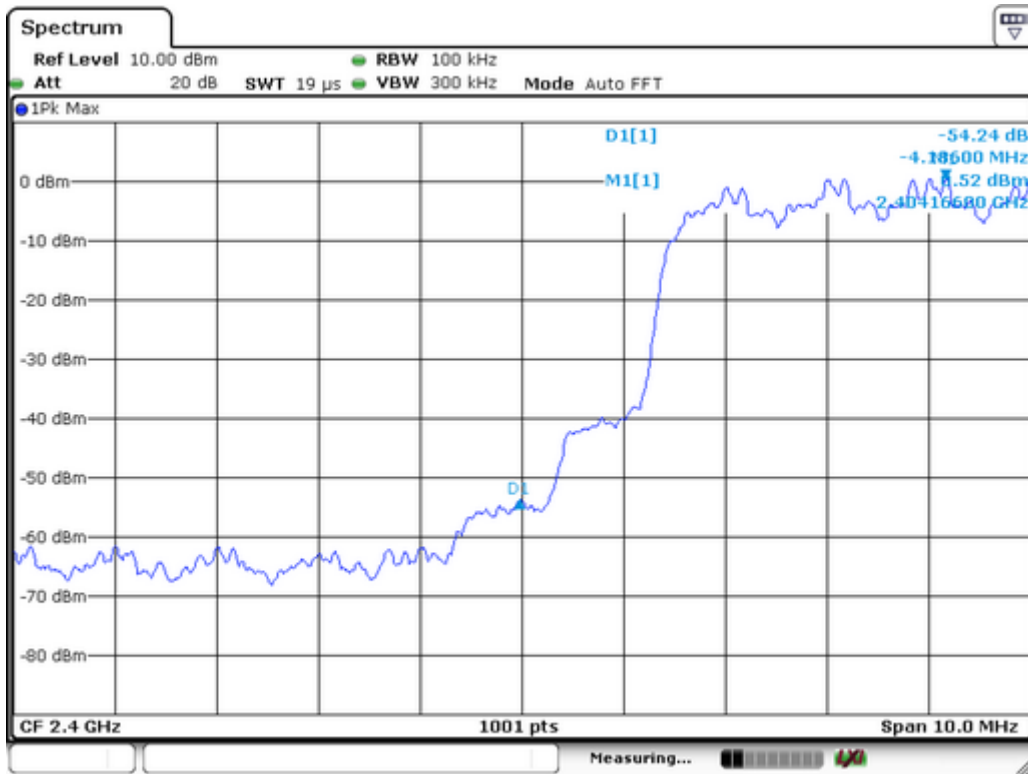



8 20 dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247
Test Method : ANSI C63.10:2013
Test Mode : Refer to section 3.3

8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz



8.2 Test Result



Test Mode: CH00 / CH39 / CH78 (GFSK/(1Mbps)Mode)


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
00	2402	839
39	2441	821
78	2480	821


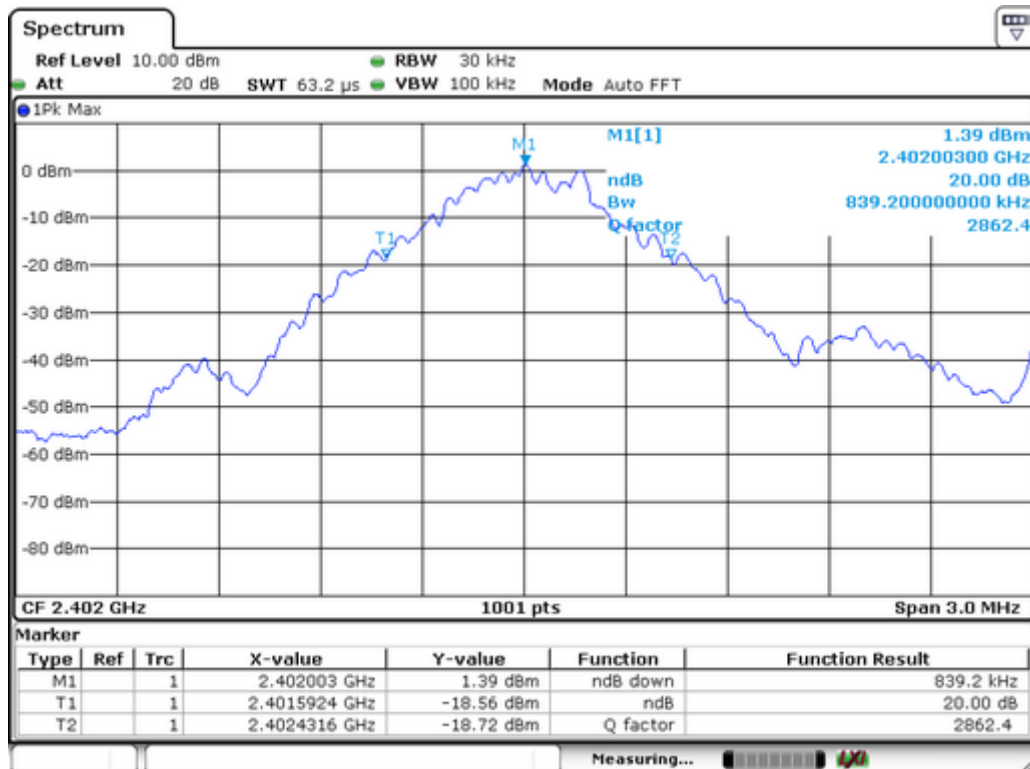


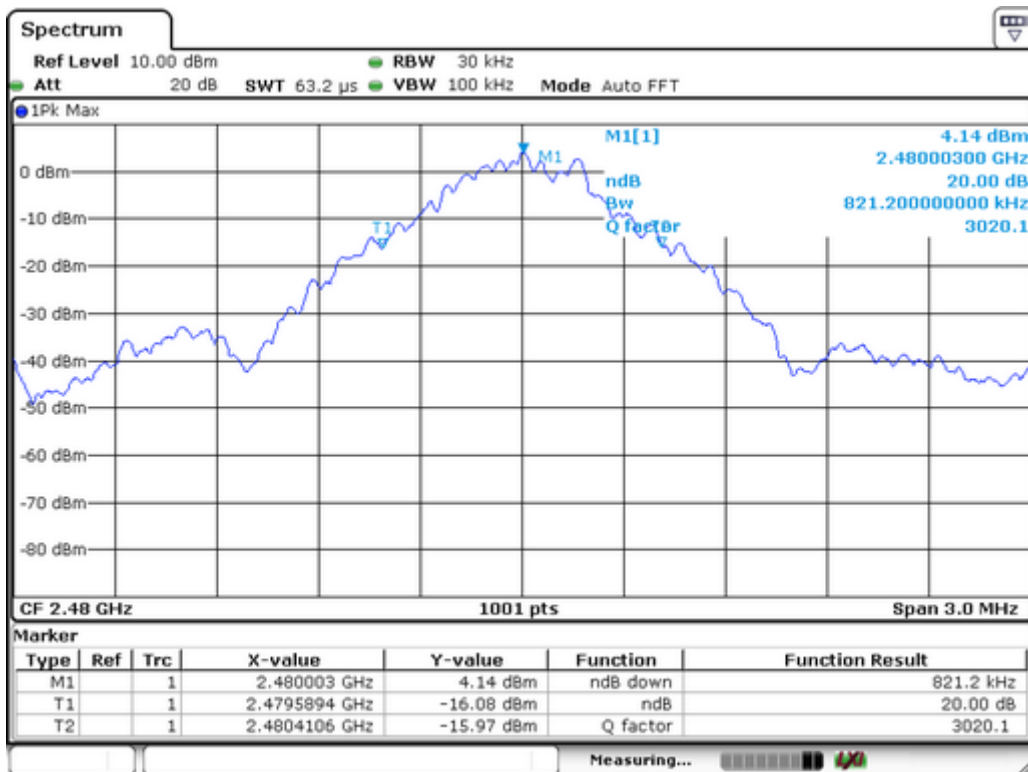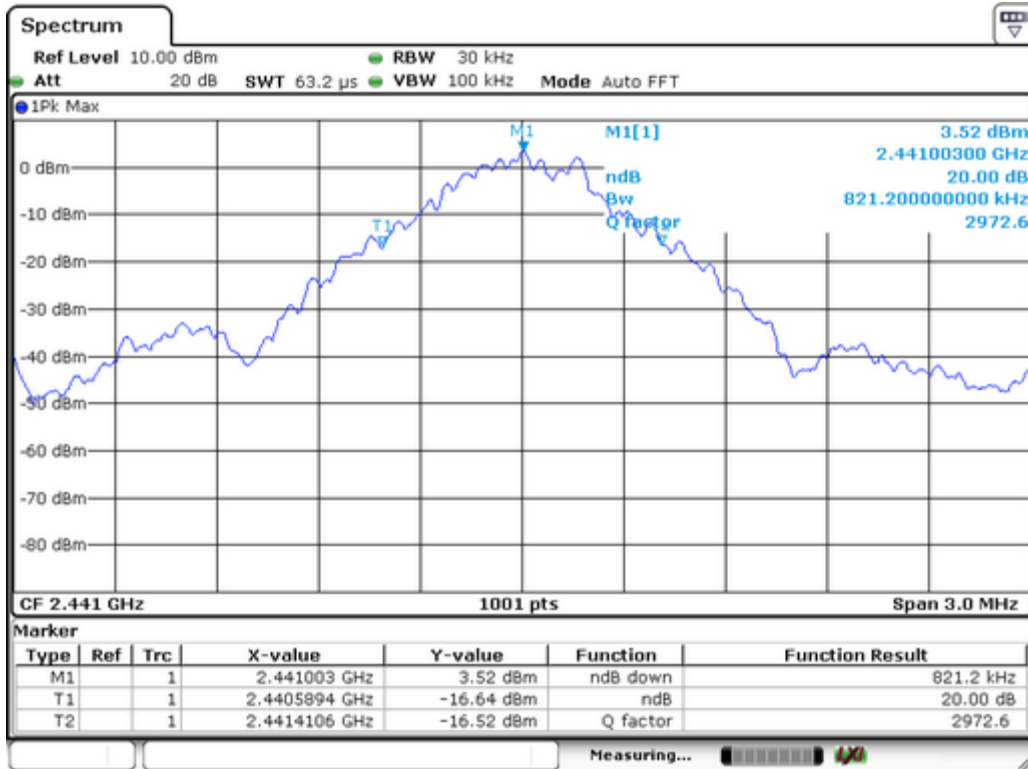

Test Mode: CH00 / CH39 / CH78 (Π/4-DQPSK /(2Mbps)Mode)

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
00	2402	1268
39	2441	1235
78	2480	1238

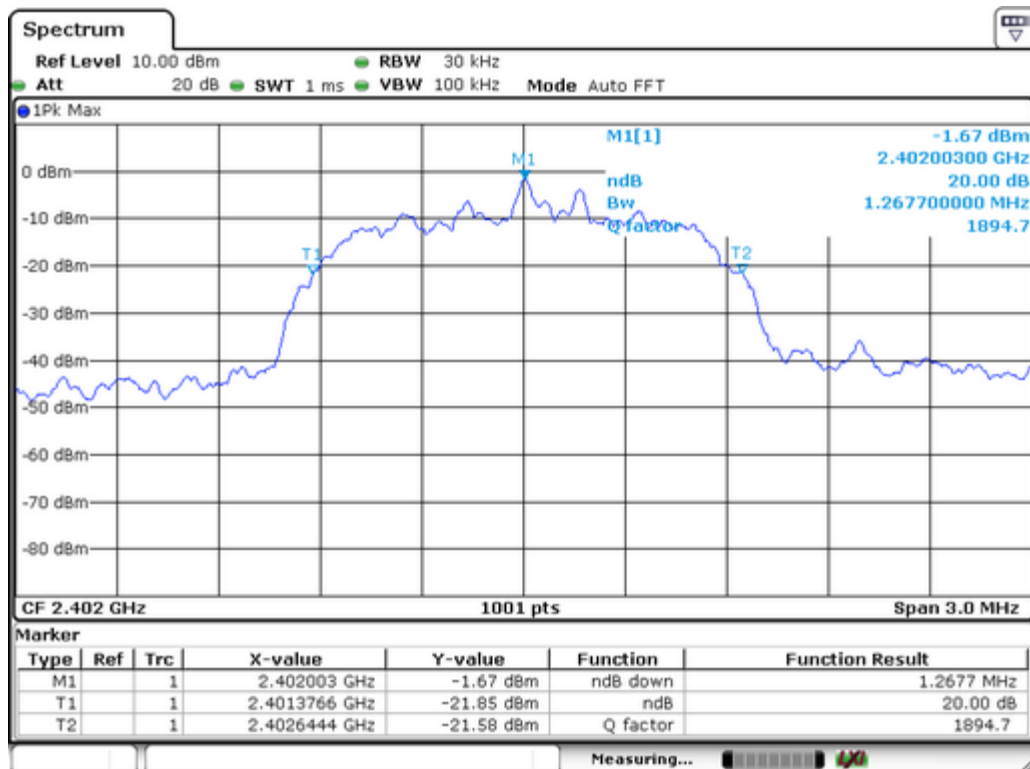


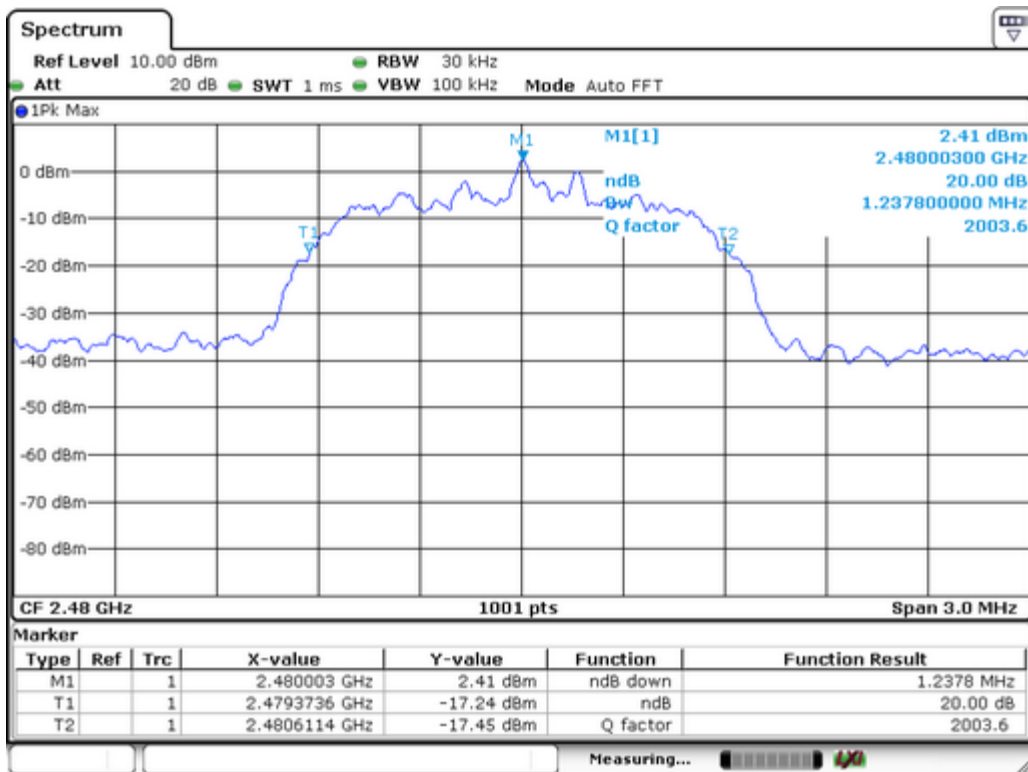
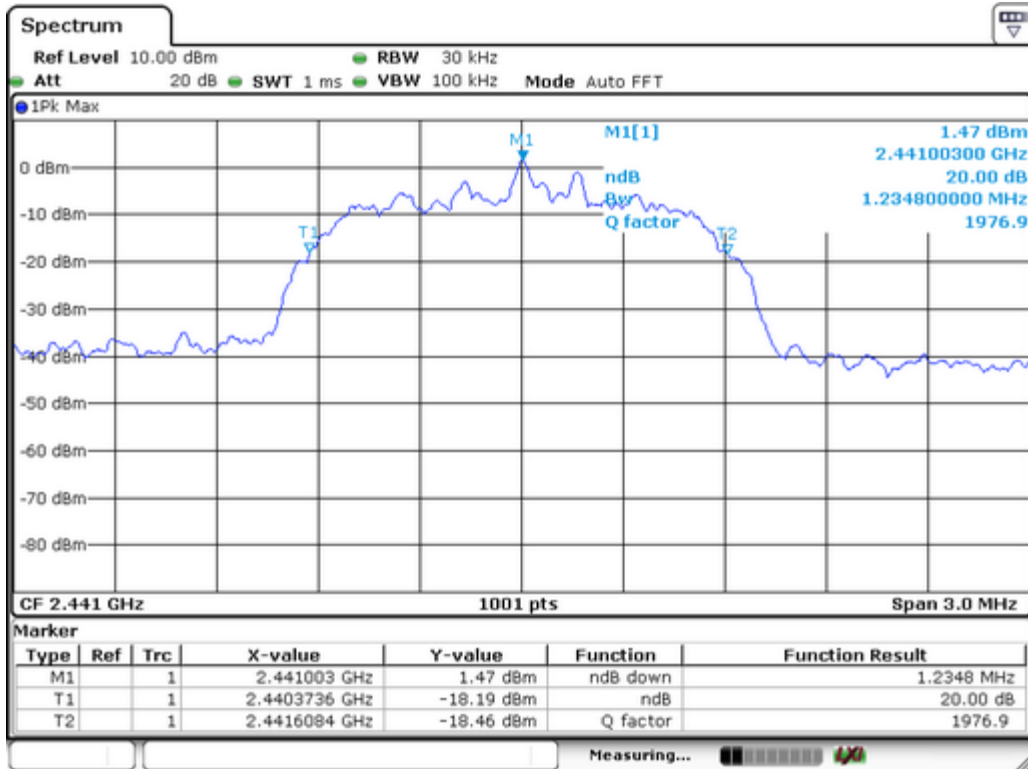




Test Mode: CH00 / CH39 / CH78 (8DPSK(3Mbps)Mode)

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
00	2402	1226
39	2441	1256
78	2480	1259

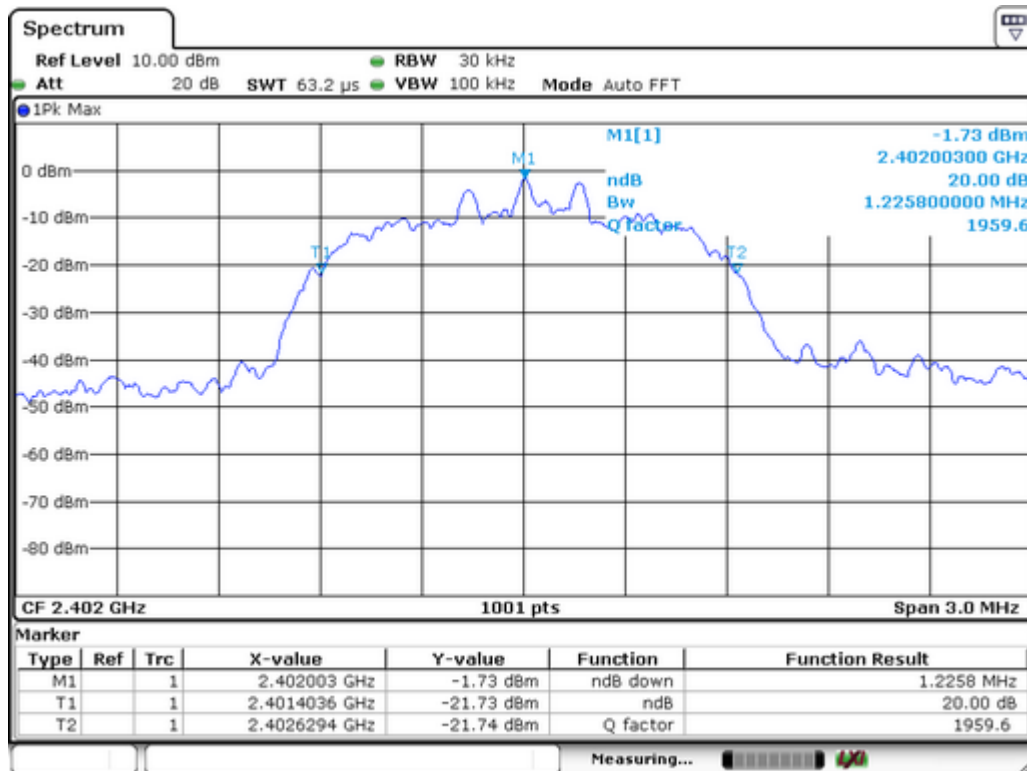

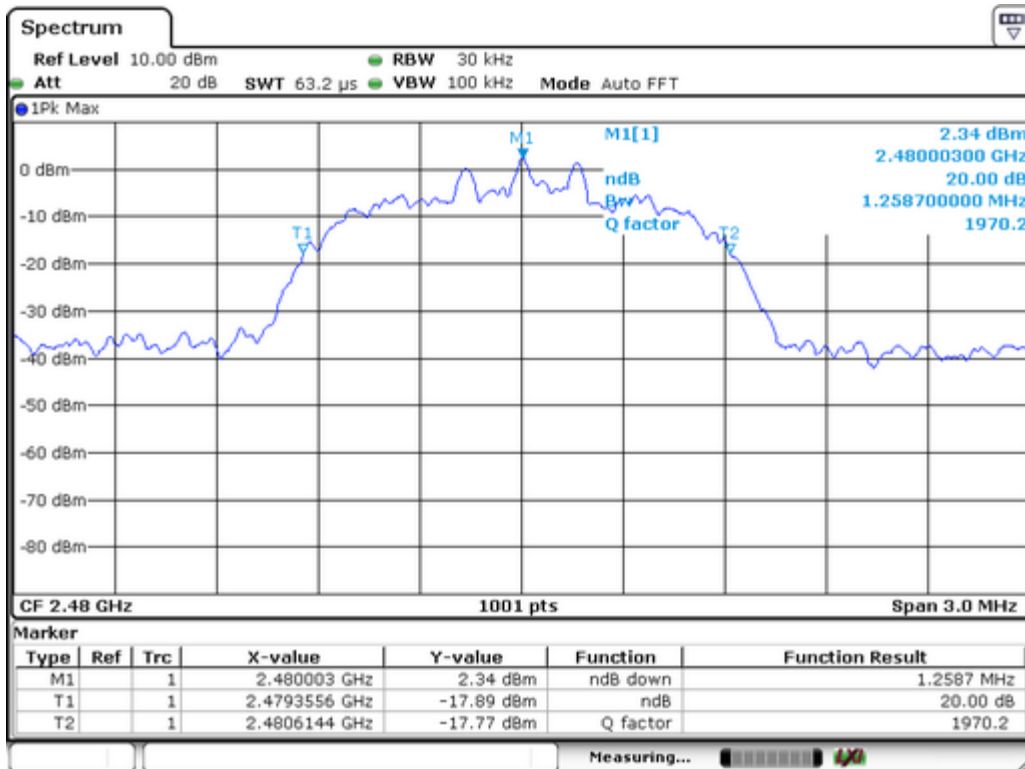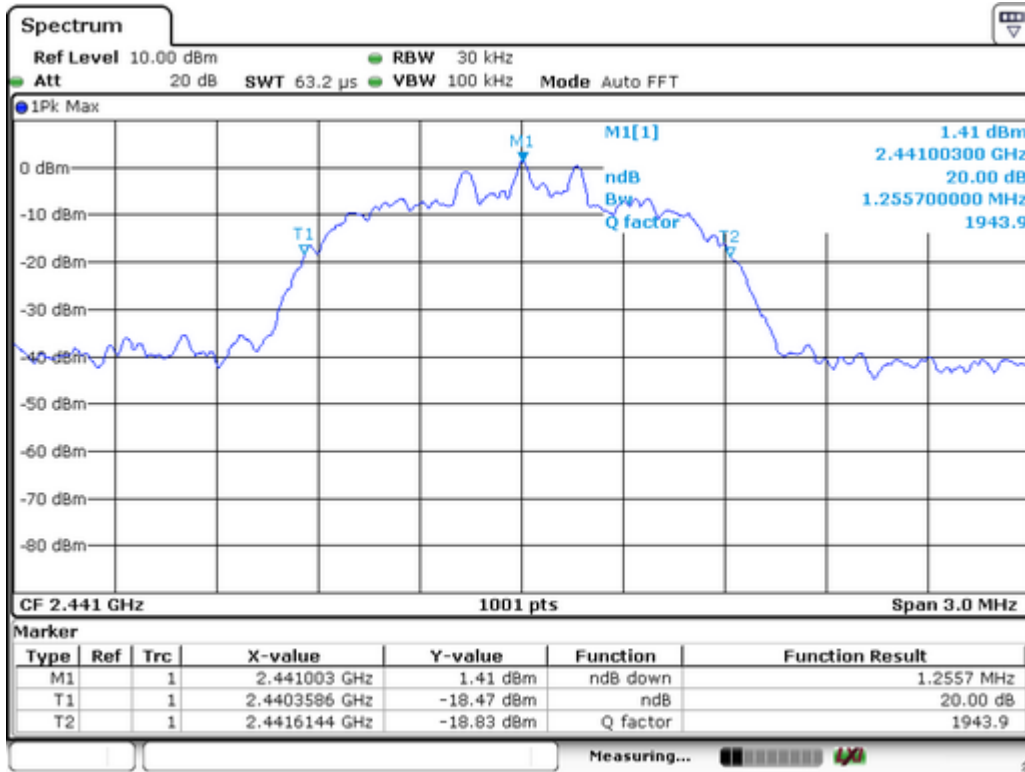

9 Maximum Peak Output Power

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Refer to the result “Number of Hopping Frequency” of this document. The 0.125watts (20.97 dBm) limit applies.
- Test Mode : Refer to section 3.3

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

9.2 Test Result

GFSK(1Mbps)					
Test Channel	Frequency	Conducted Output Peak Power	Conducted Output Peak Power	LIMIT	Pass/Fail
	(MHz)	(dBm)	(mW)	(mW)	
CH00	2402	2.75	1.88	1000	Pass
CH39	2441	4.71	2.95	1000	Pass
CH78	2480	5.31	3.39	1000	Pass

$\pi/4$ QPSK(2Mbps)

Test Channel	Frequency	Conducted Output Peak Power	Conducted Output Peak Power	LIMIT	Pass/Fail
	(MHz)	(dBm)	(mW)	(mW)	
CH00	2402	0.76	1.19	125	Pass
CH39	2441	3.53	2.25	125	Pass
CH78	2480	4.32	2.70	125	Pass

8DPSK(3Mbps)

Test Channel	Frequency	Conducted Output Peak Power	Conducted Output Peak Power	LIMIT	Pass/Fail
	(MHz)	(dBm)	(mW)	(mW)	
CH00	2402	0.80	1.20	125	Pass
CH39	2441	3.40	2.18	125	Pass
CH78	2480	4.21	2.63	125	Pass



10 Hopping Channel Separation

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode	: Hopping

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.





10.2 Test Result

Test Mode:	CH00 / CH39 / CH78 (GFSK(1Mbps) Mode)
------------	---------------------------------------

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)
1	2402	1001	>839
40	2441	1001	>821
79	2480	1001	>821

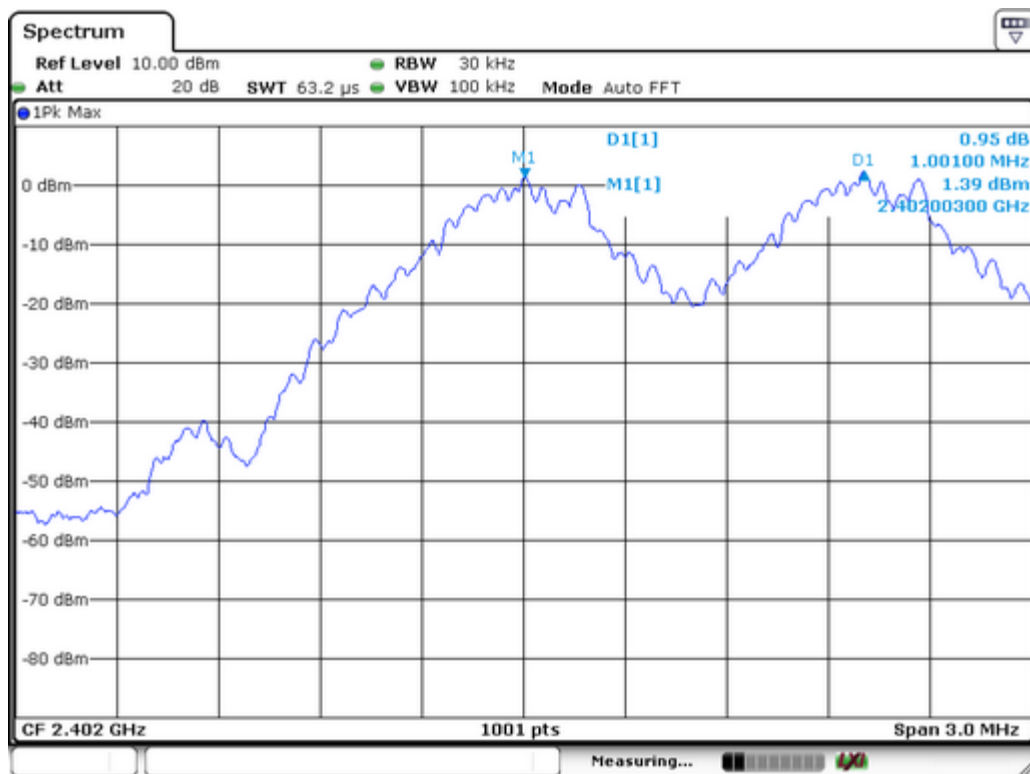


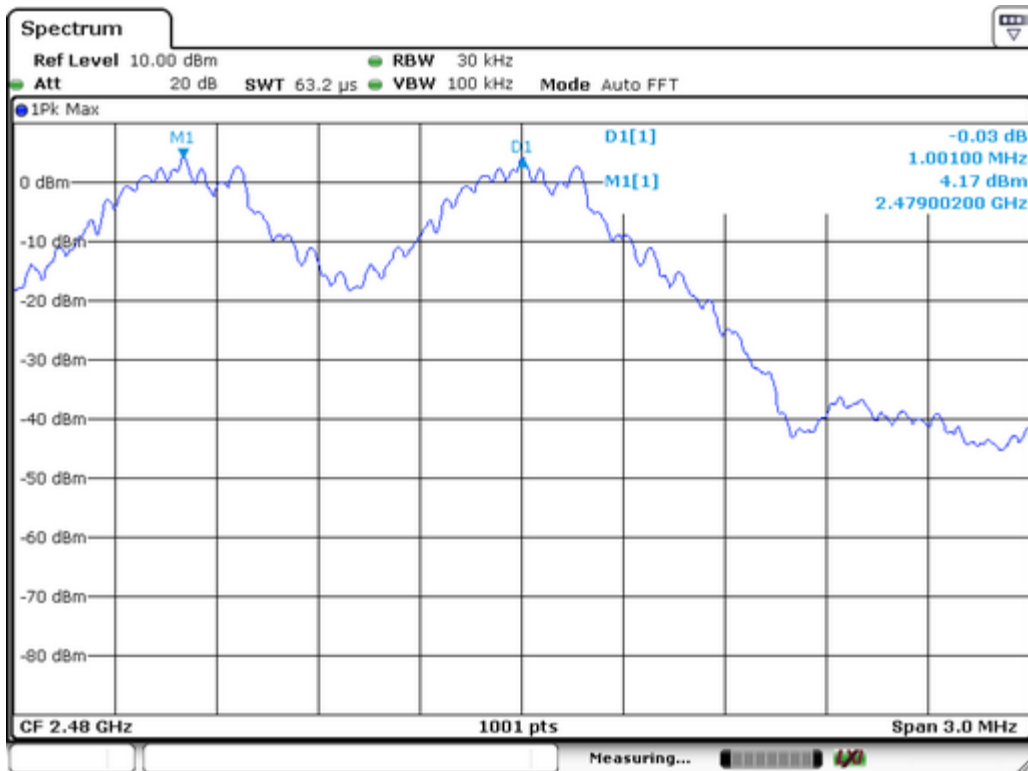
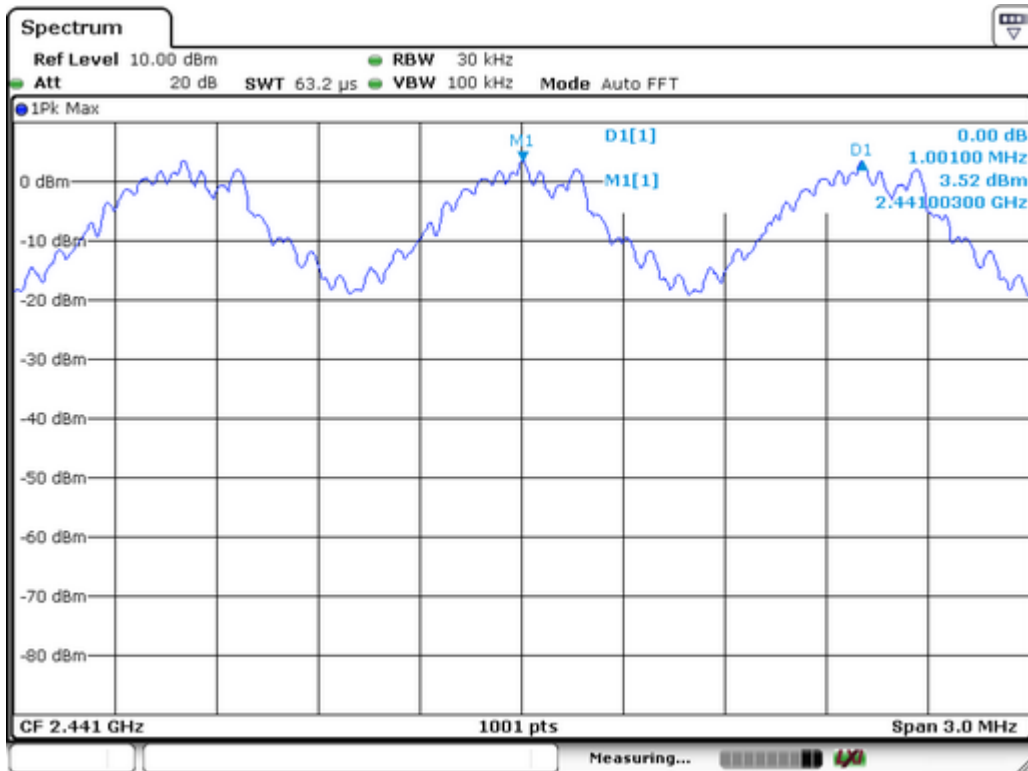




Test Mode:	CH00 / CH39 / CH78 (π/4-DQPSK(2Mbps) Mode)
------------	--

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1001	>845
40	2441	1001	>823
79	2480	1001	>825

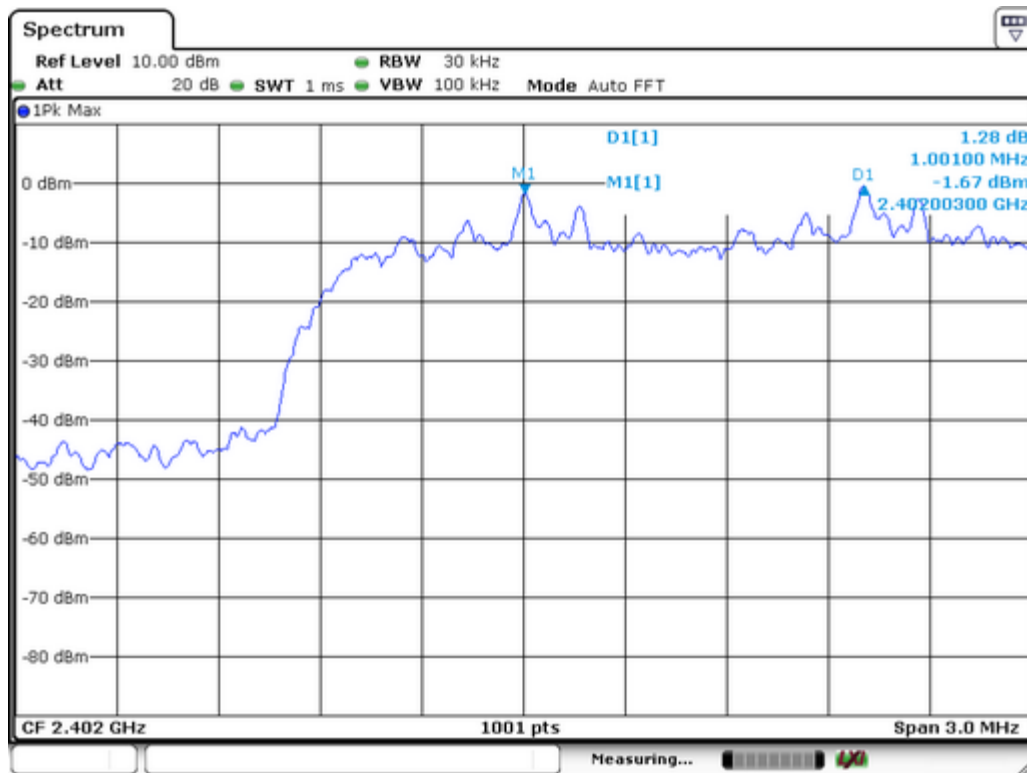


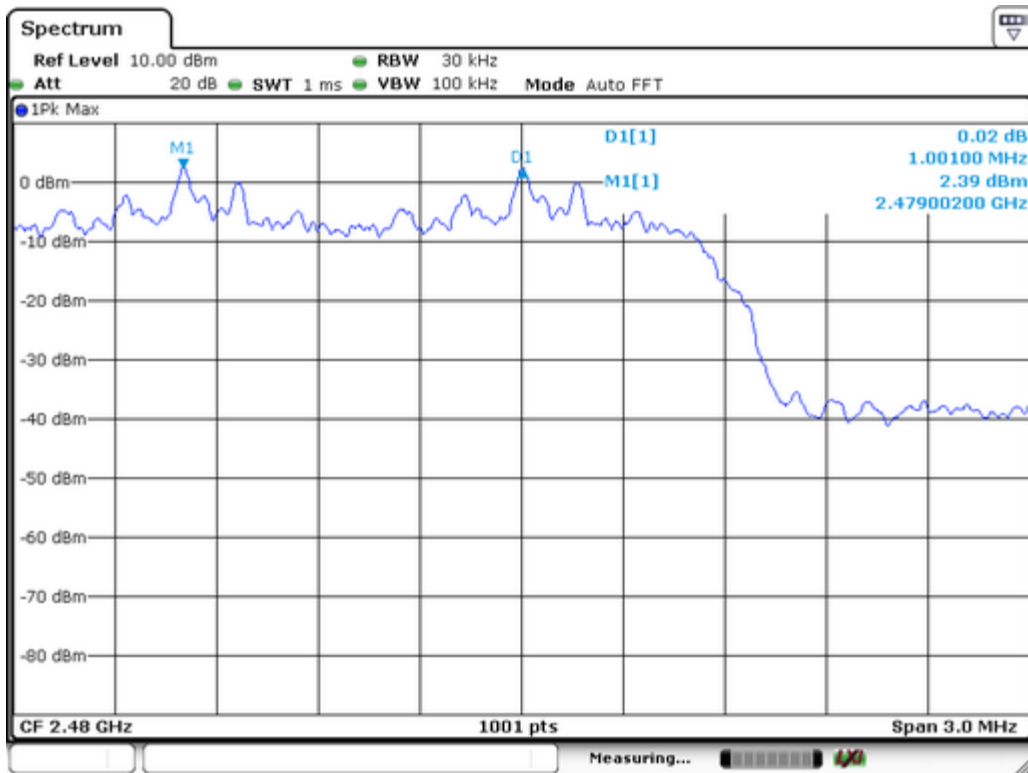
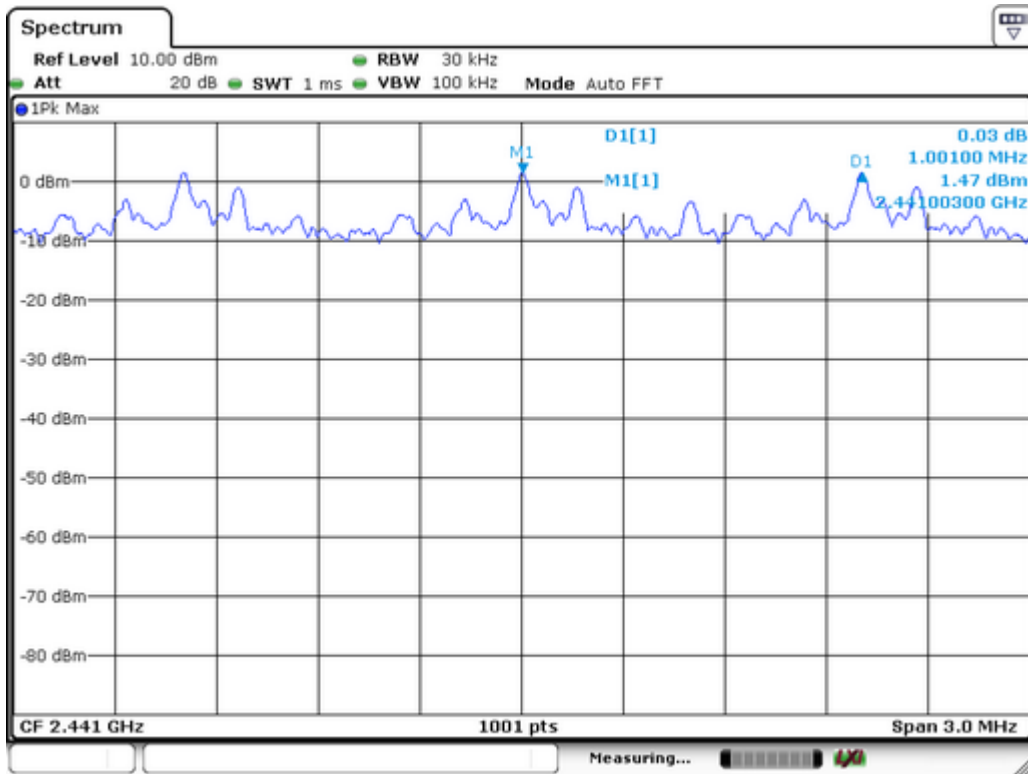




Test Mode:	CH00 / CH39 / CH78 (8DPSK(3Mbps)Mode)
------------	---------------------------------------

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1001	>817
40	2441	1001	>837
79	2480	1001	>839

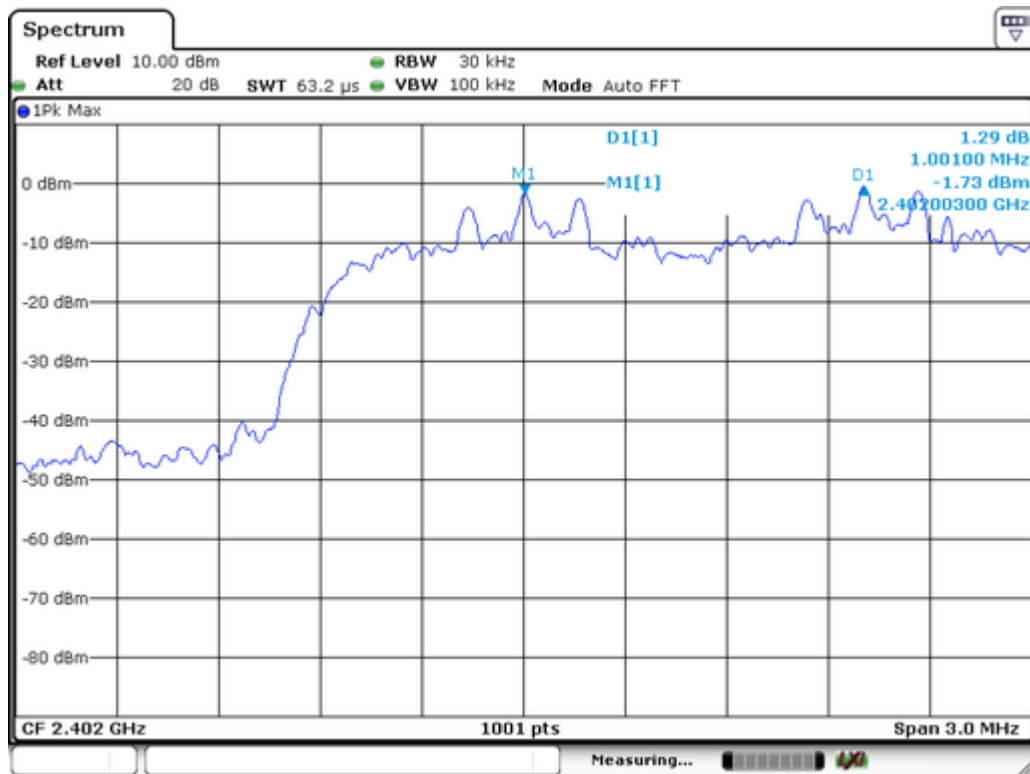

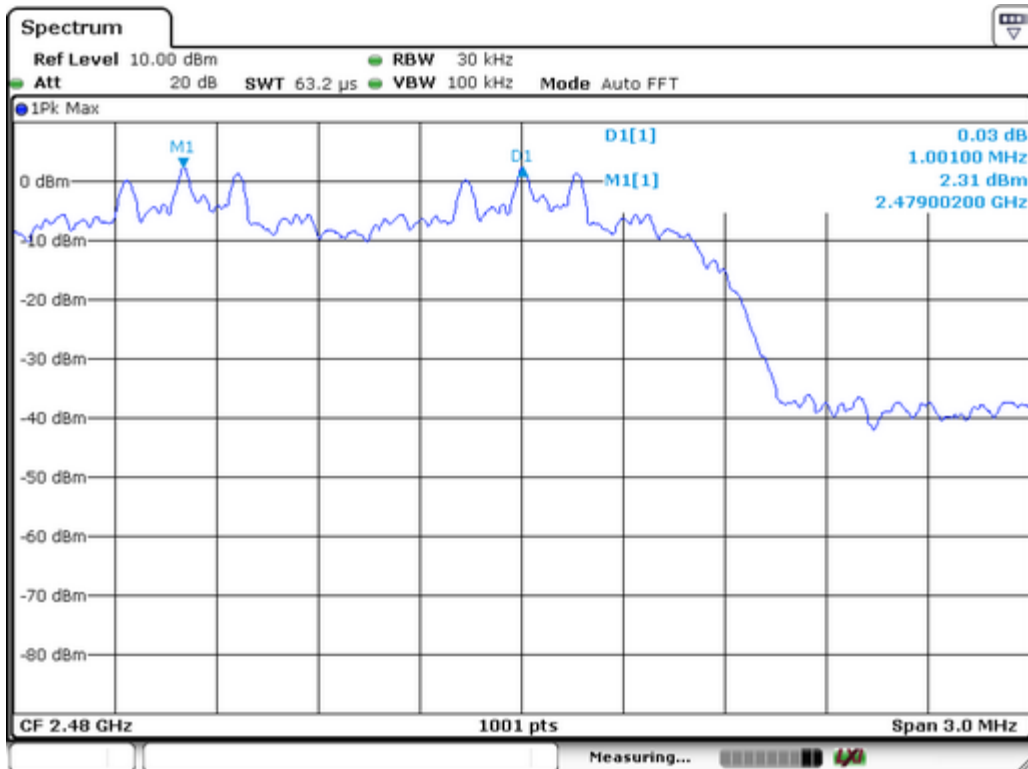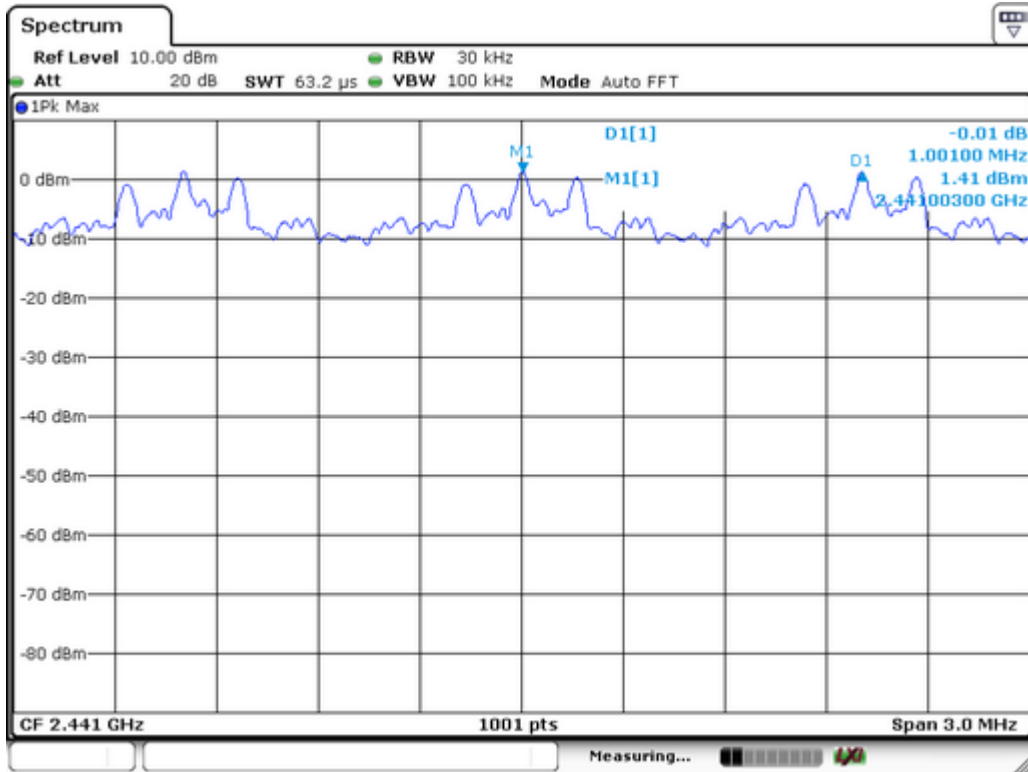



11 Number of Hopping Frequency


- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
- Test Mode : Hopping(GFSK)

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 300KHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

11.2 Test Result

Channel Number	Limit
79	≥15

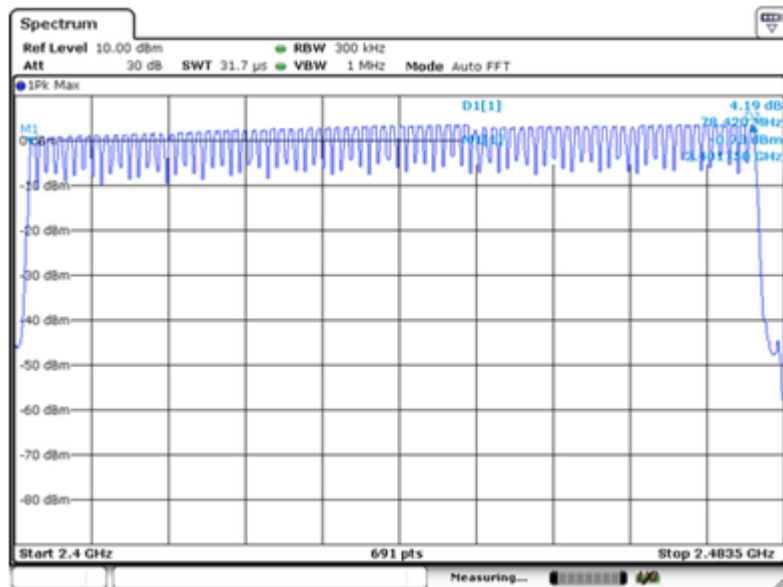

12 Dwell Time

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Mode	: Hopping
Remark	: The worst case($\pi/4$ -DQPSK) was recorded



12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW =1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

12.2 Test Result

Test Mode:	$\pi/4$ -DQPSK(2Mbps) –2DH1/2DH3/2DH5
------------	---------------------------------------

Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
2DH1	$1600/(2*79) \times 31.6 = 320$	0.396	126.720	400
2DH3	$1600/(4*79) \times 31.6 = 160$	1.653	264.480	400
2DH5	$1600/(6*79) \times 31.6 = 106.67$	2.905	309.876	400

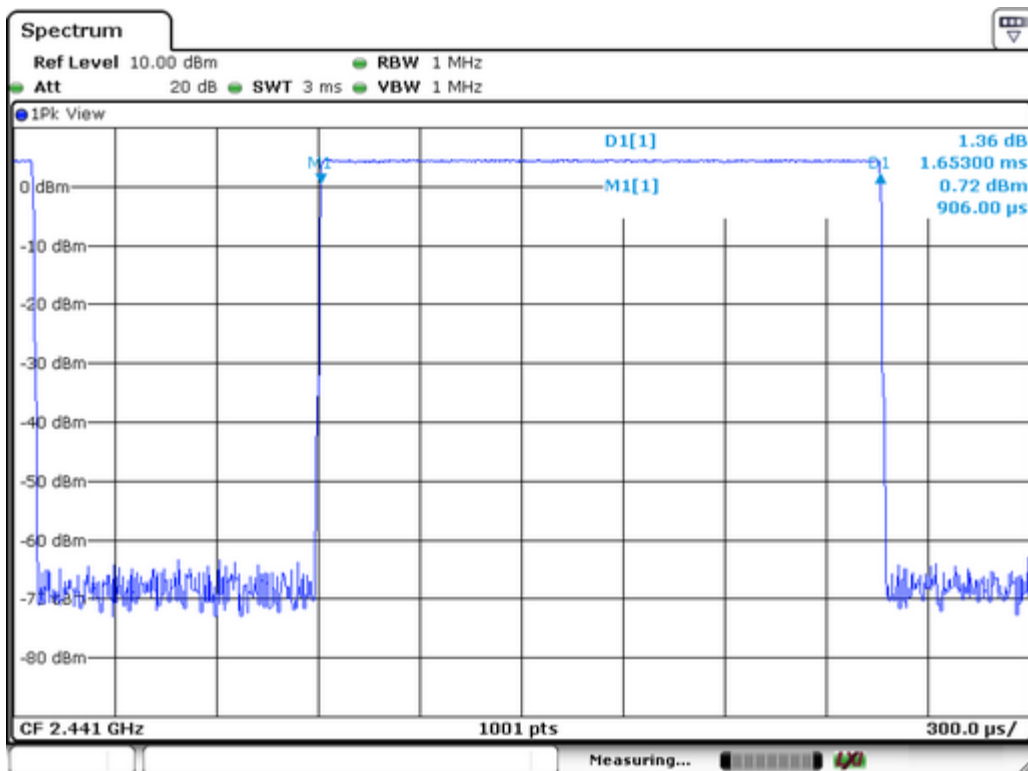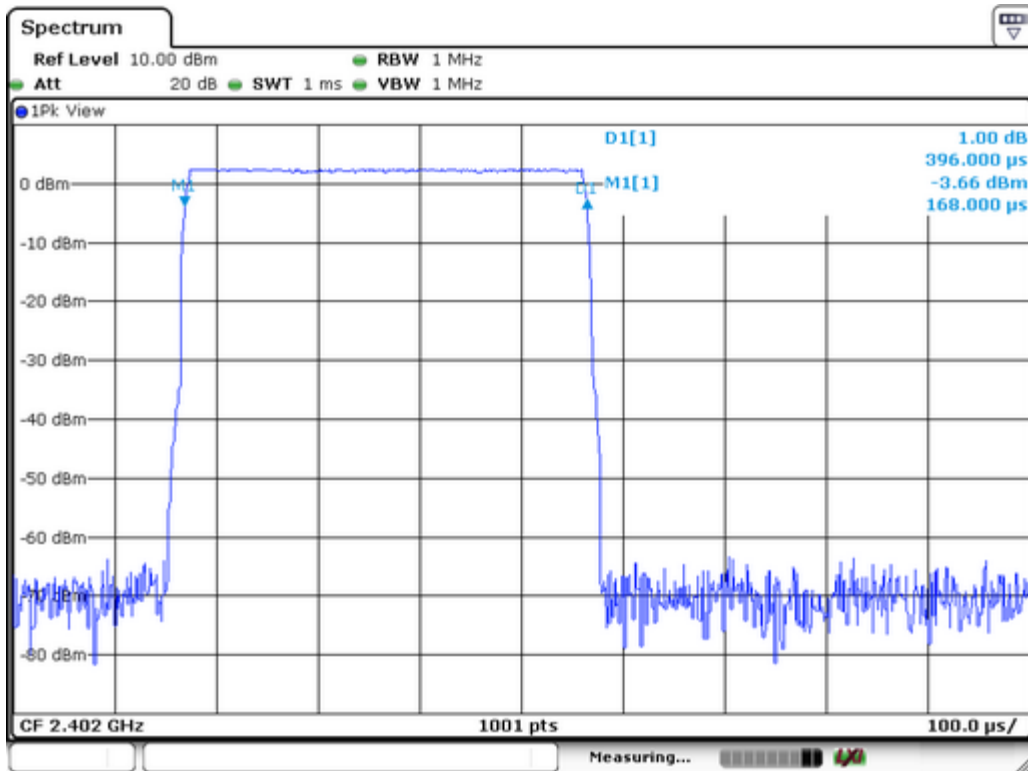

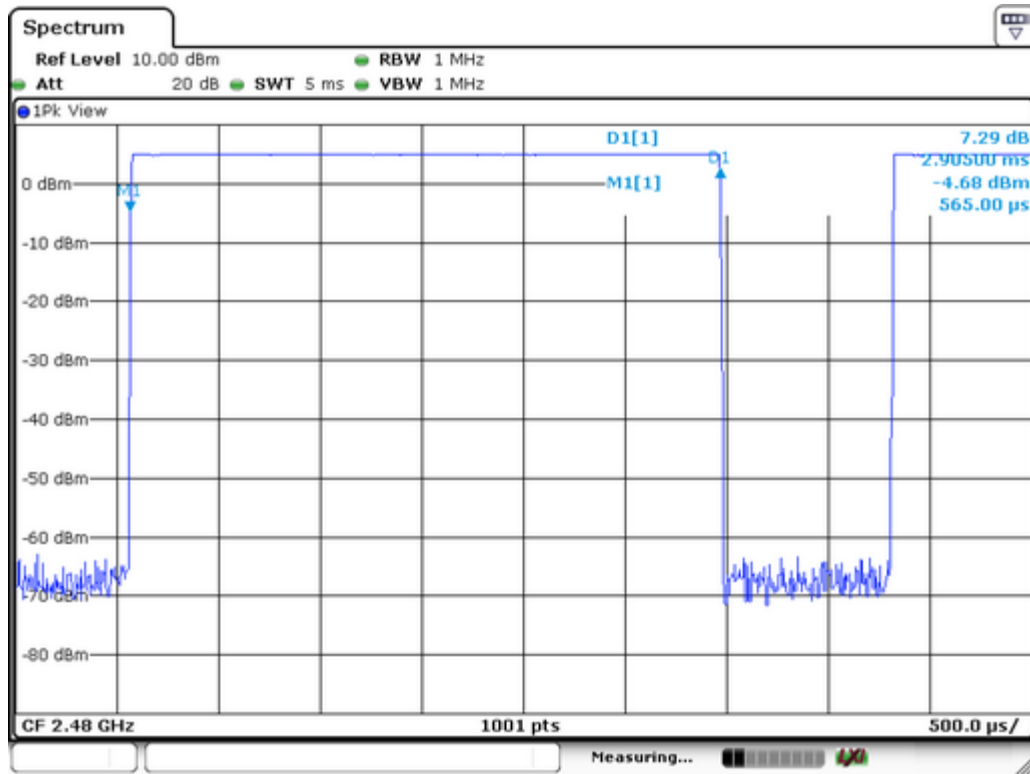





13 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an internal PCB Antenna, it meet the requirement of this section.

14 TEST PHOTOS


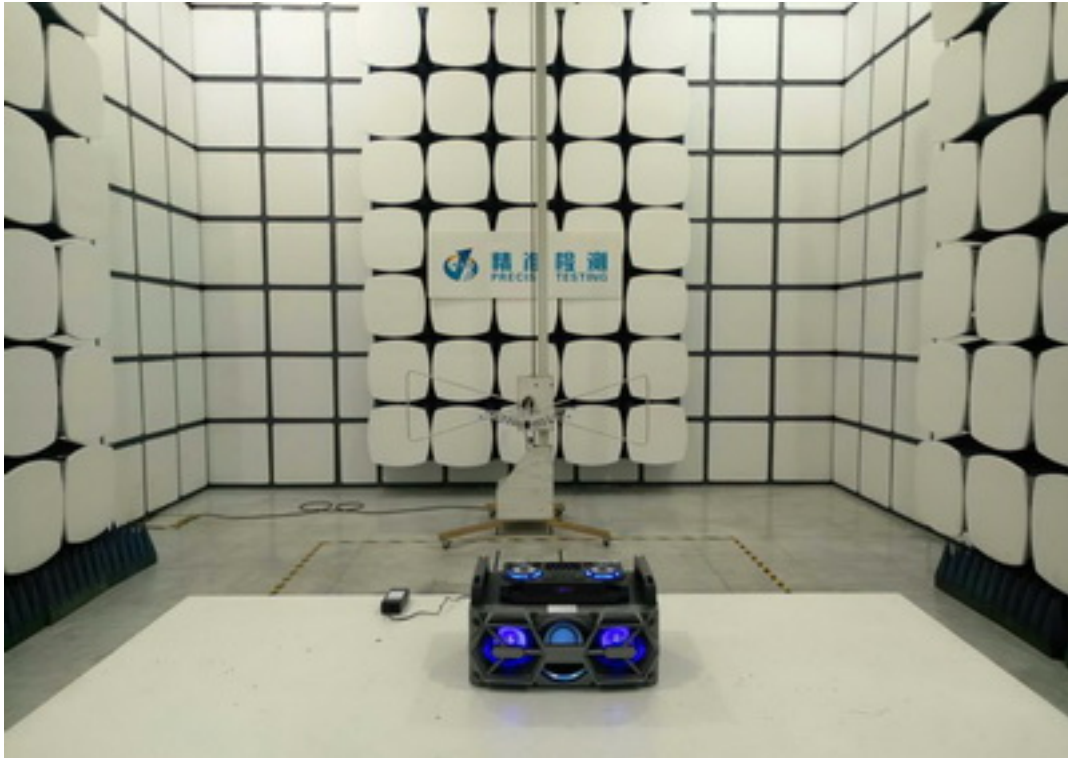



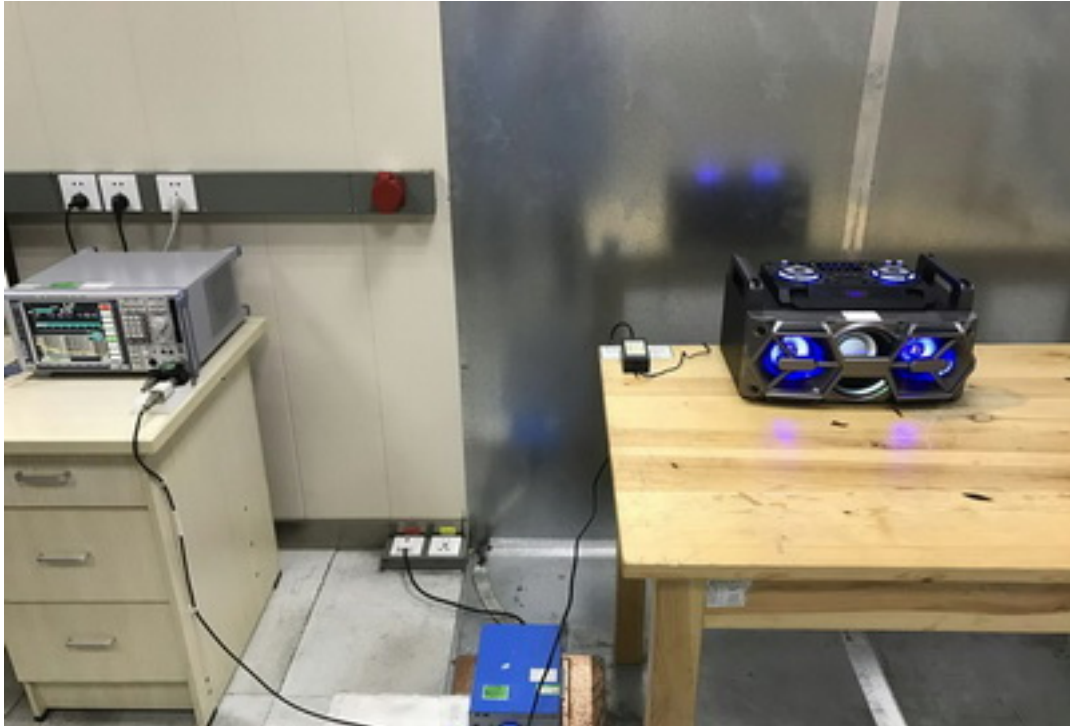







15 EUT PHOTOS





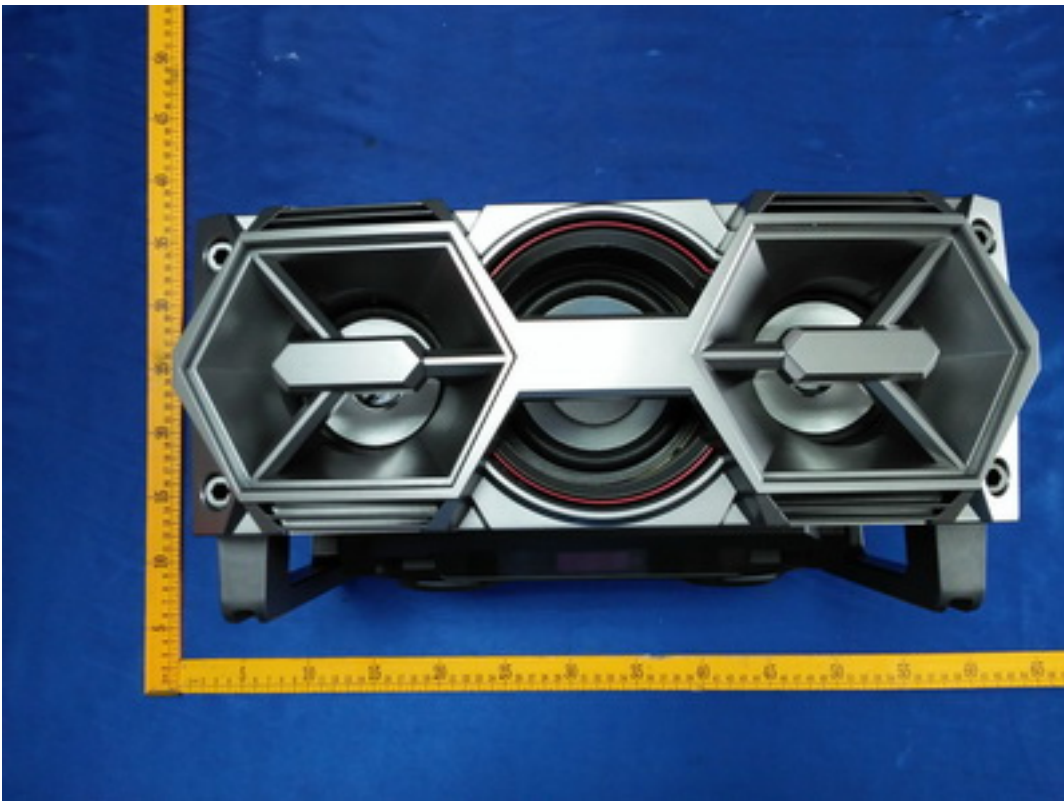
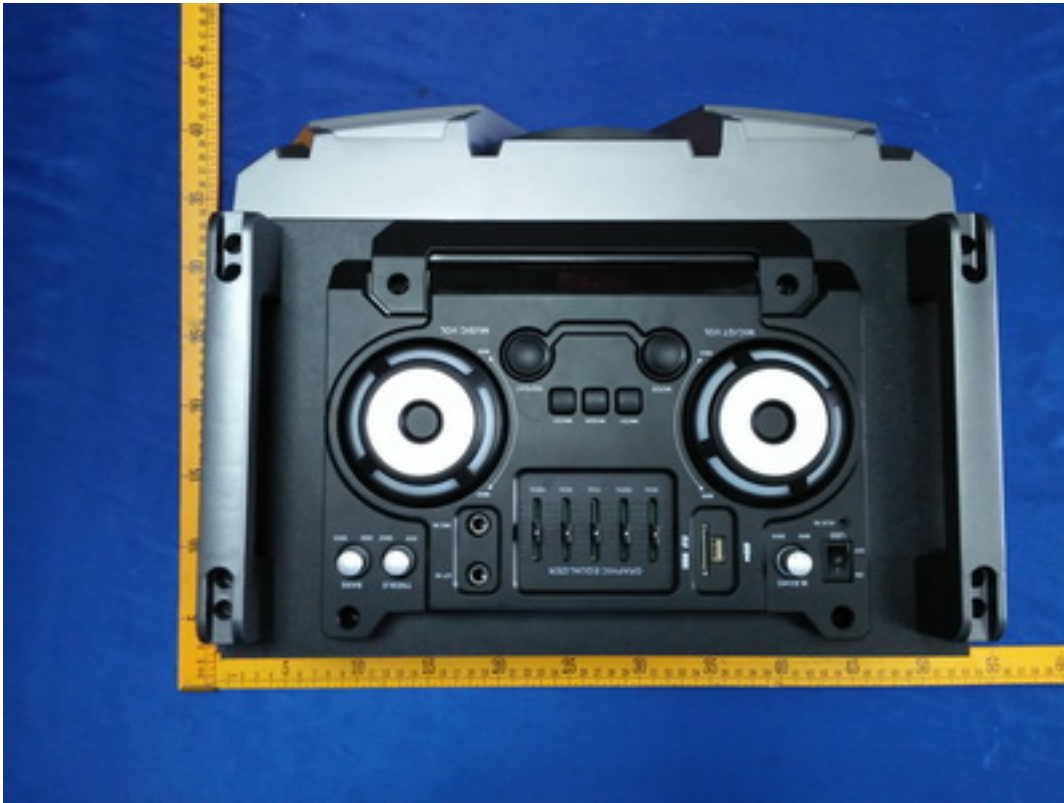


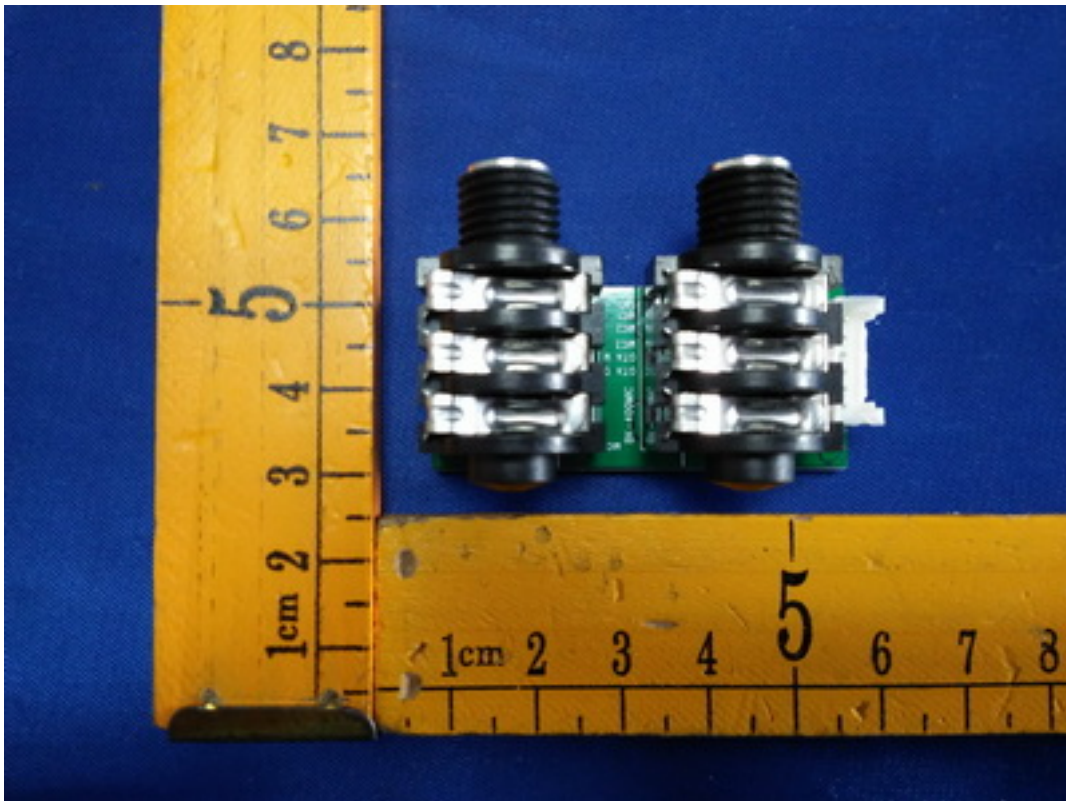
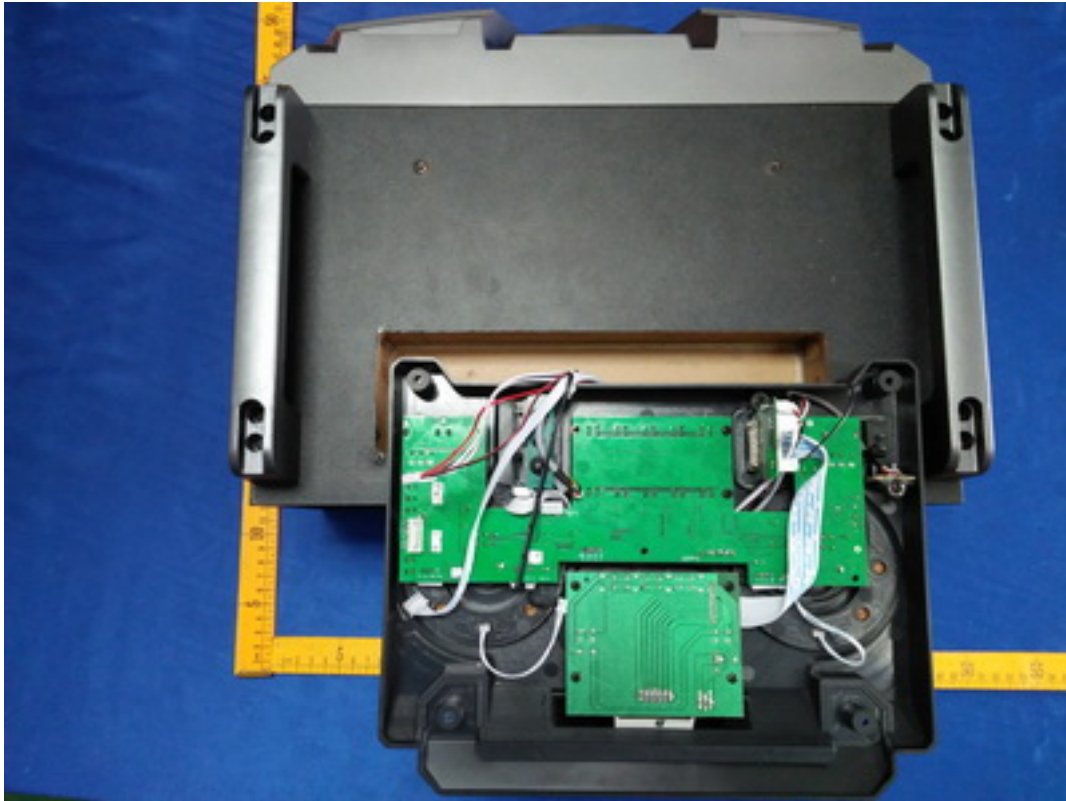


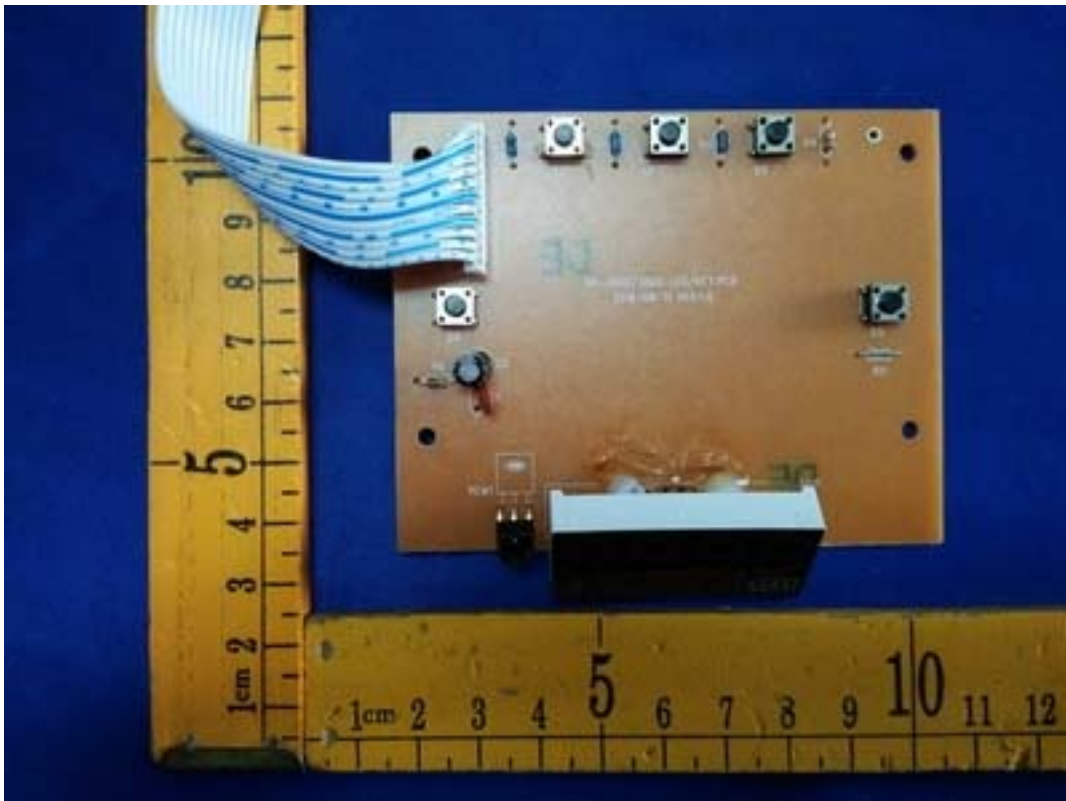


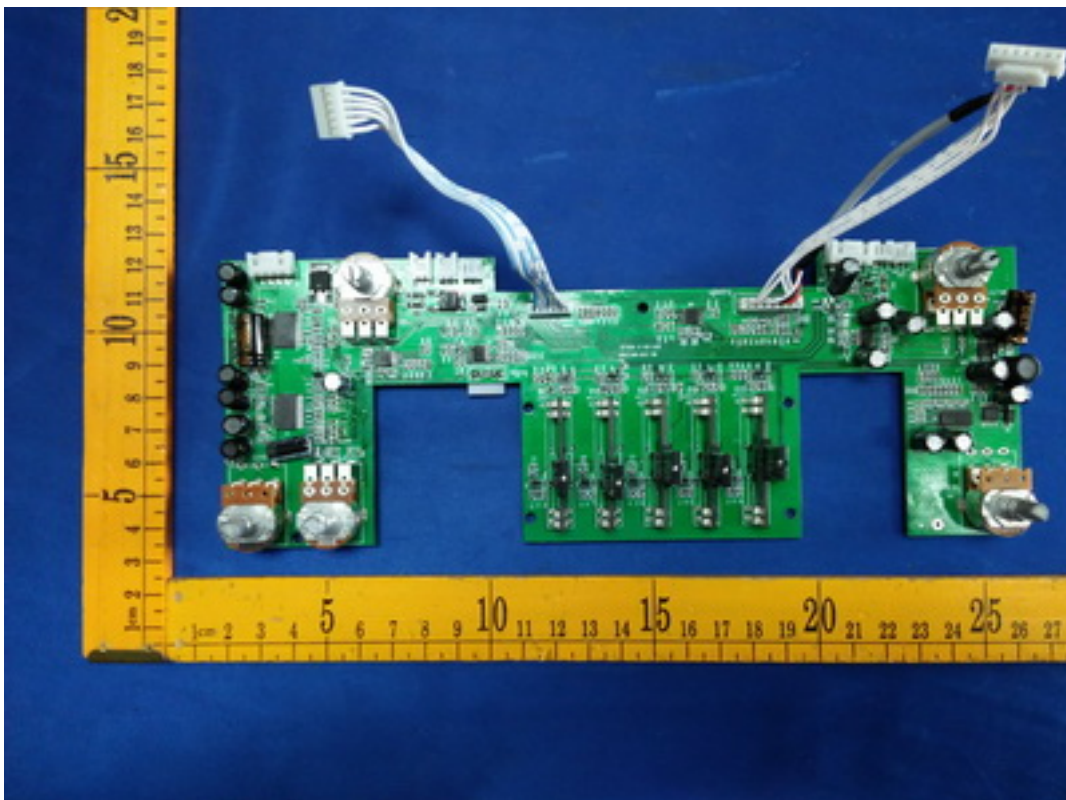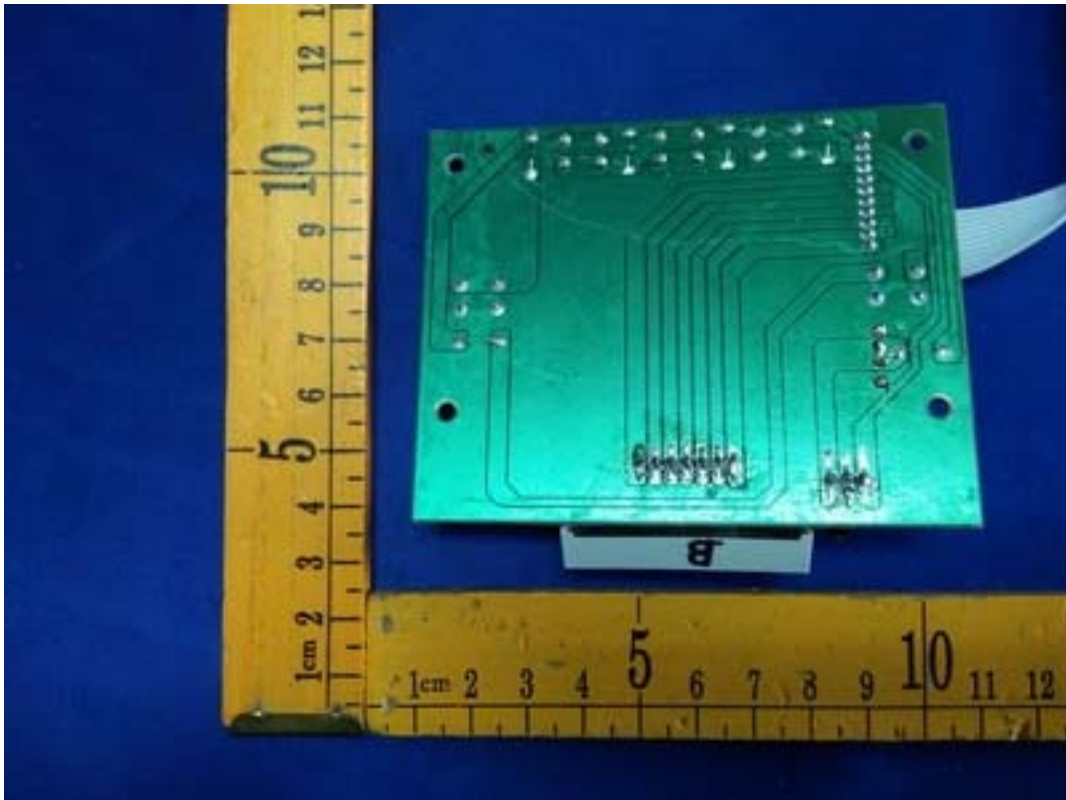

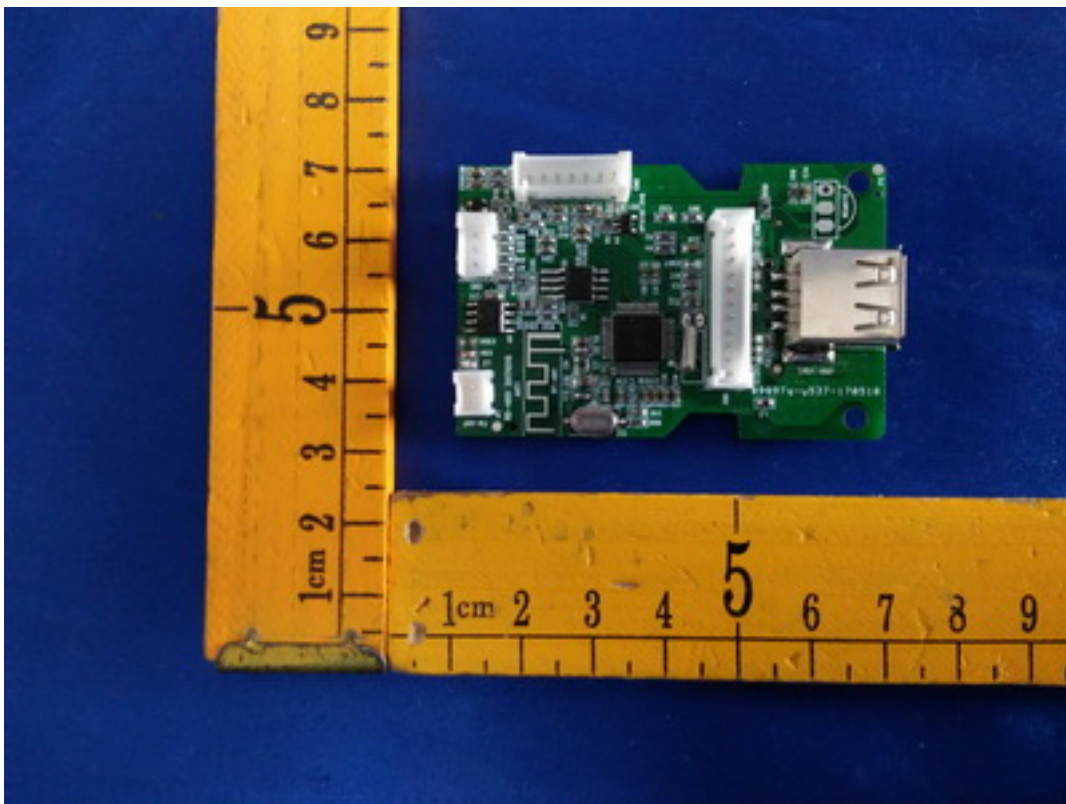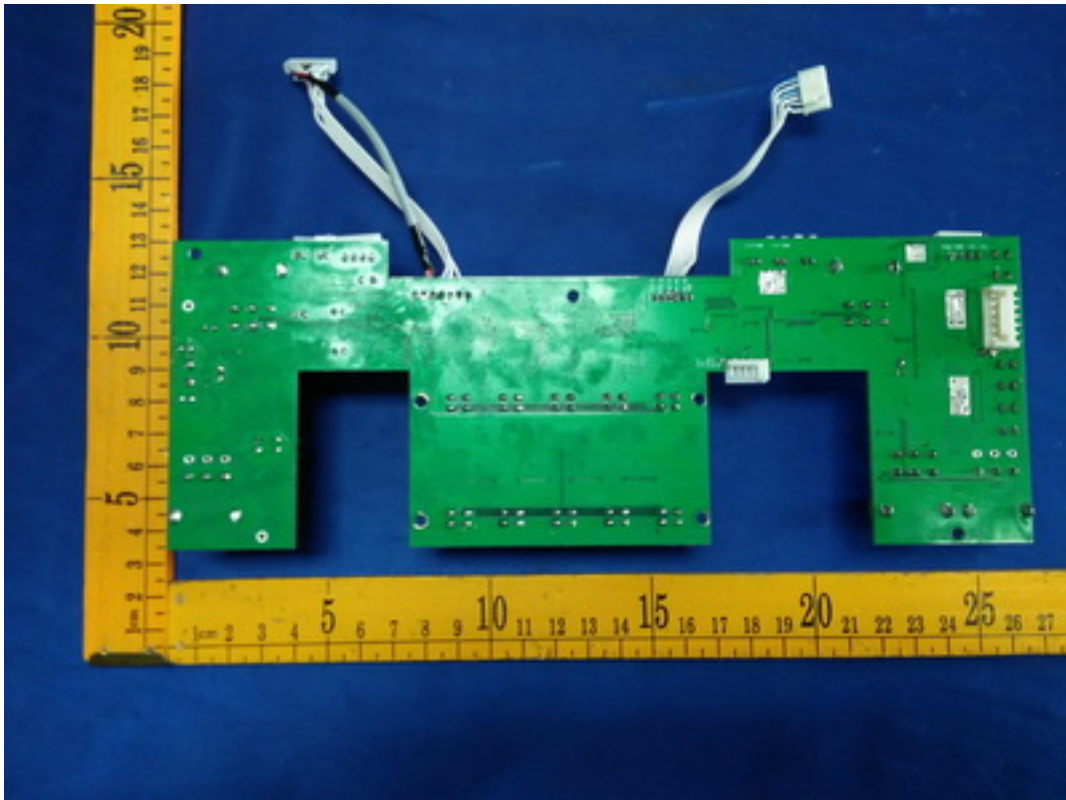

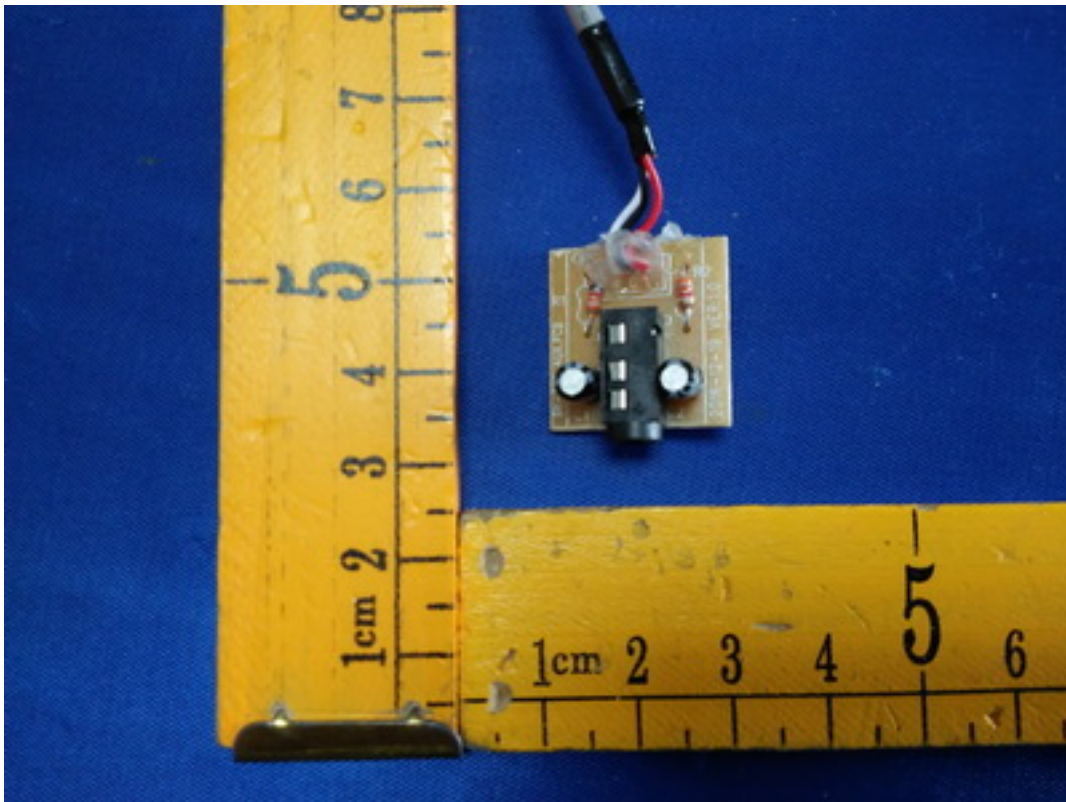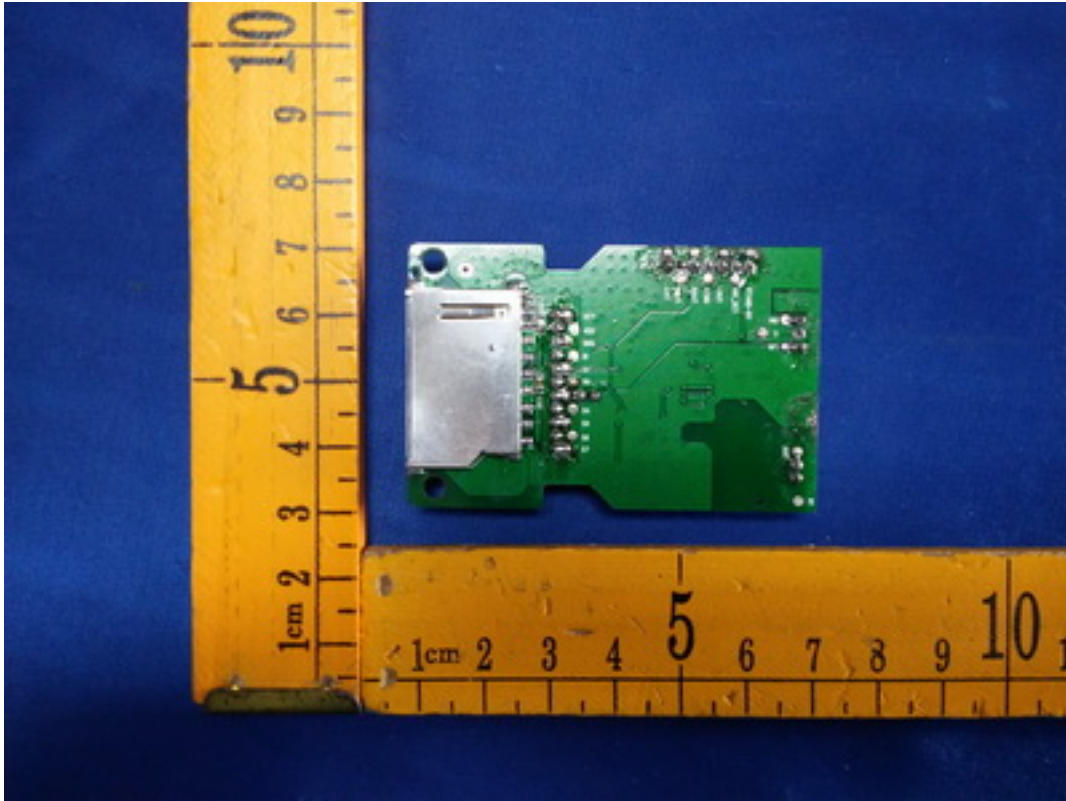

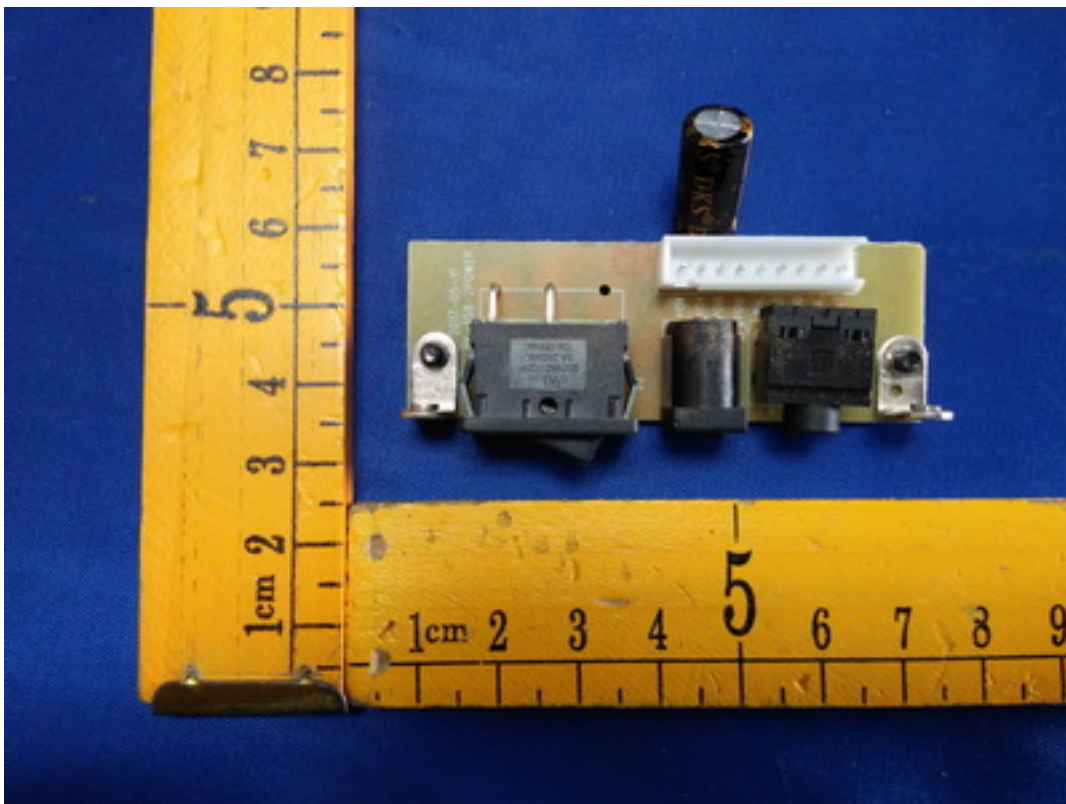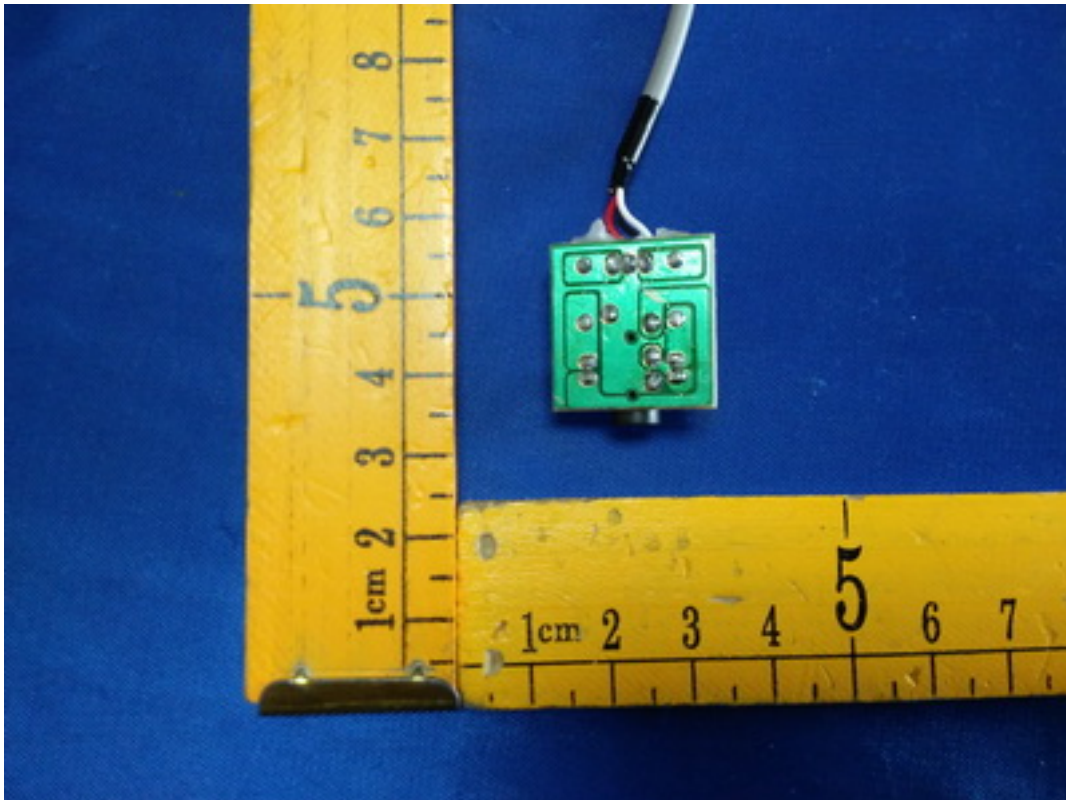

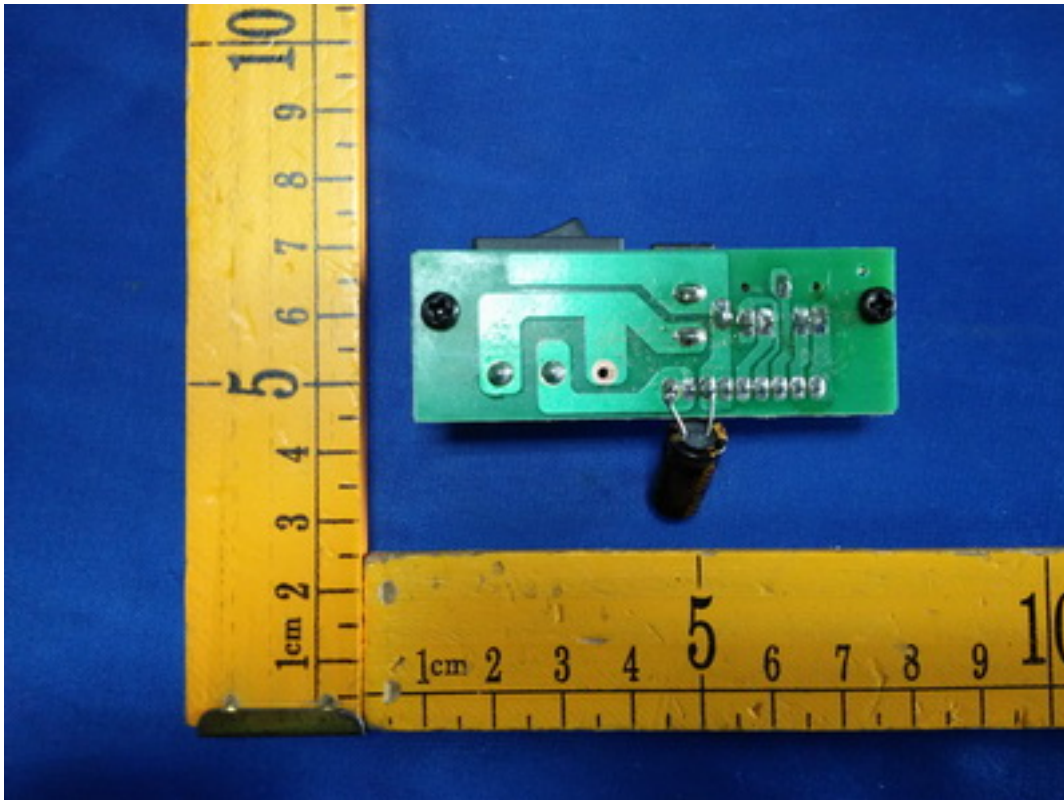

FLYPOWER
Switching Adapter

MODEL:PS65B150Y3000S
 INPUT:100-240V~, 50/60Hz,1.5A
 OUTPUT:15.0V --- 3000mA

⊖ — ⊕

CE VI

UL US LISTED AV Power Supply E343638

This device complies with part 15 of the FCC Rules.
 Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference, and
 (2) this device must accept any interference received,
 including interference that may cause undesired operation.

CAUTION!
 HAZARDOUS AREA

Do Not Remove This Cover.
 Trained Service Personnel Only.

No Serviceable Components Inside. 1706

MADE IN CHINA

*****THE END REPORT*****