

User & Production Information Label						
Label dimensions	69.8*37.8mm(4*R4.9mm)					
Category	Housing label					
Position	Bottom side of the plastic housing in the recessed space foreseen					
Text	Model Number 802.11n WiFi Router	texts (Add a space after "SN:")	FCC texts/ Caution	Code/FCC ID/US	ETL	Power Rating Made in Vietnam
Font	Myriad Pro	Univers	Univers	Univers	Univers	Light
Text Height (if not defined => 2mm)	9pt	5.8pt	3.7pt	4.5pt	2.8pt	4.5pt
Font color	Pantone 356	black	black	black	black	black
Logo	Technicolor	CenturyLink	FCC	ETL	ROHS	
height	3.8mm	4.8mm	5.0mm	8.0 mm(ID excl.)		5mm
color	Pantone Cool Gray 3C	Pantone 376 Black	Pantone 356 Black	Black	Black	Green
Note: Logo's may not be stretched in either direction.						
Pattern	Green Tape (bottom)	2 green line				
color	Pantone 356					
height	3.5mm	0.2mm				
Linear Barcodes: Symbology	Printer: Zebra 110XY4-600dpi Code 128, Type: Code B					
height	4mm					
Narrow bar width	3dot/ 0.13mm/18.18cpi					
Note	There needs to be 5mm space in front and back of each barcode.					

Due to print issues with difference dpi, ODM could adjust type font for this quality level with difference dpi printer in MP factory. (such as using Univers font instead Univers LT with FXC factory printer).


User & Production Information Side Label		
Label dimensions	72.5x54.5 mm	
Category	Housing label	
Text	Model Number 802.11n WiFi Router	SSID / Security Type / Key/Passphrase / WPS PIN / GUI Address /
Font	Myriad Pro	Arial
Text Height (if not defined => 2mm)	10pt	12pt
Font color	Pantone 356	black
Logo	Technicolor	CenturyLink
height	4.5mm	5.5mm
color	Pantone Cool Gray 3C	Pantone 376 / Pantone 356 / Black
Note: Logo's may not be stretched in either direction;		
Pattern	4 gray Tape	3 White space between gray tape
color	Pantone Cool Gray 3C	White
height	4.76mm	4.76mm

1. SN : CPYYWWPPXX9999
To be printed with CAPITAL digits only. Printer: Zebra 110XY4-600dpi

CP	YY	WW	PP	XXX	Restriction	9999
Fixed	Production Year	Production Week	BB	000->ZZZ	I, O, X cannot be used	4 digits from "0000" to "9999"
Remark: XXX is alphanumeric combination, max 33*33*33 = 35,937 per week per combination. Serial number can be started from Serial Bank (PP) BB, i.e. BB000.						Extra 4 digits added to the end.



- MAC Address: AAABCCDDDEEE
A 12 digits hexadecimal, CAPITAL letters and numbers only. No colon is needed.
- GW Code: BAC1100TVx
"BAC1100T" is fixed content
"V" = Realisation Variant. (if made in China, it's "E", Made in Vietnam, it's "V")
"x" = ICS (Remark: for alpha's this ICS step should always be "A" and for beta's it should always be "B").
- SSID: CenturyLink9999
"CenturyLink" is fixed content
"9999" is a 4 digits decimal code from "0000" to "9999", same as the last 4 digits of SN
Note: no space or dash is encoded between "CenturyLink" and "9999"
- Security Type: WPA2-AES Fixed content with "WPA2-AES"
- Key/Passphrase: 1234567abcdefg
The code consists of 8 digits, Char set is "23456789abcdefghijklmnopqrstuvwxyz", no upper case.
It is used to access the Gateway via wireless and derived from the random key info programmed into the nvram at the factory.
- WPS PIN: 12345678
The code consists of 8 digits, all are numeric, this code is used for WiFi protected setuo(WPS).
- GUI Address: 192.168.0.1 fixed content.
- Admin Username: admin fixed content.
- Admin Password: A1B2C3D4
This code consists of 8 digits alphanumeric.
It is derived per Technicolor security spec for DSL GWs, using random key info programmed into the nvram at the factory.

REV.	MARK.	ECN NO.	DATE	UPDATE DESCRIPTIONS	SIGNATURE
0.0	NA	NA	2014.10.16	First release	ZhouCun
0.1	NA	NA	2014.11.04	update power rating	ZhouCun
0.2	NA	NA	2014.12.24	update power rating	ZhouCun


Model Number: C1100T



SSID:	CenturyLink9999
Security Type:	WPA2-AES
Key/Passphrase:	1234567abcdefg
WPS PIN:	12345678
GUI Address:	192.168.0.1
Admin Username:	admin
Admin Password:	A1B2C3D4

technicolor
802.11n WiFi Router


C1100T - 802.11n WiFi Router


SN: CPYYWWPPXX9999
MAC Address: AAABCCDDDEEE

Caution to reduce the risk of fire, use only NO. 26AWG or larger (e.g. 24AWG) UL Listed or CSA Certified Telecommunication Line Cord



RoHS

GW Code: BAC1100TVx
Made in XXX
Power Rating: 12V  1.5A


Model Number: C1100T



SSID:	CenturyLink9999
Security Type:	WPA2-AES
Key/Passphrase:	1234567abcdefg
WPS PIN:	12345678
GUI Address:	192.168.0.1
Admin Username:	admin
Admin Password:	A1B2C3D4

technicolor
802.11n WiFi Router




C1100T - 802.11n WiFi Router


SN: CPYYWWPPXX9999
MAC Address: AAABCCDDDEEE


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: RSE-C1100T
 US: TMBDL02BC1100T
 GW Code: BAC1100TVx

CONFORMS TO
 UL STD 60950-1
 CERTIFIED TO
 CAN/CSA STD C22.2
 NO. 60950-1


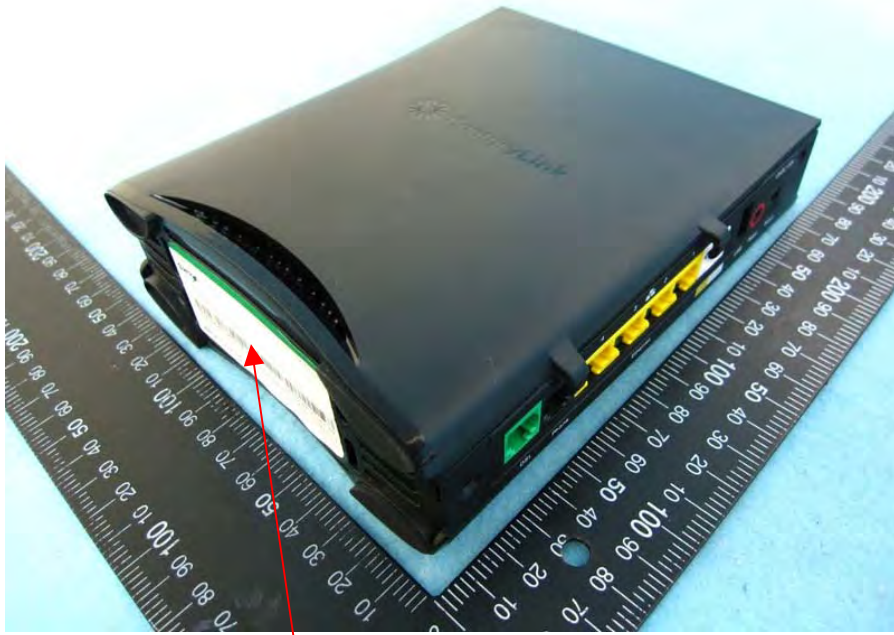
RoHS

Made in Vietnam
Power Rating: 12V  1.5A

For Alpha/Beta Scale: 1:1
GW code/Made in XXX Foxconn printing

Foxconn printing
For MP Scale: 1:1

MATERIAL (SPEC.):		SCALE	FOXCONN			
50#壓花Mylar		1:1				HDN HAI PRECISION IND. CO., LTD CNSBG
FINISH:		SHEET	PART NAME		DESIGNED	
		1/1				2 in 1 housing label
DIM. TOLERANCES		UNIT	MODEL	PART NO.	REV.	
DIM. TOL. D(MAX.)		mm	U46L314.00	500.01776.005		Sunny Wu
0~6 ±0.05 =0.2%L		A4	CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED	
6~30 ±0.10						
30~120 ±0.15		ANGLE TOL.				
120~300 ±0.20		X° ±0.20°				
300~ ±0.25		X° ±0.10°				
CRITICAL DIM. MARK "*"						



Label Here