



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Thomson Telecom Belgium
Applicant Address	Prins Boudewijnlaan 47 2650 Edegem, Belgium
FCC ID	RSE-TG185N
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	No.10-1,Li-hsin Road I,Hsinchu Science Park,Hsinchu 300,Taiwan, R.O.C.

Product Name	TG185n Ethernet to Wi-Fi Converter
Brand Name	THOMSON
Model Name	TG185n
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	May. 17, 2008
Final Test Date	Mar. 09, 2009
Submission Type	Original Equipment



### Statement

Test result included is for the 802.11a and Draft n (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003 and 47 CFR FCC Part 15 Subpart E.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	5
3.5. Table for Test Modes.....	6
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units .....	7
3.8. Table for Parameters of Test Software Setting .....	7
3.9. Test Configurations .....	8
<b>4. TEST RESULT .....</b>	<b>10</b>
4.1. AC Power Line Conducted Emissions Measurement.....	10
4.2. 99% Occupied Bandwidth Measurement .....	14
4.3. Maximum Conducted Output Power Measurement.....	20
4.4. Power Spectral Density Measurement .....	32
4.5. Peak Excursion Measurement.....	38
4.6. Radiated Emissions Measurement .....	44
4.7. Band Edge Emissions Measurement .....	66
4.8. Frequency Stability Measurement .....	70
4.9. Antenna Requirements .....	72
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>73</b>
<b>6. TEST LOCATION.....</b>	<b>75</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>76</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A12</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~ C3</b>



### History of This Test Report

Original Issue Date: Jun. 26, 2009

Report No.: FR851703-07AA


- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

## 1. CERTIFICATE OF COMPLIANCE

Product Name : TG185n Ethernet to Wi-Fi Converter  
Brand Name : THOMSON  
Model Name : TG185n  
Applicant : Thomson Telecom Belgium  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May. 17, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

  
Jordan Hsiao

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	14.43 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.02 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.14 dB
4.5	15.407(a)	Peak Excursion	Complies	1.69 dB
4.6	15.407(b)	Radiated Emissions	Complies	8.87 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.27 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### 802.11a

Items	Description
Product Type	802.11 abgn Router (2Tx,2Rx)
Radio Type	Intentional Transceiver
Power Type	From Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	18.20 MHz
Conducted Output Power	Band 1: 16.77 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### Draft n

Items	Description
Product Type	802.11 abgn Router (2Tx,2Rx)
Radio Type	Intentional Transceiver
Power Type	From Adapter
Modulation	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	MCS8 (20MHz): 18.71 MHz ; MCS8 (40MHz): 36.66 MHz
Conducted Output Power	Band 1: MCS8 (20MHz): 16.98 dBm ; MCS8 (40MHz): 16.80 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Bandwidth**

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
802.11a	X	X	V	X
802.11b	X	X	V	X
802.11g	X	X	V	X
Draft n	X	X	V	V

**Draft n spec**

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

### 3.2. Accessories

Power	Brand	Model	Rating
Adapter	OEM	ADS0128-B050200 Version 3 Compliant with CoC V3	Input: 100-240V, 0.5A, 50-60Hz Output: 5V, 2.0A

### 3.3. Table for Filed Antenna

#### For 5GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A	WNC	XSL-DD	External antenna with PCB type inside	I-PEX	2.83	TX/RX
B	WNC	XSL-DD	External antenna with PCB type inside	I-PEX	2.83	TX/RX

Note: The EUT has two antennas. Ant. A & Ant. B could transmit/receive simultaneously.

### 3.4. Table for Carrier Frequencies

#### Frequency Allocation for 802.11a

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For both 40MHz bandwidth systems, use Channel 38, 46.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz



### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report. The difference between MCS0 & MCS 8 in 11n spec is streaming. The modulation type and waveform are the same so the both test result in RF are the same. It is chosen MCS8 as the representative and recorded in the report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		45Mbps	-	-
Max. Conducted Output Power	MCS8/20MHz	Band 1	13Mbps	36/40/48	A/B/A+B
	MCS8/40MHz	Band 1	27Mbps	38/46	A/B/A+B
	11a/BPSK	Band 1	6Mbps	36/40/48	A/B/A+B
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Power Spectral Density Peak Excursion	MCS8/20MHz	Band 1	13Mbps	36/40/48	A+B
	MCS8/40MHz	Band 1	27Mbps	38/46	A+B
	11a/BPSK	Band 1	6Mbps	36/40/48	A+B
Radiated Emission Below 1GHz	Normal Link		45Mbps	-	-
Radiated Emission Above 1GHz	MCS8/20MHz	Band 1	13Mbps	36/40/48	A+B
	MCS8/40MHz	Band 1	27Mbps	38/46	A+B
	11a/BPSK	Band 1	6Mbps	36/40/48	A+B
Band Edge Emission	MCS8/20MHz	Band 1	13Mbps	36/40/48	A+B
	MCS8/40MHz	Band 1	27Mbps	38/46	A+B
	11a/BPSK	Band 1	6Mbps	36/40/48	A+B
Frequency Stability	Un-modulation		-	40	N/A

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	1200	E2K4965AGNM
Notebook	DELL	D400	E2K24GBRL
Notebook	DELL	M1330	E2KWM3945ABG

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product. The connection method of this EUT could be switched as AP/Bridge/client.

AP & Bridge are considered as Master device.

Client is considered as slave device.

#### Power Parameters of Draft n MCS8 20MHz

Test Software Version	ART_v0_5_b25ALL		
Frequency	5180 MHz	5200 MHz	5240 MHz
Ant. A + Ant. B	16	16	15.5

#### Power Parameters of Draft n MCS8 40MHz

Test Software Version	ART_v0_5_b25ALL	
Frequency	5190 MHz	5230 MHz
Ant. A + Ant. B	17	16.5

#### Power Parameters of IEEE 802.11a

Test Software Version	ART_v0_5_b25ALL		
Frequency	5180 MHz	5200 MHz	5240 MHz
Ant. A + Ant. B	16	16	15.5

During the test, the following programs under WIN XP were executed:

Executed "ART" to control the EUT continuously transmit RF signal.

In all EMC test item, during the test, the following programs under WIN XP were executed:


"Normal link" =

Executed "lxchariot" to link with the remote workstation to receive and transmit data by LAN and WLAN with traffic loading 1451Kbps.


### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

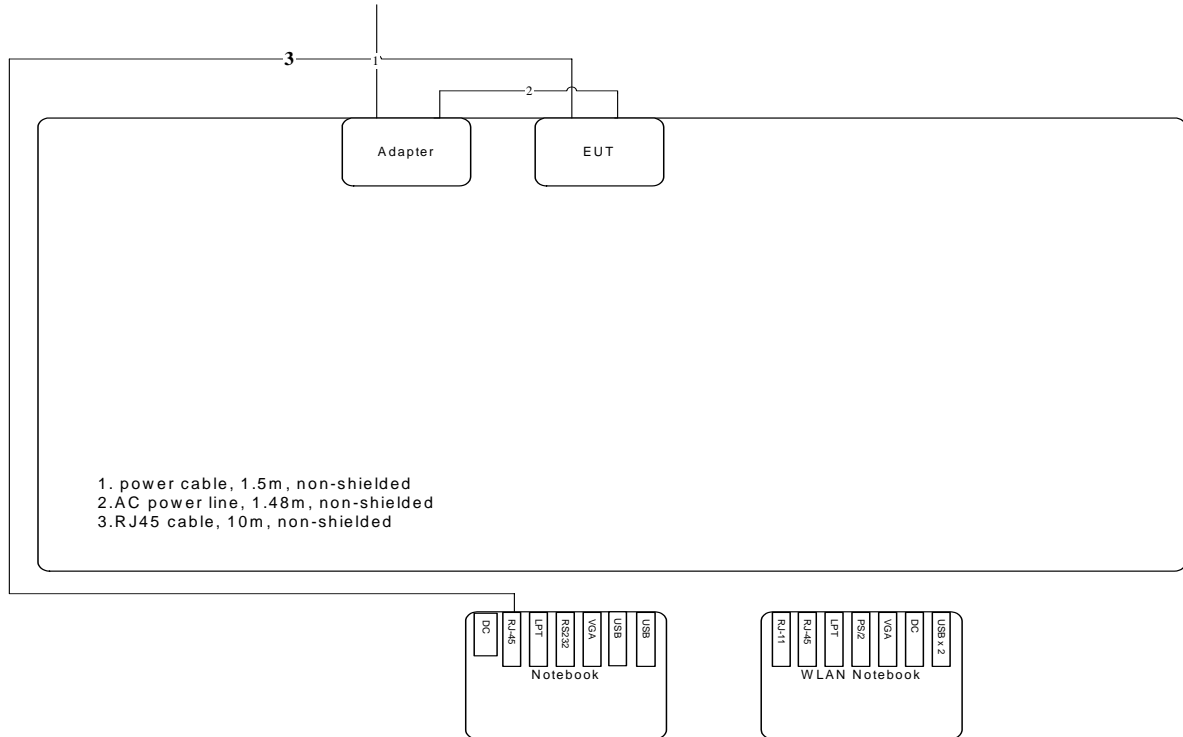

Test Configuration: above 1GHz

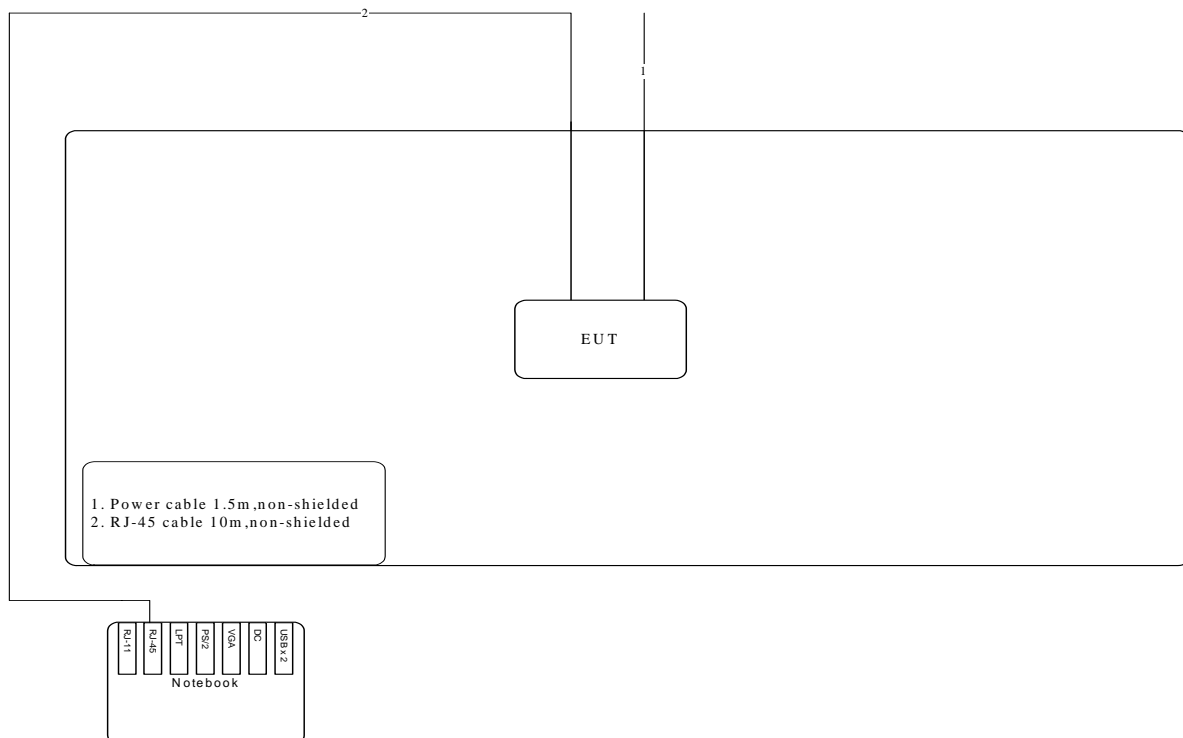

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

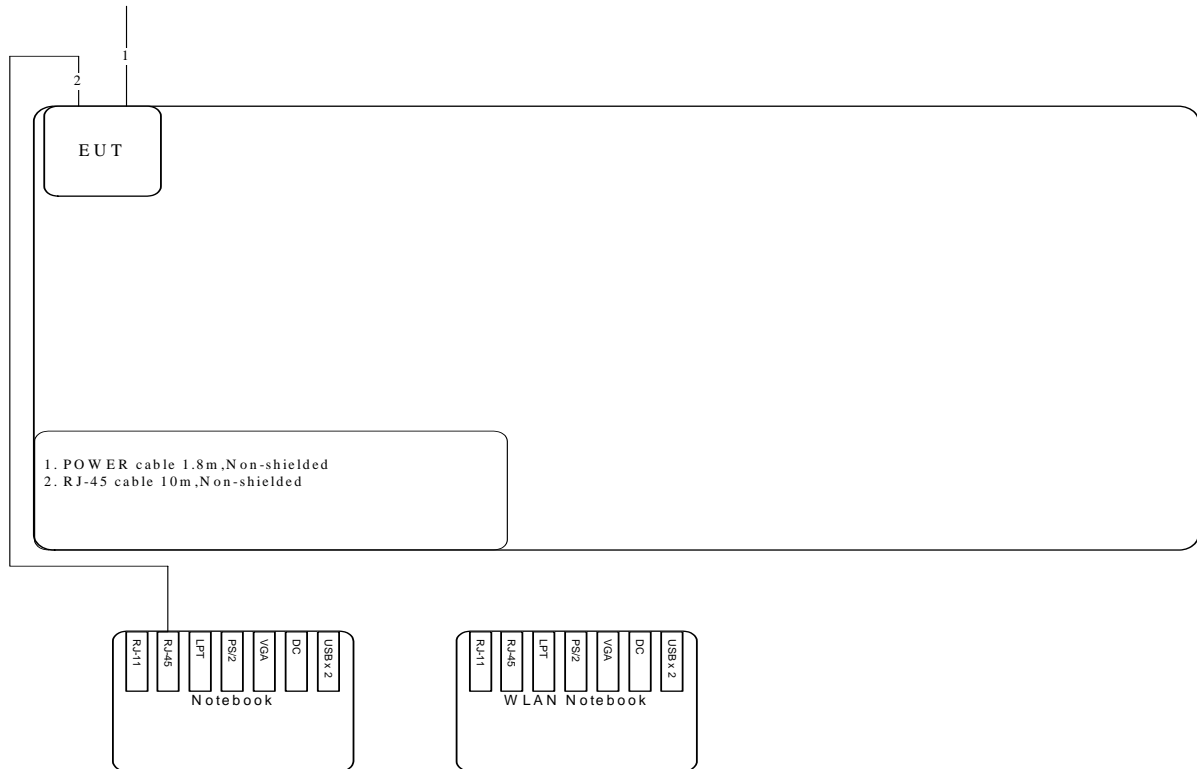

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

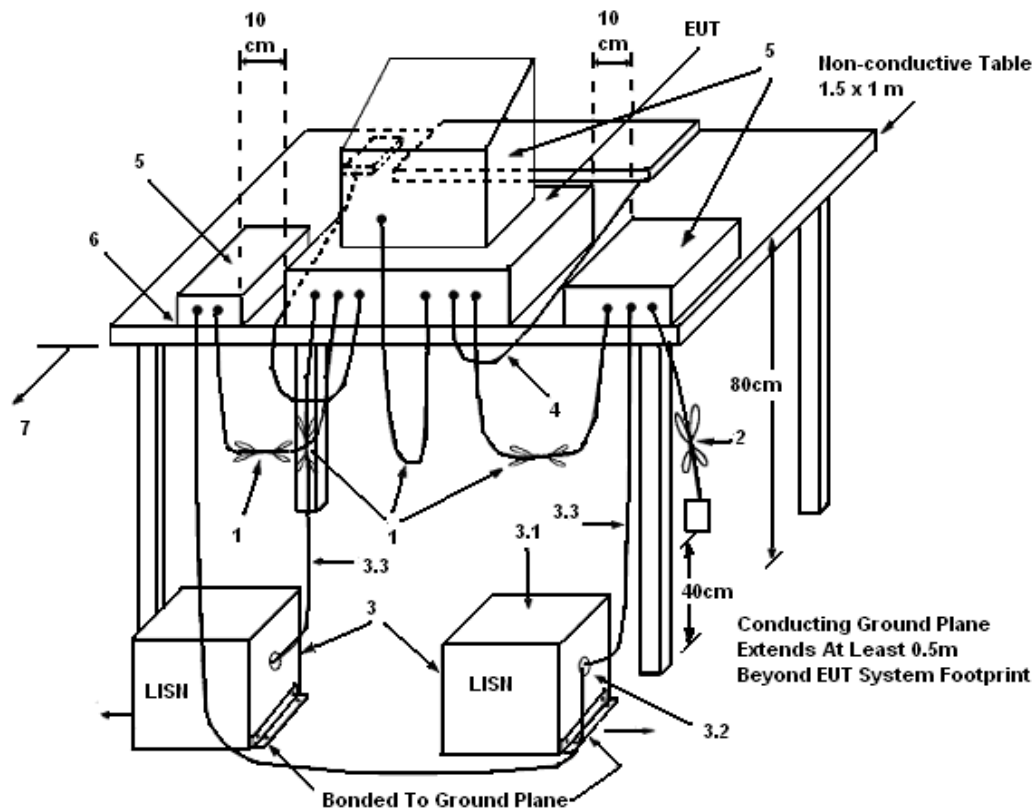

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	62%
Test Engineer	Howar Sung	Phase	Line
Configuration	Normal Link		

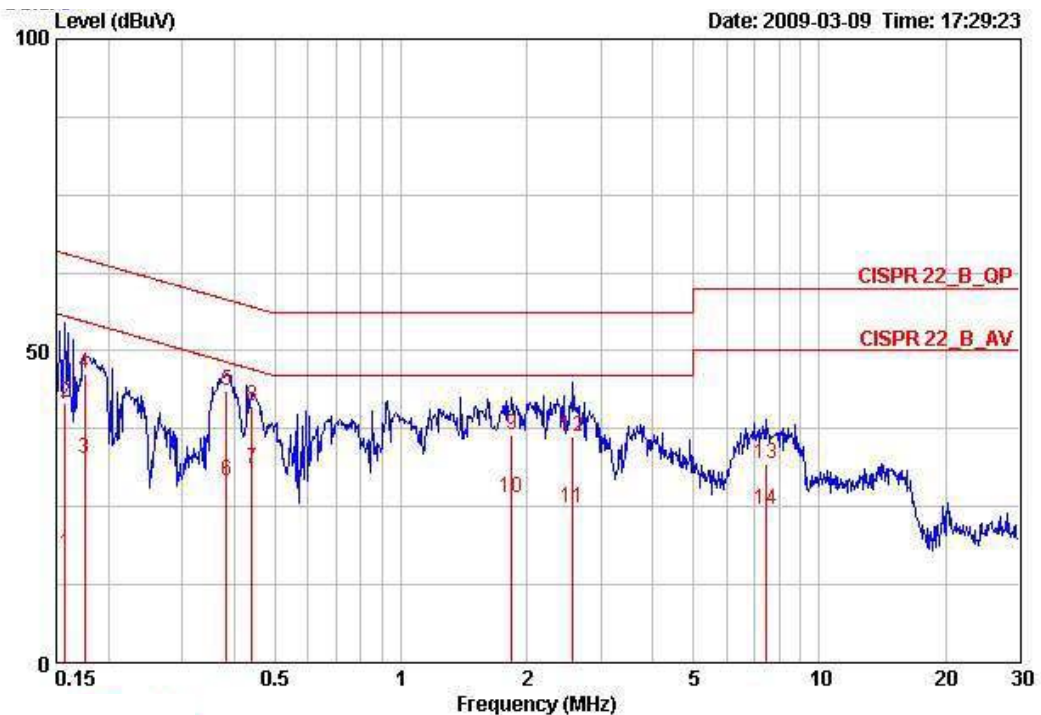

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15733	17.52	-38.08	55.60	17.25	0.07	0.20	AVERAGE
2	0.15733	41.60	-24.00	65.60	41.33	0.07	0.20	QP
3	0.17533	32.72	-21.98	54.70	32.46	0.06	0.20	AVERAGE
4	0.17533	46.32	-18.38	64.70	46.06	0.06	0.20	QP
5	0.38315	43.67	-14.54	58.21	43.44	0.03	0.20	QP
6	0.38315	29.06	-19.15	48.21	28.83	0.03	0.20	AVERAGE
7	0.43974	31.07	-16.00	47.07	30.84	0.03	0.20	AVERAGE
8	0.43974	41.14	-15.93	57.07	40.91	0.03	0.20	QP
9	1.839	36.65	-19.35	56.00	36.43	0.05	0.17	QP
10	1.839	26.34	-19.66	46.00	26.12	0.05	0.17	AVERAGE
11	2.581	24.79	-21.21	46.00	24.52	0.07	0.20	AVERAGE
12	2.581	36.15	-19.85	56.00	35.88	0.07	0.20	QP
13	7.446	31.98	-28.02	60.00	31.32	0.27	0.39	QP
14	7.446	24.46	-25.54	50.00	23.80	0.27	0.39	AVERAGE

Temperature	25°C	Humidity	62%
Test Engineer	Howar Sung	Phase	Neutral
Configuration	Normal Link		

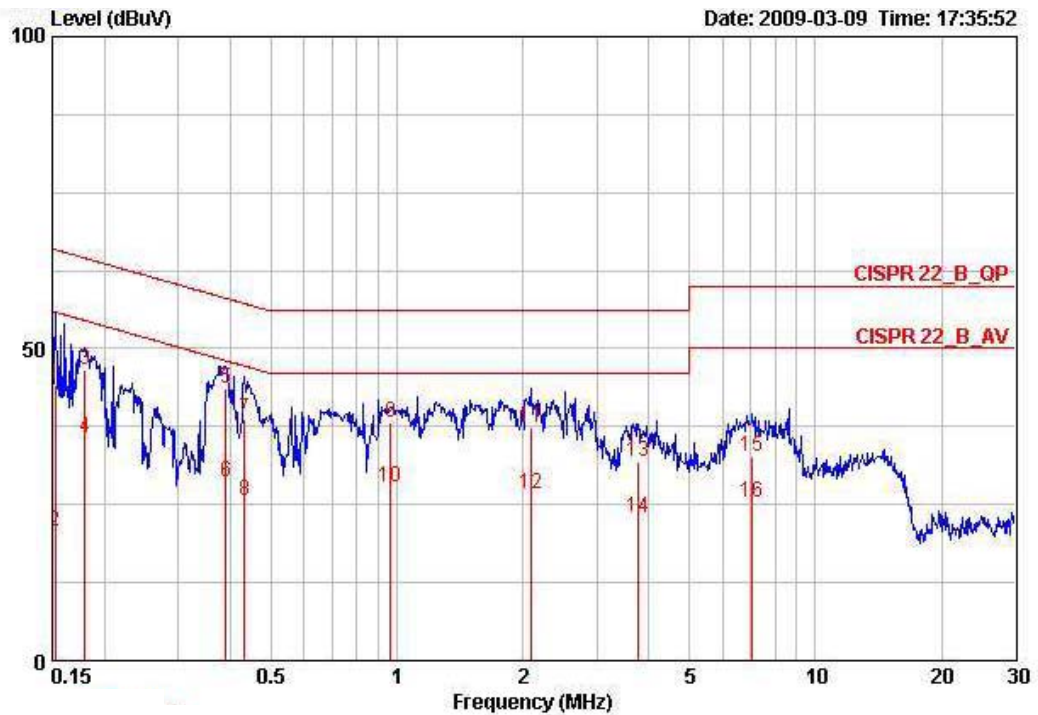

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15240	44.17	-21.69	65.87	43.87	0.10	0.20	QP
2	0.15240	20.60	-35.26	55.87	20.30	0.10	0.20	AVERAGE
3	0.17961	46.67	-17.83	64.50	46.38	0.09	0.20	QP
4	0.17961	35.70	-18.80	54.50	35.41	0.09	0.20	AVERAGE
5	0.38929	43.65	-14.43	58.08	43.38	0.07	0.20	QP
6	0.38929	28.67	-19.41	48.08	28.40	0.07	0.20	AVERAGE
7	0.43281	38.74	-18.46	57.20	38.47	0.07	0.20	QP
8	0.43281	25.61	-21.59	47.20	25.34	0.07	0.20	AVERAGE
9	0.96328	38.16	-17.84	56.00	37.89	0.07	0.20	QP
10	0.96328	27.81	-18.19	46.00	27.54	0.07	0.20	AVERAGE
11	2.088	37.32	-18.68	56.00	37.03	0.09	0.20	QP
12	2.088	26.65	-19.35	46.00	26.36	0.09	0.20	AVERAGE
13	3.779	31.84	-24.16	56.00	31.40	0.14	0.30	QP
14	3.779	22.77	-23.23	46.00	22.33	0.14	0.30	AVERAGE
15	7.062	32.57	-27.43	60.00	31.96	0.29	0.32	QP
16	7.062	25.33	-24.67	50.00	24.72	0.29	0.32	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.



## 4.2. 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

### 4.2.4. Test Setup Layout

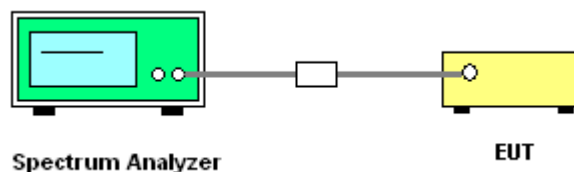

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 99% Occupied Bandwidth

<b>Temperature</b>	26°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n

##### Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	23.46	17.94
40	5200 MHz	23.58	18.07
48	5240 MHz	23.20	17.94

##### Configuration Draft n MCS8 40MHz Ant. A + Ant. B


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	44.10	36.53
46	5230 MHz	45.38	36.53

<b>Temperature</b>	26°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a

##### Configuration IEEE 802.11a Ant. A + Ant. B


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	22.69	16.92
40	5200 MHz	23.33	16.79
48	5240 MHz	22.56	16.92

26 dB & 99% Bandwidth Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 5180 MHz

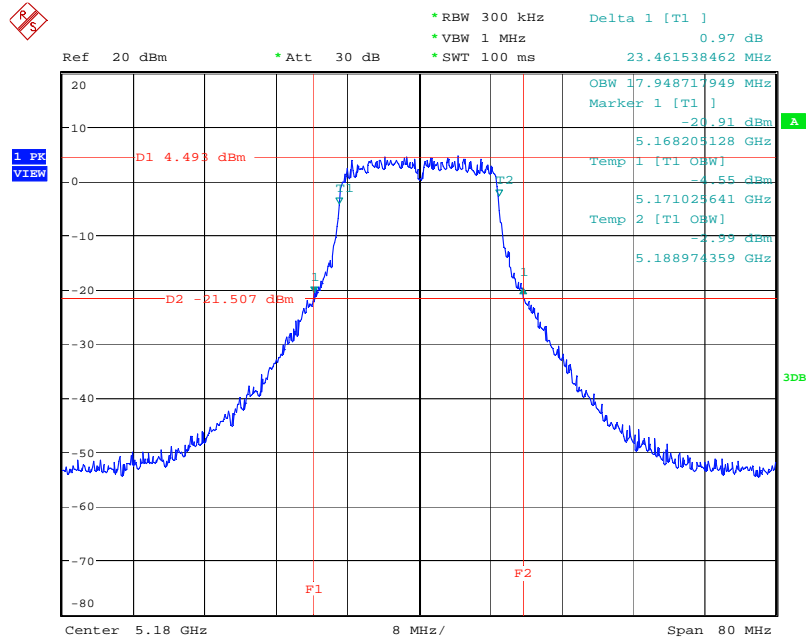


Date: 20.SEP.2008 15:28:29

26 dB & 99% Bandwidth Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 5200 MHz

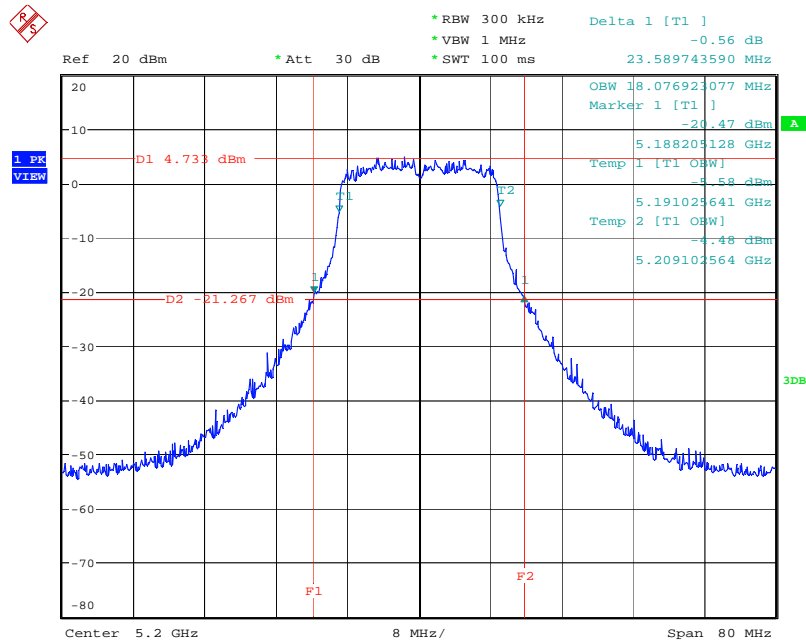


Date: 20.SEP.2008 15:26:46

26 dB & 99% Bandwidth Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 5240 MHz

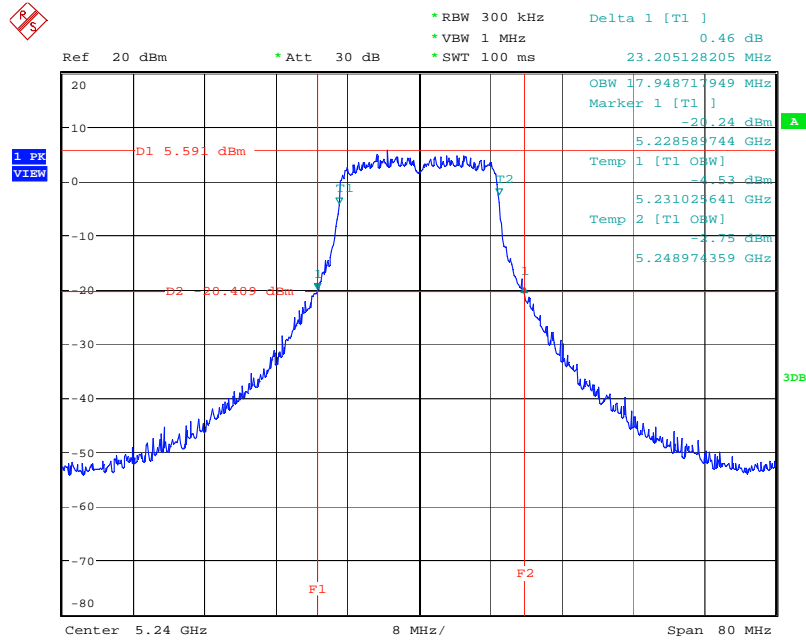


Date: 20.SEP.2008 15:26:11

26 dB & 99% Bandwidth Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 5190 MHz

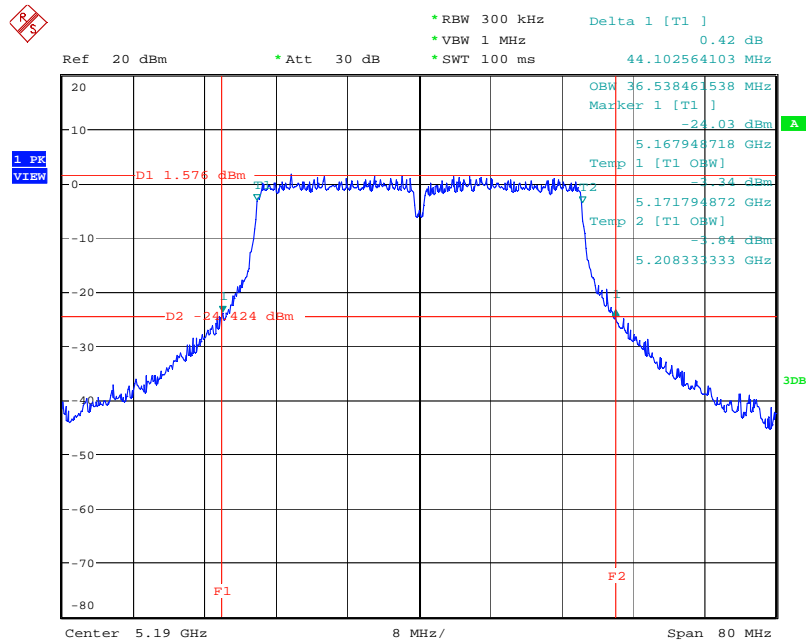


Date: 20.SEP.2008 15:30:54

26 dB & 99% Bandwidth Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 5230 MHz

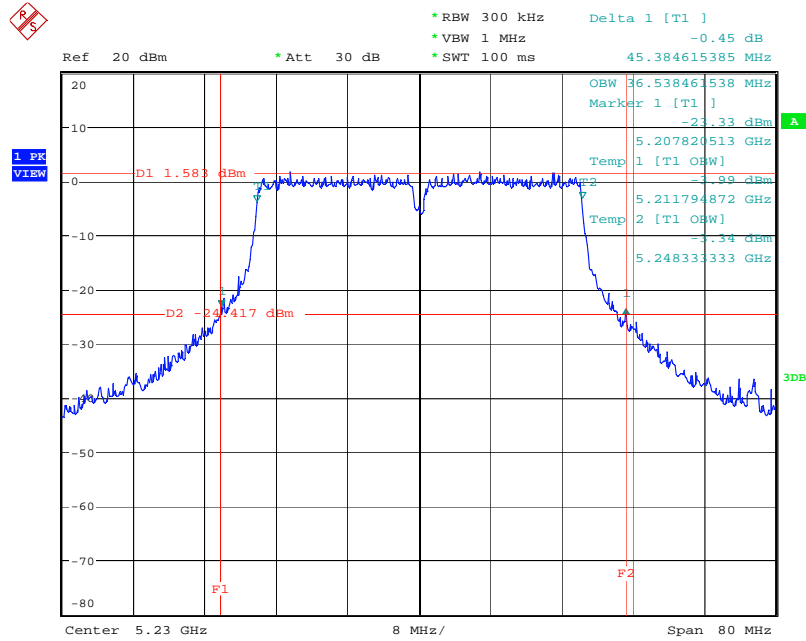


Date: 20.SEP.2008 15:32:26

26 dB & 99% Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5180 MHz

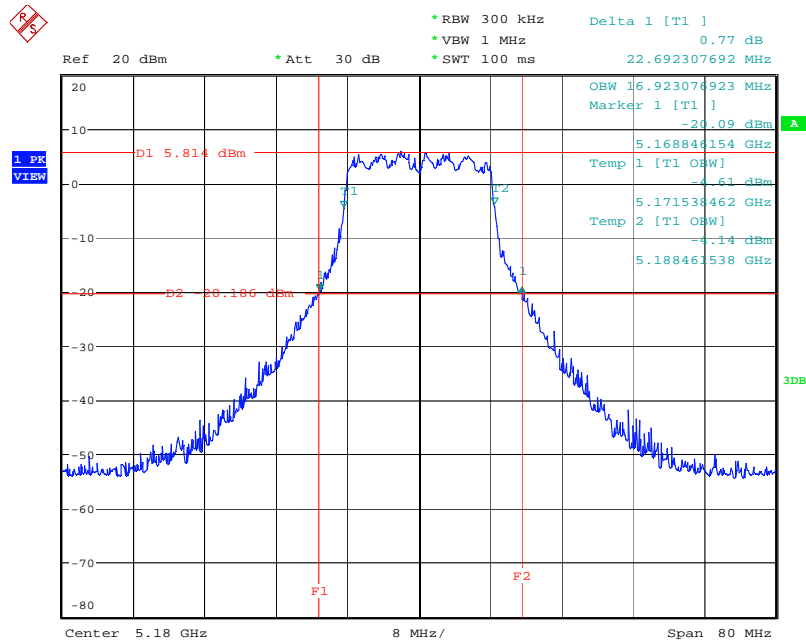


Date: 20.SEP.2008 14:50:52

26 dB & 99% Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5200 MHz

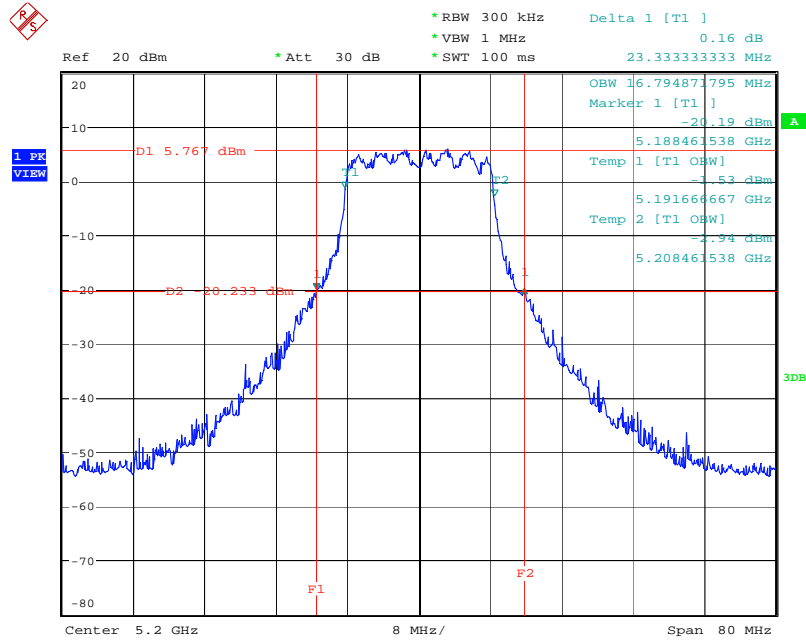

Date: 20.SEP.2008 14:50:20

26 dB & 99% Bandwidth Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5240 MHz

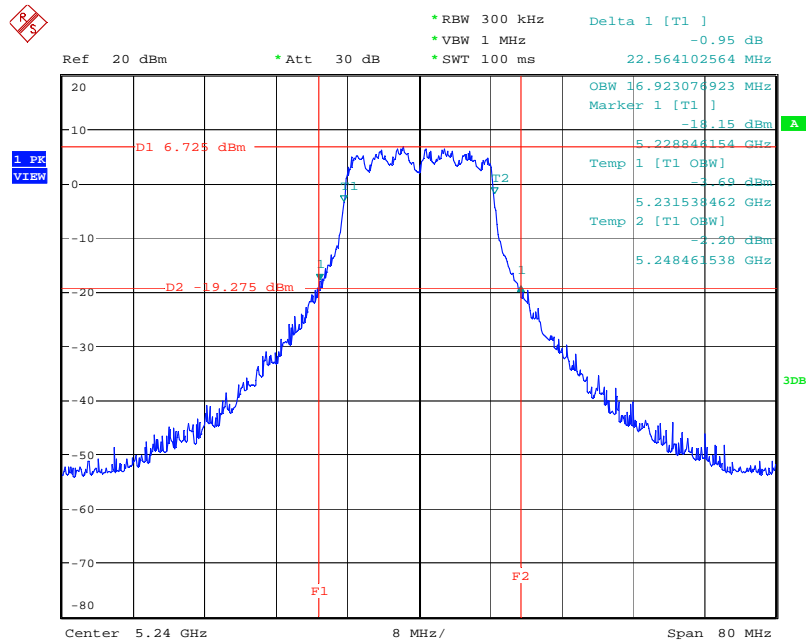

Date: 20.SEP.2008 15:03:25

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or  $4 \text{ dBm} + 10\log B$ , where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	MAX HOLD
Sweep Time	Auto

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with FCC Public Notice DA 02-2138, August 30, 2002.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

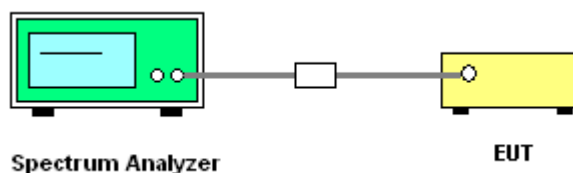

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

<b>Temperature</b>	26°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n

##### Configuration Draft n MCS8 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.81	17.00	Complies
40	5200 MHz	13.35	17.00	Complies
48	5240 MHz	12.66	17.00	Complies

##### Configuration Draft n MCS8 20MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	14.13	17.00	Complies
40	5200 MHz	13.88	17.00	Complies
48	5240 MHz	14.55	17.00	Complies

##### Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	16.98	17.00	Complies
40	5200 MHz	16.63	17.00	Complies
48	5240 MHz	16.72	17.00	Complies



**Configuration Draft n MCS8 40MHz Ant. A**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	13.43	17.00	Complies
46	5230 MHz	13.05	17.00	Complies

**Configuration Draft n MCS8 40MHz Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	13.94	17.00	Complies
46	5230 MHz	14.42	17.00	Complies

**Configuration Draft n MCS8 40MHz Ant. A + Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	16.70	17.00	Complies
46	5230 MHz	16.80	17.00	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a

**Configuration IEEE 802.11a Ant. A**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.35	17.00	Complies
40	5200 MHz	13.02	17.00	Complies
48	5240 MHz	12.94	17.00	Complies


**Configuration IEEE 802.11a Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.69	17.00	Complies
40	5200 MHz	13.90	17.00	Complies
48	5240 MHz	14.45	17.00	Complies

**Configuration IEEE 802.11a Ant. A + Ant. B**


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	16.53	17.00	Complies
40	5200 MHz	16.49	17.00	Complies
48	5240 MHz	16.77	17.00	Complies

### Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. A / 5180 MHz

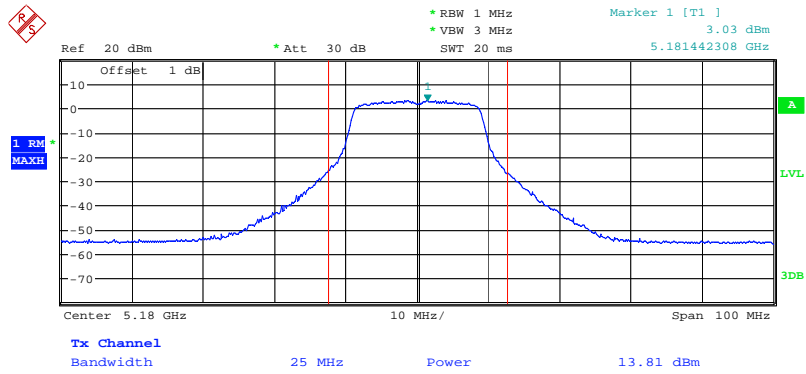


Date: 20.SEP.2008 12:53:33

### Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. A / 5200 MHz

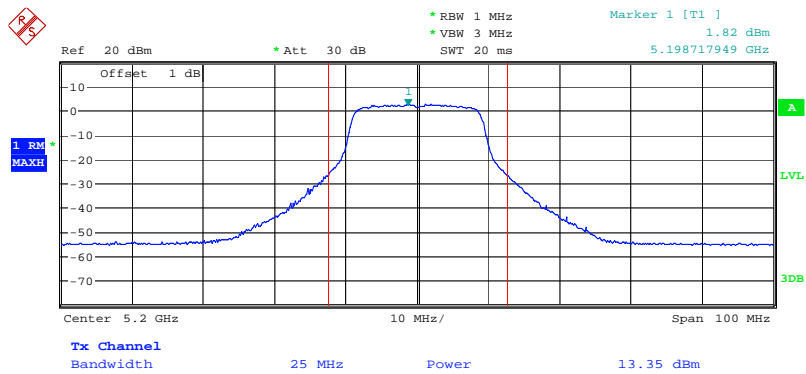


Date: 20.SEP.2008 12:52:19

### Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. A / 5240 MHz

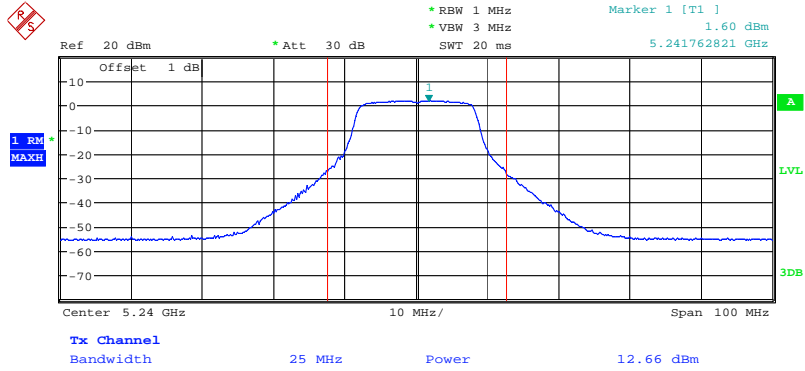


Date: 20.SEP.2008 12:44:12

### Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B / 5180 MHz

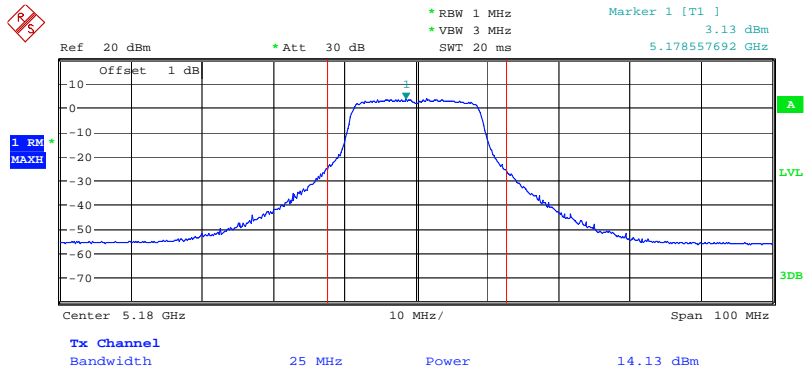


Date: 20.SEP.2008 12:54:28

### Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B / 5200 MHz

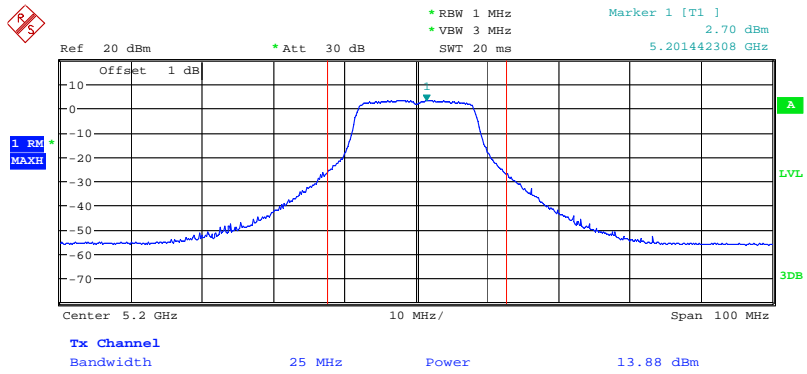


Date: 20.SEP.2008 12:45:41

### Conducted Output Power Plot on Configuration Draft n MCS8 20MHz Ant. B / 5240 MHz

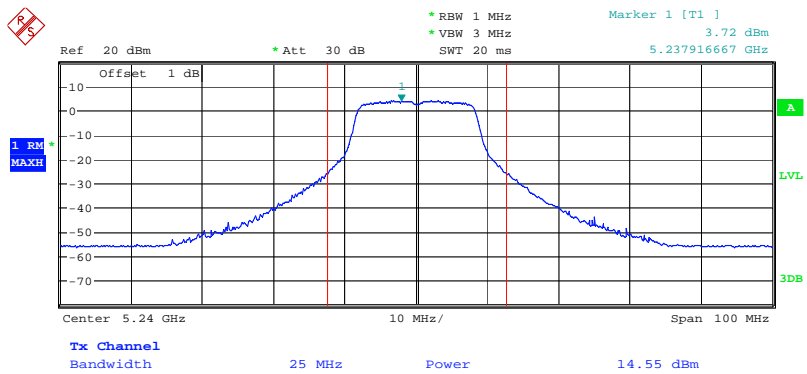


Date: 20.SEP.2008 12:44:51

### Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. A / 5190 MHz

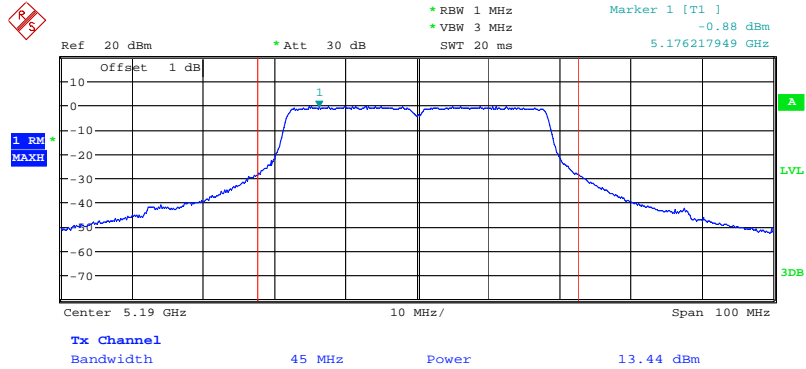


Date: 20.SEP.2008 12:58:40

### Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. A / 5230 MHz

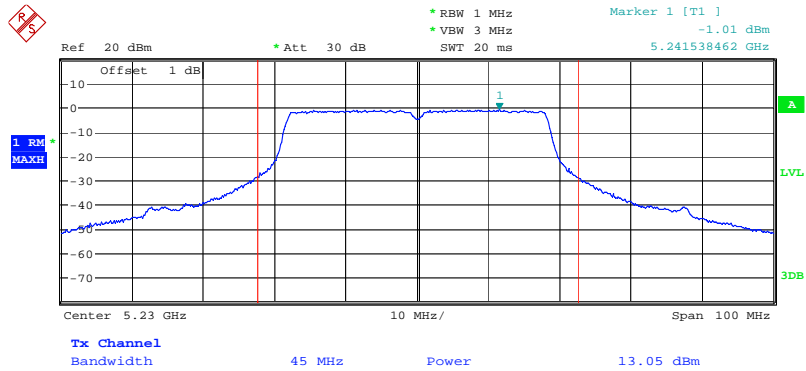


Date: 20.SEP.2008 13:01:50

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B / 5190 MHz

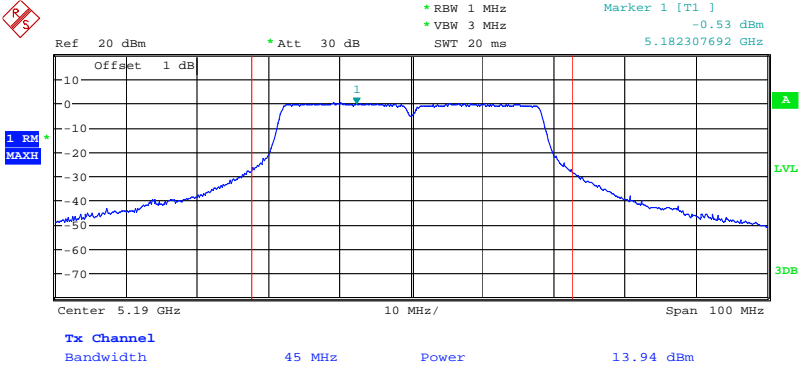


Date: 20.SEP.2008 12:59:26

Conducted Output Power Plot on Configuration Draft n MCS8 40MHz Ant. B / 5230 MHz

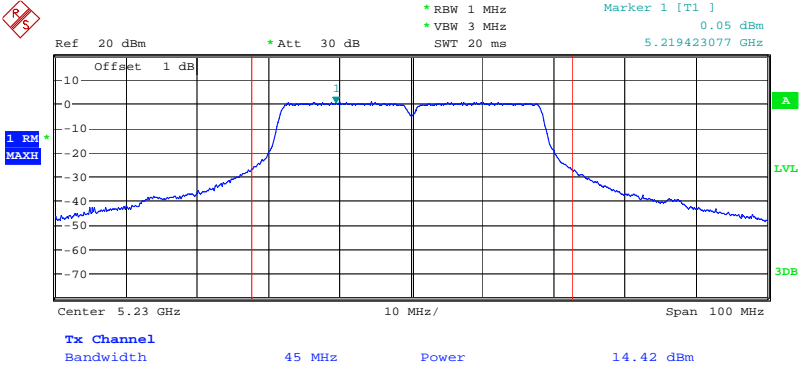


Date: 20.SEP.2008 13:01:16

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5180 MHz

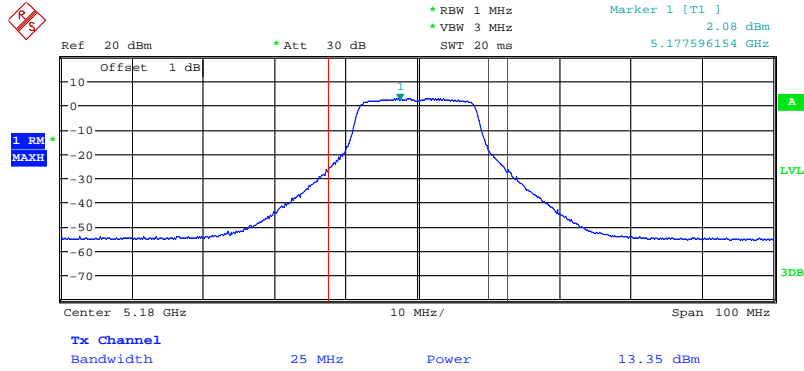

Date: 20.SEP.2008 11:19:17


### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5200 MHz

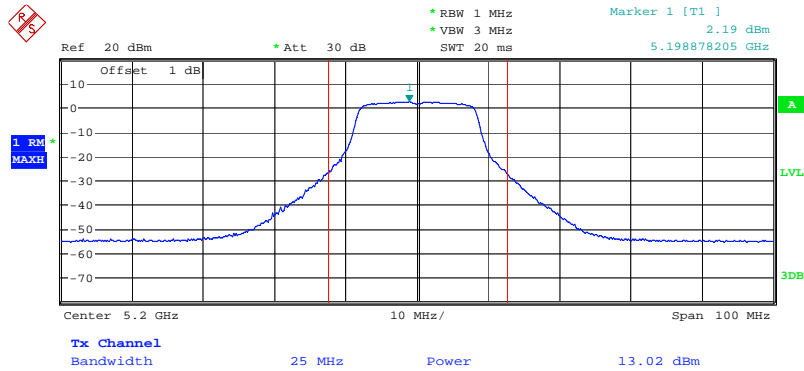

Date: 20.SEP.2008 11:22:18




**Conducted Output Power Plot on Configuration IEEE 802.11a Ant. A / 5240 MHz**

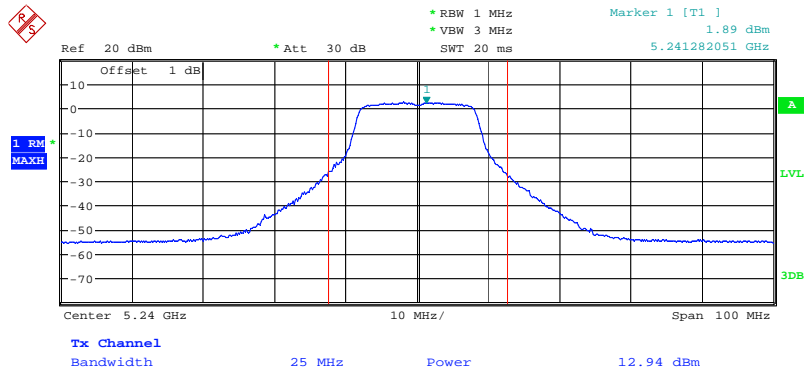


Date: 20.SEP.2008 11:25:30

**Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5180 MHz**

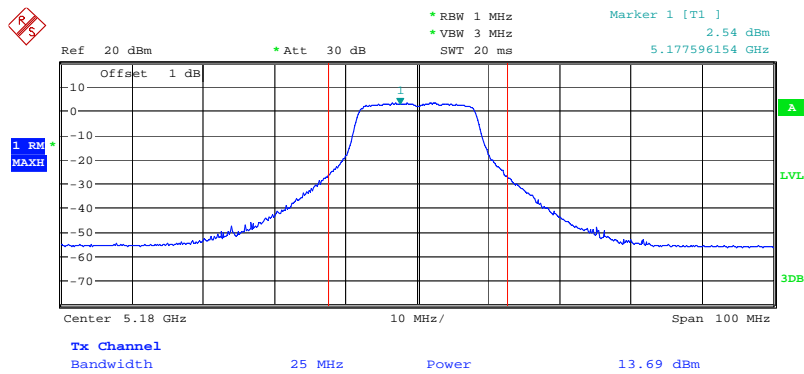


Date: 20.SEP.2008 11:18:02

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5200 MHz

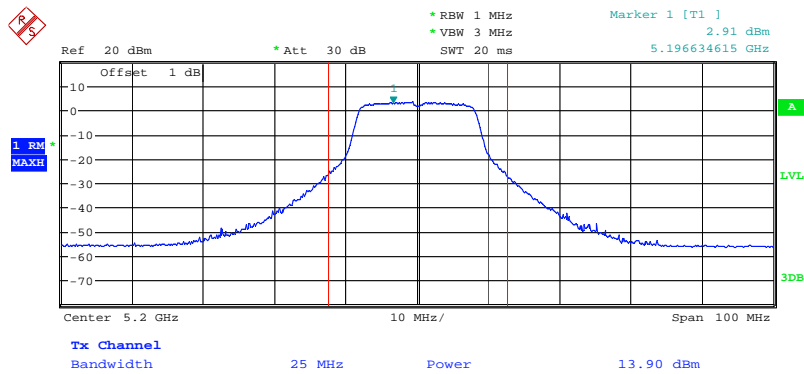

Date: 20.SEP.2008 11:21:14

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. B / 5240 MHz

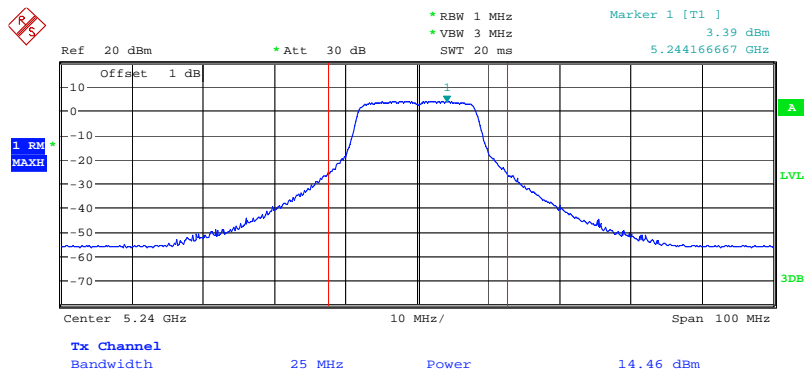

Date: 20.SEP.2008 11:26:10

#### 4.4. Power Spectral Density Measurement

##### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5150-5250	4
5250-5350	11
5470-5725	11

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to RMS, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

##### 4.4.4. Test Setup Layout

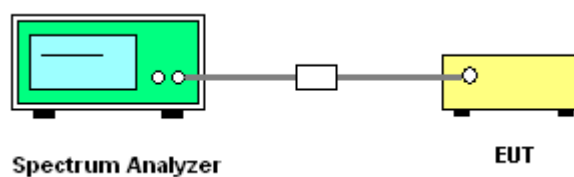

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

<b>Temperature</b>	26°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n

##### Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	3.17	4.00	Complies
40	5200 MHz	3.86	4.00	Complies
48	5240 MHz	3.61	4.00	Complies

##### Configuration Draft n MCS8 40MHz Ant. A + Ant. B


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	0.61	4.00	Complies
46	5230 MHz	-0.03	4.00	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a

##### Configuration IEEE 802.11a Ant. A + Ant. B


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	3.55	4.00	Complies
40	5200 MHz	3.16	4.00	Complies
48	5240 MHz	3.64	4.00	Complies

**Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 5180 MHz**

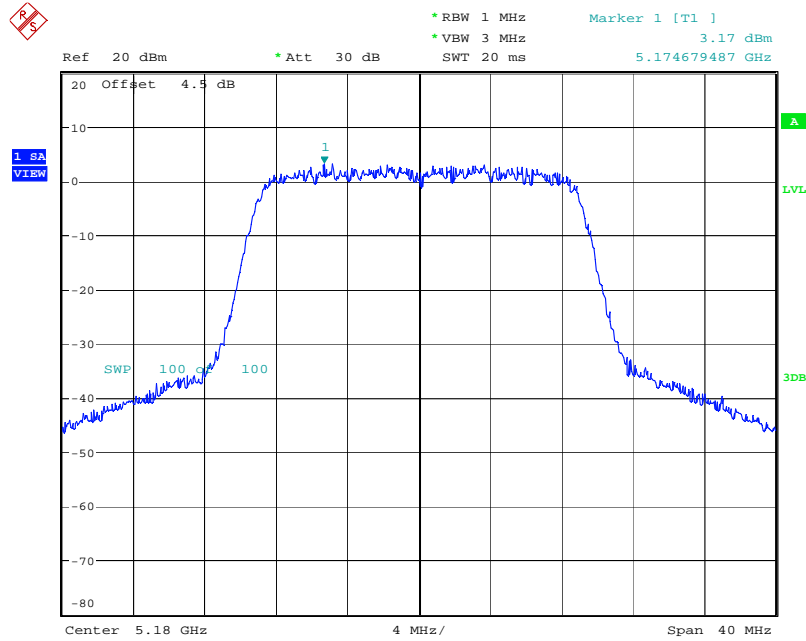


Date: 20.SEP.2008 15:28:36

**Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 5200 MHz**

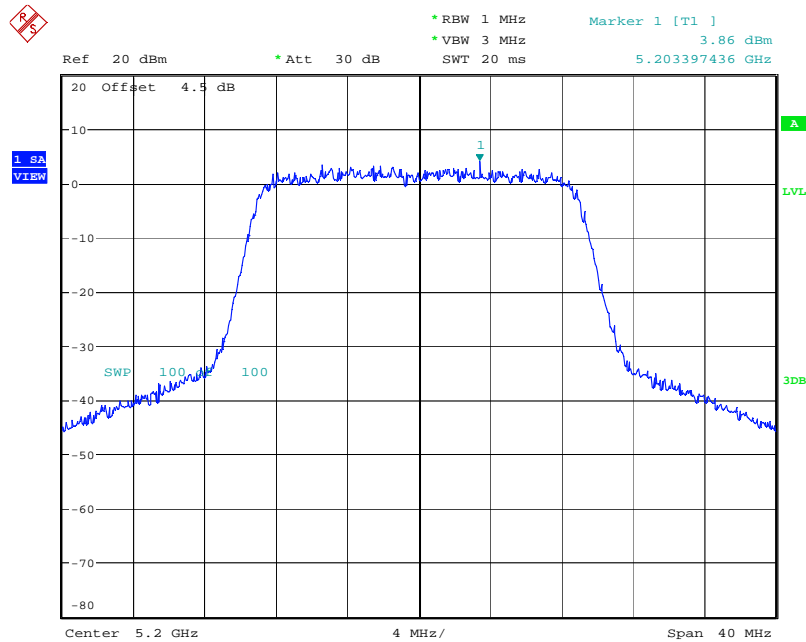


Date: 20.SEP.2008 15:26:53

**Power Density Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 5240 MHz**

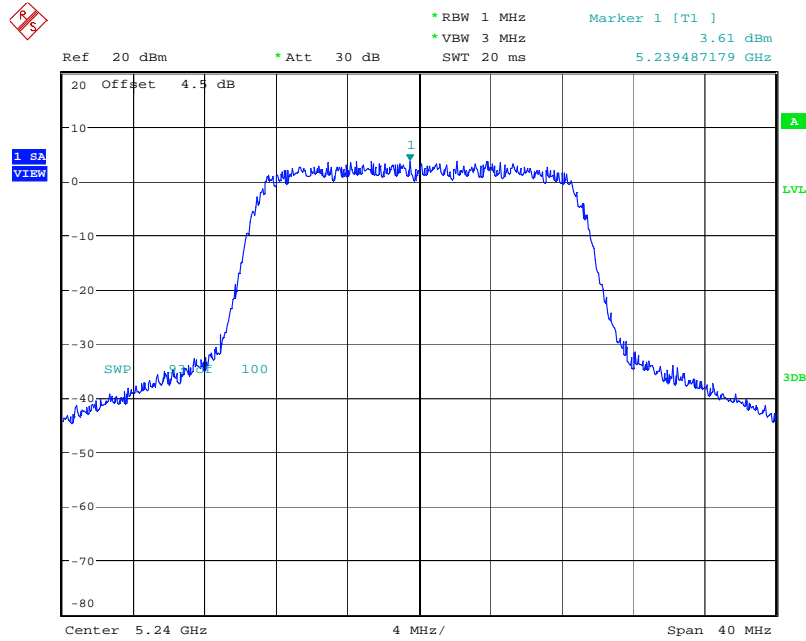


Date: 20.SEP.2008 15:26:18

**Power Density Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 5190 MHz**

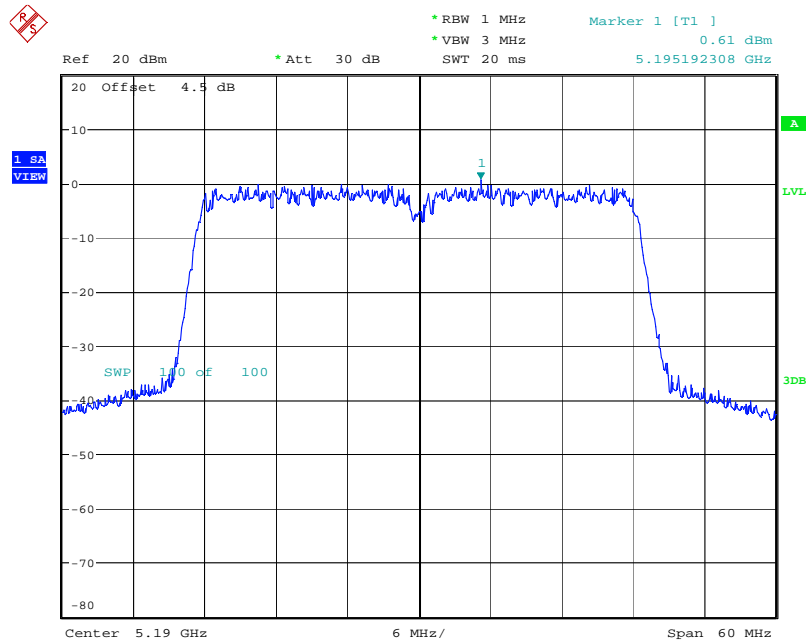


Date: 20.SEP.2008 15:31:01

**Power Density Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 5230 MHz**

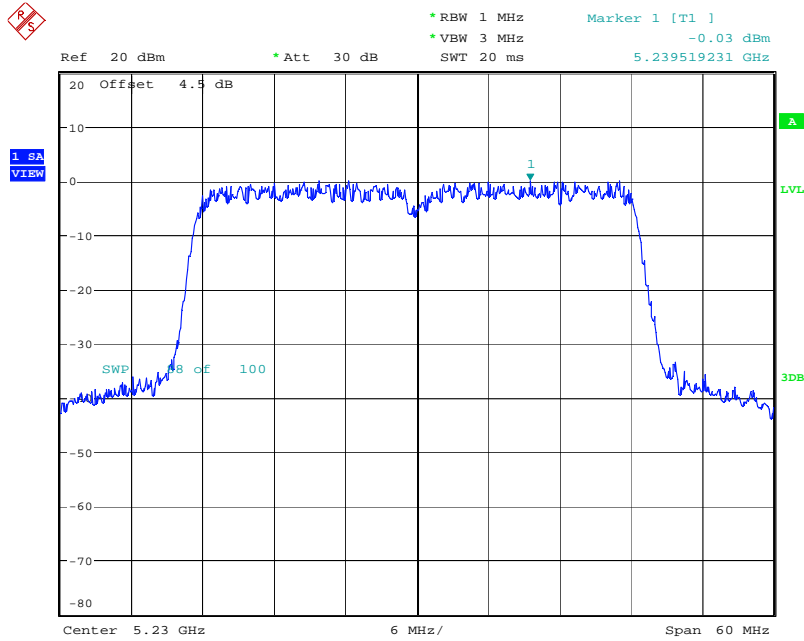


Date: 20.SEP.2008 15:32:33

**Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5180 MHz**

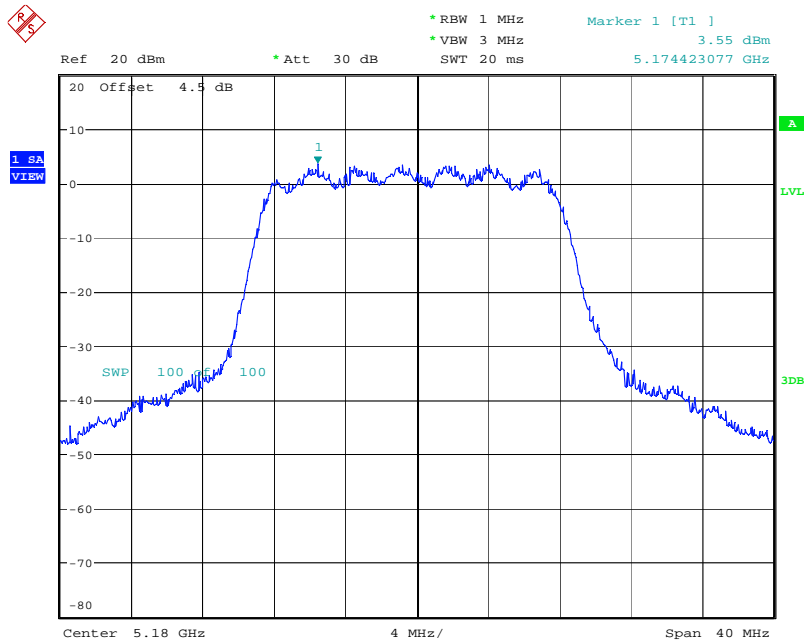


Date: 20.SEP.2008 14:50:59

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5200 MHz

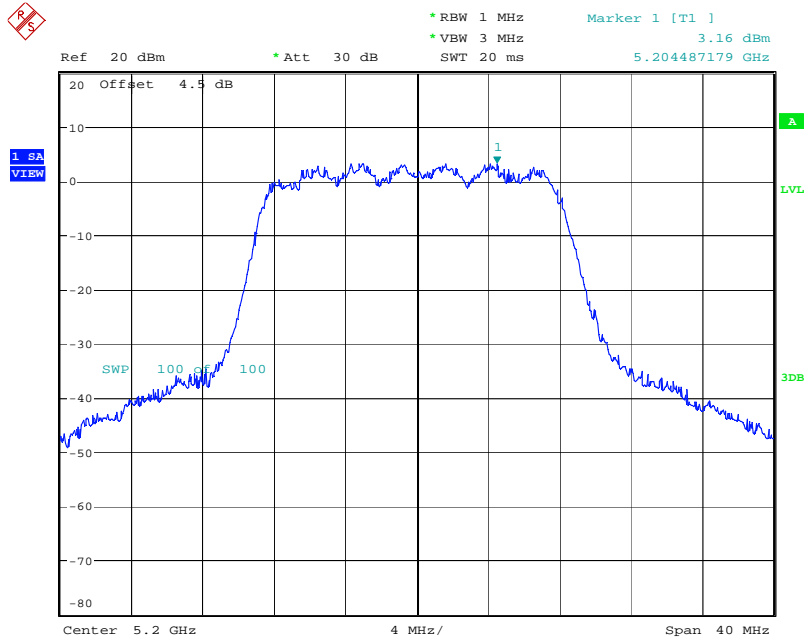

Date: 20.SEP.2008 14:50:27

Power Density Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5240 MHz

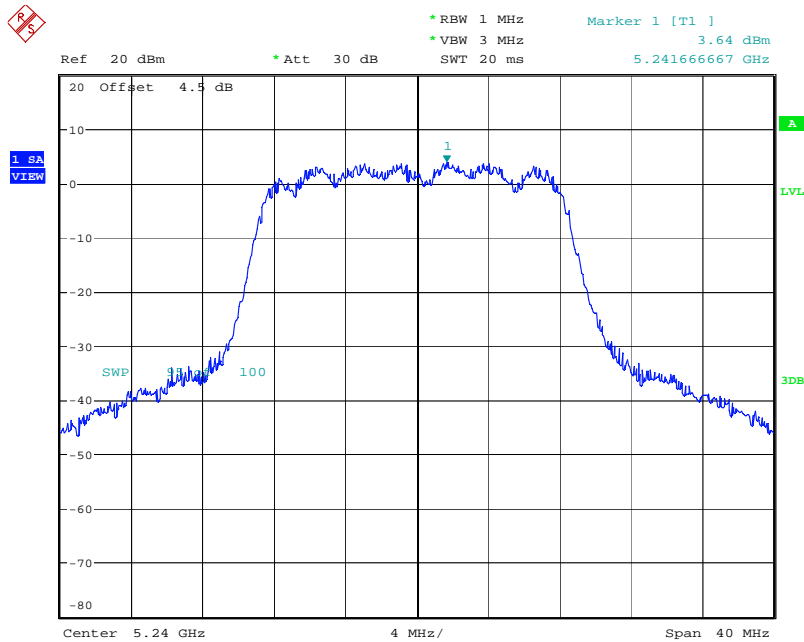

Date: 20.SEP.2008 15:03:32



## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be  $\leq 13$  dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW  $\geq 3$  MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to "free run". Set RBW = 1 MHz. Set VBW  $\geq 1/T$  (Draft n VBW = 300kHz  $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum)  $< 0.5$  RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

### 4.5.4. Test Setup Layout

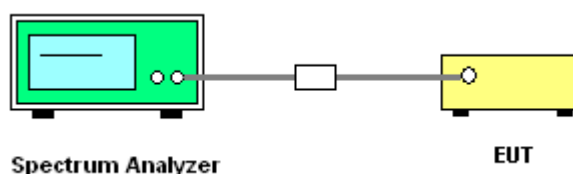

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Peak Excursion

<b>Temperature</b>	26°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n

##### Configuration Draft n MCS8 20MHz Ant. A + Ant. B

Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	10.56	13	Complies
40	5200 MHz	9.86	13	Complies
48	5240 MHz	10.28	13	Complies

##### Configuration Draft n MCS8 40MHz Ant. A + Ant. B


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
38	5190 MHz	10.84	13	Complies
46	5230 MHz	11.31	13	Complies

<b>Temperature</b>	26°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a

##### Configuration IEEE 802.11a Ant. A + Ant. B


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	9.82	13	Complies
40	5200 MHz	9.97	13	Complies
48	5240 MHz	9.58	13	Complies

Peak Excursion Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 5180 MHz

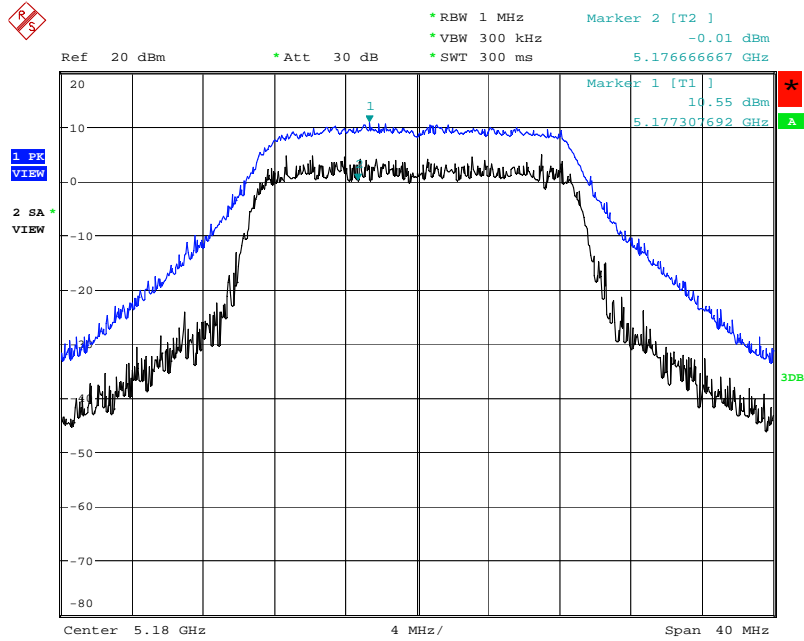


Date: 20.SEP.2008 15:29:36

Peak Excursion Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 5200 MHz

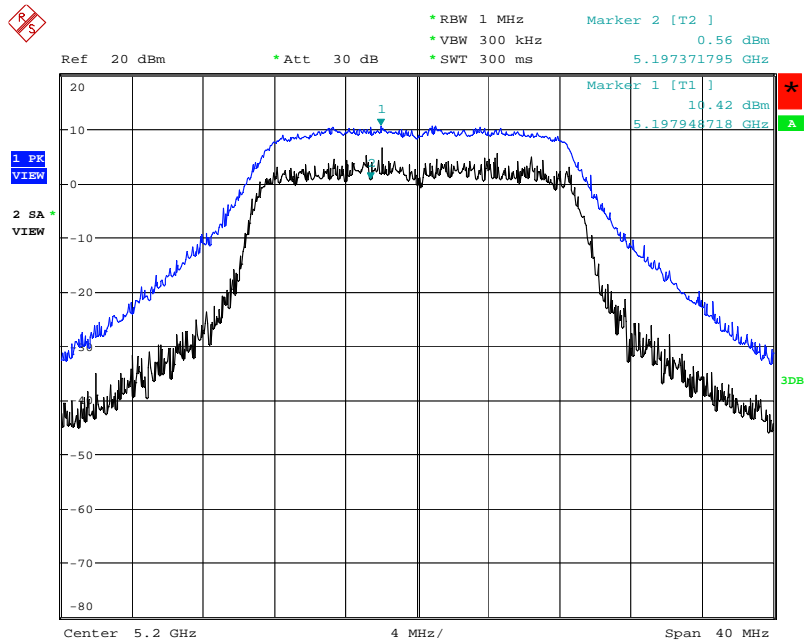


Date: 20.SEP.2008 15:27:33

Peak Excursion Plot on Configuration Drafft n MCS8 20MHz Ant. A + Ant. B / 5240 MHz

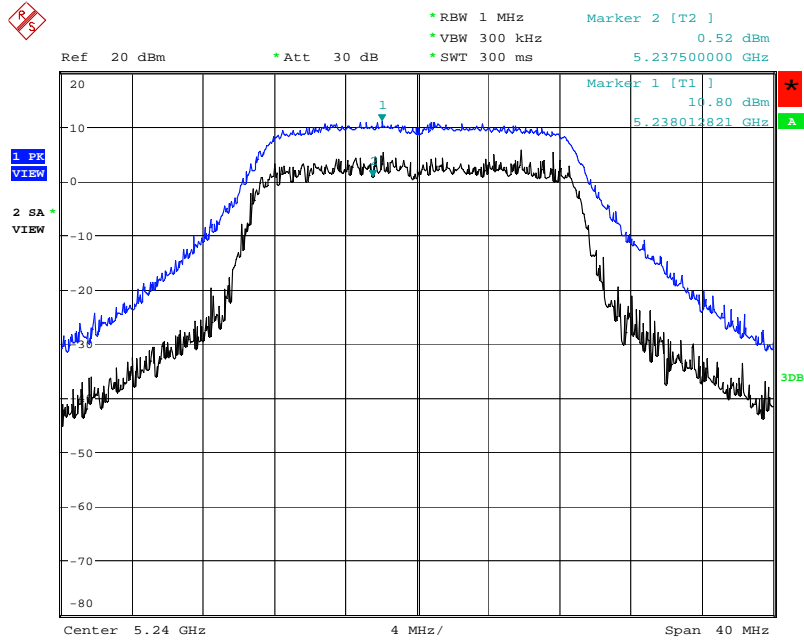


Date: 20.SEP.2008 15:25:29

Peak Excursion Plot on Configuration Drafft n MCS8 40MHz Ant. A + Ant. B / 5190 MHz

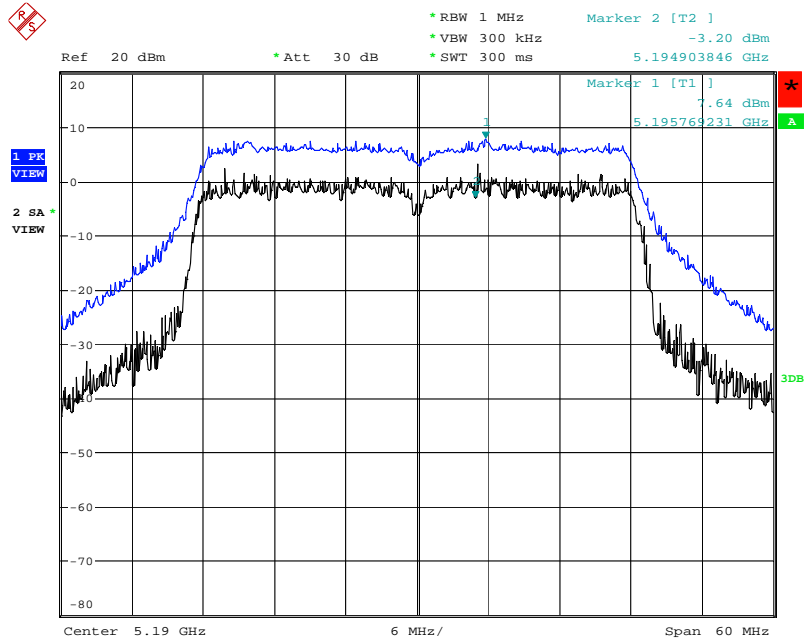


Date: 20.SEP.2008 15:31:39

**Peak Excursion Plot on Configuration Draft n MCS8 40MHz Ant. A + Ant. B / 5230 MHz**

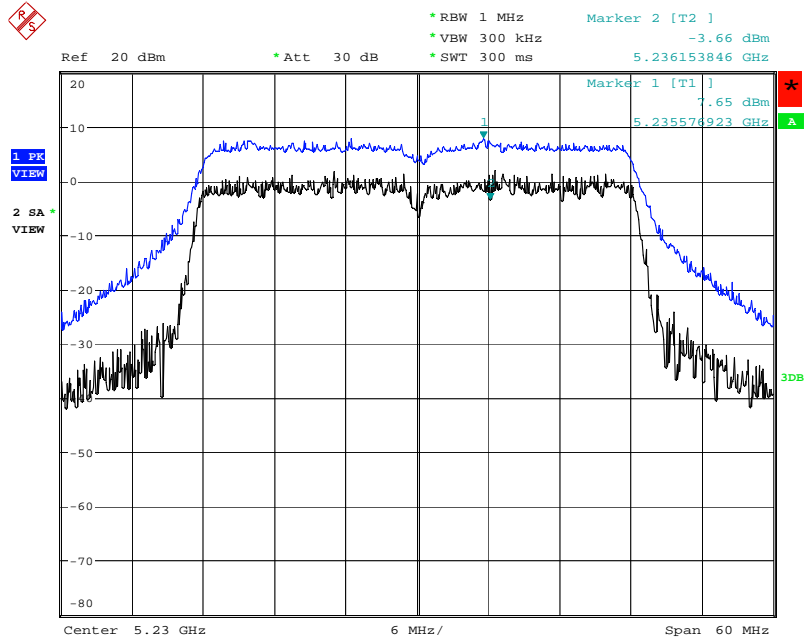


Date: 20.SEP.2008 15:32:58

**Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5180 MHz**

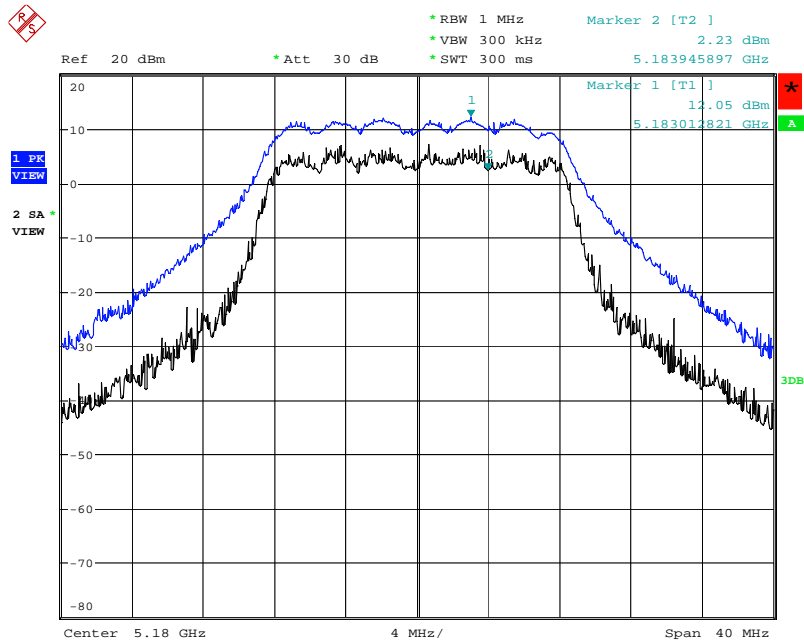


Date: 20.SEP.2008 14:38:15

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5200 MHz

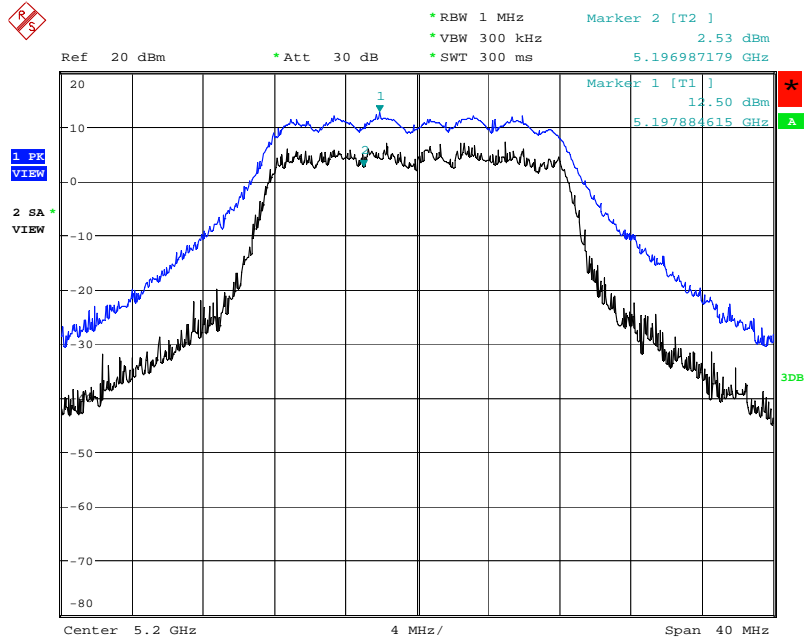

Date: 20.SEP.2008 14:42:51

Peak Excursion Plot on Configuration IEEE 802.11a Ant. A + Ant. B / 5240 MHz

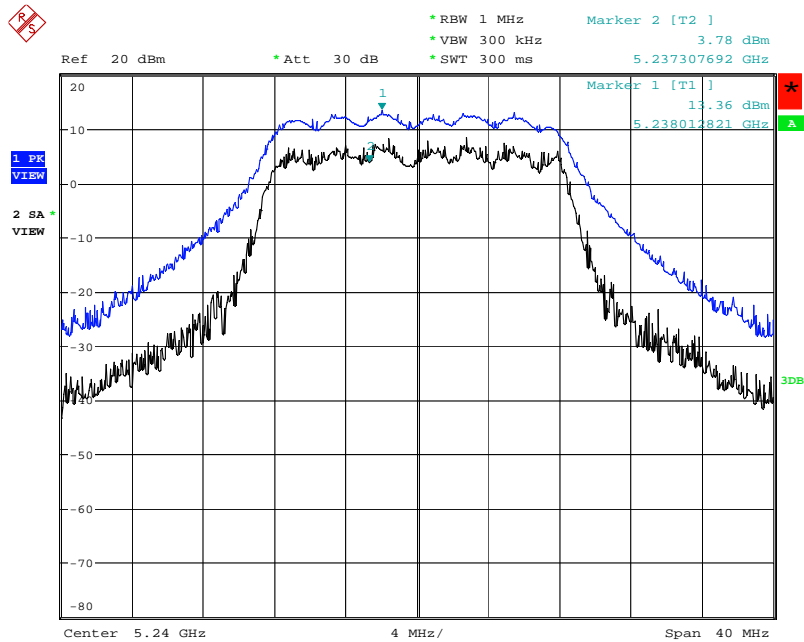

Date: 20.SEP.2008 14:52:18

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, in case the emission falls within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP


#### 4.6.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.




#### 4.6.4. Test Setup Layout

For radiated emissions below 30MHz

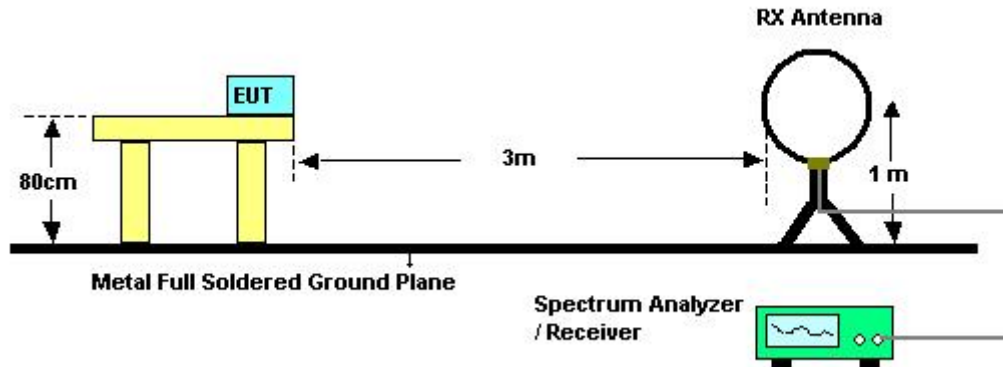

For radiated emissions above 30MHz

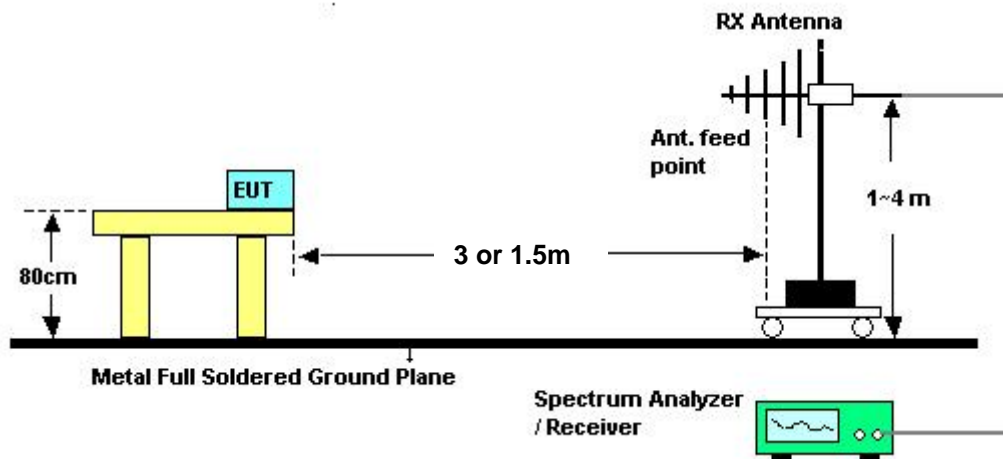

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	25°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	Normal Link

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	54%
Test Engineer	Allen Liu	Configurations	Normal Link

Horizontal

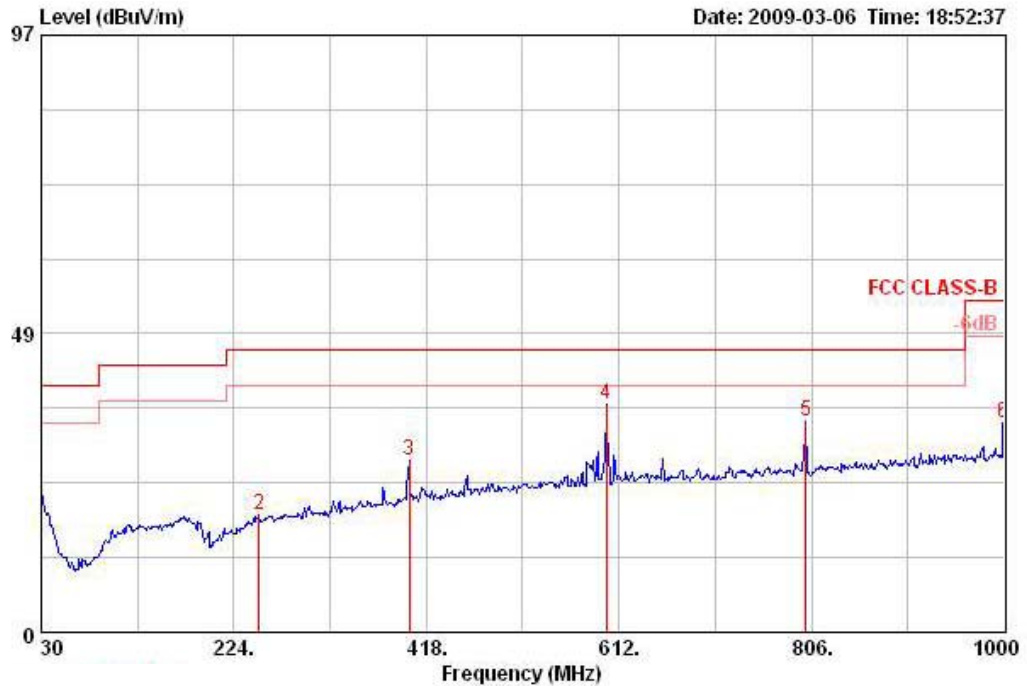

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	30.000	22.64	-17.36	40.00	31.18	18.76	27.80	0.50	Peak	HORIZONTAL	0	400
2	249.220	19.14	-26.86	46.00	31.55	12.70	27.00	1.90	Peak	HORIZONTAL	0	400
3	400.540	27.92	-18.08	46.00	37.14	16.08	27.61	2.31	Peak	HORIZONTAL	0	400
4	599.390	36.94	-9.06	46.00	43.38	18.76	28.10	2.90	Peak	HORIZONTAL	0	400
5	800.180	34.32	-11.68	46.00	38.85	19.77	27.60	3.30	Peak	HORIZONTAL	0	400
6	1000.000	34.01	-19.99	54.00	36.02	21.29	27.00	3.70	Peak	HORIZONTAL	0	400

**Vertical**

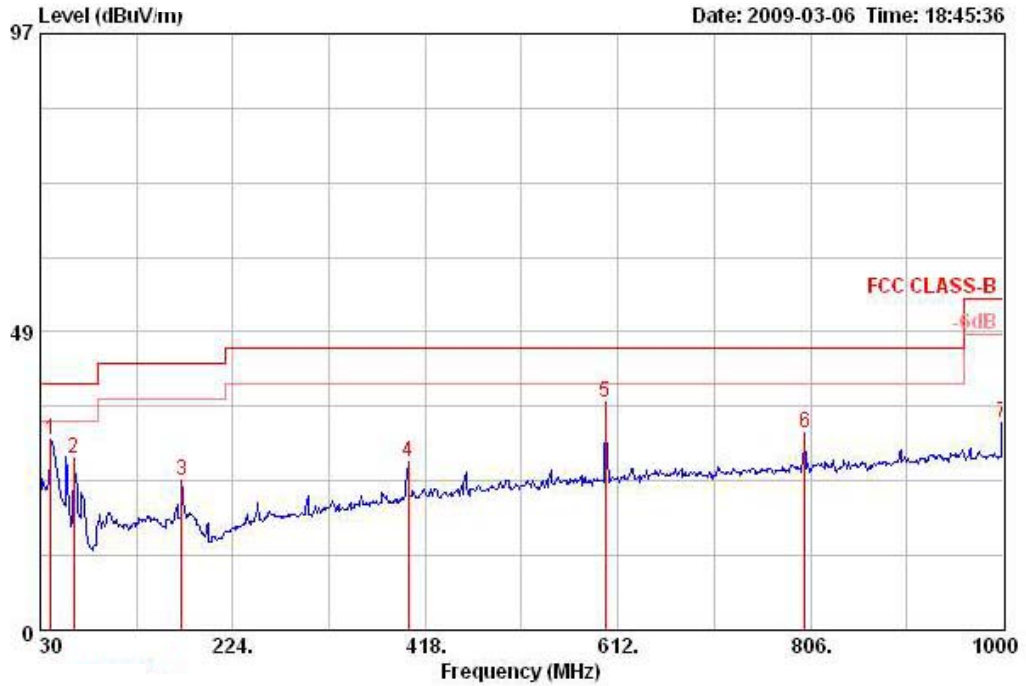

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	40.670	30.93	-9.07	40.00	45.48	12.55	27.80	0.70	Peak	VERTICAL	0	400
2	63.950	28.00	-12.00	40.00	48.15	6.72	27.74	0.88	Peak	VERTICAL	0	400
3	172.590	24.31	-19.19	43.50	37.00	12.97	27.23	1.56	Peak	VERTICAL	0	400
4	400.540	27.47	-18.53	46.00	36.69	16.08	27.61	2.31	Peak	VERTICAL	0	400
5	599.390	37.13	-8.87	46.00	43.57	18.76	28.10	2.90	Peak	VERTICAL	0	400
6	800.180	32.00	-14.00	46.00	36.53	19.77	27.60	3.30	Peak	VERTICAL	0	400
7	1000.000	33.85	-20.15	54.00	35.86	21.29	27.00	3.70	Peak	VERTICAL	0	400

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)


Temperature	18°C	Humidity	63%
Test Engineer	Allen Liu	Configurations	Draft n MCS8 20MHz Ch 36 / Ant. A + Ant. B

Horizontal

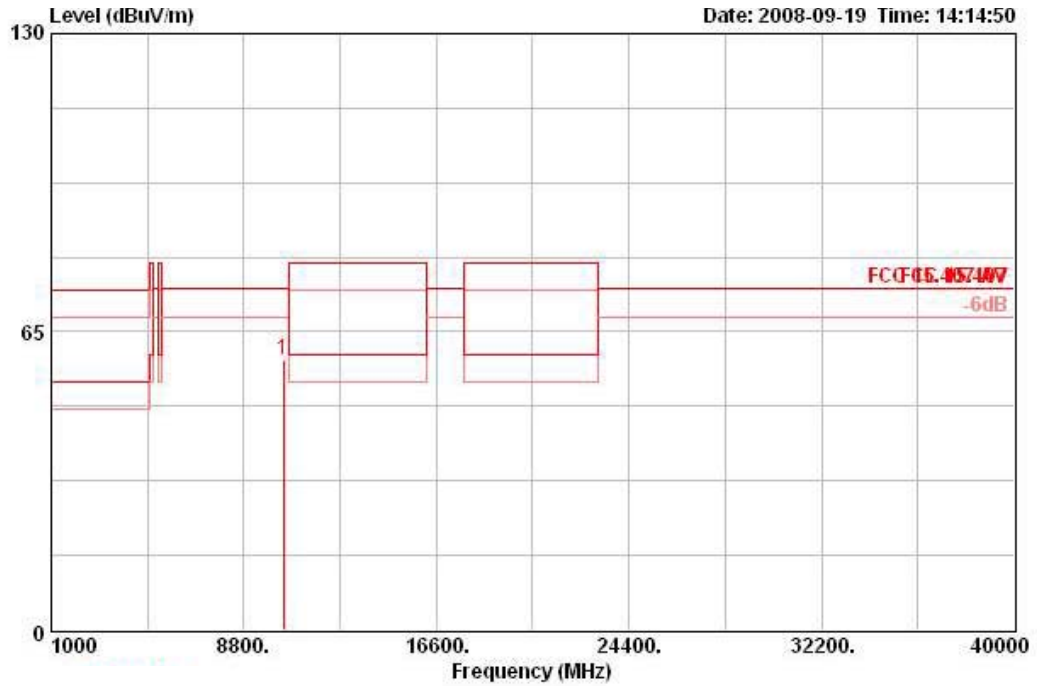

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			deg	cm
1	10395.200	59.01	-15.29	74.30	43.67	39.82	34.72	10.25	PEAK	HORIZONTAL	0	100

**Vertical**

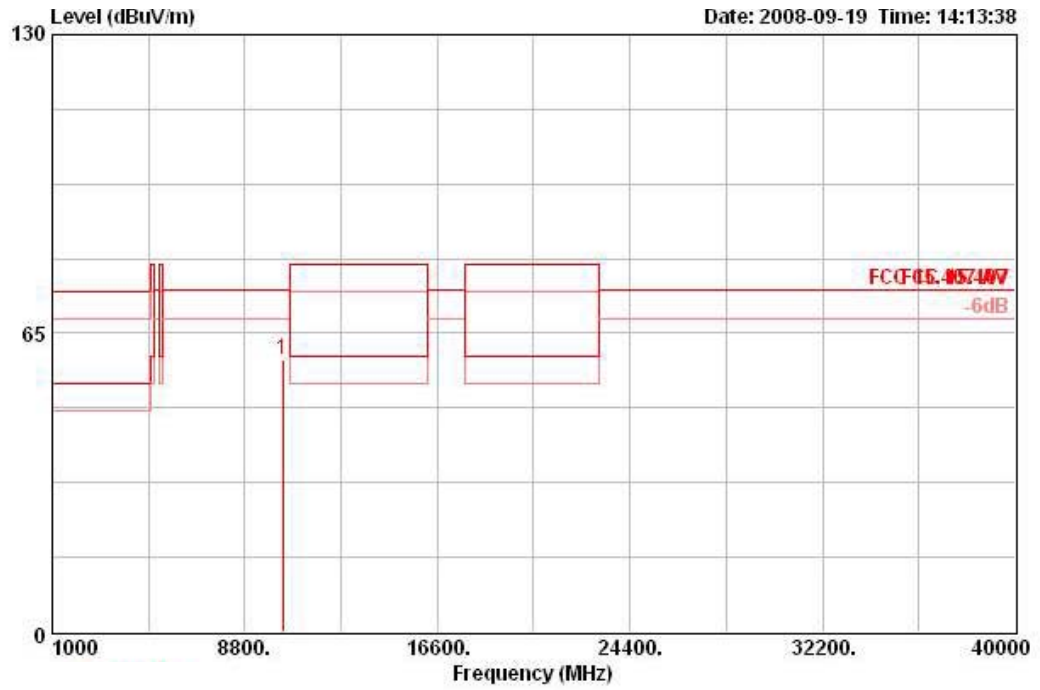


	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Remark	Pol/Phase	Table	Ant
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Factor	Loss			Pos	Pos
					dBuV	dB/m	dB	dB			deg	cm
1	10330.000	59.25	-15.05	74.30	44.12	39.70	34.77	10.20	PEAK	VERTICAL	360	100




<b>Temperature</b>	18°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	Draft n MCS8 20MHz Ch 40 / Ant. A + Ant. B

**Horizontal**

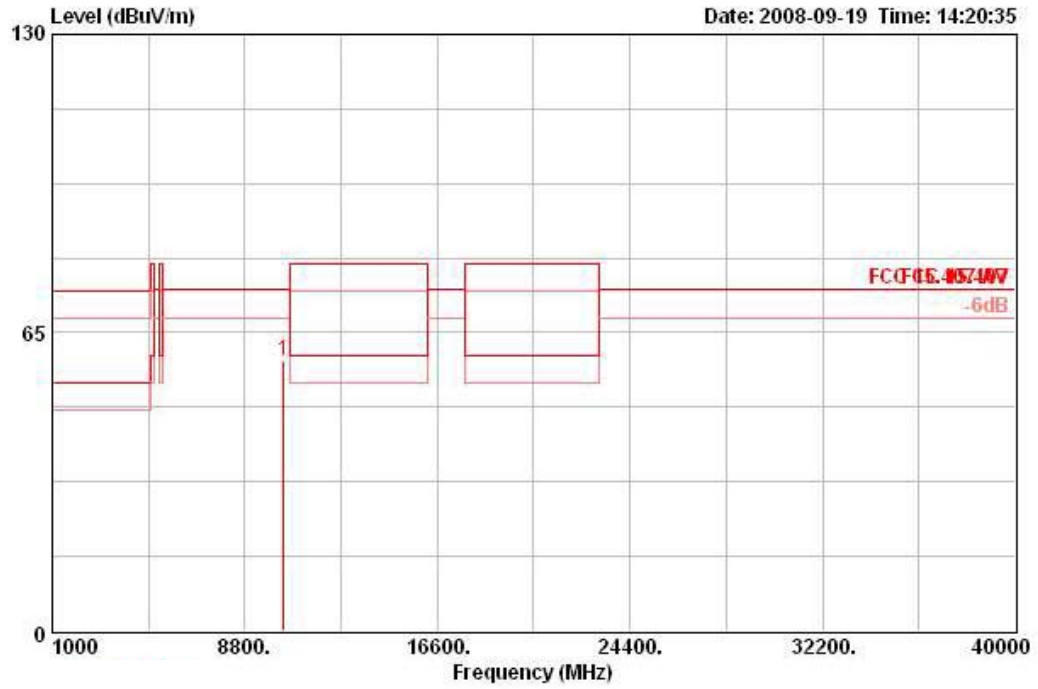

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10359.600	58.84	-15.46	74.30	43.60	39.76	34.74	10.22	PEAK	HORIZONTAL	0	100

**Vertical**

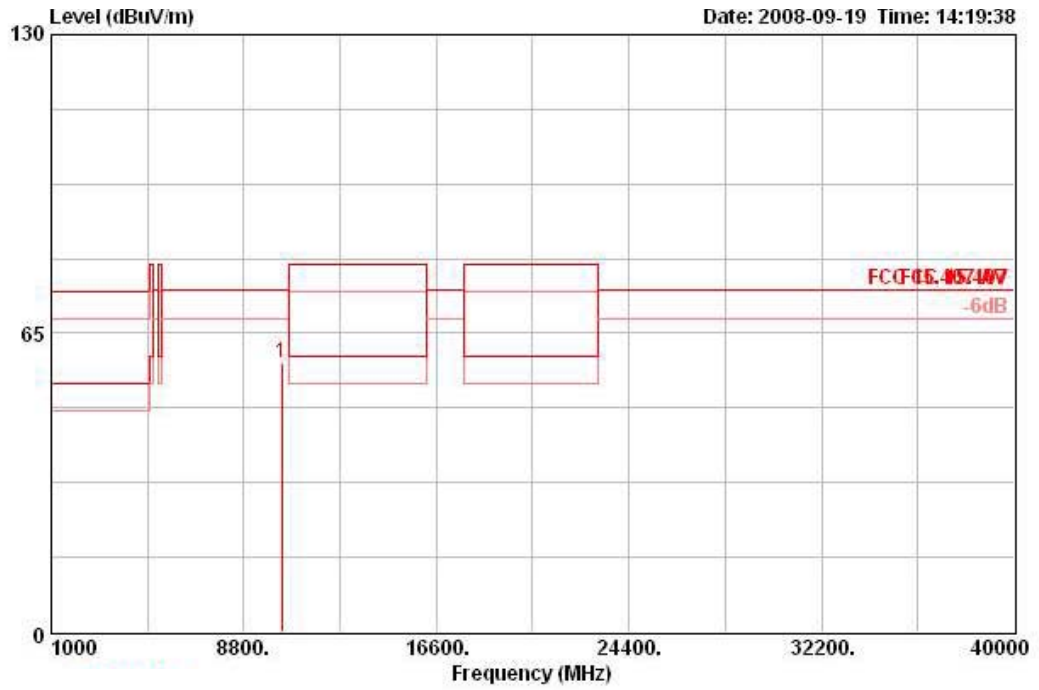


	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Remark	Pol/Phase	Table	Ant
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Factor	Loss			Pos	Pos
					dBuV	dB/m	dB	dB			deg	cm
1	10351.600	58.39	-15.91	74.30	43.19	39.73	34.74	10.22	PEAK	VERTICAL	360	100






<b>Temperature</b>	18°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	Draft n MCS8 20MHz Ch 48 / Ant. A + Ant. B

**Horizontal**

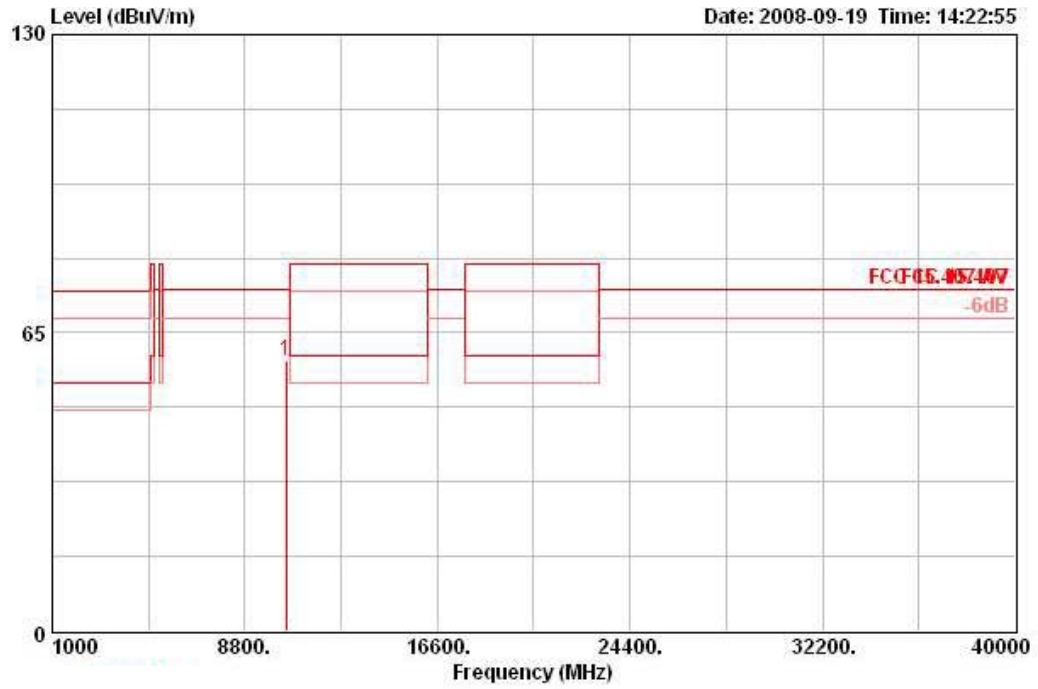

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10488.800	58.77	-15.53	74.30	43.07	39.97	34.62	10.35	PEAK	HORIZONTAL	0	100

**Vertical**

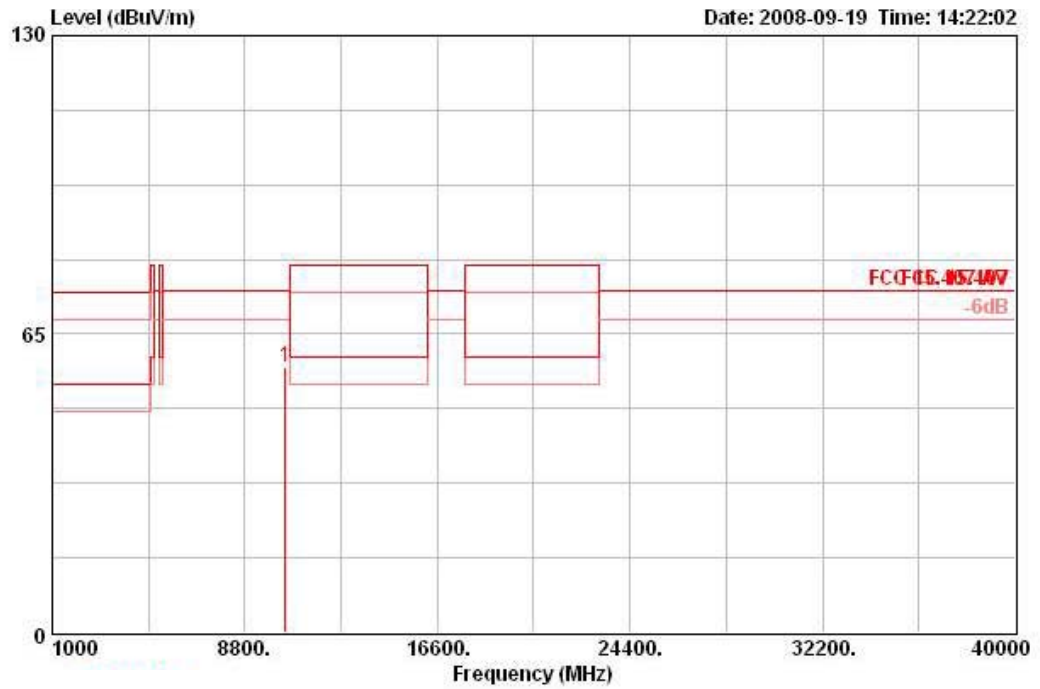


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10451.600	57.76	-16.54	74.30	42.17	39.91	34.64	10.32	PEAK	VERTICAL	360	100




Temperature	18°C	Humidity	63%
Test Engineer	Allen Liu	Configurations	Draft n MCS8 40MHz Ch 38 / Ant. A + Ant. B

**Horizontal**

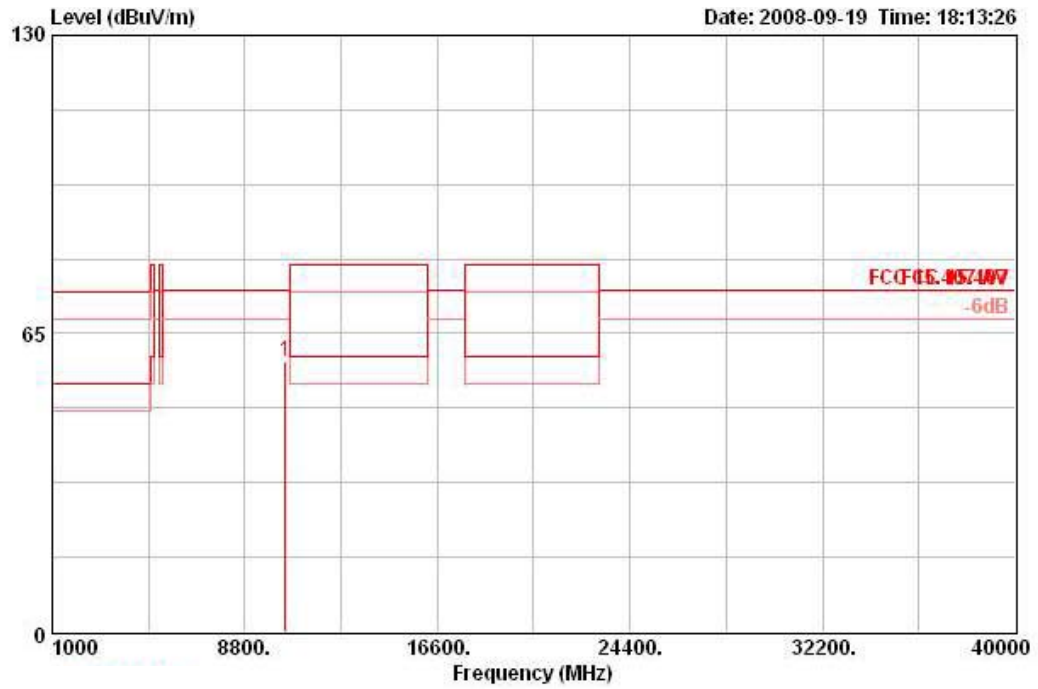

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			deg	cm
1	10428.800	59.00	-15.30	74.30	43.50	39.88	34.67	10.30	PEAK	HORIZONTAL	140	100

**Vertical**

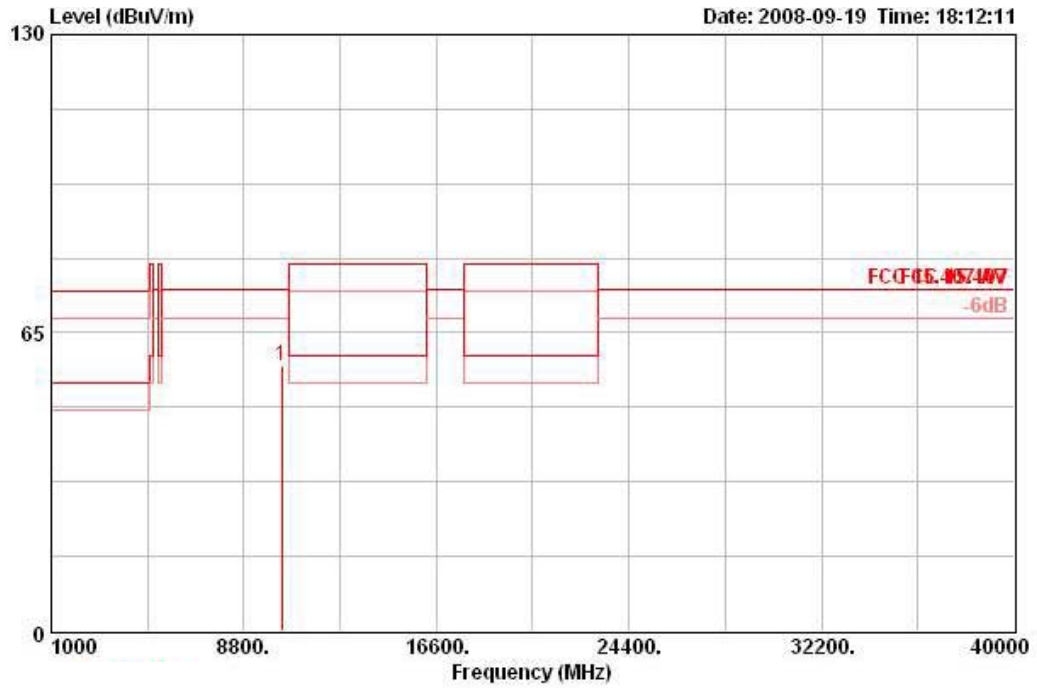


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	10333.600	57.87	-16.43	74.30	42.74	39.70	34.77	10.20 PEAK	VERTICAL	247	100




Temperature	18°C	Humidity	63%
Test Engineer	Allen Liu	Configurations	Draft n MCS8 40MHz Ch 46 / Ant. A + Ant. B

**Horizontal**

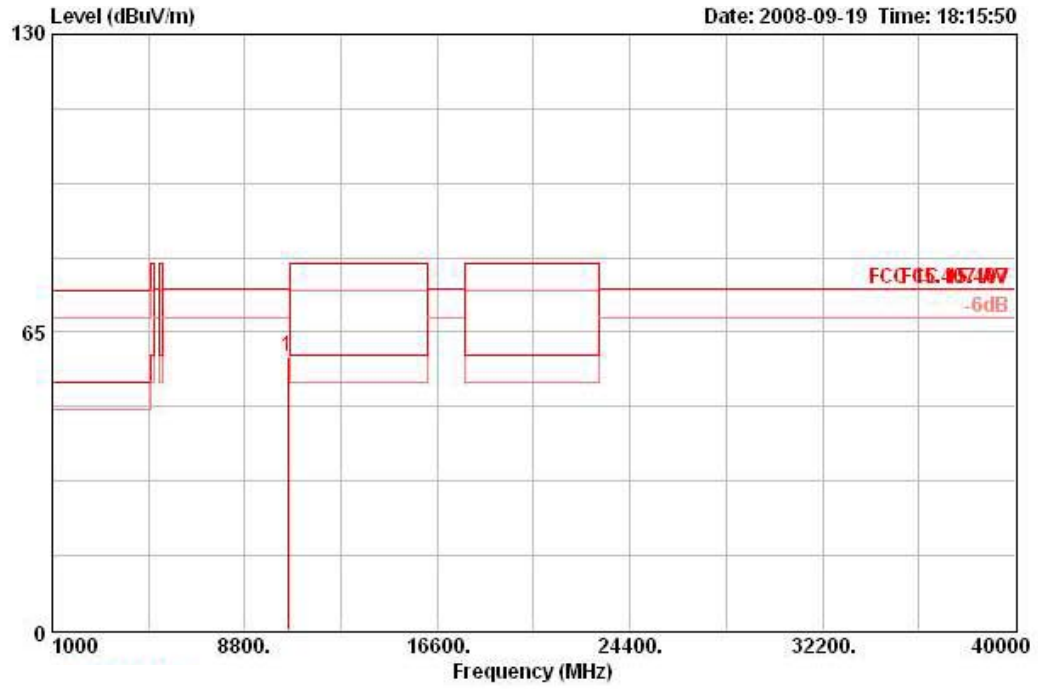

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10542.400	59.77	-14.53	74.30	44.03	39.97	34.60	10.37	PEAK	HORIZONTAL	3	100

**Vertical**

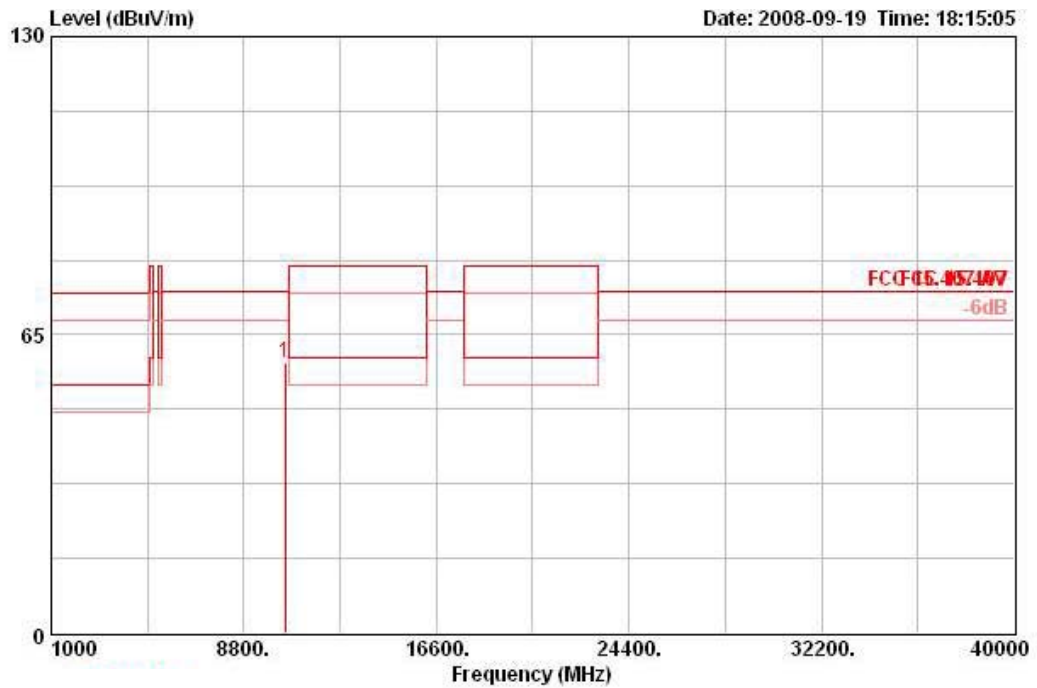

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10470.800	58.79	-15.51	74.30	43.17	39.94	34.64	10.32	PEAK	VERTICAL	230	100

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor [6 dB].


Temperature	18°C	Humidity	63%
Test Engineer	Allen Liu	Configurations	802.11a Ch 36 / Ant. A + Ant. B

**Horizontal**

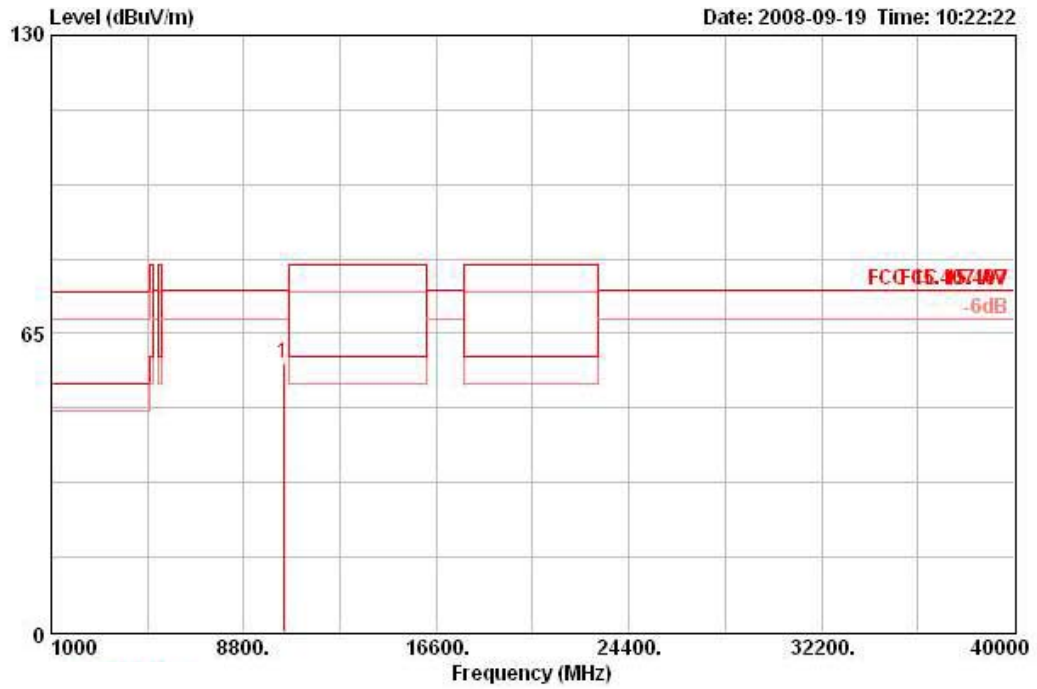

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10392.800	58.51	-15.79	74.30	43.17	39.82	34.72	10.25	PEAK	HORIZONTAL	360	100

**Vertical**

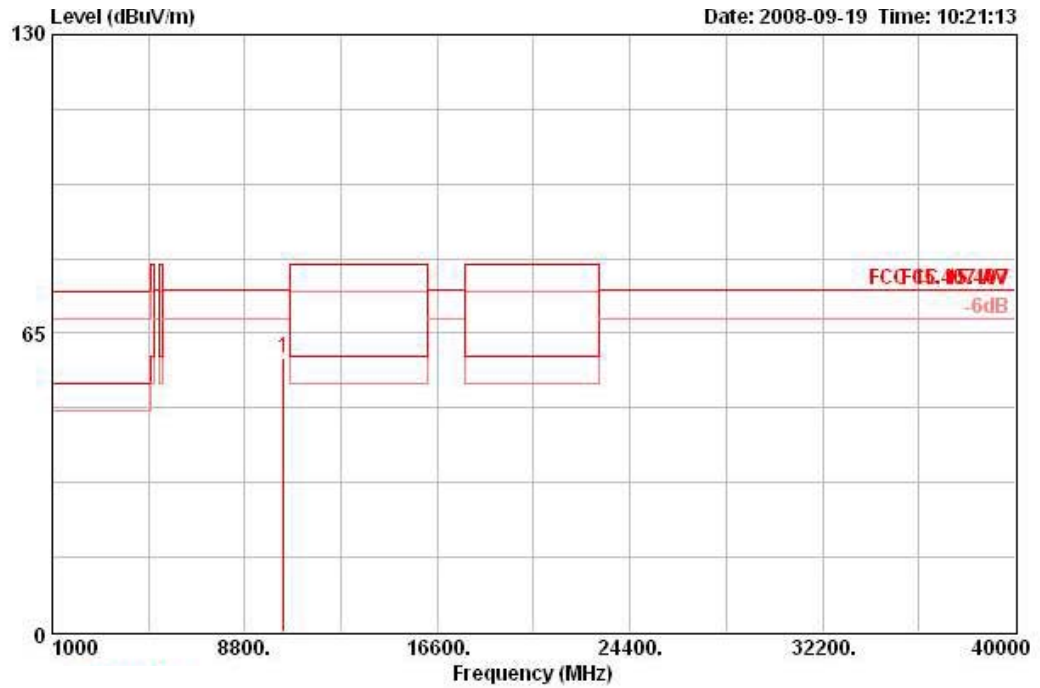


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10359.000	59.67	-14.63	74.30	44.44	39.76	34.74	10.22	PEAK	VERTICAL	75	100






Temperature	18°C	Humidity	63%
Test Engineer	Allen Liu	Configurations	802.11a Ch 40 / Ant. A + Ant. B

**Horizontal**

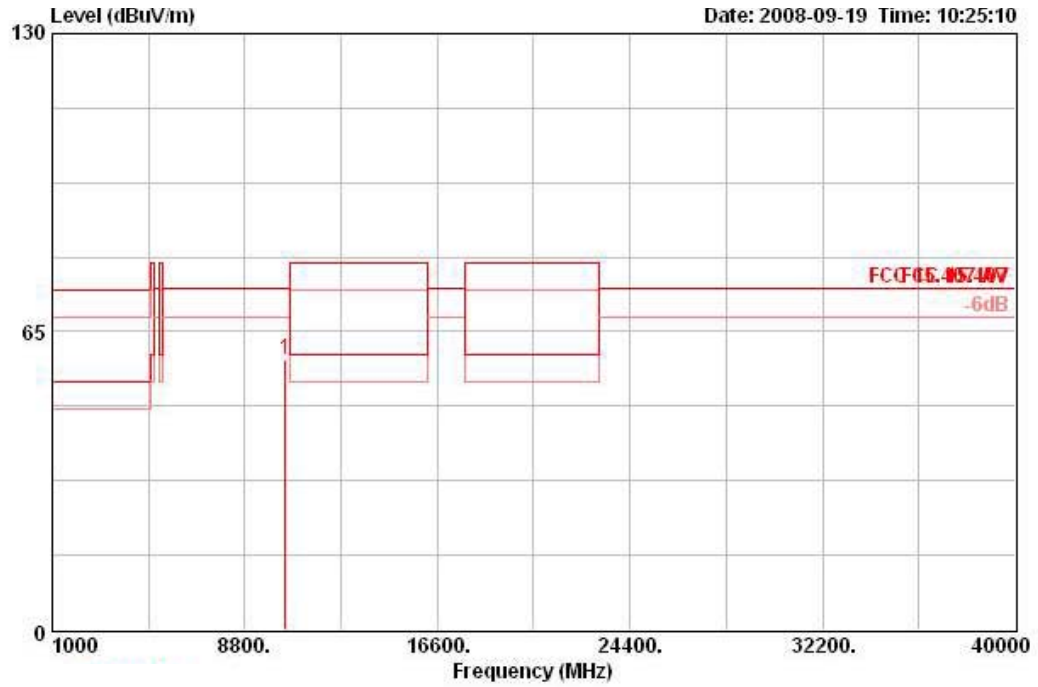

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10437.000	58.83	-15.47	74.30	43.32	39.88	34.67	10.30	PEAK	HORIZONTAL	360	100


**Vertical**

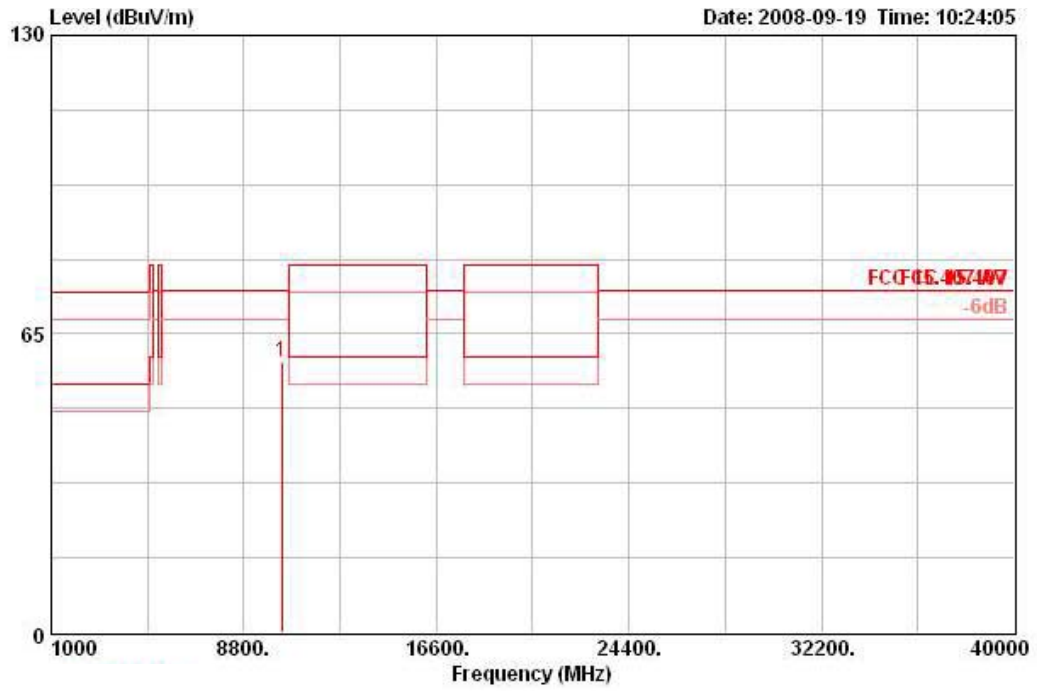

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10351.000	58.74	-15.56	74.30	43.53	39.73	34.74	10.22	PEAK	VERTICAL	0	100


Temperature	18°C	Humidity	63%
Test Engineer	Allen Liu	Configurations	802.11a Ch 48 / Ant. A + Ant. B

**Horizontal**

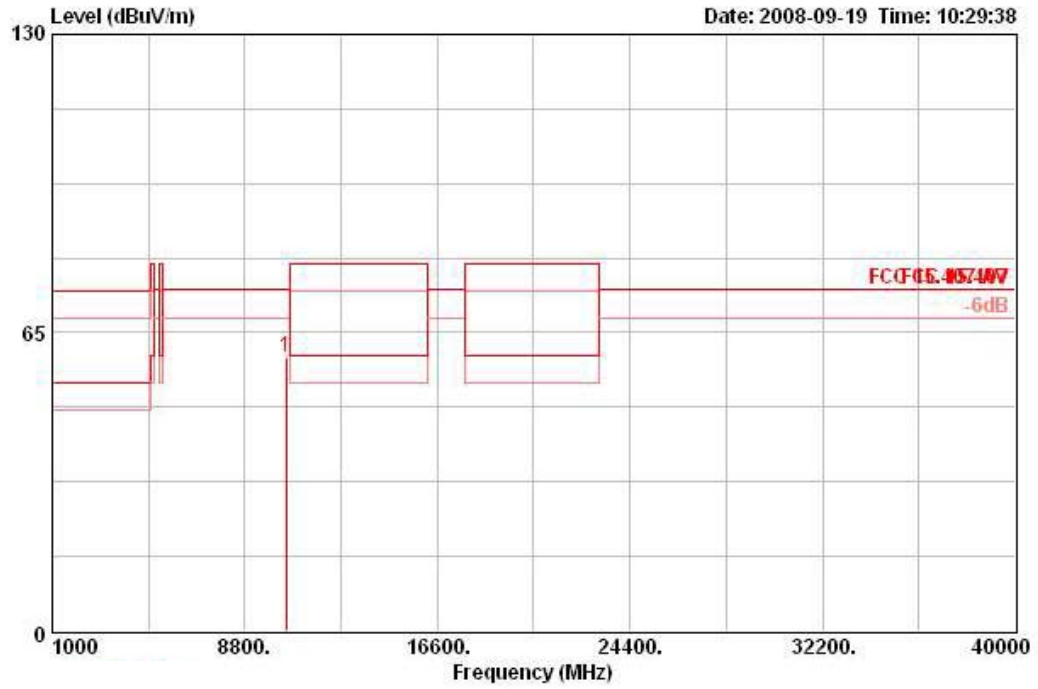

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10467.400	59.72	-14.58	74.30	44.11	39.94	34.64	10.32	PEAK	HORIZONTAL	360	100

**Vertical**

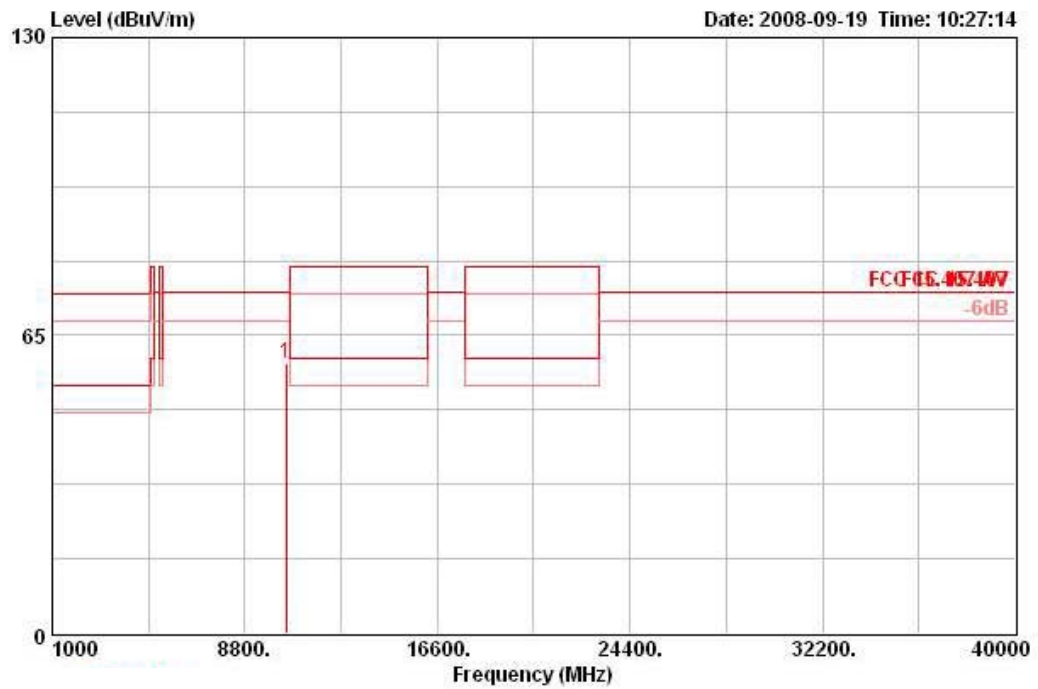

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	10476.200	59.04	-15.26	74.30	43.37	39.94	34.62	10.35	PEAK	VERTICAL	58	100

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor [6 dB].

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, in case the emission falls within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 1 MHz for Peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.7.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	18°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	Drafft n MCS8 20MHz Ch 36 / Ant. A + Ant. B
<b>Test Date</b>	Sep. 19, 2008		

##### Channel 36

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1 @	5150.000	57.57	-2.43	60.00	19.12	34.00	0.00	4.44 AVERAGE	VERTICAL	153	100
2 @	5150.000	73.51	-6.49	80.00	35.07	34.00	0.00	4.44 PEAK	VERTICAL	153	100
3 @	5177.200	104.91			66.41	34.07	0.00	4.43 AVERAGE	VERTICAL	153	100
4 @	5181.000	117.76			79.26	34.07	0.00	4.43 PEAK	VERTICAL	153	100

Item 3, 4 are the fundamental frequency at 5180 MHz.

<b>Temperature</b>	18°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	Drafft n MCS8 20MHz Ch 40 / Ant. A + Ant. B
<b>Test Date</b>	Sep. 19, 2008		

##### Channel 40

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1 @	5147.600	69.28	-10.72	80.00	30.83	34.00	0.00	4.44 PEAK	VERTICAL	292	100
2 @	5150.000	55.64	-4.36	60.00	17.20	34.00	0.00	4.44 AVERAGE	VERTICAL	292	100
3 @	5202.000	105.96			67.43	34.10	0.00	4.43 AVERAGE	VERTICAL	292	100
4 @	5202.400	118.74			80.22	34.10	0.00	4.43 PEAK	VERTICAL	292	100

Item 3, 4 are the fundamental frequency at 5200 MHz.



<b>Temperature</b>	18°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	Drafft n MCS8 40MHz Ch 38 / Ant. A + Ant. B
<b>Test Date</b>	Sep. 19, 2008		

**Channel 38**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1 @	5146.800	74.41	-5.59	80.00	35.97	34.00	0.00	4.44 PEAK	VERTICAL	154	100
2 @	5150.000	58.23	-1.77	60.00	19.78	34.00	0.00	4.44 AVERAGE	VERTICAL	154	100
3 @	5186.800	99.93			61.43	34.07	0.00	4.43 AVERAGE	VERTICAL	154	100
4 @	5202.400	111.48			72.95	34.10	0.00	4.43 PEAK	VERTICAL	154	100

Item 3, 4 are the fundamental frequency at 5190 MHz.

<b>Temperature</b>	18°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	Drafft n MCS8 40MHz Ch 46 / Ant. A + Ant. B
<b>Test Date</b>	Sep. 19, 2008		

**Channel 46**

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1 @	5144.800	68.88	-11.12	80.00	30.44	34.00	0.00	4.44 PEAK	VERTICAL	146	100
2 @	5150.000	55.49	-4.51	60.00	17.05	34.00	0.00	4.44 AVERAGE	VERTICAL	146	100
3 @	5240.000	112.80			74.22	34.17	0.00	4.42 PEAK	VERTICAL	146	100
4 @	5244.800	101.49			62.87	34.20	0.00	4.42 AVERAGE	VERTICAL	146	100

Item 3, 4 are the fundamental frequency at 5230 MHz.



<b>Temperature</b>	18°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	802.11a Ch 36 / Ant. A + Ant. B
<b>Test Date</b>	Sep. 17, 2008		

**Channel 36**

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	5149.000	78.73	-1.27	80.00	42.19	33.04	3.50	0.00	PEAK	121	297	VERTICAL
2 !	5149.200	56.43	-3.57	60.00	19.89	33.04	3.50	0.00	AVERAGE	121	297	VERTICAL
3 @	5178.600	108.52			71.91	33.09	3.52	0.00	AVERAGE	121	297	VERTICAL
4 @	5184.200	119.98			83.37	33.09	3.52	0.00	PEAK	121	297	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

<b>Temperature</b>	18°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Allen Liu	<b>Configurations</b>	802.11a Ch 40 / Ant. A + Ant. B
<b>Test Date</b>	Sep. 17, 2008		

**Channel 40**

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	5111.600	55.10	-4.90	60.00	18.63	32.99	3.47	0.00	AVERAGE	8995	49	VERTICAL
2	5134.800	67.89	-12.11	80.00	31.39	33.01	3.49	0.00	PEAK	119	49	VERTICAL
3 @	5199.200	107.24			70.59	33.12	3.53	0.00	AVERAGE	119	49	VERTICAL
4 @	5199.200	119.45			82.80	33.12	3.53	0.00	PEAK	119	49	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or  $\pm 20\text{ppm}$  (Draft n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20\text{ppm}$  (Draft n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .
8. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

### 4.8.4. Test Setup Layout

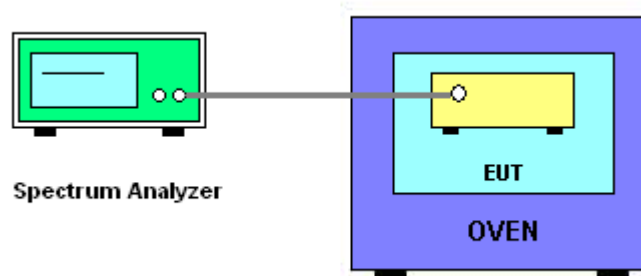

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	<b>5200</b>
126.50	5200.0348
110.00	5200.0211
93.50	5200.0137
Max. Deviation (MHz)	<b>0.034800</b>
Max. Deviation (ppm)	<b>6.69</b>

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	<b>5200</b>
-30	5200.0495
-20	5200.0412
-10	5200.031
0	5200.0211
10	5200.0101
20	5200.0038
30	5199.9987
40	5199.9872
50	5199.9861
Max. Deviation (MHz)	<b>0.049500</b>
Max. Deviation (ppm)	<b>9.52</b>

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Mar. 03, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2008	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2008	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2008	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN ST08	21653	9kHz – 30MHz	Mar. 27, 2008	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2008	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 14, 2008	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2009	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2008	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2008*	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2008*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9 kHz - 30 GHz	Oct. 08, 2008	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 30 GHz	Oct. 06, 2008	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 12, 2008	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 12, 2008	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 04, 2008	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 04, 2008	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.18, 2008	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.16, 2009	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 10, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 11, 2008	Conducted (TH01-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 11, 2008	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 30, 2008*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2008	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Jul. 18, 2008	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 10, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: \* Calibration Interval of instruments listed above is two year.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection : Accreditation Program for Telecommunication Equipment Testing Laboratory

  
Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.